




US 20180146914A1

(19) **United States**(12) **Patent Application Publication**
Snow et al.(10) **Pub. No.: US 2018/0146914 A1**(43) **Pub. Date: May 31, 2018**(54) **METHOD FOR IMPROVING HEAD
POSITION OF OSTEOPOROSIS PATIENTS****Publication Classification**(71) Applicants: **Judy Sibille Snow**, Los Altos, CA
(US); **Robert James Snow**, Los Altos,
CA (US)(51) **Int. Cl.****A61B 5/00** (2006.01)**A61B 5/11** (2006.01)**A61B 5/021** (2006.01)(52) **U.S. Cl.**CPC **A61B 5/486** (2013.01); **A61B 5/7405**
(2013.01); **A61B 5/021** (2013.01); **A61B**
5/1121 (2013.01); **A61B 5/112** (2013.01);
A61B 5/4833 (2013.01)(72) Inventors: **Judy Sibille Snow**, Los Altos, CA
(US); **Robert James Snow**, Los Altos,
CA (US)(21) Appl. No.: **15/883,605**

(57)

ABSTRACT(22) Filed: **Jan. 30, 2018****Related U.S. Application Data**(63) Continuation of application No. 13/777,423, filed on
Feb. 26, 2013, now abandoned.(60) Provisional application No. 61/727,800, filed on Nov.
19, 2012.

An apparatus is disclosed that comprises a sensor to detect a medical condition; a processor to evaluate the signals from the sensor; an input device and read/write medium to record cues that correspond to the various condition(s) detected by the sensor; and an audio output device to play prerecorded audio cues when a particular medical condition is detected. The audio cue provides a unique reminder message to encourage a person to take a certain action that is healthy.

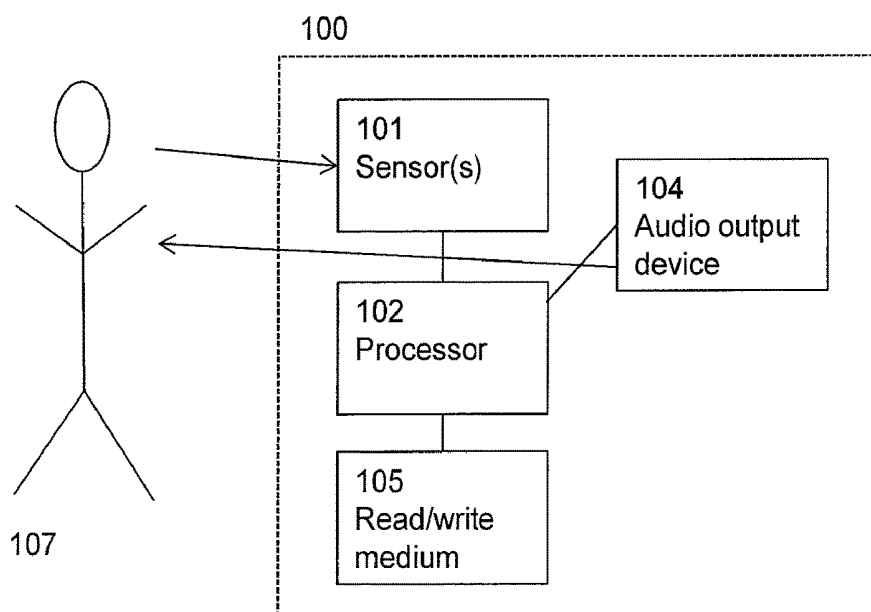

100

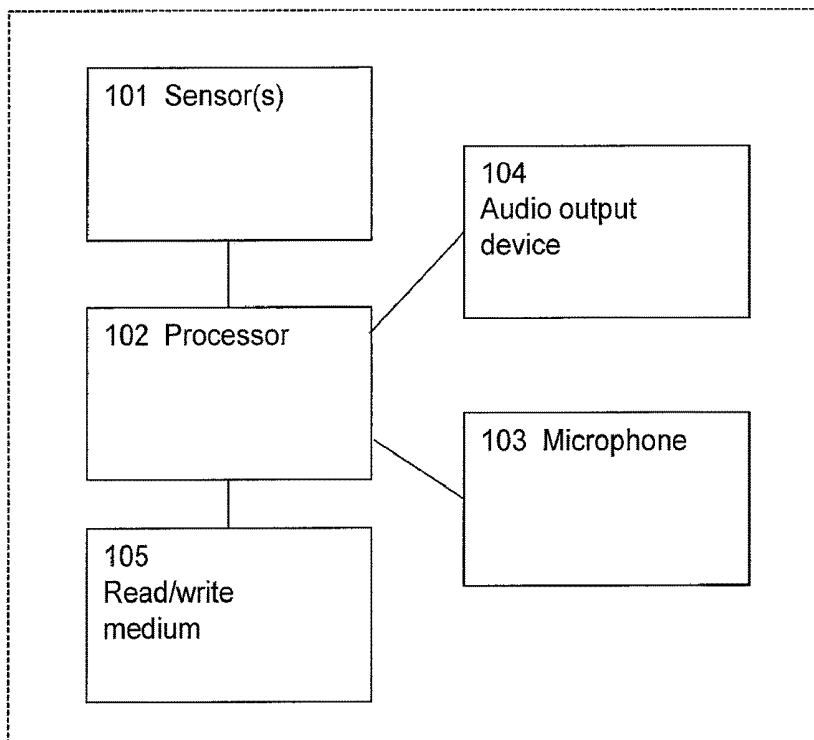


FIG. 1

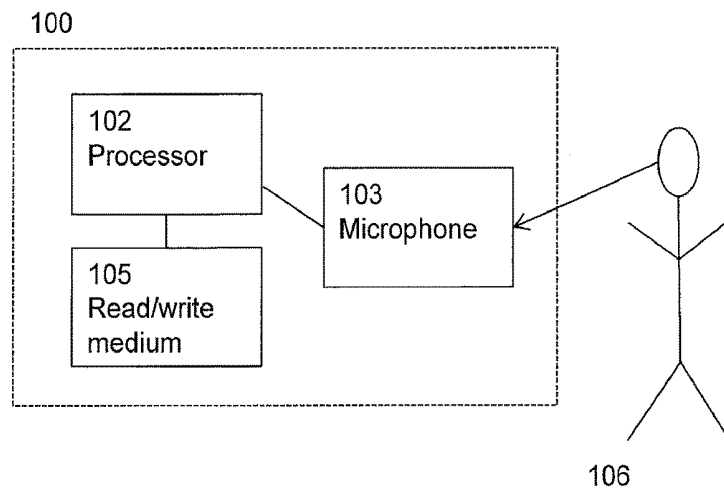


FIG. 2

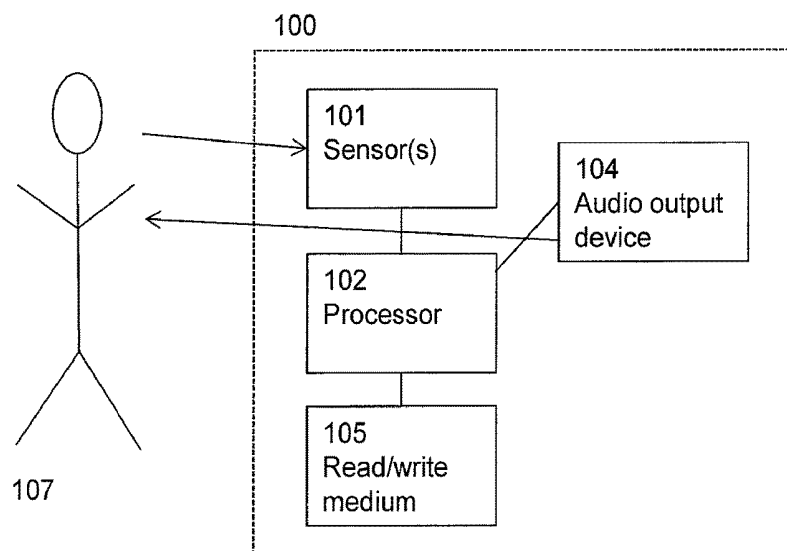


FIG. 3

301 Desired
Head Position

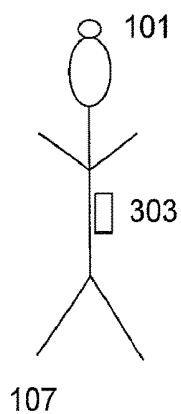


FIG. 4A

302 Undesired
Head Position

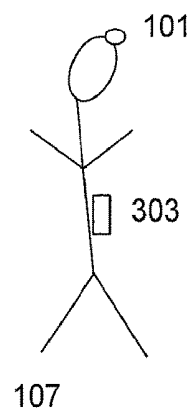


FIG. 4B

301 Desired
Head Position

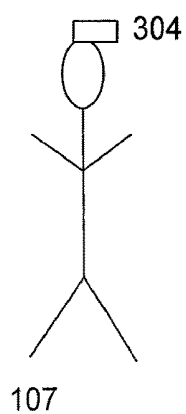


FIG. 5A

302 Undesired
Head Position

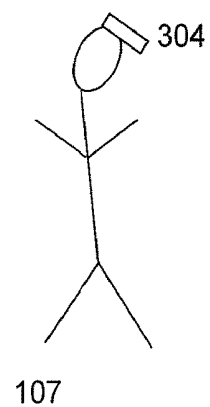


FIG. 5B




FIG. 6

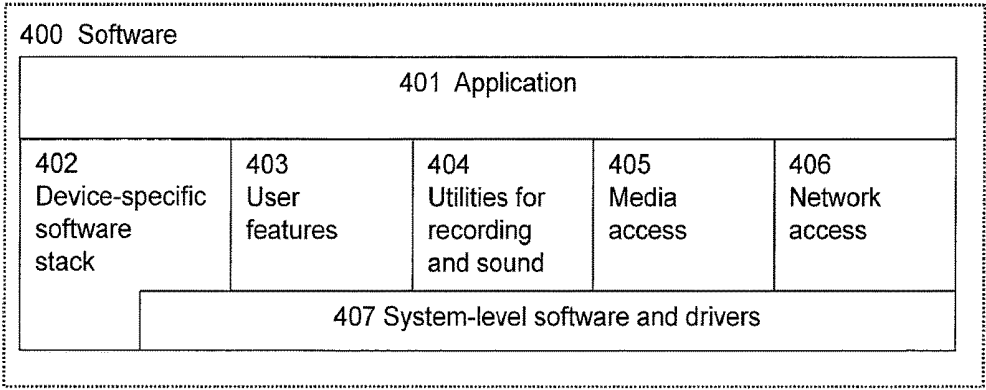


FIG. 7

METHOD FOR IMPROVING HEAD POSITION OF OSTEOPOROSIS PATIENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of copending U.S. nonprovisional application Ser. No. 13/777,423, filed Feb. 26, 2013, now abandoned; which claimed priority under 35 U.S.C. § 119(e) from U.S. Provisional Application Ser. No. 61/727,800, filed Nov. 19, 2012, entitled “Audio Feedback for Medical Conditions.” The full disclosures of both of these priority applications are fully incorporated by reference herein.

TECHNICAL FIELD

[0002] This invention relates to the field of applications designed to monitor and provide audio feedback for human medical conditions.

BACKGROUND ART

[0003] Some people have a medical condition that is exacerbated by physical conditions. For example, some people look down habitually when they walk. This is especially noticeable in people who develop osteoporosis because their neck no longer straightens, and it is easier and more natural for them to look down. Physical therapists encourage patients to keep their head up to prevent them from getting dizzy. The consequences of dizziness can be serious, such as a fall resulting in a broken bone.

[0004] Recordable greeting cards have been disclosed (e.g., EP0207258A1 to Weigl, D580488 to Zarfes), as have a plethora of medical sensors. Some of these sensors may emit vibrations or sounds. A Lumoback product (webpage visited Nov. 16, 2012), <http://www.lumoback.com/?x=saying>, comprises a belt that is worn around a patient's abdomen, and that provides vibrations when the patient's lower back slouches, reminding the patient to stand up or sit up straight.

[0005] Unfortunately, the physical therapist isn't always with the patient who needs a reminder in response to a physical condition, such as to lift the head up. Although a vibration could be useful for as a reminder for a single condition, a vibration does not readily differentiate among various multiple physical conditions.

[0006] There is an unfilled need for an improved device which can both detect certain medically significant conditions and provide enhanced real-time feedback to the user to inform them of the detected medical condition, with the flexibility of providing different cues when the detected conditions are different.

DISCLOSURE OF THE INVENTION

[0007] We have discovered an apparatus that comprises a sensor to detect a medical condition, or more generally a body measurement of any type, for example a condition related to the movement or position of the body or part of the body of an individual; a processor to evaluate the signals from the sensor; an optional microphone; a read/write medium to record audio cues that correspond to the various conditions detected by the sensor; and an audio output device to play prerecorded audio cues to provide immediate feedback when a particular medical condition is detected.

[0008] The elements of the apparatus need not be physically connected, but can be configured as discrete electronic devices inter-connected via wired or wireless techniques known in the art, for example infrared signals, or radio frequency (RF) signals such as Bluetooth.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 illustrates schematically one embodiment of the invention.

[0010] FIG. 2 illustrates schematically one embodiment of a person recording one or more audio cues for the patient.

[0011] FIG. 3 illustrates schematically a patient being monitored by a sensor and receiving audio cues in accordance with one embodiment of the invention.

[0012] FIGS. 4A and 4B illustrate schematically an example configuration with two discrete physical devices for detecting a desirable and undesirable physical condition of a patient's head position.

[0013] FIGS. 5A and 5B illustrate schematically a second example configuration with one discrete physical device for detecting a desirable and undesirable physical condition of a patient's head position.

[0014] FIG. 6 illustrates schematically an alternative embodiment having multiple sensors, for example for detecting a patient's head position, hand position, blood pressure, and gait.

[0015] FIG. 7 illustrates schematically one embodiment of software architecture for a system to support the novel device.

MODES FOR CARRYING OUT THE INVENTION

[0016] As illustrated in the embodiment depicted in FIG. 1, system 100 comprises sensor(s) 101, processor 102, microphone 103, audio output device 104 and read/write medium 105. One or more sensor(s) 101 can detect motion, position, or other body measurements and can be used or positioned in a variety of ways. The processor 102 can be single, multi, or parallel. The read/write medium 105 can be RAM, flash, solid state, hard disk, virtual cloud storage, or other storage means. The optional microphone 103, and the audio output device 104 can be single or multi, mono or stereo, etc. The components in this configuration can be located in one or more physical packages. Connectivity can be wired, wireless, or virtual.

[0017] One embodiment to record audio cues is shown in FIG. 2. Any person 106 can record cues using a microphone 103 and a processor 102 that is capable of storing the message on a read/write medium 105. The cues can be arbitrary, but it is preferred that the recordings be appropriate to the medical conditions of the specific patient. It can direct the patient 107 with specific instructions, such as “Lift your head up!” In addition, the recording can be in the patient's language of choice. An unexpected benefit is that the person who makes the recording can be a person, such as a grandchild, whose voice recording may be able to cue the patient in an especially motivating and positive way. The processor 102, microphone 103, and read/write medium 105 can be located in a single physical package or can be contained in multiple discrete packages and inter-connected electronically using any one of a number of well-known physically wired, wireless, or virtual connections. In an alternative embodiment, the system does not include a

microphone. The audio cues may be recorded externally through means known in the art, for example with a voice recorder or a computer equipped with a microphone, and file(s) containing externally-recorded audio cue(s) may be uploaded to the system.

[0018] FIG. 3 shows one embodiment to monitor a patient 107 with sensor(s) 101. The sensor(s) 101 can be physically attached to the patient 107, or can be a remote sensor, such as a camera monitoring the patient. A processor 102 interprets data from the sensor(s) 101 and determines whether at least one medical condition is met. The medical condition can be an unhealthy change in position, pattern of motion, or other measurable body data. Multiple medical conditions can be simultaneously addressed. FIG. 6 shows an example employing multiple sensors 101: if the patient's blood pressure is detected to drop at the same time that her head position drops, she can be told to "Lie down!" to prevent a fall. Referring back to FIG. 3, the processor 102 then selects the appropriate cue from a read/write medium 105 and plays the cue on an audio output device 104 such as a speaker or headset. The sensor(s) 101, processor 102, read/write medium 105, and audio output device 104 can be located in a single physical package or can be contained in multiple discrete packages and inter-connected electronically using any one of a number of well-known physically wired, wireless, or virtual connections.

[0019] In an alternative embodiment, rather than an audio cue an output device generates another type of feedback signal, such as a buzz, vibration, light, etc.

[0020] FIGS. 4A and 4B illustrate one embodiment, where a sensor 101 is attached to a hat worn on the patient's 107 head, and the rest of the hardware is contained in a package 303 attached to the patient's belt. The desired head position 301 of the patient 107 is looking straight ahead. The medical condition being detected is when the head drops or looks down, as shown by the undesired head position 302. In this example, the processor 102, microphone 103, audio output device 104, and read/write medium 105, can all be contained in an Android device or other smartphone 303, and the sensor 101 comprises an accelerometer connected wirelessly, e.g. by Bluetooth.

[0021] FIGS. 5A and 5B illustrate an alternative embodiment, where all hardware is in a single package 304 attached to a hat worn on the patient's 107 head. The desired head position 301 of the patient 107 is looking straight ahead. The medical condition being detected is when the head drops or looks down, as shown by the undesired head position 302. In this example, the accelerometer sensor, processor, microphone, audio output device, and read/write medium are all contained in one physical package 304, attached to patient 107's hat. In this configuration, the one package 304 could be a device running iOS, such as an iPhone. Additional embodiments could incorporate other custom or off-the-shelf hardware components in a variety of configurations and complexity.

EXAMPLE

[0022] A working device configured as depicted in FIG. 4 has been built and successfully tested to monitor and provide feedback for a patient's head position. The patient 107 showed increased compliance in keeping his head up while walking. He was much more motivated hearing his grandchild's voice in a recording, rather than another adult, such as his daughter, whom he perceived as "nagging".

[0023] In accordance with the present invention there are many additional examples of uses for sensor(s) 101 that could detect movement or position of a patient's body or body part with an accelerometer as shown in FIG. 6. For example, a sensor 101 attached to a shoe could detect a person who is dragging her foot; a medical condition that can result in tripping. A person with nervous habits such as biting their fingernails or pulling their hair (trichotillomania) could have a sensor 101 that would detect hand movements that encompass the undesired behavior. A patient could benefit from feedback on various nervous habits that might or might not rise to the level at which the nervous habits would be considered a "medical condition." Such a nervous habit is nevertheless considered a "medical condition" for purposes of this disclosure, unless context clearly indicates otherwise.

[0024] FIG. 7 illustrates the components of the operating software or firmware 400 for one embodiment of the invention. The software 400 comprises the system-level software and drivers 401 for whichever physical embodiment is selected. Upon this software or firmware, a layer of software exists that can be used by the application 406 in a variety of ways as described herein. Standard utilities for recording and sound 403 are typically available in a computer system to support input from a microphone 103 for audio recording and output to an audio output device 104. A device-specific software stack 401 for a specific sensor 101 may be available commercially or through open source, or an application developer can add specific code for a particular sensor.

[0025] In one embodiment, the application 406 detects a physical condition based on a signal from the sensor(s) 101, selects the appropriate audio cue, and sends it to the audio output device 104. In an expanded embodiment, the application can also use the user features 402 of a system to implement a display showing a record of progress for the patient 107 for each sensor 101, while logging this data on the read/write medium 105. One unexpected result of using this expanded embodiment is that we have found that the audio cues can be optimized for the individual patient, based on the record of that patient's past performance or results. A second unexpected benefit is that the logged data can be exported or transmitted via standard network access 406, to other computers for analysis or distribution to medical providers, e.g., via the cloud.

[0026] The complete disclosures of all references cited in this specification are hereby incorporated by reference. In the event of an otherwise irreconcilable conflict, however, the present specification shall control.

What is claimed:

1. A method for improving the head position of a person with osteoporosis, said method comprising:

- (a) monitoring the position of the person's head, and simultaneously monitoring the gait of the person; and
- (b) providing immediate feedback to the person when the person's head moves into an undesirable position while the person is simultaneously walking; wherein:
 - (i) the person is a human with osteoporosis, and the person has habitual difficulty keeping the person's head up while simultaneously walking;
 - (ii) the position of the person's head is monitored with one or more accelerometers on the person's head;
 - (iii) the gait of the person is monitored with one or more sensors;

- (iv) measurements of the head position and measurements of the gait are correlated to determine when the person's head has an undesirable downward-looking position at a time when the person simultaneously is walking; and one or more audio messages are played when this condition is detected; wherein an undesirable head position is one in which the person looks down to a degree that is medically unhealthy;
 - (v) there is no delay between determining that an undesirable head position exists, and playing the one or more audio output cues for the person; so that the person receives immediate feedback concerning any undesirable downward-looking head position while the person is simultaneously walking; and
 - (vii) the one or more audio messages comprise verbal instructions to the person or verbal encouragement for the person, given in the person's language of choice, to prompt the person to keep the person's head in a healthy position.
2. The method of claim 1, wherein the one or more audio messages comprise one or more pre-recorded messages in the person's own voice.

3. The method of claim 1, wherein the one or more audio messages comprise one or more pre-recorded messages in the voice of someone other than the person.

4. The method of claim 1, additionally comprising the step of recording the measurements of the accelerometers and the measurements of the sensors, and analyzing those measurements to assess the person's compliance.

5. The method of claim 4, additionally comprising the step of analyzing the recorded measurements to compare between outcomes with alternative audio messages to determine which audio messages result in better compliance; and subsequently modifying the audio messages to increase compliance.

6. The method of claim 1, additionally comprising the steps of measuring the person's blood pressure; and of monitoring for a combination of a drop in blood pressure and an undesirable head position that indicates that the person is in increased danger of fainting or falling.

7. The method of claim 1, additionally comprising the step of creating one or more audio messages tailored specifically for that person.

* * * * *

专利名称(译)	改善骨质疏松症患者头位的方法		
公开(公告)号	US20180146914A1	公开(公告)日	2018-05-31
申请号	US15/883605	申请日	2018-01-30
[标]申请(专利权)人(译)	雪朱迪该 雪ROBERT JAMES		
申请(专利权)人(译)	SNOW, JUDY SIBILLE SNOW, 罗伯特·詹姆斯·		
当前申请(专利权)人(译)	SNOW, JUDY SIBILLE SNOW, 罗伯特·詹姆斯·		
[标]发明人	SNOW JUDY SIBILLE SNOW ROBERT JAMES		
发明人	SNOW, JUDY SIBILLE SNOW, ROBERT JAMES		
IPC分类号	A61B5/00 A61B5/11 A61B5/021		
CPC分类号	A61B5/7405 A61B5/4833 A61B5/112 A61B5/021 A61B5/1121 A61B5/486		
优先权	61/727800 2012-11-19 US		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种装置，其包括用于检测医疗状况的传感器;处理器，用于评估来自传感器的信号;输入设备和读/写介质，以记录对应于由传感器检测到的各种条件的提示;以及音频输出设备，用于在检测到特定的医疗状况时播放预先记录的音频提示。音频提示提供了一个独特的提醒信息，鼓励人们采取某种健康的行动。

