




US 20200178897A1


(19) **United States**(12) **Patent Application Publication**  
**Osypka et al.**(10) **Pub. No.: US 2020/0178897 A1**(43) **Pub. Date: Jun. 11, 2020**(54) **INTRAVASCULAR MAPPING CATHETER  
WITH IRRIGATED BASKET ASSEMBLY**(52) **U.S. Cl.**CPC ..... *A61B 5/6858* (2013.01); *A61B 5/0422*  
(2013.01); *A61B 2562/0209* (2013.01); *A61B*  
*2217/007* (2013.01); *A61L 29/02* (2013.01)(71) Applicant: **Oscor Inc.**, Palm Harbor, FL (US)(72) Inventors: **Thomas P. Osypka**, Palm Harbor, FL  
(US); **Timothy Searfoss**, New Port  
Richey, FL (US); **Allan Fuentes**, Spring  
Hills, FL (US)(21) Appl. No.: **16/214,608**(22) Filed: **Dec. 10, 2018****Publication Classification**(51) **Int. Cl.***A61B 5/00* (2006.01)*A61B 5/042* (2006.01)*A61L 29/02* (2006.01)

(57)

**ABSTRACT**


An intravascular catheter system for cardiac mapping is disclosed which includes a housing having opposed proximal and distal portions, an elongated catheter shaft operatively associated with the distal portion of the housing, an elongated electrical conduit operatively associated with the proximal portion of the housing and an elongated irrigation conduit operatively associated with the proximal portion of the housing, wherein an irrigated basket assembly is operatively associated with a distal end portion of the catheter shaft and it includes a plurality of circumferentially arranged electrically insulated tubular splines each having a plurality of longitudinally spaced apart mapping electrodes thereon.

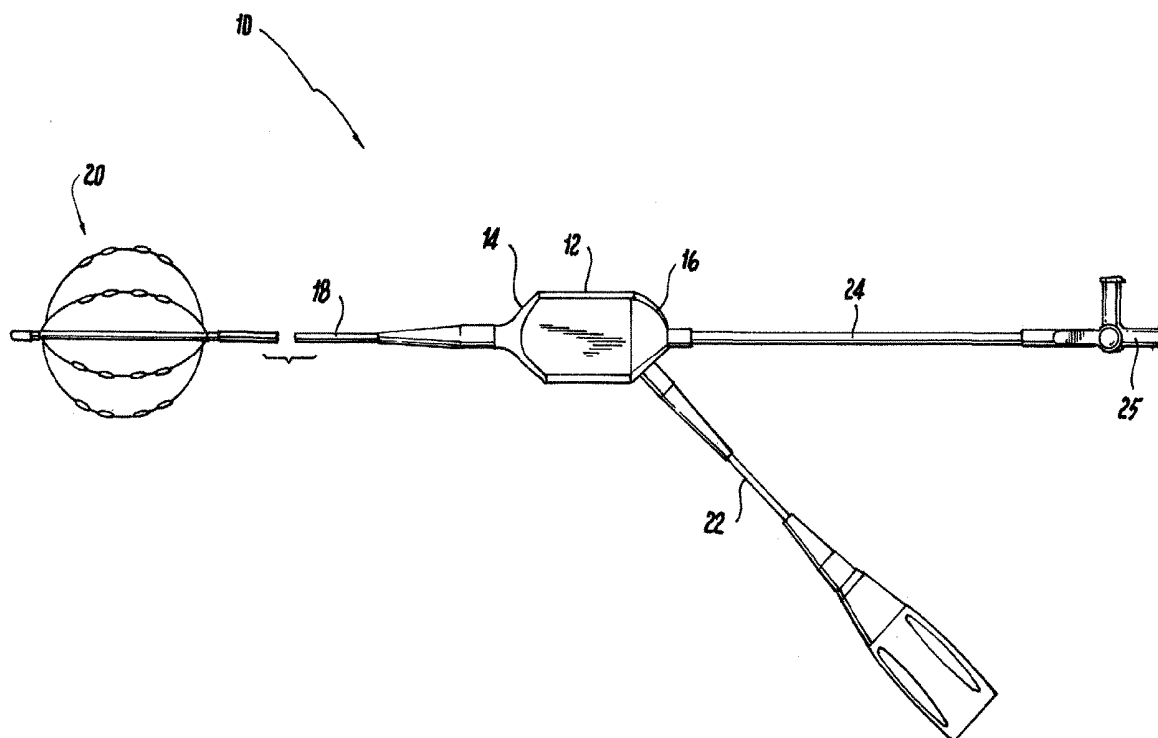

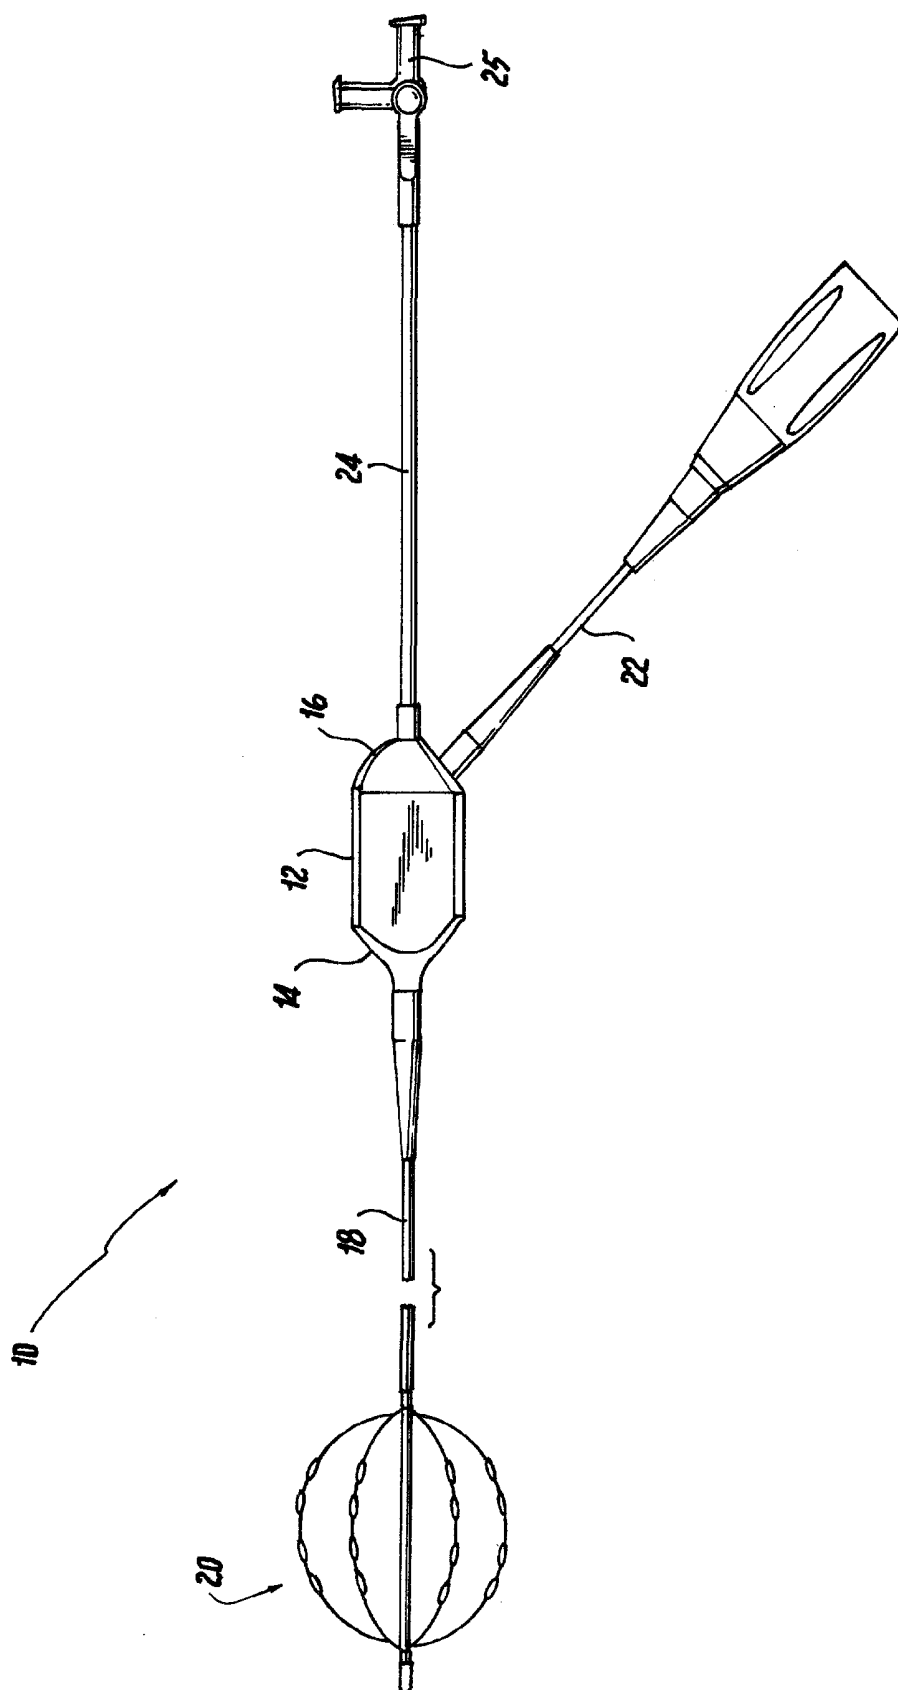



**Fig. 1**

**Fig. 2**

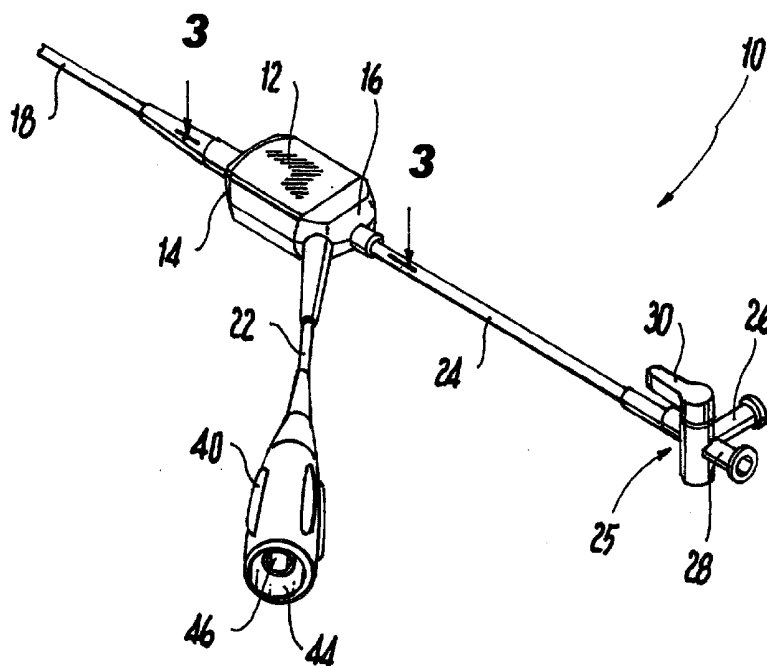


**Fig. 3**

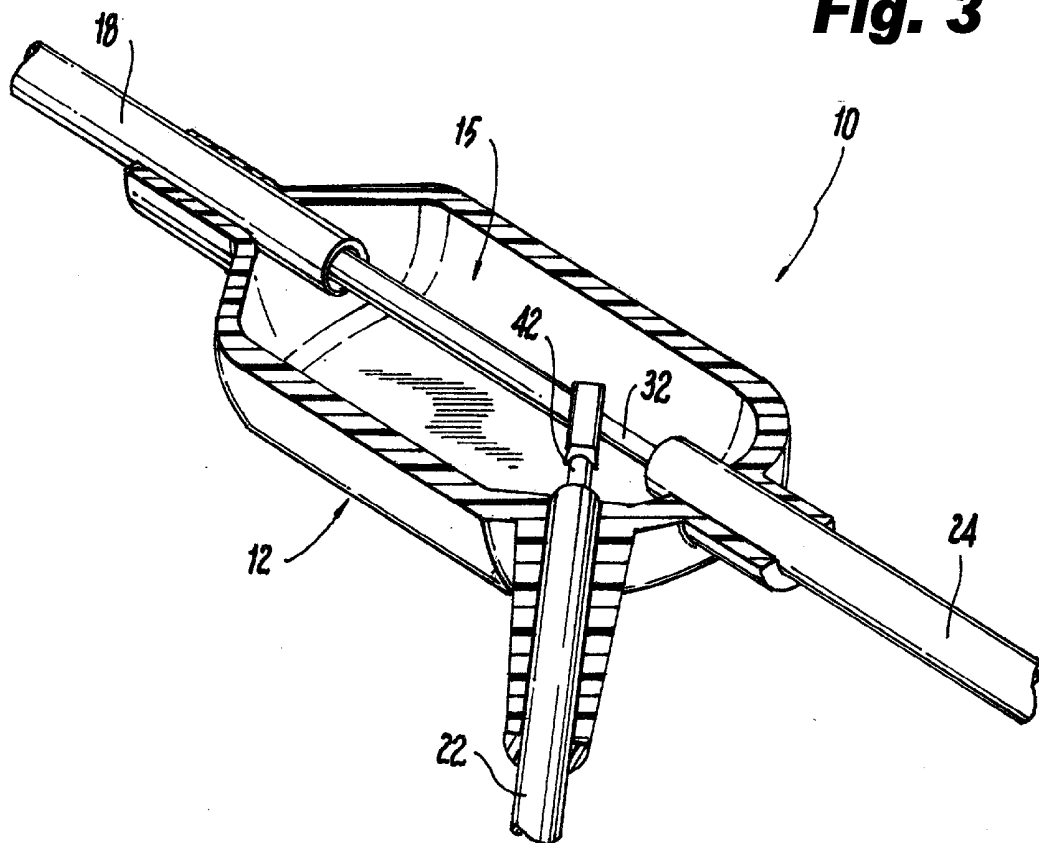


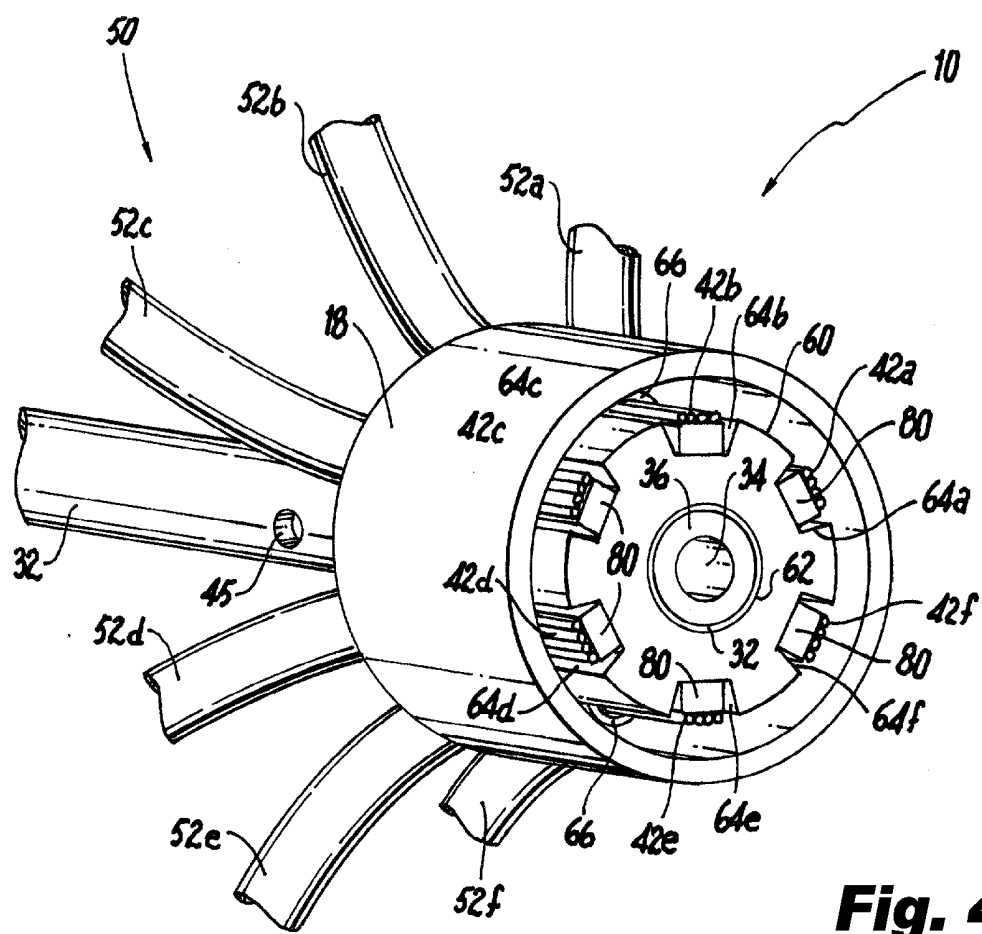


**Fig. 4**

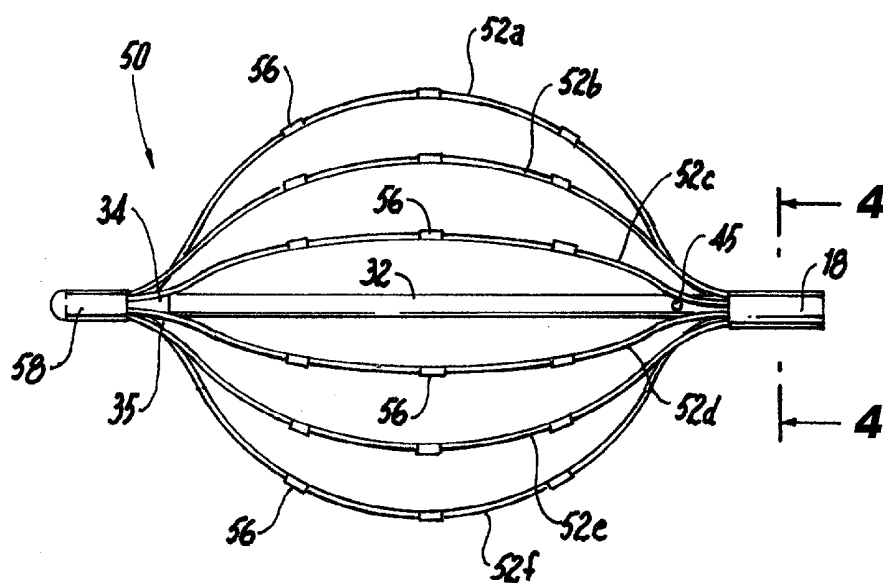


**Fig. 5**

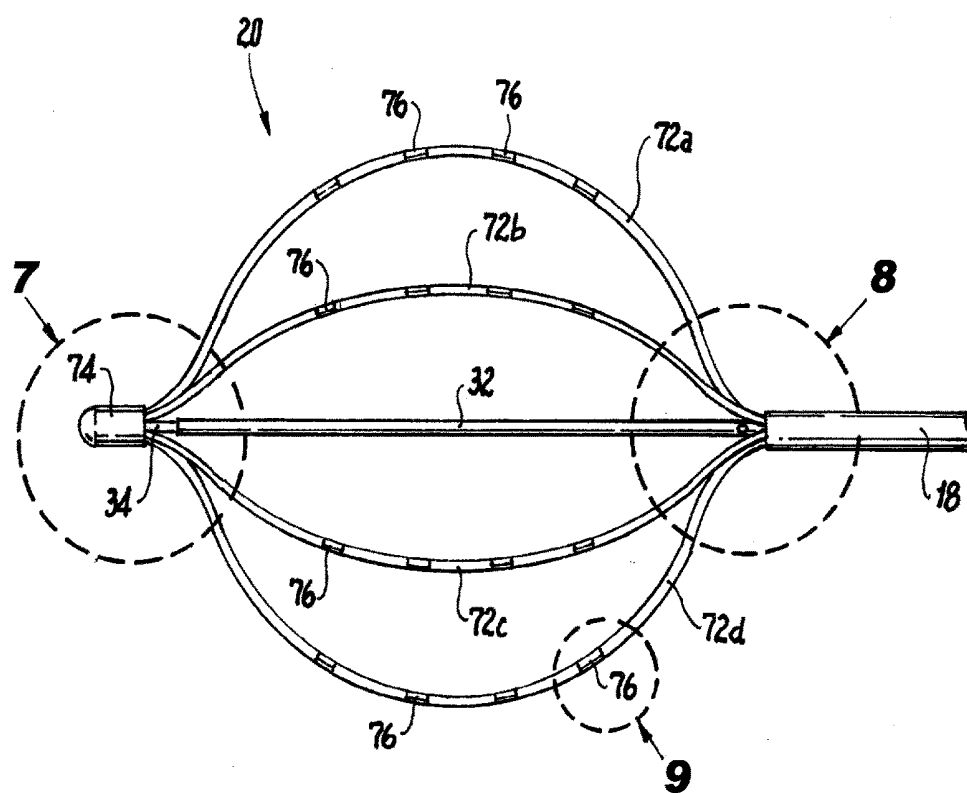


**Fig. 6**

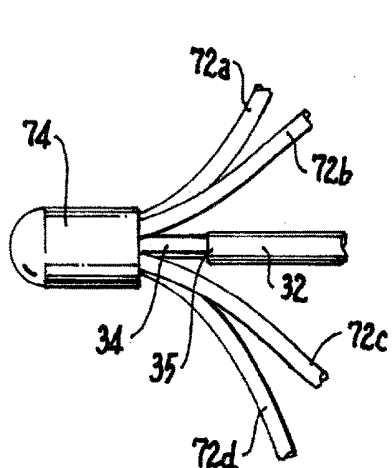


**Fig. 7**

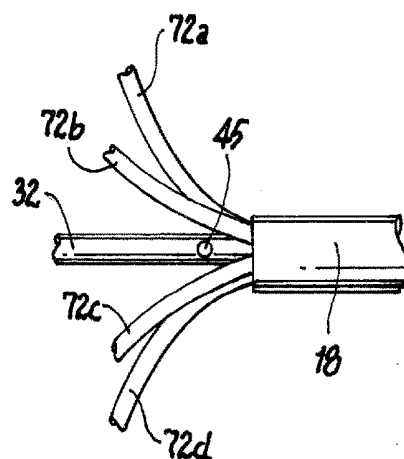


**Fig. 8**

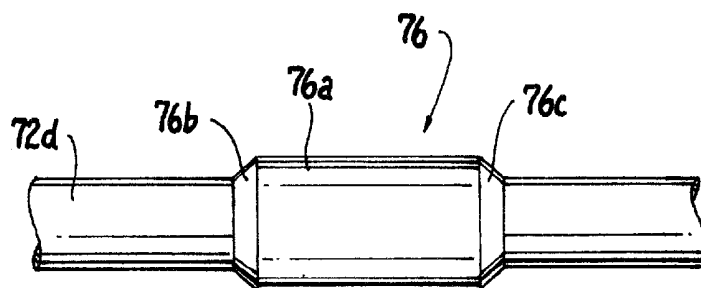

**Fig. 9**

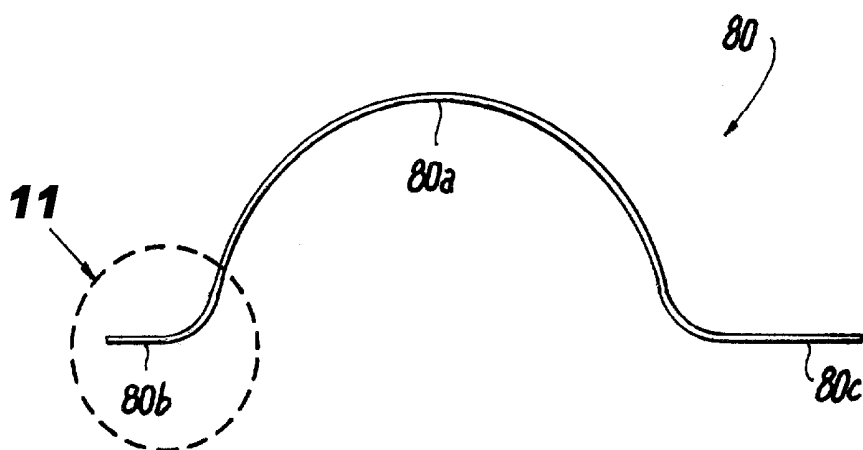

**Fig. 10**

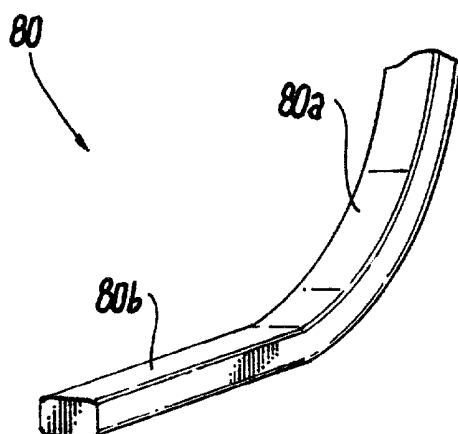

**Fig. 11**

## INTRAVASCULAR MAPPING CATHETER WITH IRRIGATED BASKET ASSEMBLY

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

[0001] The subject invention is directed to an intravascular catheter, and more particularly, to a cardiac mapping catheter having an irrigated basket-shaped electrode assembly.

#### 2. Description of Related Art

[0002] Cardiac arrhythmias are a leading cause of stroke, heart disease, and sudden death. The physiological mechanism of arrhythmia involves an abnormality in the electrical conduction of the heart. There are a number of treatment options for patients with arrhythmia that include medication, implantable devices, and catheter ablation of cardiac tissue.

[0003] Traditionally, the arrhythmia is studied and diagnosed by “electrically mapping” the heart with catheters inserted through the vasculature into a heart chamber. For example, mapping catheters are known from U.S. Pat. No. 5,628,313 to Webster, which describes a basket catheter. In use, this flexible and conformal catheter is deployed in the heart and presses individual electrodes against the chamber wall for full chamber contact mapping of a beating heart.

[0004] Smaller multiple electrode catheters are known as well. For example, the U.S. Pat. No. 5,279,299 to Imran illustrates techniques for creating smaller catheter arrays that are used to selectively contact map portions of a cardiac chamber. This catheter is flexible and the electrodes remain in contact with the chamber wall even when the catheter shaft is displaced slightly. In each of these examples, the limbs of the catheter are very flexible and gently contact the chamber wall while the wall of the heart is moving.

[0005] Although such cardiac mapping methods are known in the art and various deflectable, displaceable and deployable catheters are known as well, there is a common negative clinical side effects of such multi-array and multi-spine catheters, in that such complex configurations, while exposed for a prolonged time inside the blood stream, have a strong tendency to collect blood in the areas of high mechanical complexity and with that show a high risk of coagulation.

[0006] There is a clinical need to have a multi-array, multi-spine cardiac mapping catheter, while at the same time have a means to prevent coagulation while inserted into the cardiovascular system and heart chambers, and improve the accuracy, stability and maneuverability of such devices, so that they can be more widely used, especially as an adjunct to cardiac ablation procedures. The subject invention meets this clinical need by providing a mapping catheter having an irrigated basket-shaped electrode assembly that reduces the risk of coagulation and thromboses during a prolonged cardiac mapping procedure.

### SUMMARY OF THE DISCLOSURE

[0007] The subject invention is directed to a new and useful intravascular catheter system for cardiac mapping. The system includes a central housing having opposed proximal and distal end portions, an elongated catheter shaft operatively associated with the distal end portion of the housing, an elongated electrical conduit operatively associated with the proximal end portion of the housing and an

elongated irrigation conduit operatively associated with the end proximal portion of the housing.

[0008] The catheter shaft has an elongated central support wire extending therethrough and an irrigated basket assembly is operatively associated with a distal end portion of the catheter shaft. The irrigated basket assembly has opposed proximal and distal portions and includes a plurality of circumferentially arranged electrically insulated tubular splines. Each of the tubular splines in the irrigated basket assembly has a plurality of longitudinally spaced apart mapping electrodes provided thereon.

[0009] The irrigated basket assembly is adapted and configured to transition between a first position and a second position. In the first position, the tubular splines of the basket assembly are compressed radially inwardly toward the central support wire for insertion and delivery into the vasculature of a patient. In the second position, the tubular splines of the basket assembly are spread radially outwardly away from the central support wire for physiological mapping.

[0010] The irrigated basket assembly includes at least four circumferentially arranged tubular splines. In one embodiment of the subject invention, the irrigated basket assembly has four (4) circumferentially arranged tubular splines. In another embodiment of the subject invention, the irrigated basket assembly has six (6) circumferentially arranged tubular splines. Preferably, each of the circumferentially arranged splines has at least three (3) spaced apart generally cylindrical mapping electrodes thereon.

[0011] The electrical conduit supports a plurality of electrical conductors that extend through the catheter shaft and into the tubular splines of the basket assembly for communicating with the plurality of spaced apart mapping electrodes. The electrical conduit has an electrical connector operatively associated with a proximal end thereof for communicating with a power source.

[0012] The irrigation conduit supports an elongated irrigation lumen that extends through the catheter shaft and surrounds the central support wire so as to define an irrigation gap therebetween. The irrigation conduit has an irrigation port assembly operatively associated with a proximal end portion thereof for communicating with a fluid source.

[0013] The irrigation lumen has an open distal end adjacent the distal end portion of the basket assembly. The open distal end of the irrigation lumen allows for the egress of irrigation fluid from the irrigation gap. The irrigation lumen also includes at least one weeping hole or port adjacent the proximal end portion of the basket assembly to allow for the egress of irrigation fluid from the irrigation gap.

[0014] An elongated sprocket is provided in the distal end portion of the catheter shaft, adjacent the proximal end portion of the irrigated basket assembly. The sprocket has a number of circumferentially spaced apart outer grooves formed therein for maintaining the plurality of electrical conductors in a number of circumferentially spaced apart groups corresponding to the number of tubular splines. The elongated sprocket also has a central bore extending there-through for accommodating the central support wire and the irrigation lumen in a coaxial manner.

[0015] Preferably, each of the tubular splines of the irrigated basket assembly has an internal support wire located therein constructed from a shape memory alloy and having an arcuate configuration in the radially outwardly spread condition. The internal support wire in each tubular spline

preferably has a generally rectangular cross-section to prevent twisting and maintain radial alignment of the splines.

[0016] Each of the mapping electrodes is constructed from an electrically conductive biocompatible material selected from the group of materials group consisting of platinum, platinum iridium alloy, MP35N and stainless steel. Each of the mapping electrodes has a raised circumferential outer surface and wherein ramps are provided at opposed ends of each mapping electrode to provide a smooth transition between an outer surface of the spline and the outer surface of the electrode.

[0017] These and other features of the intravascular catheter system of the subject invention will become more readily apparent to those having ordinary skill in the art to which the subject invention appertains from the detailed description of the preferred embodiments taken in conjunction with the following brief description of the drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0018] So that those skilled in the art will readily understand how to make and use the intravascular catheter system of the subject invention without undue experimentation, preferred embodiments thereof will be described in detail herein below with reference to the figures wherein:

[0019] FIG. 1 is side elevational view of the intravascular catheter system of the subject invention with a four-splined irrigated basket assembly in a deployed position;

[0020] FIG. 2 is perspective view of the proximal end portion of the intravascular catheter system of the subject invention;

[0021] FIG. 3 is an enlarged perspective view in cross-section of the central housing portion of the intravascular catheter system of the subject invention illustrating the conductive wires and irrigation lumen that extend there-through;

[0022] FIG. 4 is an enlarged cross-sectional view of the distal end portion of the catheter shaft taken along line 4-4 of FIG. 5 and illustrating the structural features corresponding to a six-splined basket assembly;

[0023] FIG. 5 is a side elevational view of a six-splined irrigated basket assembly constructed in accordance with an embodiment of the subject invention;

[0024] FIG. 6 is a side elevational view of the four-splined irrigated basket assembly illustrated in FIG. 1;

[0025] FIG. 7 is an enlarged localized view side elevational view of the distal end portion of the four-splined basket assembly illustrated in FIG. 6, which shows the open distal end of the irrigation gap formed between the central support wire and the irrigation lumen;

[0026] FIG. 8 is an enlarged localized view side elevational view of the proximal end portion of the four-splined basket assembly illustrated in FIG. 6, which shows the weeping holes communicating with the irrigation gap formed between the central support wire and the irrigation lumen;

[0027] FIG. 9 is an enlarged localized view of a raised mapping electrode as illustrated in FIG. 6;

[0028] FIG. 10 is a side elevational view of the internal support wire in each spline of the basket assembly; and

[0029] FIG. 11 is an enlarged localized perspective view of the distal end portion of the internal support wire shown in FIG. 10.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0030] Referring now to the drawings wherein like reference numeral identify similar structural elements or features of the subject invention, there is illustrated in FIG. 1 a new and useful intravascular catheter system for cardiac mapping, which is designated generally by reference numeral 10. The intravascular catheter system 10 of the subject invention is an electrophysiology catheter designed for deployment within a heart chamber to map electro-anatomical characteristics of the heart and/or to locate and position other catheters within the heart.

[0031] Referring now to FIG. 1, the catheter system 10 of the subject invention includes a central housing 12 having opposed distal and proximal end portions 14 and 16. An elongated braided catheter shaft 18 is operatively associated with the distal end portion 14 of the housing 12. An irrigated basket-shaped mapping assembly 20 is operatively associated with a distal end portion of the catheter shaft 18.

[0032] In FIG. 1, the basket assembly 20 is shown as a four-splined assembly. It should be understood however, that the basket assembly associated with catheter system 10 of the subject invention can have more than four splines. Indeed, a six-splined basket assembly is also disclosed herein and it will be described in more detail below with reference to FIG. 5. Both of the basket assemblies disclosed herein are irrigated and constructed in a similar manner.

[0033] With continuing reference to FIG. 1, an elongated electrical conduit 22 is operatively associated with the proximal end portion 16 of the central housing 12 and an elongated irrigation conduit 24 is also operatively associated with the proximal end portion 16 of the central housing 12. The catheter shaft 18, irrigated basket assembly 20, electrical conduit 22 and irrigation conduit 24 will be described in greater detail below.

[0034] Referring to FIG. 2, the irrigation conduit 24 of catheter system 10 has an irrigation port assembly 25 that is operatively associated with a proximal end portion thereof. The irrigation port assembly 25 includes a first connector port 26 for connecting with a first irrigation source, a second connector port 28 for connecting with a second irrigation source, and a three-position toggle valve 30. The connector ports 26 and 28 are preferably conventional luer-type fittings.

[0035] The three-position toggle valve 30 is adapted and configured for manual movement between a first position in which the first connector port 26 is open and the second connector port 28 is closed, a second position in which the first connector port 26 is closed and the second connector port 28 is open, and a third position in which the first connector port 26 and the second connector port 28 are both closed.

[0036] Referring to FIG. 3, an elongated irrigation lumen 32 extends through the irrigation conduit 24 from the irrigation port assembly 25, through the interior cavity 15 of the central housing 12 and into the catheter shaft 18. The irrigation lumen 32 carries fluids (e.g., saline solution or an anti-thrombotic drug or agent) from the irrigation port assembly 25 to the irrigated basket assembly 20 at the distal end of the catheter shaft 18, as discussed in more detail below.

[0037] With continuing reference to FIGS. 2 and 3, the electrical conduit 22 of catheter system 10 includes a proximal socket housing 40 that supports a plurality of



electrical conductors **42** in a manner for ready connection with an electrical power source. More particularly, as best seen in FIG. 2, the socket housing **40** includes a reception port **44** containing a multi-pin connector **46** that communicates with the electrical conductors **24**. The electrical conductors **42** extend from the socket housing **40**, through the electrical conduit **22**, and into the interior cavity **15** of the central housing **12**. From there, the electrical conductors **24** enter the proximal end of the catheter shaft **18** and extend to the basket assembly **20** at the distal end of the catheter shaft **18**.

[0038] Referring now to FIGS. 4 and 5, there is illustrated an irrigated six-splined basket-shaped mapping assembly **50** constructed in accordance with the subject invention. The six-splined basket assembly **50** includes six (6) electrically insulated tubular splines **52a-52f** that are supported at their respective distal ends by an atraumatic end cap **58**.

[0039] Basket assembly **50** is adapted and configured to transition between a first position and a second position. In the first position, the tubular splines **52a-52f** are compressed radially inwardly toward the central lumen **32** for intravascular insertion and delivery. In the second position, the tubular splines **52a-52f** are spread radially outwardly away from the irrigation lumen **32** to facilitate physiological mapping.

[0040] By way of non-limiting example, each spline **52a-52f** has at least three (3) longitudinally spaced apart mapping electrodes **56** provided thereon. The mapping electrodes **56** are each associated with a respective electrical conductor **42**. In the case of the six-splined basket assembly **50** wherein each of the six (6) splines **52a-52f** has four (4) mapping electrodes **56** provided thereon, there are twenty-four (24) electrical conductors **42**. As best seen in FIG. 4, these twenty-four (24) electrical conductors **42** are divided into six (6) sets or groups of individually insulated electrical conductors **42a-42f**, wherein each set contains four (4) insulated conductors **42**.

[0041] An elongated cylindrical sprocket **60** formed from a relatively rigid material is provided in the distal end portion of the catheter shaft **18**, adjacent to the proximal end portion of the basket assembly, for organizing and effectively separating the components of the catheter assembly **10** that extend therethrough. In particular, the sprocket **60** includes a central bore **62** for coaxially accommodating the irrigation lumen **32** and a central support wire **34** fabricated from Nitinol or a similar material.

[0042] More particularly, the central support wire **34** and the irrigation lumen **32** are positioned relative to one another in a coaxial manner so as to form an annular irrigation gap **36** between the outer periphery of the central support wire **34** and the inner periphery of the irrigation lumen **32**. The irrigation gap **36** defines a pathway for fluids that are delivered from the irrigation port assembly **25** associated with the irrigation conduit **24** to the six-splined basket assembly **50** at the distal end of catheter shaft **18**.

[0043] The sprocket **60** further includes six (6) circumferentially spaced apart radially outer grooves **64a-64f** for supporting a respective one of the six (6) conductor sets **42a-42f**. By supporting and separating the conductors **42** in this manner, the sprocket **60** prevents the conductive wires **42** in each set or group of wires from twisting and kinking as the catheter shaft **18** transits the vasculature of a patient. This effectively reduces the potential for electrical arcing of conductors **42**. An arcuate spacer **66** covers each of the six

(6) sets of conductors **42a-42f** and advantageously maintains spacing between the conductors **42** and the inner wall of the catheter shaft **18**.

[0044] Referring now to FIGS. 6 through 8, there is illustrated the four-splined irrigated basket assembly **20** previously shown in FIG. 1. In particular, the basket assembly **20** includes four (4) electrically insulated tubular splines **72a-72d** that are supported at their respective distal ends by an atraumatic cap **74**. Each tubular spline has four (4) longitudinally spaced apart mapping electrodes **76** provided thereon.

[0045] The tubular splines **72a-72d** are circumferentially arranged around the irrigation lumen **32**. The basket assembly **20** is adapted and configured to transition between a first position and a second position. In the first position, the four tubular splines **72a-72d** are compressed radially inwardly toward the irrigation lumen **32** for intravascular insertion and delivery. In the second position, the four tubular splines **72a-72d** are spread radially outwardly away from the irrigation lumen **32** to facilitate physiological mapping.

[0046] As best seen in FIG. 7, the irrigation sleeve **32** has an open distal end **35** adjacent the end cap **74** at the distal portion of the basket assembly **20** to allow for the egress of irrigation fluid from the irrigation gap **36**. As best seen in FIG. 8, the irrigation lumen **32** has at least one weeping hole **45** located adjacent the proximal portion of the basket assembly **20** to allow for the egress of irrigation fluid from the irrigation gap **36**.

[0047] Preferably, there would be a plurality of circumferentially spaced apart weeping holes **45** formed in the wall of the irrigation lumen **32** adjacent the proximal end portion of the basket assembly **20**. For example, the irrigation lumen **32** could be formed with four (4) circumferentially spaced apart weeping holes to provide an evenly distributed amount of irrigation fluid. The open distal end **35** and the proximal weeping holes **45** allow the basket assembly **20** to be flushed during the medical mapping procedure using a saline solution or a medicament solution, to prevent thromboses during prolonged mapping procedures. These distal and proximal irrigation features are also provided in the six-splined basket assembly **50** shown in FIGS. 4 and 5.

[0048] Referring now to FIG. 9, each mapping electrode (i.e., the mapping electrodes **56** of the six-splined basket assembly **60** and the mapping electrodes **76** of the four-splined basket assembly **20**) is constructed from an electrically conductive biocompatible material that is selected from the group of materials consisting of platinum, platinum iridium alloy, MP35N and stainless steel. By way of non-limiting example, mapping electrode **76** has a raised circumferential outer surface **76a** with opposed end ramp surfaces **76b** and **76c** that provide a smooth transition between the outer surface **76a** and an outer surface of a cylindrical spline **72d**. The raised mapping electrodes provide increased and improved tissue contact while providing smooth transition from spline body, which helps to prevent thromboses along the electrode.

[0049] Referring now to FIGS. 10 and 11 in conjunction with FIG. 4, each of the splines **52a-52f** of the basket assembly **50** has an internal support wire **80**. Each support wire **80** is constructed from a shape memory alloy (e.g., Nitinol) and has an arcuate central portion **80a** with distal and proximal leg portions **80b** and **80c**. The arcuate central portion **80a** defines the curvature of each spline when the basket assembly **50** is in a radially outwardly spread con-

dition. The distal leg portion **80b** cooperates with another sprocket (similar to sprocket **60**) in the end cap **58** at the distal end of the basket assembly **50** and the proximal leg portion **80c** cooperates with the sprocket **60** in the open distal end portion of catheter shaft **18**. As best seen in FIG. **11**, each internal support wire **80** preferably has a generally rectangular cross-section to prevent twisting and maintain radial alignment of the splines. The rectangular profile of each support wire **80** allows for angular alignment of all of the splines while still being flexible.

**[0050]** It should be understood that the irrigated basket-shaped mapping assembly of the catheter system **10** of the subject invention, can have any number of tubular splines. It can have four (4) tubular splines as illustrated in FIG. **6**, it can have six (6) tubular splines as illustrated in FIG. **5**, or it can have fewer than four splines and greater than six splines. It should be further understood by those having ordinary skill in the art, that each of the splines could have more than four (4) mapping electrodes or fewer than four (4) mapping electrodes. However, each spline preferably includes at least three (3) spaced apart generally cylindrical mapping electrodes thereon.

**[0051]** While the subject disclosure has been shown and described with reference to preferred embodiments, those skilled in the art will readily appreciate that changes or modifications may be made thereto without departing from the spirit or scope of the subject disclosure.

What is claimed is:

1. An intravascular catheter system comprising:
  - a) a central housing having opposed proximal and distal portions;
  - b) an elongated catheter shaft operatively associated with the distal portion of the housing, the catheter shaft having an elongated central support wire extending therethrough and a having an irrigated basket assembly operatively associated with a distal end portion thereof, the irrigated basket assembly having opposed proximal and distal portions and including a plurality of circumferentially arranged electrically insulated tubular splines each having a plurality of longitudinally spaced apart mapping electrodes thereon;
  - c) an elongated electrical conduit operatively associated with the housing and supporting a plurality of electrical conductors that extend through the catheter shaft and into the splines of the irrigated basket assembly for communicating with the plurality of spaced apart electrodes; and
  - d) an elongated irrigation conduit operatively associated with the proximal portion of the housing, the irrigation conduit supporting an elongated irrigation lumen that extends through the catheter shaft and into the basket assembly and surrounds the central support wire so as to define an irrigation gap therebetween.
2. An intravascular catheter system as recited in claim 1, wherein the basket assembly has opposed proximal and distal portions and includes a plurality of circumferentially arranged electrically insulated tubular splines each having a plurality of longitudinally spaced apart mapping electrodes thereon.
3. An intravascular catheter system as recited in claim 2, wherein the basket assembly is adapted and configured to transition between a first position in which the splines are compressed radially inwardly toward the central support

wire for insertion and delivery and a second position in which the splines are spread radially outwardly away from the central support wire for physiological mapping.

4. An intravascular catheter system as recited in claim 2, wherein the basket assembly includes at least four circumferentially arranged splines.

5. An intravascular catheter system as recited in claim 4, wherein the basket assembly includes six circumferentially arranged splines.

6. An intravascular catheter system as recited in claim 2, wherein each of the splines has an internal support wire constructed from a shape memory alloy and having an arcuate configuration in an unstressed condition.

7. An intravascular catheter system as recited in claim 6, wherein the internal support wire in each spline has a generally rectangular cross-section to prevent twisting and maintain radial alignment of the splines.

8. An intravascular catheter system as recited in claim 2, wherein each of the circumferentially arranged splines has at least three spaced apart generally cylindrical mapping electrodes thereon.

9. An intravascular catheter system as recited in claim 2, wherein each of the mapping electrodes is constructed from an electrically conductive biocompatible material selected from the group consisting of platinum, platinum iridium alloy, MP35N and stainless steel.

10. An intravascular catheter system as recited in claim 2, wherein each of the mapping electrodes has a raised circumferential outer surface and wherein ramps are provided at opposed ends of each mapping electrode to provide a smooth transition between an outer surface of the spline and the outer surface of the electrode.

11. An intravascular catheter system as recited in claim 2, wherein an elongated sprocket is provided within a distal end portion of the catheter shaft, adjacent to the proximal end portion of the basket assembly, with a number of circumferentially spaced apart outer grooves formed therein for maintaining the plurality of electrical conductors in a number of circumferentially spaced apart groups corresponding to the number of splines.

12. An intravascular catheter system as recited in claim 11, wherein the elongated sprocket has a control bore extending therethrough for accommodating the central support wire and the irrigation lumen.

13. An intravascular catheter system as recited in claim 1, wherein the electrical conduit has an electrical connector operatively associated with a proximal end thereof for communicating with a power source.

14. An intravascular catheter system as recited in claim 1, wherein the irrigation lumen has an open distal end adjacent the distal portion of the basket assembly to allow for the egress of irrigation fluid from the irrigation gap.

15. An intravascular catheter system as recited in claim 1, wherein the irrigation lumen has at least one weeping hole adjacent the proximal portion of the basket assembly to allow for the egress of irrigation fluid from the irrigation gap.

16. An intravascular catheter system as recited in claim 1, wherein the irrigation conduit has an irrigation port assembly operatively associated with a proximal end portion thereof for communicating with a fluid source.

\* \* \* \* \*

专利名称(译)	带冲洗篮组件的血管内定位导管		
公开(公告)号	<a href="#">US20200178897A1</a>	公开(公告)日	2020-06-11
申请号	US16/214608	申请日	2018-12-10
[标]申请(专利权)人(译)	OSCOR		
申请(专利权)人(译)	OSCOR INC.		
当前申请(专利权)人(译)	OSCOR INC.		
[标]发明人	OSYPKA THOMAS P SEARFOSS TIMOTHY FUENTES ALLAN		
发明人	OSYPKA, THOMAS P. SEARFOSS, TIMOTHY FUENTES, ALLAN		
IPC分类号	A61B5/00 A61B5/042 A61L29/02		
CPC分类号	A61L29/02 A61B5/0422 A61B5/6858 A61B2562/0209 A61B2217/007		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

公开了一种用于心脏标测的血管内导管系统，其包括：具有相对的近侧和远侧部分的壳体；与壳体的远侧部分可操作地相关联的细长导管轴；与壳体的近侧部分可操作地相关联的细长电导管；可操作地与壳体的近端部分相关联的冲洗导管，其中冲洗篮组件可操作地与导管轴的远端部分相关联，并且冲洗导管包括多个周向布置的电绝缘管状花键，每个花键具有多个纵向间隔开的标测图 电极在其上。

