



US 20170296088A1

(19) **United States**

(12) **Patent Application Publication**
CHOI

(10) **Pub. No.: US 2017/0296088 A1**

(43) **Pub. Date: Oct. 19, 2017**

(54) **ELECTRONIC DEVICE FOR MEASURING
BIOMETRIC INFORMATION AND DEVICE
FOR CHARGING THE ELECTRONIC
DEVICE**

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Gyeonggi-do (KR)

(72) Inventor: **Bongsuk CHOI**, Seoul (KR)

(21) Appl. No.: **15/469,673**

(22) Filed: **Mar. 27, 2017**

(30) **Foreign Application Priority Data**

Apr. 15, 2016 (KR) 10-2016-0046230

Publication Classification

(51) **Int. Cl.**
A61B 5/0408 (2006.01)
A61B 5/00 (2006.01)
A61B 5/0205 (2006.01)
H05K 5/00 (2006.01)
A61B 5/145 (2006.01)
A61B 5/00 (2006.01)
A61B 5/00 (2006.01)
A61B 5/00 (2006.01)
A61B 5/16 (2006.01)
A61B 5/053 (2006.01)
A61B 5/021 (2006.01)
A61B 5/024 (2006.01)
A61B 5/026 (2006.01)

(52) **U.S. Cl.**
CPC *A61B 5/04085* (2013.01); *A61B 5/7271*
(2013.01); *A61B 5/742* (2013.01); *A61B*
5/02055 (2013.01); *H05K 5/0017* (2013.01);
A61B 5/14542 (2013.01); *A61B 5/165*
(2013.01); *A61B 5/6801* (2013.01); *A61B*
5/4806 (2013.01); *A61B 5/021* (2013.01);
A61B 5/024 (2013.01); *A61B 5/026* (2013.01);
A61B 5/0533 (2013.01); *A61B 2560/0214*
(2013.01); *A61B 2560/0242* (2013.01); *A61B*
2562/166 (2013.01)

(57) **ABSTRACT**

Various embodiments of the present disclosure relate to an electronic device for measuring biometric information and a device for charging the electronic device. The electronic device may include a housing having a top surface and a bottom surface, a first electrode disposed on the top surface of the housing, the first electrode electrically isolated from rest of the top surface, a second electrode disposed on the bottom surface of the housing and contacting a user's body when the electronic device is worn by the user, a sensor module electrically coupled to the first electrode and the second electrode, a processor electrically coupled to the sensor module, a display module electrically coupled to the processor; and a memory electrically coupled to the processor. The memory can store instructions that, when executed by the processor, causes the sensor module to measure the user's bio-signal using the first electrode and the second electrode, and the processor to provide the user's health state information by analyzing the measured bio-signal. Further, various embodiments can be implemented on the basis of the technical spirit and scope of the present disclosure.

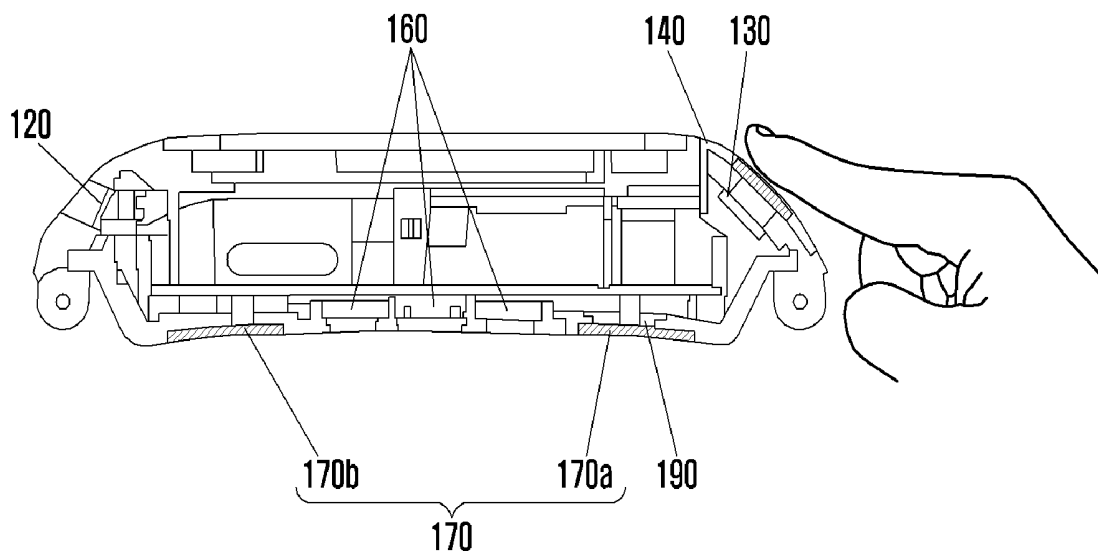


FIG. 1A

100

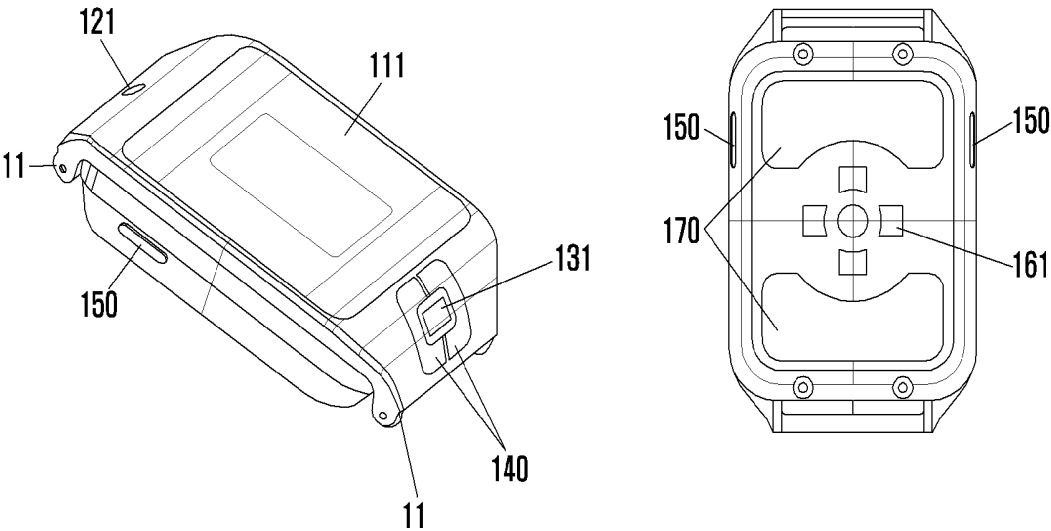


FIG. 1B

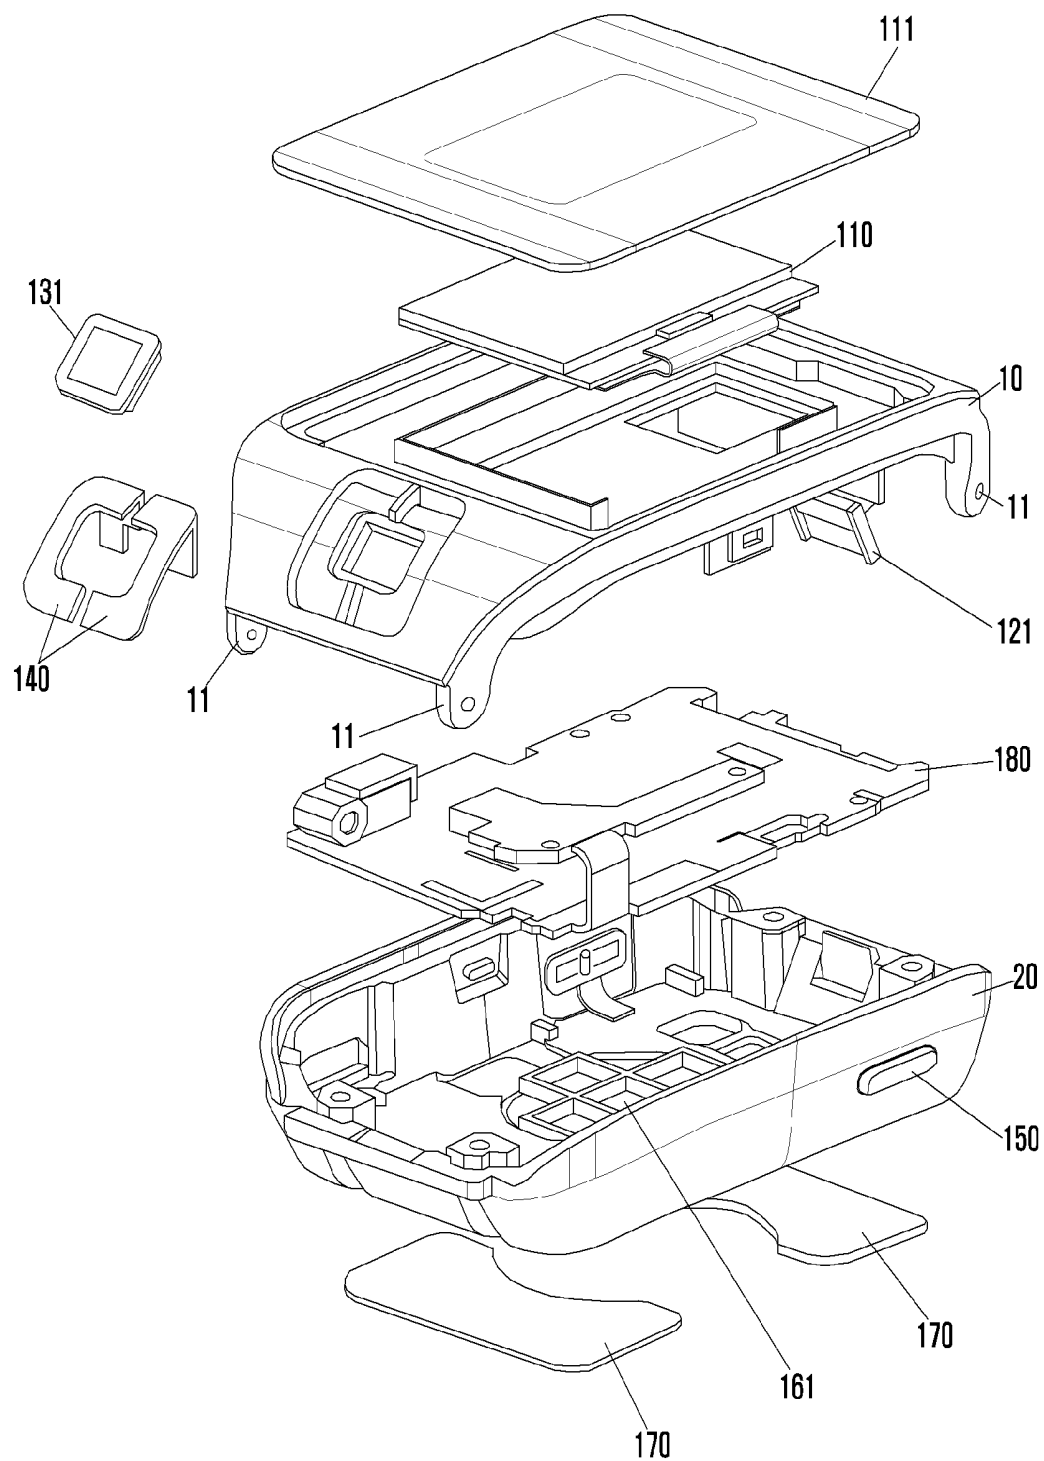


FIG. 2

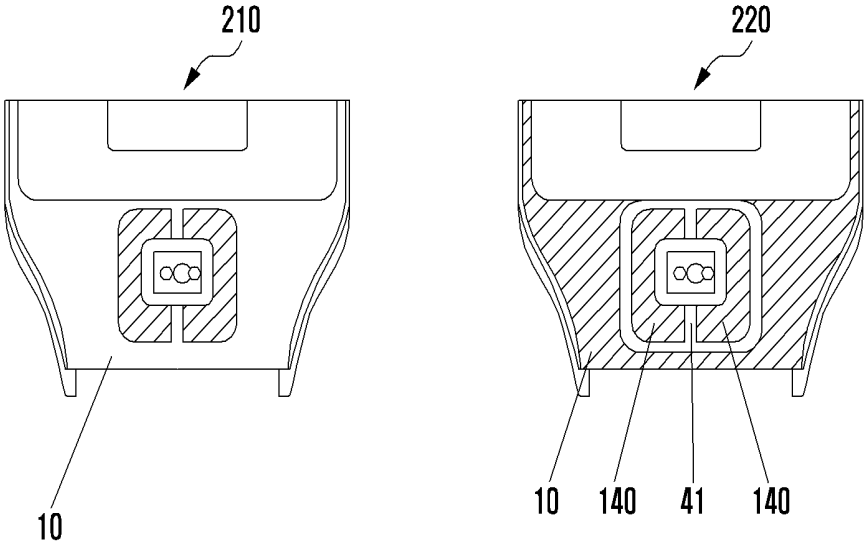


FIG. 3A

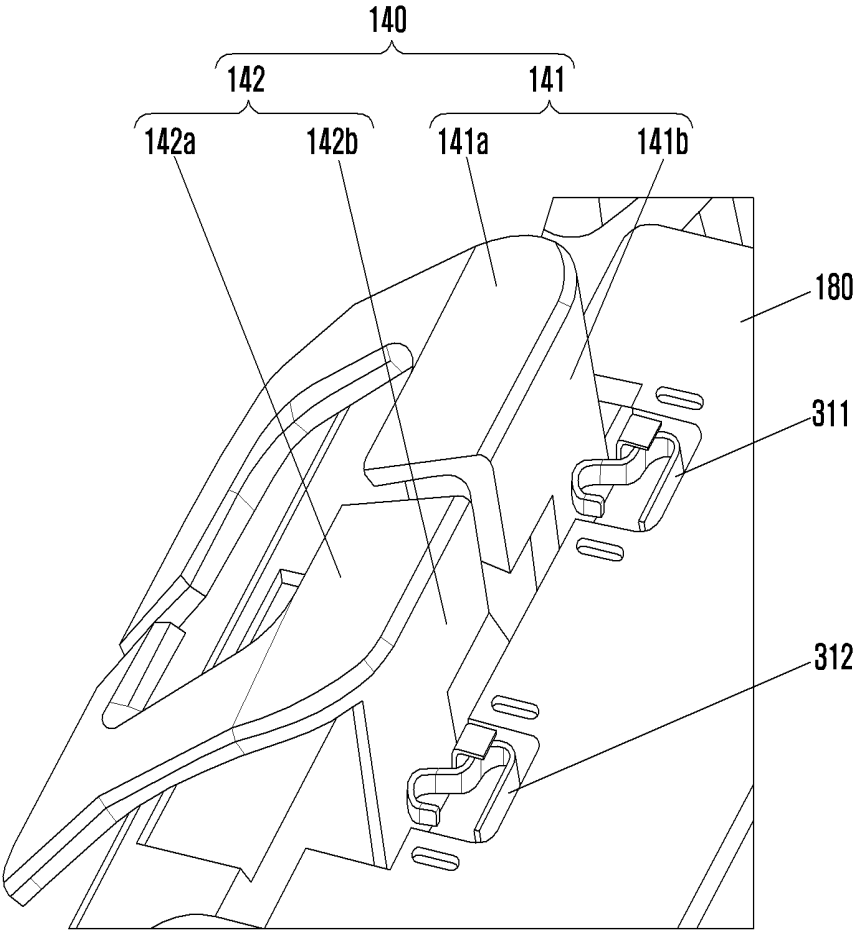


FIG. 3B

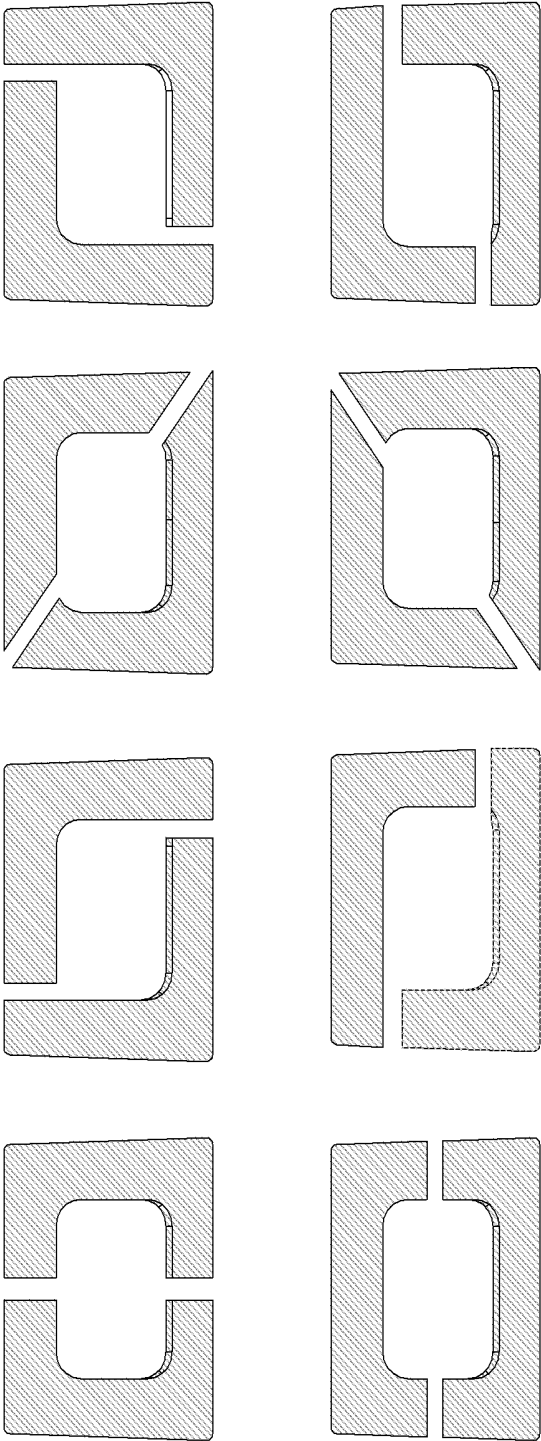


FIG. 4

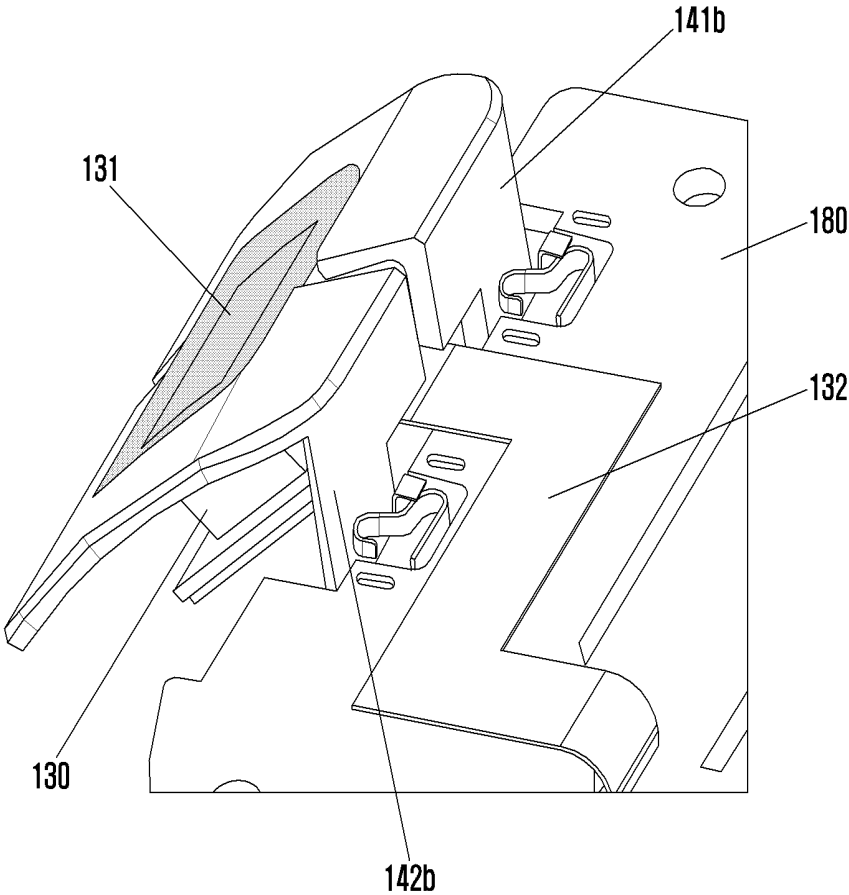


FIG. 5

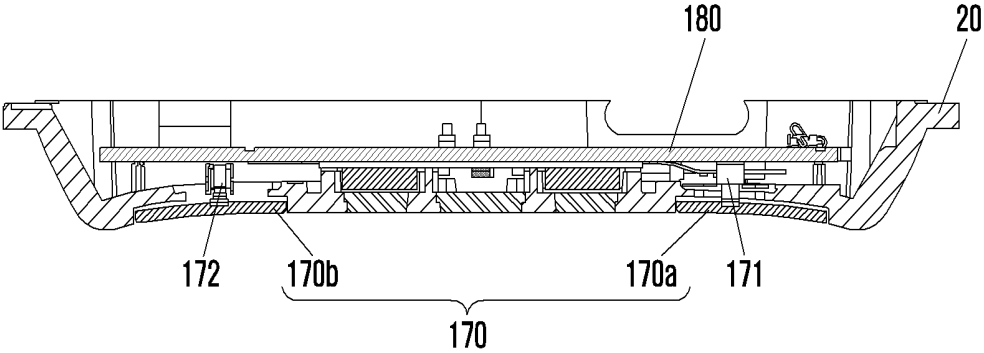


FIG. 6

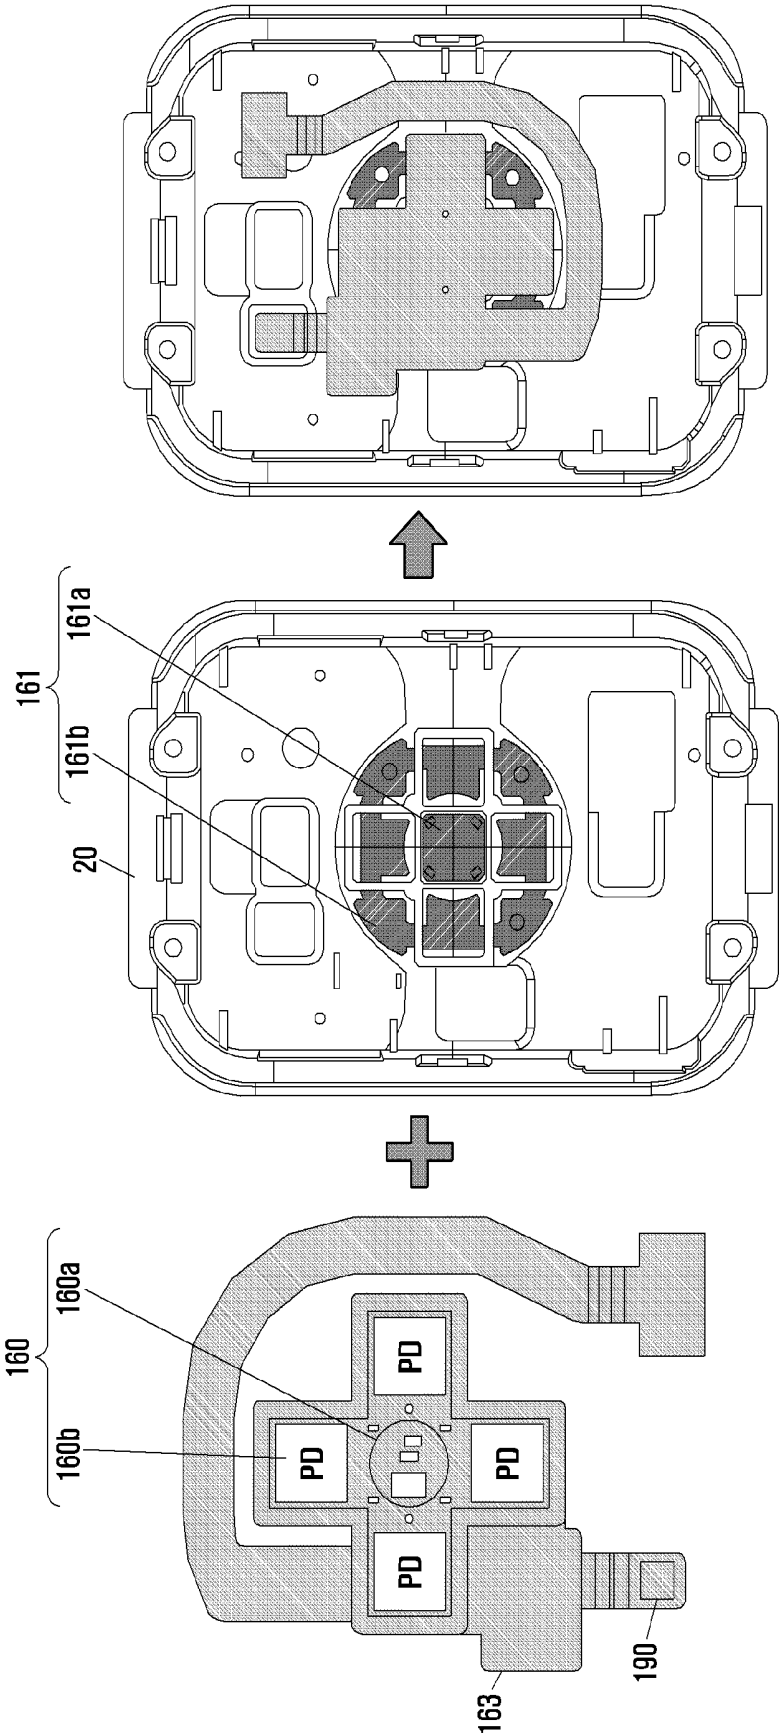


FIG. 7

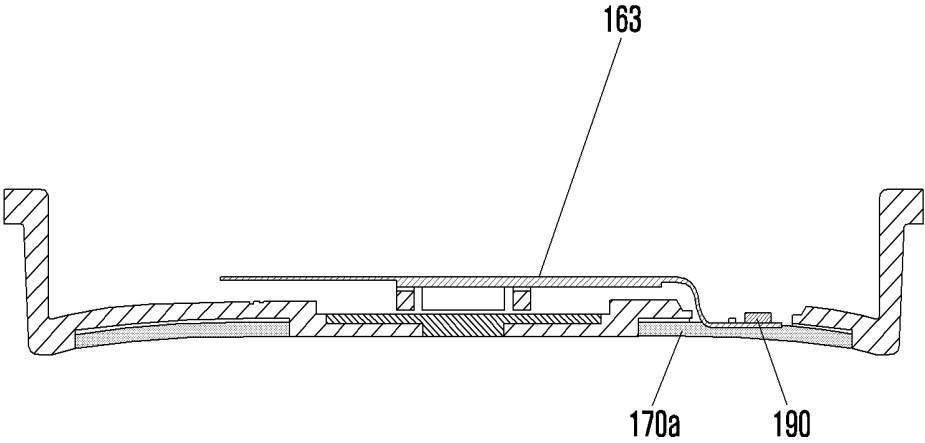


FIG. 8

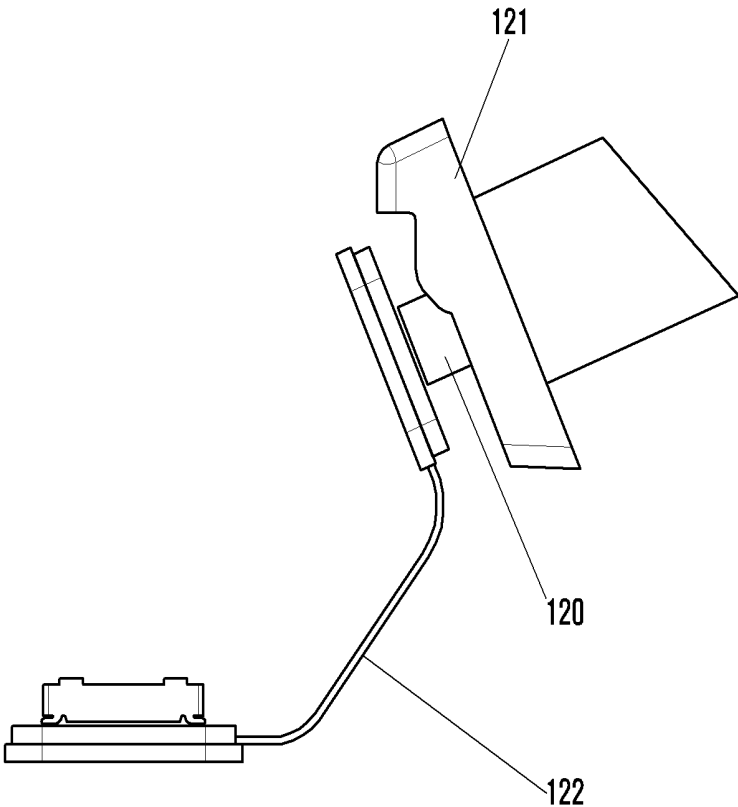


FIG. 9

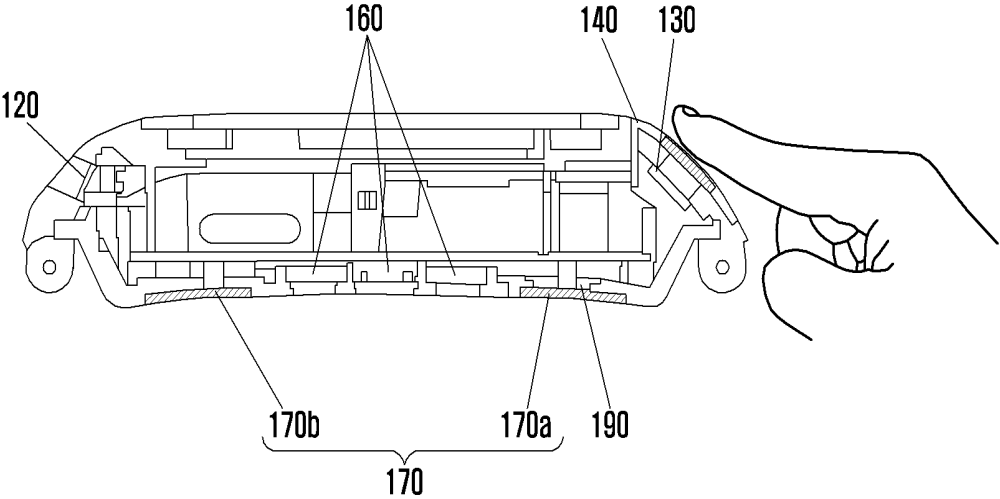


FIG. 10

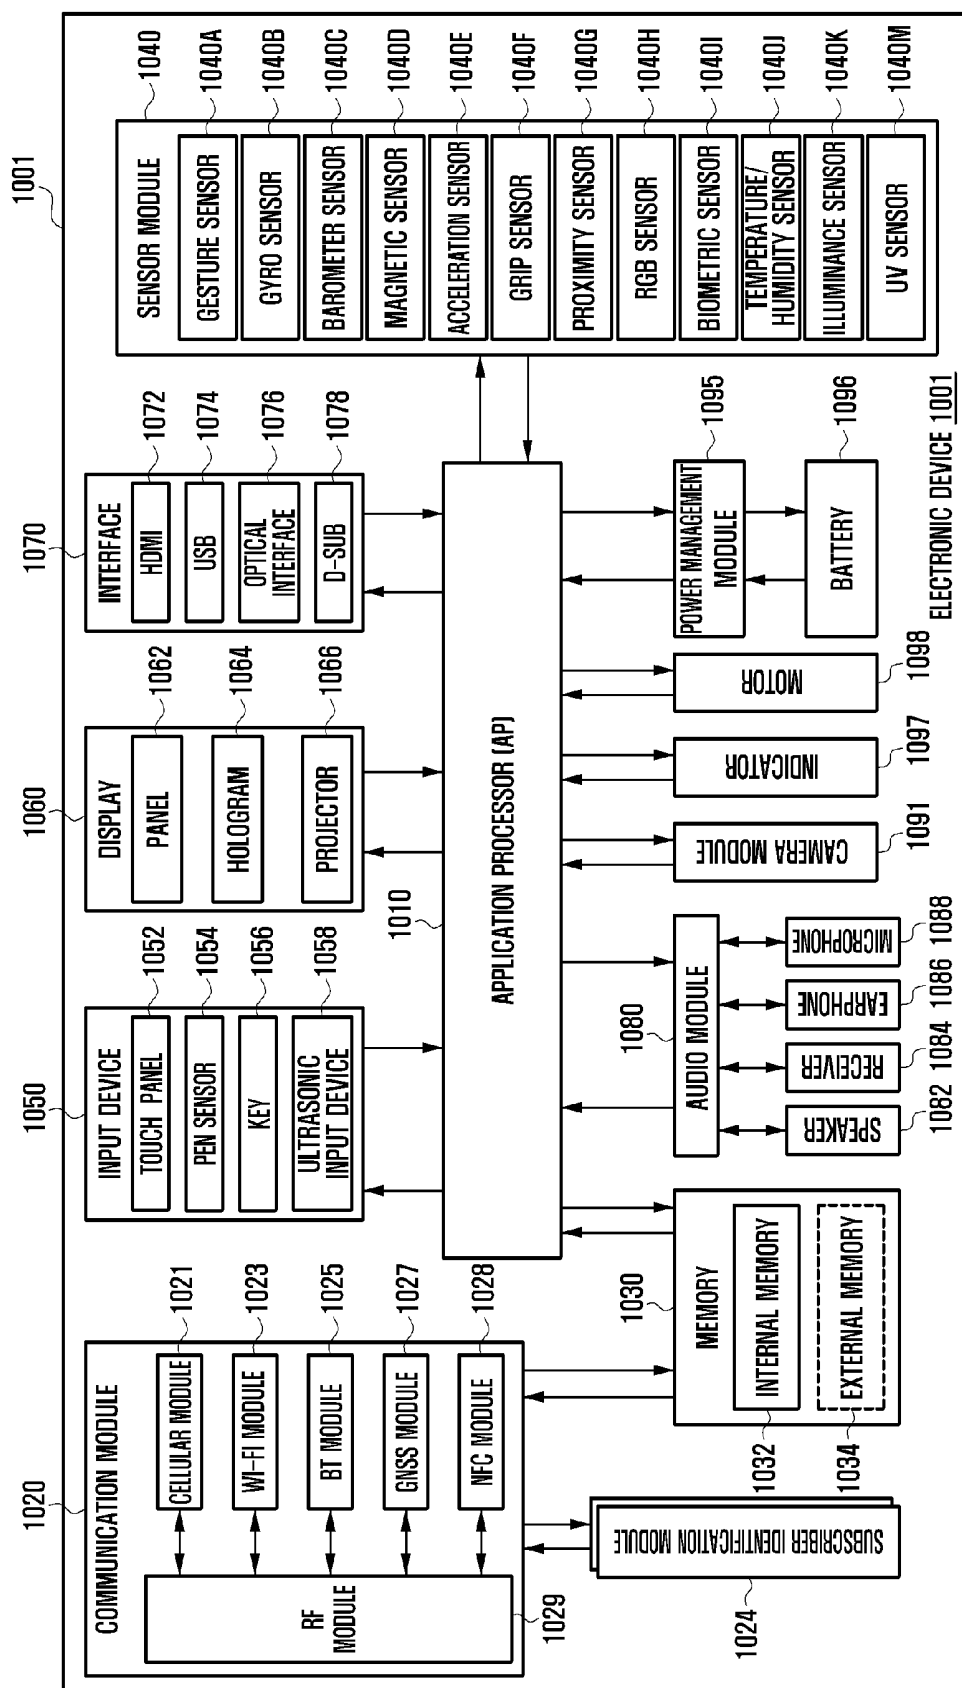


FIG. 11

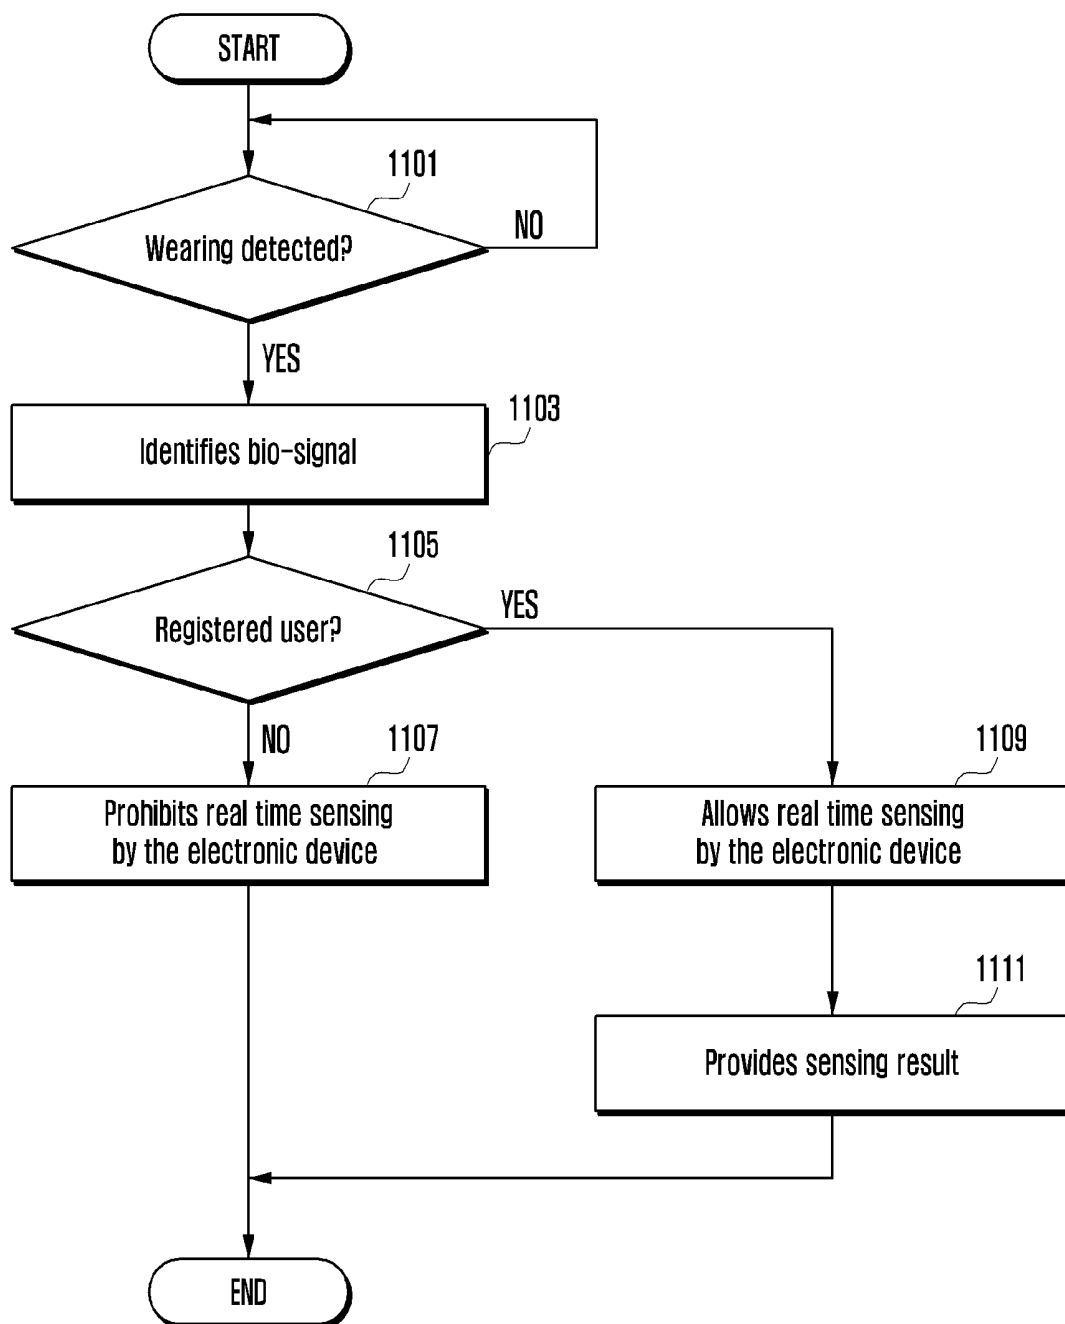


FIG. 12


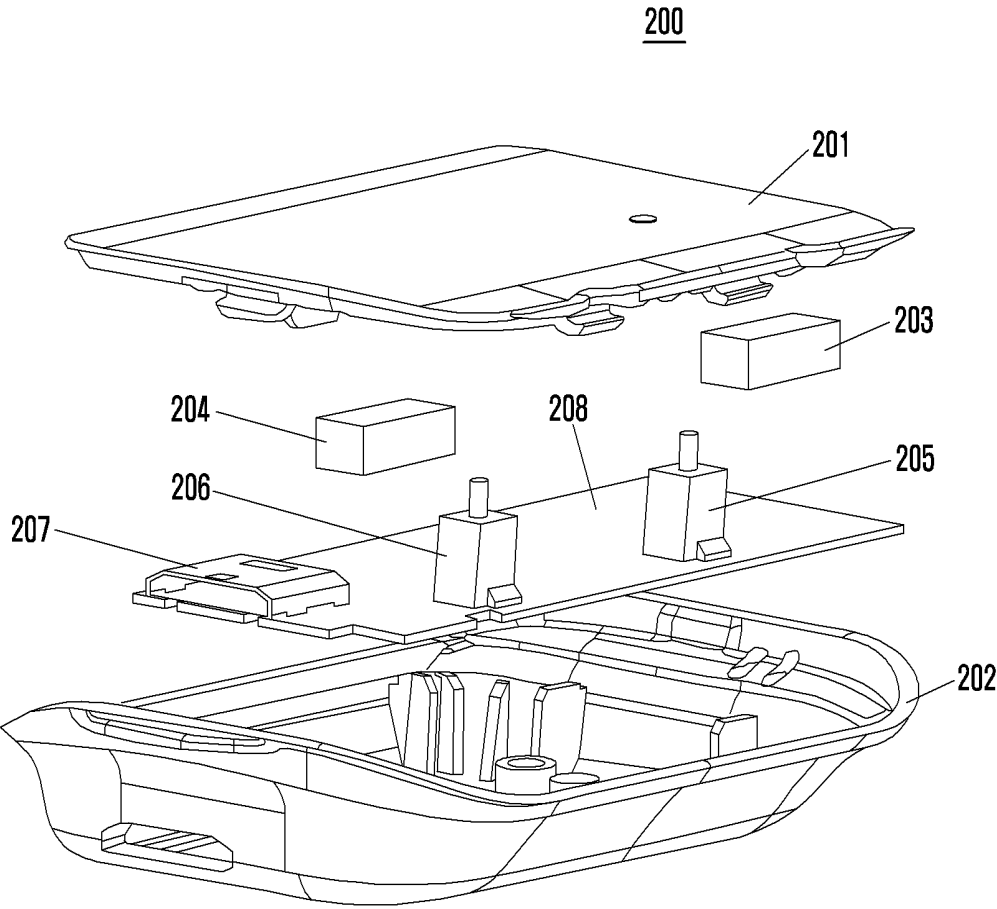


FIG. 13

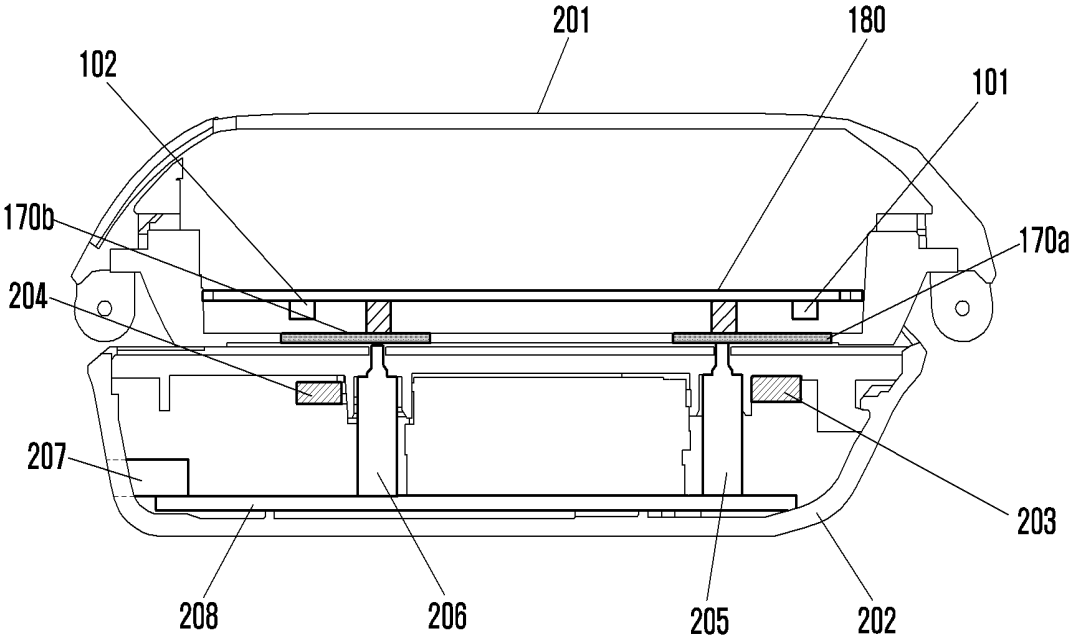

**ELECTRONIC DEVICE FOR MEASURING
BIOMETRIC INFORMATION AND DEVICE
FOR CHARGING THE ELECTRONIC
DEVICE**

CLAIM OF PRIORITY

[0001] This application claims the benefit under 35 U.S.C. §119(a) of a Korean patent application filed on Apr. 15, 2016 in the Korean intellectual property office and assigned serial number 10-2016-0046230, the entire disclosure of which is hereby incorporated by reference.

TECHNICAL FIELD

[0002] Various embodiments of the present disclosure relate to an electronic device for measuring biometric information and a device for charging the electronic device.

BACKGROUND

[0003] Recently, in accordance with dramatic developments in technology, significant changes have been happening in the areas of medical diagnostics. For example, in the past, to properly measure a person's vitals, a trip to the doctor or hospital is often required. But now, healthcare-related medical equipment is now widely available, and users can obtain their vitals such as their blood sugar and blood pressure without visiting a hospital.

[0004] Meanwhile, development and interest in wearable electronic devices are increasing. Generally, an electronic device may require a plurality of electrodes to measure biometric information (biometric data). For example, an electrode must be held in each hand to obtain an electrocardiogram. Therefore, conventional electronic devices may include 2 electrodes that, when touched by the user, obtain measurements for an electrocardiogram. In this way, conventional electronic devices are inconvenient to the user because generally, the two electrodes must be held in each hand. Further, conventional electronic devices are inconvenient for measuring different types of biometric information (e.g., heart rate, degree of oxygen saturation (saturation pulse oximetry O2: SPO2)) because generally each biometric information requires a separate sensor.

[0005] In addition, conventional electronic devices need to be connected to a separate charging device in order to charge the electronic device. This is generally done by placing the electronic device in a cradle. In doing so, a male connector of the cradle must be inserted into a female connector of the electronic device.

SUMMARY

[0006] The electronic device according to one embodiment of the present disclosure may use one of the electrode used to detect biometric data as a charging terminal and therefore does not require a separate charging terminal and a separate coupling structure.

[0007] An electronic device according to one embodiment of the present disclosure may include a housing having a top surface and a bottom surface, a first electrode disposed on the top surface of the housing, the first electrode electrically isolated from rest of the top surface, a second electrode disposed on the bottom surface of the housing and contacting a user's arm when the electronic device is worn by the user, wherein the first electrode is configured to be contacted by a portion of the user's other arm or hand when the

electronic device is worn by the user, a sensor module electrically coupled to the first electrode and the second electrode, a processor electrically coupled to the sensor module, a display module electrically coupled to the processor; and a memory electrically coupled to the processor. The memory can store instructions that, when executed by the processor, causes the sensor module to measure the user's bio-signal using the first electrode and the second electrode, and the processor to provide the user's health state information by analyzing the measured bio-signal.

[0008] Further, an external electronic device according to one embodiment of the present disclosure may include a housing, two contact pins exposed to an exterior of the housing and configured to contact the second electrode, at least one magnetic member disposed in the housing and provides an attracting force to the second electrode, an interface unit connected to a charging device for charging the electronic device and a printed circuit board coupled to the interface unit and the contact pin.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The above and other aspects, features, and advantages of certain embodiments of the present disclosure will be more apparent from the following description taken in conjunction with the accompanying drawings, in which:

[0010] FIG. 1A illustrates an electronic device according to an embodiment of the present disclosure;

[0011] FIG. 1B is an exploded perspective view illustrating an electronic device according to an embodiment of the present disclosure;

[0012] FIG. 2 illustrates a first housing of an electronic device according to an embodiment of the present disclosure;

[0013] FIG. 3A illustrates a structure for coupling a first electrode according to an embodiment of the present disclosure;

[0014] FIG. 3B illustrates various examples of a first electrode according to an embodiment of the present disclosure;

[0015] FIG. 4 illustrates a structure for coupling a first heartbeat sensor module according to an embodiment of the present disclosure;

[0016] FIG. 5 illustrates a structure for coupling a second electrode according to an embodiment of the present disclosure;

[0017] FIG. 6 illustrates a structure for coupling a second heartbeat sensor module according to an embodiment of the present disclosure;

[0018] FIG. 7 illustrates a structure for coupling a temperature sensor module according to an embodiment of the present disclosure;

[0019] FIG. 8 illustrates a structure for coupling a light/color sensor, such as a Red, Green, Blue (RGB) sensor module according to an embodiment of the present disclosure;

[0020] FIG. 9 illustrates a method for measuring a bio-signal by an electronic device according to an embodiment of the present disclosure;

[0021] FIG. 10 is a block diagram illustrating a configuration of an electronic device according to an embodiment of the present disclosure;

[0022] FIG. 11 is a flowchart illustrating a method for operating an electronic device according to an embodiment of the present disclosure;

[0023] FIG. 12 is an exploded perspective view illustrating a charging device according to an embodiment of the present disclosure; and

[0024] FIG. 13 is a cross-sectional view illustrating a state of coupling an electronic device to a charging device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0025] The following description, with reference to the accompanying drawings, is provided to assist one of skill in a comprehensive understanding of embodiments of the present disclosure as defined by the claims and their equivalents. It includes various specific details to assist in that understanding but are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the embodiments described herein may be made without departing from the scope and spirit of the present disclosure. In addition, descriptions of well-known functions and constructions may be omitted for clarity and conciseness.

[0026] Expressions such as “include” and “may include” which may be used in the present disclosure denote the presence of the disclosed functions, operations, and constituent elements and do not limit one or more additional functions, operations, and constituent elements. In the present disclosure, terms such as “include” and/or “have” may be construed to denote a certain characteristic, number, step, operation, constituent element, component or a combination thereof, but may not be construed to exclude the existence of, or a possibility of, the addition of one or more other characteristics, numbers, steps, operations, constituent elements, components or combinations thereof.

[0027] Furthermore, in the present disclosure, the expression “and/or” includes any and all combinations of the associated listed words. For example, the expression “A and/or B” may include A, may include B, or may include both A and B.

[0028] In the present disclosure, expressions including ordinal numbers, such as “first” and “second,” etc., may modify various elements. However, such elements are not limited by the above expressions. For example, the above expressions do not limit the sequence and/or importance of the elements. The above expressions are used merely for the purpose to distinguish an element from the other elements. For example, a first user device and a second user device indicate different user devices although both of them are user devices. For example, a first element may be referred to as a second element, and similarly, a second element may also be referred to as a first element without departing from the scope of the present disclosure.

[0029] In the case where a component is referred to as being “connected” to, or “accessed” by another component, it should be understood that not only is the component directly connected to or accessed by the other component, but there may also exist another component between them. Meanwhile, in the case where a component is referred to as being “directly connected” or “directly accessed” to another component, it should be understood that there is no component therebetween.

[0030] The terms used in the present disclosure are only used to describe specific embodiments, and do not limit the present disclosure. As used herein, the singular forms are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0031] In this disclosure, an electronic device may be a device that involves a communication function. For example, an electronic device may be a smart phone, a tablet personal computer (PC), a mobile phone, a video phone, an e-book reader, a desktop PC, a laptop PC, a netbook computer, a personal digital assistant (PDA), a portable multimedia player (PMP), an MP3 player, a portable medical device, a digital camera, or a wearable device (e.g., a head-mounted device (HMD)) such as electronic eyeglasses, electronic clothes, an electronic bracelet, an electronic necklace, an electronic appcessory, or a smart watch).

[0032] The teachings of this disclosure may also apply to a smart home appliance that involves a communication function. For example, an electronic device may be a TV, a digital video disk (DVD) player, audio equipment, a refrigerator, an air conditioner, a vacuum cleaner, an oven, a microwave, a washing machine, an air cleaner, a set-top box, a TV box (e.g., Samsung HomeSync™, Apple TV™, Google TV™, etc.), a game console, an electronic dictionary, an electronic key, a camcorder, or an electronic picture frame.

[0033] The teachings of this disclosure may also apply to various medical devices (for example, various kinds of portable medical measuring device (blood glucose meter, heart rate meter, blood pressure meter, or a temperature measuring instrument, etc.), magnetic resonance angiography (MRA), magnetic resonance imaging (MRI), computed tomography (CT), camcorder, etc., navigation (navigation) devices, global positioning system receiver (GPS) receiver, EDR (event data recorder), flight data recorder (FDR), automotive infotainment (infotainment) devices, marine electronic equipment (e.g., marine navigation systems, gyro-compass, etc.), aviation electronics (avionics), security devices, automotive head unit (head unit), industrial or household robots, financial institutions, automatic teller machine (ATM), point of sales (POS) terminals, or Internet of Things (IoT) devices (e.g. light bulbs, various sensors, electric or gas meters, sprinkler systems, fire alarms, thermostat, street lights, toaster, fitness equipment, hot water tank, a heater, a boiler, etc.).

[0034] Hereinafter, for convenience in the description, an electronic device according to various embodiments of the present disclosure will be described on a smart watch as a wearable electronic device. However, the electronic device according to various embodiments of the present disclosure is not limited to the smart watch, and it can be provided as a bracelet, ring, and ankle bracelet.

[0035] FIG. 1A illustrates an electronic device according to an embodiment of the present disclosure, FIG. 1B is an exploded perspective view illustrating an electronic device according to an embodiment of the present disclosure, and FIG. 2 illustrates a first housing of an electronic device according to an embodiment of the present disclosure.

[0036] With reference to FIGS. 1A to 2, the electronic device 100 according to an embodiment of the present disclosure may include a plurality of sensors (e.g., a RGB sensor, a Heart Rate Monitor (HRM) sensor, and/or a temperature sensor) and a plurality of electrodes (e.g., electrocardiogram (ECG) electrode and galvanic skin response (GSR) electrode) for measuring a user's health state (e.g., heart rate, heart electrical activity, pulse, blood pressure, body fat, sleep, stress, body temperature, biological age, body fatness, and total body fluid). The plurality of sensors and electrodes may be located by dividing a housing

of the electronic device **100** into an upper surface and a rear surface. Further, the electronic device **100** may include at least one function key **150** at its side surface. The at least one function key **150** may include a power key, menu key, and selection key. Although FIG. 1A illustrates an electronic device **100** including 2 function keys **150**, the electronic device **100** may include only one function key or more than 2 function keys. Further, the electronic device **100** may include a display module **110** for providing information related to a user's health state based on the user's bio-signals collected by the plurality of sensors and the plurality of electrodes. According to another embodiment, the display module **110** may include a touch panel.

[0037] The housing of the electronic device **100** may be configured with a first housing **10** as a front case and a second housing **20** as a rear case.

[0038] The display module **110** and a first window **111** protecting the display module **110** can be combined with the front (upper) surface of the first housing **10**, a second window **121** protecting an RGB sensor (not shown) can be combined with a side surface (e.g., left surface) of the first housing **10**, and a third window **131** protecting a first heart rate sensor module (not shown) and a first electrode **140** can be disposed on the lower portion of the first housing **10**. A connecting part **11** for connecting a strap may be formed at the ends of the upper portion and the lower portion of the first housing **10**.

[0039] The first housing **10** may be formed with plastic injection as shown by reference number **210** of FIG. 2. Alternatively, the first housing **10** may be made of a metallic material as shown by reference number **220** of FIG. 2. Here, the first electrode **140** can be electrically insulated from the first housing **10** when the first housing **10** is metallic. For example, an insulation material **41** (e.g., plastic injection) can be located between the first electrode **140** and the first housing **10** when the first housing **10** is metallic.

[0040] The first electrode **140** may be made of an electrically conductive material surrounding a third window **131**. As shown in FIG. 2, the first electrode **140** may appear decorative. For example, the first electrode **140** may be made of stainless steel. Therefore, an embodiment of the present disclosure may integrate an electrode used for biometric sensing into the housing as a decorative design element.

[0041] The second housing **20** can be combined with the first housing **10**. At least one function key **150** can be disposed on the left and/or right surface of the second housing **20**, and a fourth window **161** protecting a second heart rate sensor module (not shown) and a second electrode **170** can be combined with the rear surface of the second housing **20**.

[0042] A printed circuit board (PCB) **180** can be disposed in the housing by being placed between the first housing **10** and the second housing **20**.

[0043] The plurality of sensors and electrodes (e.g., first electrode **140** and second electrode **170**) can be electrically connected to the printed circuit board **180**. For example, the first electrode **140** and the second electrode **170** can be connected electrically to a sensor module (not shown) installed on the printed circuit board **180** by using a first connecting element and a second connecting element (e.g., C-clip).

[0044] The electronic device **100** shown in FIGS. 1A to 2 is exemplary, and the embodiments of the present disclosure

are not limited thereto. Although FIGS. 1A to 2 illustrate the first electrodes **140** as having two sub-electrodes, only one first electrode **140** can be formed according to another embodiment. Further, although the electronic device **100** is illustrated in a rectangular form, the electronic device **100** can be manufactured in a circular form according to another embodiment.

[0045] Hereinafter, a coupling structure for a plurality of sensors and electrodes is described in more detail.

[0046] FIG. 3A illustrates a structure for coupling a first electrode according to an embodiment of the present disclosure, and FIG. 3B illustrates various examples of a first electrode according to an embodiment of the present disclosure.

[0047] With reference to FIGS. 3A and 3B, the first electrode **140** according to an embodiment of the present disclosure may be divided into 2 sub-electrodes. For example, the first electrode **140** can be divided into a first front electrode **141** and a second front electrode **142** by forming a separation at the center of the first electrode **140**. The first front electrode **141** and the second front electrode **142** may substantially the same front area size. Meanwhile, according to another embodiment, the first electrode **140** can be separated in various forms as shown in FIG. 3B.

[0048] The first front electrode **141** and the second front electrode **142** may contact with a side surface of the printed circuit board **180**. For example, the first front electrode **141** and the second front electrode **142** may include outer surfaces **141a** and **142a** and contact surfaces **141b** and **142b** extending from the outer surfaces **141a** and **142a**. The contact surfaces **141b** and **142b** may be connected to the printed circuit board **180**. The contact surfaces **141b** and **142b** can be connected electrically to the printed circuit board **180** through first connecting elements **311** and **312**. For example, the first connecting elements **311** and **312** can be C-clips having an elastic property as shown in FIG. 3A. However, the present disclosure is not limited to this. For example, the first connecting elements **311** and **312** may be made with a sponge, Poron, or conductive adhesive tape. According to an embodiment, the contact surfaces **141b** and **142b** can contact directly with a contact pad (not shown) formed on the printed circuit board **180**, or be connected to the printed circuit board **180** through a Flexible Printed Circuit Board (FPCB) or a cable. The first front electrode **141** and the second front electrode **142** can be connected to a sensor module (not shown) installed on the printed circuit board **180** through wirings of the printed circuit board.

[0049] FIG. 4 illustrates a structure for coupling a first heartbeat sensor module according to an embodiment of the present disclosure.

[0050] With reference to FIG. 4, the first heart rate sensor module **130** according to an embodiment of the present disclosure may be located under the third window **131**. The first heart rate sensor module **130** can be connected electrically to the printed circuit board **180** through an FPCB **132**. The FPCB **132** can be connected to the printed circuit board **180** by passing through a slit formed between contact surfaces **141b** and **142b** of the first electrode **140**.

[0051] FIG. 5 illustrates a structure for coupling a second electrode according to an embodiment of the present disclosure.

[0052] With reference to FIG. 5, the second electrode **170** according to an embodiment of the present disclosure may be located at the bottom surface of the second housing **20**.

The second electrode **170** may be configured with two electrodes. For example, the second electrode **170** may include a first rear electrode **170a** and a second rear electrode **170b**.

[0053] The first rear electrode **170a** and the second rear electrode **170b** can be connected electrically to the printed circuit board **180** through second connecting elements **171** and **172**. The second connecting elements **171** and **172** may be C-clips having an elastic property. However, the present disclosure is not limited to this. For example, the second connecting elements **171** and **172** can be made with a sponge, Poron, or conductive adhesive tape. According to another embodiment, the second electrode **170** can contact directly with a contact pad formed on the printed circuit board **180** (e.g., side surface), or can be connected to the printed circuit board **180** through an FPCB or a cable.

[0054] FIG. 6 illustrates a structure for coupling a second heartbeat sensor module according to an embodiment of the present disclosure, and FIG. 7 illustrates a structure for coupling a temperature sensor module according to an embodiment of the present disclosure.

[0055] With reference to FIGS. 6 and 7, the second heart rate sensor module **160** according to an embodiment of the present disclosure may be installed on a discrete FPCB. The second heart rate sensor module **160** may be configured with a light emitter **160a** and a light receiver **160b**. The light emitter **160a** may be an LED (Light Emitting Diode), and the light receiver **160b** may be a PD (Photo Diode).

[0056] The discrete FPCB **163** can be disposed on the second housing **20**. Here, the second heart rate sensor module **160** can be covered by a fourth window **161**. The fourth window **161** may be divided into a first part **161a** covering the light emitter **160a** and a second part **161b** covering the light receiver **160b**. The fourth window **161** may be divided into first part **161a** and second part **161b** by an opaque divider. This is done because the light generated by the light emitter **160a** may be a noise source for the light receiver **160b**. Therefore, to reduce the amount of light from light emitter **160a** that is detected by the light receiver **160b**, the fourth window **161** is divided into at least two parts by an opaque divider.

[0057] The fourth window **161** may have similar properties to those of the second housing **20** and may be formed with a material having an excellent adhesion power and high anti-scratch properties. For example, in case that the second housing **20** is made with a PC (polycarbonate) material, the fourth window **161** can be made with a transparent Durabio resin. The fourth window **161** and the second housing **20** can be combined by an insert injection method.

[0058] A temperature sensor **190** may be installed at a side of the discrete FPCB **163**. The temperature sensor **190** may be located at one of the second electrodes **170**. For example, the temperature sensor **190** can be attached to the interior surface of the first rear electrode **170a** by using an adhesive tape as shown in FIG. 7. Various temperature sensors of contact or non-contact type can be used as the temperature sensor **190**. For example, the temperature sensor **190** can be a temperature sensor that detects temperature using a thermistor or infrared ray. Such a temperature sensor **190** is well known to those skilled in the art; therefore, detailed description on the temperature sensor **190** is omitted here.

[0059] FIG. 8 illustrates a structure for coupling a light/color sensor such as an RGB sensor module according to an embodiment of the present disclosure.

[0060] With reference to FIG. 8, the RGB sensor **120** according to an embodiment of the present disclosure can be installed with the second window **121**, and the RGB sensor **120** can be connected to the printed circuit board **180** through an FPCB **122**.

[0061] FIG. 9 illustrates a method for a bio-signal to be measured by an electronic device according to an embodiment of the present disclosure.

[0062] With reference to FIG. 9, the electronic device **100** according to one embodiment of the present disclosure can be worn on a user's body (e.g., on a wrist). If the user wears the electronic device **100**, the second electrode **170**, the second heart rate sensor module **160**, and the temperature sensor **190** can be in contact with the user's body. Here, the electronic device **100** can measure a bio-signal through a plurality of sensors and electrodes to provide information related to a user's health state. For example, the electronic device **100** can measure a user's body temperature through the temperature sensor **190**. Further, the electronic device **100** can measure bio-signals (e.g., galvanic skin response) through the rear electrodes **170a** and **170b** to analyze stress and emotion of the user. Further, the electronic device **100** can detect changes of blood pressure and flow through the second heart rate sensor module **160** by measuring the user's heart rate. Further, the electronic device **100** can measure an outdoor visibility (i.e. light intensity) of the surrounding environment using the RGB sensor **120**. The RGB sensor can further detect blue light intensity for the purposes of performing an analysis of the user's sleep. Further, the electronic device **100** can measure an intensity of infrared rays through the first heart rate sensor module **130**.

[0063] As shown in FIG. 9, if a finger of a user's hand not wearing the electronic device **100** touches the first heart rate sensor module **130**, the electronic device **100** can measure a heart rate and a degree of oxygen saturation (saturation pulse oximetry O2: SPO2) through the first heart rate sensor module **130**.

[0064] Further, if the user touches one of the first electrodes **140** with a hand not wearing the electronic device **100**, the electronic device **100** can provide electrocardiogram information based on bio-signals measured by one of the first electrode **140** and the second electrode **170**.

[0065] Further, if the user simultaneously touches both the first front electrode **141** and the second front electrode **142** with a hand not wearing the electronic device **100**, the electronic device **100** can provide BIA (Bio-Impedance Analysis) information based on bio-signals measured by the first front electrode **141**, second front electrode **142**, and second electrode **170**. The BIA indicates a hydration degree of tissue and an amount of body fluid, and from them body composition, body fluid balance, and cell health index can be known. For example, the electronic device **100** can provide a biological age, detoxification state, body fat percentage, total body fluid, critical symptoms (e.g., cancer or kidney dialysis symptoms), early detection of lymphedema, signs of metabolic disease (e.g., diabetes, high blood pressure, stroke, and arteriosclerosis) through BIA.

[0066] Further, if the user simultaneously touches one of the first electrodes **140** and the first heart rate sensor module **130** with a hand not wearing the electronic device **100**, the electronic device **100** can provide blood pressure information based on bio-signals measured by one of the first electrode **140**, first heart rate sensor module **130**, and second electrode **170**.

[0067] As shown in FIG. 9, an embodiment of the present disclosure enables easy measurement of health information (e.g. heart rate, oxygen saturation, heart electrical activity, bio-impedance, and blood pressure) with a single touch by disposing the second front electrode **142** on a bottom surface of the electronic device touching the user, and providing the first front electrode **141** and the first heart rate sensor module **130** at a location so that the first front electrode **141** and the first heart rate sensor module **130** can be touched by the user's arm that is not wearing the electronic device.

[0068] Accordingly, the electronic device **100** according to one or more embodiments of the present disclosure enables measurements of stress, emotion, heart rate, blood pressure, blood flow, etc. by using the second electrode **170** and the second heart rate sensor module **160** located at the rear surface of the electronic device **100** and enables measurements of heart electrical activity, bio-impedance, blood pressure, oxygen saturation, etc. by using the first electrode **140** and the first heart rate sensor module **130** located at the front surface of the electronic device **100** in conjunction with the second electrode **170** and the second heart rate sensor module **160** located at the rear surface of the electronic device **100**.

[0069] FIG. 10 is a block diagram illustrating an electronic device **1001** in accordance with an embodiment of the present disclosure. The electronic device **1001** may form, for example, the whole or part of the electronic device **100** shown in FIGS. 1 to 9. Referring to FIG. 10, the electronic device **1001** includes at least one application processor (AP) **1010**, a communication module **1020**, a subscriber identification module (SIM) card **1024**, a memory **1030**, a sensor module **1040**, an input unit **1050**, a display **1060**, an interface **1070**, an audio module **1080**, a camera module **1091**, a power management module **1095**, a battery **1096**, an indicator **1097**, and a motor **1098**.

[0070] The AP **1010** may drive an operating system or applications, control a plurality of hardware or software components connected thereto, and also perform processing and operation for various data including multimedia data. The AP **1010** may be a system-on-chip (SoC), for example. According to an embodiment of the present disclosure, the AP **1010** may further include a graphic processing unit (GPU). The AP **1010** may include a microprocessor or any suitable type of processing circuitry, such as one or more general-purpose processors (e.g., ARM-based processors), a Digital Signal Processor (DSP), a Programmable Logic Device (PLD), an Application-Specific Integrated Circuit (ASIC), a Field-Programmable Gate Array (FPGA), a Graphical Processing Unit (GPU), a video card controller, etc.

[0071] The communication module **1020** may include therein a cellular module **1021**, a WiFi module **1023**, a BT module **1025**, a GNSS module **1027**, an NFC module **1028**, and an RF (radio frequency) module **1029**.

[0072] The cellular module **1021** may offer a voice call, a video call, a message service, an internet service, and the like through a communication network (e.g., machine type communications (MTC), fifth generation (5G), long term evolution (LTE), long term evolution advanced (LTE-A), code division multiple access (CDMA), wideband code division multiple access (WCDMA), universal mobile telecommunications system (UMTS), wireless broadband (Wi-Bro), global system for mobile communications (GSM), wireless fidelity (Wi-Fi), Bluetooth, and near field commu-

nications (NFC) etc.). Additionally, the cellular module **1021** may perform identification and authentication of the electronic device in the communication network, using the SIM card **1024**. According to an embodiment of the present disclosure, the cellular module **1021** may perform at least part of functions the AP **1010** may provide. For example, the cellular module **1021** may perform at least part of a multimedia control function. Each of the WiFi module **1023**, the BT module **1025**, the GNSS module **1027** and the NFC module **1028** may include a processor for processing data transmitted or received. Although FIG. 10 shows the cellular module **1021**, the WiFi module **1023**, the BT module **1025**, the GNSS module **1027** and the NFC module **1028** as different blocks, at least part of them may be contained in a single IC (integrated circuit) chip or a single IC package.

[0073] The RF module **1029** may transmit and receive data, e.g., RF signals or any other electric signals. The RF module **1029** may include a transceiver, a PAM (power amp module), a frequency filter, an LNA (low noise amplifier), and the like. Although FIG. 10 shows that the cellular module **1021**, the WiFi module **1023**, the BT module **1025**, the GNSS module **1027** and the NFC module **1028** share the RF module **1029**, at least one of them may perform transmission and reception of RF signals through a separate RF module.

[0074] The SIM card **1024** may include, for example, an embedded SIM including a user identification module, and may include unique identification information (e.g., an integrated circuit card identifier (ICCID)) or subscriber information (e.g., international mobile subscriber identity (IMSI)).

[0075] The memory **1030** includes an internal memory **1032** and an external memory **1034**. The internal memory **1032** may include, for example, at least one of a volatile memory (e.g., a dynamic RAM (DRAM), a static RAM (SRAM), a synchronous dynamic RAM (SDRAM), etc.), and a non-volatile memory (e.g., a one time programmable ROM (OTPROM), a programmable ROM (PROM), an erasable and programmable ROM (EPROM), an electrically erasable and programmable ROM (EEPROM), a mask ROM, a flash ROM, a not AND (NAND) flash memory, a not OR (NOR) flash memory, etc.). According to an embodiment of the present disclosure, the internal memory **1032** may be in the form of a solid state drive (SSD). The external memory **1034** may further include a flash drive, for example, a compact flash (CF), a secure digital (SD), a micro-secure digital (micro-SD), a mini-secure digital (mini-SD), an extreme digital (xD), a memory stick, and the like. The external memory **1034** may be functionally connected to the electronic device **1001** through various interfaces.

[0076] The sensor module **1040** may measure physical quantity or sense an operating status of the electronic device **1001**, and then convert measured or sensed information into electric signals. The sensor module **1040** includes, for example, at least one of a gesture sensor **1040A**, a gyro sensor **1040B**, an atmospheric sensor **1040C**, a magnetic sensor **1040D**, an acceleration sensor **1040E**, a grip sensor **1040F**, a proximity sensor **1040G**, a color sensor **1040H** (e.g., RGB (red, green, blue) sensor), a biometric sensor **1040I**, a temperature-humidity sensor **1040J**, an illumination sensor **1040K**, and a UV (ultraviolet) sensor **1040M**. Additionally or alternatively, the sensor module **1040** may include, e.g., an E-nose sensor, an EMG (electromyography) sensor, an EEG (electroencephalogram) sensor, an ECG

(electrocardiogram) sensor, an IR (infrared) sensor, an iris scan sensor, or a finger scan sensor. Also, the sensor module 1040 may include a control circuit for controlling one or more sensors equipped therein.

[0077] The input unit 1050 includes a touch panel 1052, a digital pen sensor 1054, a key 1056, or an ultrasonic input unit 1058. The touch panel 1052 may recognize a touch input in a manner of capacitive type, resistive type, infrared type, or ultrasonic type. Also, the touch panel 1052 may further include a control circuit. The touch panel 1052 may further include a tactile layer. In this case, the touch panel 1052 may offer a tactile feedback to a user. The pen sensor 1054 (e.g., a digital pen sensor), for example, may be implemented by using a method identical or similar to a method of receiving a touch input from the user, or by using a separate sheet for recognition. For example, a key pad or a touch key may be used similar to the keys 1056. The ultrasonic input unit 1058 enables the terminal to sense a sound wave by using a microphone 1088 of the terminal through a pen generating an ultrasonic signal, and to identify data.

[0078] The display 1060 (e.g., the display 110) includes a panel 1062, a hologram 1064, or a projector 1066. The panel 1062 may have a flexible, transparent or wearable form. The panel 1062 may be formed of a single module with the touch panel 1052. The hologram 1064 may show a stereoscopic image in the air using interference of light. The projector 1066 may project an image onto a screen, which may be located at the inside or outside of the electronic device 1001. According to an embodiment of the present disclosure, the display 1060 may further include a control circuit for controlling the panel 1062, the hologram 1064, and the projector 1066.

[0079] The interface 1070 may include, for example, an HDMI (high-definition multimedia interface) 1072, a USB (universal serial Bus) 1074, an optical interface 1076, or a D-sub (D-subminiature) 1078. Additionally or alternatively, the interface 1070 may include, for example, an MHL (mobile high-definition link) interface, an SD (secure digital) card/MMC (multi-media card) interface, or an IrDA (infrared data association) interface.

[0080] The audio module 1080 may perform a conversion between sounds and electric signals. The audio module 1080 may process sound information inputted or outputted through a speaker 1082, a receiver 1084, an earphone 1086, or a microphone 1088.

[0081] The camera module 1091 is a device capable of obtaining still images and moving images. According to an embodiment of the present disclosure, the camera module 1091 may include at least one image sensor (e.g., a front sensor or a rear sensor), a lens, an ISP (image signal processor, not shown), or a flash (e.g., LED or xenon lamp, not shown).

[0082] The power management module 1095 may manage electric power of the electronic device 1001. The power management module 1095 may include, for example, a PMIC (power management integrated circuit), a charger IC, or a battery charge gauge. The PMIC may be implemented by, for example, an IC or an SoC semiconductor. Charging methods may be classified into a wired charging method and a wireless charging method. A wireless charging type may include, for example, a magnetic resonance type, a magnetic induction type, or an electromagnetic type. Any additional circuit for wireless charging may be further used such as a

coil loop, a resonance circuit, or a rectifier. The battery gauge may measure the residual charge amount of the battery 1096 and a voltage, current or temperature in a charging process. The battery 1096 may store or create electric power therein and supply electric power to the electronic device 1001. The battery 1096 may be, for example, a rechargeable battery or a solar battery.

[0083] The indicator 1097 may show thereon a current status (e.g., a booting status, a message status, or a recharging status) of the electronic device 1001 or of its part (e.g., the AP 1010). The motor 1098 may convert an electric signal into a mechanical vibration. The electronic device 1001 may include a specific processor (e.g., GPU) for supporting a mobile TV. This processor may process media data that comply with standards of DMB (digital multimedia broadcasting), DVB (digital video broadcasting), or MediaFlo.

[0084] Each of the above-discussed elements of the electronic device disclosed herein may be formed of one or more components, and its name may vary according to the type of the electronic device. The electronic device disclosed herein may be made with at least one of the above-discussed elements without some other elements or with additional other elements. Some of the elements may be integrated into a single entity that still performs the same functions as those of such elements that may be separable.

[0085] The electronic device 1001 may further include a plurality of electrodes (e.g., first electrode 140 and second electrode 170 shown in FIGS. 1 to 9). Further, the biometric sensor 1040I may further include a temperature sensor for measuring a body temperature (e.g., temperature sensor 190 of FIGS. 6 and 7) and a heart rate sensor module (e.g., first heart rate sensor module 130 of FIG. 4 and second heart rate sensor module 160 of FIG. 6). Further, the sensor module 1040 of the electronic device 1001 may further include an RGB sensor module (e.g., RGB sensor 120 of FIG. 8).

[0086] The electronic device 1001 according to an embodiment of the present disclosure may include a plurality of electrodes and sensors distributed at the upper and lower parts of the electronic device 1001. The electronic device 1001 can provide a user's health information by analyzing bio-signals measured through the plurality of electrodes and sensors. Further, the electronic device 1001 can store the health information in the memory 1030 for a predetermined period, semi-permanently, or permanently. Further, the electronic device 1001 can transmit the user's health information periodically to a designated terminal or server. Further, if the user's health suddenly becomes worse, for example, if the user falls down suddenly, the electronic device 100 can transmit an emergency message to a designated terminal or an emergency center.

[0087] The processor 1010 of the electronic device 1001 can identify whether the electronic device 1001 is worn by a user. If the electronic device is identified as being worn on the user's body, the processor 1010 can identify whether the user is a registered user by checking a bio-signal (e.g., heart signal). Detailed descriptions on this will be made with reference to FIG. 11. FIG. 11 is a flowchart illustrating a method for operating an electronic device according to an embodiment of the present disclosure.

[0088] According to an embodiment of the present disclosure with reference to FIG. 11, a processor (e.g., processor 1010 of FIG. 10) of an electronic device (e.g., electronic device 100 of FIG. 1 or electronic device 1001 of FIG. 10) identifies at operation 1101 whether the electronic device is

worn by a user. For example, the processor can identify whether the electronic device is being worn by a user by using a temperature sensor (e.g., reference number 190 of FIGS. 6 and 7). According to another embodiment, the processor can detect the wearing of an electronic device by using various sensor modules located at the bottom surface of the electronic device.

[0089] If the electronic device is identified as being worn by a user, the processor identifies a user's bio-signal (e.g., heart signal) at operation 1103. For example, the processor can identify a user's heart signal (e.g., by an ECG) by using bio-signals measured by the second electrode 170 and one of the first electrodes 140. According to another embodiment, the processor can output a message and/or a sound directing the user to touch a front electrode when wearing of the electronic device is detected.

[0090] The processor identifies whether the user is a registered user at operation 1105. For example, the processor can compare the identified bio-signal with a user's bio-signal stored previously in order to identify whether the user is a registered user.

[0091] If the user is identified as an unregistered user at operation 1105, at operation 1107 the processor prohibits real time sensing by the electronic device.

[0092] On the other hand, if the user is identified as a registered user at operation 1105, at operation 1109 the processor allows real time sensing by the electronic device, and provides a sensing result at operation 1111.

[0093] It would be recognized that when a general purpose computer accesses code for implementing the processing shown herein, the execution of the code transforms the general purpose computer into a special purpose computer for executing the processing shown herein. Any of the functions and steps provided in the Figures may be implemented in hardware, software or a combination of both and may be performed in whole or in part within the programmed instructions of a computer.

[0094] FIG. 12 is an exploded perspective view illustrating a charging device according to an embodiment of the present disclosure, and FIG. 13 is a cross-sectional view illustrating a state of coupling an electronic device to a charging device according to an embodiment of the present disclosure.

[0095] With reference to FIGS. 12 and 13, the electronic device 200 (hereinafter, second electronic device or the external device) according to an embodiment of the present disclosure may be an accessory device for charging the electronic device 100 (hereinafter, first electronic device).

[0096] The second electronic device 200 may include a first housing 201, second housing 202, first magnetic member 203, second magnetic member 204, first contact pin 205, second contact pin 206, interface unit 207, and printed circuit board 208. The first magnetic member 203 can be placed adjacent to the first contact pin 205, and the second magnetic member 204 can be placed adjacent to the second contact pin 206.

[0097] The first housing 201 may be a case covering the upper surface of the second electronic device 200, and the second housing 202 may be a case covering the lower surface and side surfaces of the second electronic device 200.

[0098] An second external device (e.g., the electric charger) can be connected to the interface unit 207. The interface unit 207 may be a connector having specifications of USB

(Universal Serial Bus), micro-USB, and USB 3.0 C-type. The printed circuit board 208 can be installed to be connected to the interface unit 207, first contact pin 205, and second contact pin 206.

[0099] The first contact pin 205 and the second contact pin 206 may contact respectively with a first rear electrode 170a and a second rear electrode 170b of the first electronic device 100. The first contact pin 205 and the second contact pin 206 can transmit power from the electric charger (not shown) connected through the interface unit 207 to the first electronic device 100. For example, as shown in FIG. 13, the first contact pin 205 can be connected to a positive (+) electric terminal of the charger (not shown) through the interface unit 207, and the second contact pin 206 can be connected to a negative (-) electric terminal of the charger (not shown) through the interface unit 207. In turn, the first contact pin 205 is electrically coupled to the first rear electrode 170a and the second contact pin 206 to the second rear electrode 170b in order to transmit power from the electric charger to the first electronic device. Therefore, an embodiment of the present disclosure can use the first rear electrode 170a and the second rear electrode 170b for measuring bio-signals as well as for use as charging terminals. Accordingly, the first electronic device 100 does not require separate charging terminals.

[0100] Although FIGS. 12 and 13 illustrate that the first contact pin 205 and the second contact pin 206 may be pogo pins, but embodiments of the present disclosure are not so limited. For example, the first contact pin 205 and the second contact pin 206 can contact with the first rear electrode 170a and the second rear electrode 170b using various mechanism, for example C-clips.

[0101] According to an embodiment of the present disclosure, the first contact pin 205 and the second contact pin 206 can be installed at the right and left sides of the second electronic device 200 symmetrically. Accordingly, the second electronic device 200 can be coupled to the first electronic device 100 when the second electronic device 200 is variously oriented with respect to the first electronic device 100. According to another embodiment, the first contact pin 205 and the second contact pin 206 can be installed asymmetrically so as to distinguish the left side of the second electronic device 200 from the right side of the second electronic device 200. In doing so, the second electronic device 200 may be coupled to the first electronic device 100 only when the second electronic device 200 is oriented with respect to the first electronic device 100 in a particular direction.

[0102] The first magnetic member 203 and the second magnetic member 204 can be located between the first housing 201 and the second housing 202. The first magnetic member 203 and the second magnetic member 204 can be installed corresponding to the locations of the first rear electrode 170a and the second rear electrode 170b of the first electronic device 100. By this arrangement, the second electronic device 200 according to an embodiment of the present disclosure can be coupled to the first electronic device 100 without using a separate coupling structure because of attracting forces generated between the magnetic member 203 and 204 and the rear electrodes 170a and 170b. Further, the first electronic device 100, by virtue of already including the second electrode 170, does not require a separate magnetic or metallic member to be attracted to the first magnetic member 203 and the second magnetic member

204. The rear electrodes **170a** and **170b** of the first electronic device **100** may be made with NSSC 190 material from Nippon Steel & Sumikin Stainless or STS445NF material from POSCO.

[0103] The first electronic device **100** may further include a first sensor **101** and a second sensor **102** for identifying the first magnetic member **203** and the second magnetic member **204**. The first sensor **101** and the second sensor **102** may be a Hall IC (Integrated Circuit) for identifying magnetic properties. The first sensor **101** and the second sensor **102** can be located corresponding to the locations of the first magnetic member **203** and the second magnetic member **204** respectively. Here, the magnetic property may include a polarity of a material, a magnetic field strength, and the like.

[0104] According to an embodiment of the present disclosure, the first electronic device **100** may include only one sensor (e.g., Hall IC). For example, the first electronic device **100** may include only one sensor (e.g., Hall IC) for detecting a coupling state when the first contact pin **205** and the second contact pin **206** are installed asymmetrically on the second electronic device **200**, because it is unnecessary to identify a coupling direction if the first electronic device **100** and the second electronic device **200** are always coupled in the same orientation.

[0105] Meanwhile, if the coupling direction of the second electronic device **200** is not limited to a single orientation, the first electronic device **100** must identify the coupling direction of the second electronic device **200**. This is because locations of contact pins being connected to the first rear electrode **170a** and the second rear electrode **170b** can change according to the coupling direction of the second electronic device **200**. For example, as shown in FIG. 13, if the first electronic device **100** is coupled so that the first magnetic member **203** is located at the right side and the second magnetic member **204** is located at the left side, a positive (+) current may be supplied to the first rear electrode **170a** of the first electronic device **100** by contacting the first contact pin **205** with the first magnetic member **203** and a negative (−) current may be supplied to the second rear electrode **170b** by contacting the second contact pin **206** with the second magnetic member **204**. Conversely, if the first electronic device is coupled so that the first magnetic member **203** is located at the left side and the second magnetic member **204** is located at the right side, a negative (−) current may be supplied to the first rear electrode **170a** of the first electronic device **100** and a positive (+) current may be supplied to the second rear electrode **170b**. In that case, the electronic device **100** may not be able to accept power from the second electronic device **200**. Therefore, the first electronic device **100** may include a switch (not shown) for connecting the first rear electrode **170a** with a charging module (not shown) and connecting the second rear electrode **170b** with a ground, or connecting the first rear electrode **170a** with a ground and connecting the second rear electrode **170b** with the charging module (not shown), according to the coupling direction of the second electronic device **200**.

[0106] If the first magnetic member **203** and the second magnetic member **204** are installed in the second electronic device **200** symmetrically, an embodiment of the present disclosure can identify a coupling direction of the second electronic device **200** because the magnetic properties of the first magnetic member **203** and the second magnetic member **204** are different. For example, the first electronic device **100**

can identify the coupling direction of the second electronic device **200** because the magnetic properties identified by the first sensor **101** and second sensor **102** are different, depending on the orientation of the second electronic device **200** to the first electronic device **100**.

[0107] Alternatively, by changing the locations of first sensor **101** and the second sensor **102** for identifying the first magnetic member **203** and the second magnetic member **204**, the first electronic device **100** can identify the coupling direction of the second electronic device **200**. For example, the first electronic device **100** can identify the coupling direction of the second electronic device **200** because the magnetic properties (e.g. magnetic field strength) identified by the first sensor **101** and the second sensor **102** of the first electronic device **100** is different even though the first magnetic member **203** and the second magnetic member **204** have the same magnetic property.

[0108] Alternatively, the magnetic properties (e.g. magnetic field strength) identified by the first sensor **101** and the second sensor **102** of the first electronic device **100** can be different if the first magnetic member **203** and the second magnetic member **204** are installed asymmetrically.

[0109] The first electronic device **100** may further include a switch for connecting the second electrode **170** to a sensor module (not shown) or a charging module (not shown) according to the coupling state of the second electronic device **200**. According to another embodiment, the first electronic device **100** may include a switch for blocking or connecting a path between the second electrode **170** and the sensor module (not shown) according to the coupling state of the second electronic device **200**.

[0110] As described above, one or more embodiments of the present disclosure do not require a separate electrode because a conductive portion of the housing, which may be seen as decorative, is used as an electrode for measuring a bio-signal. Further, one or more embodiments of the present disclosure can provide biometric information on various items with a single touch from the user because a plurality of electrodes and sensors are constantly touching the user because one or more embodiments of the present disclosure are worn by the user. Further, one or more embodiments of the present disclosure do not require a separate charging terminal because the electrodes that are used for measuring bio-signals can also be used as charging terminals. Further, according to one or more embodiments of the present disclosure, the electronic device does not require a separate magnetic or metallic member for coupling to a charging device because the electrodes that are used for measuring bio-signals can also be used as the metallic members that generate an attractive magnetic force with the charging device

[0111] The term “module” as used in this disclosure may refer to a certain unit that includes one of hardware, software and firmware or any combination thereof. The term module may be interchangeably used with unit, logic, logical block, component, or circuit, for example. The module may be the minimum unit, or part thereof, which performs one or more particular functions. The module may be formed mechanically or electronically. For example, the module disclosed herein may include at least one of ASIC (application-specific integrated circuit) chip, FPGAs (field-programmable gate arrays), and programmable-logic device, which have been known or are to be developed.

[0112] It will be understood that the above-described embodiments are examples to help easy understanding of the contents of the present disclosure and do not limit the scope of the present disclosure. Accordingly, the scope of the present disclosure is defined by the appended claims, and it will be construed that all corrections and modifications derived from the meanings and scope of the following claims and the equivalent concept fall within the scope of the present disclosure.

[0113] The above-described embodiments of the present disclosure can be implemented in hardware, firmware or via the execution of software or computer code that can be stored in a recording medium such as a CD ROM, a Digital Versatile Disc (DVD), a magnetic tape, a RAM, a floppy disk, a hard disk, or a magneto-optical disk or computer code downloaded over a network originally stored on a remote recording medium or a non-transitory machine readable medium and to be stored on a local recording medium, so that the methods described herein can be rendered via such software that is stored on the recording medium using a general purpose computer, or a special processor or in programmable or dedicated hardware, such as an ASIC or FPGA. As would be understood in the art, the computer, the processor, microprocessor controller or the programmable hardware include memory components, e.g., RAM, ROM, Flash, etc. that may store or receive software or computer code that when accessed and executed by the computer, processor or hardware implement the processing methods described herein. No claim element herein is to be construed under the provisions of 35 U.S.C. 112, sixth paragraph, unless the element is expressly recited using the phrase “means for.” In addition, an artisan understands and appreciates that a “processor” or “microprocessor” may be hardware in the claimed disclosure. Under the broadest reasonable interpretation, the appended claims are statutory subject matter in compliance with 35 U.S.C. §101.

What is claimed is:

1. An electronic device comprising:
 - a housing having a top surface and a bottom surface;
 - a first electrode disposed on the top surface of the housing, the first electrode electrically isolated from rest of the top surface;
 - a second electrode disposed on the bottom surface of the housing and contacting a user's body when the electronic device is worn by the user;
 - a sensor module electrically coupled to the first electrode and the second electrode;
 - a processor electrically coupled to the sensor module;
 - a display module electrically coupled to the processor; and
 - a memory electrically coupled to the processor,
 wherein the memory stores instructions that, when executed by the processor, causes the sensor module to measure the user's bio-signal using the first electrode and the second electrode, and the processor to provide the user's health state information by analyzing the measured bio-signal.
2. The electronic device of claim 1, wherein the first electrodes comprises two sub-electrodes, the two sub-electrodes have substantially same area, and are disposed within a distance so that the user can simultaneously touch the two sub-electrodes with a finger.
3. The electronic device of claim 2, wherein the processor provides ECG (Electrocardiogram) information when one of

the two sub-electrodes is touched by the user, and provides BIA (Bio-Impedance Analysis) information when both of the two sub-electrodes are simultaneously touched by the user.

4. The electronic device of claim 1, further comprising:
 - a first heart rate sensor module disposed on the top surface of the housing and configured to measure a heart rate of the user, an intensity of infrared rays in an environment of the user, and a degree of oxygen saturation in the user's blood.
5. The electronic device of claim 4, wherein the processor provides blood pressure information by analyzing bio-signals measured by the first electrode, the second electrode, and the first heart rate sensor module.
6. The electronic device of claim 4, further comprising:
 - a second heart rate sensor module disposed on the bottom surface of the housing and configured to measure a blood flow, a blood pressure change, and an heart rate of the user when the electronic device is worn by the user;
 - an RGB sensor disposed on a side of the top surface of the housing and configured to measure a light intensity in the environment of the user; and
 - a temperature sensor disposed on the bottom surface of the housing and configured to measure a body temperature of the user.
7. The electronic device of claim 6, wherein the temperature sensor is located on a surface of the second electrode that is opposite of an exterior of the electronic device.
8. The electronic device of claim 6, wherein the processor provides stress and emotion analysis information by analyzing a galvanic skin response measured by the second electrode when the electronic device is worn by the user, and provides sleep analysis information by analyzing blood flow information measured by the second heart rate sensor module and blue light information measured by the RGB sensor.
9. The electronic device of claim 1, wherein the first electrode comprises:
 - an outer surface exposed to an exterior of the electronic device; and
 - a contact surface extended from a side of the outer surface and configured to be in electrical contact with a printed circuit board.
10. The electronic device of claim 9, further comprising:
 - a first connecting element configured to connect the contact surface to the printed circuit board.
11. The electronic device of claim 1, further comprising:
 - a second connecting element disposed between the second electrode and a printed circuit board, and configured to electrically connect the second electrode to the printed circuit board.
12. The electronic device of claim 1, wherein the second electrode is electrically connected to a charging terminal of an external device when the external device is coupled to the electronic device for charging the electronic device.
13. The electronic device of claim 12, wherein the second electrode is made of a metallic or magnetic material that is attracted to a magnetic member disposed in the external device.
14. The electronic device of claim 13, further comprising:
 - at least one sensor configured to identify the magnetic member.
15. The electronic device of claim 13, wherein the processor identifies a coupling direction of the external device

by using two sensors configured to identify the magnetic member, and switches a charging path that includes the second electrode based on the identification.

16. The electronic device of claim **12**, wherein the external device further comprises:

a housing;

two contact pins exposed to an exterior of the housing and configured to contact the second electrode;

at least one magnetic member disposed in the housing and provides an attracting force to the second electrode;

an interface unit connected to a charging device for charging the electronic device; and

a printed circuit board coupled to the interface unit and the contact pin.

17. The electronic device of claim **16**, wherein at least one of the contact pins is a pogo pin.

18. The electronic device of claim **16**, wherein the two contact pins are disposed symmetrically at a right side and a left side of the external device.

19. The electronic device of claim **16**, wherein the external device includes two magnetic members disposed relatively adjacent to the two contact pins.

20. The electronic device of claim **19**, wherein the two magnetic members have different magnetic properties when the two magnetic members are disposed symmetrically at a right side and a left side of the external device.

* * * * *

专利名称(译)	用于测量生物信息的电子设备和用于对电子设备充电的设备		
公开(公告)号	US20170296088A1	公开(公告)日	2017-10-19
申请号	US15/469673	申请日	2017-03-27
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	CHOI BONGSUK		
发明人	CHOI, BONGSUK		
IPC分类号	A61B5/0408 A61B5/00 A61B5/0205 H05K5/00 A61B5/145 A61B5/16 A61B5/021 A61B5/024 A61B5/026 A61B5/053		
CPC分类号	A61B5/04085 A61B2560/0214 A61B5/6801 A61B5/742 A61B5/7271 A61B5/14542 A61B5/02055 A61B5/165 A61B5/4806 A61B5/0533 A61B2560/0242 A61B5/024 A61B5/021 A61B5/026 A61B2562/166 H05K5/0017 A61B5/0402 A61B5/681 A61B2560/0456 A61B2560/0468		
优先权	1020160046230 2016-04-15 KR		
外部链接	Espacenet USPTO		

摘要(译)

本公开的各种实施例涉及用于测量生物信息的电子设备和用于对电子设备充电的设备。电子设备可包括具有顶表面和底表面的壳体，设置在壳体的顶表面上的第一电极，第一电极与顶表面的其余部分电隔离，第二电极设置在壳体的底表面上。当用户佩戴电子设备时容纳和接触用户的身体，电耦合到第一电极和第二电极的传感器模块，电耦合到传感器模块的处理器，电耦合到处理器的显示模块；以及电耦合到处理器的存储器。存储器可以存储指令，当由处理器执行时，使得传感器模块使用第一电极和第二电极测量用户的生物信号，并且处理器通过分析测量的生物信号来提供用户的健康状态信息。。此外，可以基于本公开的技术精神和范围来实现各种实施例。

