




US 20150025326A1

(19) **United States**(12) **Patent Application Publication**  
**KIM et al.**(10) **Pub. No.: US 2015/0025326 A1**(43) **Pub. Date: Jan. 22, 2015**(54) **ACCESSORIES FOR REMOTE MONITORING***A61B 5/01* (2006.01)(71) Applicant: **Samsung Electronics Co., Ltd.,**  
Suwon-si (KR)*A61B 5/021* (2006.01)*A61B 5/0402* (2006.01)*A61B 5/0476* (2006.01)(72) Inventors: **Jong Pal KIM**, Seoul (KR); **Kun Soo SHIN**, Seongnam-si (KR)(52) **U.S. Cl.**CPC ..... *A61B 5/0015* (2013.01); *A61B 5/681*(2013.01); *A61B 5/6803* (2013.01); *A61B**5/0402* (2013.01); *A61B 5/0488* (2013.01);*A61B 5/0476* (2013.01); *A61B 5/01* (2013.01);*A61B 5/021* (2013.01); *A61B 5/0006*(2013.01); *A61B 5/0008* (2013.01); *A61B**5/04012* (2013.01); *A61B 5/72* (2013.01)(21) Appl. No.: **14/509,444**USPC ..... **600/300**(22) Filed: **Oct. 8, 2014****Related U.S. Application Data**(63) Continuation of application No. 11/436,769, filed on  
May 19, 2006, now Pat. No. 8,882,667.(30) **Foreign Application Priority Data**

Oct. 11, 2005 (KR) ..... 10-2005-0095644


**Publication Classification**(51) **Int. Cl.***A61B 5/00* (2006.01)*A61B 5/0488* (2006.01)*A61B 5/04* (2006.01)(57) **ABSTRACT**

An accessory for remote monitoring, including: a body capable of being placed on a human body; a measurement unit installed in the body and measuring a change in surroundings; a signal processing unit for processing a signal acquired from the measurement unit; and a wireless communication unit including a monopole antenna transmitting the signal processed by the signal processing unit and a ground installed along the body, corresponding to the monopole antenna. The signal processing unit and the monopole antenna are manufactured in a small size to be formed in the accessories body or periphery of the accessories body, and a space for wiring the ground may be obtained by using a band or the accessories body in an extended shape.

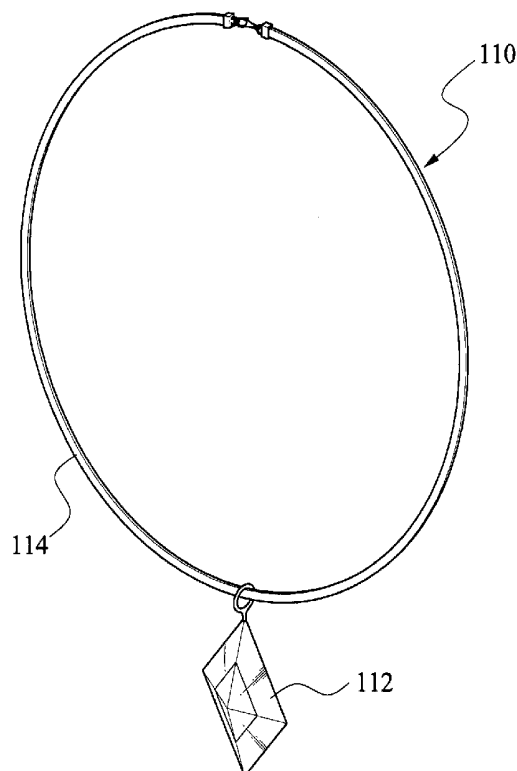
100

**FIG. 1**

100

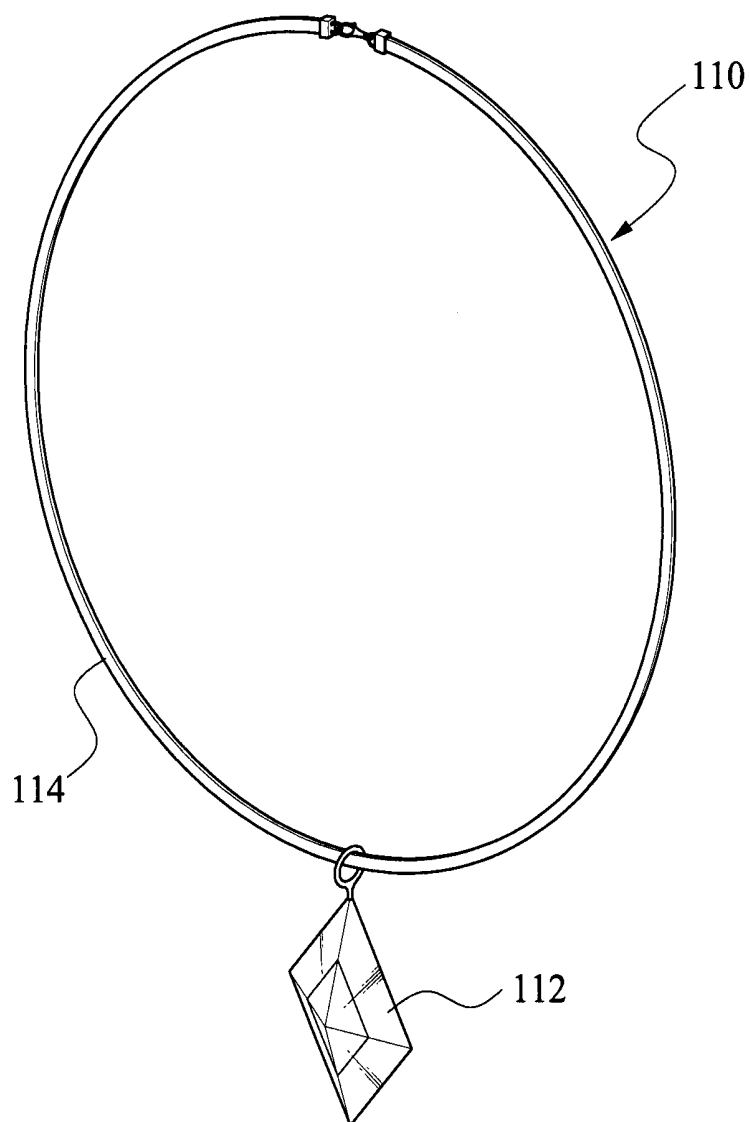

**FIG. 2**

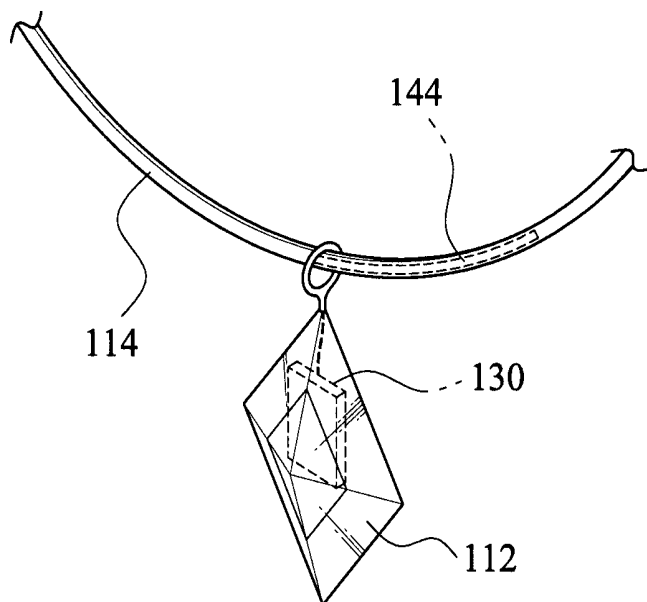

**FIG. 3**

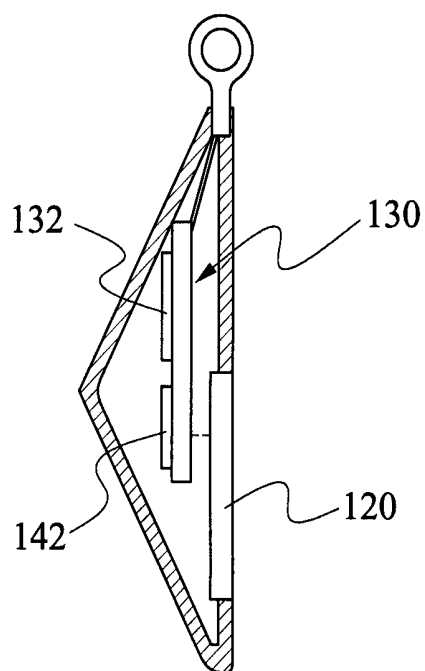


FIG. 4

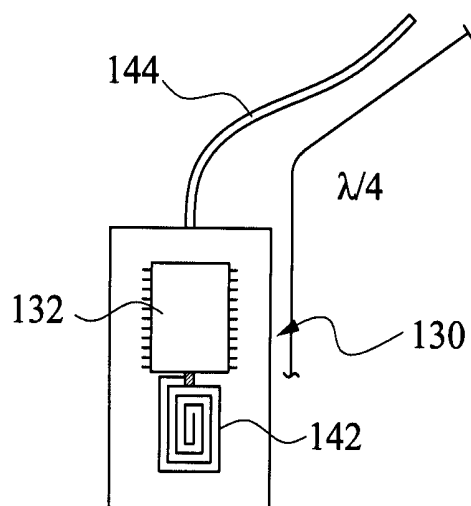


FIG. 5



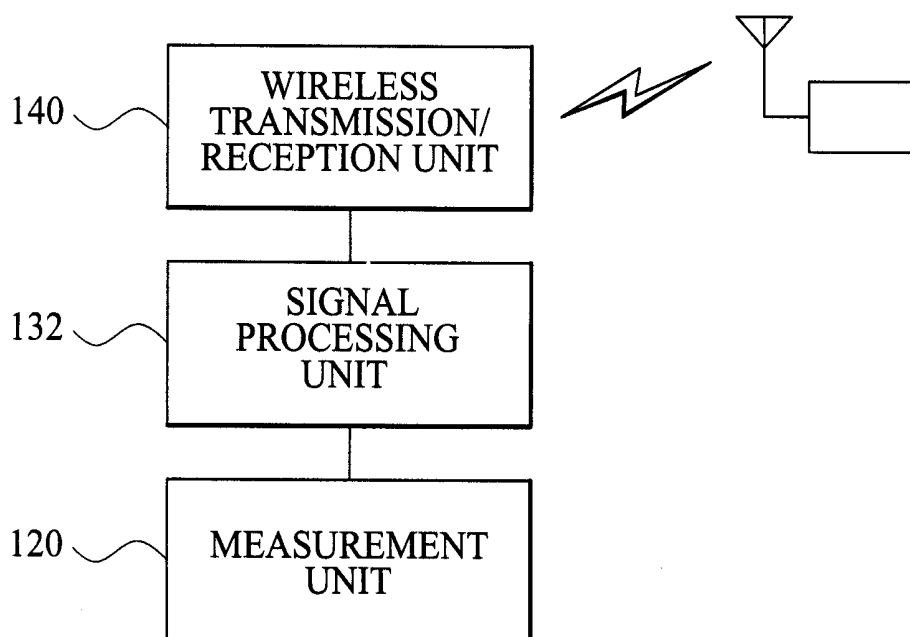



FIG. 6

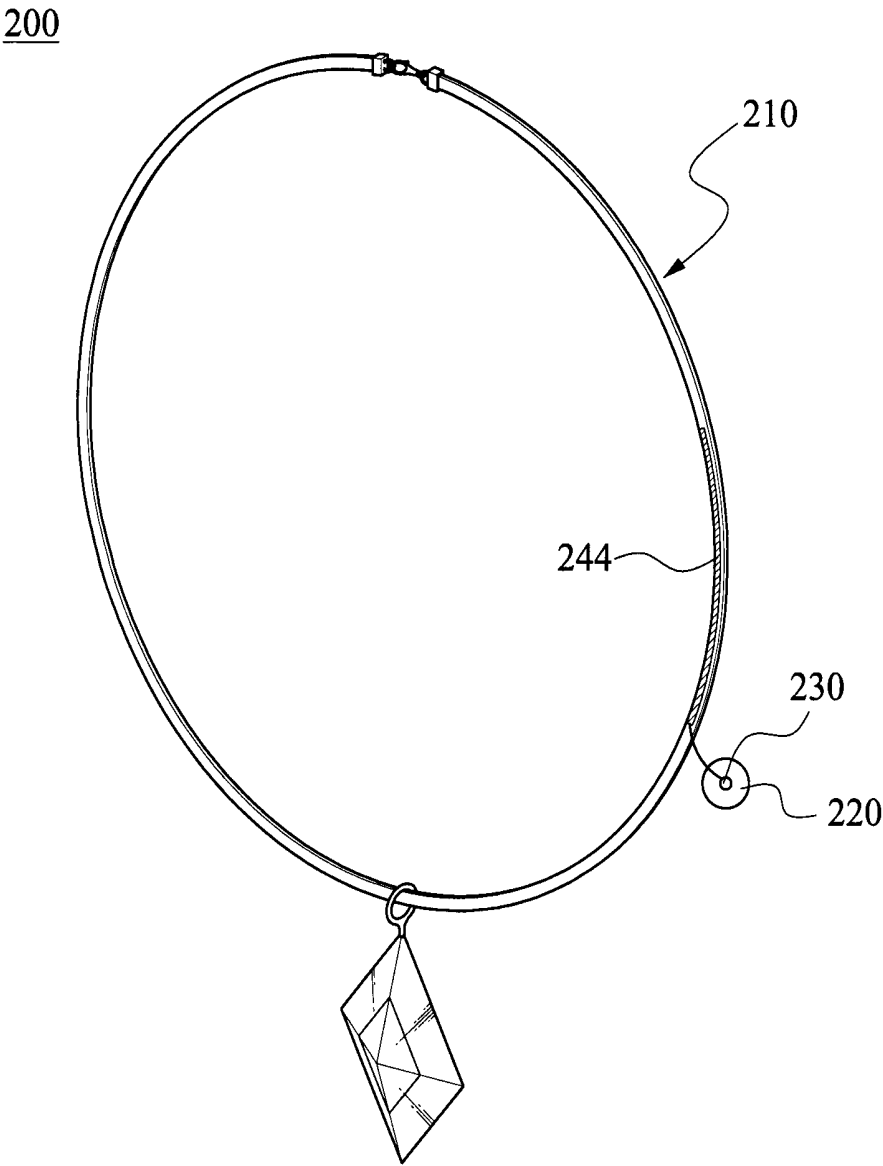

**FIG. 7**

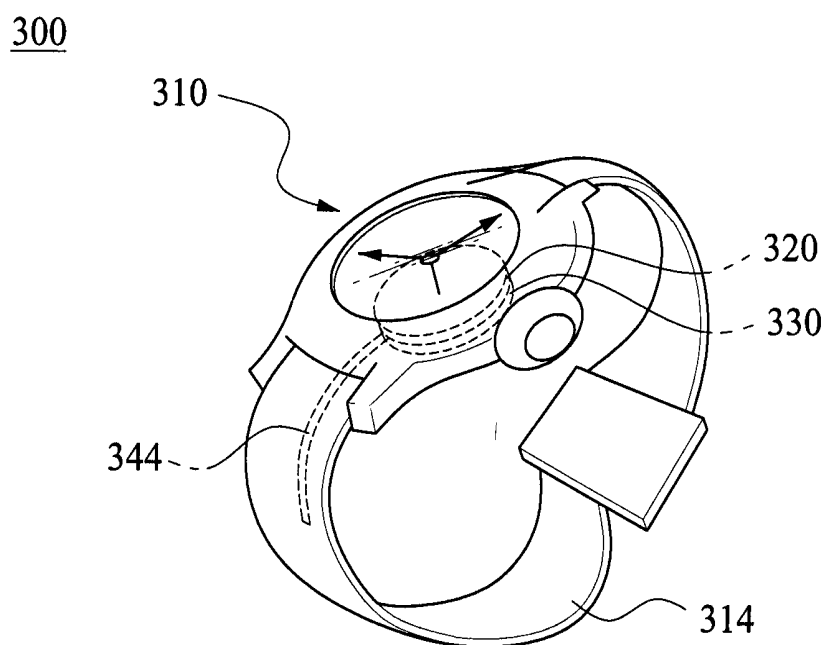

**FIG. 8**

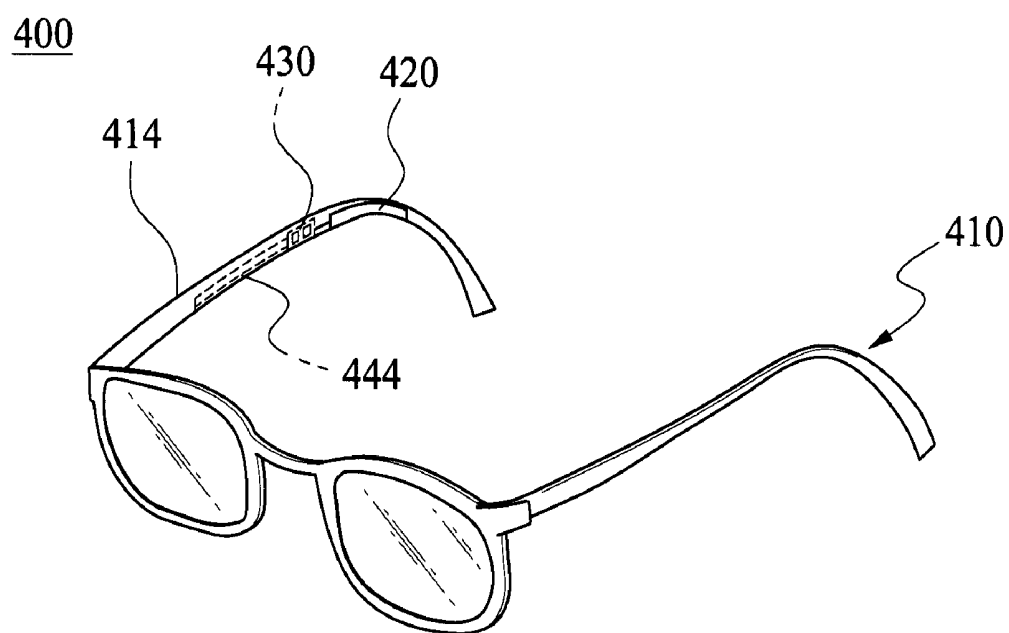

## ACCESSORIES FOR REMOTE MONITORING

### CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. application Ser. No. 11/436,769, filed on May 19, 2006, which claims the benefit of Korean Patent Application No. 10-2005-0095644, filed on Oct. 11, 2005, in the Korean Intellectual Property Office, the disclosures of which are incorporated herein by reference.

### BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a health care technology for measuring and monitoring a change in a body, and more particularly, relates to accessories placed on a body of a user to measure a change in the body of the user or condition of the user and communicate with an external apparatus.

[0004] 2. Description of Related Art

[0005] A ubiquitous system indicates an information communication environment in which a user is unaware of a network or a computer and whose position is irrelevant while the user freely access the network. When a ubiquitous system is generally used, every one can use information technology in varied embodiments. Thus, a user could, for example, not only use such technology in a house or vehicle but also on the top of a mountain. Also, since the general use of a ubiquitous system increases the number of users of computers connected to a network, the information technology industry may be also expanded to a size and range in relation to the number of the users. Due to merits of not only portability and convenience, as described above, but also accessing a network in which time and position are irrelevant, technologies associated with Ubiquitous system are being developed in nations worldwide.

[0006] The described technologies associated with ubiquitous systems may be applied in every field of human life, and currently, in particular, due to the well-being fad, a ubiquitous healthcare (U-healthcare) is in the spotlight as a notable technical field. U-healthcare is a ubiquitous technology in which a chip or sensor associated with medical services is integrated into any part of human life, thereby naturally providing medical services to everyone at anytime and anywhere. According to the U-healthcare, medical treatments performed in only hospitals, such as various medical examinations, management of diseases, emergency care, and consulting with doctors, may be realized during everyday life.

[0007] As a result, a device capable of measuring or monitoring a change in a body or a peripheral environment may be required. Also, according to development of a technology associated with integrated circuits (IC), a circuit capable of performing desired functions may be embodied in one chip. Accordingly, according to the level of present technology, the size of a circuit unit may be minimized to several mm or less.

[0008] Also, since technology associated with antennas is continuously developed, the size of an antenna may be minimized. Generally, a small device including wireless communication function may employ a monopole antenna because the monopole antenna having a quarter ( $\frac{1}{4}$ ) length of a wavelength of a used frequency may perform efficient communication function. Also, recently, greater minimization of antennas has been made possible by employment of dielectric material or improvement of technology of antenna patterns.

For example, when a monopole antenna is used for a frequency of approximately 2.45 GHz, a required length of the antenna is approximately 3 cm, and when a dielectric material or a particular pattern is used, the size of the antenna may be manufactured to be less than approximately 1 cm.

[0009] When a device for monitoring a change in a body or environments is placed on a body, a functional circuit and antenna may be minimized to a desired size. However, a ground has to have a length of  $\frac{1}{4}$  wavelength, and when a monopole antenna is used in a frequency band of approximately 2.45 GHz, a required length of a ground has to be at least approximately 3 cm.

[0010] Accordingly, to manufacture a monitoring device placed on a body in a small size, since a ground of a certain length is required, there are many restrictions to manufacture the monitoring device in a micro size. Actually, when a ground is formed on a printed circuit board (PCB), as the entire size of the PCB is reduced, an area in which the ground is formed is also reduced and the antenna cannot perform its function.

### BRIEF SUMMARY

[0011] An aspect of the present invention provides accessories capable of containing a circuit unit and an antenna formed in a small size and effectively providing a ground greater than a certain length.

[0012] An aspect of the present invention also provides accessories capable of being usually placed on or easily carried by using conventional small articles or accessories.

[0013] According to an aspect of the present invention, there is provided an accessory including a body capable of being placed on a human body; a measurement unit installed in the body measuring a change in surroundings; a signal processing unit processing a signal acquired from the measurement unit; and a wireless communication unit including a monopole antenna transmitting the signal processed by the signal processing unit and a ground installed along the body, corresponding to the monopole antenna.

[0014] Due to development of technology, the signal processing unit or the monopole antenna may be manufactured smaller than 1 cm. However, the ground may be required to be greater than a certain length because of resonance. Accordingly, the ground may be separately connected to a PCB substrate and wired along the accessories body, thereby manufacturing a minimized monitoring device.

[0015] The accessory may be an accessory or small article which can be placed on a human body or clothes. In detail, they may be accessories formed in the shape of a ring or other ornaments such as a necklace, a bracelet, a necktie pin and the like, and they may be small articles formed in the shape of a ring or band such as a hat, a watch, a band, a waist belt, glasses and the like. The measuring unit may be directly or indirectly in contact with the body of the user to measure an ECG, an EMG, an EEG, a GSR, a body temperature, a pulse, and a blood pressure. In addition, the measurement unit may sense temperature, pressure, humidity, components of air, composition of air, radioactivity, and deleterious bacteria of peripheral environments.

[0016] The signal processing unit for processing the measured signal may be embodied as an IC chip on the PCB substrate, and the monopole antenna may be embodied on the same. Also, the monopole antenna may be manufactured to be less than  $\lambda/4$  by using high dielectric material or embodying a precision antenna pattern.

[0017] According to another aspect of the present invention, there is provided an accessory for remote monitoring, including: a body capable of being placed on an object; a measurement unit installed in the body measuring a change in a surrounding environment; a circuit unit including an integrated circuit chip processing a signal acquired from the measurement unit and a monopole antenna formed on the same substrate on which the integrated circuit chip is installed; and a ground connected to the circuit unit and extended along the body.

[0018] According to another aspect of the present invention, there is provided a method of remote monitoring, including: placing a body on the object; measuring a change in a surrounding state via a measurement unit installed in the body; processing, via a signal processing unit, a signal acquired from the measurement unit; and transmitting the signal processed by the signal processing unit via a wireless communication unit including a monopole antenna and a ground installed along the body and corresponding to the monopole antenna.

[0019] Additional and/or other aspects and advantages of the present invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The above and/or other aspects and advantages of the present invention will become apparent and more readily appreciated from the following detailed description, taken in conjunction with the accompanying drawings of which:

[0021] FIG. 1 is a perspective view illustrating accessories according to an embodiment of the present invention;

[0022] FIG. 2 is a partial enlarged front view illustrating internal elements of the an accessory of FIG. 1;

[0023] FIG. 3 is a partial enlarged cross-sectional view illustrating the internal elements of the an accessory of FIG. 1;

[0024] FIG. 4 is a partial enlarged front view illustrating internal elements of a pendant of the an accessory of FIG. 1;

[0025] FIG. 5 is a diagram illustrating function transfer between the internal elements of FIG. 4;

[0026] FIG. 6 is a perspective view illustrating an accessory according to another embodiment of the present invention;

[0027] FIG. 7 is a perspective view illustrating an accessory according to still another embodiment of the present invention; and

[0028] FIG. 8 is a perspective view illustrating an accessory according to yet another embodiment of the present invention.

#### DETAILED DESCRIPTION OF EMBODIMENTS

[0029] Reference will now be made in detail to embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

[0030] FIG. 1 is a perspective view illustrating an accessory according to an embodiment of the present invention, FIG. 2 is a partial enlarged front view illustrating internal elements of the accessory of FIG. 1, and FIG. 3 is a partial enlarged cross-sectional view illustrating the internal elements of the accessory of FIG. 1.

[0031] Referring to FIGS. 1 through 3, accessory 100 is a kind of necklace. Accordingly, the accessory 100 comprises an accessory body 110 in the shape of a necklace, a measurement unit 120 mounted on the accessory body 110, an IC chip 132 including a signal processing circuit, a monopole antenna 142, and a ground 144. A part of the measurement unit 120 is exposed outward to be capable of maintaining contact with the body of the user directly or indirectly.

[0032] The accessory body 110 is in the form of a general necklace and includes a pendant 112 and a necklace string 114. The measurement unit 120 that can be attached to the body is mounted on the rear side of the pendant 112, the IC chip 132 and the monopole antenna 142 are mounted on a printed circuit board (PCB) substrate 130 in the pendant 112.

[0033] The top of the pendant 112 is connected to the necklace string 114, and the monopole antenna 142 and the ground 144 are electrically connected via the engaged parts of the pendant 112 and the necklace string 114. The ground 144 is built into and along the necklace string 114 and is formed in a length of more than approximately  $\lambda/4$ , where the symbol of  $\lambda$  indicates a wavelength of a used frequency. Accordingly, the IC chip 132 may form a wireless communication unit by using the monopole antenna 142, and the ground 144 may function as a valid image antenna with respect to the monopole antenna 142.

[0034] The measurement unit 120 installed in the pendant 112 may receive a signal for monitoring a biosignal of the user by being in contact with the body of the user. Generally, the biosignal may include an electrocardiogram, an electromyogram, an electroencephalogram, and a galvanic skin response. The measurement unit may be also used for measuring a body temperature, a pulse, or a blood pressure. In addition, the measurement unit 120 may further include other functions. In addition to the use of measuring a change in the body of a user, for example, a temperature, a pressure, a humidity, a components of air, a composition of air, a radioactivity, and a deleterious bacteria analysis of the surrounding environment may be measured. To measure environmental characteristics instead of physiological characteristics, the measurement unit may be mounted on the front of a pendant instead of the rear of the pendant.

[0035] In the present embodiment, though the measurement unit 120 includes one contact terminal, according to the type and number of biosignals to be measured, two or more contact terminals may be provided and positions of contact terminals may be determined. When a plurality of contact terminals are formed, each of the contact terminals is independently connected to the signal processing unit, and the signal processing unit may generate a signal to be transmitted to the wireless communication unit via a process of amplifying, filtering, or combining signals transmitted from each of the terminals.

[0036] FIG. 4 is a partial enlarged front view illustrating internal elements of a pendant of the accessory of FIG. 1, and FIG. 5 is a diagram illustrating function transfer between the internal elements of FIG. 4.

[0037] Referring to FIGS. 1-5, the measurement unit 120 disposed in the rear side of the pendant may be in continuous contact with the body of the user and may measure electrocardiogram or electromyogram. A signal measured by the measurement unit 120 may be an analog signal. The IC chip 132, as a signal processing unit, receives the analog signal from the measurement unit 120 and may process the received signal to transmit to an external apparatus or server. Gener-



ally, the IC chip 132 may amplify, filter, and convert the measured signal into a digital signal, and the processed signal may be transmitted to an external apparatus or server via the wireless communication unit 140.

[0038] In the present embodiment, it is described that the accessory 100 measures a biosignal and transmits the biosignal to the external apparatus or server. However, the accessory 100 may receive emergency information from the external apparatus or server and may display the degree of the danger for giving a warning to the user. Namely, the wireless communication unit 140 may include not only a function of transmission but also a function of reception.

[0039] FIG. 6 is a perspective view illustrating an accessory 200 according to another embodiment of the present invention. For reference, the accessory 200 of FIG. 6 is a necklace but includes a measurement unit and a ground mounted separately from a pendant.

[0040] Referring to FIG. 6, the accessory 200 includes an accessory body 210 formed in the shape of a necklace, a measurement unit 220 provided on the side of a string of a necklace and in contact with a body of a user, a signal processing unit 230 mounted on the measurement unit 220, and a ground 244. The measurement unit 220 is formed in the shape of a disk, as a conventional sensing electrode for medical use. An electrode in contact with the user's body is included underneath the measurement unit 220.

[0041] The signal processing unit 230 is mounted on the top of the measurement unit 220 and includes an IC chip including a signal processing circuit and a monopole antenna. The IC chip of the signal processing unit 230 measures, converts, and processes a biosignal. The IC chip is electrically connected to the electrode of the measurement unit 220. Also, the monopole antenna of the signal processing unit 230 is functionally connected to the ground 244.

[0042] The measurement unit 220 and the signal processing unit 230 are installed in a part of the string of the accessory body 210, and the ground 244 in the body. Though the measurement unit 120 and the PCB substrate 130 are built into the accessory body 110 in FIGS. 1 and 2, in the present embodiment, the measurement unit 220 and the signal processing unit 230 are formed on the outside of the accessory body 210 and the ground 244 is wired by using the string.

[0043] The ground 244 is formed in a length greater than approximately  $\lambda/4$  of a used frequency. Accordingly, the IC chip of the signal processing unit 230 may form a wireless communication unit by using the monopole antenna and the ground 244, and the ground 244 may function as a valid image antenna with respect to the monopole antenna.

[0044] The measurement unit 220 mounted on the string may receive a signal for monitoring a biosignal of a user by being in contact with the user's body. As described above, the biosignal may include an electrocardiogram (ECG), an electromyogram (EMG), an electroencephalogram (EEG), a galvanic skin response (GSR), a body temperature, a pulse, and a blood pressure.

[0045] In the present embodiment, one measurement unit 220 is mounted on the string, but the type or number of measurement units may vary. When a plurality of measurement units is formed, the measurement units may be independent or may be dependently connected to each other along the string.

[0046] The measurement 220 may measure an ECG or an EMG while being in contact with the user's body. The signals measured by the measurement unit 220 may be prepared to be

transmitted externally via the IC chip of the signal processing unit 230. The IC chip may amplify, filter, and convert the measured signal into a digital signal to transmit to an external apparatus or server via a wireless communication unit.

[0047] FIG. 7 is a perspective view illustrating an accessory 300 according to still another embodiment of the present invention.

[0048] Referring to FIG. 7, the accessory 300 is a watch and includes an accessory body 310 in the shape of a watch, a measurement unit 320 mounted on a part of the accessory body 310 and in contact with a user's wrist, a signal processing unit 330 including an IC chip including a signal processing circuit, a monopole antenna (not shown), and a ground 344.

[0049] The accessory body 310 includes a watch body and a watch band 314. The measurement unit 320 capable of being in contact with the wrist is installed in the bottom of the watch body, and the signal processing unit 330 including the IC chip is formed in a watch body together with the measurement unit 320. Also, the signal processing unit 330 includes the IC chip and the monopole antenna on a single PCB substrate. Since internal elements of the accessory have been previously described with reference to FIG. 4, detailed configuration and description will be omitted.

[0050] Referring to FIG. 7, both sides of the watch body are connected to the watch band 314, and the monopole antenna and the ground 344 are electrically connected to a portion of the connection between the watch body and the watch band 314. The ground 344 is built in the watch band 314 and formed in a length of at least more than approximately  $\lambda/4$  of a used frequency. Accordingly, the IC chip may form a wireless communication unit by using the monopole antenna and the ground 344, and the ground 344 may function as a valid image antenna with respect to the monopole antenna.

[0051] The measurement unit 320 mounted on the watch body may receive a signal for monitoring a biosignal of a user while being in contact with the user's wrist. Generally, the biosignal may include an ECG, an EMG, an EEG, a GSR, a body temperature, a pulse, and a blood pressure. In addition, the measurement unit may sense a temperature, a pressure, a humidity, a components of air, a composition of air, a radioactivity, and a deleterious bacteria of the surrounding environment.

[0052] In the present embodiment, the measurement unit 320 includes one contact terminal, but according to the type and number of biosignals to be measured, two or more contact terminal may be provided and a position of the contact terminal may be determined.

[0053] The measurement unit 320 in the rear of the watch body may measure an ECG or an EMG while being in contact with the user's wrist. A signal measured by the measurement unit 320 is an analog signal. The IC chip of the signal processing unit 330 receives the analog signal from the measurement unit 320 and may prepare to transmit the received signal outside by processing. The IC chip may amplify, filter, and convert the measured signal into a digital signal, and the processed signal may be transmitted to an external apparatus or server via a wireless communication unit.

[0054] FIG. 8 is a perspective view illustrating an accessory 400 according to yet another embodiment of the present invention.

[0055] Referring to FIG. 8, the accessory 400 is motivated by glasses and includes an accessory body 410 in the shape of glasses, a measurement unit 420 mounted on a part of the

accessory body **410** and in contact with sides of a user's head, a signal processing unit **430** including an IC chip including a signal processing circuit, a monopole antenna (not shown) and a ground **444** mounted together with the IC chip on a substrate.

[0056] The accessory body **410** includes a glasses body and glasses legs (or temples) **414** formed on both ends of the glasses body. The measurement unit **420** capable of being in contact with a side of a face is installed in one of the glasses legs **414**. The signal processing unit **430** including the IC chip is installed in the glasses leg **414**, close to the measurement unit **420**. Also, the signal processing unit **430** includes the IC chip and the monopole antenna on a single PCB substrate.

[0057] The measurement unit **420**, the signal processing unit **430**, and the ground **444** are sequentially provided along the glasses leg **414**. The ground **444** is built in the glasses leg **414** and formed in a length greater than approximately  $\lambda/4$  of a used frequency. Accordingly, the IC chip may form a wireless communication unit by using the monopole antenna and the ground **444**, and the ground **444** may function as a valid image antenna with respect to the monopole antenna.

[0058] The measurement unit **420** mounted on the glasses leg **414** may receive signals associated with an ECG, an EMG, an EEG, a GSR, a body temperature, a pulse, and a blood pressure of a user while being in contact with the head. Though the measurement unit **420** is mounted in one of the glasses legs **414** in the present embodiment, according to the type and number of biosignals to be measured, two or more measurement units may be provided in each glasses leg.

[0059] The measurement unit **420** in the glasses leg **414** may measure a desired biosignal while being in contact with the head. A signal measured by the measurement unit **420** is processed via the IC chip of the signal processing unit **430**, and the processed signal may be transmitted to an external apparatus or server by using the monopole antenna and the ground **444**.

[0060] The accessories of the above-described embodiments of the present invention may be conventional accessories or small articles and may include a micro circuit unit and an antenna. However, since a ground has to have a certain length for effective communication, the ground may be built or wired into an accessory body in the certain length. A ground having more than the certain length makes an efficient wireless communication of the accessory possible.

[0061] Since the shapes of conventional clothing articles or accessory can be used as an accessory body of the present invention, it is simple to put on or carry, thereby maximizing convenience of users.

[0062] Although a few embodiments of the present invention have been shown and described, the present invention is not limited to the described embodiments. Instead, it would be appreciated by those skilled in the art that changes may be made to these embodiments without departing from the principles and spirit of the invention, the scope of which is defined by the claims and their equivalents.

1. (canceled)
2. An accessory for remote monitoring, comprising:  
a body capable of being placed on a monitored subject;  
a measurement unit provided on the body to measure a change in a surrounding environment;  
a signal processing unit to process a signal acquired from the measurement unit; and

a wireless communication unit including an antenna to transmit the signal processed by the signal processing unit,

wherein the body has a strip to be hanged on the subject, and

wherein the ground electrically connected to the antenna is built in the strip, and a length of the ground is greater than approximately  $\lambda/4$  of a frequency used by the wireless communication unit to transmit the signal processed by the signal processing unit.

3. The accessory of claim 2, wherein the body is in a form of a necklace, a bracelet, a belt, a watch, a band, a ring, or a pair of glasses.

4. The accessory of claim 2, wherein the ground is in the body along a periphery of the body.

5. The accessory of claim 2, wherein the ground is installed along the body to form a part of the body.

6. The accessory of claim 2, wherein a length of the ground is greater than approximately  $\lambda/4$  of a frequency used by the wireless communication unit to transmit the signal processed by the signal processing unit.

7. The accessory of claim 2, wherein the measurement unit measures at least one of an electrocardiogram, an electromyogram, an electroencephalogram, a galvanic skin response, an electrooculogram, a body temperature, a pulse, a blood pressure, and a physical movement.

8. The accessory of claim 2, wherein the measurement unit measures at least one of a temperature, a pressure, a humidity, a composition of air, a radioactivity, and a deleterious bacteria analysis.

9. The accessory of claim 2, wherein the signal processing unit is in an integrated circuit (IC) chip on a printed circuit (PCB) substrate.

10. The accessory of claim 9, wherein the antenna is on the PCB.

11. The accessory of claim 2, wherein the wireless communication unit also receives information.

12. The accessory of claim 2, wherein the antenna is functionally connected to the ground.

13. An accessory for remote monitoring, comprising:

a body capable of being placed on a monitored subject;

a measurement unit provided on the body to measure a change in a surrounding environment;

a circuit unit including an integrated circuit chip to process a signal acquired from the measurement unit and an antenna formed on the same substrate on which the integrated circuit chip is installed; and

wherein the body has a strip to be hanged on the subject, and

wherein the ground electrically connected to the antenna is built in the strip, and a length

of the ground is greater than approximately  $\lambda/4$  of a frequency used by the wireless communication unit to transmit the signal processed by the circuit unit.

14. The accessory of claim 13, wherein the body is in a form of a necklace, a bracelet, a belt, a watch, a band, a ring, and a pair of glasses.

15. The accessory of claim 13, wherein the measurement unit measures at least one of an electrocardiogram, an electromyogram, an electroencephalogram, a galvanic skin response, an electrooculogram, a body temperature, a pulse, a blood pressure, and a physical movement.

**16.** The accessory of claim **13**, wherein the measurement unit measures at least one of a temperature, a pressure, a humidity, a composition of air, a radioactivity, and a deleterious bacteria analysis.

**17.** A method of remote monitoring, comprising:  
placing a body on a monitored subject;  
measuring a change in a surrounding state via a measurement unit provided on the body;  
processing, via a signal processing unit, a signal acquired from the measurement unit; and  
transmitting the signal processed by the signal processing unit via a wireless communication unit including an antenna,  
wherein the body has a strip to be hanged on the subject, and  
wherein the ground electrically connected to the antenna is built in the strip, and a length of the ground is greater than approximately  $\lambda/4$  of a frequency used by the wireless communication unit to transmit the signal processed by the signal processing unit.

**18.** The method of claim **17**, wherein the surrounding state is either a physiological or environmental.

\* \* \* \* \*

|                |                                                                                                                                                                            |         |            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 远程监控配件                                                                                                                                                                     |         |            |
| 公开(公告)号        | <a href="#">US20150025326A1</a>                                                                                                                                            | 公开(公告)日 | 2015-01-22 |
| 申请号            | US14/509444                                                                                                                                                                | 申请日     | 2014-10-08 |
| [标]申请(专利权)人(译) | 三星电子株式会社                                                                                                                                                                   |         |            |
| 申请(专利权)人(译)    | SAMSUNG ELECTRONICS CO. , LTD.                                                                                                                                             |         |            |
| 当前申请(专利权)人(译)  | SAMSUNG ELECTRONICS CO. , LTD.                                                                                                                                             |         |            |
| [标]发明人         | KIM JONG PAL<br>SHIN KUN SOO                                                                                                                                               |         |            |
| 发明人            | KIM, JONG PAL<br>SHIN, KUN SOO                                                                                                                                             |         |            |
| IPC分类号         | A61B5/01 A61B5/0476 A61B5/04 A61B5/021 A61B5/00 A61B5/0488 A61B5/0402                                                                                                      |         |            |
| CPC分类号         | A61B5/0015 A61B5/681 A61B5/6803 A61B5/0402 A61B5/0488 A61B5/72 A61B5/01 A61B5/021 A61B5/0006 A61B5/0008 A61B5/04012 A61B5/0476 A61B5/04004 A61B5/0205 A61B5/0002 A61B5/441 |         |            |
| 优先权            | 1020050095644 2005-10-11 KR                                                                                                                                                |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                                                                                                                            |         |            |

#### 摘要(译)

一种用于远程监控的附件，包括：能够放置在人体上的主体；安装在体内并测量周围环境变化的测量单元；信号处理单元，用于处理从测量单元获取的信号；无线通信单元包括单极天线，该单极天线发送由信号处理单元处理的信号和沿着主体安装的地，对应于单极天线。信号处理单元和单极天线制造成小尺寸以形成在附件主体的附件主体或周边中，并且可以通过使用带或延伸形状的附件主体来获得用于接地的空间。。

**100**

