



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
08.02.2017 Bulletin 2017/06

(51) Int Cl.:
A61B 8/00 (2006.01)

(21) Application number: **14885962.2**

(86) International application number:
PCT/CN2014/073777

(22) Date of filing: **20.03.2014**

(87) International publication number:
WO 2015/139267 (24.09.2015 Gazette 2015/38)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **Shenzhen Mindray Bio-Medical Electronics Co., Ltd.**
Shenzhen, Guangdong 518057 (CN)

(72) Inventors:
• **ZOU, Yaoxian**
Shenzhen
Guangdong 518057 (CN)

- **YAO, Bin**
Shenzhen
Guangdong 518057 (CN)
- **WEI, Yi**
Shenzhen
Guangdong 518057 (CN)
- **LIN, Muqing**
Shenzhen
Guangdong 518057 (CN)
- **ZENG, Zuoqi**
Shenzhen
Guangdong 518057 (CN)

(74) Representative: **KIPA AB**
P O Box 1065
251 10 Helsingborg (SE)

(54) **METHOD AND DEVICE FOR AUTOMATIC IDENTIFICATION OF MEASUREMENT ITEM AND ULTRASOUND IMAGING APPARATUS**

(57) A method and device for automatic identification of a measurement item. Grayscale values of pixel points corresponding to an ultrasonic echo formed due to reflection of an ultrasound signal by a living tissue being detected in a designated cross-section image frame are acquired via an image acquisition module (31); then, at least one measurement item corresponding to the designated cross-section image frame is identified by an identification module (32) on the basis of the grayscale values of the pixel points; and, a measurement item parameter of the

designated cross-section image frame is measured by a measurement module (33) on the basis of the measurement item identified. Because a measurement item of a designated cross-section can be automatically identified on the basis of the content of a designated cross-section image, obviated is the need for a step in which a user moves a track ball to select a measurement item in an ultrasonic measurement process, thus increasing measurement efficiency.

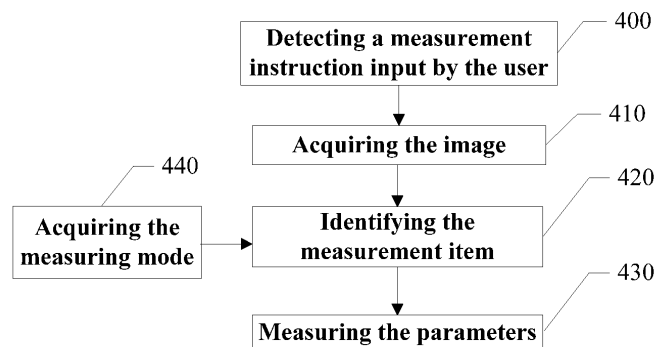


FIG. 3

Description

TECHNICAL FIELD

5 **[0001]** The present disclosure relates to medical equipment, in particular to an ultrasound imaging apparatus and a method and device for automatic identification of measurement item thereof.

BACKGROUND

10 **[0002]** Ultrasound imaging apparatus are generally used by a doctor to inspect tissues inside a human body. The doctor can place an ultrasound probe onto the surface of the skin corresponding to a tissue to obtain ultrasound images of the tissue. Due to its characteristics of safety, convenience, non-invasion and low cost, etc, the ultrasound imaging has become a main assisting means for diagnosis.

15 **[0003]** In order to obtain measurements of an object of interest, the doctor needs to perform many measuring operations during the ultrasound examination. Since there are generally a plurality of measurement items which need to be measured for a tissue being examined in one measuring mode while the measuring is a process in which the user needs to constantly interact with the apparatus, the user needs to constantly select the measurement item and then move a trackball to perform the measuring, which is time-consuming. For example, in an abdomen mode, the common measurement items include the size of liver, gallbladder, spleen and kidney, etc. In an obstetric mode, head circumference (HC), biparietal diameter (BPD), abdominal circumference (AC) and femur length (FL) are necessary measurement items for each examination. Generally, during an examination, the doctor may obtain a standard section image, and then press a button for measuring, by which a measurement menu will be displayed by the apparatus. Then, the doctor may move the trackball to select a desired measurement item in the menu, and then the measuring of the selected measurement item can be performed. For example, in an obstetric examination, after obtaining a corresponding standard section image, 25 the doctor firstly presses the button for measuring, by which the measurement menu will be displayed and a measuring state will be entered, and then moves the trackball to select a desired measurement item in the menu. Taking the head circumference as an example, the doctor firstly rotates the trackball to move the cursor to the measurement menu, and selects the measurement item of head circumference in the menu. After the measurement item is selected, the doctor rotates the trackball to move the cursor to a position at one side of the skull ring in the section image and presses a button for confirmation to determine a first point, and then moves the cursor to the other side and presses the button for confirmation to determine a second point, thereby to obtain one axis of an ellipse. Then, the doctor can move the cursor to adjust the length of the other axis of the ellipse and probably adjust the two points determined, until the ellipse matches the skull of the fetus. Therefore, in one measuring, many points need to be determined in order to match the ellipse with the structure to be measured. In the case that the object to be measured is linear, at least two points need to be determined. It was reported that a doctor will spend 20%~30% of the time on measuring.

35 **[0004]** A certain methods for automatic measurement have been proposed in some patents or publications in order to save the measuring time of the doctor. However, in these methods, the user needs to manually select the corresponding measurement item in the menu according to the obtained section image and then perform an automatic or semi-automatic measuring, which will directly affect the degree of automation of the automatic measuring. Furthermore, the operations of the doctor on the measurement item will affect the measuring time. Moreover, the doctor usually does not like to distractingly constantly press the button and select item in the menu during the examination.

SUMMARY

45 **[0005]** According to a first aspect of the present disclosure, a method for automatic identification of measurement item is provided. The method may include:

50 an image acquisition step: acquiring gray values of pixels of a specified section image, wherein the gray values of the pixels correspond to ultrasound echoes generated by reflection of ultrasound waves by a tissue under an examination;

an identification step: identifying at least one measurement item corresponding to the specified section image based on the gray values of the pixels; and

a measuring step: measuring a measurement parameter of the specified section image based on the measurement item identified.

55 According to a second aspect of the present disclosure, a device for automatic identification of measurement item is provided. The device may include:

an image acquisition module which acquires gray values of pixels of a specified section image, wherein the gray values of the pixels correspond to ultrasound echoes generated by reflection of ultrasound waves by a tissue under

an examination;
 an identification module which identifies at least one measurement item corresponding to the specified section image based on the gray values of the pixels; and
 a measuring module which measures a measurement parameter of the specified section image based on the measurement item identified.

[0006] According to a third aspect of the present disclosure, an ultrasound imaging apparatus is provided. The apparatus may include:

a probe which transmits ultrasound waves to a tissue and receives ultrasound echoes;
 a signal processor which processes the ultrasound echoes to generate ultrasound image data; and
 an image processor which processes the ultrasound image data and generate section images;
 where the image processor comprises a device for automatic identification of measurement item described above.

[0007] Based on the method/device for automatic identification of measurement item provided by the present disclosure, the measurement items of a specified section image can be automatically identified based on the contents of the specified section image, such that the user needs not select the measurement items during the measurement, and thereby the measurement is more convenient and automatic.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

FIG. 1 schematically shows an ultrasound imaging apparatus according to an embodiment of the present disclosure;
 FIG. 2 schematically shows a device for automatic identification of measurement item according to an embodiment of the present disclosure;
 FIG. 3 is a flow chart of a method for automatic identification of measurement item according to an embodiment of the present disclosure;
 FIG. 4 schematically shows an identification module provided by embodiment 1 of the present disclosure;
 FIG. 5 is a flow chart of an identification method provided by embodiment 1 of the present disclosure;
 FIG. 6 schematically shows an identification module provided by embodiment 2 of the present disclosure;
 FIG. 7 is a flow chart of an identification method provided by embodiment 2 of the present disclosure;
 FIG. 8 schematically shows the measurement item section in the obstetric measuring mode according to embodiment 2, where FIG. 8a schematically shows the head circumference section, FIG. 8b schematically shows the abdominal circumference section, and FIG. 8c schematically shows the femur section.

DETAILED DESCRIPTION

[0009] Medical ultrasound imaging is generally used by doctor to inspect tissues inside human body. The doctor can place an ultrasound probe onto the surface of the skin corresponding to a tissue to obtain ultrasound section images of the tissue. Referring to FIG. 1, which shows the structure of an ultrasound imaging apparatus. The ultrasound imaging apparatus may include an ultrasound wave generation circuit 11, a probe 1, a signal processor 2, an image processor 3 and a display 4.

[0010] The probe 1 may transmit ultrasound waves to a scanning object and receive the ultrasound echoes. The ultrasound wave generation circuit 11 may generate waveform data and excite transducers of the probe 1 by a transmit channel 12 to transmit ultrasound waves to the tissue to be examined. After the reflection and absorption of the ultrasound waves, the ultrasound echoes can be formed. The probe 1 may receive the ultrasound echoes and output them to the signal processor 2 through a receive channel 13.

[0011] The signal processor 2 may process the ultrasound echoes to generate ultrasound image data. The signal processor 2 may perform beam-forming on the ultrasound echoes received through the receive channel 13 to obtain radio frequency signals, and then perform quadrature demodulation on the radio frequency signals to obtain quadrature demodulated baseband signals. The processed ultrasound image data may be output to the image processor 3.

[0012] The image processor 3 may process the ultrasound image data and generate the section images, and send the section images to the display 4 for displaying. The image processor 3 may include a device for automatic identification of measurement item, which may process the ultrasound image data output by the signal processor 2 to identify the measurement items corresponding to the section image specified by the user, and further perform the measuring of the measurement parameters corresponding to the measurement items.

[0013] The display 4 may display the section images generated by the image processor 3 and the measurement

parameters.

[0014] FIG. 2 schematically shows the structure of the device for automatic identification of measurement items, which may include an image acquisition module 31, an identification module 32 and a measuring module 33.

[0015] The image acquisition module 31 may acquire the gray value of the pixels in the specified section image. The gray value of the pixels may correspond to the ultrasound echoes generated by the reflection of the ultrasound waves by the tissue being examined.

[0016] The identification module 32 may identify at least one measurement item corresponding to the specified section image based on the gray value of the pixels. For example, the identification module 32 may process the gray values of the pixels and perform a comparative analysis with a preset data model, and identify the measurement item according to the result of the analysis.

[0017] The measuring module 33 may perform measuring on the specified section image to obtain the measurement parameters based on the identified measurement item.

[0018] In another embodiment, the device for automatic identification of measurement items may further include a measuring mode acquisition unit 34, which may acquire the measuring mode selected by the user. The identification module 32 may identify the measurement items corresponding to the specified section image according to the measuring mode selected by the user during the identification of the measurement items.

[0019] A flow chart of a method for automatic identification of measurement items using the ultrasound imaging apparatus described above may be as shown in FIG. 3. The method may include following steps.

[0020] Step 400: detecting a measurement instruction input by the user. The measurement instruction may be generated by the user through pressing a button for measuring or selecting a measurement item. When a measurement instruction is detected, following steps may be performed.

[0021] Step 410: acquiring the image. The image processor may send the processed ultrasound image data to the display, where the processed ultrasound image data may be displayed. The user may specify a section image by observing the displayed images. According to the section image specified by the user, the gray values of pixels in the specified section image may be acquired from stored image data. The specified section image may generally be the section image which is presently displayed. The gray value of the pixel may correspond to the ultrasound echoes formed by the reflection of the ultrasound signals by the tissue. The ultrasound echoes of the bones are strong, and the corresponding image has great gray value. The ultrasound echoes of the soft tissue are weak, and the corresponding image has small gray value.

[0022] Step 420: identifying the measurement item. In one measuring mode, for the tissue being examined, there may generally be a plurality of measurement items which need to be measured. For example, in an abdomen measuring mode, the common measurement items may include the size of liver, gallbladder, spleen and kidney, etc. In an obstetric measuring mode, the common measurement items may include head circumference (HC), biparietal diameter (BPD), abdominal circumference (AC) and femur length (FL), etc. In other embodiments, there may be other measuring modes, and thus there may correspondingly be other corresponding measurement items. The measurement items may be determined according to the section image of the object to be measured. There always is difference between the section images corresponding to different measurement items, which make the automatic identification possible. One possible solution is presetting data modes of section images corresponding to the plurality of measurement items in the apparatus and identifying the measurement item by comparing the gray values of pixels in the specified section image with the preset data modes. The preset data modes may be the characteristics which are able to distinguish a certain section image from other section images, such as a training sample mode. The preset data modes may also be the physical characteristics (such as the shape, the brightness range or the size, etc.) of the sections corresponding to the measurement items. When the section image of a measurement object is determined, the measurement items for this measurement object are determined. On the contrary, when the measurement items are determined, the section image of the measurement object corresponding to these measurement items needs to be displayed. For example, for the obstetric examination, the head circumference and the abdominal circumference are elliptic objects, the biparietal diameter and the femur length are linear object, and the head circumference and the biparietal diameter can be measured in a same section. Therefore, these four measurement items may correspond to three measurement sections: the head circumference section (HC and BPD may correspond to a same section), the abdominal circumference section and the femur section. When the section image specified by the doctor is an abdominal circumference section, the measurement item may be the abdominal circumference (AC); when the specified section image is a femur section, the measurement item may be the femur length (FL); and when the section image specified by the doctor is the head circumference section, the measurement items may be the head circumference (HC) and/or the biparietal diameter (BPD). Accordingly, in the present embodiment, the image processor may process and analyze the gray values of the pixels to identify the type of the current specified section image, and thereby identify the measurement items corresponding to this specified section image.

[0023] Step 430: measuring the parameters. Based on the measurement items identified in the step 420, the parameters corresponding to the measurement items of the specified section image may be measured. In the actual measurement

process, the parameters may be measured manually, semi-automatically or automatically. When a certain section image corresponds to two or more measurement items (for example, the measurement items of the head circumference section may include the head circumference (HC) and the biparietal diameter (BPD)), the measurement items identified may be measured one by one.

[0024] In other embodiments, the method may further include following steps before identifying the measurement items in the step 420.

[0025] Step 440: acquiring the measurement mode adopted during the examination to the tissue. In this step, the measuring mode selected by the user may be acquired, which can reduce the identification rang of the measurement items, thereby not only the identification efficiency can be increased, but also the identification accuracy may also be improved.

[0026] In the embodiments of the present disclosure, the measurement items can be identified automatically based on the images, such that the doctor needs not to select the measurement item in the menu by moving the trackball, and thereby the efficiency of the measuring can be increased.

[0027] In the embodiments of the present disclosure, the solutions for automatic identification of the measurement items may be added, which may be implemented by a plurality of ways and will be further described in details with reference to specific embodiments.

Embodiment 1

[0028] Difference exists between sections corresponding to different measurement items. Based on this fact, in the present embodiment, characteristics which can indicate the section corresponding to certain measurement items may be extracted, and the measurement items may be identified based on the characteristics. In one embodiment, the characteristics of the sections may be extracted and classified using a machine learning method. Referring to FIG. 4, an identification module 32 of the present embodiment is shown, which may include a characteristic generation unit 3211, a comparison unit 3212 and a searching unit 3213.

[0029] The characteristic unit 3211 may generate the characteristics of the specified section image using the gray values of the pixels in the specified section image. The comparison unit 3212 may compare the characteristics of the specified section image with the characteristics of training samples of a preset training sample mode. The searching unit 3213 may search out the training sample of which the characteristics are most similar to the characteristics of the specified section image, and output the measurement items corresponding to the training sample searched out as the corresponding measurement items corresponding to the specified section image.

[0030] Based on the identification module above, the present embodiment further provides a machine learning identification method. The machine learning methods generally generate the characteristics of a plurality of samples by the information of training samples (a series of samples of which the measurement items are known) and compare the characteristics of the section sample to be measured with the characteristics of the training samples to determine which type of measurement items the section sample to be measured corresponds to. In the art, common machine learning methods may include principal component analysis (PCA) method, linear discriminant analysis (LDA) method, kernel principal component analysis (KPCA) method, locality preserving projections (LPP), support vector machine (SVM) method and artificial neural networks (ANNs), etc.

[0031] Generally, the dimensionality of the image data acquired by the image acquisition module 31 is very high. An image with sizes of $W \times H$ may be considered as a $W \times H$ -dimensional vector. A great relevance generally exists between the dimensions of this high-dimensional vector. In other words, the expression of high-dimensional data has great redundancy. One common method is projecting the high-dimensional data to a low-dimensional space to eliminate the redundancy between the dimensions of the data. PCA is this kind of method, of which the essence is finding out the projection which best represents the original high-dimensional data in the sense of least mean square. The present embodiment will be further described taking PCA as an example. However, a person ordinarily skilled in the art will understand that, in other embodiments, the technical solutions of the present embodiment may also be implemented using other machine learning methods (such as LDA, KPCA, LPP, SVM, or ANNs, etc.) according to the concept of the present embodiment without creative work.

[0032] Referring to FIG. 5, A method for identification using the identification module above may include following steps.

[0033] Step 510: generating the characteristics. In this step, the characteristics of the specified section image may be generated using the gray values of the pixels of the specified section image.

[0034] In the present embodiment, the measurement items of the specified section image may be obtained by comparing the characteristics of the specified section image with the characteristics of the preset training samples. Therefore, firstly, the characteristics of the training samples and the characteristics of the specified section image may be acquired. In an embodiment, the characteristics of the training samples and the characteristics of the specified section image may be the eigenvalues, the eigenvectors or combination of the eigenvalues and the eigenvectors. In an embodiment, the characteristic of the training sample may be the projection coefficient of the eigenvectors of the training sample on the

mean value of the training sample, and the characteristic of the specified section image may be the projection coefficient of the eigenvectors of the specified section image on the mean value of the training sample. The advantage of this embodiment is that the high-dimensional data is projected to the low-dimensional space and the redundancy between the dimensions of the data is eliminated, such that the calculation is reduced and the computational efficiency is increased.

[0035] For a training sample library, assuming that this training sample library includes N training samples, image of each training sample a resolution of $W \times H$, and each image is expanded into a M-dimensional long vector (where $M = W \times H$), the image of this training sample library can be expressed as a $M \times N$ matrix, which can be expressed as $[I_1, \dots, I_N]_{M \times N}$, where I_i is a training sample vector.

[0036] First, the mean value of the sample (which is referred to as mean sample hereinafter) may be calculated:

$$\mathbf{m} = \frac{\sum_{i=1}^N \mathbf{I}_i}{N}$$

[0037] Where $\mathbf{m}$ is the mean sample. New training samples with mean value of zero may be obtained by subtracting the samples in the training sample library with the mean sample:

$$\mathbf{L} = [\mathbf{I}_1 - \mathbf{m}, \dots, \mathbf{I}_N - \mathbf{m}]$$

[0038] The covariance matrix of the new training samples may be:

$$\mathbf{C} = \sum_{i=1}^N (\mathbf{I}_i - \mathbf{m})(\mathbf{I}_i - \mathbf{m})^T = \mathbf{L}\mathbf{L}^T$$

[0039] Where $\mathbf{L}^T$ is the transpose of matrix $\mathbf{L}$.

[0040] After the covariance matrix $\mathbf{C}$ of the new training samples is obtained, the eigenvalues of the matrix $\mathbf{C}$ may be calculated. Because the matrix $\mathbf{C}$ has too large dimensions, it is very difficult to calculate the eigenvectors of the matrix $\mathbf{C}$ directly. Therefore, the eigenvectors of a small matrix $\mathbf{R} = \mathbf{L}^T\mathbf{L}$ may be calculated first.

[0041] Assuming that $\mathbf{V}$ is the eigenvector matrix of the small matrix $\mathbf{R}$ and Λ is the eigenvalue matrix, then:

$$(\mathbf{L}^T\mathbf{L})\mathbf{V} = \mathbf{V}\Lambda$$

[0042] Both sides of the equation may be multiplied by $\mathbf{L}$ to obtain:

$$(\mathbf{L}\mathbf{L}^T)\mathbf{L}\mathbf{V} = \mathbf{L}\mathbf{V}\Lambda$$

[0043] Therefore, the orthogonalized eigenvector of the matrix $\mathbf{C} = \mathbf{L}\mathbf{L}^T$ may be:

$$\mathbf{E} = \mathbf{L}\mathbf{V}\Lambda^{-\frac{1}{2}}$$

[0044] Where the eigenvalue matrix Λ may be a $M \times M$ diagonal matrix and the eigenvalues may be arranged in descending order, i.e., $\Lambda_{11} \geq \Lambda_{22} \geq \Lambda_{MM}$, where Λ_{jj} represents the element of the eigenvalue matrix Λ at j-th column and j-th row.

[0045] Actually, most of the eigenvalues are very small, even zero. Therefore, it is possible to only remain larger eigenvalues and corresponding eigenvectors. For example, only the first n eigenvalues, and only the first n columns of the eigenvectors $\mathbf{V}$, are remained. In other words, the dimensionality of the remained eigenvectors $\mathbf{V}$ is $N \times n$. n may be determined by a plurality of ways. For example, n may be a preset constant. Or, n may be a value which leads to

$\sum_{i=1}^n \Lambda_{ii} \geq P \sum_{i=1}^M \Lambda_{ii}$, where P is a percentage. For example, $P = 95\%$ means that 95% of the characteristics of the

original data are remained.

[0046] Then, the projection of the training samples on the mean sample (i.e. the characteristics or principal component of the training samples) may be obtained by:

$$F_i = E^T (I_i - m) \quad (1)$$

[0047] Where E^T is the transpose matrix of the matrix E and F_i is the characteristic of I_i . This projection reduces the dimensionality of the sample from $M \times 1$ to $n \times 1$ and eliminates the correlation between the high-dimensional data. This $n \times 1$ -dimensional data can best represent the original data in the sense of least mean square.

[0048] A person ordinarily skilled in the art will understand that the calculation of the step above to the sample library can be performed offline and the results of the calculation (for example, the characteristics F_i of the matrix E and the training samples) may be stored in the apparatus.

[0049] For a specified section image, the gray values of all pixels of the section image may be acquired, which may be similarly expanded into a M -dimensional vector I_{test} . The characteristic of the specified section image may be calculated according to the formula (1):

$$w = E^T (I_{test} - m) \quad (2)$$

[0050] Where w is the projection coefficient of the eigenvectors of the section image on the mean value of the training sample (i.e. the characteristic of the section image), I_{test} is the eigenvectors of the section image, m is the mean value of the training samples, E is the orthonormalized eigenvector, and E^T is the transpose matrix of the matrix E.

[0051] The characteristics of the specified section image may be calculated by the formula (2).

[0052] Step 520: comparing the characteristics. In this step, the characteristics of the specified section image may be compared with the characteristics of the plurality of training samples of the preset training sample mode.

[0053] The characteristics of the specified section image calculated by the formula (2) in the step 510 may be compared with the characteristics of the plurality of training samples of the preset training sample mode as defined by the formula (1) to obtain:

$$x_i = || w - F_i ||$$

[0054] Where x_i is the modulus of the comparison result of the characteristic of the specified section image with the characteristic of the i -th training sample F_i , where $1 \leq i \leq N$. In an embodiment, the characteristic of the specified section image may be compared with the plurality of samples in the training sample library.

[0055] Step 530: searching the measurement items. In this step, the training sample of which the characteristics are most similar to the characteristics of the specified section image may be searched out. The measurement items corresponding to the training sample which is searched out may be the measurement items of the specified section image.

[0056] After the comparison of the characteristics of the specified section image with the characteristics of the plurality of training samples of the preset training sample mode, the searching of the measurement items corresponding to the specified section image may be performed using following formula:

$$ind = index(\min_{1 \leq i \leq N} x_i)$$

[0057] Where the function *index* represents the serial number (i) corresponding to the minimum of x_i , which means that the i -th training sample is the one most similar to the sample being processed. Therefore, the measurement items of the sample being processed may be the same with the measurement items of the i -th training sample, which is known. Thereby, the measurement items corresponding to the specified section image are searched out.

[0058] Further, in other embodiments, different measuring modes may correspond to different sample modes which have different sample libraries. Therefore, before comparing the characteristics in the step 520, the measuring mode selected by the user may be acquired to make a selection on the sample libraries to reduce the number of the samples participating the comparison, which not only can increase the identification efficiency, but also may further increase the identification accuracy.

Embodiment 2

[0059] The machine learning method needs to acquire the characteristics of a plurality kinds of training samples and then perform the comparison, therefore it may be necessary to acquire training samples as many as possible, and these training samples should cover a variety of situations in position, size and shape, etc. as far as possible. In the case that there are not enough training samples, image processing methods may be used. In the present embodiment, image processing methods may be used to extract the image features (such as the gray, shape or the like) of the section images to determine the measurement items. Referring to FIG. 6, an identification module 32 provided in the present embodiment is shown. The identification module 32 may include an extraction unit 3221, an identification unit 3222 and a determination unit 3223.

[0060] The extraction unit 3221 may extract the high intensity portion of the specified section image based on the gray values of the pixels of the specified section image. The identification unit 3222 may identify the high intensity portion based on the measuring mode to determine the section type of the specified section image. The determination unit 3223 may determine the measurement items corresponding to the specified section image based on the section type determined and the measurement items corresponding thereto.

[0061] The present embodiment also provides a method for identification of measurement items using the identification module above, which may extract the features (such as the gray, shape or the like) of the section image and then perform the analysis and determination using these features.

[0062] Since the image features in different measuring modes may be different, the image processing methods used may vary with the measuring modes. For example, in the obstetric measuring mode, the common measurement items may include head circumference (HC), biparietal diameter (BPD), abdominal circumference (AC) and femur length (FL). The head circumference and the abdominal circumference are elliptic objects, the biparietal diameter and the femur length are linear object, and the head circumference and the biparietal diameter can be measured in a same section. Therefore, these four measurement items may correspond to three measurement sections: the head circumference section (HC and BPD may correspond to a same section), the abdominal circumference section and the femur section. The head circumference section contains the skull of the fetus, which is represented as a high intensity portion in an ultrasound section image. Furthermore, the skull in the near field and the skull in the far field together form an ellipse, in which the brain of the fetus is located. The gray values within the ellipse are significantly lower than the gray values of the skull. In the femur section, the femur is also represented as a high intensity portion, but the femur is substantially linear and only has a few curved portions. In the abdominal circumference section, the abdominal circumference is represented as an elliptic object with great gradient. However, the boundary of the abdominal circumference is not represented as high intensity portion, and the internal and the boundary of the abdominal circumference are close in gray value. Therefore, when the image processing methods are adopted to identify the measurement items, the measuring mode selected by the user may be acquired first, and then the image processing methods may be used to identify the measurement items.

[0063] Referring to FIG. 7, a flow chart of the identification process of the present embodiment is shown. The methods of the present embodiment will be further described hereinafter taking the obstetric measuring mode as an example. The methods may include following steps.

[0064] Step 600: acquiring the measuring mode.

[0065] Step 610: extracting the high intensity portion. In this step, the high intensity portion in the specified section image may be extracted based on the gray values of the pixels of the specified section image.

[0066] In an embodiment, after the gray data of the specified section image is acquired, a preprocessing may be performed on the image and then the high intensity portion may be extracted based on the preprocessed image. The preprocessing may be mainly used to suppress the noise of the image, increase the continuity of the boundary and highlight the high intensity portion. There are many preprocessing methods, such as anisotropic smoothing, etc. In other embodiments, the preprocessing may not be performed and the high intensity portion may be extracted based on the original gray data of the image.

[0067] In an embodiment, a cluster segmentation method may be used to extract the high intensity portion in the specified section image. The gray values of the pixels of the specified section image may be categorized into a plurality of categories using the cluster segmentation method. The pixels with the gray values of the one or more categories with maximum gray value may be kept unchanged while the pixels with the gray values of other categories may be assigned with zero, thereby obtaining a characteristic image. For example, the gray values of the specified section image may be categorized into N categories (for example, $N=3$). The N categories may be arranged in descending order and the first M categories (for example, $M \geq 1$ and $M < N$) may be determined as the category with maximum intensity (i.e. the high intensity portion). The pixels with the gray values of the following N-M categories may be assigned with zero while other pixels may be kept unchanged, thereby obtaining the characteristic image. Connected regions in the characteristic image may be identified, and one or more connected regions with maximum intensity may be determined, thereby obtaining the high intensity portion of the specified section image. In an embodiment, the first X connected regions of the connected

regions arranged in descending order may be determined as the connected regions with maximum intensity. X may be preset by the apparatus, and generally may be 1~10. In other embodiments, X may be other value based on actual needs.

[0068] In an embodiment, the characteristic image may also be obtained by convoluting a preset $M \times N$ operator with the specified section image. The values of the elements in the operator may be determined based on actual needs.

[0069] Furthermore, the characteristic image may generally contain a lot of noise. Therefore, certain morphological operations (such as morphological corrosion, opening operation, removal of small areas or the like) may be performed on the characteristic image to remove the noise and increase the continuity of the boundaries in the image.

[0070] Step 620: identifying the type of the section. In this step, an identification method may be performed on the high intensity portion based on the measuring mode to determine the section type of the specified section image.

[0071] In obstetric measuring mode, both the head circumference and the abdominal circumference are substantially elliptic. The head circumference section (as shown in FIG. 8a) and the abdominal circumference section (as shown in FIG. 8b) mainly differ in that: the head circumference section contains the skulls 81 which is represented as high intensity echoes during ultrasound examination and other tissues of the head, which are represented as low intensity portion during the ultrasound examination and significantly different from the skulls 81 in intensity, are located within the head circumference; while the abdominal circumference section contains the abdomen 82 of the fetus, of which the boundary has lower intensity than the head circumference and within which the echoes is relatively uniform and has no much difference from those of the boundary. Both the head circumference and the femur section (as shown in FIG. 8c) contain bones with high intensity, of which the main difference is that the head circumference contains two symmetrical, arc-shaped bones 81 while the femur section contains generally only one, relative straight bone 83. Based on the physical facts above, in this step, the intensity and shape of the connected regions identified may be analyzed and compared to determine which type of section the section image belong to.

[0072] In an embodiment, in a known measuring mode (for example, the obstetric measuring mode), an intensity threshold for the connected regions may be set in order to determine whether bones are contained in the section image. For example, in the case that the mean intensity of the connected regions is greater than a first threshold, the specified section image contains bones; in the case that the mean intensity of the connected regions is lower than a second threshold, the specified section image does not contain bones. The first threshold is greater than the second threshold. In other embodiments, it is also possible that only one intensity threshold for the connected regions is set.

[0073] A simple method for the analysis of the shape of the bones is using curvature to determine whether the bone bends and the degree of the bending. For example, in a known measuring mode (for example, the obstetric measuring mode), curvature thresholds may be set. In the case that the curvature of the connected regions is greater than a curvature threshold, the specified section image contains curved bone; in the case that the curvature of the connected regions is lower than a curvature threshold, the specified section image does not contain curved bone. In one embodiment, the curvature may be defined as the angle between two lines formed by respectively connecting the point located at the middle of the connected region and the points located at the both ends of the connected region. In other embodiments, the curvature may be defined in other ways as long as it can represent the degree of the bending of the connected regions.

[0074] For example, in the obstetric measuring mode, in the case that the mean intensities of the X connected regions are greater than a certain threshold, it is determined that the specified section image contains bones and the section may be the head circumference section or the femur section. Then, the curvature of the connected regions may be considered. In the case that the curvatures are greater than a certain threshold, it is determined that the bones contained in the section are curved and the specified section is the head circumference section. In the case that the curvatures are lower than a certain threshold, it is determined that the bones contained in the section are straight and the specified section is the femur section. In the case that the mean intensities of the X connected regions are all lower than a certain threshold, it is determined that the specified section does not contain bones with high intensity and is an abdominal section.

[0075] Step 630: determining the measurement items. In this step, the measurement items corresponding to the specified section image may be determined based on the section type determined and the measurement items corresponding thereto.

[0076] A person skilled in the art will understand that all or parts of the steps of the methods of the embodiments described above may be implemented by instructing related hardware using programs. The programs may be stored in a computer-readable storage medium which may include ROM, RAM, disk or CD, etc.

[0077] The present disclosure is described above with reference to specific embodiments. However, it is only used to facilitate the understanding of, but not limit, the present disclosure. Variations to the specific embodiments described above may be made by the person skilled in the art based on the concepts of the present disclosure.

Claims

1. A method for automatic identification of a measurement item, comprising:

an image acquisition step: acquiring gray values of pixels of a specified section image, wherein the gray values of the pixels correspond to ultrasound echoes generated by reflection of ultrasound waves by a tissue under examination;

an identification step: identifying at least one measurement item corresponding to the specified section image based on the gray values of the pixels; and

a measuring step: measuring a measurement parameter of the specified section image based on the measurement item identified.

2. The method of claim 1, wherein in the identification step, the measurement item is identified based on a comparative analysis of the gray values of the pixels with a preset data mode.

3. The method of claim 2, further comprising, before the identification step, acquiring a measuring mode used during tissue examination.

4. The method of any one of claims 1 to 3, wherein the identification step comprises:

generating a characteristic of the specified section image based on the gray values of the pixels of the specified section image;

comparing the characteristic of the specified section image with characteristics of training samples in a preset training sample mode, respectively; and

searching a training sample whose characteristic is most similar to the characteristic of the specified section image and outputting measurement items corresponding to the training sample searched as measurement items corresponding to the specified section image.

5. The method of claim 4, wherein the characteristic of the training sample is a projection coefficient of an eigenvector of the training sample on a mean value of the training sample, and the characteristic of the specified section image is a projection coefficient of an eigenvector of the specified section image on the mean value of the training sample.

6. The method of claim 5, wherein the characteristic of the specified section image is calculated by the following formula:

$$\mathbf{w} = \mathbf{E}^T (\mathbf{I}_{test} - \mathbf{m})$$

wherein $\mathbf{I}_{test}$ is the eigenvector of the specified section image, $\mathbf{m}$ is the mean value of the training sample, T represents matrix transpose, $\mathbf{E}$ is an orthogonalized eigenvector, and w is the projection coefficient of the eigenvector of the specified section image on the mean value of the training sample.

7. The method of claim 3, wherein the identification step comprises:

extracting high intensity portions from the specified section image based on the gray values of the pixels of the specified section image;

performing an identification on the high intensity portions based on the measuring mode to determine a section type of the specified section image; and

determining a measurement item corresponding to the specified section image based on the section type determined and a measurement item corresponding to the section type determined.

8. The method of claim 7, wherein extracting high intensity portions from the specified section image comprises:

categorizing the gray values of the pixels of the specified section image into a plurality of categories using a cluster segmentation method;

keeping pixels which have gray values of one or more categories with maximum gray values unchanged while assigning zero to pixels which have gray values of other categories to obtain a characteristic image; and

identifying connected regions in the characteristic image and determining one or more connected regions with maximum intensity to obtain the high intensity portions.

9. The method of claim 8, wherein performing an identification on the high intensity portions based on the measuring mode comprises:

analyzing intensities and shapes of the connected regions identified; and
determining the section type of the specified section image based on the measuring mode and results of the analysis.

10. The method of claim 1, wherein the measuring step comprises manual measuring, semi-automatic measuring and automatic measuring.

11. A device for automatic identification of a measurement item, comprising:

an image acquisition module which acquires gray values of pixels of a specified section image, wherein the gray values of the pixels correspond to ultrasound echoes generated by reflection of ultrasound waves by a tissue under examination;
an identification module which identifies at least one measurement item corresponding to the specified section image based on the gray values of the pixels; and
a measuring module which measures a measurement parameter of the specified section image based on the measurement item identified.

12. The device of claim 11, wherein the identification module identifies the measurement item based on a comparative analysis of the gray values of the pixels with a preset data mode.

13. The device of claim 12, further comprising a measuring mode acquisition module which acquires a measuring mode used during tissue examination.

14. The device of any one of claims 11 to 13, wherein the identification module comprises:

a characteristic generation unit which generates a characteristic of the specified section image based on the gray values of the pixels of the specified section image;
a comparison unit which compares the characteristic of the specified section image with characteristics of training samples in a preset training sample mode, respectively; and
a searching unit which searches a training sample whose characteristic is most similar to the characteristic of the specified section image and outputting measurement items corresponding to the training sample searched out as measurement items corresponding to the specified section image.

15. The device of claim 14, wherein the characteristic of the training sample is a projection coefficient of an eigenvector of the training sample on a mean value of the training sample, and the characteristic of the specified section image is a projection coefficient of an eigenvector of the specified section image on the mean value of the training sample.

16. The device of claim 15, wherein the characteristic generation unit generates the characteristic of the specified section image using the following formula:

$$\mathbf{w} = \mathbf{E}^T (\mathbf{I}_{test} - \mathbf{m})$$

wherein $\mathbf{I}_{test}$ is the eigenvector of the specified section image, $\mathbf{m}$ is the mean value of the training sample, T represents matrix transpose, $\mathbf{E}$ is an orthogonalized eigenvector, and $\mathbf{w}$ is the projection coefficient of the eigenvector of the specified section image on the mean value of the training sample.

17. The device of claim 13, wherein the identification module comprises:

an extraction unit which extracts high intensity portions from the specified section image based on the gray values of the pixels of the specified section image;
an identification unit which performs an identification on the high intensity portions based on the measuring mode to determine a section type of the specified section image; and
a determination unit which determines a measurement item corresponding to the specified section image based on the section type determined and a measurement item corresponding to the section type determined.

18. The method of claim 17, wherein, when extracting the high intensity portions from the specified section image, the

extraction unit:

categorizes the gray values of the pixels of the specified section image into a plurality of categories using a cluster segmentation method;

keeps pixels which have gray values of one or more categories with maximum gray values unchanged while assigns zero to pixels which have gray values of other categories to obtain a characteristic image; and identifies connected regions in the characteristic image and determines one or more connected regions with maximum intensity to obtain the high intensity portions.

19. The device of claim 18, wherein, when performing an identification on the high intensity portions based on the measuring mode, the identification unit:

analyzes intensities and shapes of the connected regions identified; and

determines the section type of the specified section image based on the measuring mode and results of the analysis.

20. The device of claim 18, wherein the extraction unit further performs a pre-processing on the specified section image to increase boundary continuity before extracting the high intensity portions from the specified section image, and a post-processing on the characteristic image to remove noise to increase boundary continuity after the characteristic image is obtained.

21. A ultrasound imaging apparatus, comprising:

a probe which transmits ultrasound waves to a tissue and receives ultrasound echoes;

a signal processor which processes the ultrasound echoes to generate ultrasound image data; and

an image processor which processes the ultrasound image data and generates section images;

wherein the image processor comprises a device for automatic identification of a measurement item of any one of claims 11 to 20.

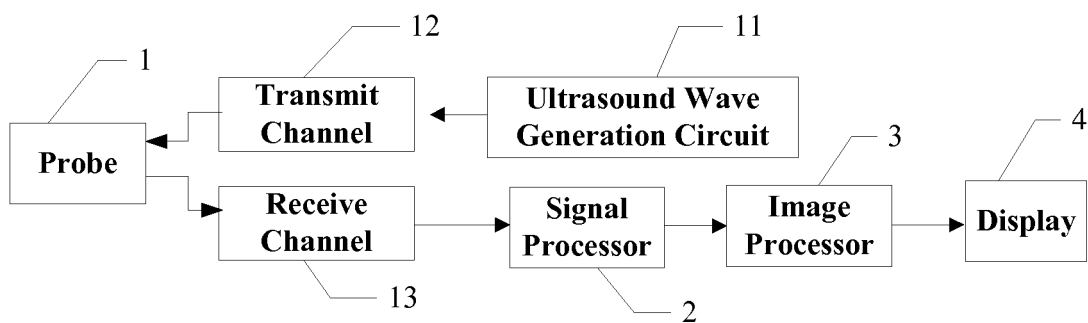


FIG. 1

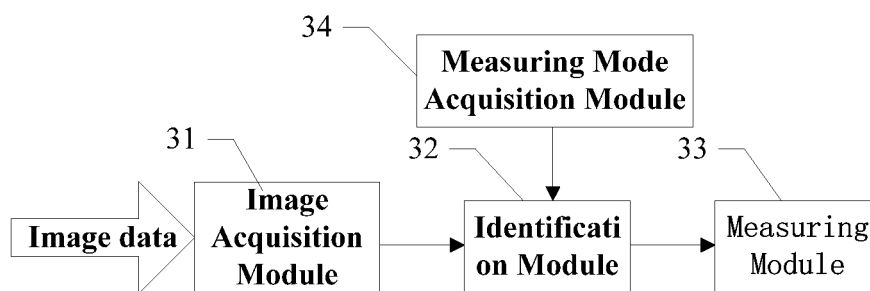


FIG. 2

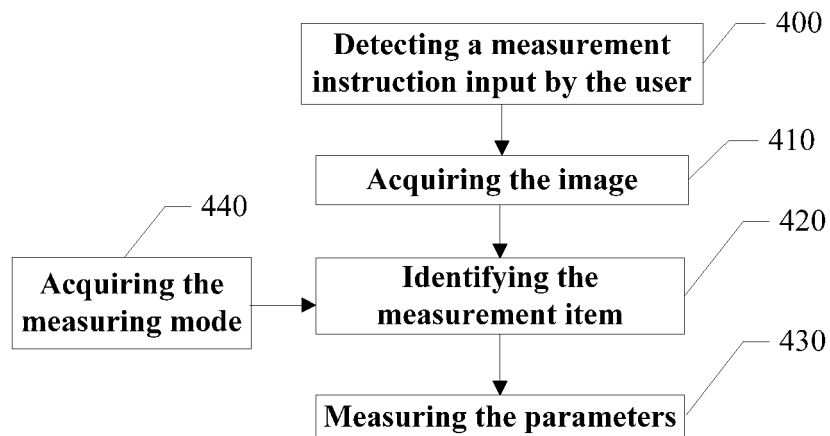


FIG. 3

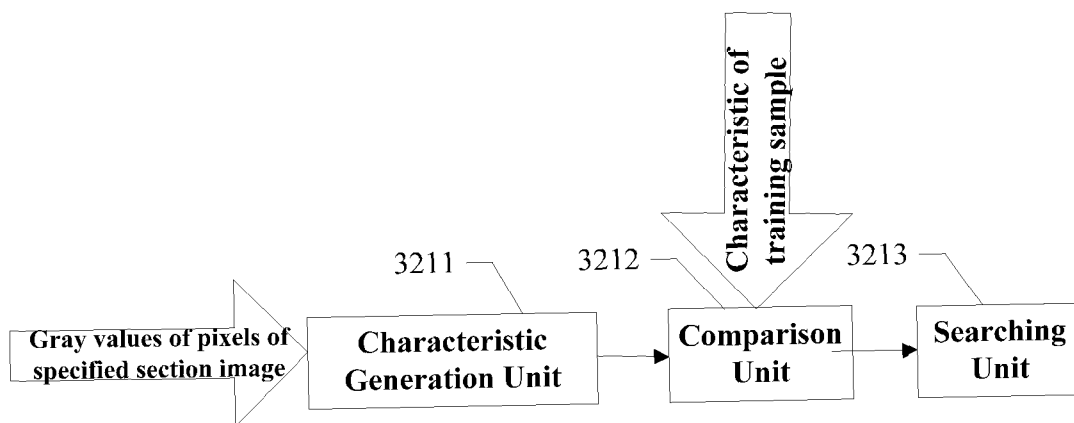


FIG. 4

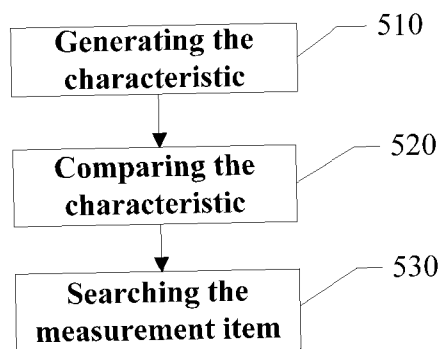


FIG. 5

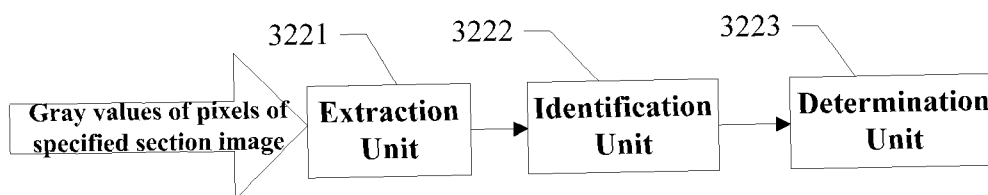


FIG. 6

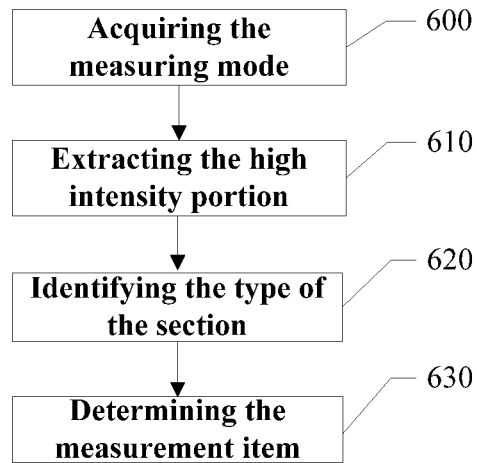


FIG. 7

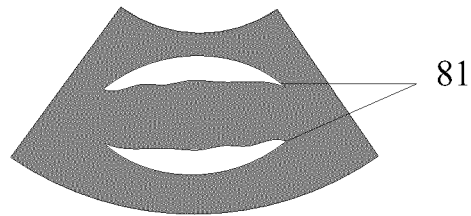


FIG. 8a

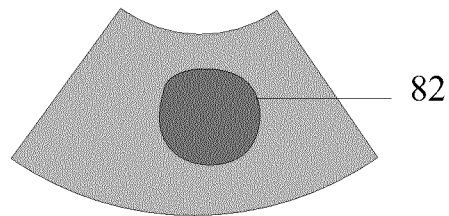


FIG. 8b

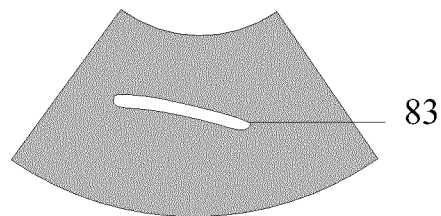


FIG. 8c

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2014/073777

A. CLASSIFICATION OF SUBJECT MATTER

A61B 8/00 (2006.01) i
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B 8/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CNKI, CNPAT, Web of Knowledge: ultraso+, auto+, recogni+, distinguish+, identif+ , measurement, gray

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 102151149 A (SHENZHEN EDAN INSTRUMENTS INC.) 17 August 2011 (17.08.2011) description, paragraphs [0026]-[0034] and [0028]-[0039]	1-3, 10-13, 21
A	CN 102274051 A (SHENZHEN EDAN INSTRUMENTS INC.) 14 December 2011 (14.12.2011) the whole document	1-21
A	US 2013/0231564 A1 (KONINKLIJKE PHILIPS ELECTRONICS N. V.) 05 September 2013 (05.09.2013) the whole document	1-21
A	WO 2010/057665 A1 (CNRCONSIGLIO NAZIONALE DELLE RICERCHE) 27 May 2010 (27.05.2010) the whole document	1-21

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search 02 December 2014	Date of mailing of the international search report 24 December 2014
Name and mailing address of the ISA State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No. (86-10) 62019451	Authorized officer LI, Shuxin Telephone No. (86-10) 010-61648461

INTERNATIONAL SEARCH REPORT
 Information on patent family members

 International application No.
 PCT/CN2014/073777

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102151149 A	17 August 2011	CN 102151149 B	23 January 2013
CN 102274051 A	14 December 2011	CN 102274051 B	26 December 2012
US 2013/0231564 A1	05 September 2013	WO 2012025889 A1	01 March 2012
		CN 103068318 A	24 April 2013
WO 2010/057665 A1	27 May 2010	INKOLNP 201102056 E	06 September 2011
		EP 2375980 A1	09 October 2011
		US 2011257529 A1	20 October 2011
		CN 102223842 A	19 October 2011
		CN 102223842 B	18 June 2014
		IT 1391829 B	27 January 2012
		EP 2375980 B1	03 April 2013
		ES 2419384 T3	20 August 2013
		ITPI 20080118 A1	22 May 2010

专利名称(译)	用于自动识别测量项目的方法和设备以及超声成像设备		
公开(公告)号	EP3127486A1	公开(公告)日	2017-02-08
申请号	EP2014885962	申请日	2014-03-20
[标]申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司		
申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
当前申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
[标]发明人	ZOU YAOXIAN YAO BIN WEI YI LIN MUQING ZENG ZUOQI		
发明人	ZOU, YAOXIAN YAO, BIN WEI, YI LIN, MUQING ZENG, ZUOQI		
IPC分类号	A61B8/00		
CPC分类号	A61B8/08 A61B8/469 A61B8/5223 G16H50/30 A61B5/1075 A61B5/7267 A61B8/0866 A61B8/0875 A61B8/4461 G06T7/0012 G06T7/60		
代理机构(译)	KIPA AB		
其他公开文献	EP3127486A4		
外部链接	Espacenet		

摘要(译)

一种用于自动识别测量项目的方法和装置。经由图像获取模块 (31) 获取与在由指定截面图像帧中检测到的活组织的超声信号的反射形成的超声回波对应的像素点的灰度;然后, 基于像素点的灰度, 由识别模块 (32) 识别对应于指定的横截面图像帧的至少一个测量项目;并且由测量模块 (33) 基于所识别的测量项目来测量所指定的横截面图像帧的测量项目参数。由于可以基于指定的横截面图像的内容自动识别指定横截面的测量项目, 所以省略了以下步骤: 用户移动轨迹球以选择指定横截面图像的测量项目超声波测量过程, 从而提高测量效率。

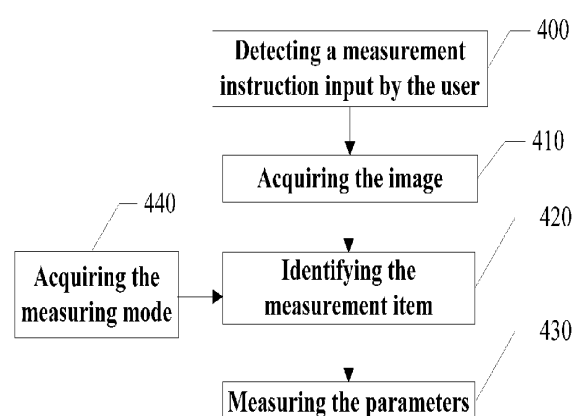


FIG. 3