

(19)



(11)

**EP 2 356 412 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**15.08.2012 Bulletin 2012/33**

(51) Int Cl.:  
**G01H 9/00 (2006.01) A61B 8/12 (2006.01)**

(21) Application number: **09793238.8**

(86) International application number:  
**PCT/US2009/059218**

(22) Date of filing: **01.10.2009**

(87) International publication number:  
**WO 2010/039950 (08.04.2010 Gazette 2010/14)**

(54) **OPTICAL ULTRASOUND RECEIVER**

OPTISCHER ULTRASCHALLEMPFÄNGER

RÉCEPTEUR OPTIQUE D'ULTRASONS

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK SM TR**

- **TASKER, Diana Margaret**  
**California 95628 (US)**
- **ROURKE, Howard Neil**  
**California 95811 (US)**

(30) Priority: **02.10.2008 US 102216 P**

(74) Representative: **Curley, Donnacha John**  
**Hanna Moore & Curley**  
**13 Lower Lad Lane**  
**Dublin 2 (IE)**

(43) Date of publication of application:  
**17.08.2011 Bulletin 2011/33**

(73) Proprietor: **Vascular Imaging Corporation**  
**Rancho Cordova, CA 95670 (US)**

(56) References cited:  
**JP-A- 59 158 699 US-A1- 2004 067 000**  
**US-A1- 2008 114 254**

(72) Inventors:  
• **EBERLE, Michael J.**  
**California 95628 (US)**

**EP 2 356 412 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND

**[0001]** Bates et al. U.S. Patent No. 7,245,789 discusses, among other things, an imaging guidewire that includes one or more optical fibers communicating light along the guidewire. At or near a distal end of the guidewire, light is directed to a photoacoustic transducer material that provides ultrasonic imaging energy. Returned ultrasound energy is sensed by an ultrasound-to-optical transducer. A responsive signal is optically communicated to the proximal end of the guidewire, such that it can be processed to develop a 2D or 3D image.

### OVERVIEW

**[0002]** Among other things, the present applicant has recognized the desirability of reducing or minimizing the size of a system like that described in Bates. However, the present applicant has recognized that reducing the size of the ultrasound-to-optical transducer can also change the mechanical acoustic resonance of the transducer at some ultrasound frequencies and can also result in a generally smaller output signal. Additionally, the transducer response can become dependent on the polarization of the optical signal since it is responsive to acoustic impedances in the direction of polarization. This can result in undesirable variations in the output signal conditional on the polarization direction due to different resonances in different lateral directions, for example. One approach to reduce or eliminate this effect would be to control polarization of the optical signal. However, such polarization is difficult to control or predict in a cost-effective manner. Accordingly, the present applicant has recognized, among other things, that it can be advantageous to provide an ultrasound-to-optical transducer that is relatively insensitive to optical signal polarization.

**[0003]** Example 1 can include an ultrasound-to-optical transducer, including an optical fiber, an ultrasound-absorptive backing configured for substantially absorbing ultrasound energy that passes beyond the optical fiber to reach the backing, and a Fiber Bragg Grating (FBG) interferometer configured for receiving the ultrasound energy and capable of modulating an optical sensing signal, in response to the ultrasound energy, substantially independent of a polarization angle of the optical sensing signal. In this example, the optical fiber can include an optical fiber diameter that is less than half of a wavelength of target ultrasound energy to be received by the transducer.

**[0004]** In Example 2, the subject matter of Example 1 can optionally comprise an elongated intravascular imaging assembly, comprising a proximal external portion comprising an optical signal interface and a distal portion sized and shaped and configured for internal intravascular acoustic imaging. In this example, the imaging assembly can comprise an elongated support, extending

substantially from the proximal portion of the imaging assembly to the distal portion of the imaging assembly, the support configured to provide adequate length, rigidity, and flexibility to permit intravascular introduction and steering of a distal portion of the imaging assembly to a location of interest, the optical fiber, extending longitudinally and affixed along the support substantially from the proximal portion of the imaging assembly substantially to the distal portion of the imaging assembly, a transducer, located at or near a distal portion of the imaging assembly and configured as at least one of the ultrasound-to-optical transducer or an optical-to-ultrasound transducer; and the backing, located in a backing region between the transducer and the elongated support, the backing configured to attenuate ultrasound energy that reaches the backing region by at least 90%.

**[0005]** In Example 3, the subject matter of any one of Examples 1 or 2 can optionally be configured so that the assembly comprises a plurality of the optical fibers, extending longitudinally and affixed along the support, the fibers arranged circumferentially about a central longitudinal axis of the support, and a plurality of the transducers, wherein the transducer includes a photoacoustic material located at a peripheral portion of the optical fiber that is away from the backing.

**[0006]** In Example 4, the subject matter of any one of Examples 1-3 can optionally be configured such that the optical fiber diameter is less than sixty micrometers.

**[0007]** In Example 5, the subject matter of any one of Examples 1-4 can optionally be configured so that the backing comprises microballoons containing a gas.

**[0008]** In Example 6, the subject matter of any one of Examples 1-5 can optionally be configured so that the microballoons comprise about 30% to about 50% of the volume of the backing.

**[0009]** In Example 7, the subject matter of any one of Examples 1-6 can optionally be configured so that a thickness of the backing is between about 25 micrometers and about 100 micrometers.

**[0010]** In Example 8, the subject matter of any one of Examples 1-7 can optionally comprise the transducer being configured such that a peak-to-peak amplitude of an oscillating output optical bias signal modulated by the transducer varies by no more than one decibel when the polarization angle of the optical sensing signal is varied by 90 degrees.

**[0011]** In Example 9, the subject matter of any one of Examples 1-8 can optionally be configured such that a total birefringence induced on an optical signal with a wavelength of about 1550 nanometers transmitted within the optical fiber is less than  $(3 \times 10^{-6})$ .

**[0012]** Example 10 can include (or can be combined with the subject matter of any one of Examples 1-9 to include) fabricating an ultrasound-to-optical transducer, the fabricating comprising providing an optical fiber that includes a diameter that is less than half of a wavelength of target ultrasound energy to be received by the transducer, creating a Fiber Bragg Grating (FBG) interferom-

eter configured for receiving the ultrasound energy and capable of modulating an optical sensing signal substantially independent of a polarization of the optical sensing signal, associating an ultrasound-absorptive backing with the optical fiber, and configuring the backing for substantially absorbing ultrasound energy that passes beyond the optical fiber to reach the backing.

**[0013]** In Example 11, the subject matter of any one of Examples 1-10 can optionally comprise associating the backing comprising microballoons containing a gas with the fiber.

**[0014]** In Example 12, the subject matter of any one of Examples 1-11 can optionally comprise providing the backing comprising the microballoons that comprise about 30% to about 50% of the volume of the backing.

**[0015]** In Example 13, the subject matter of any one of Examples 1-12 can optionally comprise inserting the backing into a backing region between a central support structure and the optical fiber, wherein both the support structure and the fiber extend longitudinally, the backing region being bounded laterally by a tubular sheath.

**[0016]** In Example 14, the subject matter of any one of Examples 1-13 can optionally comprise conforming the backing to the external surface of a central support structure, wherein both the support structure and the fiber extend longitudinally.

**[0017]** In Example 15, the subject matter of any one of Examples 1-14 can optionally further comprise conforming a tubular sheath to a surface of the backing that is away from the support structure.

**[0018]** Example 16 can include (or can be combined with the subject matter of any one of Examples 1-15 to include) receiving ultrasound energy with an optical fiber, the optical fiber including a diameter that is less than half of a wavelength of the ultrasound energy, and using the ultrasound energy to modulate an optical sensing signal substantially independent of a polarization of the optical sensing signal.

**[0019]** In Example 17, the subject matter of any one of Examples 1-16 can optionally comprise using the ultrasound energy to modulate the optical sensing signal substantially independent of the polarization of the optical sensing signal comprises generating a modulated output optical signal with a peak-to-peak amplitude that varies by no more than one decibel when a polarization angle of the optical sensing signal is varied by 90 degrees.

**[0020]** - In Example 18, the subject matter of any one of Examples 1-17 can optionally comprise using the ultrasound-absorptive backing to attenuate ultrasound energy that passes beyond the optical fiber to reach the backing by at least 90%.

**[0021]** In Example 19, the subject matter of any one of Examples 16-18 can optionally comprise forming an image of a region within a living body using information from a modulated output optical signal.

**[0022]** These examples can be combined with each other in any permutation or combination and or with other subject matter disclosed herein. This overview is intend-

ed to provide an overview of subject matter of the present patent application. It is not intended to provide an exclusive or exhaustive explanation of the invention. The detailed description is included to provide further information about the present patent application.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0023]** In the drawings, which are not necessarily drawn to scale, like numerals may describe similar components in different views. Like numerals having different letter suffixes may represent different instances of similar components. The drawings illustrate generally, by way of example, but not by way of limitation, various embodiments discussed in the present document.

FIG. 1 is a cross-sectional side view illustrating generally, by way of example, but not by way of limitation, an example of an FBG strain sensor in an optical fiber.

FIG. 2 is a cross-sectional side view illustrating generally, by way of example, but not by way of limitation, an example of an FBG grating interferometer sensor. FIG. 3 is a cross-sectional schematic diagram illustrating generally an example of an acousto-optic transducer.

FIG. 4 is a cross-sectional schematic diagram illustrating generally another example of an FBG strain sensor in an optical fiber.

FIG. 5 is a schematic diagram that illustrates generally an example of a side view of a distal portion of a guidewire.

FIG. 6 is a schematic diagram that illustrates generally an example of a cross-sectional side view of a distal portion of a guidewire.

FIG. 7 is a schematic diagram that illustrates generally an example of a cross-sectional end view of a proximal portion of a guidewire.

FIG. 8 is a schematic diagram that illustrates generally an example of a cross-sectional end view of a distal portion of a guidewire.

FIG. 9 is a cross-sectional end view that illustrates generally an example of a guidewire assembly at a location of a transducing window.

## DETAILED DESCRIPTION

### 1. Examples of Fiber Bragg Grating Strain Sensors

**[0024]** FIG. 1 is a cross-sectional side view illustrating generally, by way of example, but not by way of limitation, an example of a strain-detecting or pressure-detecting acoustic-to-optical FBG sensor 100 in an optical fiber 105. FBG sensor 100 senses acoustic energy received from a nearby area to be imaged, and transduces the received acoustic energy into an optical signal within optical fiber 105. In the example of FIG. 1, FBG sensor 100 can include Bragg gratings 110A-B in an optical fiber core

115, such as surrounded by an optical fiber cladding 120. Bragg gratings 110A-B can be separated by a strain or pressure sensing region 125, which, in an example, can be about a millimeter in length. This example can sense strain or pressure such as by detecting a variation in length of the optical path between these gratings 110A-B.

**[0025]** A Fiber Bragg Grating can be conceptualized as a periodic change in the optical refractive index of a portion of the optical fiber core 115. Light of specific wavelengths traveling down such a portion of core 115 will be reflected; the period (distance) 130 of the periodic change in the optical index determines the particular wavelengths of light that will be reflected. The degree of optical index change and the length 135 of the grating determine the ratio of light reflected to that transmitted through the grating 110A-B.

**[0026]** FIG. 2 is a cross-sectional side view illustrating generally, by way of example, but not by way of limitation, an operative example of an interferometric FBG sensor 100. The example of FIG. 2 can include two FBG mirrors 110A-B, which can be both partially reflective such as for a specific range of wavelengths of light passing through fiber core 115. Generally, the reflectivity of each FBG will be substantially similar, but can differ for particular implementations. This interferometric arrangement of FBGs 110A-B can be capable of discerning the "optical distance" between FBGs 110A-B with extreme sensitivity. The "optical distance" can be a function of the effective refractive index of the material of fiber core 115 as well as the length 125 between FBGs 110A-B. Thus, a change in the refractive index can induce a change in optical path length, even though the physical distance 125 between FBGs 110A-B has not substantially changed.

**[0027]** An interferometer, such as FBG sensor 100, can be conceptualized as a device that measures the interference between light reflected from each of the partially reflective FBGs 110A-B. When the optical path length between the FBG mirrors 110A-B is an exact integer multiple of the wavelength of the optical signal in the optical fiber core 115, then the light that passes through the FBG sensor 100 will be a maximum and the light reflected will be a minimum, so the optical signal is substantially fully transmitted through the FBG sensor 100. This addition or subtraction can be conceptualized as interference. The occurrence of full transmission or minimum reflection can be called a "null" and occurs at a precise wavelength of light for a given optical path length. Measuring the wavelength at which this null occurs can yield an indication of the length of the optical path between the two partially reflective FBGs 110A-B. In such a manner, an interferometer, such as FBG sensor 100, can sense a small change in distance, such as a change in the optical distance 125 between FBGs 110A-B resulting from received ultrasound or other received acoustic energy. This arrangement can be thought of as a special case of the FBG Fabry-Perot interferometer, sometimes more particularly described as an Etalon, because the distance 125 between the FBGs 110A-B is

substantially fixed.

**[0028]** The sensitivity of an interferometer, such as FBG sensor 100, can depend in part on the steepness of the "skirt" of the null in the frequency response. The steepness of the skirt can be increased by increasing the reflectivity of the FBGs 100A-B, which also increases the "finesse" of the interferometer. The present applicant has recognized, among other things, that increasing the finesse or steepness of the skirt of FBG sensor 100 can increase the sensitivity of the FBG sensor 100 to the reflected ultrasound signals within a particular wavelength range but can decrease the dynamic range. As such, keeping the wavelength of the optical sensing signal within the wavelength range can be advantageous. In an example, a closed-loop system can monitor a representative wavelength (e.g., the center wavelength of the skirt of the filtering FBG sensor 100) and can adjust the wavelength of an optical output laser to remain substantially close to the center of the skirt of the filter characteristic of the FBG sensor 100 as forces external to the optical fiber 105, such as bending and stress, cause the center wavelength of the skirt of the filter characteristic of the FBG sensor 100 to shift.

**[0029]** In an example, such as illustrated in FIG. 2, the interferometric FBG sensor 100 can cause interference between that portion of the optical beam that is reflected off the first partially reflective FBG 110A with that reflected from the second partially reflective FBG 110B. The wavelength of light where an interferometric null will occur can be very sensitive to the "optical distance" between the two FBGs 110A-B. The interferometric FBG sensor 100 of FIG. 2 can provide another very practical advantage. In this example, the two optical paths along the fiber core 115 are the same, except for the sensing region between FBGs 110A-B. This shared optical path ensures that any optical changes in the shared portion of optical fiber 105 will have substantially no effect upon the interferometric signal; only the change in the sensing region 125 between FBGs 110A-110B is sensed. However, the present applicant has recognized, among other things, that this sensing can be affected by birefringence of the optical fiber within FBG sensor 100.

**[0030]** Optical birefringence is a measure of the difference in refractive index of an optical medium for light of different polarizations. The polarization of light can be defined as the orientation of the electric vector of the electromagnetic light wave. Birefringence between two at least partially reflective FBGs, such as FBGs 110A-B, can cause different beams of light with different polarizations to effectively travel slightly different optical path lengths between the FBGs 110A-B. Therefore, a combination of birefringence between the at least partially reflective FBGs 110A-B and a shift in the polarization of the optical signal within the optical fiber core 115 can cause a shift in the exact wavelength of the null of the FBG sensor 100. When light is split between different polarization states, the light will be reflected or transmitted from different parts of the skirt of the null, which can lead to fading

of the optically transduced signal. There are many possible states of polarization, such as linear, circular, and elliptical, but the worst signal fading generally occurs when the optical signal is split equally between linear polarization states that are orthogonally aligned. With this in mind, the present applicant has recognized, among other things, that birefringence should be reduced or otherwise addressed, if possible.

**[0031]** The present applicant has also recognized that there can be two main sources of optical birefringence within the FBG sensor 100. The first source is the intrinsic birefringence of the optical fiber 105. The intrinsic birefringence is determined mostly during the manufacturing of the optical fiber 105 and is generally a function of the level of geometric symmetry, the uniformity of dopant distribution, and the level of stress in the fiber core 115 during the drawing of the fiber core 115.

**[0032]** The second source of optical birefringence in the FBG sensor 100 is the process of writing the FBGs 110A and 110B. The present applicant has also recognized that the birefringence induced by the writing of FBGs 110A and 110B can be reduced such as by controlling one or more aspects of the writing process, such as the polarization of the writing laser, the laser pulse energy, the writing exposure time, the amount of hydrogen or deuterium in the fiber during writing, or any combination thereof.

## 2. Examples of FBG Acoustic-to-Optical Transducers

**[0033]** In an example, an FBG sensor 100 senses pressure or strain such as generated by ultrasound or other acoustic energy received from a nearby imaging region to be visualized and, in response, modulates an optical sensing signal in an optical fiber. Increasing the sensitivity of the FBG sensor 100 can provide improved imaging. A first example of increasing sensitivity is to increase the amount of strain induced in the FBG sensor 100 for a given dynamic pressure provided by the acoustic energy. A second example is to increase the modulation of the optical signal for a given change in strain of the FBG sensor 100. Any combination of the techniques of these first and second examples can also be used.

**[0034]** One technique of increasing the strain induced in the FBG sensor 100 is to configure the physical attributes of the FBG sensor 100 such as to increase the degree of strain for a given externally-applied acoustic field. In an example, the FBG sensor 100 can be shaped so as to increase the strain for a given applied acoustic pressure field. FIG. 3 is a cross-sectional schematic diagram illustrating such an example in which the FBG sensor 100 is shaped such that it mechanically resonates at or near the frequency of the acoustic energy received from the nearby imaging region, thereby resulting in increased strain. In the example of FIG. 3, all or a portion of the strain sensing region between FBGs 110A-B is selected to provide a thickness 300 that promotes such mechanical resonance of the received acoustic energy,

thereby increasing the resulting strain sensed by FBG sensor 100. In an example, such as illustrated in FIG. 3, this can be accomplished by grinding or otherwise removing a portion of fiber cladding 120, such that the remaining thickness of fiber core 115 or fiber cladding 120 between opposing planar (or other) surfaces is selected to mechanically resonate at or near the frequency of the acoustic energy received from the nearby imaging region.

**[0035]** In an example, mechanical resonance can be obtained by making the thickness 300 of the strain sensing region substantially the same thickness as  $1/2$  the acoustic wavelength (or an odd integer multiple thereof) in the material(s) of FBG sensor 100 at the acoustic center frequency of the desired acoustic frequency band received from the imaging region. In other examples, such as for other materials, the thickness 300 can be selected to match a different proportion of the acoustic wavelength that obtains the desired mechanical resonance for that material. Calculations indicate that obtaining such mechanical resonance can increase the strain sensitivity by a factor of 2 or more over that of a sensor that is not constructed to obtain such mechanical resonance.

**[0036]** In a third example, a coating 305 can be applied to the FBG sensor 100 such as to increase the acoustic pressure as seen by the FBG sensor 100 over a band of acoustic frequencies, such as for improving its sensitivity over that band. The difference between the mechanical characteristics of water (or tissue and/or blood, which is mostly comprised of water) and glass material of the optical fiber 105 carrying the FBG sensor 100 is typically so significant that only a small amount of acoustic energy "enters" the FBG sensor 100 and thereby causes strain; the remaining energy is reflected back into the biological or other material being imaged. For a particular range of acoustic frequencies, one or more coatings 305 of specific thickness 310 or mechanical properties (e.g., the particular mechanical impedance) of the coating material can be used to dramatically reduce such attenuation due to the different mechanical characteristics. An example can use quarter wave matching, providing a coating 305 of a thickness 310 that is approximately equal to one quarter of the acoustic signal wavelength received from the region being imaged. Using such matching, the sensitivity of the FBG sensor 100, over a given band of acoustic frequencies of interest, is expected to increase by about a factor of 2.

**[0037]** However, for a mechanically resonant transducer, reducing the thickness of fiber cladding 120, and therefore reducing the total size of the transducer, is limited by the wavelength of the acoustic energy to be received. In a fourth example, the thickness 300 of the strain sensing region is substantially less than half of the wavelength of the target acoustic energy. FIG. 4 is a cross-sectional schematic diagram illustrating such an example. In this example, the thickness 300 of the strain sensing region can be less than 60 micrometers. As the acoustic width of the transducer is reduced, the cross-

sectional area of the transducer is reduced, and the total strain due to acoustic pressure on the transducer is reduced. Therefore, a smaller thickness 300 of the strain sensing region results in a smaller received acoustic signal, leading to reduced receive sensitivity of the FBG sensor 100. This reduced receive sensitivity of the FBG sensor 100 can be improved by placing a backing 440 between the strain sensing region of the optical fiber 105 and a core wire 450 that can be configured to provide support, rigidity, and flexibility for the assembly. The backing 440 can include a high acoustic impedance material such as a metal or ceramic. In an example, the backing 440 can be separated from the optical fiber such as by an acoustically thin (e.g., less than a quarter wavelength thick) tubular sheath 460. The coating 305 can also be configured, in an example, for acoustic impedance matching.

**[0038]** In an example, the backing 440 can be configured to reflect acoustic energy back to the strain sensing region, such as in a resonant manner, to increase the total amount of acoustic energy received by the strain sensing region and thereby increase the strain on the region. In this example, however, the receive sensitivity of FBG sensor 100 may depend on the polarization of the optical sensing signal because the backing 440 does not enhance the acoustic signal in all directions. The receive sensitivity generally is highest when the optical sensing signal is polarized parallel to an axis extending through the backing 440 and the fiber core 115 or an axis extending through the core wire 450 and the fiber core 115. The receive sensitivity is generally lowest when the angle of the polarization of the optical sensing signal is parallel to the outline of the interface between the backing 440 and the sheath 460, because the backing does not enhance the signal for this polarization orientation. The variable sensitivity in this example results at least partially from acoustic reflections from the backing 440 and from the core wire 450. The present applicant has recognized, among other things, that sensitivity to polarization of the optical sensing signal should be reduced or eliminated, if possible, in an example.

**[0039]** In an example, the backing 440 can be configured to absorb the acoustic energy that penetrates completely through the optical fiber to reach the backing 440. In this example, the backing 440 can be configured both to not reflect any acoustic energy back to FBG sensor 100 and also to inhibit or prevent the core wire 450 from reflecting any acoustic energy back to FBG sensor 100. The sheath 460 in this example can be configured to not reflect any substantial amount of acoustic energy. In an illustrative example, the sheath 460 can comprise a layer of UV-curable polyester such as with a thickness of about 10 micrometers or less. The backing 440 in this illustrative example can comprise microballoons filled with gas or microballoons filled with gas mixed into a polymer matrix. In an example of a device configured for imaging within a coronary vasculature, the room for the backing 440 is very limited, and therefore it can be advantageous if the

backing 440 is relatively highly acoustically absorbent with a relatively small thickness. In an example in which acoustic energy that penetrates completely through the optical fiber to reach the backing 440 is substantially absorbed by a relatively small thickness of the backing 440, microballoons can comprise 30% to 50% of the volume of the backing 440. With such a polymer-microballoon mixture, the backing 440 can have a thickness of as little as 50 micrometers and can be configured to be capable of attenuating acoustic energy with a frequency of 20 megahertz by 17 decibels to 23 decibels per millimeter of thickness of the backing 440. In an example, the sensitivity of FBG sensor 100 is relatively independent of the polarization of the output optical beam within FBG sensor 100. In an example, a peak-to-peak amplitude of the oscillating output optical sensing signal varies by no more than one decibel as the polarization of the output optical sensing signal is rotated 90 degrees. In an example, the backing 440 attenuates ultrasound energy by at least 90%.

**[0040]** The above examples can be combined with each other or can include more or fewer elements than are recited in the examples and can still function as described in the examples. For example, an ultrasound-to-optical transducer that is relatively insensitive to the polarization of the optical sensing signal can include an optical fiber, a backing configured to absorb ultrasound energy that goes through the optical fiber to reach the backing, and an FBG interferometer configured to modulate an optical sensing signal in response to the ultrasound energy. The optical fiber can include a thickness of the optical fiber that is less than half the wavelength of the ultrasound energy that is sensed by the transducer.

### 3. Examples of Guidewire Design

**[0041]** FIG. 5 is a schematic diagram that illustrates generally an example of a side view of a distal portion 500 of an imaging guidewire 505 or other elongated catheter (in an example, the guidewire 505 is sized and shaped and is of flexibility and rigidity such that it is capable of being used for introducing and/or guiding a catheter or other medical instrument, e.g., over the guidewire 505 within a living body). In this example, the distal portion 500 of the imaging guidewire 505 includes one or more imaging windows 510A, 510B, ..., 510N located slightly or considerably proximal to a distal tip 515 of the guidewire 505. Each imaging window 510 includes one or more acoustic-to-optical FBG sensors 100. In an example, the different imaging windows 510A, 510B, ..., 510N are designed for different optical wavelengths, such that particular individual windows can be addressed by changing the optical wavelength being communicated through fiber core 115.

**[0042]** FIG. 6 is a schematic diagram that illustrates generally an example of a cross-sectional side view of a distal portion 600 of a guidewire 605. In this example, the guidewire 605 can include a solid metal or other core

wire 450 that can taper down in diameter (e.g., from an outer diameter of about 0.028cm (0.011 inches)) at a suitable distance 615 (e.g., about 50 cm) from the distal tip 620, to which the tapered-down distal end of core wire 450 can be attached. In this example, optical fibers 625 can be distributed around the outer circumference of the guidewire core 450, and can be attached to the distal tip 620. In this example, the optical fibers 625 can be at least partially embedded in a binder material (e.g., UV curable acrylate polymer) that bonds the optical fibers 625 to the guidewire core wire 450 or the distal tip 620. The binder material may also contribute to the torsion response of the resulting guidewire assembly 605. In an example, the optical fibers 625 and binder material can be overcoated with a polymer or other coating 630, such as for providing abrasion resistance, optical fiber protection, or friction control, or a combination thereof. At least one metallic or other bulkhead 640 can be provided along the tapered portion of the core wire 450. In an example, the optical fibers 625 and binder 635 can be attached to a proximal side of the bulkhead 640 such as near its circumferential perimeter. A distal side of the bulkhead 640 can be attached, such as near its circumferential perimeter, to a coil winding 610 that can extend further, in the distal direction, to a ball or other distal tip 620 of the guidewire 605. In this example, the composite structure of the distal region 600 of the guidewire 605 can provide, among other things, flexibility and rotational stiffness, such as for allowing the guidewire 605 to be maneuvered to an imaging region of interest such as within a vascular or any other lumen.

**[0043]** FIG. 7 is a schematic diagram that illustrates generally an example of a cross-sectional end view of a proximal portion 700 of guidewire 605, which can include core wire 450, optical fibers 625, binder material 635, and outer coating 630. In this example, but not by way of limitation, the diameter of the core 450 can be about 0.028cm (11/1000 inch), the diameter of the optical fibers 625 can be about 0.00318 cm ((1.25)/1000inch), and the optional outer coating 1030 can be about 0.000635 cm ((25)/1000 inch) thick.

**[0044]** FIG. 8 is a schematic diagram that illustrates generally an example of a cross-sectional end view of the distal portion 600 of the guidewire 605, e.g., adjacent to the distal tip 620. In this example, but not by way of limitation, the diameter of core wire 450 has tapered down to about 0.0038 cm (1.5/1000 inch), circumferentially surrounded by a void 800 of about the same outer diameter (e.g., about 0.028cm (11/1000 inch) as the core wire 450 near the proximal end 700 of the guidewire 605. In this example, the optical fibers 625 can be circumferentially disposed in the binder material 635 around the void 800. Binder material 635 can provide structural support. Optical fibers 625 can be optionally overlaid with the outer coating 630.

#### 4. Examples of Acoustic Transducer Construction

**[0045]** In an example, before one or more acoustic transducers are fabricated, the guidewire 605 can be assembled. FIG. 9 is a cross-sectional end view illustrating an example of a structure of such a guidewire assembly such as at a location of a transducing window 510. An example of such assembling can include placing the tubular sheath 460 on the core wire 450 such as at the locations selected for transducing, inserting the backing 440 into a gap between the core wire 450 and the tubular sheath 460, and binding the optical fibers 625 to the sheath 460 and the distal tip 620 or bulkhead 640. The coating 305, which, in an example, can include the outer coating 630, can then optionally be layered over the optical fibers 625. In another example of such assembling, the backing 440 can be formed to the surface of the core wire 450 such as at the locations selected for transducing, and the tubular sheath 460 can be formed to the exposed surface of the backing, such as by heatshrinking, for example. In an example, the optical fibers 625 can each have a diameter of less than half of the wavelength of the acoustic energy that the acoustic transducers are designed to sense, although the diameter of each of the optical fibers 625 can be larger than this in other examples.

**[0046]** After the guidewire 605 has been assembled, the FBGs can be added to one or more portions of the optical fibers 625, such as within the transducer windows 510. In an example, an FBG can be created using an optical process in which a portion of the optical fiber 625 is exposed to a carefully controlled pattern of ultraviolet (UV) radiation that defines the Bragg grating. Then, a photoacoustic material or other desired overlayer can be deposited or otherwise added in the transducer windows 510 such as over the Bragg grating. Thus, in this example, the FBGs can be advantageously constructed after the optical fibers 625 have been mechanically assembled into the guidewire assembly 605.

**[0047]** An FBG writing laser can be used to expose the desired portion of the optical fiber 625 to a carefully controlled pattern of UV radiation to define the Bragg grating. The FBG writing laser can be operated so as to reduce the amount of birefringence caused by the FBGs. This will reduce the dependence of the FBG sensor 100 on the polarization of the optical sensing signal that is modulated by the received acoustic energy. In an illustrative example, at least one of hydrogen or deuterium can first be optionally infused into the optical fiber core 115. Conditions for diffusion of the gas into the fiber can be 150 atm pressure at room temperature for 1 to 10 days. Then, the optical fiber 625 can be exposed to the writing laser, such as for a time period of between about 30 seconds and about 10 minutes. In this example, the writing laser can have a pulse energy of between about 0.1 millijoules (mJ) and about 10 millijoules and can have a polarization angle that is substantially parallel to the longitudinal axis of the optical fiber core 115.

**[0048]** In an illustrative example, such as in which hydrogen is not infused into the optical fiber core 115, the optical fiber 625 can be exposed to the writing laser such as for a time period of between about 30 seconds and about 10 minutes. In this example, the writing laser can have a pulse energy of between about 0.1 millijoules and about 10 millijoules and a polarization angle that is substantially perpendicular to the longitudinal axis of the optical fiber core 115. In either this example or the above example in which hydrogen or deuterium is first optionally infused into the optical fiber core 115, desired portions of all layers or coverings over the fiber cladding 120 can optionally be removed before the optical fiber 625 is exposed to the writing laser.

**[0049]** In an example, the writing conditions can be controlled so that the FBG sensor 100 is relatively insensitive to the polarization of the output optical signal. This can include, for example, reducing the speed of writing by lowering the intensity of the UV lamp in order to reduce heating biases. In an example, the shift in the center wavelength of the skirt of the FBG sensor 100 as the polarization of the output optical sensing signal is rotated 90 degrees is less than half of the Full Width Half Maximum of the skirt of the FBG sensor 100. In another example, a total birefringence induced on an optical signal with a wavelength of about 1550 nanometers transmitted within the optical fiber 625 is less than  $(3 \times 10^{-6})$ .

#### Additional Notes

**[0050]** In this document, the term "minimally-invasive" refers to techniques that are less invasive than conventional surgery; the term "minimally-invasive" is not intended to be restricted to the least-invasive technique possible.

**[0051]** Although certain of the above examples have been described with respect to intravascular imaging (e.g., for viewing or identifying vulnerable plaque), the present systems, devices, and methods are also applicable to imaging any other body part. For example, the guidewire or other elongated body as discussed above can be inserted into a biopsy needle, laparoscopic device, or any other lumen or cavity such as for performing imaging. Moreover, such imaging need not involve insertion of an elongate body into a lumen, for example, an imaging apparatus can be wrapped around a portion of a region to be imaged.

**[0052]** In an example, the present systems, devices, and methods can be used to process the Doppler shift in acoustic frequency to image or measure blood flow. The operation can be similar to that described above, however, this would increase the length of the transmitted acoustic signal, and can use Doppler signal processing in the image processing portion of the control electronics. The transmitted acoustic signal can be lengthened, in an example, such as by repeatedly pulsing the transmit optical energy at the same rate as the desired acoustic frequency.

**[0053]** The above detailed description includes references to the accompanying drawings, which form a part of the detailed description. The drawings show, by way of illustration, specific embodiments in which the invention can be practiced. These embodiments are also referred to herein as "examples." Such examples can include elements in addition to those shown and described. However, the present inventors also contemplate examples in which only those elements shown and described are provided.

**[0054]** All publications, patents, and patent documents referred to in this document are incorporated by reference herein in their entirety, as though individually incorporated by reference. In the event of inconsistent usages between this document and those documents so incorporated by reference, the usage in the incorporated reference(s) should be considered supplementary to that of this document; for irreconcilable inconsistencies, the usage in this document controls.

**[0055]** In this document, the terms "a" or "an" are used, as is common in patent documents, to include one or more than one, independent of any other instances or usages of "at least one" or "one or more." In this document, the term "or" is used to refer to a nonexclusive or, such that "A or B" includes "A but not B," "B but not A," and "A and B," unless otherwise indicated. In the appended claims, the terms "including" and "in which" are used as the plain-English equivalents of the respective terms "comprising" and "wherein." Also, in the following claims, the terms "including" and "comprising" are open-ended, that is, a system, device, article, or process that includes elements in addition to those listed after such a term in a claim are still deemed to fall within the scope of that claim. Moreover, in the following claims, the terms "first," "second," and "third," etc. are used merely as labels, and are not intended to impose numerical requirements on their objects.

**[0056]** Method examples described herein can be machine or computer-implemented at least in part. Some examples can include a computer-readable medium or machine-readable medium encoded with instructions operable to configure an electronic device to perform methods as described in the above examples. An implementation of such methods can include code, such as microcode, assembly language code, a higher-level language code, or the like. Such code can include computer readable instructions for performing various methods. The code may form portions of computer program products. Further, the code may be tangibly stored on one or more volatile or non-volatile computer-readable media during execution or at other times. These computer-readable media may include, but are not limited to, hard disks, removable magnetic disks, removable optical disks (e.g., compact disks and digital video disks), magnetic cassettes, memory cards or sticks, random access memories (RAMs), read only memories (ROMs), and the like.

**[0057]** The above description is intended to be illustrative, and not restrictive. For example, the above-de-



scribed examples (or one or more aspects thereof) may be used in combination with each other. Other embodiments can be used, such as by one of ordinary skill in the art upon reviewing the above description. The Abstract is provided to comply with 37 C.F.R. §1.72(b), to allow the reader to quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. Also, in the above Detailed Description, various features may be grouped together to streamline the disclosure. This should not be interpreted as intending that an unclaimed disclosed feature is essential to any claim. Rather, inventive subject matter may lie in less than all features of a particular disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment. The scope of the invention should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

## Claims

### 1. An apparatus comprising:

an ultrasound-to-optical transducer, comprising:

an optical fiber (105), including an optical fiber diameter that is less than half of a wavelength of target ultrasound energy to be received by the transducer;

an ultrasound-absorptive backing (440) a Fiber Bragg Grating (FBG) interferometer (100), included in the optical fiber, the FBG configured for receiving the ultrasound energy and capable of modulating an optical sensing signal, in response to the ultrasound energy; and

wherein the ultrasound-absorptive backing is configured for substantially absorbing ultrasound energy that passes beyond the optical fiber to reach the backing such that the FBG interferometer is capable of modulating the optical sensing signal, in response to the ultrasound energy, substantially independent of the polarization angle of the optical sensing signal.

### 2. The apparatus of claim 1, wherein the optical fiber diameter is less than sixty micrometers.

### 3. The apparatus of any one of claims 1 or 2, wherein the backing comprises microballoons containing a gas.

### 4. The apparatus of claim 3, wherein the microballoons

comprise about 30% to about 50% of a volume of the backing.

### 5. The apparatus of any one of claims 1-4, wherein a thickness of the backing is between about 25 micrometers and about 100 micrometers.

### 6. The apparatus of any one of claims 1-5, wherein the transducer is configured such that a peak-to-peak amplitude of an oscillating output optical bias signal modulated by the transducer varies by no more than one decibel when the polarization angle of the optical sensing signal is varied by 90 degrees.

### 7. The apparatus of any one of claims 1-6, wherein a total birefringence induced on an optical signal with a wavelength of about 1550 nanometers transmitted within the optical fiber is less than $(3 \times 10^{-6})$ .

### 8. The apparatus of any one of claims 1-7 comprising:

an elongated intravascular imaging assembly, comprising an external proximal portion comprising an optical signal interface and a distal portion sized and shaped and configured for internal intravascular acoustic imaging, the imaging assembly comprising:

an elongated support, extending substantially from the proximal portion of the imaging assembly to the distal portion of the imaging assembly, the support configured to provide adequate length, rigidity, and flexibility to permit intravascular introduction and steering of a distal portion of the imaging assembly to a location of interest;

the optical fiber, extending longitudinally and affixed along the support substantially from the proximal portion of the imaging assembly substantially to the distal portion of the imaging assembly;

a transducer, located at or near a distal portion of the imaging assembly and configured as at least one of the ultrasound-to-optical transducer or an optical-to-ultrasound transducer; and

the backing, located in a backing region between the transducer and the elongated support, the backing configured to attenuate ultrasound energy that reaches the backing region by at least 90%.

### 9. The apparatus of any one of claims 1-8, wherein the assembly comprises:

a plurality of the optical fibers, extending longitudinally and affixed along the support, the fibers arranged circumferentially about a central lon-

gitudinal axis of the support; and  
a plurality of the transducers, wherein the transducer includes a photoacoustic material located at a peripheral portion of the optical fiber that is away from the backing.

**10. A method comprising:**

fabricating an ultrasound-to-optical transducer, the fabricating comprising:

providing an optical fiber (105) that includes a diameter that is less than half of a wavelength of target ultrasound energy to be received by the transducer;  
creating a Fiber Bragg Grating (FBG) interferometer (100), included in the optical fiber, the FBG configured for receiving the ultrasound energy and capable of modulating an optical sensing signal substantially independent of a polarization of the optical sensing signal;  
associating an ultrasound-absorptive backing (440) with the optical fiber; and  
configuring the backing for substantially absorbing ultrasound energy that passes beyond the optical fiber to reach the backing such that, in use, the FBG interferometer is capable of modulating the optical sensing signal, in response to the ultrasound energy, substantially independent of the polarization angle of the optical sensing signal.

**11. The method of claim 10, wherein associating the backing with the fiber comprises associating the backing comprising microballoons containing a gas with the fiber.**

**12. The method of claim 11, wherein associating the backing comprising microballoons with the fiber comprises providing the backing comprising the microballoons that comprise about 30% to about 50% of the volume of the backing.**

**13. The method of any one of claims 10-12, wherein associating the backing comprising microballoons comprises inserting the backing into a backing region between a central support structure and the optical fiber, wherein both the support structure and the fiber extend longitudinally, the backing region being bounded laterally by a tubular sheath.**

**14. The method of any one of claims 10-12, wherein providing the backing comprises conforming the backing to the external surface of a central support structure, wherein both the support structure and the fiber extend longitudinally.**

**15. The method of any one of claims 10-14, wherein providing the backing further comprises conforming a tubular sheath to a surface of the backing that is away from the support structure.**

**16. A method comprising:**

receiving ultrasound energy with an optical fiber (105), the optical fiber including a diameter that is less than half of a wavelength of the ultrasound energy; and  
using the ultrasound energy to modulate an optical sensing signal in the optical fiber, the modulation being substantially independent of a polarization of the optical sensing signal by using an ultrasound-absorptive backing (440) to substantially attenuate ultrasound energy that passes beyond the optical fiber to reach the backing.

**17. The method of claim 16, wherein using the ultrasound energy to modulate the optical sensing signal, the modulation being substantially independent of the polarization of the optical sensing signal, comprises generating a modulated output optical signal with a peak-to-peak amplitude that varies by no more than one decibel when a polarization angle of the optical sensing signal is varied by 90 degrees.**

**18. The method of any one of claims 16 or 17, comprising using the ultrasound-absorptive backing to attenuate ultrasound energy that passes beyond the optical fiber to reach the backing by at least 90%.**

**19. The method of any one of claim 16-18, comprising forming an image of a region within a living body using information from a modulated output optical.**

**Patentansprüche**

**1. Apparatur, aufweisend:**

einen Ultraschall-zu-Optik-Wandler, aufweisend:

eine optische Faser (105), die einen optischen Faserdurchmesser hat, der kleiner ist als die halbe Wellenlänge der Target-Ultraschallenergie, die durch den Wandler aufzunehmen ist;  
eine Ultraschall absorptive Rückschicht (440);

ein Faser-Bragg-Gitter (FBG) Interferometer (100), das in der optischen Faser aufgenommen ist, wobei das FBG zum Aufnehmen der Ultraschallenergie konfiguriert ist und in Antwort auf die Ultraschallenergie ein optisches Sensorsignal

gnal zu Modulieren im Stande ist; und

wobei die Ultraschall absorptive Rückschicht dazu konfiguriert ist, im Wesentlichen Ultraschallenergie zu absorbieren, die über die optische Faser läuft, um die Rückschicht zu erreichen, derart, dass das FBG-Interferometer zur Modulation des optischen Sensorsignals in Antwort auf die Ultraschallenergie fähig ist, und zwar im Wesentlichen unabhängig von dem Polarisationswinkel des optischen Sensorsignals. 5 10

2. Apparatur nach Anspruch 1, wobei der optische Faserdurchmesser kleiner als 60 Mikrometer ist.
3. Apparatur nach einem der Ansprüche 1 oder 2, wobei die Rückschicht Mikrobällons aufweist, die ein Gas enthalten. 15
4. Apparatur nach Anspruch 3, wobei die Mikrobällons ca. 30% bis ca. 50% eines Volumens der Rückschicht ausmachen. 20
5. Apparatur nach einem der Ansprüche 1 - 4, wobei eine Dicke der Rückschicht zwischen ca. 25 Mikrometern und ca. 100 Mikrometern ist. 25
6. Apparatur nach einem der Ansprüche 1 - 5, wobei der Wandler so konfiguriert ist, dass eine Peak-to-Peak Amplitude eines oszillierenden optisch voreingestellten Ausgangs-Signals, das durch den Wandler moduliert wird, durch nicht mehr als ein Dezibel variiert, wenn der Polarisationswinkel des optischen Sensorsignals durch 90 Grad variiert wird. 30
7. Apparatur nach einem der Ansprüche 1 - 6, wobei eine Gesamtbrechkraft, die auf ein optisches Signal mit einer durch die optische Faser transmittierten Wellenlänge von ca. 1500 Nanometern induziert ist, geringer als  $(3 \times 10^{-6})$  ist. 35 40
8. Apparatur nach einem der Ansprüche 1 - 7, aufweisend:

eine langgestreckte intravaskuläre Bildvorrichtung, aufweisend einen externen Proximalabschnitt, aufweisend ein optisches Signalinterface, sowie einen Distalabschnitt, der in seiner Größe und Form für eine interne intravaskuläre akustische Bildgenerierung ausgestaltet und konfiguriert ist, wobei die Bildvorrichtung aufweist: 45 50

einen langgestreckten Träger, der sich im Wesentlichen von dem proximalen Abschnitt der Bildvorrichtung zu dem distalen Abschnitt der Bildvorrichtung erstreckt, wobei der Träger zum Vorsehen einer adäquaten Länge, Steifheit und Flexibilität konfigu-

riert ist, um eine intravaskuläre Einführung und Steuerung eines distalen Abschnitts der Bildvorrichtung an eine erwünschte Lokation zu ermöglichen;

die optische Faser, die sich längsseite erstreckt und entlang des Trägers im Wesentlichen von dem proximalen Abschnitt der Bildvorrichtung zu im Wesentlichen dem distalen Abschnitt der Bildvorrichtung fixiert ist;

einen Wandler, der am oder nahe des distalen Abschnitts der Bildvorrichtung angeordnet und als mindestens ein Ultraschall-zu-Optik-Wandler oder als ein Optik-zu-Ultraschall-Wandler konfiguriert ist; und die Rückschicht, die in einem Rückschicht-Bereich zwischen dem Wandler und dem langgestreckten Träger angeordnet ist, wobei die Rückschicht konfiguriert ist, um die den Rückschichtbereich erreichende Ultraschall-Energie um mindestens 90 % zu dämpfen.

9. Apparatur nach einem der Ansprüche 1 - 8, wobei die Vorrichtung aufweist:

eine Mehrzahl an optischen Fasern, die sich längsseite erstrecken und entlang des Trägers fixiert sind, wobei die Fasern am Außenumfang um eine zentrale Längsachse des Trägers angeordnet sind; und

eine Mehrzahl von diesen Wandlern, wobei der Wandler ein fotoakustisches Material aufweist, das an einem peripheren Abschnitt der optischen Faser angeordnet ist, das von der Rückschicht entfernt liegt.

10. Verfahren, umfassend:

ein Herrichten eines Ultraschall-zu-Optik-Wandlers, welches Herrichten umfasst:

Vorsehen einer optischen Faser (105), die einen Durchmesser hat, der kleiner ist als eine halbe Wellenlänge der Target-Ultraschallenergie, die von dem Wandler aufzunehmen ist;

Schaffen eines Faser-Bragg-Gitter (FBG) Interferometers (100), der in der optischen Faser enthalten ist, wobei das FBG konfiguriert ist, die Ultraschallenergie aufzunehmen und fähig ist, ein optisches Sensorsignal zu modulieren, das im Wesentlichen unabhängig von einer Polarisation des optischen Sensorsignals ist;

Verbinden einer Ultraschall absorptiven Rückschicht (440) mit der optischen Faser; und

- Konfigurieren der Rückschicht, um im Wesentlichen Ultraschallenergie zu absorbieren, die über die optische Faser läuft, um die Rückschicht zu erreichen, derart, dass während der Verwendung das FBG-Interferometer in Antwort auf die Ultraschallenergie das optische Sensorsignal zu modulieren im Stande ist, und zwar im Wesentlichen unabhängig von Polarisationswinkel des optischen Sensorsignals.
11. Verfahren nach Anspruch 10, wobei das Verbinden der Rückschicht mit der Faser ein Verbinden der Rückschicht mit der Faser umfasst, die Mikrobällons enthält, die ein Gas aufweisen.
12. Verfahren nach Anspruch 11, wobei das Verbinden der die Mikrobällons aufweisenden Rückschicht mit der Faser das Schaffen einer Rückschicht umfasst, die Mikrobällons aufweisen, die ca. 30 % - ca. 50% des Volumens der Rückschicht ausmachen.
13. Verfahren nach einem der Ansprüche 10 - 12, wobei das Verbinden der die Mikrobällons aufweisenden Rückschicht das Einsetzen der Rückschicht in einen Rückschichtbereich zwischen einer zentralen Trägerstruktur und der optischen Faser umfasst, wobei sowohl die Trägerstruktur als auch die Faser sich längsseits erstrecken und der Rückschichtbereich seitlich durch einen rohrförmigen Mantel gebondet ist.
14. Verfahren nach einem der Ansprüche 10 - 12, wobei das Vorsehen der Rückschicht ein Bilden der Rückschicht an der externen Oberfläche einer zentralen Trägerstruktur beinhaltet, wobei sich sowohl die Trägerstruktur als auch die Faser längsseits erstrecken.
15. Verfahren nach einem der Ansprüche 10 - 14, wobei das Vorsehen der Rückschicht ferner ein Bilden eines rohrförmigen Mantels an einer Oberfläche der Rückschicht umfasst, die von der Trägerstruktur entfernt liegt.
16. Verfahren, aufweisend:
- Aufnehmen von Ultraschallenergie mit einer optischen Faser (105), wobei die optische Faser einen Durchmesser hat, die geringer ist als eine halbe Wellenlänge der Ultraschallenergie; und Verwenden der Ultraschallenergie zur Modulation eines optischen Sensorsignals in der optischen Faser, wobei die Modulation im Wesentlichen unabhängig ist von einer Polarisierung des optischen Sensorsignals, indem eine Ultraschall absorptive Rückschicht (440) verwendet wird, um Ultraschallenergie, die über die optische Faser läuft und die Rückschicht erreicht,
- im Wesentlichen zu dämpfen.
17. Verfahren nach Anspruch 16, wobei das Verwenden der Ultraschallenergie zur Modulation des optischen Sensorsignals, welche Modulation im Wesentlichen unabhängig von der Polarisierung des optischen Sensorsignals ist, das Generieren eines modulierten Ausgangs-Optik-Signals mit einer Peak-zu-Peak Amplitude umfasst, die nicht mehr als ein Dezibel variiert, wenn ein Polarisationswinkel des optischen Sensorsignals durch 90 Grad variiert wird.
18. Verfahren nach einem der Ansprüche 16 oder 17, das ein Verwenden der Ultraschall absorptiven Rückschicht zur Dämpfung von mindestens 90% der Ultraschallenergie umfasst, die über die optische Faser läuft und die Rückschicht erreicht.
19. Verfahren nach einem der Ansprüche 16 - 18, ferner umfassend ein Bilden eines Bildes eines Bereiches innerhalb eines Lebewesens unter Verwendung der Information, die aus einem modulierten optischen Ausgang gewonnen wird.
- Revendications**
1. Appareil comprenant :
- un transducteur ultrason-optique, comprenant :
- une fibre optique (105), ayant un diamètre de fibre optique qui est inférieur à la moitié d'une longueur d'onde d'énergie ultrasonore cible devant être reçue par le transducteur ;
- un support absorbant les ultrasons (440)
- un interféromètre à fibres optiques à réseau de Bragg (FBG - Fiber Bragg Grating) (100), inclus dans la fibre optique, les FBG étant configurées pour recevoir l'énergie ultrasonore et étant capables de moduler un signal de détection optique, en réponse à l'énergie ultrasonore ; et
- dans lequel le support absorbant les ultrasons est configuré pour sensiblement absorber l'énergie ultrasonore qui passe au-delà de la fibre optique pour atteindre le support de telle sorte que l'interféromètre FBG est capable de moduler le signal de détection optique, en réponse à l'énergie ultrasonore, sensiblement indépendamment de l'angle de polarisation du signal de détection optique.
2. Appareil selon la revendication 1, dans lequel le diamètre de la fibre optique est inférieur à soixante micromètres.

3. Appareil selon l'une quelconque des revendications 1 ou 2, dans lequel le support comprend des microballons contenant un gaz.
  4. Appareil selon la revendication 3, dans lequel les microballons constituent environ 30 % à environ 50 % d'un volume du support.
  5. Appareil selon l'une quelconque des revendications 1 à 4, dans lequel une épaisseur du support est comprise entre environ 25 micromètres et environ 100 micromètres.
  6. Appareil selon l'une quelconque des revendications 1 à 5, dans lequel le transducteur est configuré de telle sorte qu'une amplitude crête-à-crête d'un signal de polarisation optique de sortie oscillant modulée par le transducteur ne varie pas de plus d'un décibel lorsque l'angle de polarisation du signal de détection optique est varié de 90 degrés.
  7. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel une biréfringence totale induite sur un signal optique avec une longueur d'onde d'environ 1 550 nanomètres transmis à l'intérieur de la fibre optique est inférieure à  $(3 \times 10^{-6})$ .
  8. Appareil selon l'une quelconque des revendications 1 à 7 comprenant :
    - un ensemble d'imagerie intravasculaire allongé, comprenant une partie proximale externe comprenant une interface de signal optique et une partie distale dimensionnée et façonnée et configurée pour l'imagerie acoustique intravasculaire interne, l'ensemble d'imagerie comprenant:
      - un élément d'appui allongé, s'étendant sensiblement de la partie proximale de l'ensemble d'imagerie vers la partie distale de l'ensemble d'imagerie, l'élément d'appui étant configuré pour conférer une longueur, une rigidité et une flexibilité adéquates pour permettre l'introduction et le guidage intravasculaires d'une partie distale de l'ensemble d'imagerie vers un emplacement d'intérêt ; la fibre optique, s'étendant longitudinalement et sensiblement fixée le long du support à partir de la partie proximale de l'ensemble d'imagerie sensiblement jusqu'à la partie distale de l'ensemble d'imagerie ;
      - un transducteur, situé au niveau d'une partie distale de l'ensemble d'imagerie ou près de celle-ci et configuré en tant qu'au moins l'un parmi le transducteur ultrason-optique et un transducteur optique-ultrason ; et le support, situé dans une région de support
- entre le transducteur et l'élément d'appui allongé, le support étant configuré pour atténuer l'énergie ultrasonore qui atteint la région de support à hauteur d'au moins 90 %.
9. Appareil selon l'une quelconque des revendications 1-8, dans lequel l'ensemble comprend :
    - une pluralité des fibres optiques, s'étendant longitudinalement et fixées le long de l'élément d'appui, les fibres étant disposées circonférentiellement autour d'un axe longitudinal central de l'élément d'appui ; et
    - une pluralité des transducteurs, le transducteur incluant un matériau photoacoustique situé sur une partie périphérique de la fibre optique qui est éloignée du support.
  10. Procédé comprenant :
    - la fabrication d'un transducteur ultrason-optique, la fabrication consistant à :
      - fournir une fibre optique (105) ayant un diamètre qui est inférieur à la moitié d'une longueur d'onde d'énergie ultrasonore cible devant être reçue par le transducteur ;
      - créer un interféromètre à fibres optiques à réseau de Bragg (FBG) (100), inclus dans la fibre optique, les FBG étant configurées pour recevoir l'énergie ultrasonore et étant capables de moduler un signal de détection optique sensiblement indépendamment d'une polarisation du signal de détection optique ;
      - associer un support absorbant les ultrasons (440) à la fibre optique ; et
      - configurer le support pour absorber sensiblement l'énergie ultrasonore qui passe au-delà de la fibre optique pour atteindre le support de telle sorte que, en cours d'utilisation, l'interféromètre FBG est capable de moduler le signal de détection optique, en réponse à l'énergie ultrasonore, sensiblement indépendamment de l'angle de polarisation du signal de détection optique.
  11. Procédé selon la revendication 10, dans lequel l'association du support avec la fibre comprend l'association du support comprenant les microballons contenant un gaz avec la fibre.
  12. Procédé selon la revendication 11, dans lequel l'association du support comprenant les microballons avec la fibre consiste à fournir le support comprenant les microballons qui constituent environ 30 % à environ 50 % du volume du support.

13. Procédé selon l'une quelconque des revendications 10-12, dans lequel l'association du support comprenant les microballons consiste à insérer le support dans une région de support entre une structure d'appui centrale et la fibre optique, dans lequel tant la structure d'appui que la fibre s'étendent longitudinalement, la région de support étant limitée latéralement par une gaine tubulaire. 5
14. Procédé selon l'une quelconque des revendications 10-12, dans lequel la fourniture du support consiste à faire concorder le support avec la surface externe d'une structure d'appui centrale, dans lequel tant la structure d'appui que la fibre s'étendent longitudinalement. 10 15
15. Procédé selon l'une quelconque des revendications 10-14, dans lequel la fourniture du support consiste en outre à faire concorder une gaine tubulaire avec une surface du support qui est éloignée de la structure d'appui. 20
16. Procédé consistant à :
- recevoir une énergie ultrasonore ayant une fibre optique (105), la fibre optique comprenant un diamètre qui est inférieur à la moitié d'une longueur d'onde de l'énergie ultrasonore ; et 25
- utiliser l'énergie ultrasonore pour moduler un signal de détection optique dans la fibre optique, la modulation étant sensiblement indépendante d'une polarisation du signal de détection optique par l'utilisation d'un support absorbant les ultrasons (440) pour sensiblement atténuer l'énergie ultrasonore qui passe au-delà de la fibre optique pour atteindre le support. 30 35
17. Procédé selon la revendication 16, dans lequel l'utilisation de l'énergie ultrasonore pour moduler le signal de détection optique, la modulation étant sensiblement indépendante de la polarisation du signal de détection optique, consiste à générer un signal optique de sortie modulé avec une amplitude crête-à-crête qui ne varie pas de plus d'un décibel lorsqu'un angle de polarisation du signal de détection optique est varié de 90 degrés. 40 45
18. Procédé selon l'une quelconque des revendications 16 ou 17, comprenant l'utilisation du support absorbant les ultrasons pour atténuer l'énergie ultrasonore qui passe au-delà de la fibre optique pour atteindre le support à hauteur d'au moins 90 %. 50
19. Procédé selon l'une quelconque des revendications 16-18, comprenant la formation d'une image d'une région à l'intérieur d'un corps vivant au moyen d'informations provenant d'une optique de sortie modulée. 55

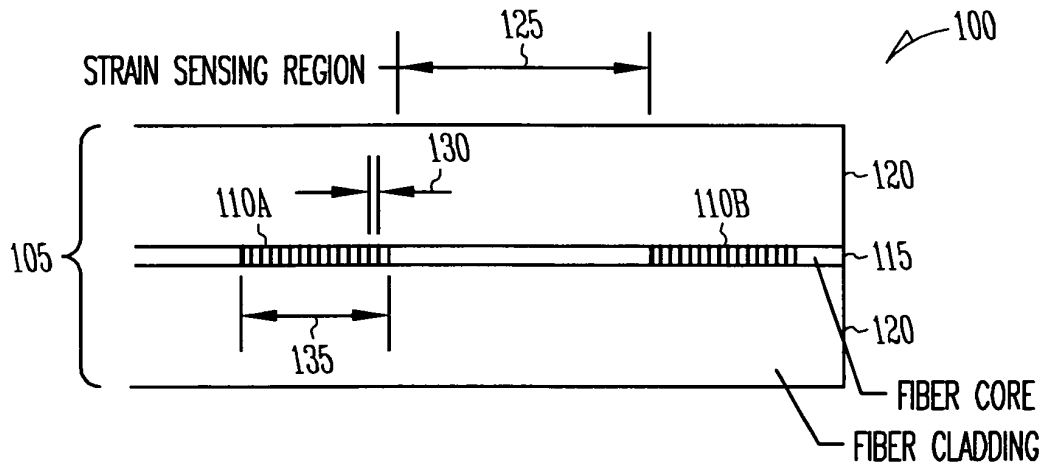


FIG. 1

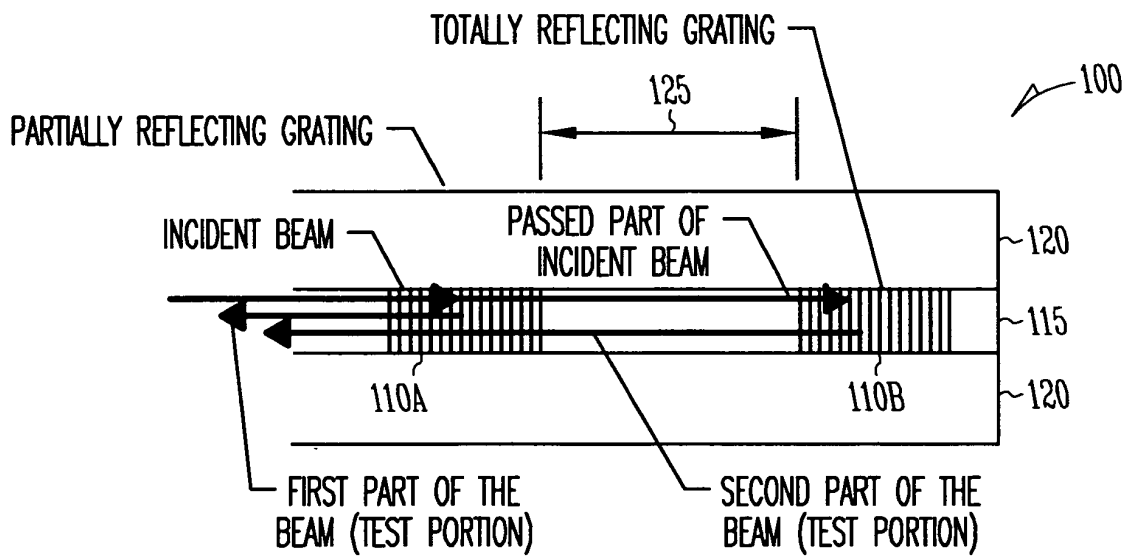


FIG. 2

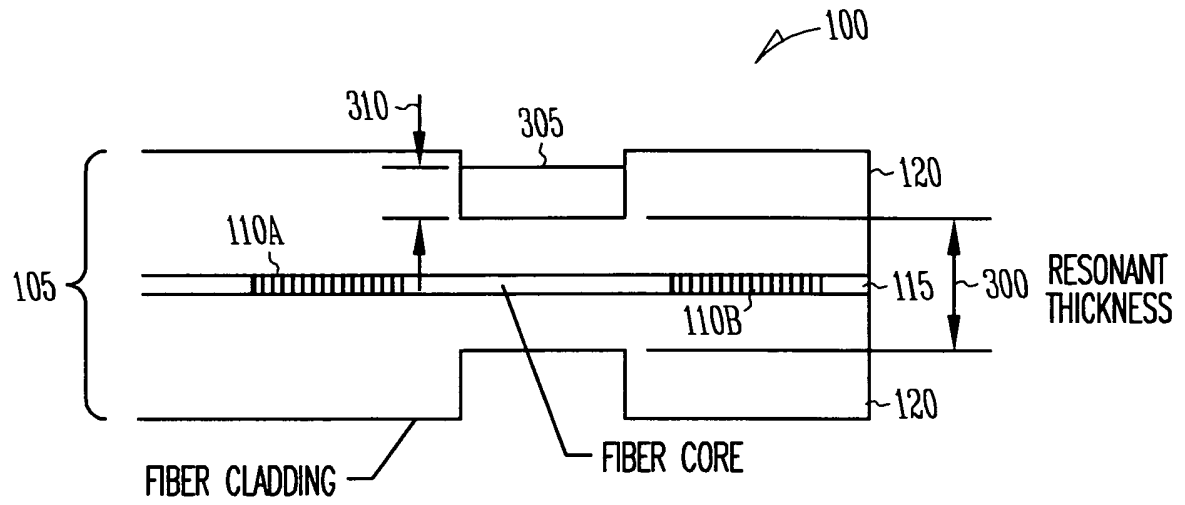


FIG. 3



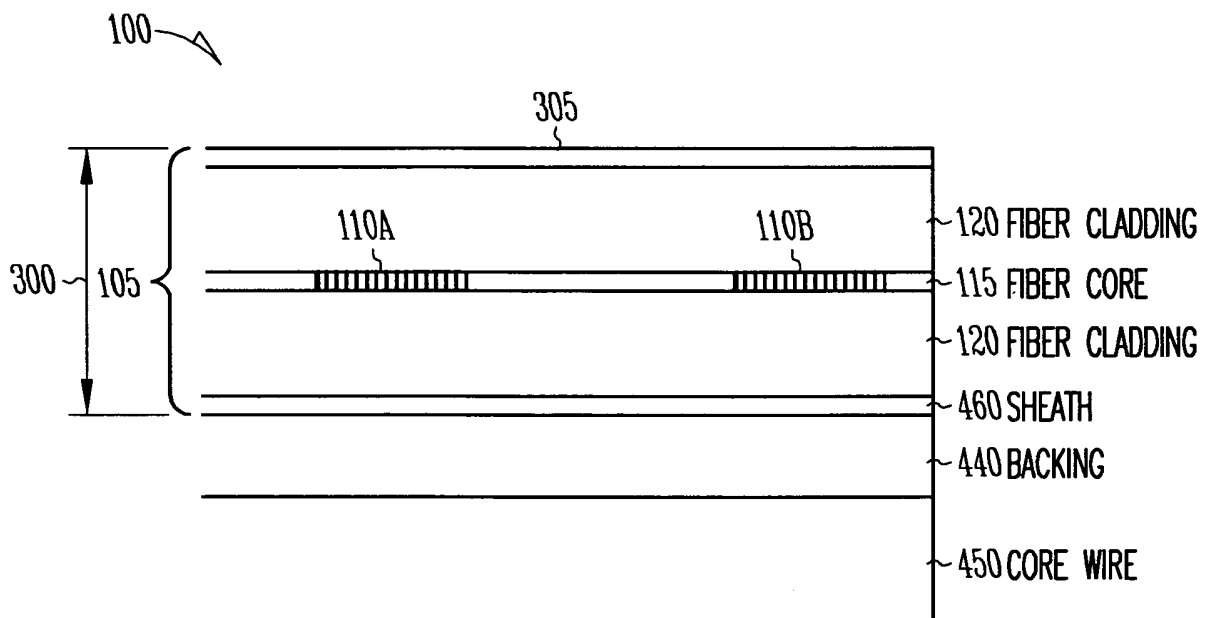


FIG. 4




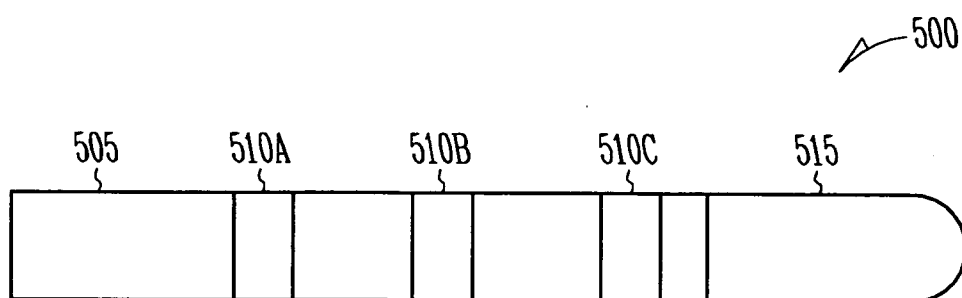


**FIG. 5**

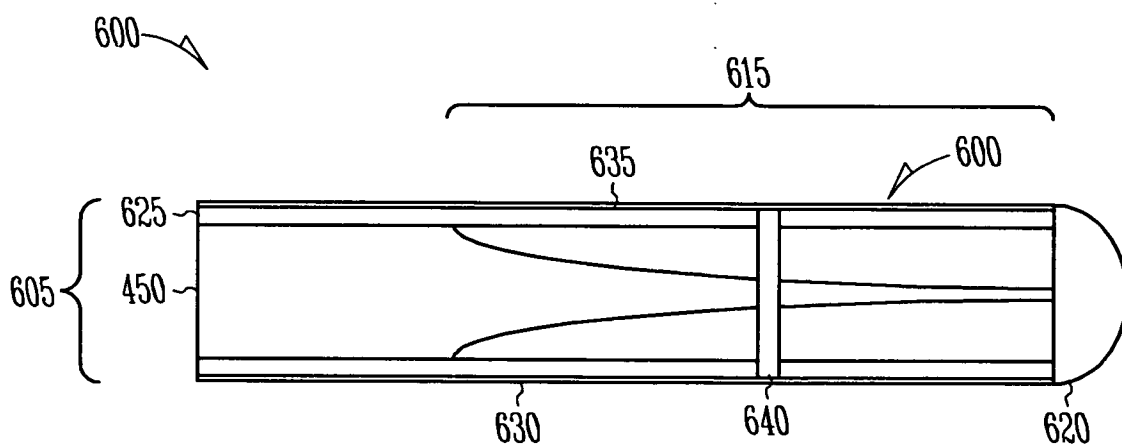


**FIG. 6**

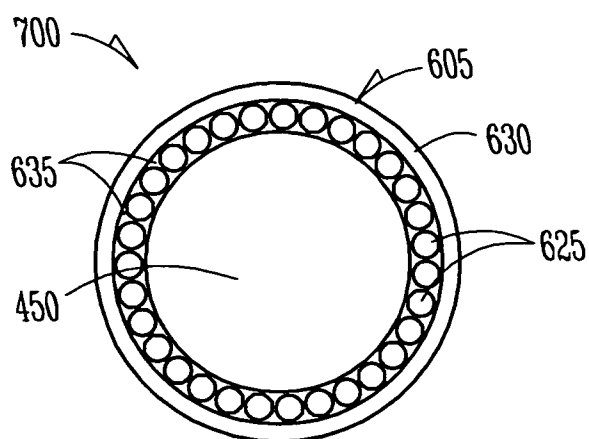

**FIG. 7**

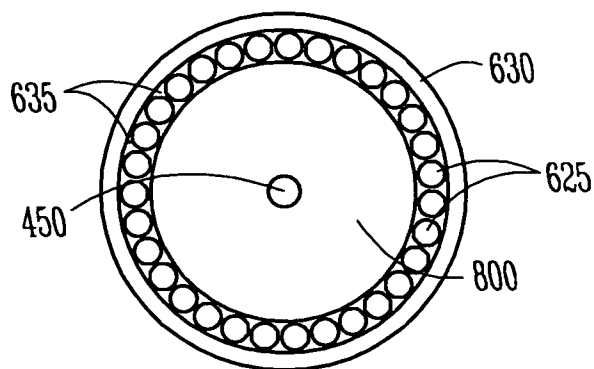

**FIG. 8**

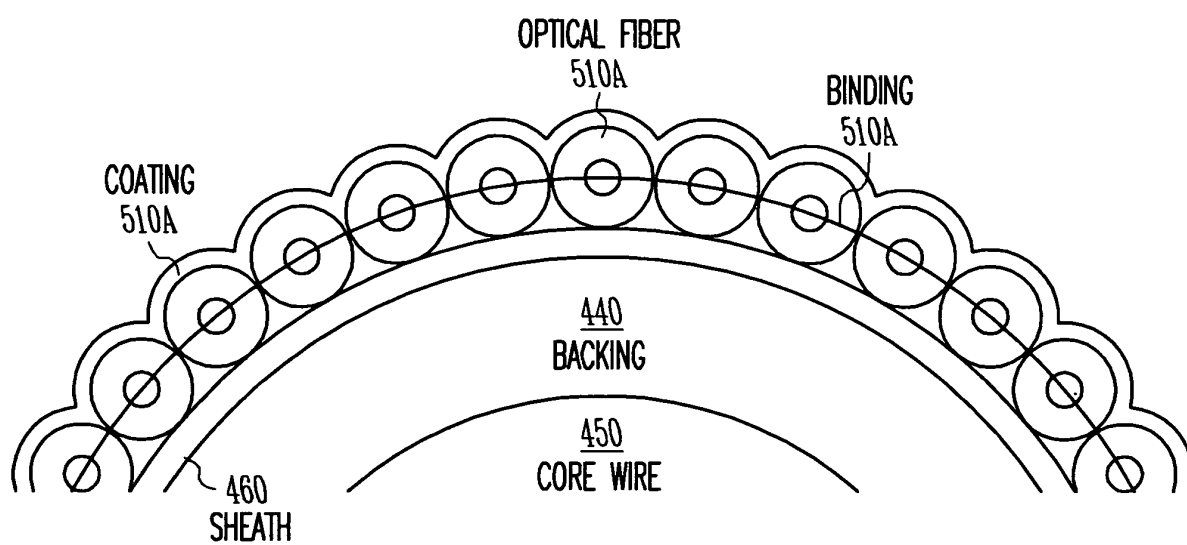

*FIG. 9*

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 7245789 B, Bates [0001]

专利名称(译)	光学超声接收器		
公开(公告)号	<a href="#">EP2356412B1</a>	公开(公告)日	2012-08-15
申请号	EP2009793238	申请日	2009-10-01
[标]申请(专利权)人(译)	血管影像CORP		
申请(专利权)人(译)	血管成像公司		
当前申请(专利权)人(译)	血管成像公司		
[标]发明人	EBERLE MICHAEL J TASKER DIANA MARGARET ROURKE HOWARD NEIL		
发明人	EBERLE, MICHAEL J. TASKER, DIANA MARGARET ROURKE, HOWARD NEIL		
IPC分类号	G01H9/00 A61B8/12		
CPC分类号	A61B5/0095 A61B1/00082 A61B1/07 A61B5/0097 A61B5/6851 A61B8/12 A61B8/4483 G01H9/004 Y10T29/49005		
优先权	61/102216 2008-10-02 US		
其他公开文献	EP2356412A1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

成像导丝可包括沿着导丝传送光的一个或多个光纤。在其远端处或附近，一个或多个闪耀或其他光纤布拉格光栅（FBG）可以将光引导到提供超声成像能量的光声换能器材料。FBG传感器可以检测返回的超声波。响应信号可以光学地传递到导丝的近端，并且被处理以便产生2D或3D图像。在一个示例中，导丝外径可以足够小，使得血管内导管可以在导丝上通过。为了使导丝的尺寸最小化，可以使用对光学传感信号的偏振相对不敏感的超声 - 声换能器。可以制造超声 - 光学换能器，使得它对光学传感信号的偏振相对不敏感。

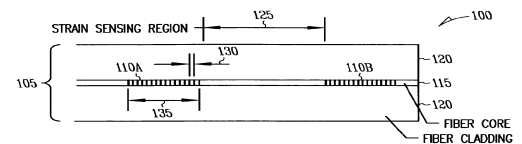


FIG. 1

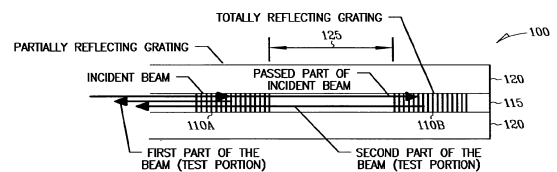


FIG. 2