



(11) **EP 1 362 223 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
21.05.2008 Bulletin 2008/21

(21) Application number: **01272795.4**

(22) Date of filing: **31.12.2001**

(51) Int Cl.:
A61N 7/02 (2006.01)

(86) International application number:
PCT/IL2001/001220

(87) International publication number:
WO 2002/054018 (11.07.2002 Gazette 2002/28)

(54) **NON-INVASIVE ULTRASONIC BODY CONTOURING**

EINGRIFFSFREIE ULTRASCHALL KÖRPERKONTURIERUNG

SYSTEME NON INVASIF PAR

Description

FIELD OF THE INVENTION

[0001] The present invention relates to lipolysis generally and more particularly to ultrasonic lipolysis.

BACKGROUND OF THE INVENTION

[0002] The following US patents are believed to represent the current state of the art: 4,986,275, 5,143,063, 5,143,073, 5,209,221, 5,301,660, 5,431,621, 5,507,790, 5,526,815, 5,884,631, 6,039,048, 6,071,239, 6,113,558, 6,206,873.

[0003] US 5,507,790 describes accelerating lipolysis to reduce fat cell size without killing or eliminating the fat cells. In an embodiment of the invention, acceleration is provided by focusing radiant energy on the adipose cells to raise their temperature to between 40.0°C to 41.5°C. The radiant energy focused on the cells is maintained to increase cell lipolysis rate sufficiently to cause release of free fatty acids, thereby reducing the volume of the cells.

[0004] US Patent 6,071,239 to Cribbs et al describes non-invasively destroying fat cells in a living patient by applying to a fat layer of the patient high intensity focused ultrasound array. A novel phasing apparatus for producing a widely variable set of focal zone patterns for lipolytic therapy and other purposes is disclosed.

[

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0018] Reference is now made to Fig. 1, which is a simplified pictorial illustration of the general structure and operation of ultrasonic lipolysis apparatus constructed and operative in accordance with a preferred embodiment of the present invention. As seen in Fig. 1, an ultrasonic energy generator and director, such as an ultrasonic transducer 10, disposed outside a body, generates ultrasonic energy which, by suitable placement of the transducer 10 relative to the body, is directed to a target volume 12 inside the body and is operative to selectively generally lyse adipose tissue and generally not lyse non-adipose tissue in the target volume.

[0019] A preferred embodiment of ultrasonic energy generator and director useful in the present invention comprises an ultrasonic therapeutic transducer 13 including a curved phased array 14 of piezoelectric elements 15, typically defining a portion of a sphere or of a cylinder, and having conductive coatings 16 on opposite surfaces thereof. The piezoelectric elements 15 may be of any suitable configuration, shape and distribution. An intermediate element 18, formed of a material, such as polyurethane, which has acoustic impedance similar to that of soft mammalian tissue, generally fills the curvature defined by phased array 14 and defines a contact surface 20 for engagement with the body, typically via a suitable coupling gel (not shown). Contact surface 20 may be planar, but need not be.

[0020] Suitably modulated AC electrical power is supplied by conductors 22 to conductive coatings 16 to cause the piezoelectric elements 15 to provide a desired focused acoustic energy output.

[0021] In accordance with a preferred embodiment of the present invention an imaging ultrasonic transducer subassembly 23 is incorporated within transducer 10 and typically comprises a piezoelectric element 24 having conductive surfaces 26 associated with opposite surfaces thereof. Suit

also bears a visible marker 56 which is also captured by camera 46 and displayed on display 48.

[0030] Markers 54 and 56 are typically processed by computer 44 and may be displayed on display 48 as respective computed marker representations 58 and 60 on display 48.

[0031] Fig. 1 illustrates the transducer 10 being positioned on the body over a location within the region containing adipose tissue. Blocks designated by reference numerals 62 and 64 show typical portions of a region containing adipose tissue, respectively before and after lipolysis in accordance with a preferred embodiment of the invention. It is seen from a comparison of blocks 62 and 64 that, in accordance with a preferred embodiment of the present invention, within the region containing adipose tissue, the adipose tissue, designated by reference numeral 66, is lysed, while non-adipose tissue, such as connective tissue, designated by reference numeral 68, is not lysed.

[0032] Reference is now Fig. 2, which is a simplified block diagram illustration of a preferred power source and modulator assembly 40 (Fig. 1), showing a pattern of variation of ultrasonic pressure over time in accordance with a preferred embodiment of the present invention. As seen in Fig. 2, the power source and modulator assembly 40 preferably comprises a signal generator 100 which provides a time varying signal which is modulated so as to have a series of relatively high amplitude portions 102 separated in time by a series of typically relatively low amplitude portions 104. Each relatively high amplitude portion 102 preferably corresponds to a cavitation period and preferably has a decreasing amplitude over time.

[0033] Preferably the relationship between the time durations of portions 102 and portions 104 is such as to provide a duty cycle between 1:5 and 1:30 and preferably between 1:

cordance with a preferred embodiment of the present invention, indication 212 may also provide a visually sensible indication of cavitation within the target volume 12.

[0046] Turning to Fig. 3B, it is seen that during abnormal operation, display 48 provides pre-programmed warning messages 214.

[0047] Typical warning messages may include "BAD ACOUSTIC CONTACT", "TEMPERATURE TOO HIGH". The "TEMPERATURE TOO HIGH" message typically relates to the skin tissue, although it may alternatively or additionally relate to other tissue inside or outside of the target volume or in transducer 10 (Fig. 1).

[0048] Reference is now made to Fig. 4, which illustrates an ultrasonic lipolysis system constructed and operative in accordance with a preferred embodiment of the present invention. As described hereinabove with reference to Fig. 1 and as seen in Fig. 4, the ultrasonic lipolysis system comprises a lipolysis control computer 44, which outputs to a display 48. Lipolysis control computer 44 preferably receives inputs from video camera 46 (Fig. 1) and from a temperature measurement unit 300, which receives temperature threshold settings as well as inputs from skin temperature sensor 34 (Fig. 1) and transducer temperature sensor 36 (Fig. 1). Temperature measurement unit 300 preferably compares the outputs of both sensors 34 and 36 with appropriate threshold settings and provides an indication to lipolysis control computer 44 of exceedance of either threshold.

[0049] Lipolysis control computer 44 also preferably receives an input from an acoustic contact monitoring unit 302, which in turn preferably receives an input from a transducer electrical properties measurement unit 304. Transducer electrical properties measurement unit 304 preferably monitors the output of power source and

[0061] Turning additionally to Fig. 5C, it is seen that the following functionalities take place:

[0062] Transducer electrical properties measurement unit 304 provides an output to acoustic contact monitoring unit 302, which determines whether sufficient acoustic contact with the patient is present, preferably by analyzing the current and voltage at therapeutic transducer 13.

[0063] Transducer electrical properties measurement unit 304 provides an output to power meter 306, which computes the average electrical power received by the therapeutic transducer 13. If the average electrical power received by the therapeutic transducer 13 exceeds a predetermined threshold, operation of the power source and modulator assembly 40 may be automatically terminated.

[0064] Skin temperature sensor 34 measures the current temperature of the skin at transducer 10 and supplies it to temperature measurement unit 300, which compares the skin temperature to the threshold temperature. Similarly, transducer temperature sensor 36 measures the current temperature at transducer 10 and supplies it to temperature measurement unit 300, which compares the transducer temperature to the threshold temperature. The outputs of temperature measurement unit 300 are supplied to lipolysis control computer 44.

[0065] The ultr

of claims 1 to 3 and also comprising a sensor (308) sensing of cavitation at said target volume.

6. Apparatus according to any of claims 1 to 5 and wherein said ultrasonic energy has a frequency in a range of 100 KHz-500 KHz.
7. Apparatus according to any of claims 1-6 wherein said modulator provides between 2 and 1000 sequential cycles at an amplitude above a cavitation threshold.
8. Apparatus for lysing adipose tissue according to any preceding claim and also comprising computerized tracking functionality (44) providing computerized tracking of said target volume notwithstanding movement of said body.
9. Apparatus for lysing adipose tissue according to claim 8 and wherein said computerized tracking functionality is operative to sense changes in the position of markings (50) on said body and to employ sensed changes for tracking the position of said target volume in said body.

Patentansprüche

1. Vorrichtung zum Lysieren von Fettgewebe, die Folgendes umfasst:


eine Quelle (10, 13) außerhalb eines Körpers, die Ultraschallenergie erzeugt;
und Folgendes umfasst:


einen Modulator (40), der die Ultraschallenergie so moduliert, dass sich ein Arbeitszyklus zwischen 1:5 und 1:30 ergibt,
einen Ultraschallenergielenker (14), der die genannte modulierte Ul


rection de ladite énergie ultrasonique modulée au niveau dudit volume cible (12).


3. Appareil pour lyser du tissu adipeux selon la revendication 1 ou 2 et dans lequel ladite sonde cannelée fait varier le foyer d'au moins un transducteur ultrasonique afin de diriger ladite énergie ultrasonique modulée au niveau dudit volume cible. 5
4. Appareil pour lyser du tissu adipeux selon l'une quelconque des revendications 1 à 3 et comprenant également un capteur (302) détectant de l'énergie ultrasonique s'accouplant à une surface externe dudit corps adjacent audit volume cible. 10
5. Appareil pour lyser du tissu adipeux selon l'une quelconque des revendications 1 à 3 et comprenant également un capteur (308) détectant la cavitation acoustique au niveau dudit volume cible. 15
6. Appareil selon l'une quelconque des revendications 1 à 5 et dans lequel ladite énergie ultrasonique possède une fréquence dans la plage de 100 KHz à 500 KHz. 20
7. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel ledit modulateur fournit entre 2 et 1000 cycles séquentiels à une amplitude au-dessus d'un seuil de cavitation acoustique. 25
8. Appareil pour lyser du tissu adipeux selon l'une quelconque des revendications précédentes et comprenant également une fonctionnalité de traçage informatisé (44) fournissant le traçage informatisé dudit volume cible nonobstant le mouvement dudit corps. 30
9. Appareil pour lyser du tissu adipeux selon la revendication 8 et dans lequel ladite fonctionnalité de traçage informatisé est opérationnelle pour détecter des changements de la position de marques (50) sur ledit corps et pour employer les changements détectés pour tracer la position dudit volume cible dans ledit corps. 35

45

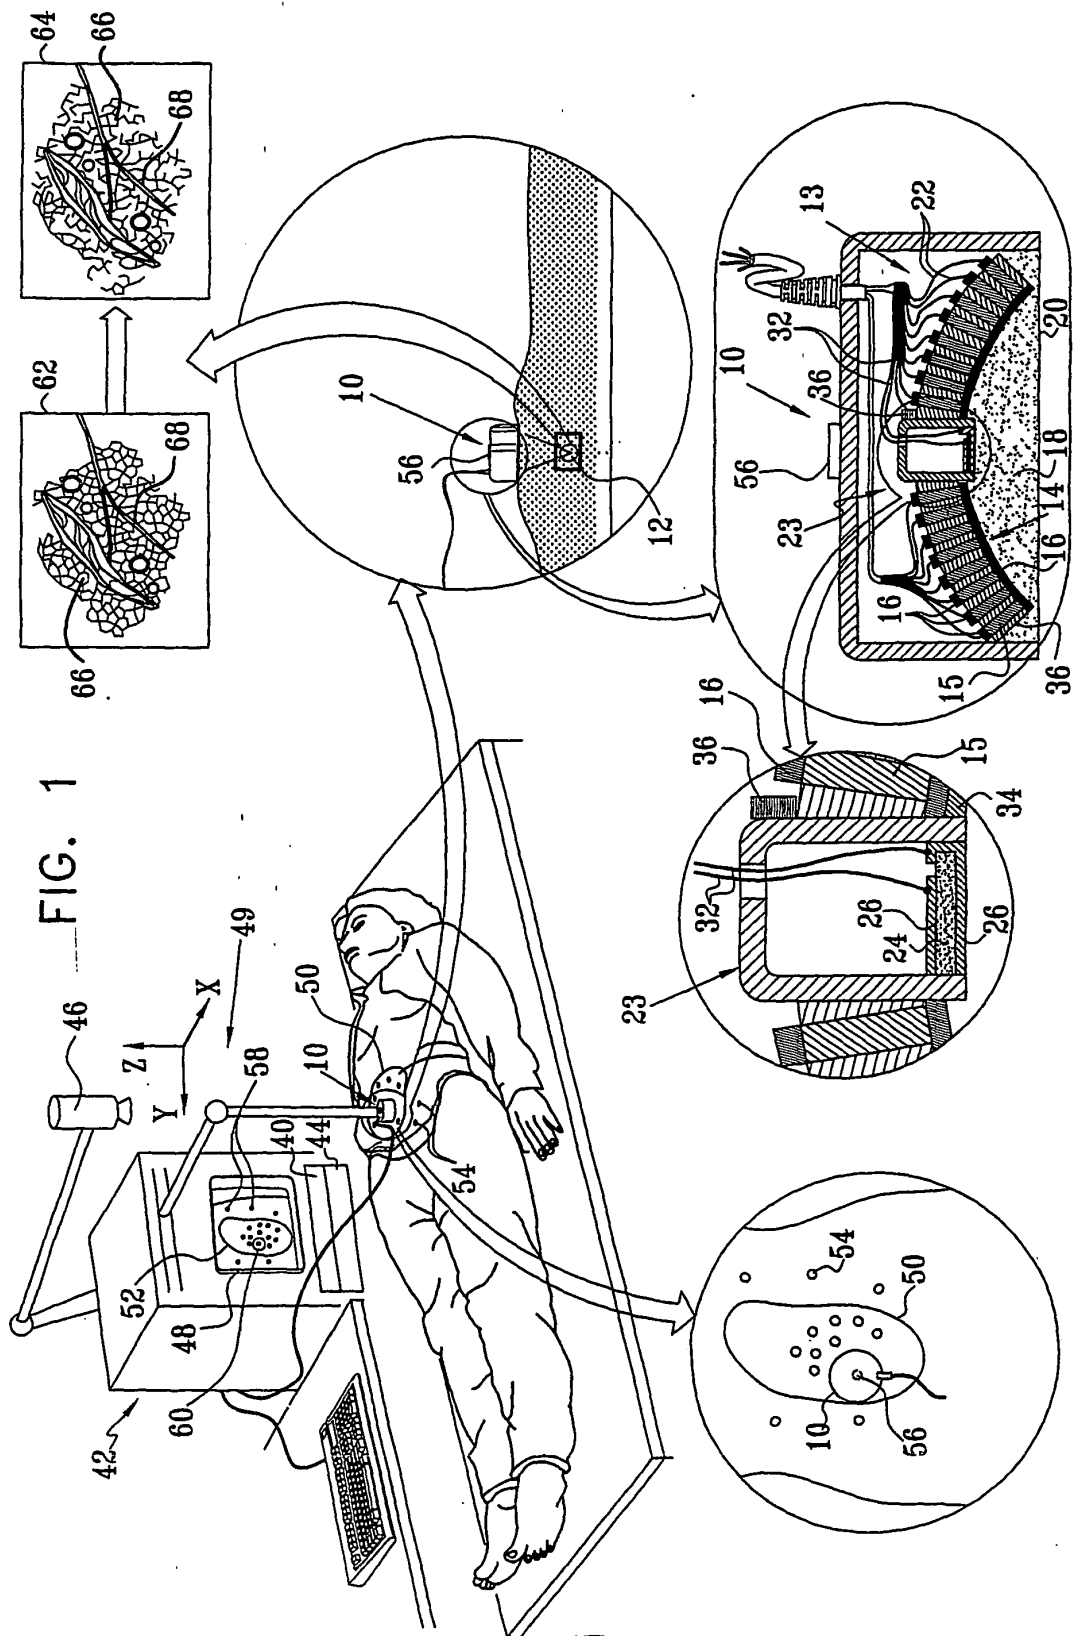

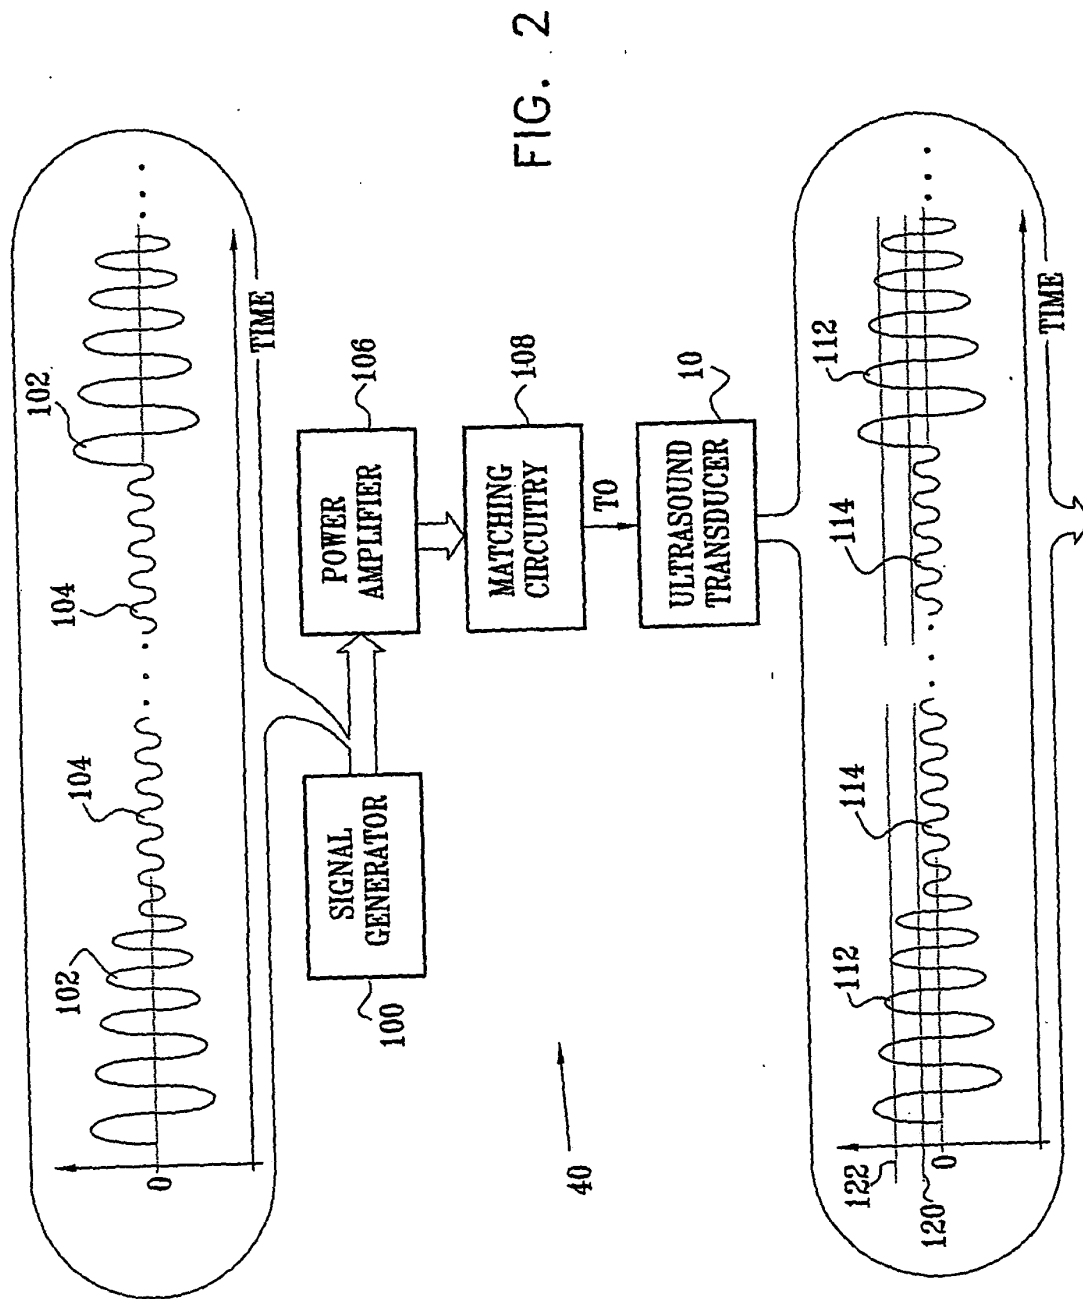

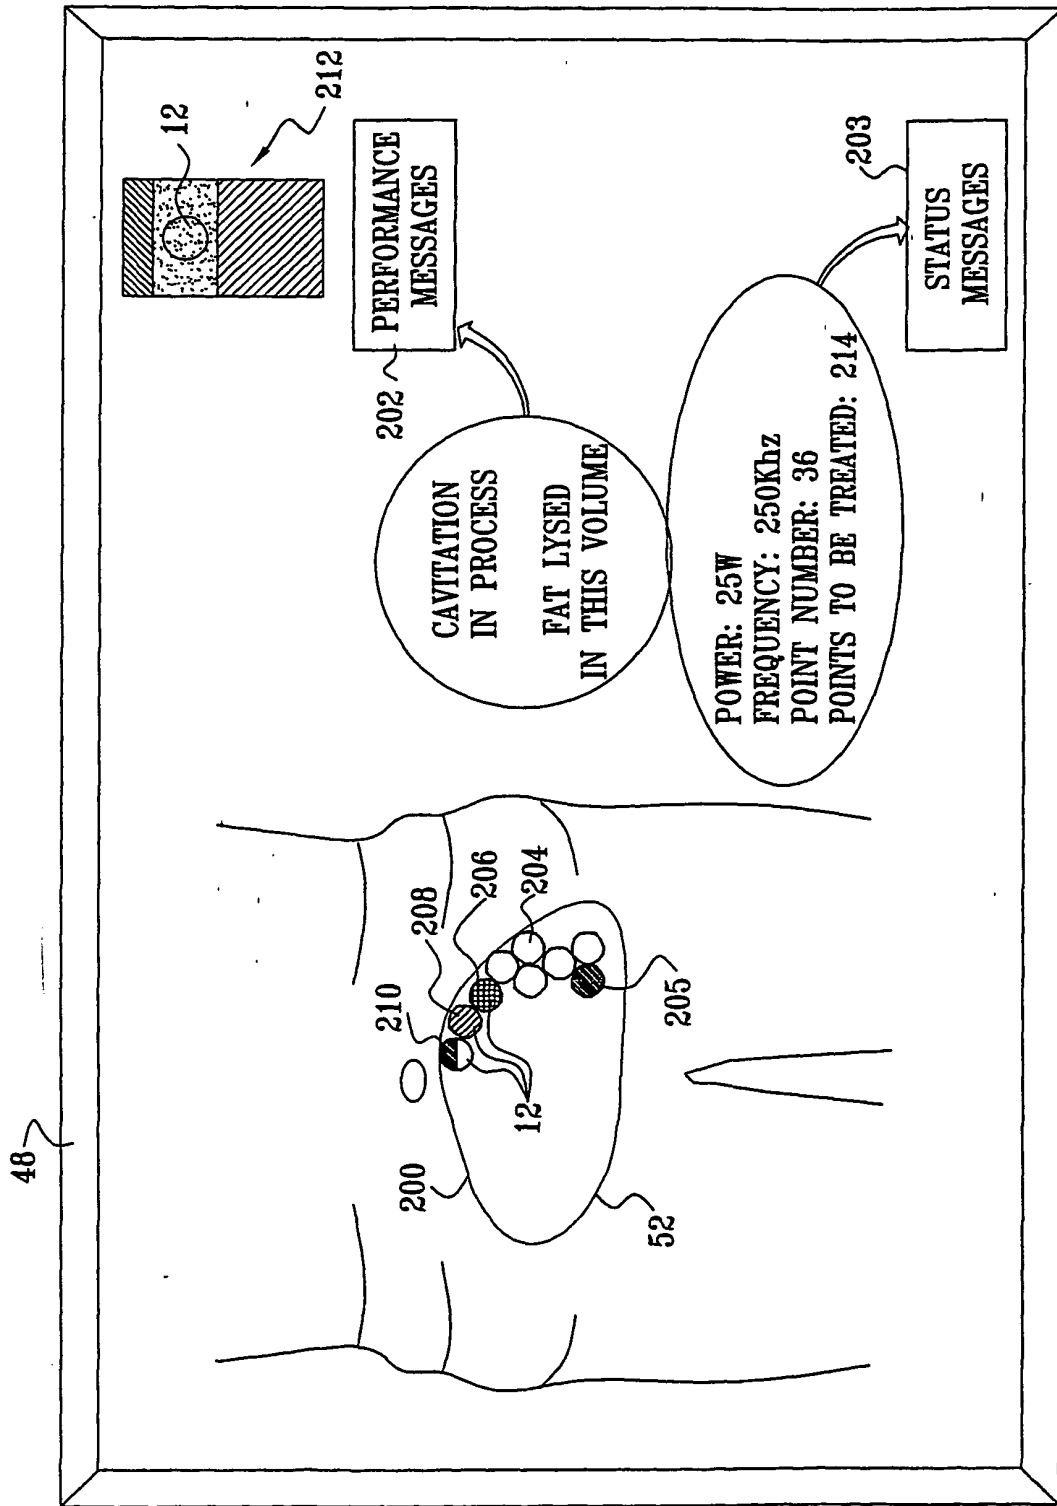

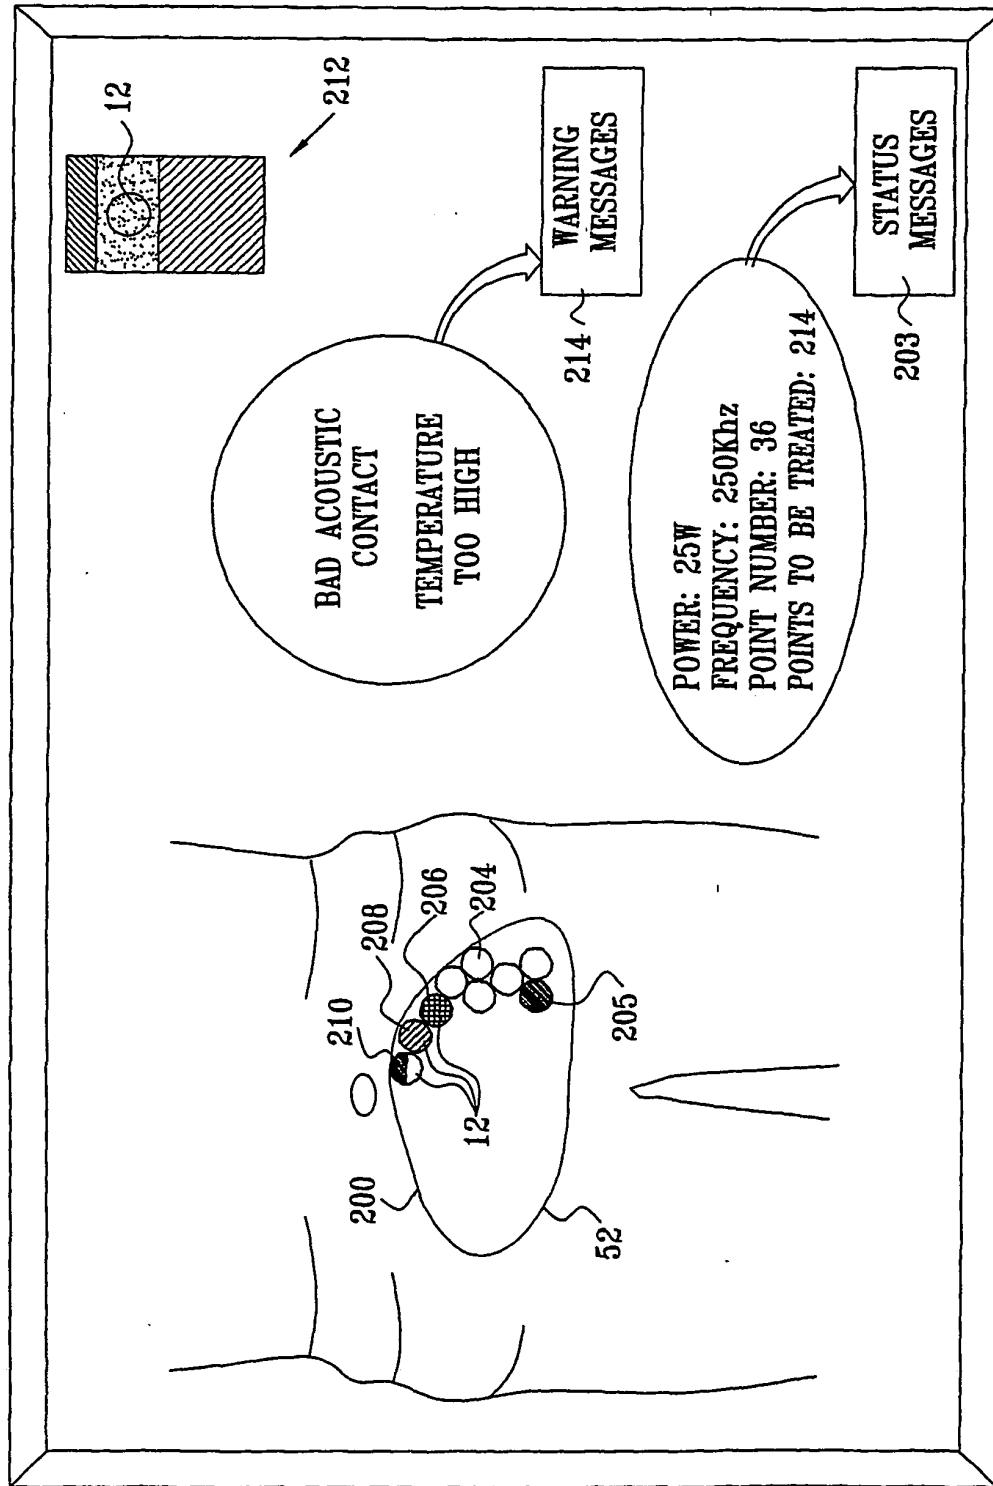

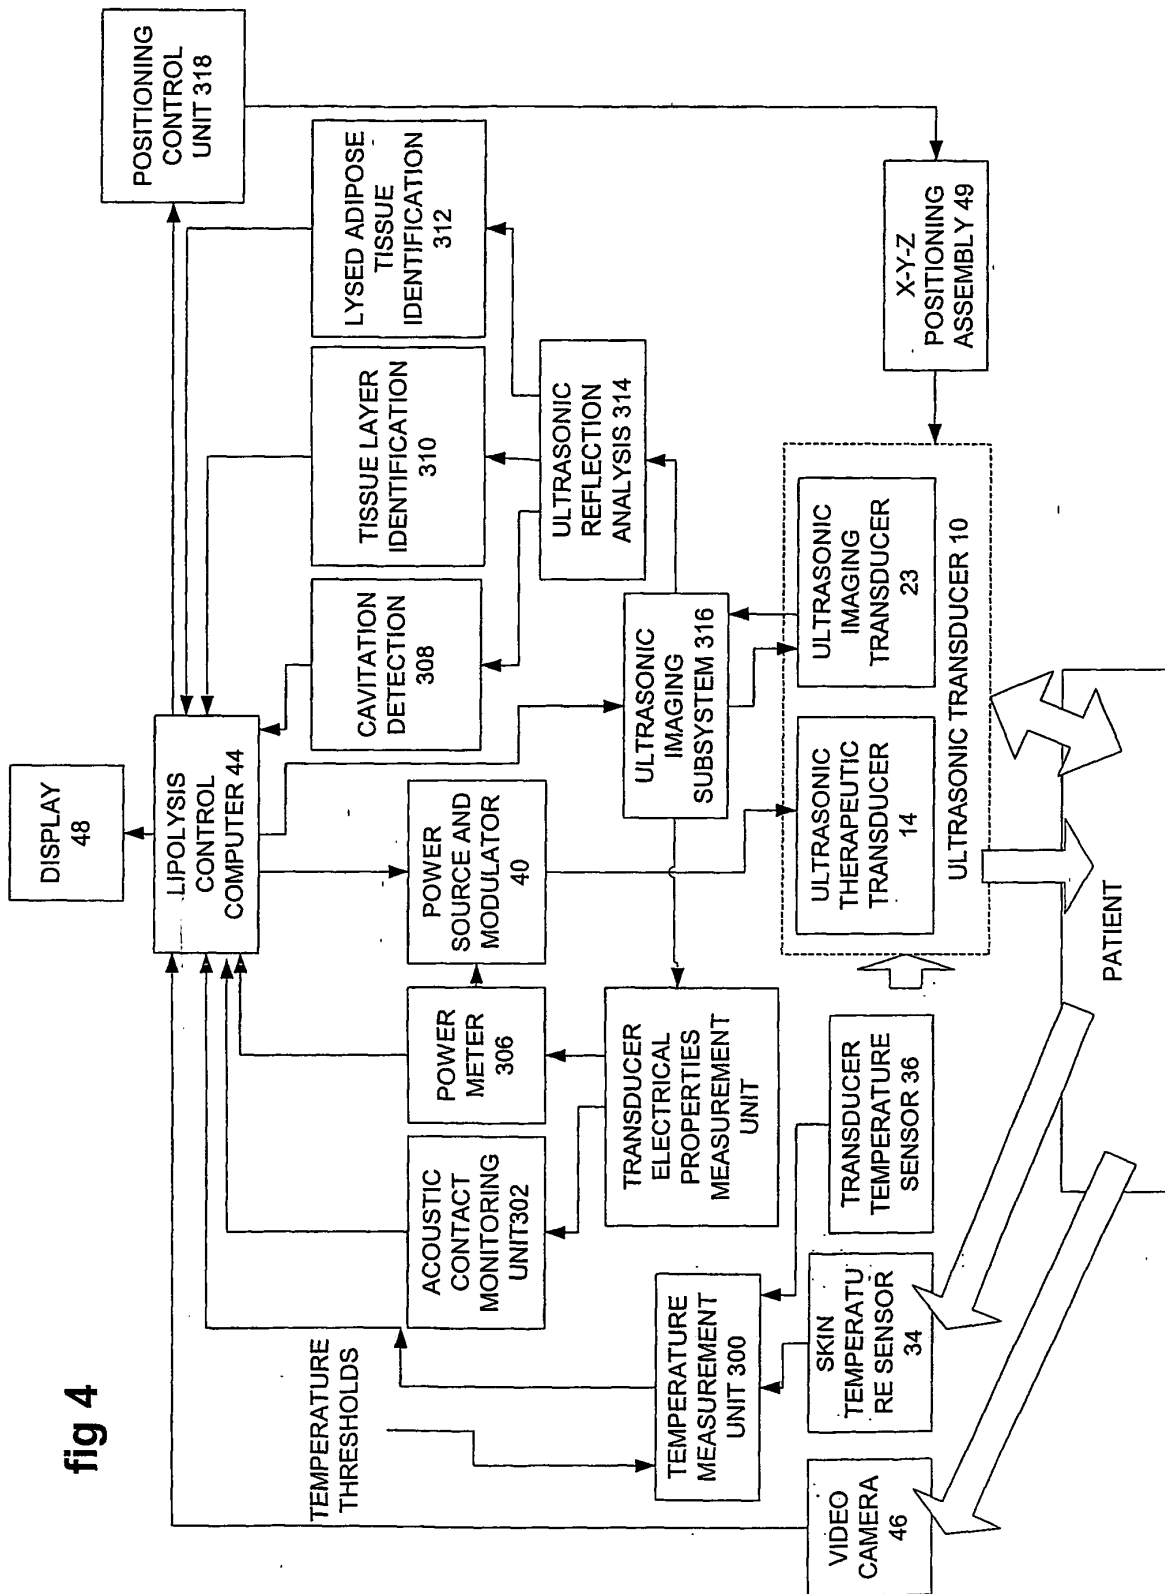


fig 5A



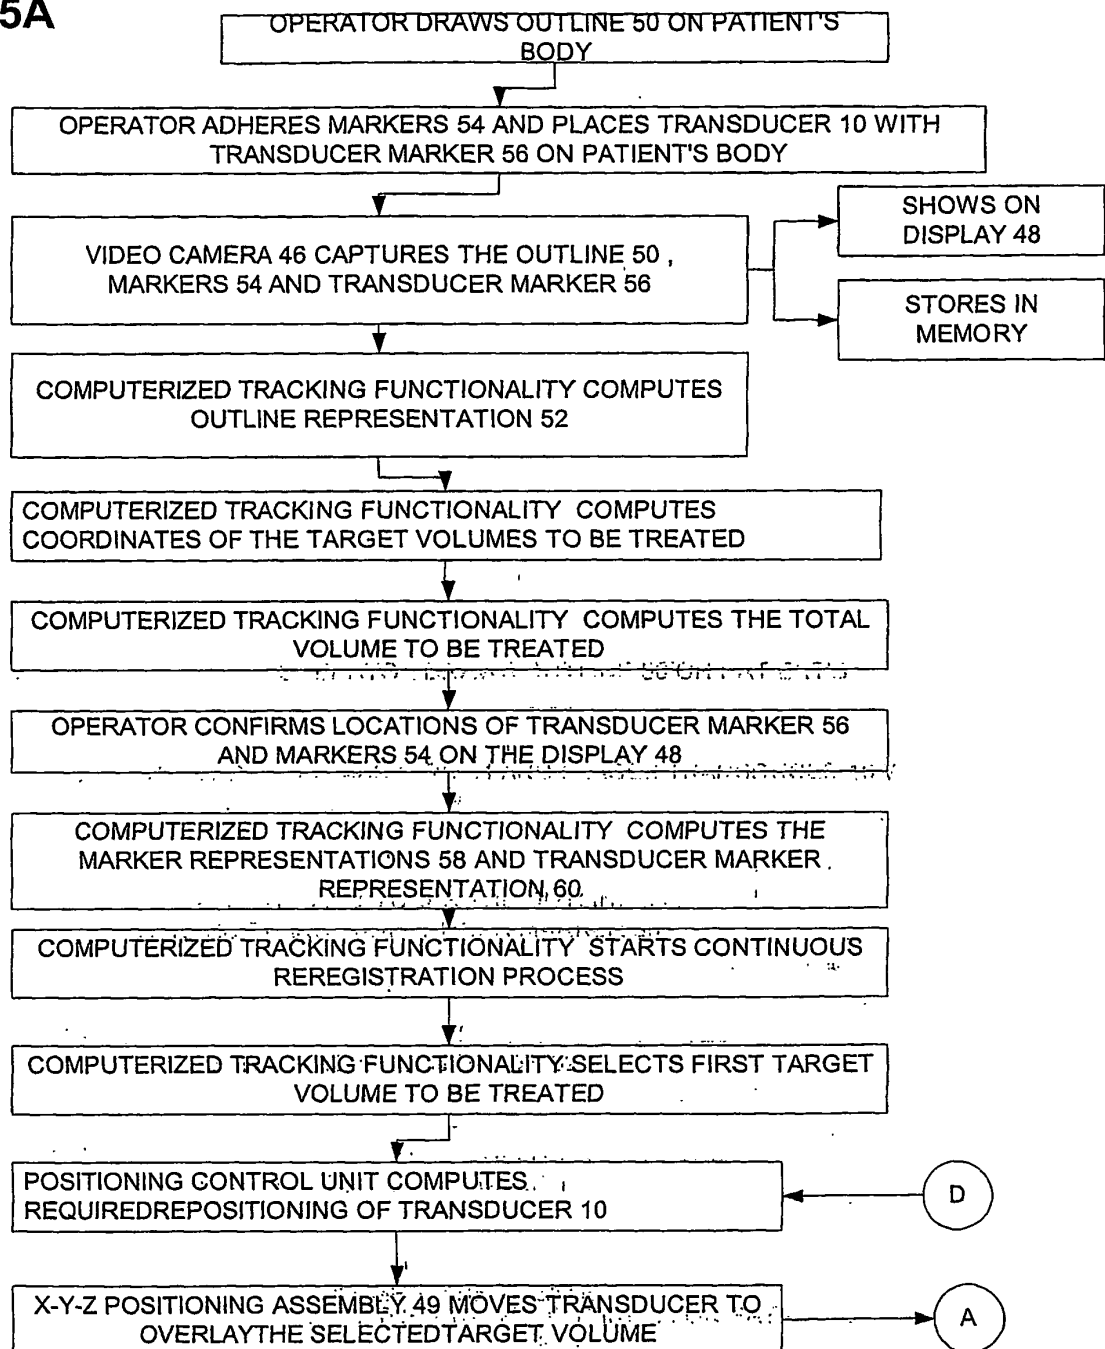


fig 5B

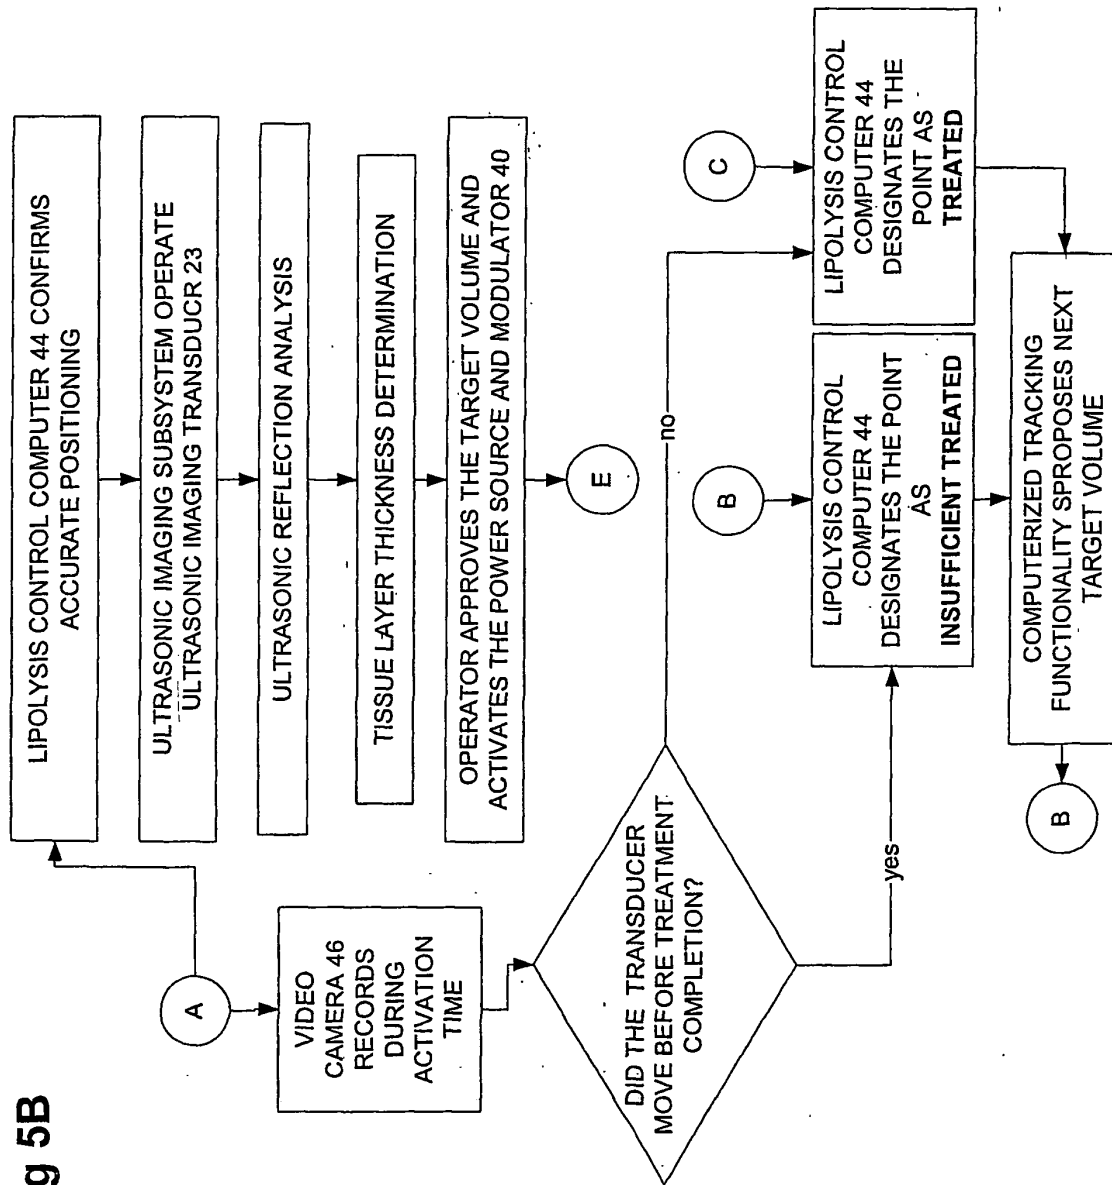

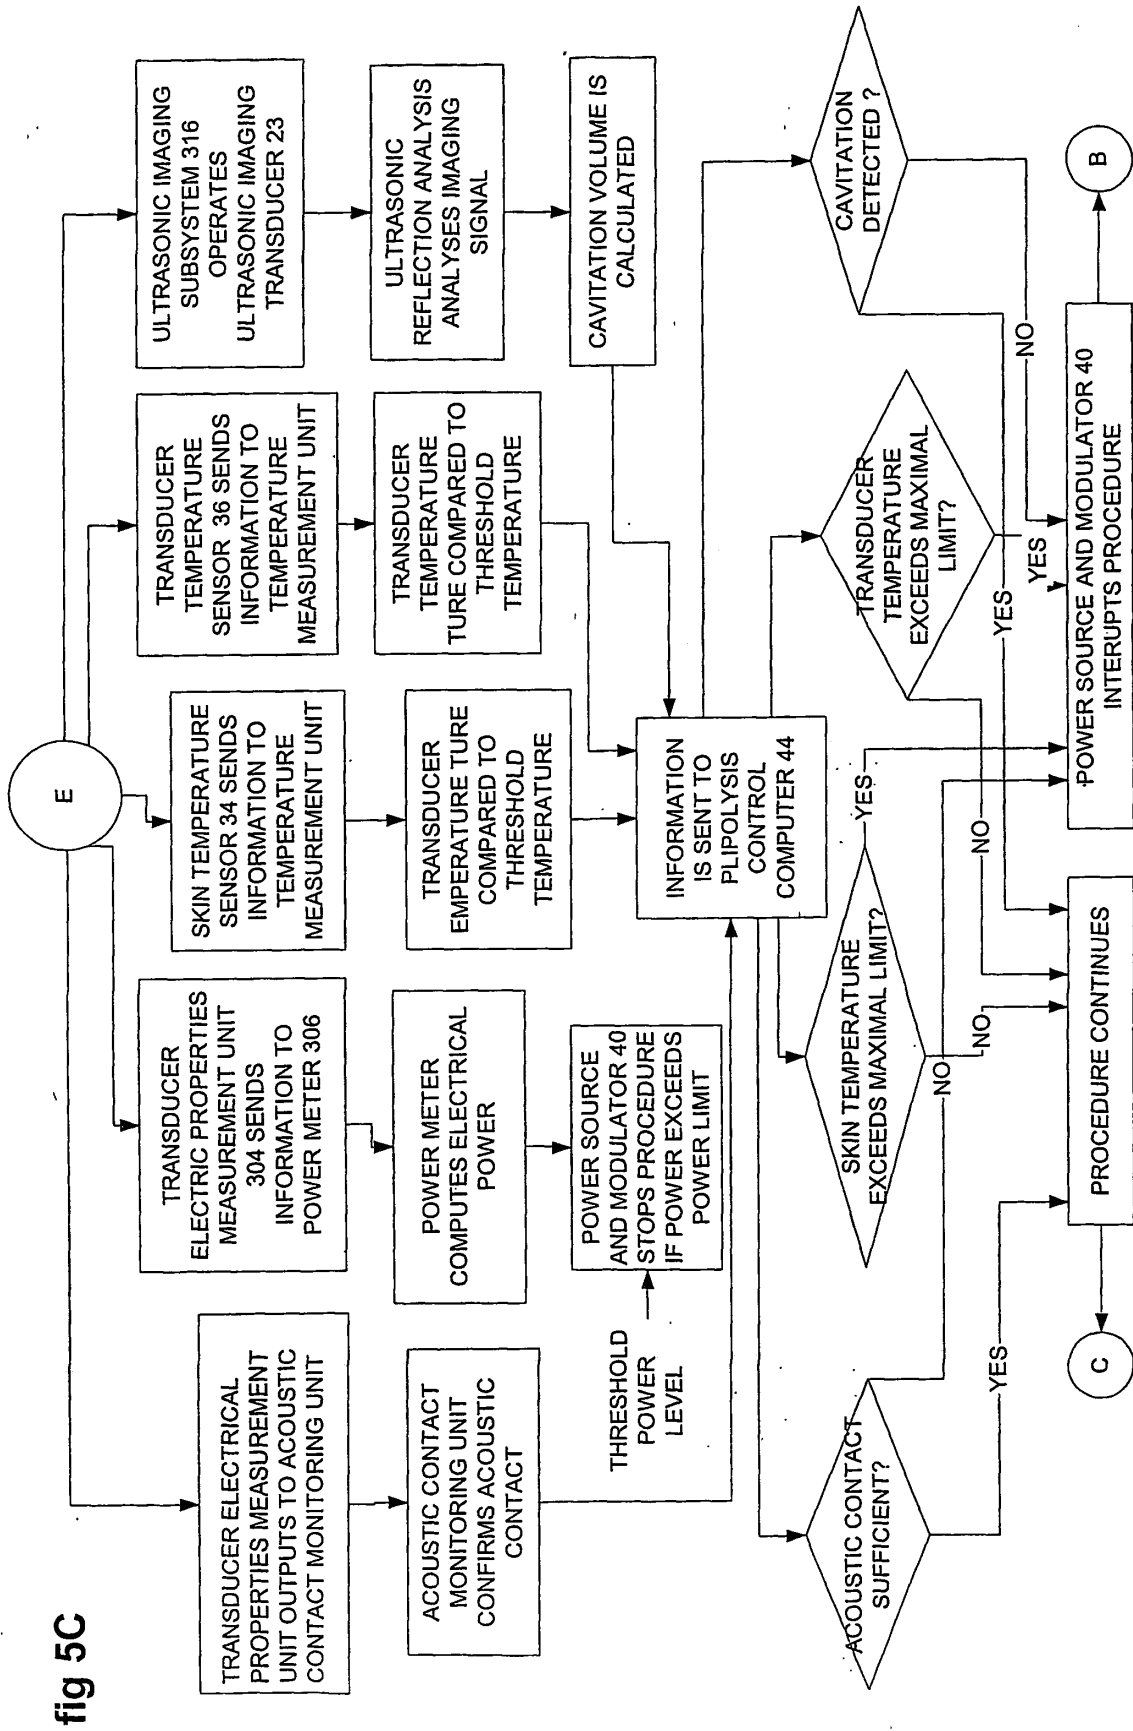

专利名称(译)	无创超声波身体轮廓		
公开(公告)号	EP1362223A4	公开(公告)日	2005-07-06
申请号	EP2001272795	申请日	2001-12-31
[标]申请(专利权)人(译)			