

(19)



(11)

EP 1 925 257 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

28.05.2008 Bulletin 2008/22

(51) Int Cl.:

A61B 8/00 (2006.01)

(21) Application number: **07021094.3**

(22) Date of filing: **29.10.2007**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

Designated Extension States:

AL BA HR MK RS

(30) Priority: **23.11.2006 KR 20060116523**

(71) Applicant: **MEDISON CO., LTD.**

Kangwon-do 250-870 (KR)

(72) Inventors:

• **Song, Young Seuk**
Gangnam-gu,
Seoul 135-280 (KR)

• **Kim, Jae Gyoung**
Gangnam-gu,
Seoul 135-280 (KR)

(74) Representative: **Schmid, Wolfgang**

Lorenz & Kollegen

Patent- und Rechtsanwaltskanzlei


Alte Ulmer Strasse 2

D-89522 Heidenheim (DE)

(54) **Portable ultrasound system**

(57) The present invention is directed to a portable ultrasound system to form a control panel using a touch panel, comprising: an ultrasound diagnostic unit for transmitting ultrasound signals to a target object and receiving ultrasound signals reflected from the target object to generate an ultrasound image of the target object based on the received ultrasound signals; a control unit for generating a control panel screen with a plurality of input sections for receiving user inputs to operate said ultrasound diagnostic unit; and a touch panel for displaying the generated control panel screen and generating output signals in response to the user inputs, wherein said control unit is further configured to control said ultrasound diagnostic unit based on the output signals.

FIG. 2

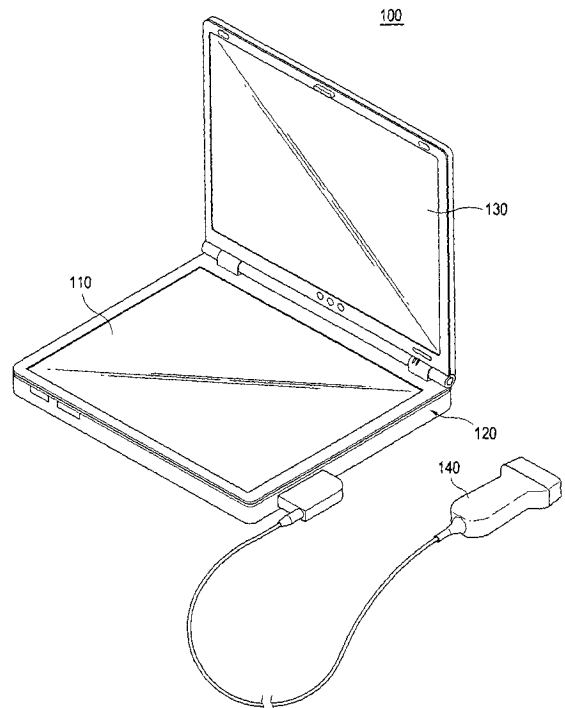

EP 1 925 257 A1

Description

[0001] The present application claims priority from Korean Patent Application No. 10-2006-0116523 filed on November 23, 2006, the entire subject matter of which is incorporated herein by reference.

BACKGROUND

1. Field

[0002] The present invention generally relates to an ultrasound system, and more particularly to a portable ultrasound system.

2. Background

[0003] An ultrasound system has a wide range of applications and has become one of the important diagnostic devices. Specifically, due to its non-invasive and non-destructive nature, the ultrasound system has been extensively used in the medical profession. Modern high-performance ultrasound systems are commonly used to produce two or three-dimensional images of internal features of a target object.

[0004] Since conventional ultrasound systems are extremely large and heavy, they must be fixed to a specific location. Further, even the compact versions of such ultrasound systems weigh more than 10 kg and thus cannot be easily moved or carried. In order to resolve this problem, portable ultrasound systems have been developed. A conventional portable ultrasound system is described below with reference to FIG. 1.

[0005] FIG. 1 illustrates a conventional portable ultrasound system 10. As shown in FIG. 1, the conventional portable ultrasound system 10 comprises a main unit 11, a control panel 12, a display unit 13 and a probe 14.

[0006] The main unit 11 forms the exterior of the above system 10 and receives power for driving the system 10 from an internal battery or an external power supplier. The main unit 11 comprises: a beam former for transmitting focusing ultrasound signals to be transmitted from the probe 14 and receive-focusing ultrasound signals received through the probe 14; a data generator for generating frame data based on the signals from the beam former; a processor for generating two or three-dimensional images of a target object based on the frame data; and a storage unit for storing the data.

[0007] The control panel 12 is arranged on the main unit 11 and comprises various input sections for controlling the system 10 to obtain ultrasound images, manipulating menus and performing measurement and annotation functions.

[0008] The display unit 13 displays the data and images, which are processed in and provided from the main unit 11.

[0009] The probe 14 comprises at least one transducer (not shown). The transducers transmit ultrasound signals

to a target object and receive the ultrasound signals reflected from the target object.

[0010] The portable ultrasound system 10 may be carried due to its minimized size and weight. However, the conventional portable ultrasound system 10 cannot have a control panel as large as that of a normal-sized ultrasound system on the main unit 11 due to its limited size. This causes problems in that the number of input sections to be included in the control panel 12 must be limited.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Arrangements and embodiments may be described in detail with reference to the following drawings in which like reference numerals refer to like elements and wherein:

[0012] FIG. 1 illustrates a conventional portable ultrasound system;

[0013] FIG. 2 illustrates a portable ultrasound system constructed in accordance with one embodiment of the present invention;

[0014] FIG. 3 is a block diagram showing the configuration of a portable ultrasound system constructed in accordance with one embodiment of the present invention; and

[0015] FIGS. 4 and 5 illustrate exemplary control panel screens constructed in accordance with one embodiment of the present invention.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[0016] A detailed description may be provided with reference to FIGS. 2-5. One of ordinary skill in the art may realize that the following description is illustrative only and is not in any way limiting. Other embodiments of the present invention may readily suggest themselves to such skilled persons having the benefit of this disclosure.

[0017] FIG. 2 illustrates a portable ultrasound system 100 constructed in accordance with one embodiment of the present invention. As shown in FIG. 2, the portable ultrasound system 100 of the present invention comprises a touch panel 110, a main unit 120, a display unit 130 and a probe 140.

[0018] The touch panel 110 displays a menu screen including a plurality of input sections to allow a user to manipulate the portable ultrasound system 100. The touch panel 110 generates an output signal from an external input.

[0019] According to one embodiment of the present invention, the touch panel 110 may display a main control panel screen 210 and a corresponding sub control panel screen 220, as shown in FIGS. 4 and 5, respectively. The main control panel screen 210 may provide an initial screen of the portable ultrasound system 100 with a plurality of input sections including: a plurality of buttons for receiving inputs to perform various functions (e.g., to control and operate the portable ultrasound system 100, to

set up the display modes of images displayed on the display unit 130 such as B-mode (brightness mode), M-mode (motion mode), C-mode (color mode) and D-mode (Doppler mode), and to adjust the displayed images); a keyboard for receiving text information; a track ball for moving a cursor on the display unit 130 and searching data and images stored in a storage unit; and a handwriting recognition unit for recognizing handwriting inputs on the touch panel 110. For example, the touch panel 110 may display a main control panel screen 210 to allow a user to change the depth, direction and width of two-dimensional images and a sub control panel screen 220 with a plurality of input sections for controlling the optimization of two-dimensional images and enlarging/reducing the images.

[0020] The touch panel 110 may recognize external inputs by using the pressure sensing mechanism and/or the electromagnetic induction mechanism.

[0021] As shown in FIG. 3, the main unit 110 comprises a storage unit 121, a control unit 122 and an ultrasound diagnostic unit 123.

[0022] The storage unit 121 stores program codes for generating the main control panel screen 210 and the sub control panel screen 220.

[0023] The control unit 122 executes the program codes stored in the storage unit 120 to generate the main control panel screen 210 and the sub control panel screen 220 so that the generated control panel screens are displayed on the touch panel 110. The control unit 122 controls the ultrasound diagnostic unit 123 based on the output signals from the touch panel 110.

[0024] The ultrasound diagnostic unit 123 transmit-focuses ultrasound signals transmitted through the probe 140 and receive-focuses the ultrasound signals received through the probe 140 to generate frame data based on the received signals. This is so that the two or three-dimensional images of a target object are formed based on the frame data.

[0025] The display unit 130 displays the data and images processed in the ultrasound diagnostic unit 123.

[0026] The probe 140 comprises at least one transducer (not shown). The transducers transmit ultrasound signals to the target object and receive the ultrasound signals reflected from the target object.

[0027] In accordance with one embodiment of the present invention, there is provided a portable ultrasound system comprising a touch panel for displaying a control panel screen with a plurality of input sections and generating output signals in response to user inputs.

[0028] In accordance with one embodiment of the present invention, there is provided a portable ultrasound system, comprising: an ultrasound diagnostic unit for transmitting ultrasound signals to a target object and receiving ultrasound signals reflected from the target object to generate an ultrasound image of the target object based on the received ultrasound signals; a control unit for generating a control panel screen with a plurality of input sections for receiving user inputs to operate said

ultrasound diagnostic unit; and a touch panel for displaying the generated control panel screen and generating output signals in response to the user inputs, wherein said control unit is further configured to control said ultrasound diagnostic unit based on the output signals.

[0029] In accordance with one embodiment of the present invention, there is provided a portable ultrasound system comprising an ultrasound diagnostic unit, a touch panel and a control unit. The ultrasound diagnostic unit transmits ultrasound signals to a target object and receives the ultrasound signals reflected from the target object to generate an ultrasound image of the target object based on the received ultrasound signals. The touch panel displays a control panel screen with a plurality of input sections to control and operate said ultrasound diagnostic unit and generates output signals from external inputs. The control unit generates the control panel screen and controls said ultrasound diagnostic unit based on the output signals.

[0030] Any reference in this specification to "one embodiment," "an embodiment," "example embodiment," etc., means that a particular feature, structure or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure or characteristic in connection with other ones of the embodiments.

[0031] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, numerous variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art. For example, the configuration and arrangement of the input sections included in the control panel screens 210 and 220 may be modified by those skilled in the art.

Claims

1. A portable ultrasound system, comprising:

an ultrasound diagnostic unit for transmitting ultrasound signals to a target object and receiving ultrasound signals reflected from the target object to generate an ultrasound image of the tar-

get object based on the received ultrasound signals;
a control unit for generating a control panel screen with a plurality of input sections for receiving user inputs to operate said ultrasound diagnostic unit; and
a touch panel for displaying the generated control panel screen and generating output signals in response to the user inputs,
wherein said control unit is further configured to control said ultrasound diagnostic unit based on the output signals.

2. The portable ultrasound system of Claim 1, wherein said touch panel is configured to sense the user inputs by using at least one of a pressure sensing mechanism and an electromagnetic induction mechanism.

3. The portable ultrasound system of Claim 1, further comprising a storage unit for storing program codes to generate said control panel screen.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1
(PRIOR ART)

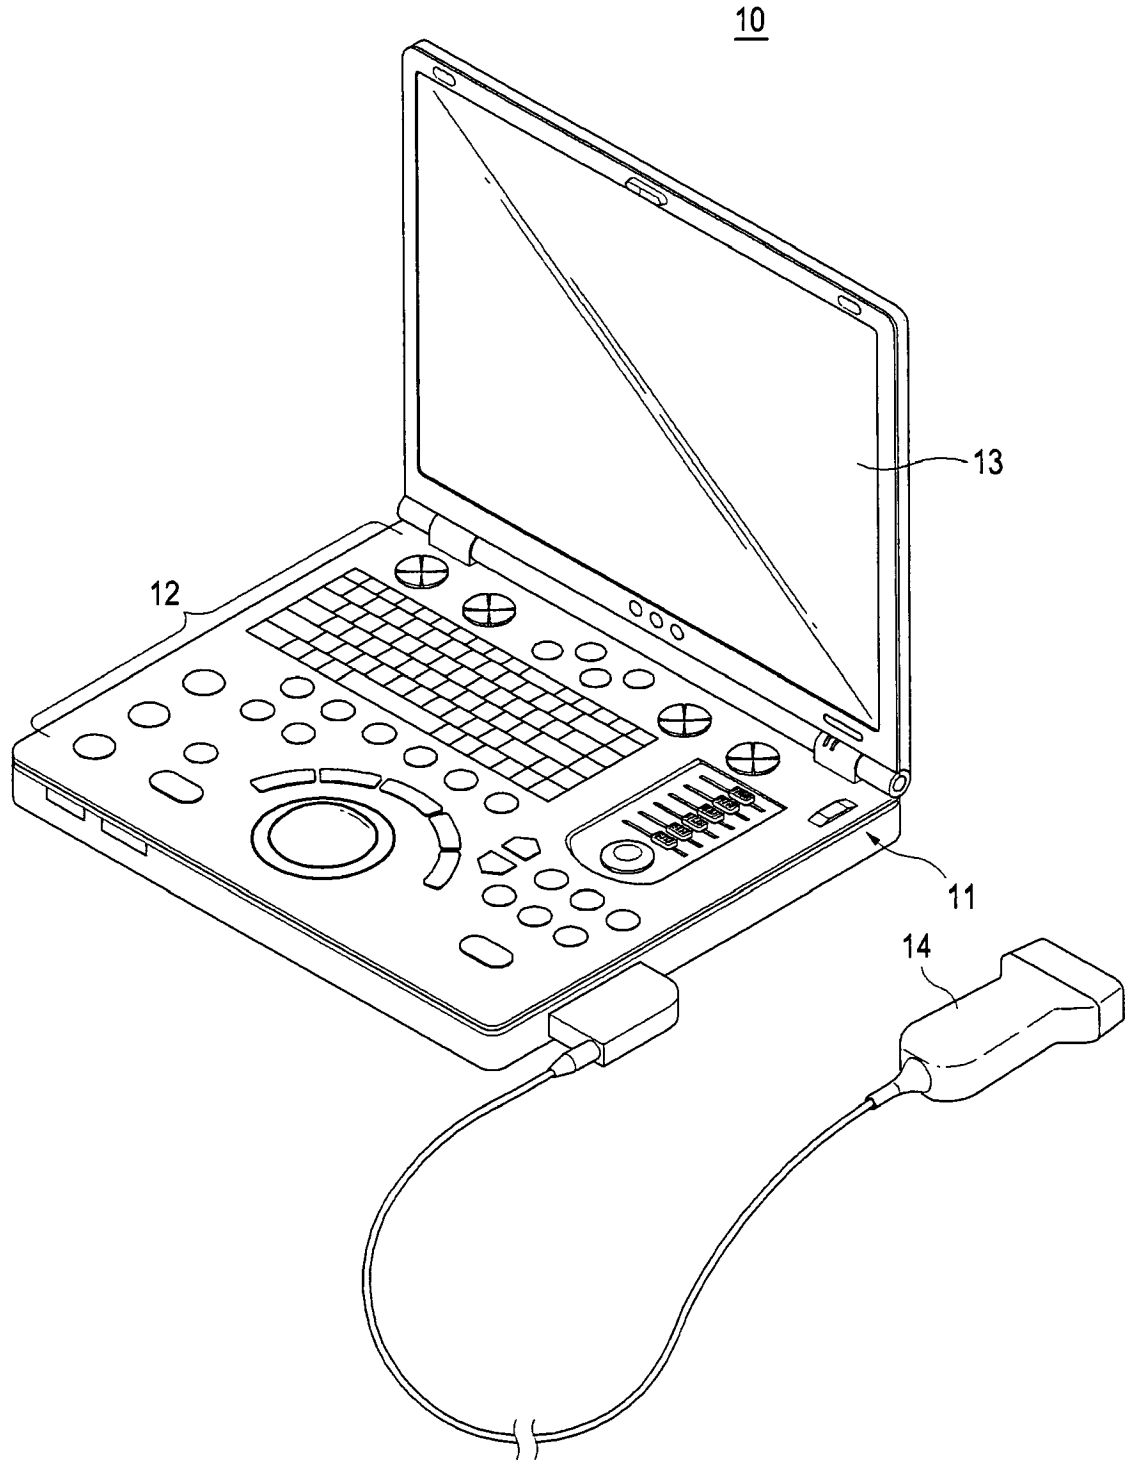


FIG. 2

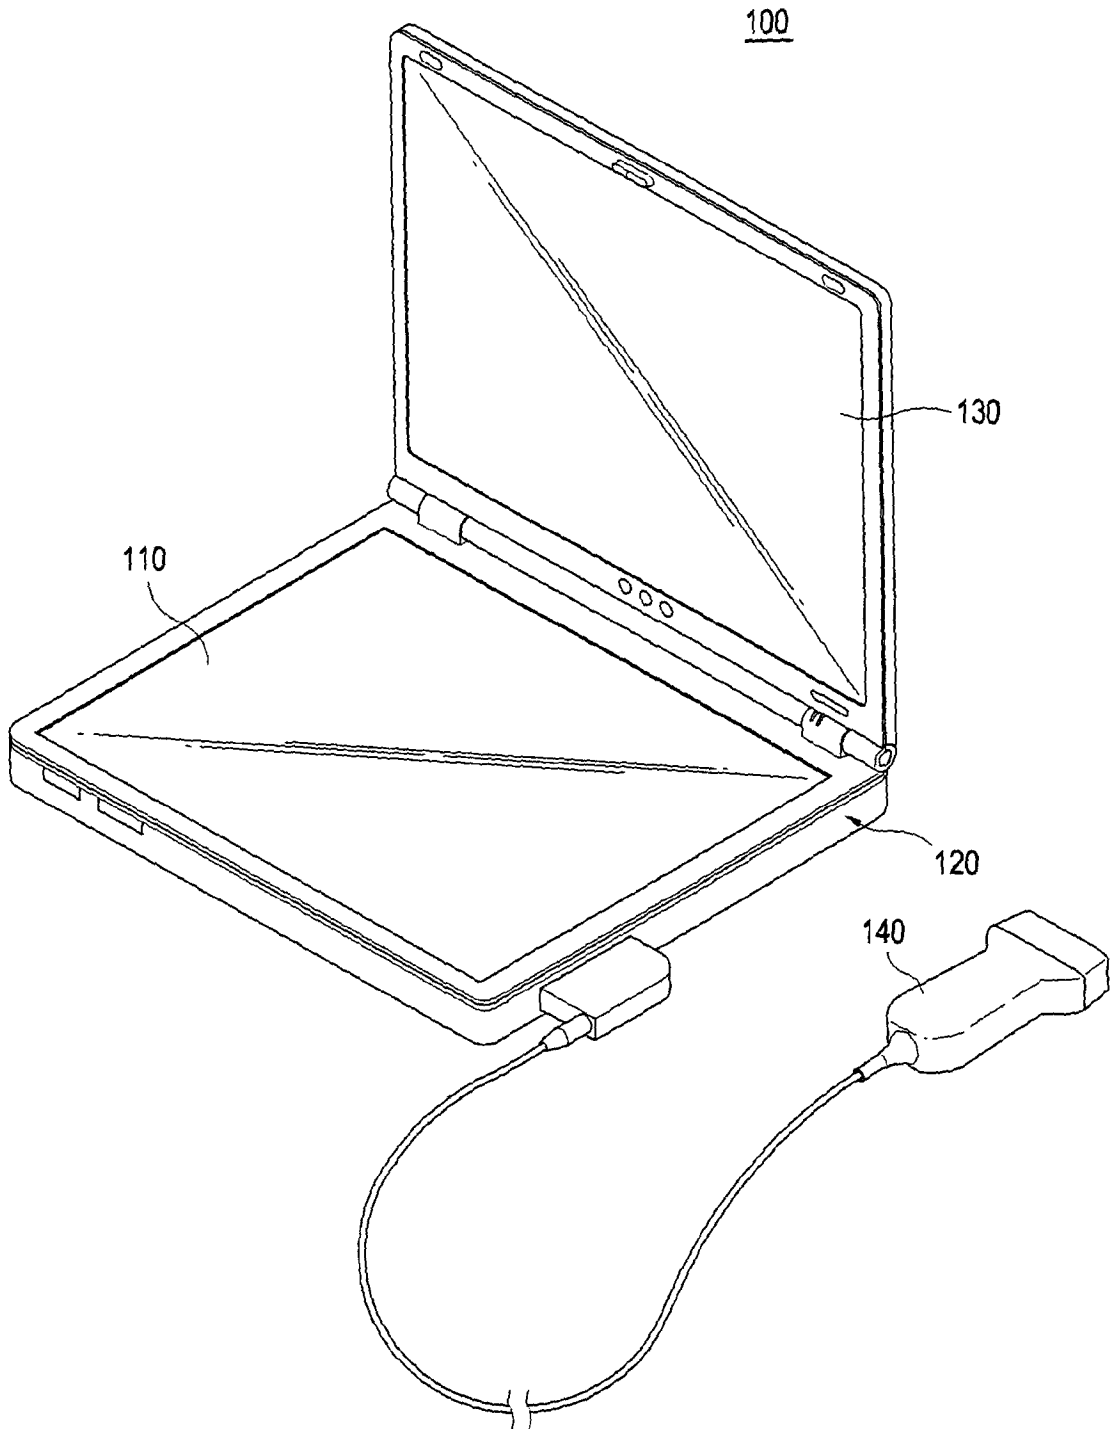


FIG. 3

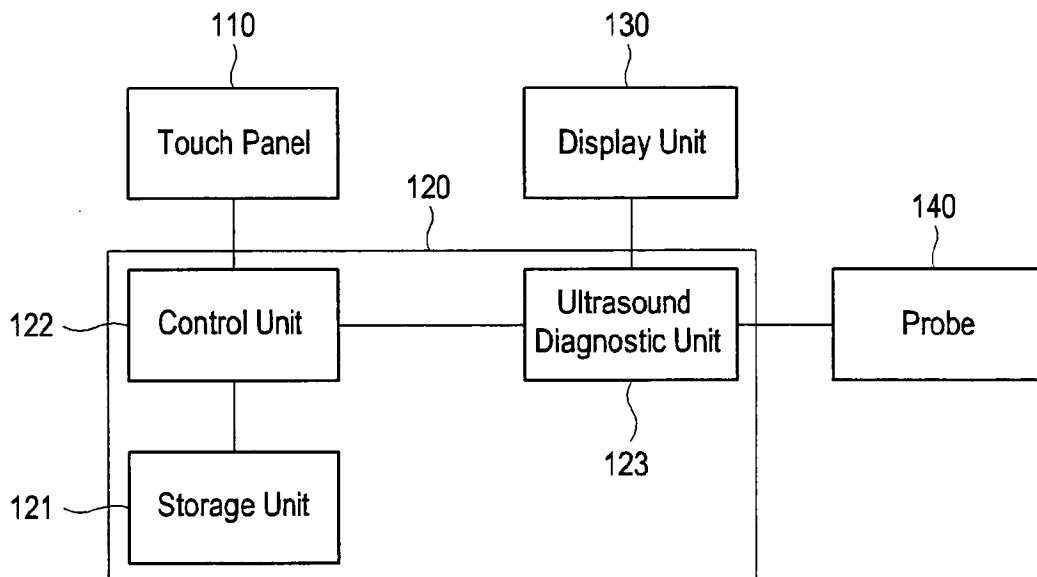


FIG. 4


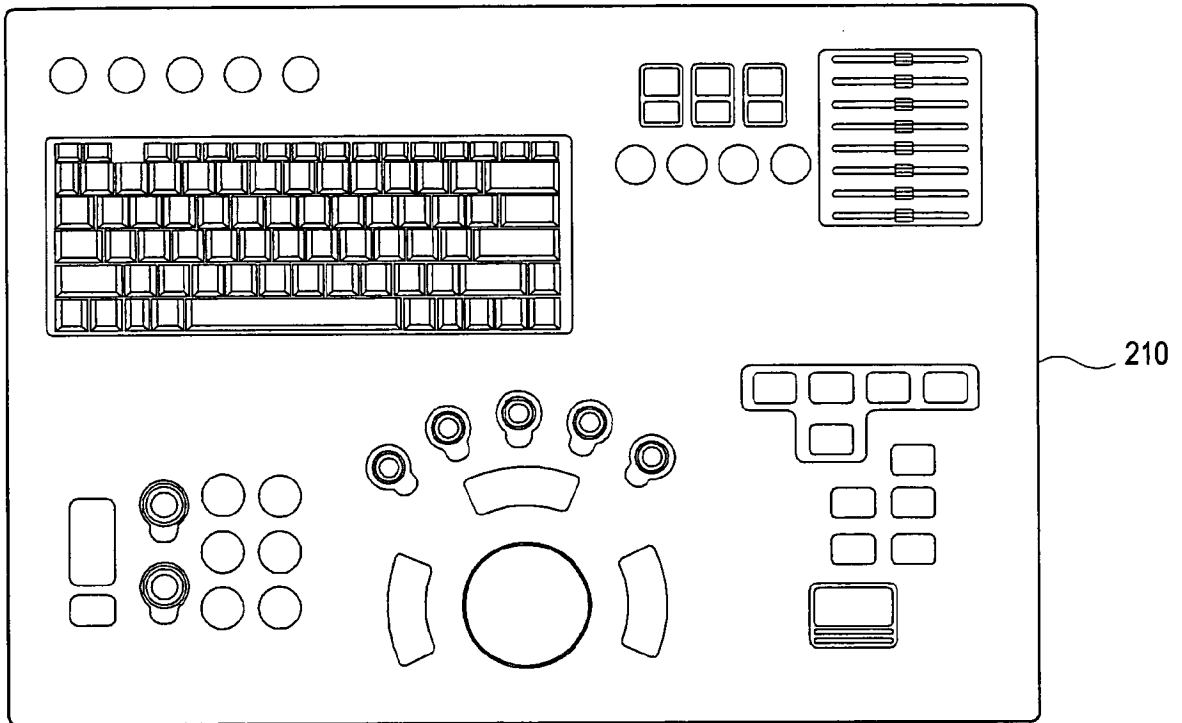


FIG. 5



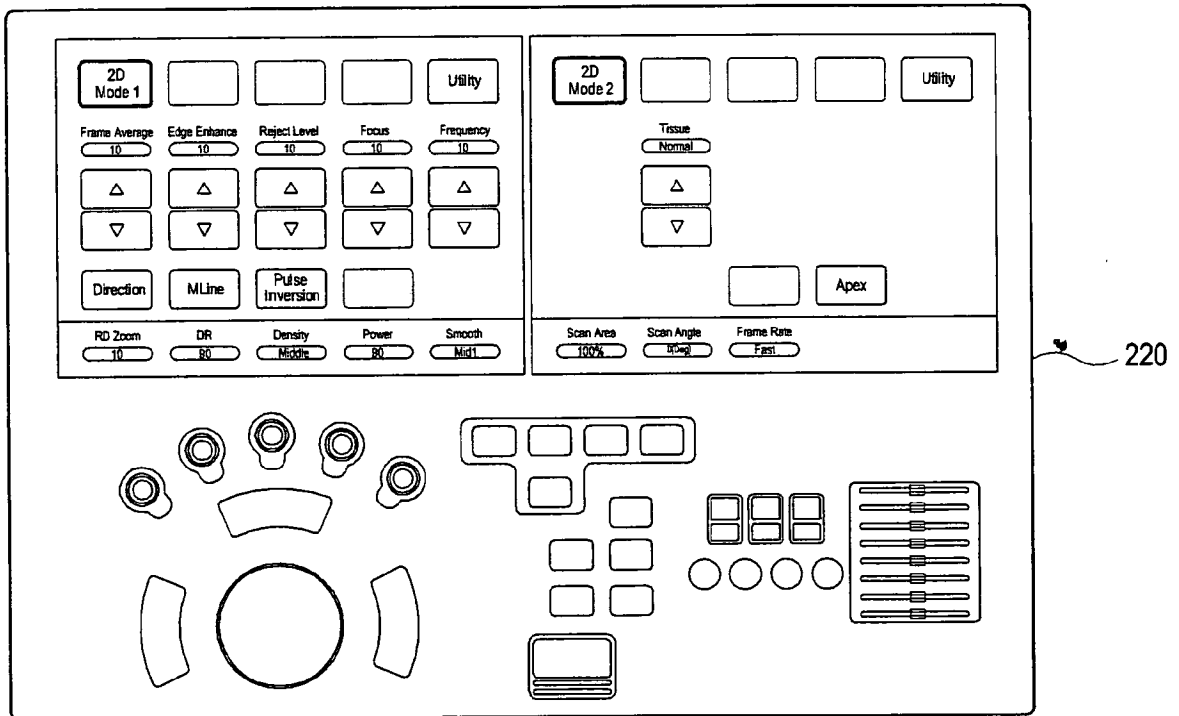

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2006/040697 A (KONINKL PHILIPS ELECTRONICS NV [NL]; POLAND MCKEE D [US]) 20 April 2006 (2006-04-20) * page 1, line 1 - page 3, line 1 * * page 6, lines 1-32 * * page 8, lines 18-23 * -----	1-3	INV. A61B8/00
X	US 2002/173721 A1 (GRUNWALD SORIN [US] ET AL) 21 November 2002 (2002-11-21) * abstract * * paragraphs [0003], [0072] - [0074], [0200] - [0205]; figure 19 * -----	1-3	
X	US 2003/073894 A1 (CHIANG ALICE M [US] ET AL) 17 April 2003 (2003-04-17) * paragraphs [0004], [0010], [0011], [0221]; figure 13 * -----	1-3	
X	US 6 468 212 B1 (SCOTT WALTER GUY [US] ET AL) 22 October 2002 (2002-10-22) * abstract; figures 1,25 * * column 2, lines 12-37 * * column 4, line 57 - column 5, line 3 * * column 13, lines 8-26 * -----	1-3	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			A61B
2	Place of search Munich	Date of completion of the search 11 March 2008	Examiner Kempin, H
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 07 02 1094

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-03-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006040697 A	20-04-2006	CN 101040245 A EP 1817653 A1	19-09-2007 15-08-2007
US 2002173721 A1	21-11-2002	DE 10306924 A1 JP 2003299652 A US 2006116578 A1 US 2004138569 A1	04-09-2003 21-10-2003 01-06-2006 15-07-2004
US 2003073894 A1	17-04-2003	NONE	
US 6468212 B1	22-10-2002	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020060116523 [0001]

专利名称(译)	便携式超声系统		
公开(公告)号	EP1925257A1	公开(公告)日	2008-05-28
申请号	EP2007021094	申请日	2007-10-29
申请(专利权)人(译)	MEDISON CO. , LTD.		
当前申请(专利权)人(译)	MEDISON CO. , LTD.		
[标]发明人	SONG YOUNG SEUK KIM JAE GYOUNG		
发明人	SONG, YOUNG SEUK KIM, JAE GYOUNG		
IPC分类号	A61B8/00		
CPC分类号	A61B8/00 A61B8/462 A61B8/465 A61B8/467		
代理机构(译)	SCHMID , WOLFGANG		
优先权	1020060116523 2006-11-23 KR		
其他公开文献	EP1925257B1		
外部链接	Espacenet		

摘要(译)

本发明涉及一种使用触摸板形成控制面板的便携式超声系统，包括：超声诊断单元，用于将超声信号发送到目标对象并接收从目标对象反射的超声信号，以产生超声图像。基于接收的超声信号的目标对象；控制单元，用于产生具有多个输入部分的控制面板屏幕，用于接收用户输入以操作所述超声诊断单元；触摸面板，用于显示所生成的控制面板屏幕并响应于用户输入生成输出信号，其中，所述控制单元还被配置为基于输出信号控制所述超声诊断单元。

