



US 20090069690A1

(19) **United States**(12) **Patent Application Publication**
Shin et al.(10) **Pub. No.: US 2009/0069690 A1**(43) **Pub. Date: Mar. 12, 2009**(54) **ULTRASOUND DIAGNOSTIC SYSTEM****Publication Classification**(76) Inventors: **Soo Hwan Shin**, Seoul (KR); **Kyo Jong Koo**, Seoul (KR); **Young Seuk Song**, Seoul (KR)(51) **Int. Cl.**
A61B 8/14 (2006.01)(52) **U.S. Cl.** **600/459**(57) **ABSTRACT**

Correspondence Address:

JONES DAY**222 EAST 41ST ST****NEW YORK, NY 10017 (US)**

The present invention relates to an ultrasound diagnostic system. The ultrasound diagnostic system includes a plurality of connectors. Each of the connectors has a signal transmitter to transmit an identification signal uniquely identifying the respective connector. The ultrasound diagnostic system further includes a plurality of probes. Each of the probes has a signal detector and an indicator assembly. In response to a connection of each of the probes to one of the connectors, the signal detector of the respective probe is configured to detect the identification signal identifying said one of the connectors and the indicator assembly of the respective probe is configured to provide an identification of said one of the connectors based on the identification signal.

(21) Appl. No.: **12/206,641**(22) Filed: **Sep. 8, 2008**(30) **Foreign Application Priority Data**

Sep. 7, 2007 (KR) 10-2007-0091154

Oct. 12, 2007 (KR) 10-2007-0103117

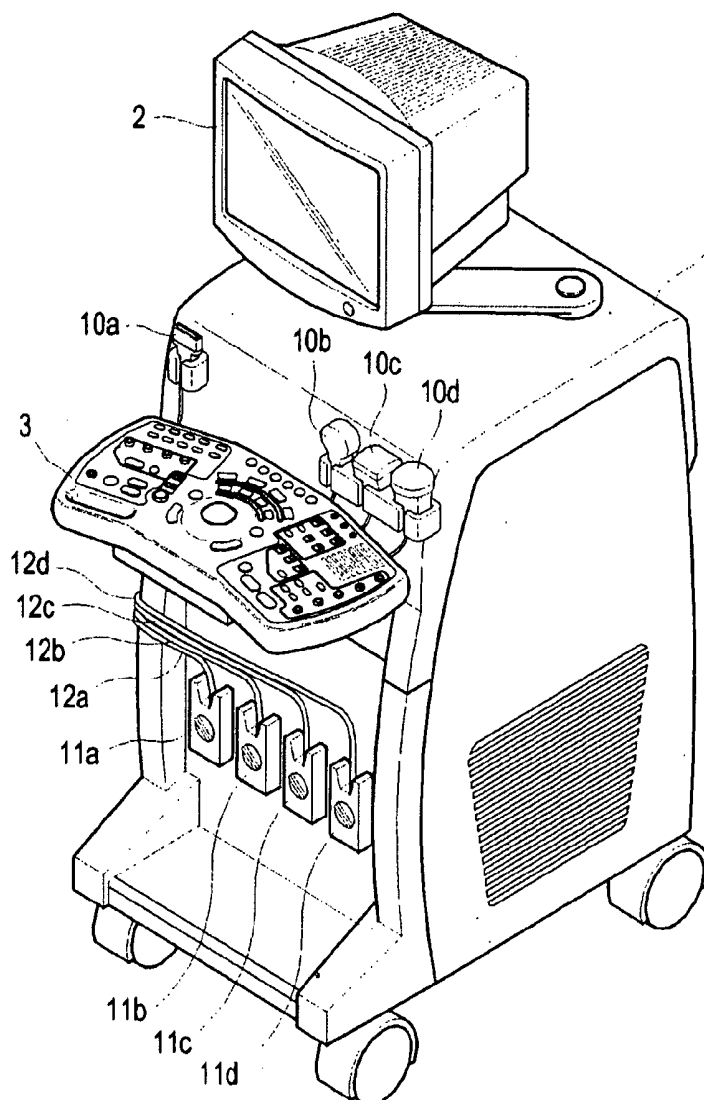


FIG. 1

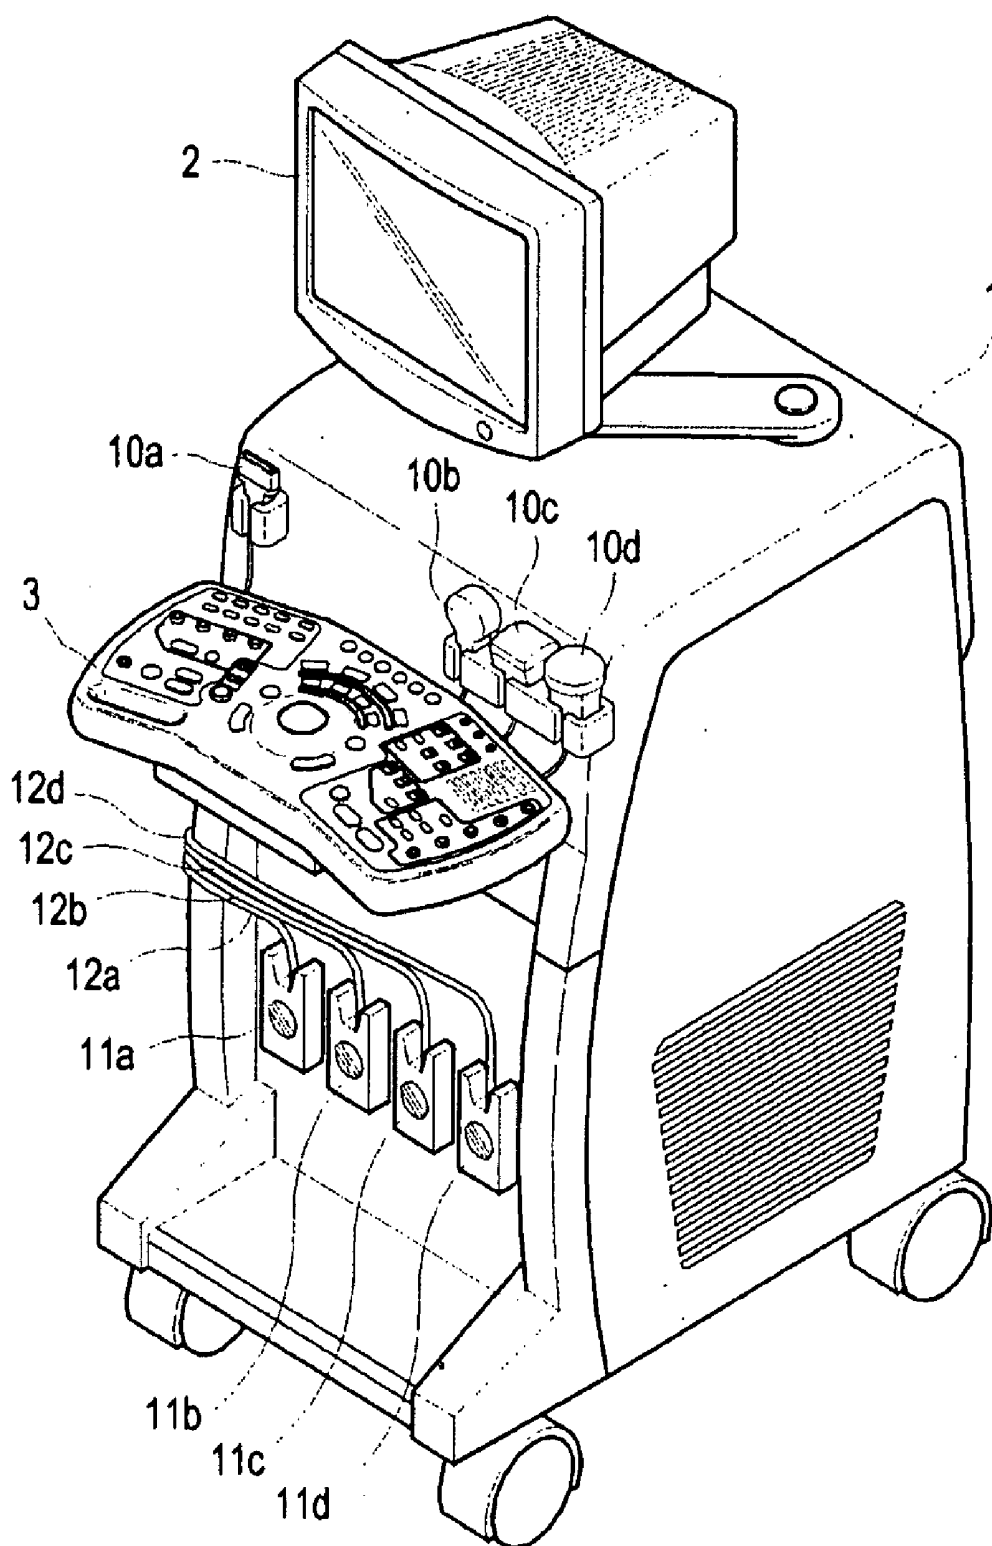


FIG. 2

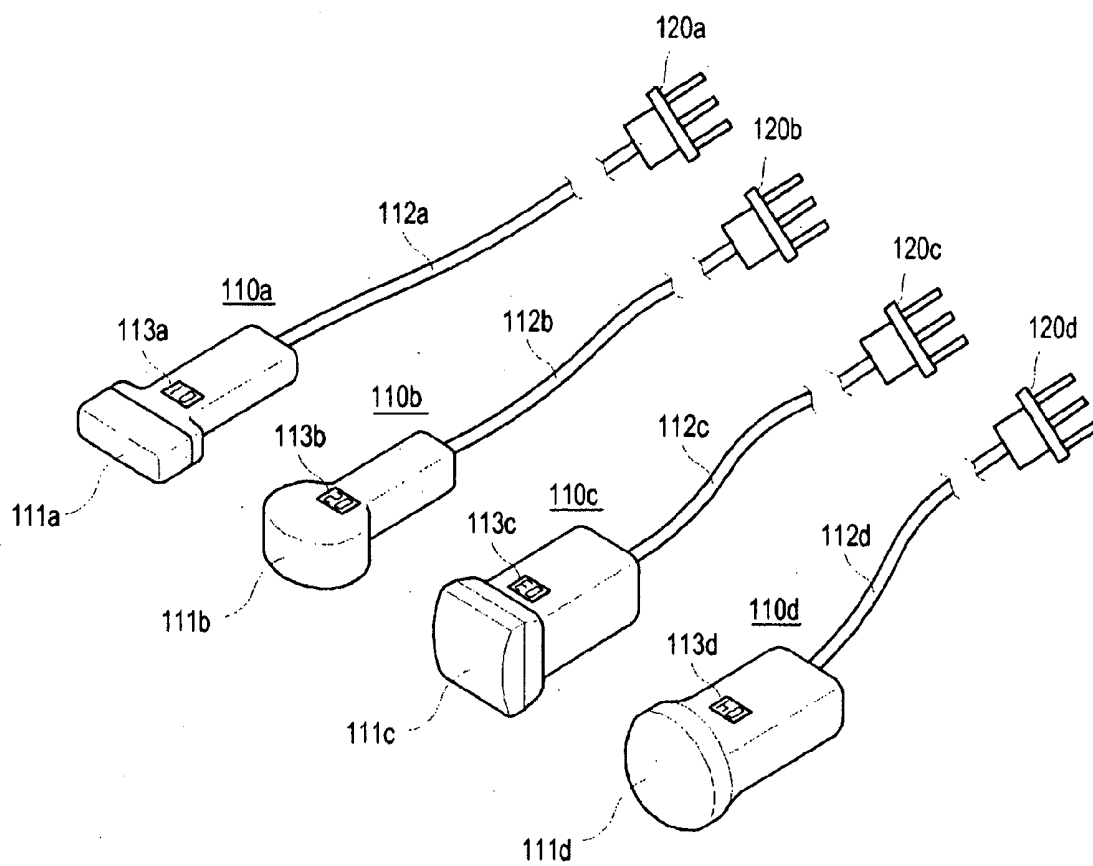


FIG. 3

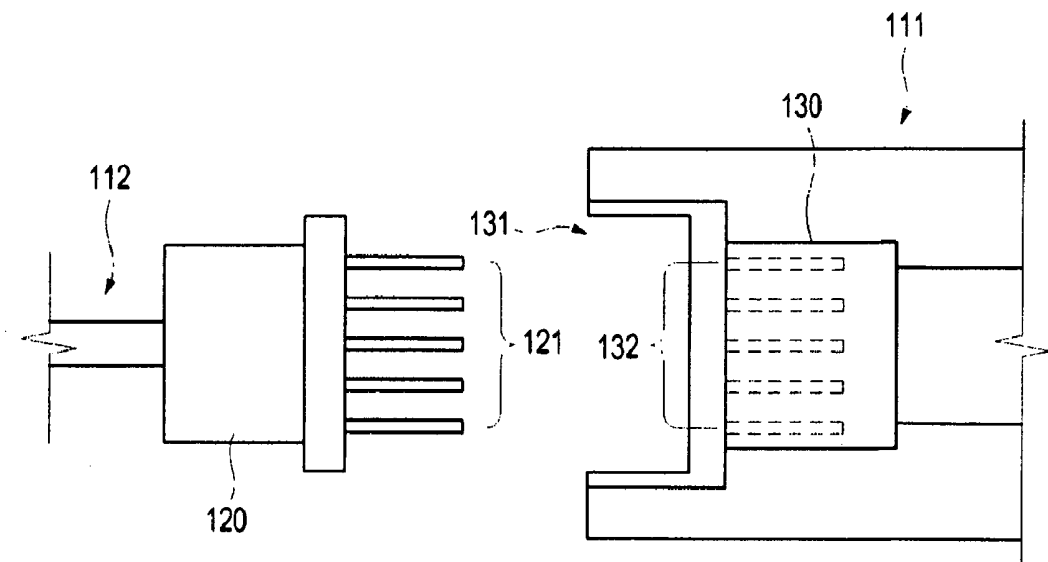


FIG. 4


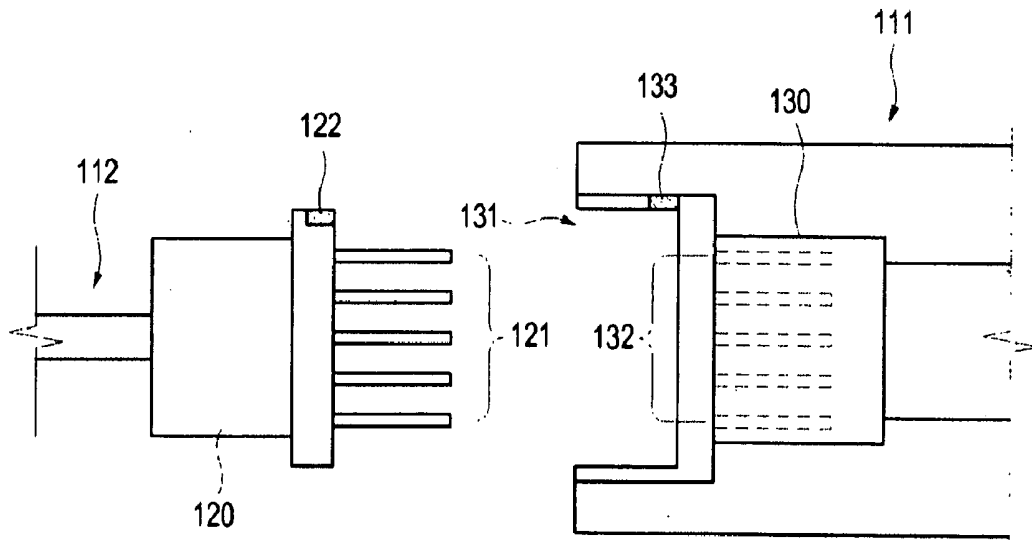


FIG. 5

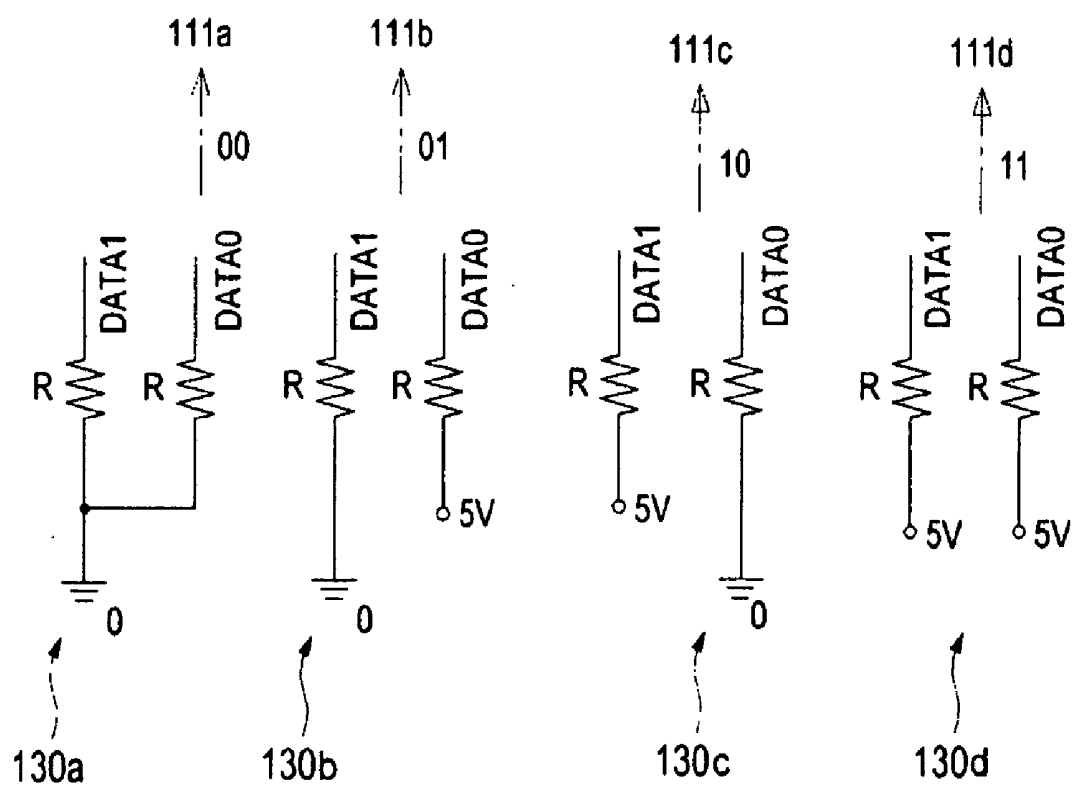

ULTRASOUND DIAGNOSTIC SYSTEM

[0001] The present application claims priority from Korean Patent Application Nos. 10-2007-0091154 and 10-2007-0103117 respectively filed on Sep. 7, 2007 and Oct. 12, 2007, the entire subject matters of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Technical Field

[0003] The present invention generally relates to ultrasound diagnostic systems, and more particularly to an ultrasound diagnostic system capable of identifying a connection status of a probe.

[0004] 2. Background Art

[0005] An ultrasound diagnostic system has become an important and popular diagnostic tool due to its non-invasive and non-destructive nature. Modern high-performance ultrasound imaging diagnostic systems and techniques are commonly used to produce two- or three-dimensional images of internal features of patients.

[0006] An ultrasound diagnostic system generally adopts a probe containing an array of piezoelectric elements to transmit and receive ultrasound signals. The ultrasound diagnostic system forms an image of human internal tissues by electrically exciting transducer elements to generate ultrasound signals that travel into the body. Echoes reflected from tissues and organs return to the transducer element and are converted into electrical signals, which are amplified and processed to produce ultrasound data. The ultrasound diagnostic system may adopt various types of probes according to diagnosis purposes.

[0007] Since multiple probes are used in the ultrasound diagnostic system, it may be confusing to identify whether or not a desirable probe is appropriately connected. Particularly, since the ultrasound diagnostic system is used in a dark environment, it is difficult to identify which probe is connected.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a perspective view of an illustrative embodiment of an ultrasound diagnostic system.

[0009] FIG. 2 is a perspective view of illustrative embodiments of various types of probes.

[0010] FIG. 3 is a cross-sectional view of an illustrative embodiment of a plug of a probe and a connector in an ultrasound diagnostic system.

[0011] FIG. 4 is a cross-sectional view of an illustrative embodiment of a plug of a probe and a connector with a signal detector and a signal transmitter mounted in one embodiment.

[0012] FIG. 5 is a circuit diagram of an illustrative embodiment of an example of an identification signal generator in one embodiment.

DETAILED DESCRIPTION OF THE INVENTION

[0013] FIG. 1 is a schematic diagram showing an illustrative embodiment of an ultrasound diagnostic system. As shown in FIG. 1, the ultrasound diagnostic system 100 may include a body 1, a display unit 2 and a control panel 3. The body 1 may include a plurality of processors such as digital processing units, scan converters and the like. The display unit 2 may be an LCD monitor, a CRT monitor or the like. The control panel 3 may provide a user input interface for allow-

ing the user to input operation instructions. A plurality of connectors 11a, 11b, 11c and 11d are provided in the ultrasound diagnostic system 100. Preferably, the connectors 11a, 11b, 11c and 11d may be mounted on a front side of the body 1. A plurality of connector cables 12a, 12b, 12c and 12d may be provided to connect the connectors 11a, 11b, 11c and 11d with the body 1. In the one embodiment, the body may further include an identification signal generator for generating connector identification signals.

[0014] A plurality of probes 10a, 10b, 10c and 10d are equipped at predetermined portions of the body 1 in the ultrasound diagnostic system. Various types of the probes may be adopted such as a convex probe, a linear probe, a phased probe, an endocavity probe and the like. The probes may have different uses depending on the diagnosis purpose or method. That is, the probes 10a, 10b, 10c and 10d may be alternately used while the ultrasound diagnostic system operates. As illustrated in FIG. 2, the probes 110a, 110b, 110c and 110d may be configured with bodies 111a, 111b, 111c and 111d, probe cables 112a, 112b, 112c and 112d, and plugs 120a, 120b, 120c and 120d. The bodies 111a, 111b, 111c and 111d may be provided at one end of the probe cables 112a, 112b, 112c and 112d. The plugs 120a, 120b, 120c and 120d may be male plugs and provided at the other end of the respective probe cables 112a, 112b, 112c and 112d. The probes 110a, 110b, 110c and 110d may be connected to connectors 11a, 11b, 11c and 11d with the plugs 120a, 120b, 120c and 120d.

[0015] In one embodiment, indicators 113a, 113b, 113c and 113d are mounted on a predetermined portion of the probe bodies 111a, 111b, 111c and 111d. Each of the indicators may be embodied with a liquid crystalline device, a thin film transistor liquid crystalline device, an organic electro luminescence display, a 7-segment light emitting device display or the like. Each of the indicators may be mounted on a predetermined portion of the corresponding probe body. Each of the probes 111a, 111b, 111c and 111d may include a driver for driving the indicators 113a, 113b, 113c and 113d so as to be operable to indicate an identification symbol for identifying connection between the probe and the connector. The identification symbols may include a predetermined serial number indicating the connector connected to the corresponding probe.

[0016] FIG. 3 is a cross-sectional view of a plug of the probe and a connector mounted on a body of an ultrasound diagnostic system. As illustrated in FIG. 3, the plug 120 may include a plurality of pins 121. The connector 111 may include a groove 131 which is to be fitted with the plug housing and a socket 130. The socket 130, which is a female socket, may have a plurality of openings 132 corresponding to the respective pins 121 of the plug 121 at an inside one plane of the groove 131. Preferably, the socket 130 may be provided at a plane facing the plug 120.

[0017] When the plug 120 is connected to the socket 130 of the connector 111, the connector identification signals generated from the identifier signal generator 140 are transmitted to the probe 110 through the probe cable 112. The driver in the probe 110 may drive the indicator to indicate the identification symbol based on the connector identification signals. The probe 110 may further include a decoder to decode the identification signals.

[0018] FIG. 4 is a schematic diagram showing an exemplary embodiment of the plug and the socket with a signal detector and a signal transmitter mounted. As illustrated in

FIG. 4, a signal transmitter 133 may be mounted at an inside of the groove 131 of the connector 111. The signal transmitter 133 may be built at an edge side of connector housing such that the reception of the plug 120 is not obstructed. The connector identification signals generated from the identification signal generator may be transmitted by the signal transmitter 133. The signal detector 122 may be mounted on the plug housing to be faced with the signal transmitter 133 when the pins 121 of the plug 120 are inserted into the socket 131. That is, when the plug 120 is connected to the socket 130, the signal detector 122 of the plug 120 may detect the identification signals transmitted from the signal transmitter 133. The detected identification signals are transmitted to the driver of the probe 110. Various types of the devices may be adopted as the signal transmitter and the signal detector. In one embodiment, for example, the signal transmitter may be a radio frequency (RF) tag and the signal detector may be a RF reader. Also, the signal transmitter may be a magnetic substance forming a specific magnetic field and the signal detector may be a hall sensor detecting the magnetic field of the magnetic substance.

[0019] FIG. 5 is a circuit diagram of exemplary identification signal generators in one embodiment. A plurality of binary signal generators may be adopted as the identification signal generators in one embodiment. An example of generating four identification signals is illustrated in FIG. 5. Each of the identification generators 130a, 130b, 130c and 130d may include two data lines DATA0 and DATA1. Each of the identification generators may generate binary connector identification signals such as '00', '01', '10' and '11' according to connection of the data lines to ground or 5V power. The binary signals of '00', '01', '10' and '11', which are generated from the identification generators 130a, 130b, 130c and 130d, may be transmitted to the signal processing unit of the probe. However, the identification signal generator mentioned above may not be limited thereto. Any device capable of providing identification signals of the connectors to the decoder of the probe may be adopted. Although two data lines are used in one embodiment, the number of the data lines is certainly not limited thereto. The number of the data lines may be modified according to the number of the connectors.

[0020] The decoder in the probe may be operable to decode the identification signals uniquely identifying one of the connectors. Further, the driver may be operable to drive the indicator to the identification symbol indicating the connected connector. This is so that the user can visually identify the connector connected to the corresponding probe. For example, the indicator may indicate the connected connector with a decimal number.

[0021] The respective probe cables 112a, 112b, 112c and 112d may be coated with different colors of fluorescent materials or phosphorescence materials so as to be easily identified at a dark place in another embodiment.

[0022] As mentioned above, since the indicators indicating whether the probe is connected to the body of the ultrasound image device are provided at the respective probes in accordance with one embodiment, the user may easily identify the connection of the probe with the connector of the body. Also, since the probe cables are coated with different colors of the fluorescent materials or the phosphorescence materials, the user may easily arrange the probe cables at the dark place. Further, the probe cables may be coated with different coating

patterns. For example, a check pattern, a stripe pattern, a dot pattern and the like may be adopted to the respective probe cables.

[0023] In accordance with one embodiment of the present invention, there is provided a ultrasound diagnostic system comprising: a plurality of connectors, each having a signal transmitter to transmit an identification signal uniquely identifying the respective connector; and a plurality of probes each having a signal detector and an indicator assembly, wherein in response to a connection of each of the probes to one of the connectors, the signal detector of the respective probe is configured to detect the identification signal identifying said one of the connectors, and wherein the indicator assembly of the respective probe is configured to provide an identification of said one of the connectors based on the identification signal.

[0024] Any reference in this specification to "one embodiment," "an embodiment," "example embodiment," etc. means that a particular feature, structure or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure or characteristic in connection with other ones of the embodiments.

[0025] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, numerous variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. An ultrasound diagnostic system, comprising:
 - a plurality of connectors each having a signal transmitter to transmit an identification signal uniquely identifying the respective connector; and
 - a plurality of probes each having a signal detector and an indicator assembly, wherein in response to a connection of each of the probes to one of the connectors, the signal detector of the respective probe is configured to detect the identification signal identifying said one of the connectors, and wherein the indicator assembly of the respective probe is configured to provide an identification of said one of the connectors based on the identification signal.
2. The ultrasound diagnostic system of claim 1, wherein each of the connectors is configured with a groove and the signal transmitter is installed within the groove, wherein each of the probe includes a body, a probe cable and a plug installed at one end of the cable, and wherein the signal detector is mounted on the plug and the indicator assembly including an indicator and a driver for driving the indicator is installed in the body.
3. The ultrasound diagnostic system of claim 2, wherein the identification signal generator includes a plurality of data

lines, wherein each of the data lines is configured to generate a binary signal, and wherein the indicator assembly further includes a decoder for decoding the identification signals.

4. The ultrasound diagnostic system of claim 3, wherein the signal transmitter is a radio frequency (RF) tag and the signal detector is a RF reader.

5. The ultrasound diagnostic system of claim 3, wherein the signal transmitter is a magnetic substance forming a specific magnetic field, and wherein the signal detector is a hole sensor for detecting the magnetic field of the magnetic substance.

6. The ultrasound diagnostic system of claim 3, wherein the indicator is selected from a group consisting of a liquid crystalline device, a thin film transistor liquid crystalline device, an organic electro luminescence display and a 7-segment light emitting device display.

7. The ultrasound diagnostic system of claim 2, wherein the cable is coated with different colors of fluorescent materials or phosphorescence materials.

8. The ultrasound diagnostic system of claim 2, wherein the cable is coated with different coating patterns.

* * * * *

专利名称(译)	超声诊断系统		
公开(公告)号	US20090069690A1	公开(公告)日	2009-03-12
申请号	US12/206641	申请日	2008-09-08
[标]申请(专利权)人(译)	SHIN SOO HWAN KOO KYO JONG 宋荣SEUK		
申请(专利权)人(译)	SHIN SOO HWAN KOO KYO JONG 宋荣SEUK		
当前申请(专利权)人(译)	SHIN SOO HWAN KOO KYO JONG 宋荣SEUK		
[标]发明人	SHIN SOO HWAN KOO KYO JONG SONG YOUNG SEUK		
发明人	SHIN, SOO HWAN KOO, KYO JONG SONG, YOUNG SEUK		
IPC分类号	A61B8/14		
CPC分类号	A61B8/00 A61B8/4405 G01S7/52079 A61B8/4438 A61B8/4411		
优先权	1020070103117 2007-10-12 KR 1020070091154 2007-09-07 KR		
其他公开文献	US8033174		
外部链接	Espacenet USPTO		

摘要(译)

超声波诊断系统技术领域超声诊断系统包括多个连接器。每个连接器具有信号发送器，以发送唯一识别相应连接器的识别信号。超声诊断系统还包括多个探针。每个探针都有一个信号检测器和一个指示器组件。响应于每个探针与一个连接器的连接，相应探针的信号检测器被配置为检测识别所述一个连接器的识别信号，并且相应探针的指示器组件被配置为提供识别。基于识别信号的所述连接器之一。

