



US 20100274131A1

(19) **United States**(12) **Patent Application Publication**
Barnes et al.(10) **Pub. No.: US 2010/0274131 A1**(43) **Pub. Date: Oct. 28, 2010**(54) **BALANCE BODY ULTRASOUND SYSTEM**(75) Inventors: **Stephanie A. Barnes**, Bothell, WA (US); **Steven M. Bunce**, Sedro Woolley, WA (US); **Bryan S. Cabatic**, Seattle, WA (US); **Blake W. Little**, Bothell, WA (US); **Bill Purdue**, Mill Creek, WA (US); **John D. Schultz**, Bothell, WA (US); **Kari L. Rice**, Bothell, WA (US)

in-part of application No. 08/672,782, filed on Jun. 28, 1996, now Pat. No. 5,722,412, said application No. 08/863,937 is a continuation-in-part of application No. 08/672,782, filed on Jun. 28, 1996, now Pat. No. 5,722,412.

Publication Classification(51) **Int. Cl.**
A61B 8/14 (2006.01)(52) **U.S. Cl.** **600/441**

Correspondence Address:

SonoSite, Inc. / Fulbright & Jaworski, L.L.P.
2200 Ross Avenue, Suite 2800
Dallas, TX 75201 (US)(57) **ABSTRACT**(73) Assignee: **SonoSite, Inc.**, Bothell, WA (US)(21) Appl. No.: **12/771,982**(22) Filed: **Apr. 30, 2010****Related U.S. Application Data**

(63) Continuation of application No. 10/099,474, filed on Mar. 15, 2002, which is a continuation-in-part of application No. 10/062,179, filed on Feb. 1, 2002, now Pat. No. 6,962,566, which is a continuation of application No. 09/840,002, filed on Apr. 19, 2001, now Pat. No. 6,569,101, which is a continuation-in-part of application No. 09/630,165, filed on Aug. 1, 2000, now Pat. No. 6,416,475, which is a continuation-in-part of application No. 09/167,964, filed on Oct. 6, 1998, now Pat. No. 6,135,961, which is a continuation-in-part of application No. 08/863,937, filed on May 27, 1997, now Pat. No. 5,817,024, which is a continuation-in-part of application No. 08/826,543, filed on Apr. 3, 1997, now Pat. No. 5,893,363, which is a continuation-

The present invention relates to a hand held ultrasound system having a balance body, a transducer assembly connected to said balance body via a communication means and a plurality of control elements arranged in an ergonomic fashion on said balance body, such that a user may hold said system and operate at least one of said control elements with the same hand. In particular a medical ultrasound system comprising a balance body incorporating system electronics, a power supply and a user interface wherein the user interface comprises a D-controller and a touch screen and a transducer assembly attached to the balanced body by a cable. The present invention relates to a hand held ultrasound system having a balance body, a transducer assembly connected to said balance body via a communication means and a plurality of control elements arranged in an ergonomic fashion on said balance body, such that a user may hold said system and operate at least one of said control elements with the same hand. In particular a medical ultrasound system comprising a balance body incorporating system electronics, a power supply and a user interface wherein the user interface comprises a D-controller and a touch screen and a transducer assembly attached to the balanced body by a cable.

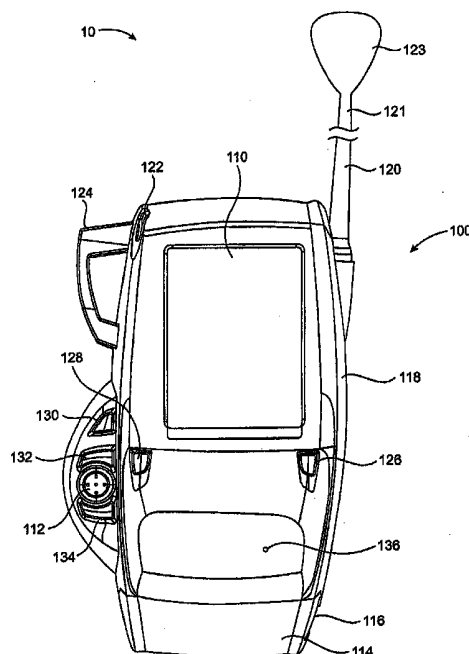


FIG. 1A

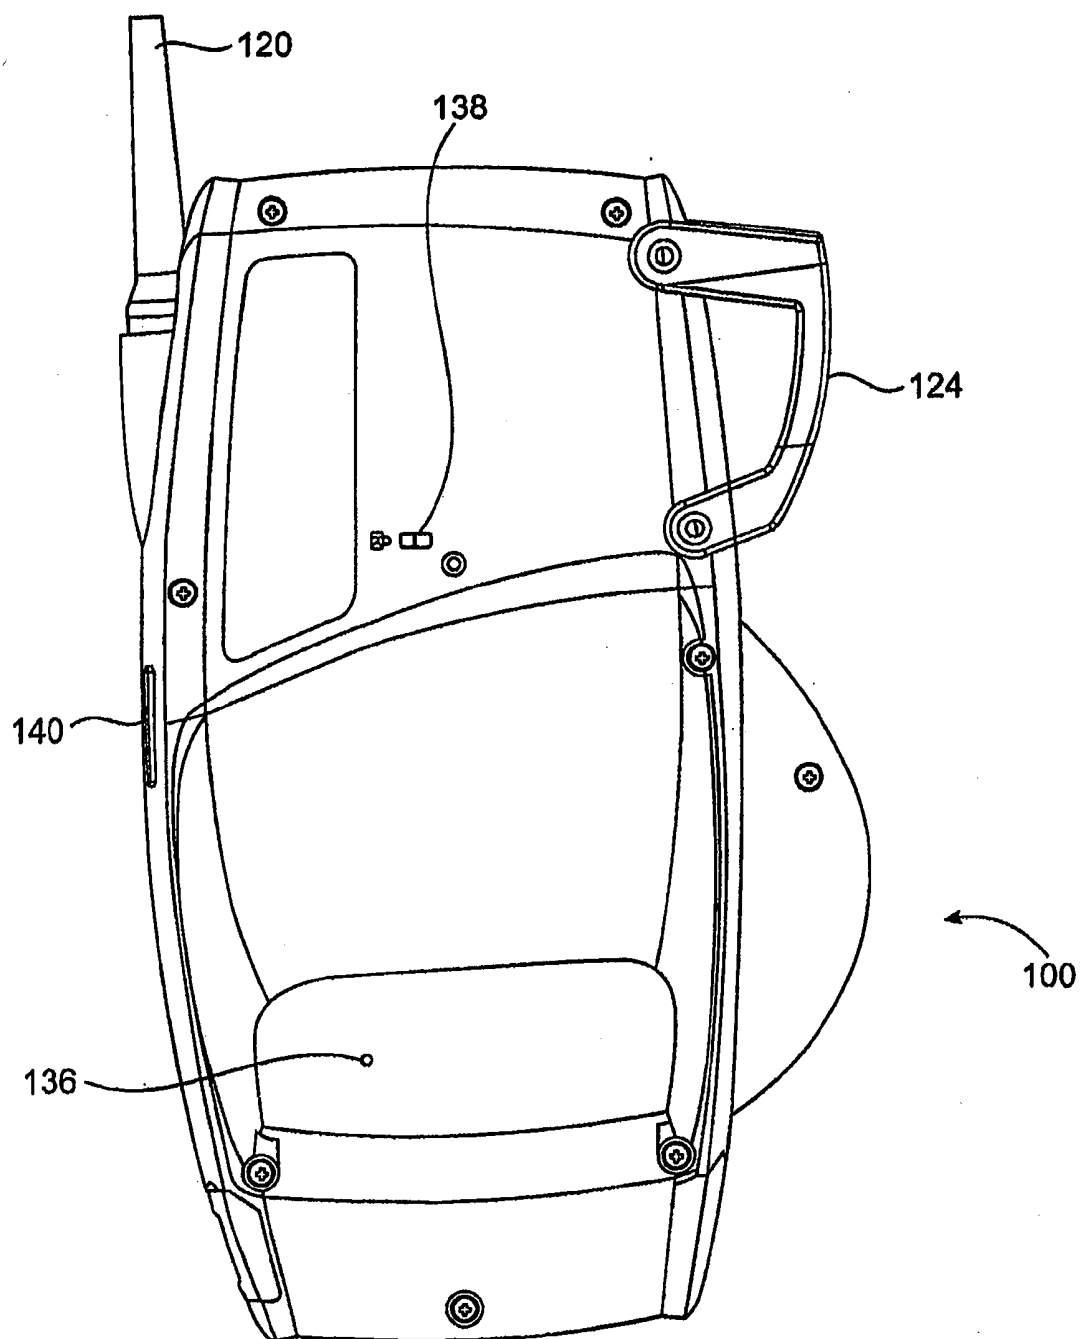


FIG. 1B

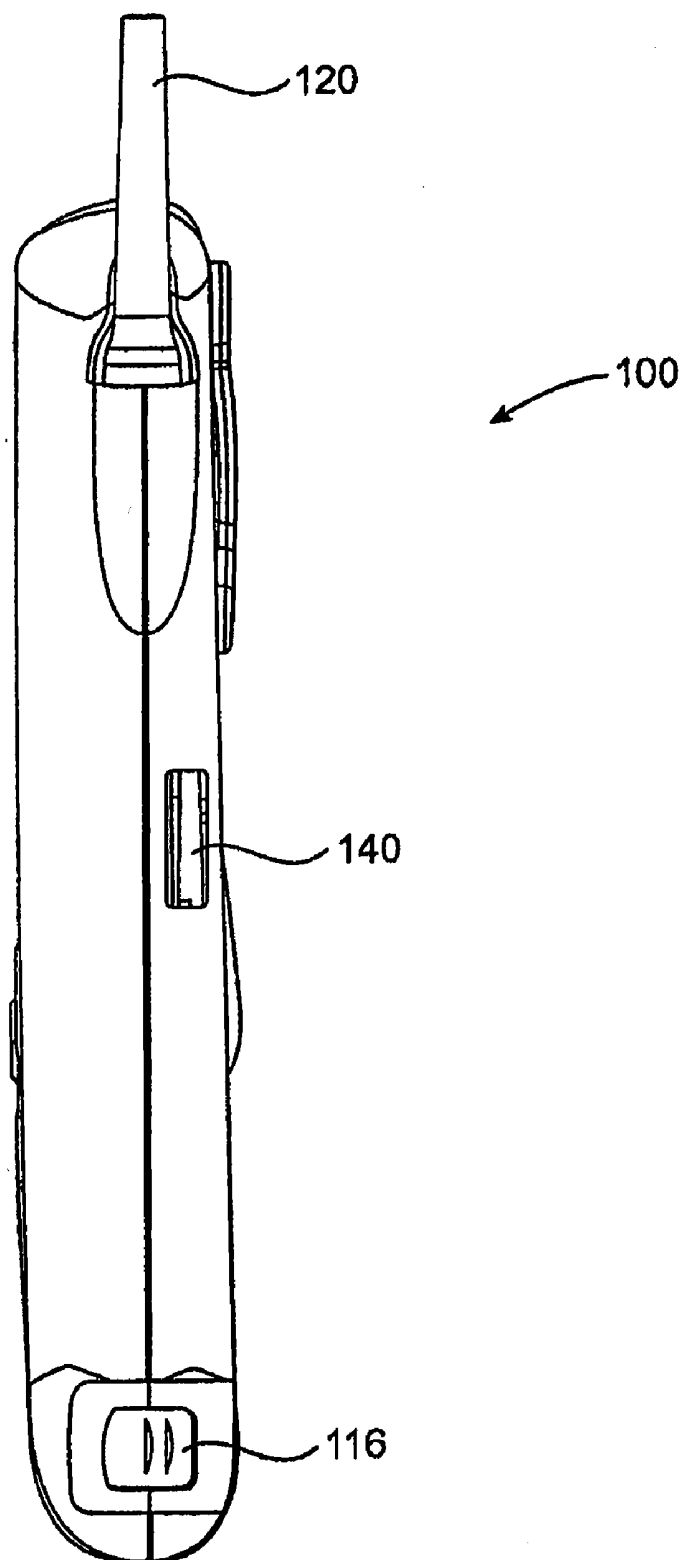


FIG. 1C

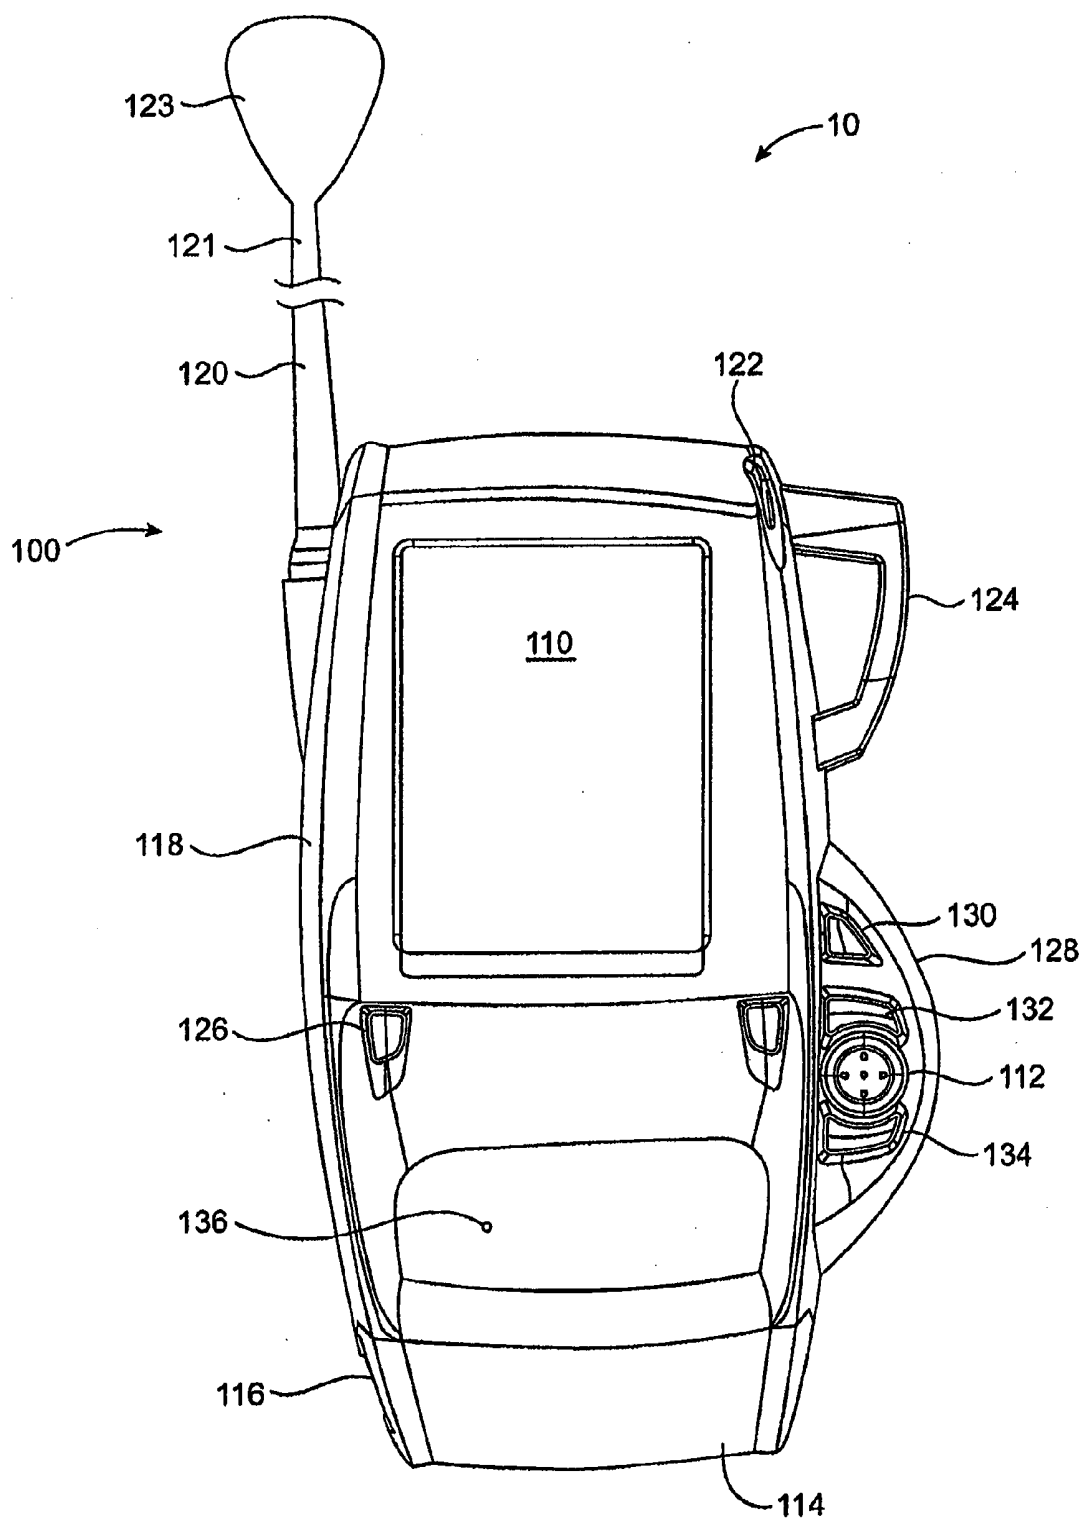


FIG. 1D

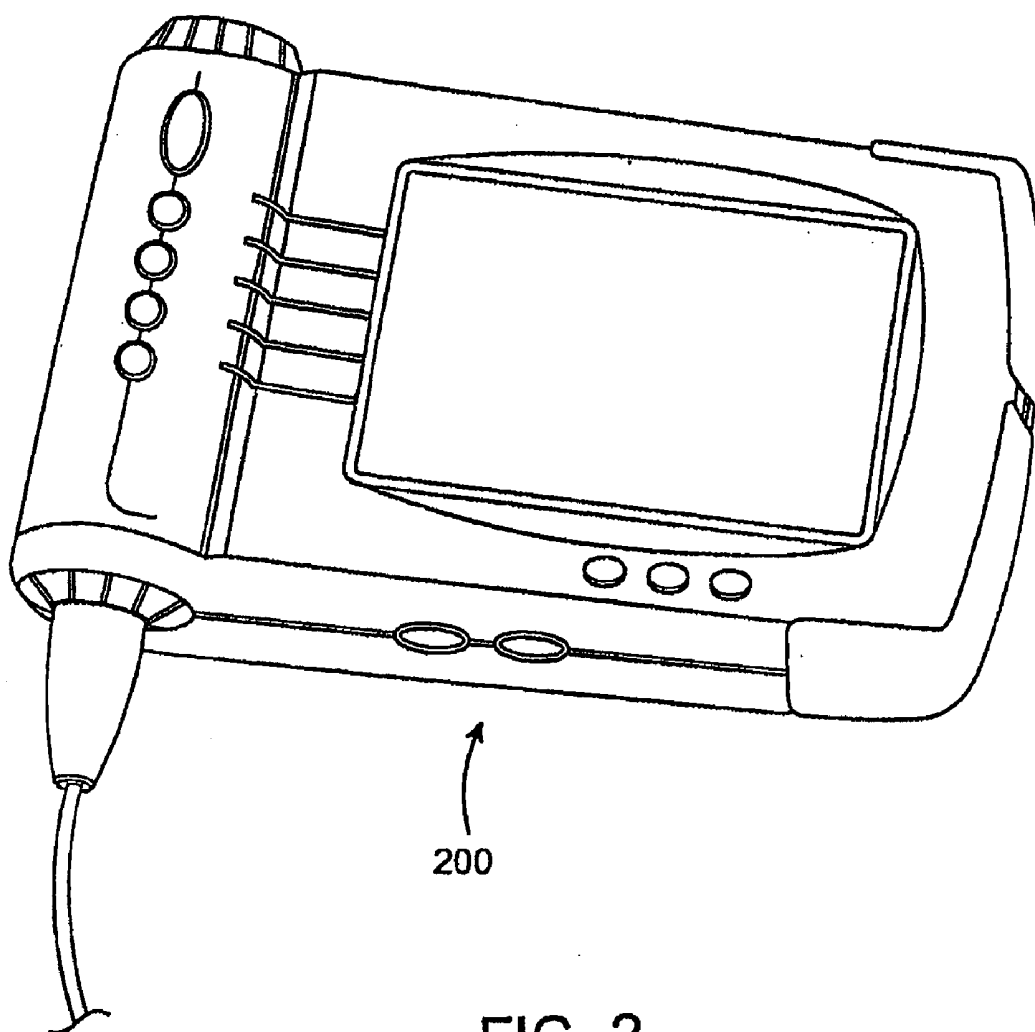


FIG. 2

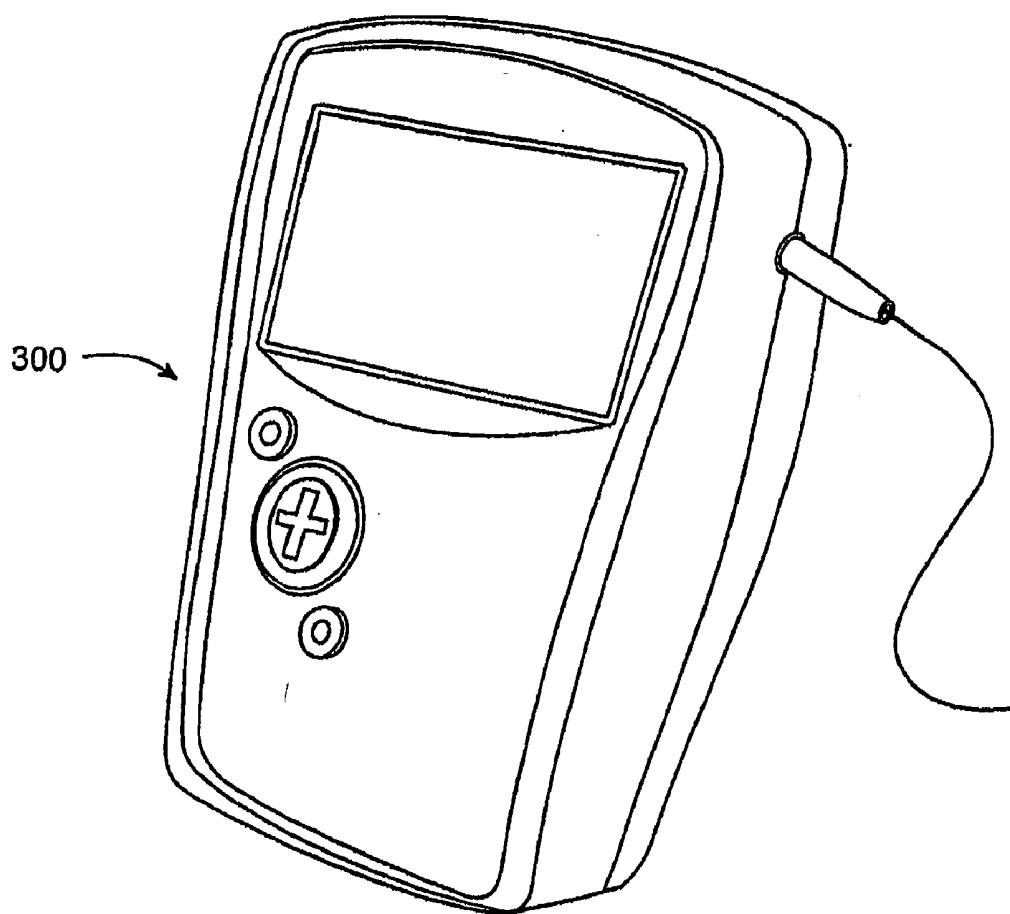


FIG. 3

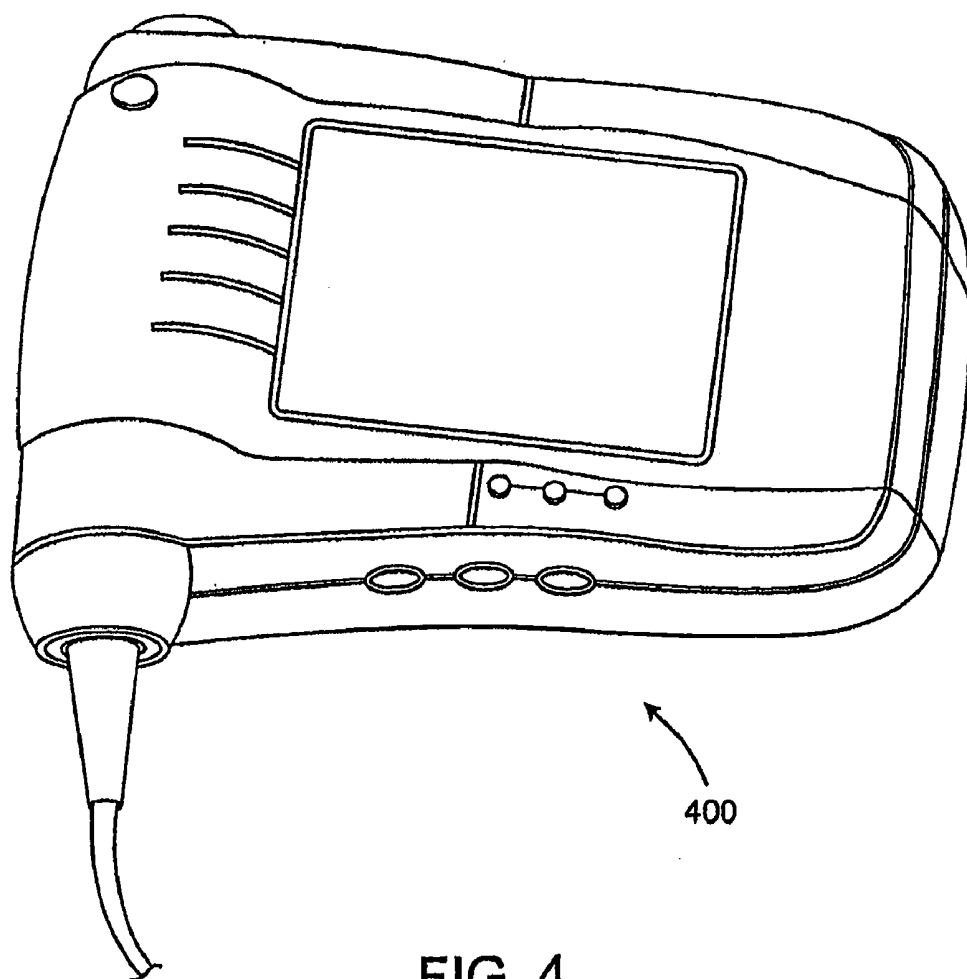


FIG. 4

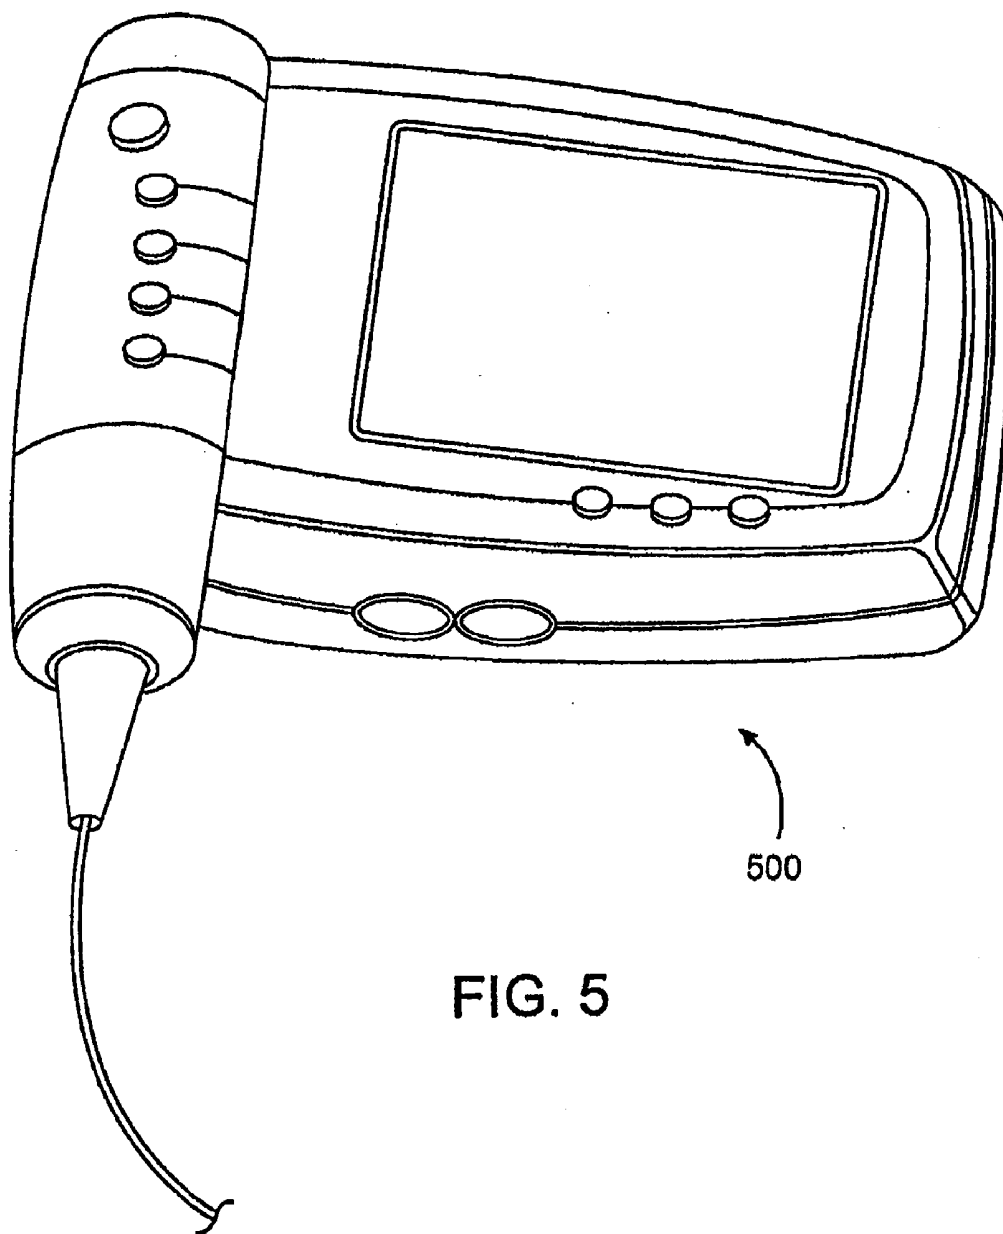


FIG. 5

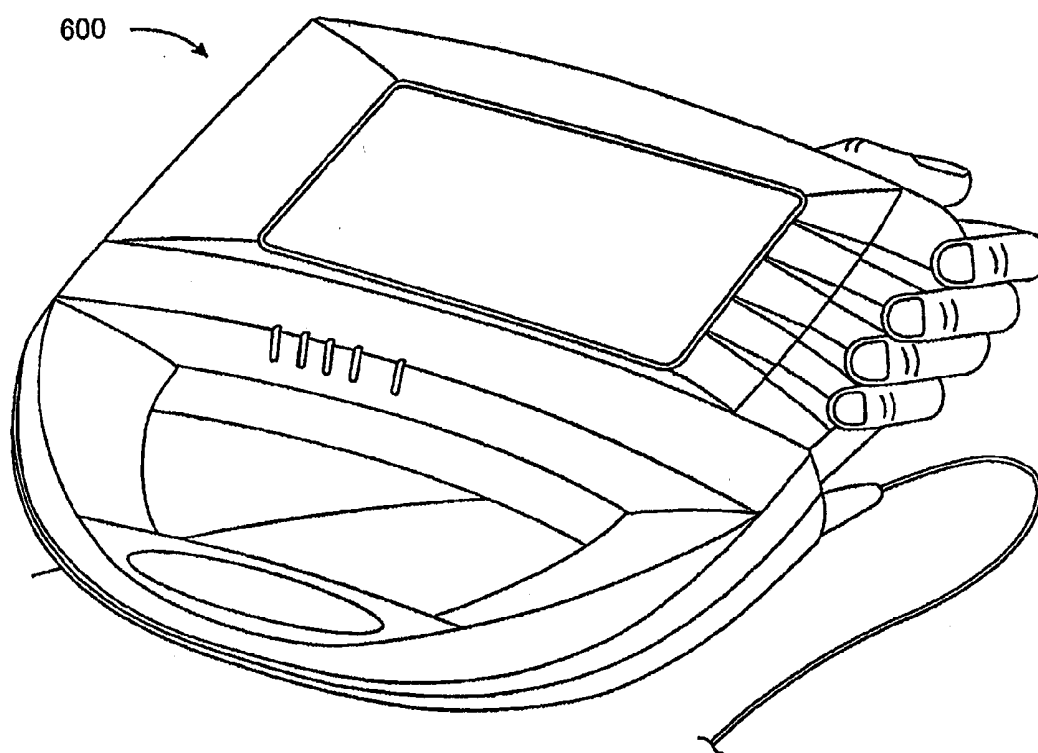


FIG. 6

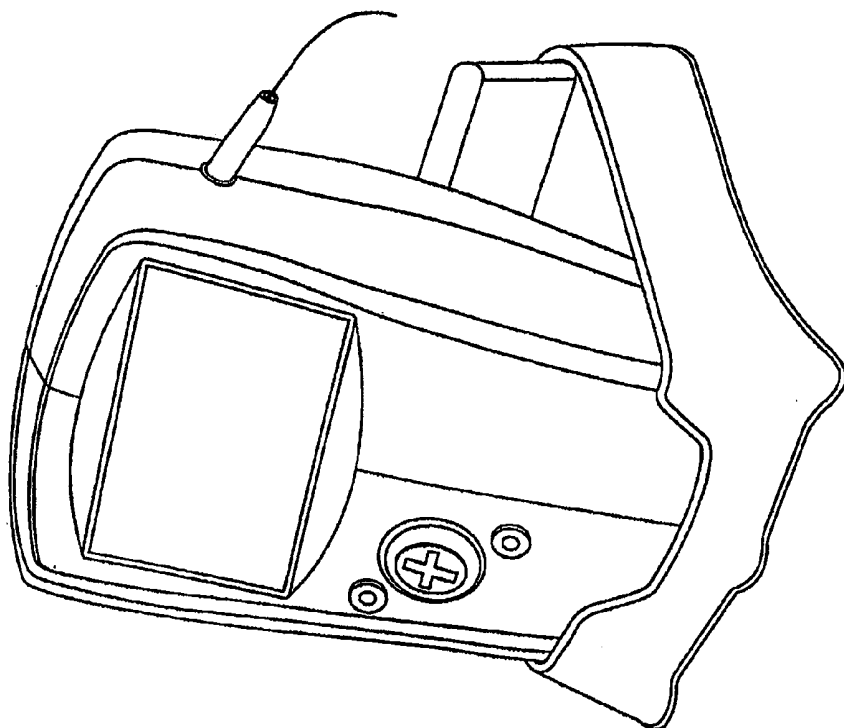


FIG. 7B

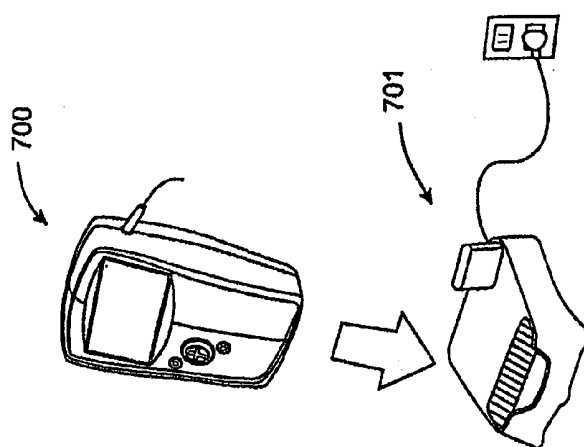


FIG. 7A

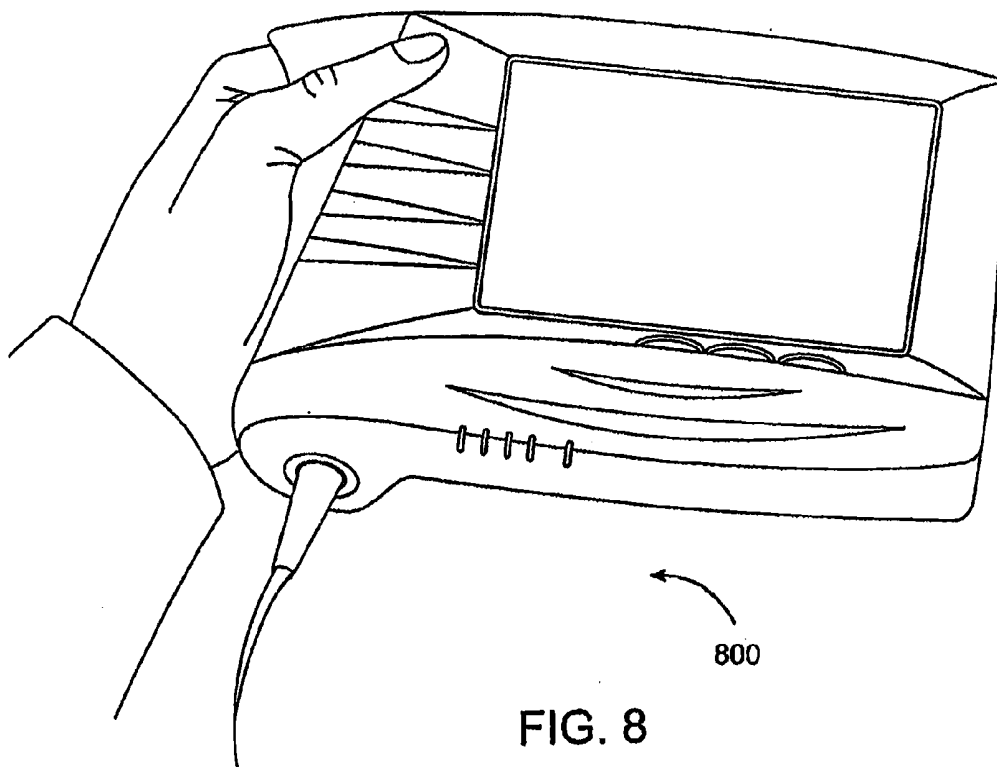


FIG. 8

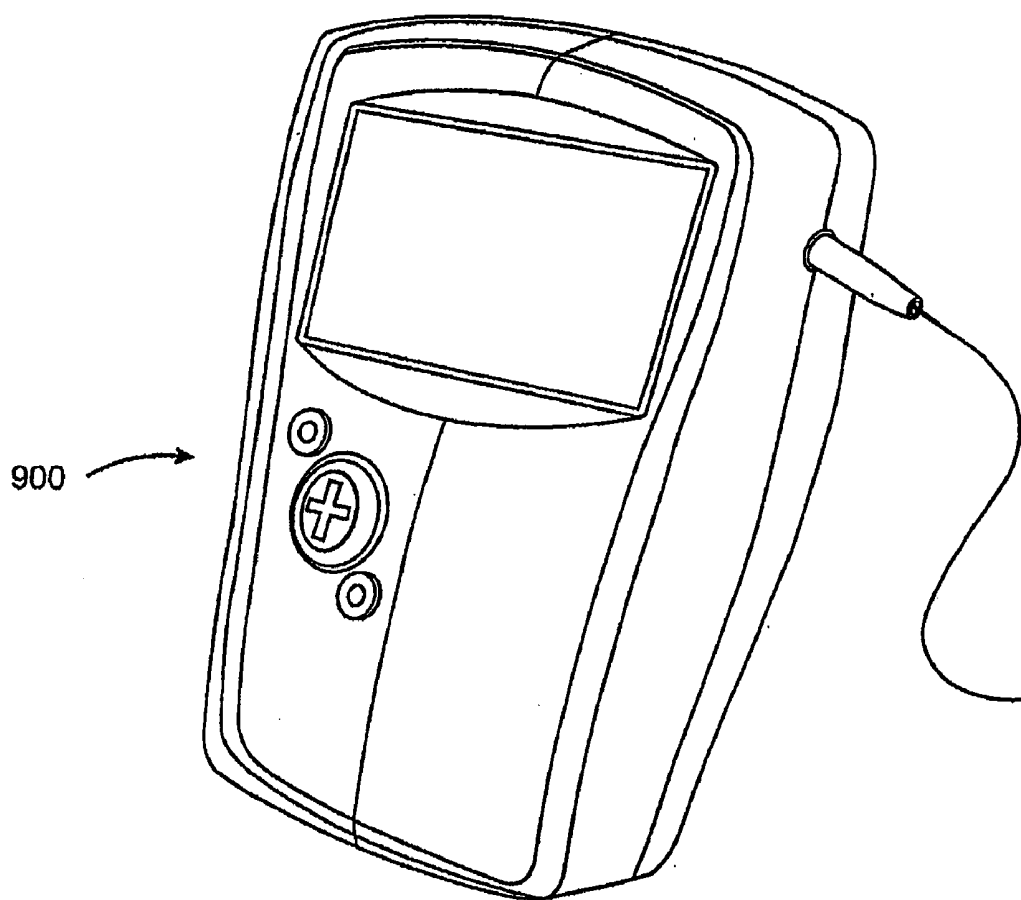


FIG. 9

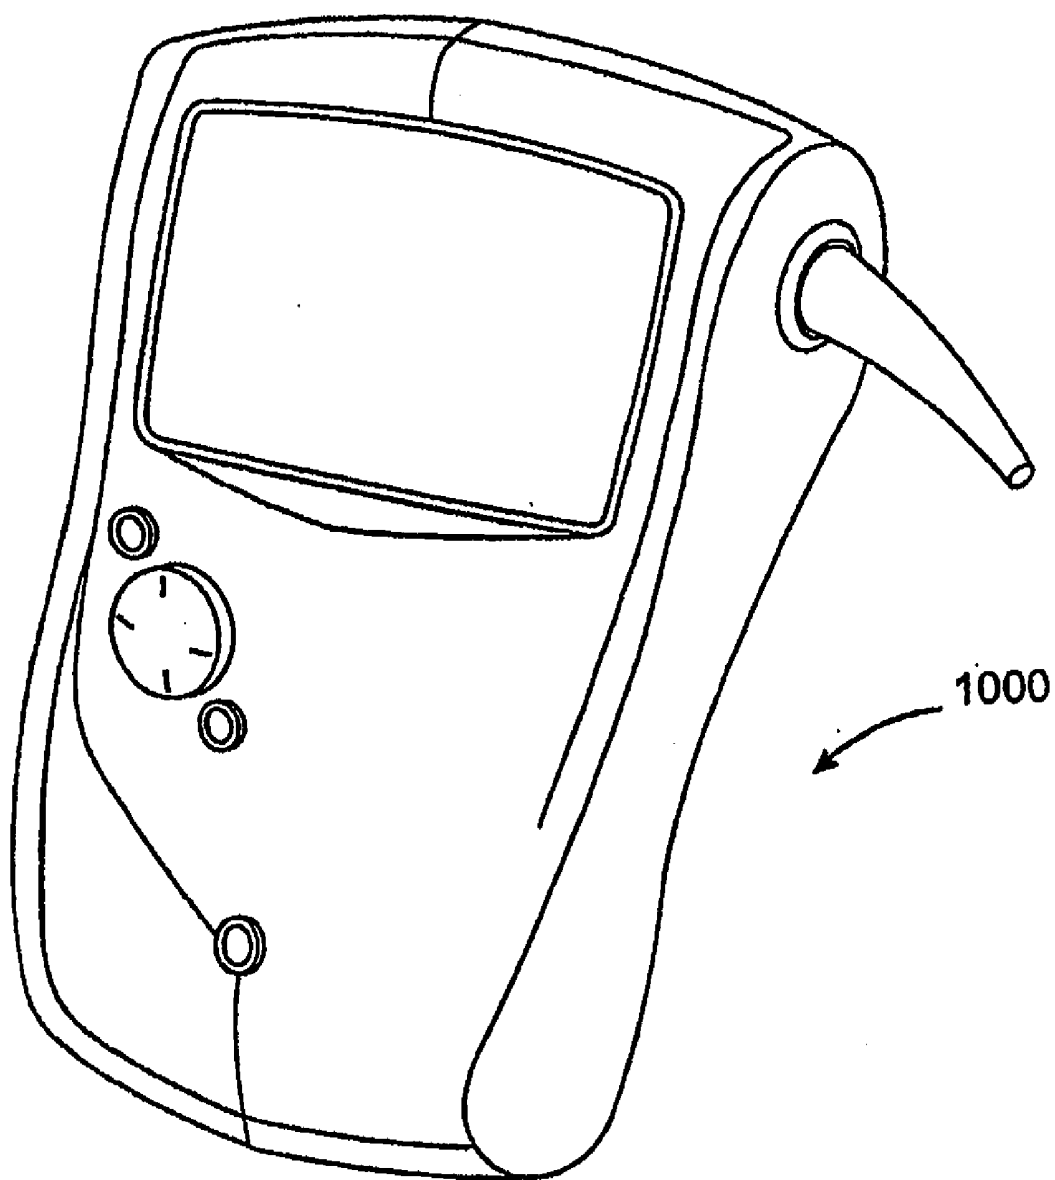


FIG. 10

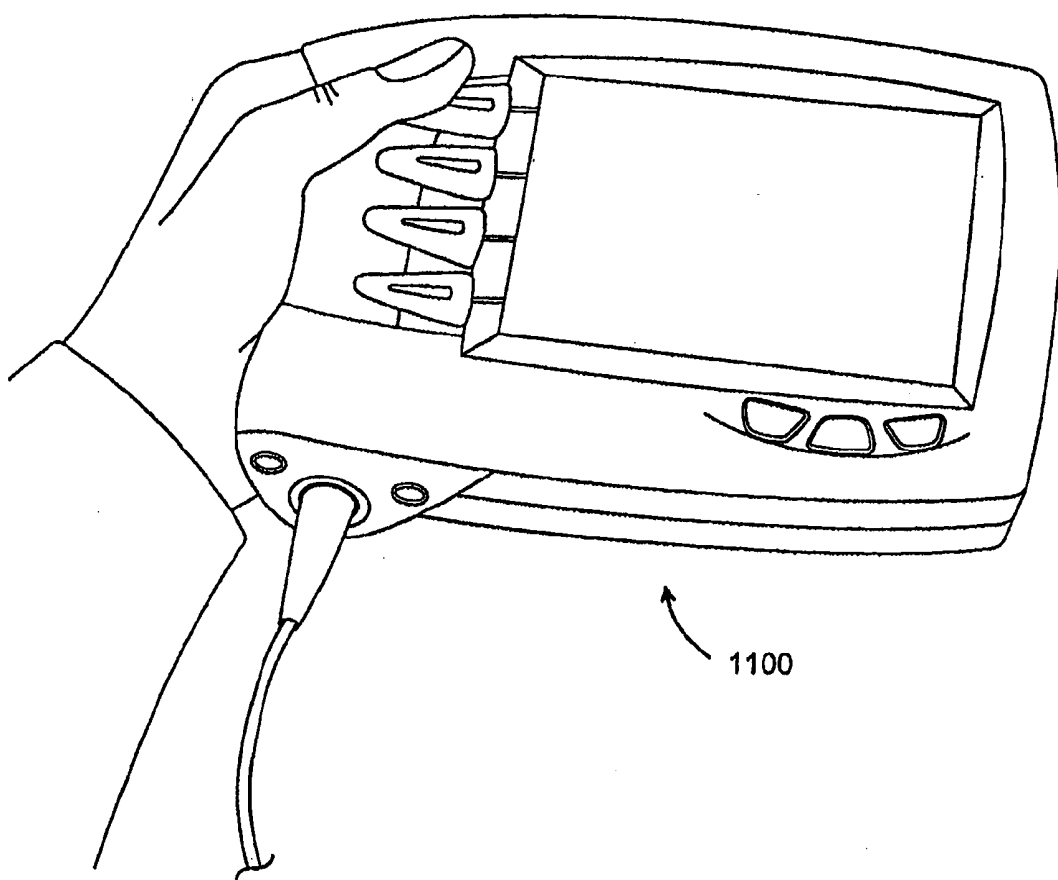
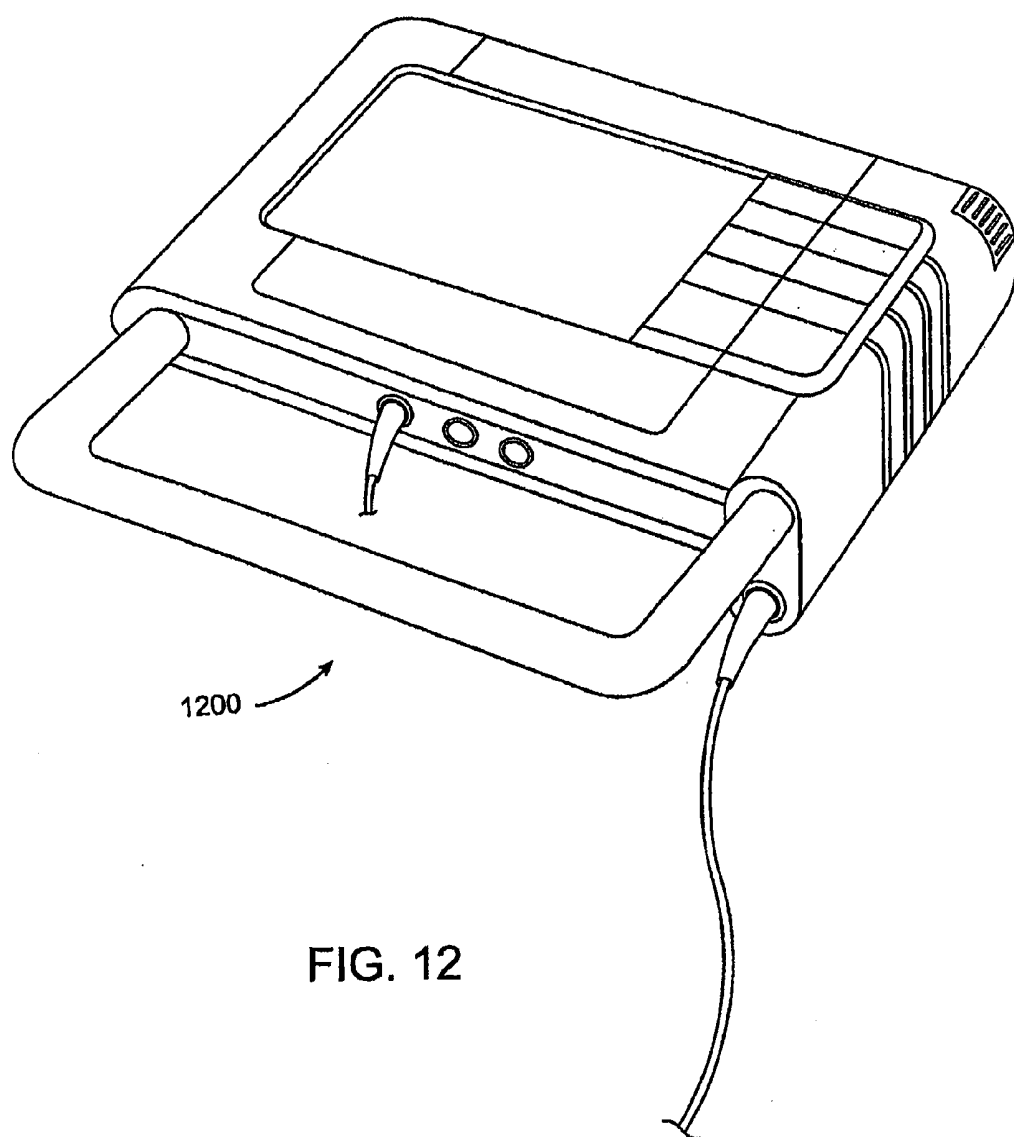


FIG. 11



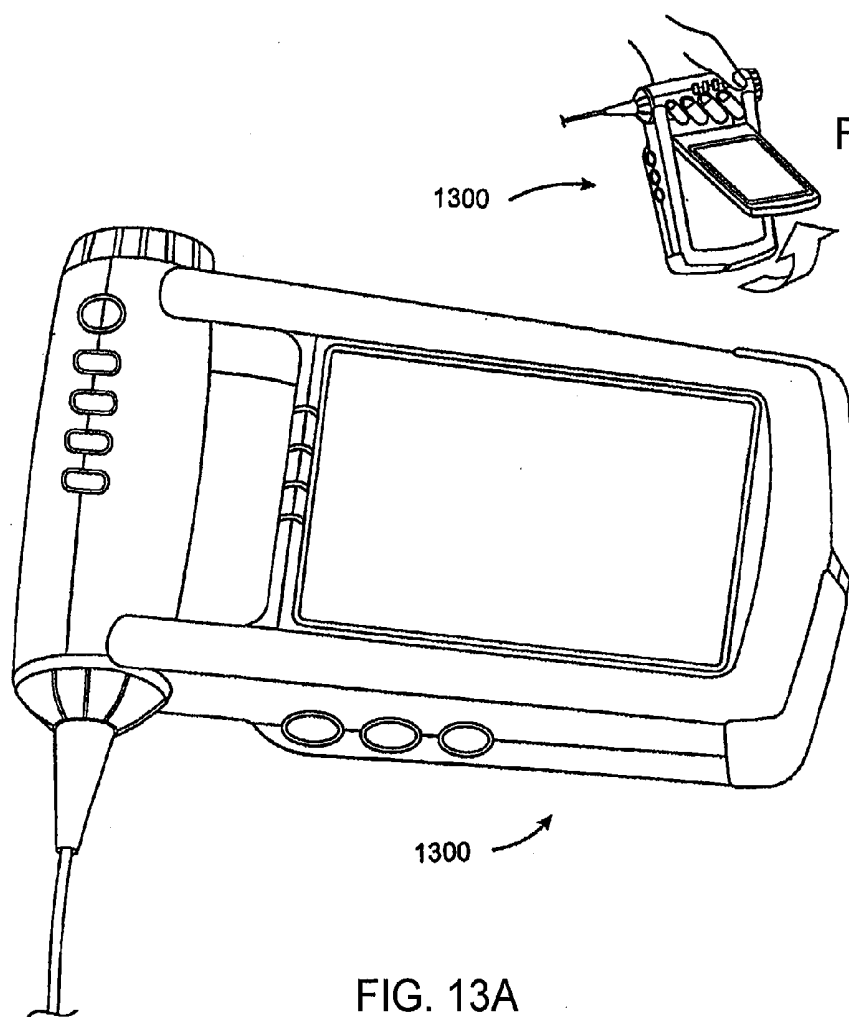


FIG. 13B

FIG. 13A

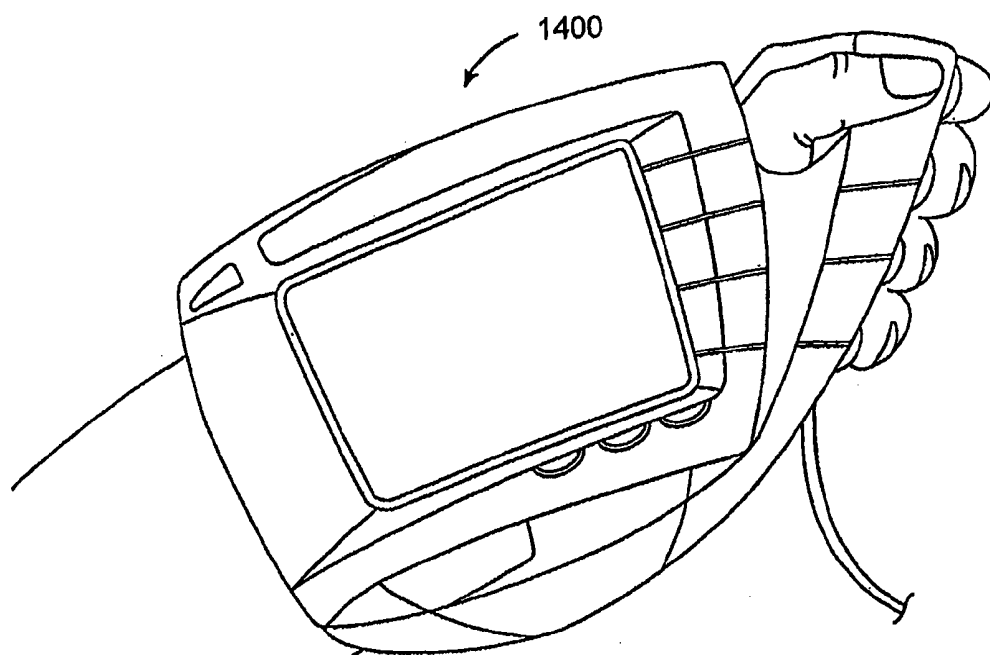


FIG. 14B

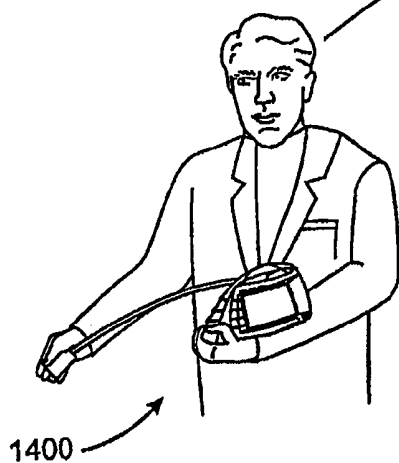


FIG. 14A

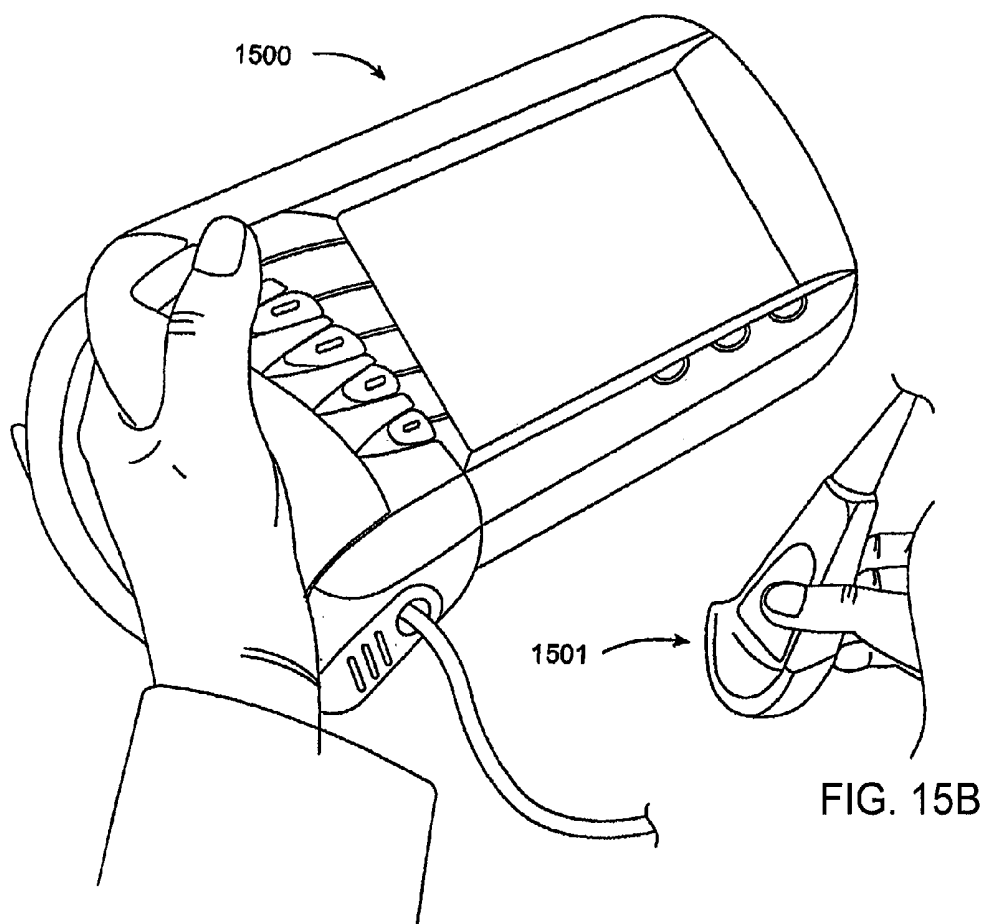


FIG. 15A

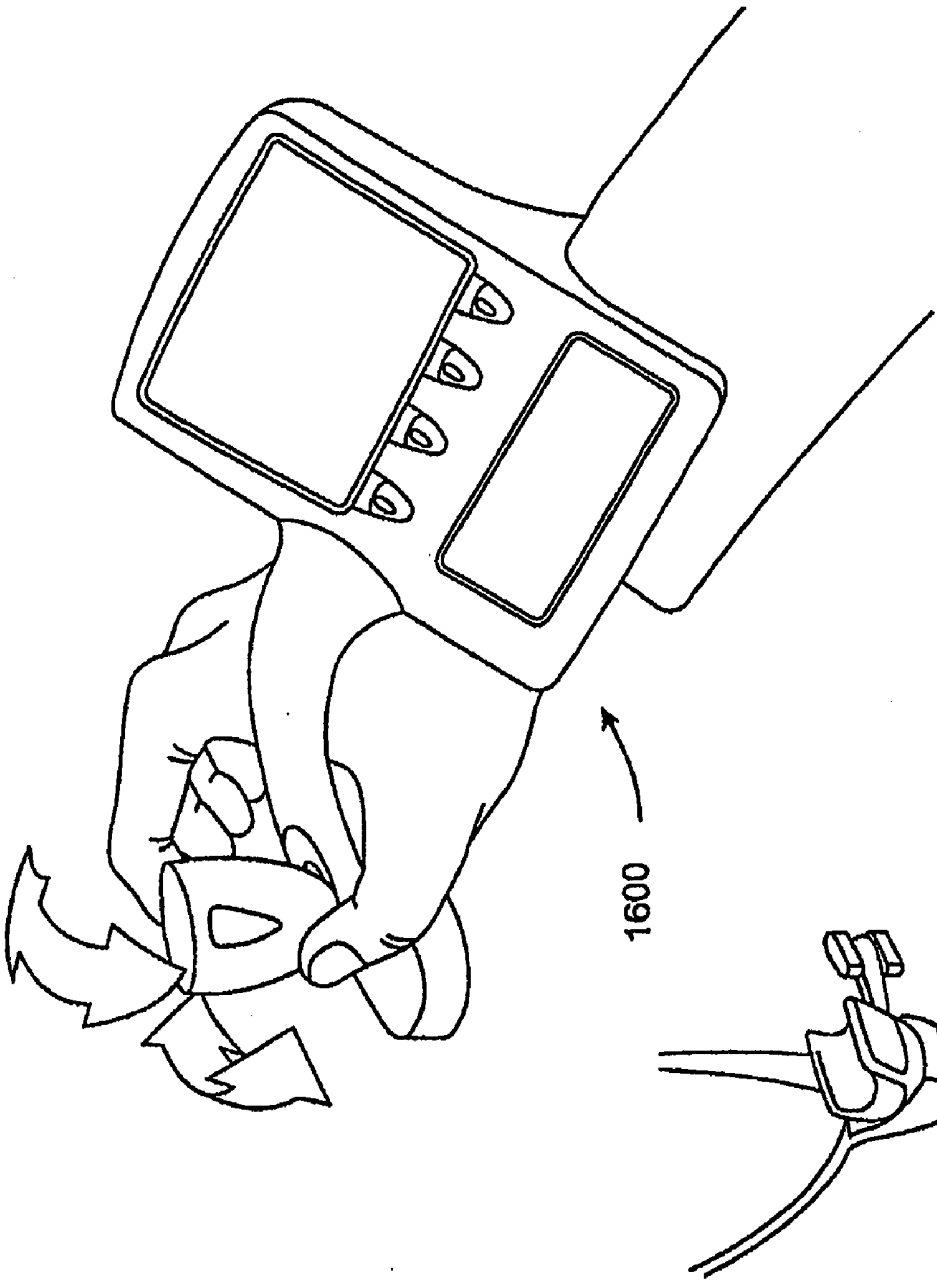


FIG. 16A

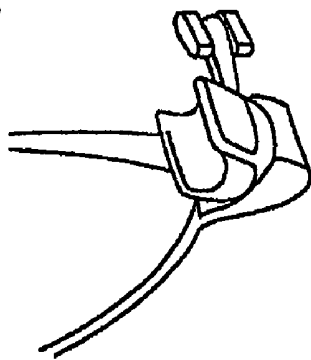
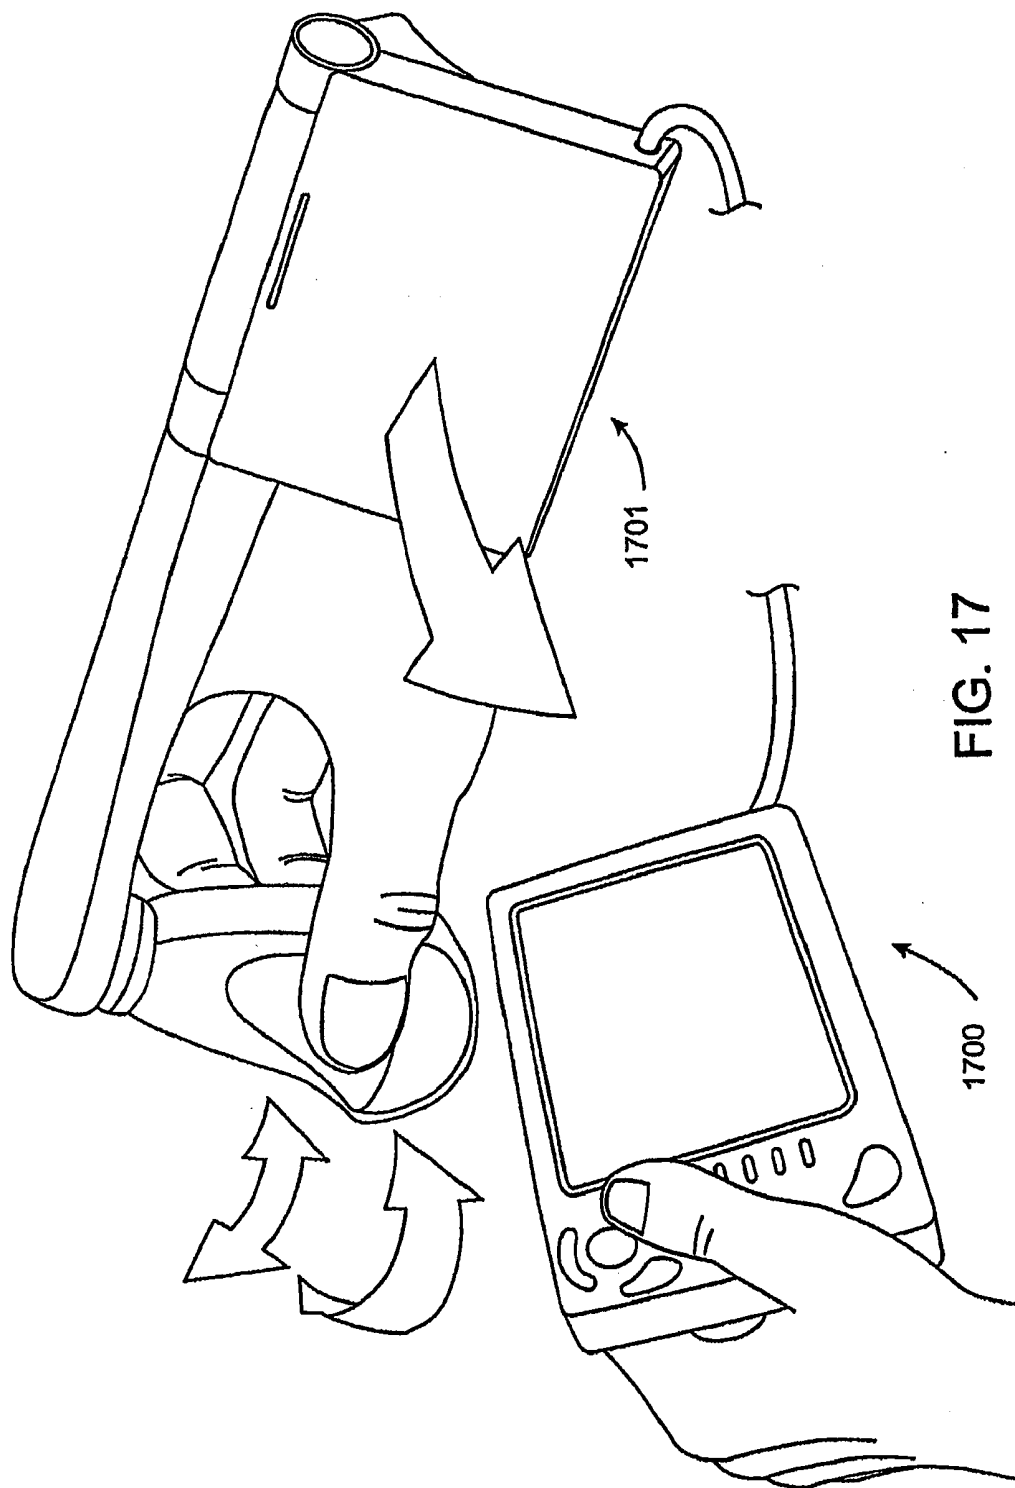


FIG. 16B



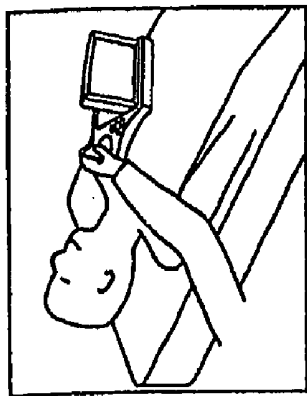


FIG. 18C

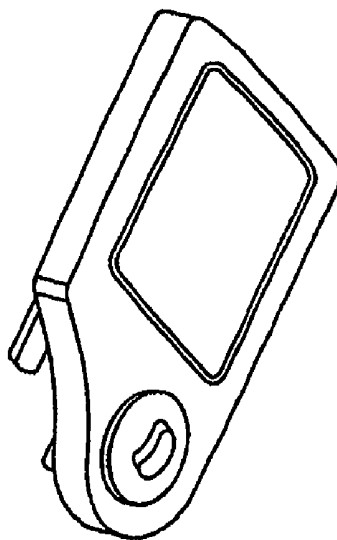


FIG. 18B

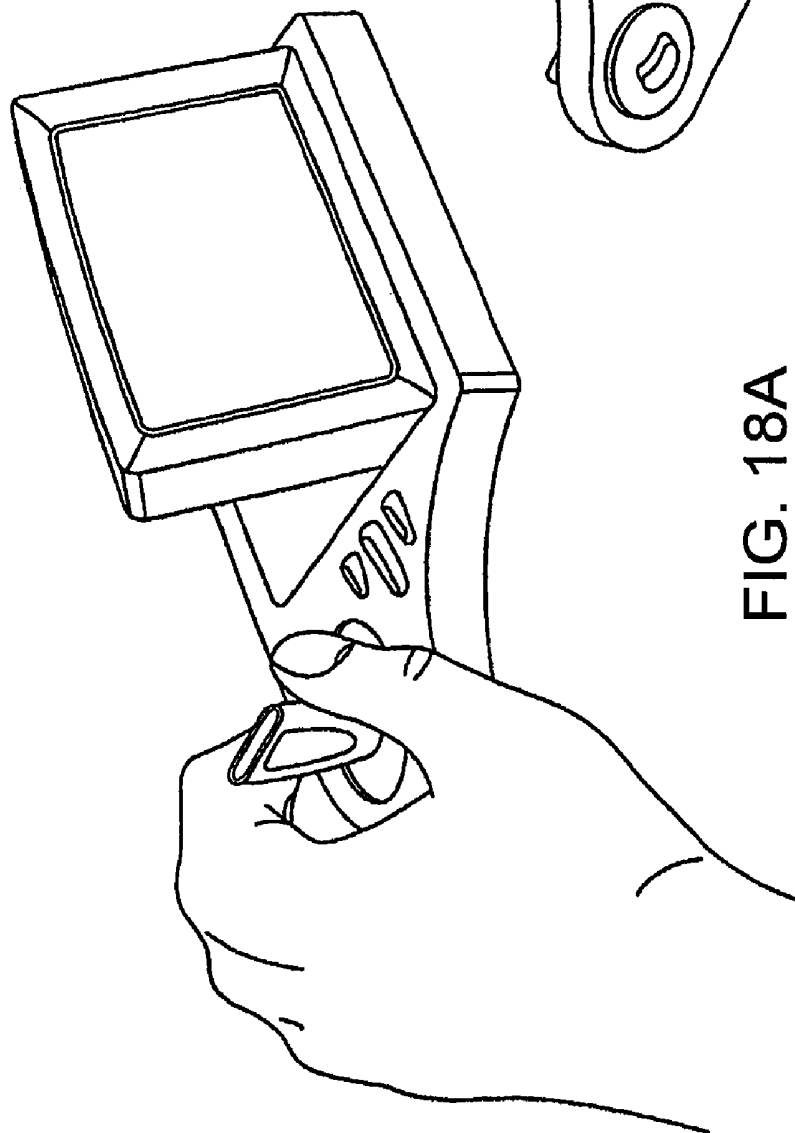


FIG. 18A

1800


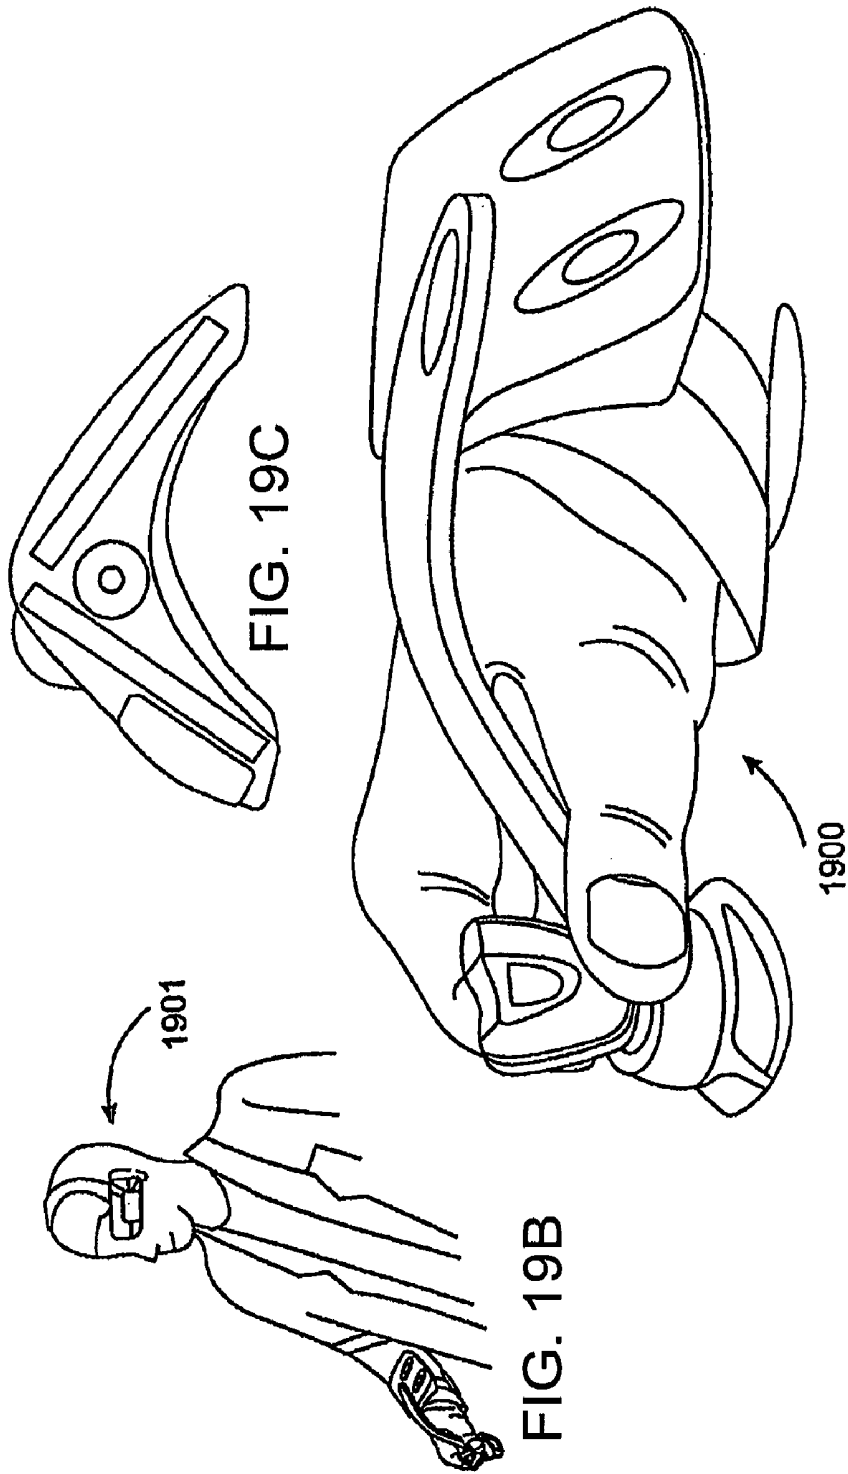


FIG. 19A

FIG. 19B

FIG. 19C

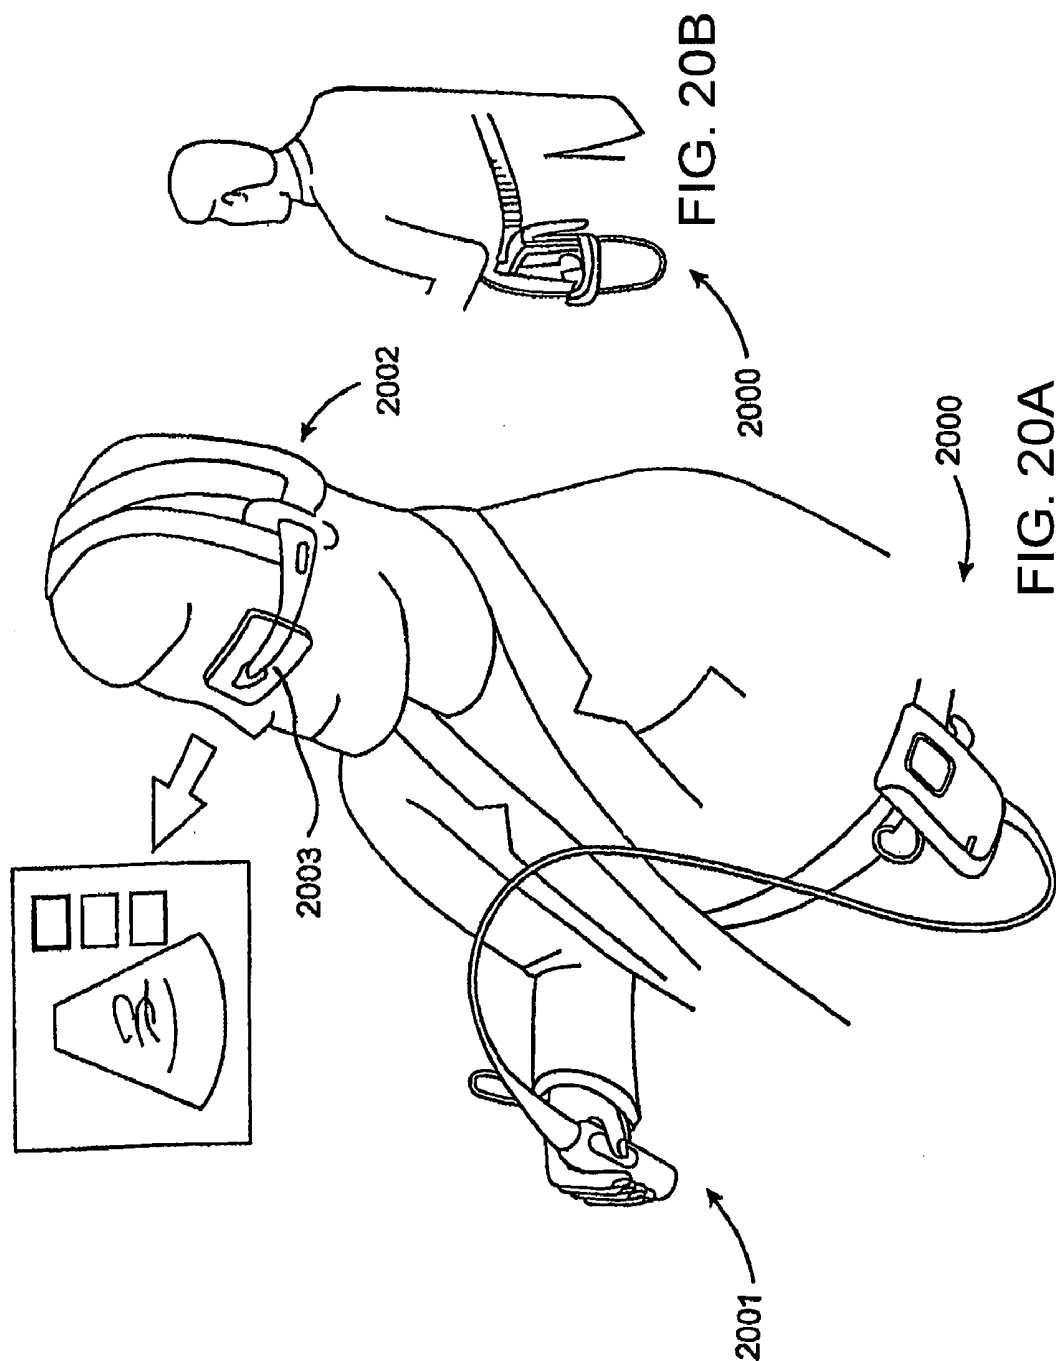

BALANCE BODY ULTRASOUND SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 10/099,474, filed Mar. 15, 2002; which is a continuation-in-part of U.S. application Ser. No. 10/062,179, filed Feb. 1, 2002, now U.S. Pat. No. 6,962,566; which is a continuation of U.S. application Ser. No. 09/840,002, filed Apr. 19, 2001, now U.S. Pat. No. 6,569,101; and U.S. application Ser. No. 10/099,474 is also a continuation-in-part of U.S. application Ser. No. 09/630,165, filed Aug. 1, 2000, now U.S. Pat. No. 6,416,475; which is a continuation-in-part of U.S. application Ser. No. 09/167,964, filed Oct. 6, 1998, now U.S. Pat. No. 6,135,961; which is a continuation-in-part of U.S. application Ser. No. 08/863,937, filed May 27, 1997, now U.S. Pat. No. 5,817,024; and U.S. application Ser. No. 09/167,964 is also a continuation-in-part of U.S. application Ser. No. 08/826,543, filed Apr. 3, 1997, now U.S. Pat. No. 5,893,363; which is a continuation-in-part of U.S. application Ser. No. 08/672,782, filed Jun. 28, 1996, now U.S. Pat. No. 5,722,412; and U.S. patent application Ser. No. 08/863,937 is a continuation-in-part of U.S. application Ser. No. 08/672,782, filed Jun. 28, 1996, now U.S. Pat. No. 5,722,412, the full disclosures of which are all incorporated herein by reference.

TECHNICAL FIELD

[0002] This invention relates to handheld ultrasound instruments having various diagnostic modes and transducer assemblies incorporating a balance body design, or other form factor to reduce strain of use during scanning procedures.

BACKGROUND OF THE INVENTION

[0003] As is well known, modern ultrasonic diagnostic systems are large, complex instruments. Today's premium ultrasound systems, while mounted in carts for portability, continue to weigh several hundred pounds. In the past, ultrasound systems such as the ADR 4000 ultrasound system produced by SonoSite, Inc., assignee of the present invention, were smaller, desktop units about the size of a personal computer. However, such instruments lacked many of the advanced features of today's premium ultrasound systems such as color Doppler imaging and three dimensional display capabilities. As ultrasound systems have become more sophisticated they have also become bulkier.

[0004] However, with the ever increasing density of digital electronics, it is now possible to foresee a time when ultrasound systems will be able to be miniaturized to a size even smaller than their much earlier ancestors. The physician is accustomed to working with a hand held ultrasonic scanhead that is about the size of an electric razor. It would be desirable, consistent with the familiar scanhead, to be able to compact the entire ultrasound system into a scanhead-sized unit. It would be further desirable for such an ultrasound instrument to retain as many of the features of today's sophisticated ultrasound systems as possible, such as speckle reduction, color Doppler and three dimensional imaging capabilities.

[0005] The tendency has been the smaller systems also lose attributes of their larger, stationary cousins due to limitations in space and power availability, the same factors that increase portability. An inverse relation exists between size and feature set. The use of digital beamformers and digital signal processing

has allowed the expansion of capabilities of the smaller, more portable ultrasound systems relative to their predecessors. Recent releases of product like the SonoSite 180 have demonstrated the ability of manufacturers to reduce the size and weight of an ultrasound system while still delivering acceptable performance. As technology improves in both digital signal processing and power management, there remains a need for providing a hand held or portable ultrasound system that delivers acceptable performance characteristics, and at the same time is easy to use. There also remains a need for providing a method of being able to reduce costs to the users of ultrasound systems by providing an affordable and easily obtainable upgrade path to such user friendly ultrasound systems, both for hardware elements, and software.

BRIEF SUMMARY OF THE INVENTION

[0006] The present invention relates to hand held ultrasonic systems providing the advances of digital signal processing and advanced human factors usability. The various design elements of the ultrasound systems presented herein are based on a series of common system electronics detailed in previously listed co-pending applications.

[0007] At its heart, the present invention provides a hand held ultrasound system having a balance body, a transducer assembly connected to said balance body via a communication means and a plurality of control elements arranged in an ergonomic fashion on said balance body, such that a user may hold said system and operate at least one of said control elements with the same hand.

[0008] In a second embodiment of the present invention, a medical ultrasound system comprising a balance body incorporating system electronics, a power supply and a user interface wherein said user interface comprises a D-controller and a touch screen and a transducer assembly attached to said balanced body via a cable. Control of the medical ultrasound device is achieved through selecting through a series of window menus either by using the D-controller or the touch screen or a combination of both. The second embodiment is lightweight and preferably weighs less than three and a half pounds (3.50 lbs.) and the balance body can be held with the same hand that operates the D-controller. Optionally the system further comprises an I/O port for connecting to a docking station, and a handle.

[0009] In a third embodiment, we describe a lightweight diagnostic ultrasound instrument comprising a body having a power supply, a user interface for controlling the instrument, a display screen, and a system electronics package capable of a plurality of diagnostic ultrasound modes, said body weighing less than three pounds; a transducer assembly comprising a digital beam former, an A/D converter circuit, and a transducer array, the transducer assembly weighing less than one pound; and a wire connecting said body and said transducer assembly, the wire having a path for feeding power from the power supply to the transducer assembly, and a signal path for transmitting digital signals between the system electronics and the transducer assembly.

[0010] In a fourth embodiment we describe a wireless diagnostic ultrasound system comprising; a first body having system electronics, a user interface having a display screen and at least one control element, a first wireless transmit/receive element and a first power supply, said first body weighing less than two pounds; and a second body having a digital beam former, an A/D converter circuit, a transducer

array, a second power supply, and a second transmit/receive element such that the digital beam former can be controlled by the system electronics via the first and second transmit/receive elements, said second body weighing less than one pound.

[0011] In still another embodiment, we describe a light-weight medical ultrasound system comprising a first body having system electronics, a first transmit/receive element and a first power supply, said first body weighing less than two pounds; a second body having a digital beam former; an A/D converter circuit, a transducer array, a second power supply, a second transmit/receive element and at least one control element, said second body weighing less than one pound; and a headset comprising a visual display, a receive element and a third power supply such that the first body, second body and head set are in communication with each other through the first and second transmit/receive element and the receive element so that a user may control the system through the at least one control element of the second body, while the first body performs the diagnostic operations through said system electronics, and the user may see the operations through the visual display of the head set.

[0012] In yet another embodiment, we describe a system as detailed above wherein the first body and the second body are incorporated into a single transducer assembly weighing less than two pounds and sharing a single power supply and having a single transmit/receive element.

[0013] Methods of using the various embodiments are also provided.

[0014] These and other embodiments of the present invention will become readily apparent upon a detailed inspection of the detailed description of the invention, and a study of the appended claims.

[0015] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims. The novel features which are believed to be characteristic of the invention, both as to its organization and method of operation, together with further objects and advantages will be better understood from the following description when considered in connection with the accompanying figures. It is to be expressly understood, however, that each of the figures is provided for the purpose of illustration and description only and is not intended as a definition of the limits of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

[0017] FIGS. 1A-D illustrate a balance body ultrasound device of the present invention; and

[0018] FIGS. 2-20 illustrate alternative embodiments of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0019] Several terms have been clarified here to facilitate an understanding of the present invention.

[0020] **Balance Body:** A design for an ultrasound device where the center of gravity for the device is positioned close to the strength of a user's hand. By shifting components around in the internal arrangement of the device, an aperture can be made in the device body where system electronics and other essential elements are, such that the device body is balanced for more comfortable holding in a user's hand.

[0021] **D-controller:** Any of a variety of control devices allowing a user to "point and click." The D-controller may be a digital directional controller (such as a four or eight directional controller), an analog "joystick." The D-controller allows a user to navigate an on-screen menu or displayed graphics similar to the use of a touch pad or lap top "nipple" pointing style device.

[0022] The present invention describes a hand held ultrasound system having a balance body, a transducer assembly connected to said balance body via a connection means, and a plurality of control elements arranged in an ergonomic fashion on the balance body. The system is designed such that a user may hold the balance body and operate a key control element, such as a D-controller, with the same hand.

[0023] Turning now to FIGS. 1A-1C, a medical ultrasound system **10** comprises a balance body **100** incorporating system electronics, a power supply and a user interface wherein the user interface comprises a D-controller **112** and a touch screen **110**, the transducer assembly **123** is connected to the balance body **100** via a cable **121** extending from a cable port **120**.

[0024] The balance body **100** is a housing containing the system electronics, power supply and user interface. The balance body **100** has an aperture **136** through which a user may insert his or her hand. The aperture **136** is shaped to be comfortable for the majority of users. The balance body **100** has the aperture **136** for the user's hand arranged so the user's palm and fingers support the weight of the device by being essentially flat against the backside of the balance body **100**. The user's thumb wraps around to the front face of the balance body **100**, and the D-controller **112** is positioned such that the user's thumb can easily manipulate the D-controller **112** while the user's palm and fingers support the weight of the balance body. In one embodiment, the power supply is located in the handle **114**, opposite the system electronics (the aperture for a user's hand being between the power supply and the system electronics). Since the power supply is one of the heavier elements of the medical ultrasound system **10**, the counter balancing effect makes the medical ultrasound system **10** easier to use and hold through the aperture **136**. A power supply release button **116** is provided when necessary to remove the power supply within the handle **114**.

[0025] A plurality of control elements or buttons **128**, **132**, **134** are also accessible to the user's thumb, these control buttons or control elements are arrayed about the D-controller **112** so the user does not have to extend the thumb into an awkward position in order to actuate these control elements. Additional control elements **130**, **126**, such as the on/off switch **126** are purposefully positioned out of reach of the user's thumb, thus avoiding inadvertently turning the system off during a medical scan. The control elements need not be

buttons per se. The present invention can also operate using a series of touch pads that would supplement the primary D-controller 112, or utilize spring loaded dials that may be adjusted, then depressed below the surface of the balance body. The screen 110 is preferably a touch screen, and a stylus 122 is incorporated into the balance body 100 so a user may use the stylus 122, fingers (of the user's second hand), or the D-controller 112 to input information through the touch screen 110. It should be noted here the D-controller 112 can also be used to position a pointer in a graphics image. In this manner a user may select an area of an image for enhanced viewing, or gain additional information about an icon on the screen or data about a scan image, or perform a manual trace of a scan image. The touch screen 110 has a plurality of image presentation styles, and among them is a QWERTY style keyboard so a user can input information such as patient data, or notes from an ultrasound scan.

[0026] The transducer assembly 123, or scan head comprises a transducer array and an inter-connector for coupling the transducer array to the cable. The transducer assembly 123 is connected to the balance body 100 by a cable 121 that feeds control signals to the transducer array (for steering, scan mode, etc.) as well as power from the power supply in the balance body 100. The transducer assembly 123 may be permanently affixed to the balance body through the cable 121, or the cable may be removable such that a different scan head/transducer assembly can be attached to the balance body.

[0027] Additional features that may be incorporated onto the balance body include a holster 124 for retaining the transducer assembly 123 when not in use, a receptacle for placement of the stylus, an aperture 138 on the back side for connecting a locking pin into the balance body (when placed into a docking station), a spacer (not shown) for use in the aperture to accommodate smaller user hands and increase the user audience able to use the system and a hinge for the display screen so it can be tilted or swiveled. A data I/O port 140 is provided for communication with a docking station. Referring to FIGS. 7A & 7B, a balance body 700 is shown before (FIG. 7A) and after (FIG. 7B) insertion into a docking station 701. U.S. Pat. No. 6,416,475 teaches a PCMCIA data I/O port.

[0028] Dimensionally, the medical ultrasound system of the present embodiment has a total system weight under three and one half pounds (3.50 lbs.). The cable is of varying length but is designed to be sufficient for a user to comfortably hold the balance body in the user's field of view and scan a patient simultaneously. The balance body comprises the bulk of the weight while the transducer assembly generally weighs less than eight ounces (0.5 lbs.). The balance body measures less than twelve inches long, seven inches in height and two inches in depth (12"x7"x2") not including the transducer assembly and attaching cable.

[0029] FIG. 1D illustrates a right-handed model of the present invention, where the controls are a mirror image of those in FIGS. 1A-C. FIGS. 2-6 and 8-17 show lightweight ultrasound instrument bodies (200, 300, 400, 500, 600, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500, 1600, 1700). FIG. 13 shows an instrument body 1300 with an adjustable display screen. FIGS. 15 and 17 show an instrument body 1500, 1700 with a transducer 1501, 1701. FIG. 18 shows an instrument body 1800 having an integrated transducer assembly.

[0030] The medical ultrasound system also allows for the entry of a key code to permit upgrades to the software of the

device. The operation of the key code is explained in greater detail in co-pending U.S. application Ser. No. 10/062,179 filed Feb. 1, 2002, now U.S. Pat. No. 6,962,566.

[0031] A second embodiment of the present invention forms a lightweight ultrasound instrument comprising a body having a power supply, a user interface for controlling the instrument, a display screen, and a system electronics package capable of a plurality of diagnostic ultrasound modes. In this embodiment, the body may optionally be a balance body. A transducer assembly is attached to the body via a wire of thin flexible cable, the transducer assembly comprises a digital beam former, an A/D converter circuit and a transducer array. The body, transducer assembly and wire combined weigh less than three pounds.

[0032] The wire connecting the body and transducer assembly provides power to the transducer assembly, and a signal path for the body and transducer assembly to communicate using digital data. In this manner the need for an analog cable, having many data paths for analog signals, is eliminated, and spares additional weight. The signal from the transducer array returns through the digital beam former incorporated into the transducer assembly so only digital information goes between the body and the transducer assembly.

[0033] The control elements of the lightweight ultrasound instrument are similar to those described above. A plurality of control elements, of which one is preferably a D-controller, and a touch screen. Again the body can be held with one hand, so the user's thumb, or fingers can access the D-controller on the body.

[0034] In a third embodiment, a wireless diagnostic ultrasound system comprises a first body, and a second body. The first body is the main unit having system electronics, a user interface having a display screen and at least one control element, a first wireless transmit/receive circuit and a first power supply. The second body is a transducer assembly having a digital beam former, an A/D converter circuit, a transducer array, a second power supply and a second transmit/receive element such that the digital beam former of the second body can be controlled by the system electronics of the first body using the first and second transmit/receive circuits. The first and second transmit/receive circuits being a wireless means for communicating between the first body and the second body. Wireless data transfer and communication are well-understood technologies. Any standard wireless transmission standard capable of supporting the digital information communication of the present invention may be used.

[0035] The display screen in this embodiment is preferably a touch screen as well. The use of touch screen permits the same advantages for ease of use to a user as previously described. A D-controller as one of the control elements allows for simple one-handed operation of the first body while the second hand holds the transducer assembly in place. The wireless design permits a user total freedom from encumbering cable and wire connections to the first body such that the transducer array can be positioned easily for manual steering.

[0036] In a fourth embodiment, the invention comprises a first body having system electronics (FIG. 20 at 2000), a first transmit and receive element (FIG. 20 at 2001), and a first power supply. The first body weighs less than two pounds. A second body houses the transducer assembly. The transducer assembly has a digital beam former, an A/D circuit, a transducer array, a second power supply, a second transmit and

receive element and at least one control element. The second body weighs less than one pound. A head set (FIG. 20 at 2002) is provided comprising a visual display (FIG. 20 at 2003), a receive element and a third power supply such that the first body, second body and head set are all in real time communication with each other. U.S. Pat. No. 5,817,024 describes that video information can be communicated from a video output in several television formats. The user can control the system through the second body or first body while visualizing the ultrasound scan through the head set. Voice recognition capability can be added to the head set through a head set microphone, allowing a user to command the operation of the ultrasound system at some level using voice activated commands instead of one or more of the manual control elements. FIG. 19 shows a medical ultrasound system where the first body and the second body are incorporated into a single transducer assembly 1900. A headset 1901 communicates wirelessly with single transducer assembly 1900.

[0037] Another embodiment of the invention may comprise a medical ultrasound system wherein an I/O port for connecting to a docking station further comprises a data path, a control path, and a power path for communicating with the docking station, such that data can move between said medical ultrasound system and the docking station, such that the medical ultrasound system can be controlled through the docking station, and such that the power supply can be recharged through the power path.

[0038] Yet another embodiment of the invention may comprise a medical ultrasound system comprising a balance body incorporating system electronics, a power supply and a user interface wherein the user interface comprises a D-controller and a touch screen and a transducer assembly attached to the balanced body via a cable. In this embodiment, the system electronics comprise a digital beam former, an image processor, and a first digital signal processor capable of processing B mode, M mode and flow (2D Doppler) scans. Some embodiments may comprise a second digital signal processor comprising a digital Doppler QBP filter for filtering PW Doppler signals and a digital signal processor core for PW Doppler signal processing. A description of a digital signal processor of this type is described in U.S. Pat. No. 6,569,101, incorporated herein by reference. In some embodiments, the first digital signal processor and the second digital signal processor are integrated into a single application specific integrated circuit (ASIC). A data storage means for ultrasound scans may be included. ASIC architecture is further described in Paragraphs 15, 50-54, 57-59, 63-65, and 67 of co-pending U.S. application Ser. No. 10/062,179, incorporated herein by reference.

[0039] Other embodiments may comprise a medical ultrasound system comprising a balance body incorporating system electronics, a power supply and a user interface wherein the user interface comprises a D-controller and a touch screen and a transducer assembly attached to the balanced body via a cable, the medical ultrasound system being a programmable diagnostic ultrasound instrument having a plurality of diagnostic modes. Other transducer and balance body assemblies are described in U.S. Pat. No. 6,416,475, incorporated by reference herein. Access to the diagnostic modes is controlled through a gate flag registry, the gate flag registry capable of modification through a verification procedure utilizing a secure means for extracting hidden bits from a keycode based on one or more unique system identifiers. Keycodes are fur-

ther described in co-pending U.S. application Ser. No. 10/062,179, incorporated by reference herein.

[0040] Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

What is claimed is:

1. A medical ultrasound system comprising:

a balance body, which has a center of gravity positioned close to the strength of a user's hand when the ultrasound system is held by the user, said balance body incorporating system electronics, a power supply and a user interface wherein said user interface comprises a D-controller and a touch screen; and

a transducer assembly attached to said balanced body via a cable, wherein the system electronics comprises:

a digital beam former, an image processor, and a first digital signal processor capable of processing B mode, M mode and flow (2D Doppler) scans; and

a second digital signal processor comprising:

a digital Doppler QBP filter for filtering PW Doppler signals; and

a digital signal processor core for PW Doppler signal processing, wherein the first digital signal processor and the second digital signal processor are integrated into a single application specific integrated circuit (ASIC).

2. A medical ultrasound system as described in claim 1, wherein control of the medical ultrasound device is achieved through selecting through a series of window menus either by using the D-controller or the touch screen or a combination of both.

3. The medical ultrasound system as described in claim 1, wherein the ultrasound system weighs less than three and a half pounds (3.50 lbs.) and the balance body can be held with the same hand that operates the D-controller.

4. The medical ultrasound system as described in claim 1, wherein the touch screen responds to a series of on screen commands and is re-programmable to make one or more hot menus.

5. The medical ultrasound system as described in claim 1, wherein the touch screen further comprises a QWERTY style keypad.

6. The medical ultrasound system as described in claim 1, wherein said transducer assembly is a pen transducer.

7. The medical ultrasound system as described in claim 1, further comprising an I/O port for connecting to a docking station.

8. The medical ultrasound system as described in claim 7, wherein the I/O port still further comprises a data path, a control path, and a power path for communicating with a docking station, such that data can move between said medical ultrasound system and said docking station, such that said medical ultrasound system can be controlled through the docking station, and such that the power supply can be recharged through the power path.

9. The medical ultrasound system of claim 1, further comprising a handle.

10. The medical ultrasound system as described in claim 1, further comprising a holster for retaining a transducer assembly.

11. The medical ultrasound system as described in claim 1, further comprising a data storage means for ultrasound scans.

12. A lightweight diagnostic ultrasound instrument comprising:

- a body having a power supply, a user interface for controlling the instrument, a display screen, and a system electronics package capable of a plurality of diagnostic ultrasound modes, said body weighing less than three pounds, wherein said user interface comprises a controller and wherein said ultrasound instrument is configured so that a user may hold said ultrasound system with one hand and operate said controller with said one hand and wherein the system electronics comprises an image processor, and a first digital signal processor capable of processing B mode, M mode and flow (2D Doppler) scans, having a second digital signal processor comprising:
 - a digital Doppler QBP filter for filtering PW Doppler signals; and
 - a digital signal processor core for PW Doppler signal processing wherein the first digital signal processor and the second digital signal processor are integrated into a single application specific integrated circuit (ASIC);
- a transducer assembly comprising an A/D converter circuit, and a transducer array, the transducer assembly weighing less than one pound;
- a wire connecting said body and said transducer assembly, the wire having a path for feeding power from the power supply to the transducer assembly, and a signal path for transmitting digital signals between the system electronics and the transducer assembly; and
- a digital beam former.

13. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said controller comprises a D-controller.

14. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein the display screen is a touch screen.

15. The lightweight diagnostic ultrasound instrument as described in claim 14, wherein the touch screen responds to a series of on screen commands and is reprogrammable for hot menus.

16. The lightweight diagnostic ultrasound instrument as described in claim 14, wherein the touch screen further comprises a QWERTY style keypad.

17. The lightweight diagnostic ultrasound instrument of claim 12, further comprising a holster for retaining a transducer assembly.

18. The medical ultrasound system as described in claim 1, wherein said balance body comprises an aperture and internal components arranged to achieve said balance body.

19. The medical ultrasound system as described in claim 1, wherein said balance body is configured so that the user's palm and fingers support the weight of said balance body by being essentially flat against a backside of said balance body.

20. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said body is balance body.

21. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said body comprises an aperture and internal components arranged such that said body is balanced for comfortable holding in a user's hand.

22. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said body is configured so that the user's palm and fingers support the weight of said body by being essentially flat against a backside of said body.

23. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said system electronics comprise said digital beam former.

24. The lightweight diagnostic ultrasound instrument as described in claim 12, wherein said transducer comprises said digital beam former.

25. A medical ultrasound system comprising:

- a balance body, which has a center of gravity positioned close to the strength of a user's hand when the ultrasound instrument is held by the user, said balance body incorporating system electronics, a power supply and a user interface wherein said user interface comprises a controller and a touch screen; and
- a transducer assembly wirelessly connected to said balance body, wherein the system electronics comprises:
 - a digital beam former, an image processor, and a first digital signal processor capable of processing B mode, M mode and flow (2D Doppler) scans; and
 - a second digital signal processor comprising:
 - a digital Doppler QBP filter for filtering PW Doppler signals; and
 - a digital signal processor core for PW Doppler signal processing, wherein the first digital signal processor and the second digital signal processor are integrated into a single application specific integrated circuit (ASIC).

* * * * *

专利名称(译)	平衡体超声系统		
公开(公告)号	US20100274131A1	公开(公告)日	2010-10-28
申请号	US12/771982	申请日	2010-04-30
[标]申请(专利权)人(译)	索诺塞特公司		
申请(专利权)人(译)	SONOSITE INC.		
当前申请(专利权)人(译)	SONOSITE INC.		
[标]发明人	BARNES STEPHANIE A BUNCE STEVEN M CABATIC BRYAN S LITTLE BLAKE W PURDUE BILL SCHULTZ JOHN D RICE KARI L		
发明人	BARNES, STEPHANIE A. BUNCE, STEVEN M. CABATIC, BRYAN S. LITTLE, BLAKE W. PURDUE, BILL SCHULTZ, JOHN D. RICE, KARI L.		
IPC分类号	A61B8/14 A61B5/0402 A61B8/00 A61B8/06 G01S7/00 G01S7/52 G01S7/521 G01S7/529 G01S15/89 G10K11/00 G10K11/34		
CPC分类号	A61B5/0402 A61B8/56 A61B8/06 A61B8/13 A61B8/14 A61B8/4427 A61B8/4455 A61B8/4472 A61B8/462 A61B8/467 A61B2560/0456 G01S7/003 G01S7/52034 G01S7/5206 G01S7/52068 G01S7/52071 G01S7/52079 G01S7/5208 G01S7/52084 G01S7/529 G01S15/899 G10K11/004 G10K11/345 A61B8/54 G01S15/8915 A61B8/00		
其他公开文献	US8052606		
外部链接	Espacenet USPTO		

摘要(译)

手持式超声波系统技术领域本发明涉及一种手持式超声波系统，其具有平衡体，通过通信装置连接到所述平衡体的换能器组件和在所述平衡体上以人体工程学方式布置的多个控制元件，使得用户可以握住所述平衡体。系统并用同一只手操作至少一个所述控制元件。特别地，医疗超声系统包括结合有系统电子器件，电源和用户界面的平衡体，其中用户界面包括D控制器和触摸屏以及通过电缆连接到平衡体的换能器组件。手持式超声波系统技术领域本发明涉及一种手持式超声波系统，其具有平衡体，通过通信装置连接到所述平衡体的换能器组件和在所述平衡体上以人体工程学方式布置的多个控制元件，使得用户可以握住所述平衡体。系统并用同一只手操作至少一个所述控制元件。特别地，医疗超声系统包括结合有系统电子器件，电源和用户界面的平衡体，其中用户界面包括D控制器和触摸屏以及通过电缆连接到平衡体的换能器组件。

