



US 20110033096A1

(19) **United States**(12) **Patent Application Publication****Lee et al.**(10) **Pub. No.: US 2011/0033096 A1**(43) **Pub. Date: Feb. 10, 2011**(54) **ULTRASOUND SYSTEM AND METHOD FOR
SEGMENTING VESSELS****Publication Classification**(75) Inventors: **Jun Kyo Lee**, Seoul (KR); **Dong
Gyu Hyun**, Seoul (KR); **Jae Heung
Yoo**, Seoul (KR)(51) **Int. Cl.**
G06K 9/00 (2006.01)
A61B 8/14 (2006.01)
(52) **U.S. Cl.** **382/131; 600/443**

Correspondence Address:

**JONES DAY
222 EAST 41ST ST
NEW YORK, NY 10017 (US)**(57) **ABSTRACT**

There are disclosed embodiments for an ultrasound system for performing segmentation of vessels. The ultrasound system comprises: an ultrasound data acquisition unit configured to transmit an ultrasound signal to a target object including vessels, receive an ultrasound echo signal reflected from the target object and form ultrasound data corresponding to the target object; a volume data forming unit configured to form volume data based on the ultrasound data; and a processor configured to form a 3-dimensional ultrasound image based on the volume data, set a plurality of slices on the 3-dimensional ultrasound image and perform segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices.

(73) Assignee: **Medison Co., Ltd.**(21) Appl. No.: **12/751,825**(22) Filed: **Mar. 31, 2010**(30) **Foreign Application Priority Data**

Aug. 7, 2009 (KR) 10-2009-0072559

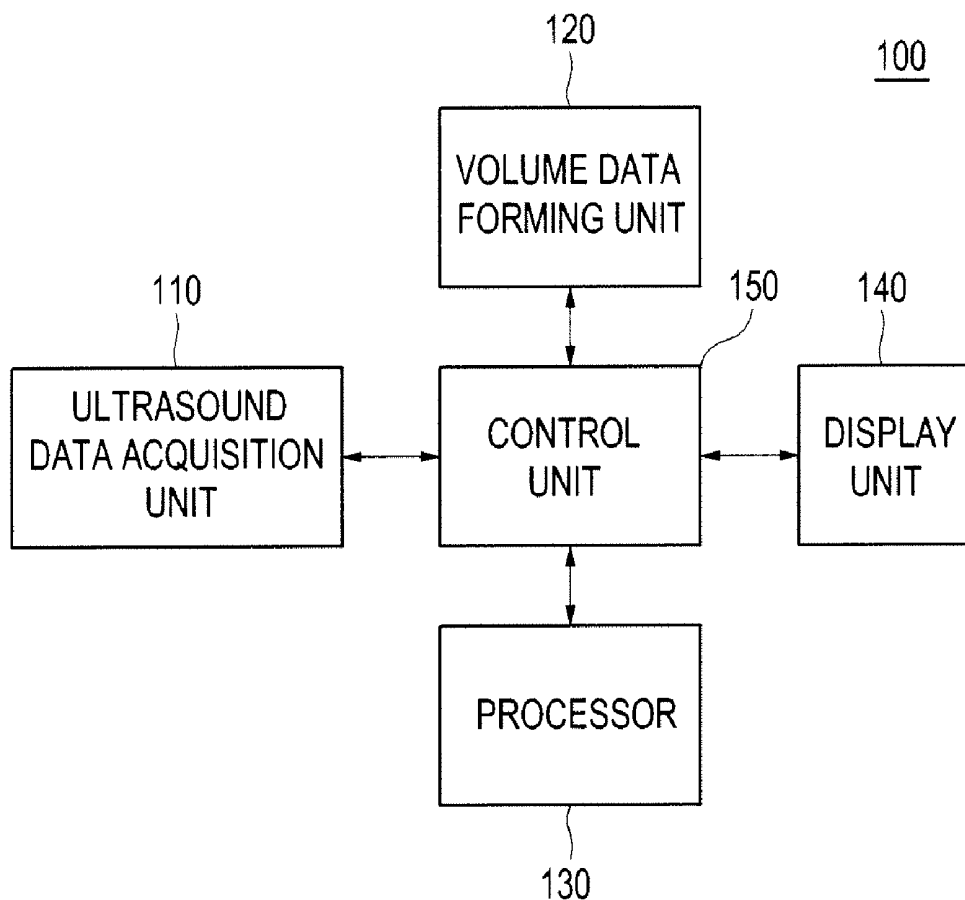


FIG. 1

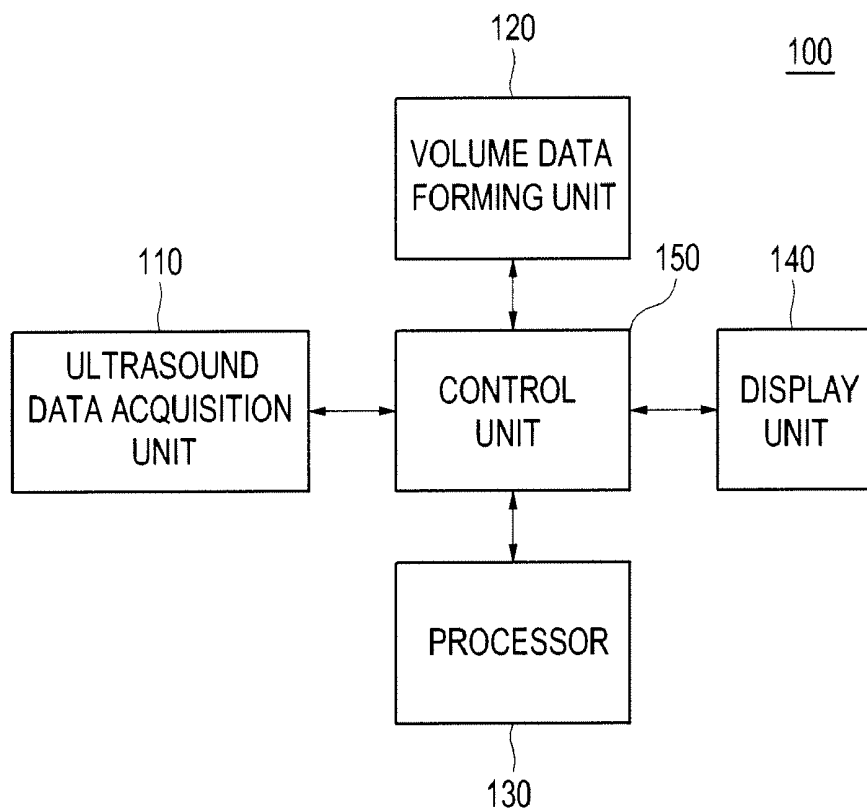


FIG. 2

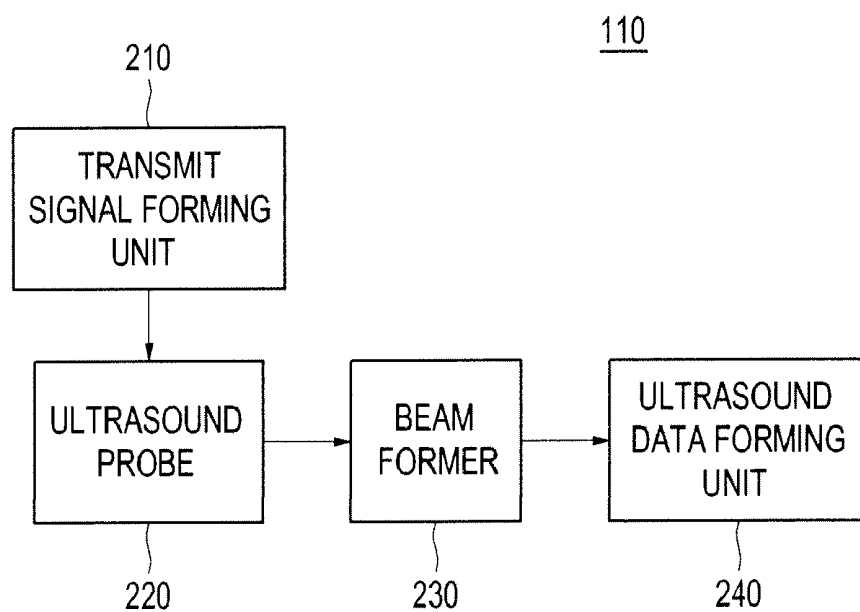


FIG. 3

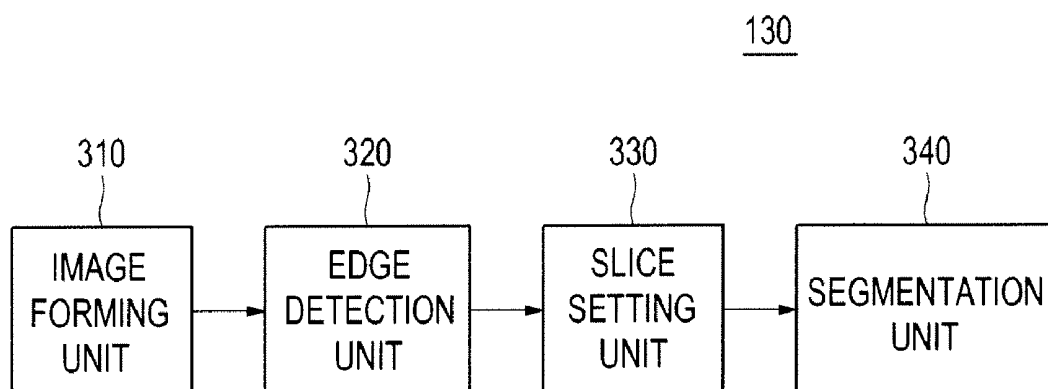


FIG. 4

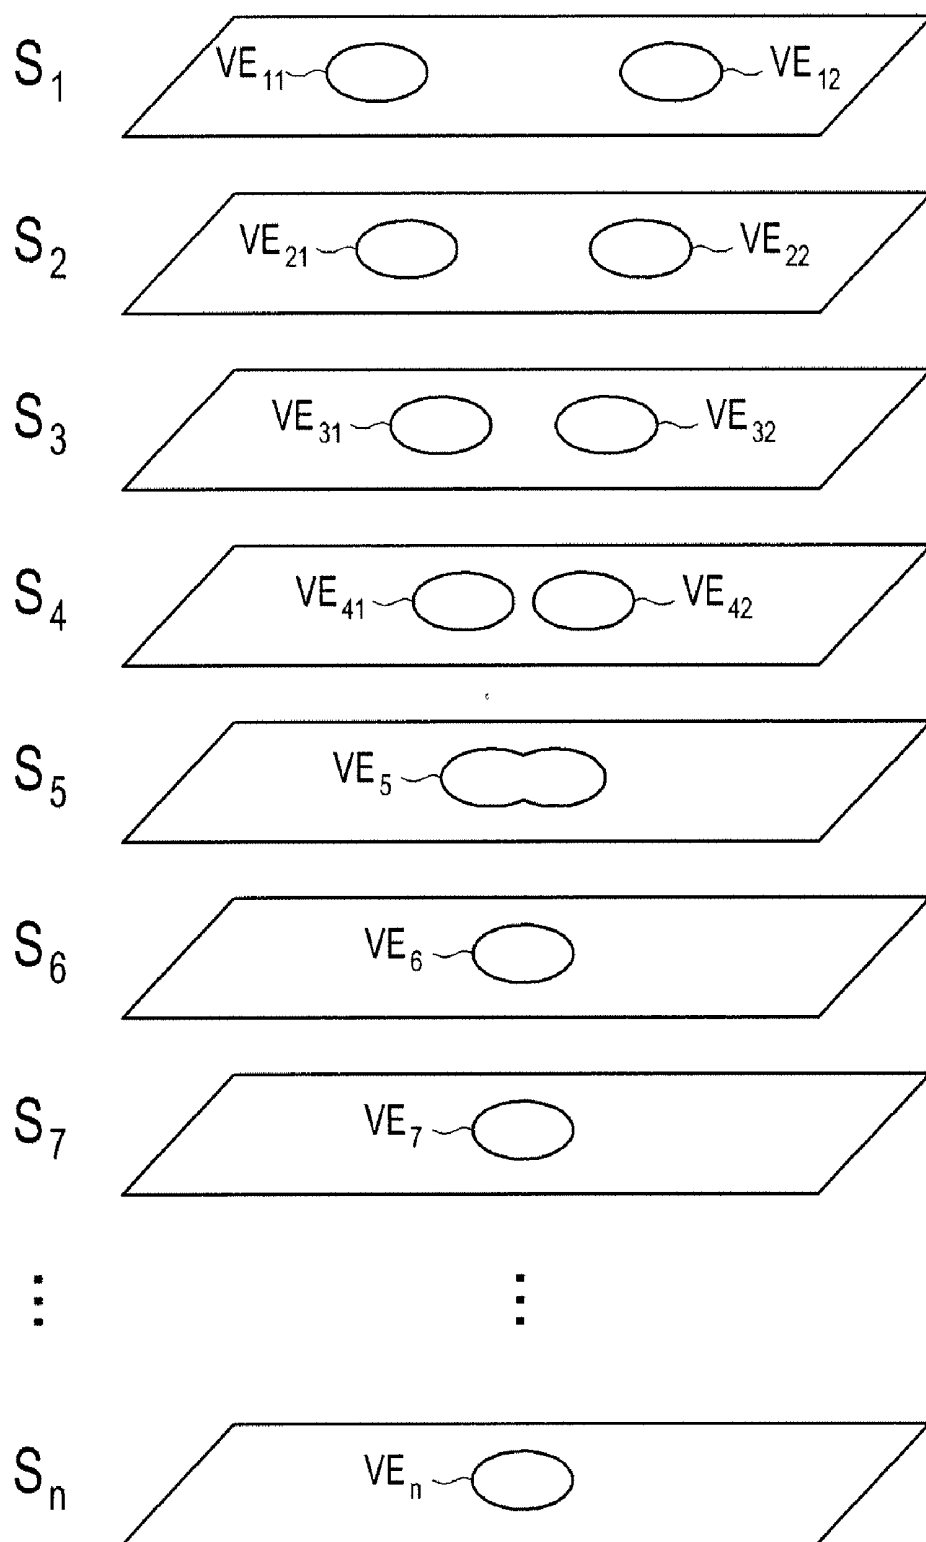


FIG. 5


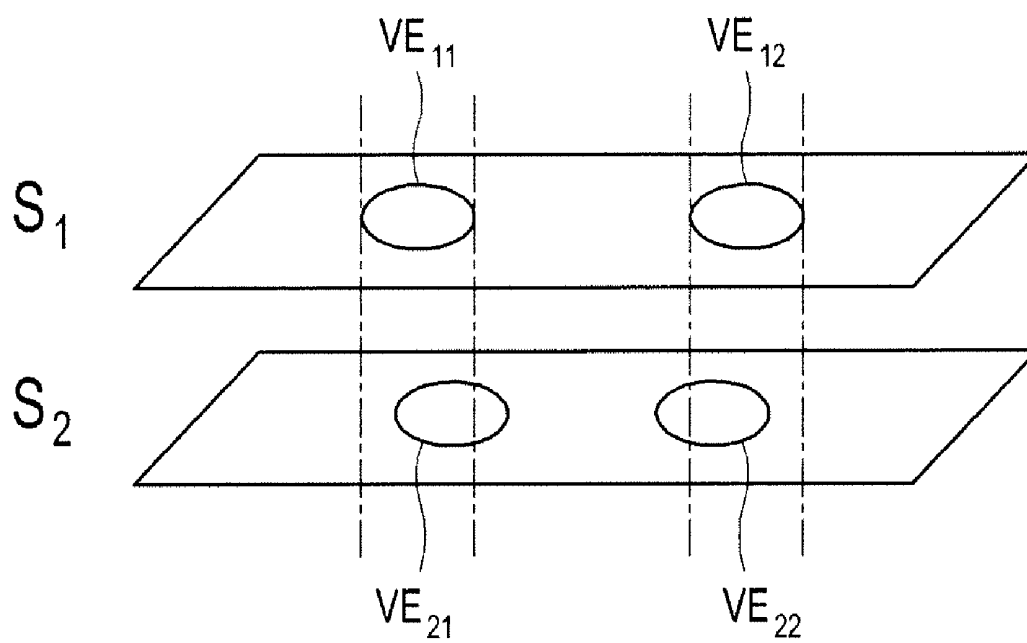


FIG. 6

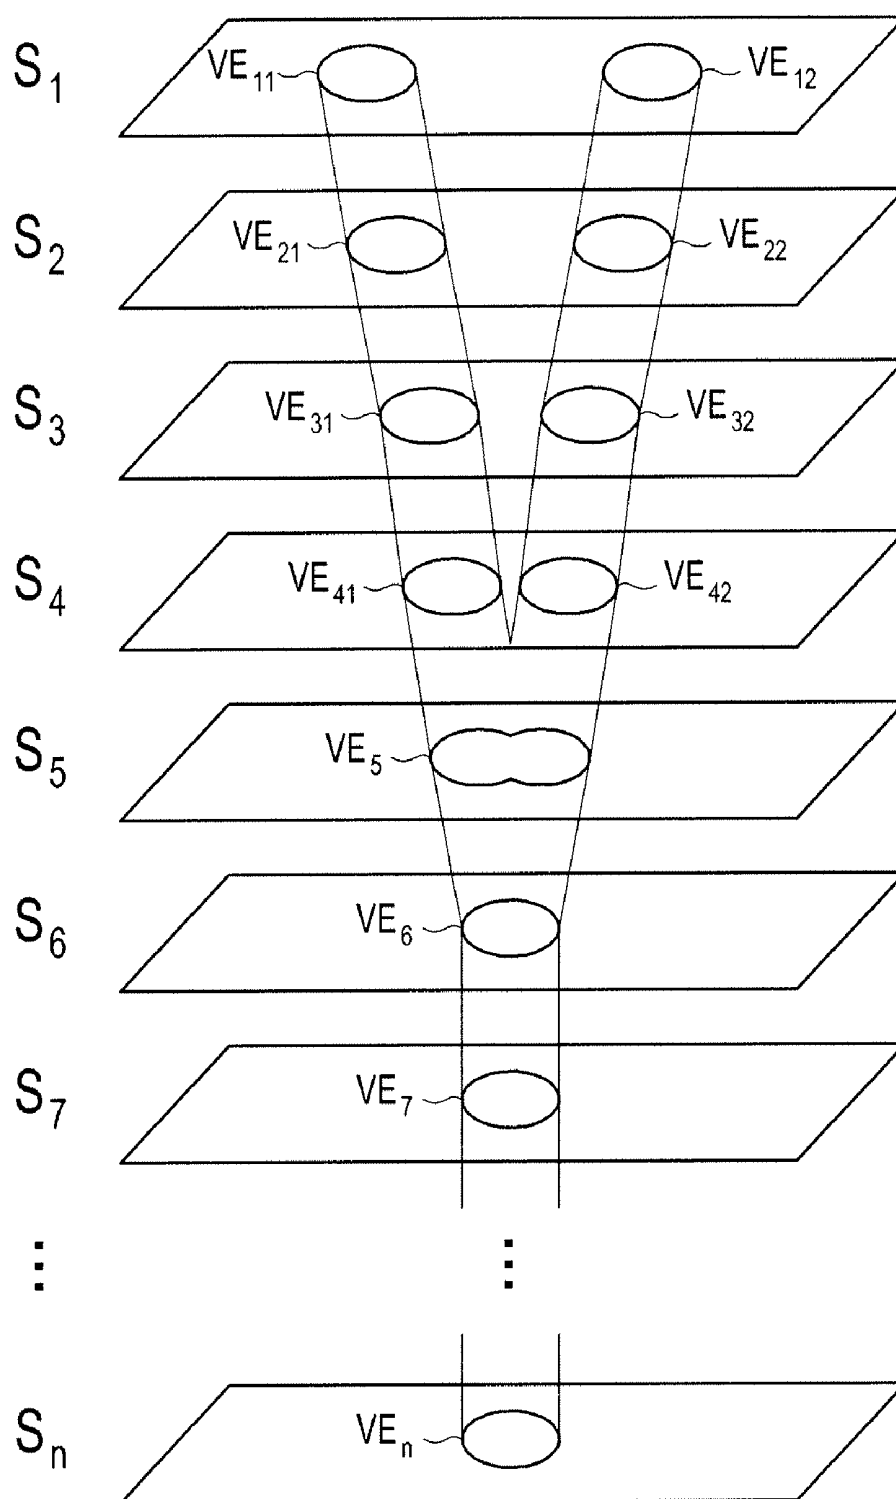

ULTRASOUND SYSTEM AND METHOD FOR SEGMENTING VESSELS

[0001] The present application claims priority from Korean Patent Application No. 10-2009-0072559 filed on Aug. 7, 2009, the entire subject matter of which is incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to ultrasound systems, and more particularly to an ultrasound system and method for segmenting vessels.

BACKGROUND

[0003] An ultrasound system has been extensively used for acquiring internal information of a target object due to its non-invasive and non-destructive nature. Since the ultrasound system may provide a high resolution image without any surgical treatment, it has proven to be very helpful in the medical profession.

[0004] Generally, the ultrasound system may provide 3-dimensional ultrasound images including clinical information such as spatial information and anatomical information which 2-dimensional ultrasound images do not include. The ultrasound system may operate to transmit an ultrasound signal to a target object, receive the ultrasound signal reflected from the target object (i.e., ultrasound echo signal), and acquire ultrasound data. The ultrasound system may form volume data by using the acquired ultrasound data and provide a 3-dimensional image through rendering of the formed volume data.

[0005] Also, the ultrasound system may operate to perform segmentation on the 3-dimensional ultrasound image and extract an object of interest from the 3-dimensional ultrasound image. However, if a structure of vessel is complicated after performing segmentation, then it is difficult to recognize a specific vessel among many vessels as well as to locate vessel connection points (or junctions).

SUMMARY

[0006] There are disclosed embodiments of an ultrasound system and a method adapted to set a plurality of slices on a 3-dimensional image and perform segmentation of vessel by using location difference between vessel edges on adjacent slices. In one embodiment, by way of non-limiting example, the ultrasound system comprises: an ultrasound data acquisition unit configured to transmit an ultrasound signal to a target object including vessels, receive an ultrasound echo signal reflected from the target object and form ultrasound data corresponding to the target object; a volume data forming unit configured to form volume data based on the ultrasound data; and a processor configured to form a 3-dimensional ultrasound image based on the volume data, set a plurality of slices on the 3-dimensional ultrasound image and perform segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices.

[0007] In another embodiment, a method of performing segmentation of vessels comprises: a) transmitting an ultrasound signal to a target object including vessels and receiving an ultrasound echo signal reflected from the target object to thereby form ultrasound data corresponding to the target object; b) forming volume data based on the ultrasound data;

c) forming a 3-dimensional ultrasound image based on the volume data; d) setting a plurality of slices on the 3-dimensional ultrasound image; and e) performing segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices.

[0008] The Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a block diagram showing an illustrative embodiment of an ultrasound system.

[0010] FIG. 2 is a block diagram showing an illustrative embodiment of an ultrasound data acquisition unit.

[0011] FIG. 3 is a block diagram showing an illustrative embodiment of a processor.

[0012] FIG. 4 is a schematic diagram showing an example of a plurality of slices and vessel edges.

[0013] FIG. 5 is a schematic diagram showing an example of location difference between vessel edges on adjacent slices.

[0014] FIG. 6 is a schematic diagram showing an example of segmentation of vessel.

DETAILED DESCRIPTION

[0015] A detailed description may be provided with reference to the accompanying drawings.

[0016] FIG. 1 is a block diagram showing an illustrative embodiment of an ultrasound system 100. The ultrasound system 100 comprises an ultrasound data acquisition unit 110, a volume data forming unit 120, a processor 130, a display unit 140 and a control unit 150.

[0017] The ultrasound data acquisition unit 110 may be operable to transmit an ultrasound signal to a target object, receive the ultrasound signal (i.e., ultrasound echo signal) reflected from the target object, and acquire ultrasound data.

[0018] FIG. 2 is a block diagram showing an illustrative embodiment of the ultrasound data acquisition unit 110. The ultrasound data acquisition unit 110 may include a transmit signal forming unit 210, an ultrasound probe 220 including a plurality of transducer elements (not shown), a beam former 230 and an ultrasound data forming unit 240.

[0019] The transmit signal forming unit 210 may be operable to form a transmit signal to be applied to each of the transducer elements of the ultrasound probe 220. By way of a non-limiting example, the positions and focusing points of the transducer elements may be considered in forming the transmit signal. In one embodiment, the transmit signal may include a transmit signal for acquiring a plurality of frames of the target object.

[0020] The ultrasound probe 220 may operate to convert the transmit signal provided by the transmit signal forming unit 210 into an ultrasound signal and transmit it to the target object. The ultrasound probe 220 may further operate to receive the ultrasound echo signal reflected from the target object and form a receive signal.

[0021] The beam former 230 may be configured to form a digital signal through analog-to-digital conversion of the receive signal provided by the ultrasound probe 220. The beam former 230 may operate to perform receive-focusing

upon the digital signal in consideration of the positions and focusing points of the transducer elements, and form a receive-focused signal thereby.

[0022] The ultrasound data forming unit **240** may be configured to form ultrasound data of the target object using the receive-focused signal provided by the beam former **230**. In one embodiment, the ultrasound data may comprise RF (radio frequency) data and IQ (in-phase/quadrature) data.

[0023] Referring back to FIG. 1, the volume data forming unit **120** may operate to form volume data by using the ultrasound data provided by the ultrasound acquisition unit **110**. The volume data may comprise a plurality of frames and a plurality of voxels having brightness values.

[0024] The processor **130** may operate to form a 3-dimensional ultrasound image including vessels in the target object by using the volume data provided by the volume data forming unit **120**, and perform segmentation of the vessels by using the 3-dimensional ultrasound image.

[0025] FIG. 3 is a block diagram showing an illustrative embodiment of the processor **130**. The processor **130** comprises an image forming unit **310**, an edge detection unit **320**, a slice setting unit **330** and a segmentation unit **340**.

[0026] The image forming unit **310** may operate to form the 3-dimensional ultrasound image through rendering of the volume data provided by the volume data forming unit **120**. In one embodiment, the rendering may comprise ray-casting rendering, surface rendering, etc.

[0027] The edge detection unit **320** may operate to detect vessel edges through performing edge detection on the 3-dimensional ultrasound image provided by the image forming unit **310**. In one embodiment, the vessel edges may be detected by using an edge mask such as a Sobel mask, a Prewitt mask, a Robert mask, a Canny mask, etc. Also, the vessel edges may be detected from the difference of eigen values by using a structure tensor.

[0028] The slice setting unit **330** may operate to set a plurality of slices (S_0 - S_n) on the 3-dimensional ultrasound image in which the vessel edges were detected, as illustrated in FIG. 4. In one embodiment, the plurality of slices may comprise slices corresponding to the plurality of frames.

[0029] The segmentation unit **340** may be configured to perform segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices. In one embodiment, the segmentation unit **340** may operate to compare the location of vessels on adjacent slices by using the vessel edges and perform segmentation of the vessels. Following is illustrative operation of the segmentation unit **340** with reference to FIG. 4.

[0030] The segmentation unit **340** may operate to analyze a first slice (S_1) and detect vessel edges (VE_{11} , VE_{12}) on the first slice (S_1).

[0031] The segmentation unit **340** may operate to analyze a second slice (S_2) and detect vessel edges (VE_{21} , VE_{22}) on the second slice (S_2). The segmentation unit **340** may operate to detect location difference between the vessel edges on the adjacent slices (i.e., the first slice (S_1) and the second slice (S_2)), as illustrated in FIG. 5. Specifically, the segmentation unit **340** may operate to detect the location difference between the vessel edge (VE_{11}) of the first slice (S_1) and the vessel edge (VE_{21}) of the second slice (S_2) as well as the location difference between the vessel edge (VE_{11}) of the first slice (S_1) and the vessel edge (VE_{22}) of the second slice (S_2). Further, the segmentation unit **340** may operate to detect the location difference between the vessel edge (VE_{12}) of the first

slice (S_1) and the vessel edge (VE_{21}) of the second slice (S_2) as well as the location difference between the vessel edge (VE_{12}) of the first slice (S_1) and the vessel edge (VE_{22}) of the second slice (S_2). In case that the location difference between the vessel edge (VE_{11}) of the first slice (S_1) and the vessel edge (VE_{21}) of the second slice (S_2) and the location difference between the vessel edge (VE_{12}) of the first slice (S_1) and the vessel edge (VE_{22}) of the second slice (S_2) are equal to or less than a predetermined threshold, and the location difference between the vessel edge (VE_{11}) of the first slice (S_1) and the vessel edge (VE_{22}) of the second slice (S_2) and the location difference between the vessel edge (VE_{12}) of the first slice (S_1) and the vessel edge (VE_{21}) of the second slice (S_2) are more than the predetermined threshold, the segmentation unit **134** may connect the vessel edge (VE_{21}) of the second slice (S_2) with the vessel edge (VE_{11}) of the first slice (S_1), and connect the vessel edge (VE_{22}) of the second slice (S_2) with the vessel edge (VE_{12}) of the first slice (S_1). The segmentation unit **340** may perform the same operation with respect to a third slice (S_3) and a fourth slice (S_4), as described above.

[0032] The segmentation unit **340** may operate to analyze a fifth slice (S_5) and detect a vessel edge (VE_5) on the fifth slice (S_5). The segmentation unit **134** may operate to detect the location difference between the vessel edges on the adjacent slices (i.e., the fourth slice (S_4) and the fifth slice (S_5)). In case that the location difference between the vessel edge (VE_{41}) of the fourth slice (S_4) and the vessel edge (VE_5) of the fifth slice (S_5) and the location difference between the vessel edge (VE_{42}) of the fourth slice (S_4) and the vessel edge (VE_5) of the fifth slice (S_5) are equal to or less than the predetermined threshold, the segmentation unit **340** may connect the vessel edge (VE_5) of the fifth slice (S_5) with the vessel edges (VE_{41} , VE_{42}) of the fourth slice (S_4).

[0033] The segmentation unit **340** may operate to analyze a sixth slice (S_6) and detect a vessel edge (VE_6) on the sixth slice (S_6). The segmentation unit **340** may operate to detect the location difference between the vessel edges on the adjacent slices (i.e., the fifth slice (S_5) and the sixth slice (S_6)). In case that the location difference between the vessel edge (VE_5) of the fifth slice (S_5) and the vessel edge (VE_6) of the sixth slice (S_6) are equal to or less than the predetermined threshold, the segmentation unit **340** may connect the vessel edge (VE_6) of the sixth slice (S_6) with the vessel edge (VE_5) of the fifth slice (S_5).

[0034] The segmentation unit **340** may perform the same operation with respect to a seventh to an n th slice (S_7 - S_n) as described above in order to perform segmentation of the vessels, as illustrated in FIG. 6.

[0035] Referring back to FIG. 1, the display unit **140** may operate to display the 3-dimensional ultrasound image formed by the processor. The display unit **140** may further operate to display the 3-dimensional ultrasound image on which the processor **130** performed segmentation of the vessels. In one embodiment, the display unit **140** may include a liquid crystal display (LCD), a cathode ray tube (CRT) or any other device capable of displaying an image.

[0036] The control unit **150** may operate to control acquisition of the ultrasound data, and formation of the volume data and the 3-dimensional ultrasound image. The control unit **150** may further operate to control image processing of the 3-dimensional ultrasound image (i.e., segmentation of the vessels).

[0037] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, numerous variations and modifications are possible in the component parts and/or arrangements within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. An ultrasound system, comprising:
an ultrasound data acquisition unit configured to transmit an ultrasound signal to a target object including vessels, receive an ultrasound echo signal reflected from the target object and form ultrasound data corresponding to the target object;
a volume data forming unit configured to form volume data based on the ultrasound data; and
a processor configured to form a 3-dimensional ultrasound image based on the volume data, set a plurality of slices on the 3-dimensional ultrasound image and perform segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices.
2. The ultrasound system of claim 1, wherein the processor is further configured to compare the degree of registration with a predetermined threshold.
3. The ultrasound system of claim 1, wherein the processor further comprises:
an edge detection unit configured to detect edges of the vessels on the plurality of slices; and

a segmentation unit configured to calculate location differences between the edges of the vessels on each adjacent pair of the slices and perform segmentation of the vessels based on the location differences.

4. A method of performing segmentation of vessels, comprising:

- a) transmitting an ultrasound signal to a target object including vessels and receiving an ultrasound echo signal reflected from the target object to thereby form ultrasound data corresponding to the target object;
- b) forming volume data based on the ultrasound data;
- c) forming a 3-dimensional ultrasound image based on the volume data;
- d) setting a plurality of slices on the 3-dimensional ultrasound image; and
- e) performing segmentation of the vessels based on a degree of registration between the respective vessels on the adjacent slices.

5. The method of claim 4, wherein the performing segmentation of the vessels comprises comparing the degree of registration with a predetermined threshold.

6. The method of claim 4, wherein the performing segmentation of the vessels comprises:

- detecting edges of the vessels on the plurality of slices;
- calculating location differences between the edges of the vessels on each adjacent pair of the slices; and
- performing segmentation of the vessels based on the location differences.

7. The method of claim 6, wherein the performing segmentation of the vessels comprises comparing the location differences with a predetermined threshold.

* * * * *

专利名称(译)	超声系统和分割血管的方法		
公开(公告)号	US20110033096A1	公开(公告)日	2011-02-10
申请号	US12/751825	申请日	2010-03-31
申请(专利权)人(译)	MEDISON CO. , LTD.		
当前申请(专利权)人(译)	MEDISON CO. , LTD.		
[标]发明人	LEE JUN KYO HYUN DONG GYU YOO JAE HEUNG		
发明人	LEE, JUN KYO HYUN, DONG GYU YOO, JAE HEUNG		
IPC分类号	G06K9/00 A61B8/14		
CPC分类号	G06T7/0083 G06T2207/30101 G06T2207/10132 G06T7/12		
优先权	1020090072559 2009-08-07 KR		
其他公开文献	US8724873		
外部链接	Espacenet USPTO		

摘要(译)

公开了用于执行血管分割的超声系统的实施例。超声系统包括：超声数据获取单元，被配置为将超声信号发送到包括血管的目标对象，接收从目标对象反射的超声回波信号，并形成与目标对象相对应的超声数据；体数据形成单元，被配置为基于超声数据形成体数据；处理器，被配置为基于体数据形成三维超声图像，在三维超声图像上设置多个切片，并基于相邻切片上的各个血管之间的配准程度执行血管的分割。

