


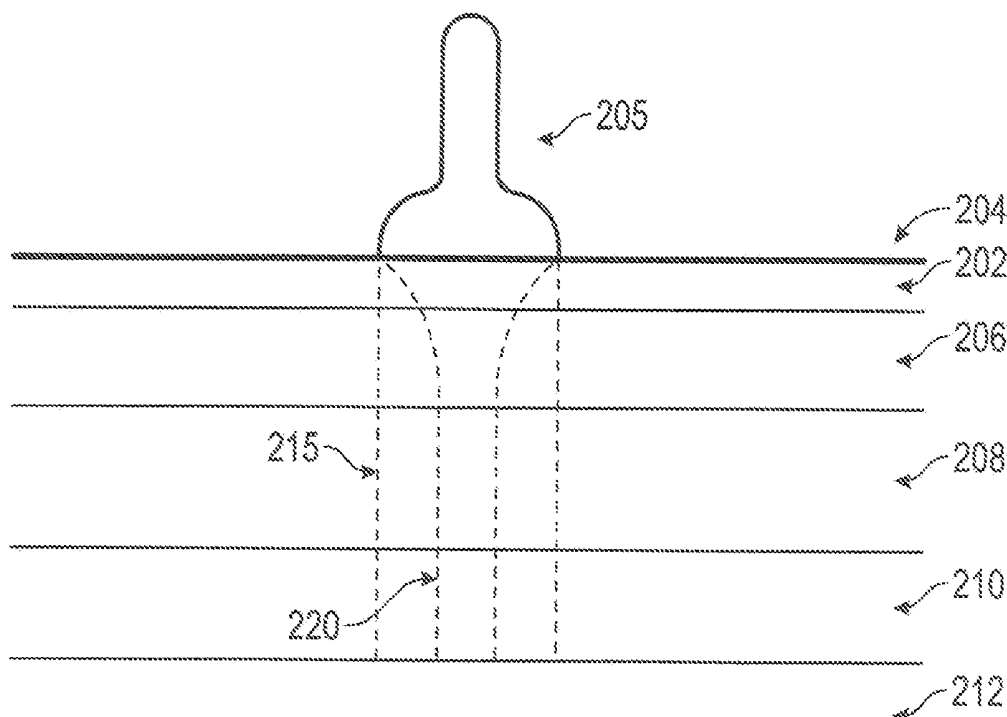

US 20150190121A1

(19) **United States**(12) **Patent Application Publication**
Slayton et al.(10) **Pub. No.: US 2015/0190121 A1**(43) **Pub. Date: Jul. 9, 2015**(54) **SYSTEMS AND METHODS FOR
MONITORING AND CONTROLLING
ULTRASOUND POWER OUTPUT AND
STABILITY****Publication Classification**(51) **Int. Cl.***A61B 8/00* (2006.01)*A61N 7/02* (2006.01)(52) **U.S. Cl.**CPC .. *A61B 8/546* (2013.01); *A61N 7/02* (2013.01)(71) Applicant: **Guided Therapy Systems, LLC**, Mesa,
AZ (US)(72) Inventors: **Michael H. Slayton**, Tempe, AZ (US);
Paul Jaeger, Mesa, AZ (US)(57) **ABSTRACT**(21) Appl. No.: **14/666,958**(22) Filed: **Mar. 24, 2015****Related U.S. Application Data**(63) Continuation of application No. 13/547,011, filed on
Jul. 11, 2012, now Pat. No. 9,011,337.(60) Provisional application No. 61/506,609, filed on Jul.
11, 2011, provisional application No. 61/506,610,
filed on Jul. 11, 2011.

Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from an ultrasound transducer; determining a power level threshold of the ultrasound energy; monitoring a power level of the ultrasound energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; and maintaining the power level threshold of the ultrasound energy.



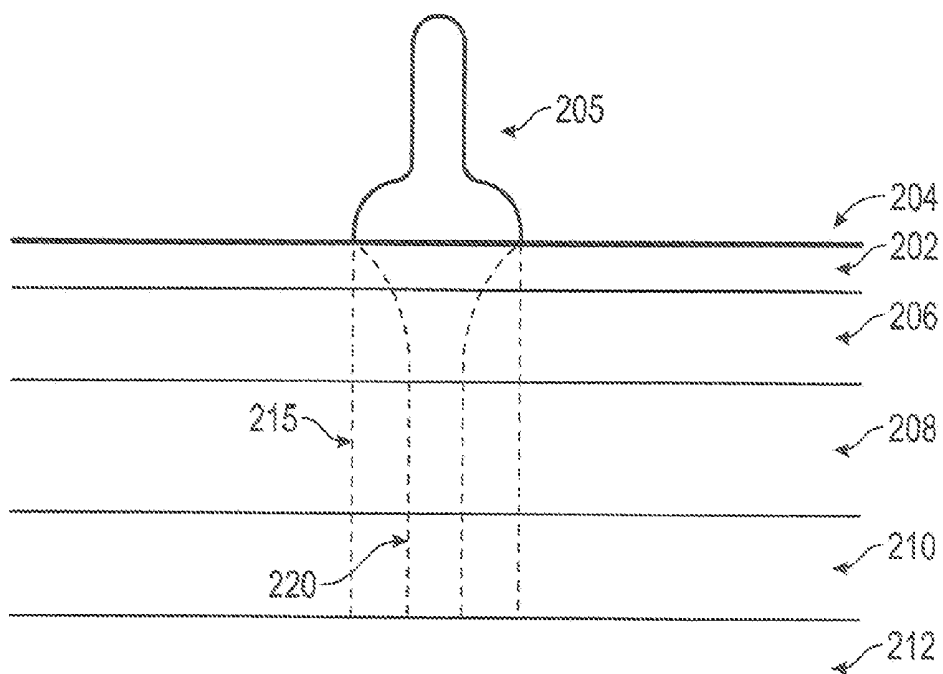


FIG. 1

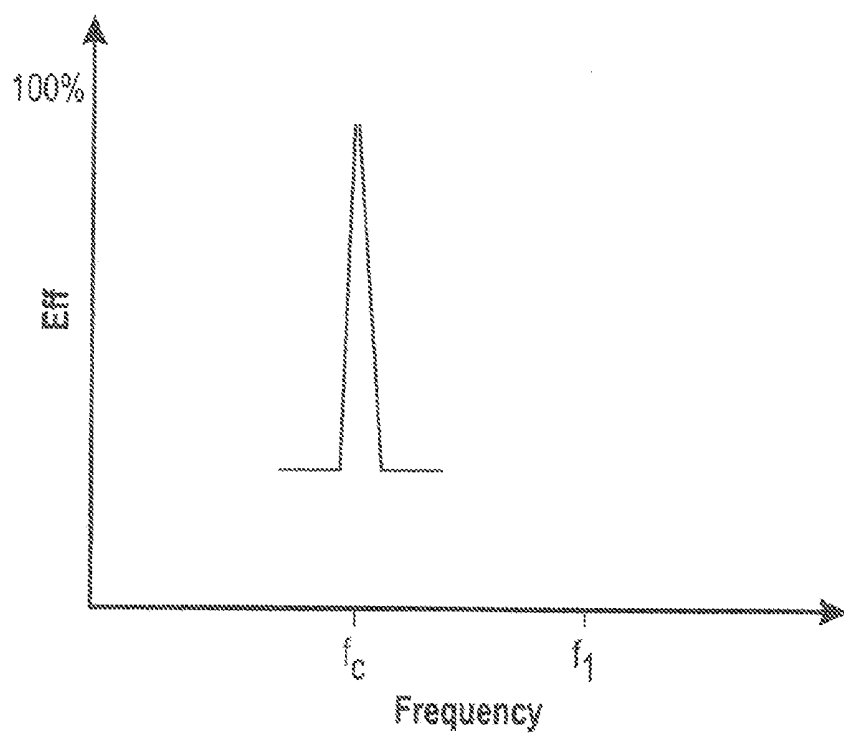


FIG. 2

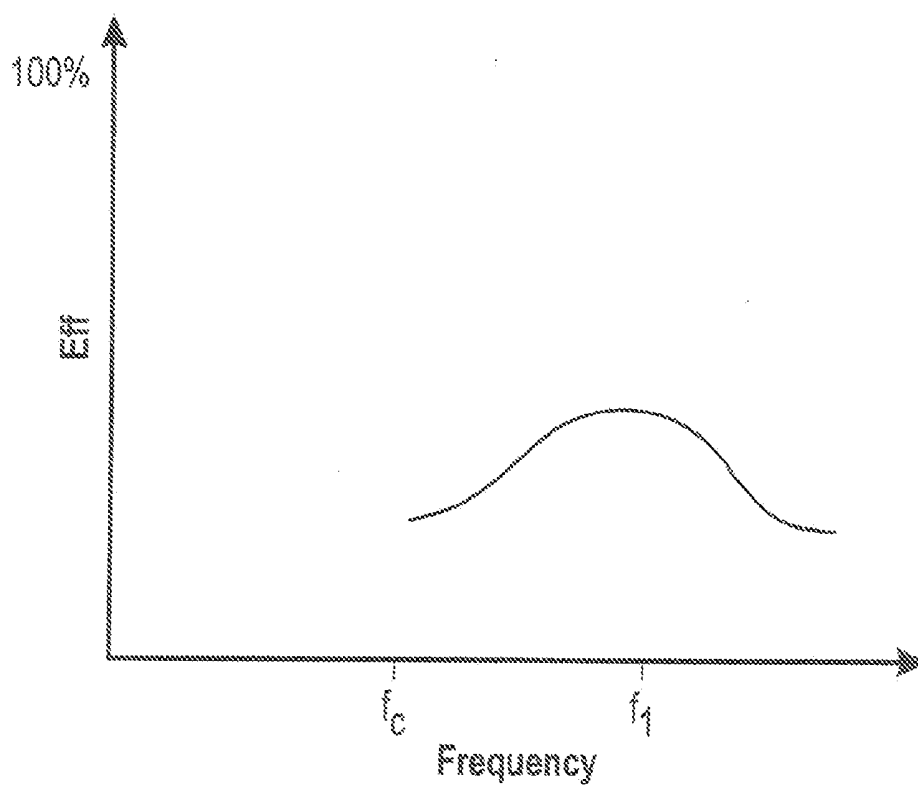


FIG. 3

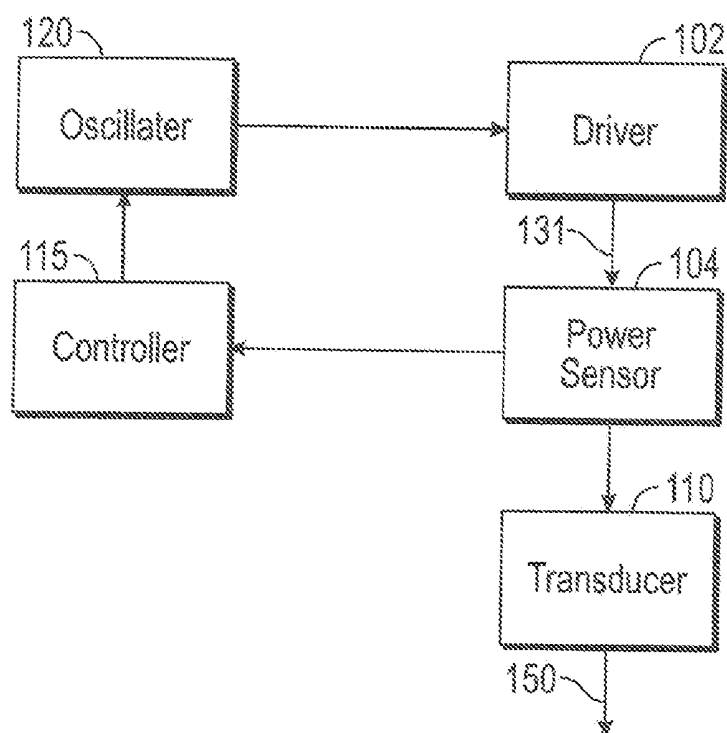


FIG. 4

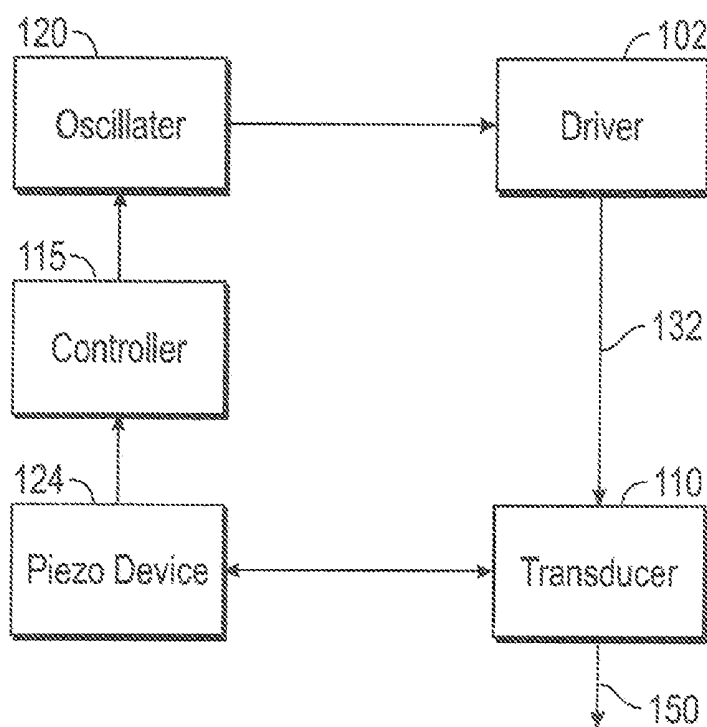


FIG. 5

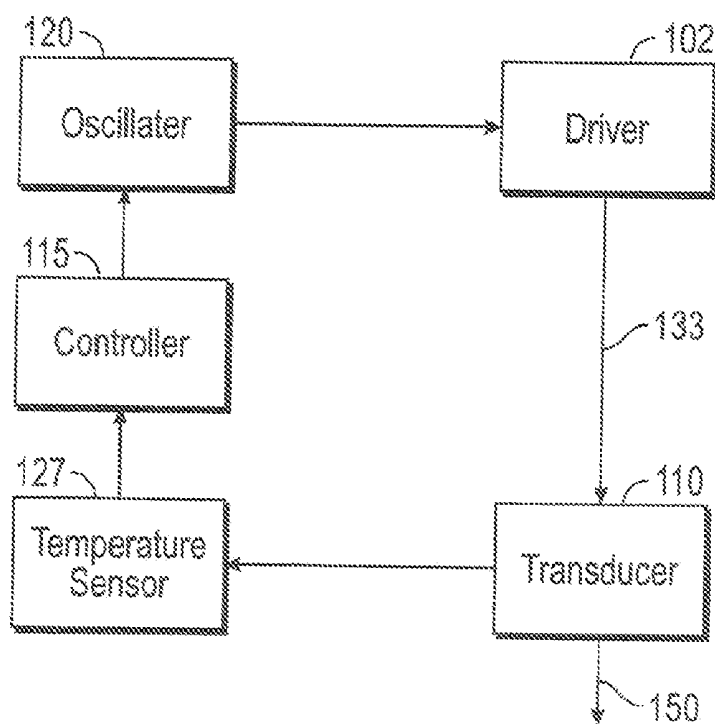


FIG. 6

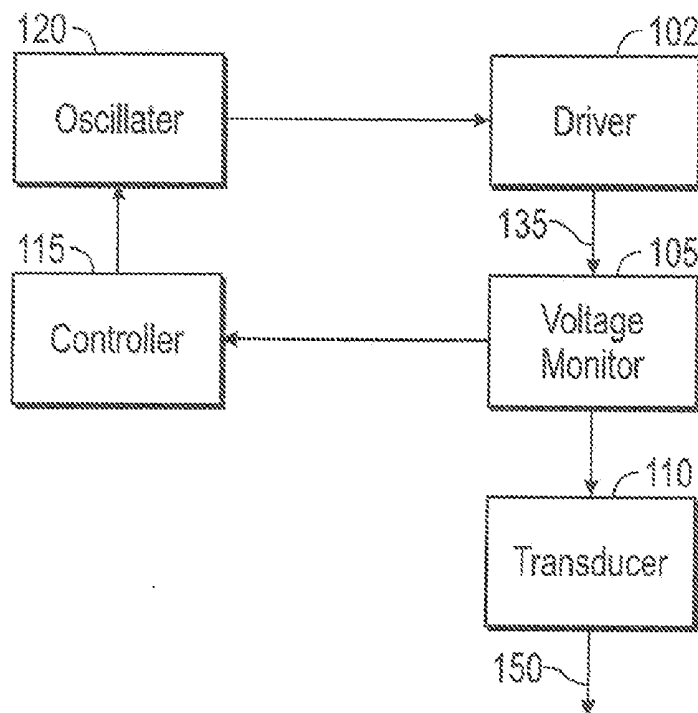


FIG. 7

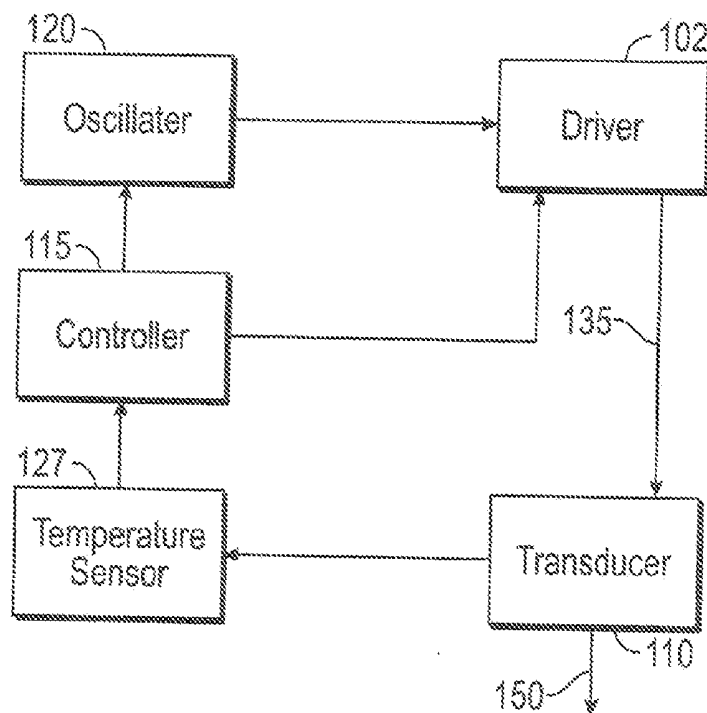


FIG. 8

**SYSTEMS AND METHODS FOR
MONITORING AND CONTROLLING
ULTRASOUND POWER OUTPUT AND
STABILITY**

CROSS-REFERENCE TO RELATED
APPLICATIONS

[0001] This application claims priority to and the benefit of U.S. Provisional Patent Application Ser. No. 61/506,600, entitled "Systems and Methods for Monitoring Ultrasound Power Efficiency," filed Jul. 11, 2011; and U.S. Provisional Patent Application Ser. No. 61/506,610, entitled "Methods and Systems for Controlling Acoustic Energy Deposition into a Medium," filed Jul. 11, 2011; all of which are incorporated by reference herein.

BACKGROUND

[0002] Temperatures change in a treatment device under operate can affect the stability of the device. Cooling the device may help stability, however, cooling device are bulky and require additional energy to operate. Accordingly, new approaches to monitoring ultrasound energy that is transmitted into a region of interest are needed.

SUMMARY

[0003] Various embodiments described herein provide methods and systems for monitoring ultrasound energy. Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from a ultrasound transducer; determining a power level threshold of the ultrasound energy; monitoring a power level of the ultrasound energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; and maintaining the power level threshold of the ultrasound energy.

[0004] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon a change in the power level. In some embodiments, the method can comprise changing power provided to a transducer providing the ultrasound energy based on the adjusting the frequency of the ultrasound energy. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0005] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from an ultrasound transducer; determining a power level threshold of the ultrasound energy; monitoring a temperature of the ultrasound transducer over time; communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon a change in the temperature; and maintaining the power level threshold of the ultrasound energy.

DRAWINGS

[0006] The present disclosure will become more fully understood from the description and the accompanying drawings, wherein:

[0007] FIG. 1 is a cross sectional view illustrating tissue layers and ultrasound energy directed to a portion of the tissue layers, in accordance with various non-limiting embodiments;

[0008] FIG. 2 is a graph illustrating ultrasound efficiency at a frequency, in accordance with various non-limiting embodiments;

[0009] FIG. 3 is a graph illustrating ultrasound efficiency at a frequency, in accordance with various non-limiting embodiments;

[0010] FIG. 4 is a block diagram illustrating a system in accordance with various non-limiting embodiments;

[0011] FIG. 5 is a block diagram illustrating a system in accordance with various non-limiting embodiments;

[0012] FIG. 6 is a block diagram illustrating a system in accordance with various non-limiting embodiments.

[0013] FIG. 7 is a block diagram illustrating a system in accordance with various non-limiting embodiments; and

[0014] FIG. 8 is a block diagram illustrating a system in accordance with various non-limiting embodiments.

DESCRIPTION

[0015] The following description is merely exemplary in nature and is in no way intended to limit the various embodiments, their application, or uses. As used herein, the phrase "at least one of A, B, and C" should be construed to mean a logical (A or B or C), using a non-exclusive logical "or." As used herein, the phrase "A, B and/or C" should be construed to mean (A, B, and C) or alternatively (A or B or C), using a non-exclusive logical "or." It should be understood that steps within a method may be executed in different order without altering the principles of the present disclosure.

[0016] The drawings described herein are for illustrative purposes only of selected non-limiting embodiments and not all possible implementations, and are not intended to limit the scope of any of the various embodiments disclosed herein or any equivalents thereof. It is understood that the drawings are not drawn to scale. For purposes of clarity, the same reference numbers will be used in the drawings to identify similar elements.

[0017] The various embodiments may be described herein in terms of various functional components and processing steps. It should be appreciated that such components and steps may be realized by any number of hardware components configured to perform the specified functions. For example, various embodiments may employ various medical treatment devices, visual imaging and display devices, input terminals and the like, which may carry out a variety of functions under the control of one or more control systems or other control devices. In addition, the embodiments may be practiced in any number of medical contexts and that the various embodiments relating to a method and system for acoustic energy deposition in tissue, as described herein, are merely indicative of one of the many applications for the invention. For example, the principles, features and methods discussed may be applied to any medical application. Further, various aspects of the various embodiments may be suitably applied to cosmetic applications. Moreover, some of the embodiments may be applied to cosmetic enhancement of skin and/or various soft tissue layers.

[0018] Various embodiments provide methods and systems to adjust a temperature of a transducer, in order to maintain maximum efficiency of power applied by the transducer. Some embodiments provide methods and systems to mini-

mize or eliminate temperature saturation of a transducer during the delivery of power to the transducer. In some embodiments, methods and systems can control a temperature of a transducer to maintain a desired frequency of energy transmission at a maximum power.

[0019] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from a ultrasound transducer; determining a power level threshold of the ultrasound energy; monitoring a power level of the ultrasound energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; and maintaining the power level threshold of the ultrasound energy.

[0020] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon a change in the power level. In some embodiments, the method can comprise changing power provided to a transducer providing the ultrasound energy based on the adjusting the frequency of the ultrasound energy. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0021] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from an ultrasound transducer; determining a power level threshold of the ultrasound energy; monitoring a temperature of the ultrasound transducer over time; communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon a change in the temperature; and maintaining the power level threshold of the ultrasound energy.

[0022] In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature is above the temperature threshold.

[0023] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of temperature. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold. In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when a temperature of the ultrasound transducer is above the temperature threshold.

[0024] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from an ultrasound transducer; determining a voltage threshold of the ultrasound energy; monitoring a voltage of the ultrasound transducer over time communicating the voltage to a controller; adjusting the frequency of the ultrasound energy upon a change in the voltage; and maintaining the power level threshold of the ultrasound energy.

[0025] In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

[0026] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0027] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from a ultrasound transducer; determining a voltage threshold of the ultrasound energy; monitoring a voltage of the ultrasound transducer over time; communicating the voltage to a controller; adjusting the frequency of the ultrasound energy upon an change in the voltage; monitoring a power level of the ultrasound energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; and maintaining the power level threshold of the ultrasound energy.

[0028] In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

[0029] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0030] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from a ultrasound transducer; monitoring a power level of the ultrasound energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; monitoring a temperature of the ultrasound transducer over time; communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon an change in the temperature; and maintaining the power level threshold of the ultrasound energy.

[0031] In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

[0032] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0033] Some embodiments provide a method of providing ultrasound energy having a stable power output. The method can comprise providing ultrasound energy from a ultrasound transducer; determining a voltage threshold of the ultrasound energy; monitoring a voltage of the ultrasound transducer over time; communicating the voltage to a controller; adjusting the frequency of the ultrasound energy upon an change in the voltage; monitoring a power level of the ultrasound

energy over time of the ultrasound energy; communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level; monitoring a temperature of the ultrasound transducer over time; communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon a change in the temperature; and maintaining the power level threshold of the ultrasound energy.

[0034] In some embodiments, the method can further comprise determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

[0035] In some embodiments, the method can further comprise emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage. In some embodiments, the method can comprise terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

[0036] In some embodiments, temperature can be monitored by monitoring changes in time of flight of the ultrasound energy from the transducer. In some embodiments, temperature can be monitored by a piezoelectric sensor that may be a portion of transducer, as described herein. In various embodiments, a controller may use a look up table to change a parameter. In some embodiments, controller can employ hardware, software, or a combination of both to change a parameter such as power, voltage or current.

[0037] With reference to FIG. 1, a cross sectional view of tissue layers and ultrasound energy directed to at least one of the tissue layers, according to various embodiments of the present invention, is illustrated. The tissue layers illustrated are skin surface **204**, epidermal layer **202**, dermis layer **206**, fat layer **208**, SMAS layer **210**, and muscle and connective tissue layer **212**. Ultrasound probe **205** transmits ultrasound energy **220** transmitting in ROI **215**. In various embodiments, ultrasound probe **205** is capable of transmitting ultrasound energy **220** transmitting at variable depths in ROI **215**, such as, for example, the depths described herein. Ultrasound probe **205** is capable of transmitting therapeutic ultrasound energy as a single frequency, variable frequencies, or a plurality of frequencies, such as, for example, within the frequency ranges described herein. Ultrasound probe **205** is capable of transmitting ultrasound energy **220** transmitting for variable time periods or to pulse the transmission over time, such as, for example, those time intervals described herein. Ultrasound probe **205** is capable of providing various energy levels of therapeutic ultrasound energy, such as, for example, the energy levels described herein.

[0038] Ultrasound probe **205** may be individual hand-held device, or may be part of a treatment system or part of cosmetic enhancement system. The ultrasound probe **205** can provide both therapeutic ultrasound energy and imaging ultrasound energy. However, ultrasound probe **205** may provide only therapeutic ultrasound energy. Ultrasound probe **205** may comprise a therapeutic transducer and a separate imaging transducer. Ultrasound probe **205** may comprise a transducer or a transducer array capable of both therapeutic and imaging applications. According an alternative embodiment, ultrasound probe **205** is coupled directly to one of the tissue layers, as opposed to skin surface **204** to treat the tissue layer. For example, ultrasound probe **205** can be integrated to or attached to a tool, such as, for example, an arthroscopic

tool, laparoscopic tool, or an endoscopic tool that may be inserted into a patient's body with minimal invasiveness.

[0039] In various embodiments, the ultrasound energy level is in a range of about 0.1 joules to about 500 joules in order to create an ablative lesion. However, the ultrasound energy level can be in a range of from about 0.1 joules to about 100 joules, or from about 1 joules to about 50 joules, or from about 0.1 joules to about 10 joules, or from about 50 joules to about 100 joules, or from about 100 joules to about 500 joules, or from about 50 joules to about 250 joules.

[0040] Further, the amount of time ultrasound energy is applied at these levels varies in the range from approximately 1 millisecond to several minutes. However, a range can be from about 1 millisecond to about 5 minutes, or from about 1 millisecond to about 1 minute, or from about 1 millisecond to about 30 seconds, or from about 1 millisecond to about 10 seconds, or from about 1 millisecond to about 1 second, or from about 1 millisecond to about 0.1 seconds, or about 0.1 seconds to about 10 seconds, or about 0.1 seconds to about 1 second, or from about 1 millisecond to about 200 milliseconds, or from about 1 millisecond to about 0.5 seconds.

[0041] The frequency of the ultrasound energy can be in a range from about 0.1 MHz to about 100 MHz, or from about 0.1 MHz to about 50 MHz, or from about 1 MHz to about 50 MHz or about 0.1 MHz to about 30 MHz, or from about 10 MHz to about 30 MHz, or from about 0.1 MHz to about 20 MHz, or from about 1 MHz to about 20 MHz, or from about 20 MHz to about 30 MHz.

[0042] The frequency of the ultrasound energy can be in a range from about 1 MHz to about 12 MHz, or from about 5 MHz to about 15 MHz, or from about 2 MHz to about 12 MHz or from about 3 MHz to about 7 MHz.

[0043] In some embodiments, the ultrasound energy can be transmitted to depths at or below a skin surface in a range from about 0 mm to about 150 mm, or from about 0 mm to about 100 mm, or from about 0 mm to about 50 mm, or from about 0 mm to about 30 mm, or from about 0 mm to about 20 mm, or from about 0 mm to about 10 mm, or from about 0 mm to about 5 mm. In some embodiments, the ultrasound energy can be transmitted to depths below a skin surface in a range from about 5 mm to about 150 mm, or from about 5 mm to about 100 mm, or from about 5 mm to about 50 mm, or from about 5 mm to about 30 mm, or from about 5 mm to about 20 mm, or from about 5 mm to about 10 mm. In some embodiments, the ultrasound energy can be transmitted to depths below a skin surface in a range from about 10 mm to about 150 mm, or from about 10 mm to about 100 mm, or from about 10 mm to about 50 mm, or from about 10 mm to about 30 mm, or from about 10 mm to about 20 mm, or from about 0 mm to about 10 mm.

[0044] In some embodiments, the ultrasound energy can be transmitted to depths at or below a skin surface in the range from about 20 mm to about 150 mm, or from about 20 mm to about 100 mm, or from about 20 mm to about 50 mm, or from about 20 mm to about 30 mm. In some embodiments, the ultrasound energy can be transmitted to depths at below a skin surface in a range from about 30 mm to about 150 mm, or from about 30 mm to about 100 mm, or from about 30 mm to about 50 mm. In some embodiments, the ultrasound energy can be transmitted to depths at or below a skin surface in a range from about 50 mm to about 150 mm, or from about 50 mm to about 100 mm. In some embodiments, the ultrasound energy can be transmitted to depths at or below a skin surface in a range from about 20 mm to about 60 mm, or from about

40 mm to about 80 mm, or from about 10 mm to about 40 mm, or from about 5 mm to about 40 mm, or from about 0 mm to about 40 mm, or from about 10 mm to about 30 mm, or from about 5 mm to about 30 mm, or from about 0 mm to about 30 mm.

[0045] In various embodiments, a temperature of tissue receiving the ultrasound energy can be in a range from 30° C. to about 100° C., or from 43° C. to about 60° C., or from 50° C. to about 70° C., or from 30° C. to about 50° C., or from 43° C. to about 100° C., or from 33° C. to about 100° C., or from 30° C. to about 65° C., or from 33° C. to about 70° C., as well as variations thereof.

[0046] Also, depending at least in part upon a specific biological effect and the tissue layers that are targeted, temperature of tissue receiving the ultrasound energy within ROI 215 may change in a range from approximately 10° C. to about 15° C. In various embodiments, a temperature of tissue receiving the ultrasound energy is raised to a temperature in a range from about 40° C. to about 55° C., or from about 43° C. to about 48° C., or below a threshold of ablation of the tissue.

[0047] Moving to FIG. 2, a graph illustrates efficiency of an ultrasound transducer at specific frequency f_c , in accordance with various embodiments. Efficiency of a transducer is defined as the ratio of the power output in the desired form to the total power input. Mathematically, if P_{in} represents the total power input and P_{out} represents the power output in the desired form, then the efficiency E , as a ratio between 0 and 1, is given by:

$$E = P_{out} / P_{in} \quad \text{Equation 1}$$

[0048] If $E\%$ represents the efficiency as a percentage, then:

$$E\% = 100 P_{out} / P_{in} \quad \text{Equation 2}$$

[0049] In general, a transducer is not 100% efficient and power is typically lost during the operation of the transducer in the form of heat. However, for a high-Q transducer, efficiency can approach 100% and heat generated by the transducer is minimized. A transducer is most efficient at specific frequency f_c , as illustrated in FIG. 2. The transducer has the maximum power output at frequency f_c .

[0050] When a transducer operates, the transducer heats up over time and the temperature of the transducer changes. As the temperature of the transducer changes, the resonant frequency will shift towards frequency f_r , as illustrated in FIG. 3. This frequency shift decreases the efficiency of the transducer and, the power output from the transducer is significantly lower in the example of FIG. 3 as compared to the example of FIG. 2.

[0051] Transducer efficiency decreases due to changes in temperature of the transducer as a function of time. In addition, a change in temperature of the transducer will cause a frequency shift. The frequency shift changes as a function of increasing temperature of the transducer. A frequency shift decreases efficiency and can cause a system to change total power input to make up for a loss of power applied by the transducer. A frequency shift will change the impedance of the transducer.

[0052] In various embodiments, systems and methods, described herein, monitor transducer temperature and report changes in temperature to a controller to modify the frequency generation to the transducer. In various embodiments, systems and methods can monitor transducer temperature and report changes in temperature to a controller to modify the total power input to the transducer. In various embodiments,

systems and methods can monitor efficiency and controls transducer temperature to prevent energy transmission from a shift in frequency.

[0053] In various embodiments, systems and methods can at least one of monitor transducer temperature and control transducer temperature. In various embodiments, systems and methods can operate the transducer to at or near maximum efficiency of power over a period of time. In various embodiments, systems and methods can operate the transducer to at or near maximum efficiency of power as a temperature of the transducer changes. In various embodiments, systems and methods can modify temperature of the transducer to maintain operation at or near maximum efficiency of power. In various embodiments, systems and methods can prevent a change in impedance of the transducer.

[0054] In some embodiments, energy emission, such as, an ultrasound emission, can be directed to targeted tissue to initiate a desired treatment to the targeted tissue. If the power of the energy emission, such as, an ultrasound emission, is too high, the targeted tissue can be permanently damaged, which provide pain to the patient being treated. In addition, if the power of the energy emission such as, an ultrasound emission, is too high, the desired treatment to the targeted tissue may not be effective. If the power of the energy emission, such as, an ultrasound emission, is too low, the desired treatment to the targeted tissue may not be effective.

[0055] If the efficiency of the transducer degrades, the power of energy emission decreases. If the temperature of the transducer changes, the efficiency of the transducer changes and the power of energy emission decreases. For the most effective treatment to targeted tissue, power of energy emission is constant. Various embodiments provide methods and systems to provide constant energy emission from transducer 110 that is directed to targeted tissue.

[0056] Referring to FIG. 4, system 131 is illustrated, in accordance with some embodiments. System 131 can comprise drivers 102, power sensor 104, transducer 110, controller 115, and oscillator 120. In various embodiments, oscillator 120 generates a frequency which is communicated to drivers 102 to power transducer 110 to produce energy transmission 150 at the frequency. Oscillator 120 can be an oscillator or any frequency generator, now known or later developed. For example, oscillator 120 can be but is not limited to, a function generator, a frequency generator, a waveform generator, a signal generator, pitch generator, a wave generator, or a pulse generator, frequency synthesizer, direct digital synthesizer, or combinations thereof. In some embodiments, oscillator 120 can be combined with or integrated to drivers 102. In some embodiments, oscillator 120 is programmable. In some embodiments, controller 115 can be combined with or integrated to at least one of oscillator 120 and drivers 102. In some embodiments, power sensor 104 can be combined with or integrated to at least one of oscillator 120, controller 115 and drivers 102. In some embodiments, power sensor 104 can be combined with or integrated to at least one of oscillator 120, and drivers 102. In some embodiments, power sensor 104 can be combined with or integrated to at least one of controller 115 and drivers 102. In some embodiments, power sensor 104 can be combined with or integrated to at least one of oscillator 120, and controller 115. In some embodiments, power sensor 104 can be combined with or integrated to drivers 102. In some embodiments, power sensor 104 can be

combined with or integrated to oscillator **120**. In some embodiments, power sensor **104** can be combined with or integrated to controller **115**.

[0057] In some embodiments, power sensor **104** monitors power input from drivers **102** to transducer **110**. In some embodiments, power sensor **104** communicates with controller **115**, which controls oscillator **120**. In some embodiments, controller **115** receives signal from power sensor **104** and controls a frequency generated by oscillator **120** based on the received signal. In some embodiments, power sensor **104** communicates a power level of the power input from drivers **102**.

[0058] As transducer **110** efficiency of energy transmission **150** degrades, for example as illustrated in FIG. 3, drivers **102** changes the power input to transducer **110**. In some embodiments, power sensor **104** detects the change in power input to transducer **110** and communicates with controller **115**, which controls oscillator **120** to change in the power level of the power input from supply and/or drivers **102**. In some embodiments, oscillator **120** generates a correction to the frequency which is communicated to the drivers **102**, which is based on the communication from the power sensor **104**. In some embodiments, the correction to the frequency lowers the power level of power input from drivers **102**. In some embodiments, energy transmission **150** is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the power input from the drivers **102** to transducer **110** below a threshold, power sensor **104** communicates this elevated power level to controller **115**, which controls oscillator **120** for another generation of a correction to the frequency. In some embodiments, system **131** comprises a shut off power function, which is initiated if power sensor **104** detects a power level that is above a predetermined threshold. In some embodiments, the shut off power function prevents the damaging or destroying of transducer **110**.

[0059] In some embodiments, the thickness of the transduction element of transducer **110** may be configured to be uniform. That is, the transduction element may be configured to have a thickness that is generally substantially the same throughout. In another exemplary embodiment, the transduction element may also be configured with a variable thickness, and/or as a multiple damped device. For example, the transduction element of transducer **110** may be configured to have a first thickness selected to provide a specific operating frequency of a lower range, for example from approximately 1 kHz to 3 MHz. The transduction element may also be configured with a second thickness selected to provide a specific operating frequency of a higher range, for example from approximately 3 to 100 MHz or other frequency ranges described herein.

[0060] In yet another exemplary embodiment, transducer **110** may be configured as a single broadband transducer excited with two or more frequencies to provide an adequate output for raising the temperature within ROI **215** to the desired level. Transducer **110** may also be configured as two or more individual transducers, wherein each transducer **110** may comprise a transduction element. The thickness of the transduction elements may be configured to provide specific operating frequencies in a desired treatment range. For example, in some embodiments, transducer **110** may comprise a first transducer **110** configured with a first transduction element having a thickness corresponding to a specific frequency range of approximately 1 MHz to 3 MHz, and a

second transducer **110** configured with a second transduction element having a thickness corresponding to a specific frequency of approximately 3 MHz to 100 MHz or frequency ranges described herein.

[0061] Moreover, in some embodiments, any variety of mechanical lenses or variable focus lenses, e.g. liquid-filled lenses, may also be used to focus and or defocus the energy field. For example, transducer **110** may also be configured with an electronic focusing array in combination with one or more transduction elements to facilitate changed flexibility in treating ROI **215**. Array may be configured in a manner similar to transducer **110**. That is, array may be configured as an array of electronic apertures that may be operated by a variety of phases via variable electronic time delays. Accordingly, the electronic apertures of array may be manipulated, driven, used, configured to produce and/or deliver energy in a manner corresponding to the phase variation caused by the electronic time delay. For example, these phase variations may be used to deliver defocused beams, planar beams, and/or focused beams, each of which may be used in combination to achieve different physiological effects in ROI **215**.

[0062] Transduction elements may be configured to be concave, convex, and/or planar. For example, transduction elements can be configured to be concave in order to provide focused energy for treatment of ROI **215**. In another exemplary embodiment, transduction elements may be configured to be substantially flat in order to provide substantially uniform energy to ROI **215**. In addition, transduction elements may be configured to be any combination of concave, convex, and/or substantially flat structures. For example, a first transduction element may be configured to be concave, while a second transduction element may be configured to be substantially flat.

[0063] Moreover, transduction element can be any distance from the skin surface **204**. In that regard, it can be far away from the skin surface **204** disposed within a long transducer **110** or it can be just a few millimeters from skin surface **204**. In certain exemplary embodiments, positioning the transduction element closer to skin surface **204** is better for transmitting ultrasound at high frequencies. Moreover, both two and three dimensional arrays of transduction elements can be used in various embodiments.

[0064] In some embodiments, transducer **110** may also be configured as an annular array to provide planar, focused and/or defocused acoustical energy. For example, in some embodiments, an annular array may comprise a plurality of rings. Rings may be mechanically and electrically isolated into a set of individual elements, and may create planar, focused, or defocused waves. For example, such waves can be specified on-axis, such as by methods of adjusting corresponding phase delays. An electronic focus may be moved along various depth positions in ROI **215**, and may enable variable strength or beam tightness, while an electronic defocus may have varying amounts of defocusing. In some embodiments, a lens and/or convex or concave shaped annular array may also be provided to aid focusing or defocusing such that any time differential delays can be reduced. Movement of annular array in one, two or three-dimensions, or along any path, such as through use of probes, motion mechanisms, any conventional robotic arm mechanisms, and the like may be implemented to scan and/or treat a volume or any corresponding space within ROI **215**.

[0065] In FIG. 5, system **132** is illustrated, in accordance with some embodiments. System **132** can comprise drivers

102, transducer 110, piezoelectric sensor 124, controller 115, and oscillator 120. In some embodiments, piezoelectric sensor 124 can be combined with or integrated to at least one of oscillator 120 and drivers 102. In some embodiments, piezoelectric sensor 124 can be combined with or integrated into oscillator 120. In some embodiments, piezoelectric sensor 124 can be combined with or integrated to drivers 102. In various embodiments, oscillator 120 generates a frequency which is communicated to drivers 102 to power transducer 110 to produce energy transmission 150 at the frequency. In some embodiments, piezoelectric sensor 124 monitors heat generated by transducer 110. In some embodiments, piezoelectric sensor 124 is coupled to transducer 110. In some embodiments, piezoelectric sensor 124 is integrated to transducer 110. For example, piezoelectric sensor 124 may be a portion of transducer 110, which that is isolated or insulation from the rest of transducer 110, and may comprise identical materials as transducer 110. However, in one aspect of this example, piezoelectric sensor 124 has the opposite temperature coefficient of transducer (same coefficient but opposite sign) and the piezoelectric sensor 124 changes temperature at the same rate as transducer 110, thus compensating for changes in temperature of transducer 110.

[0066] Piezoelectric sensor 124 can comprise ceramic, or any other material or combination of material described herein. In some embodiments, piezoelectric sensor 124 is configured with a temperature coefficient that is lower than the temperature coefficient of transducer 110. In some embodiments, piezoelectric sensor 124 is configured with temperature coefficient, which is negative. In various embodiments, piezoelectric sensor 124 generates an electric potential in response to a temperature change, and communicates this electric potential to controller 115, which controls oscillator 120. In some embodiments, piezoelectric sensor 124 communicates with oscillator 120. In some embodiments, controller 115 receives signal from piezoelectric sensor 124 and controls a frequency generated by oscillator 120 based on the received signal. In some embodiments, piezoelectric sensor 124 communicates the heat generated by transducer 110, which can be communicated using temperature.

[0067] As transducer 110 efficiency of energy transmission 150 degrades, for example as illustrated in FIG. 3, heat generated by transducer 110 changes. For example, drivers 102 changes the power input to transducer 110, which can change the heat generated by transducer 110. In some embodiments, piezoelectric sensor 124 detects the change in heat generation by transducer 110 and communicates with controller 115, which controls oscillator 120, the change in heat generation. In some embodiments, oscillator 120 generates a correction to the frequency which is communicated to the drivers 102, which is based on the communication from the piezoelectric device 124. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102, which can lower the amount of heat that is generated by transducer 110. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102. In some embodiments, energy transmission 150 is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the power input from the drivers 102 to transducer 110 below a threshold, piezoelectric sensor 124 communicates this elevated heat generation by transducer 110 to oscillator 124 for another generation of a correction to the frequency. In some embodi-

ments, system 132 comprises a shut off power function, which is initiated if piezoelectric sensor 124 detects a heat generation level or a temperature of transducer 110 is above a predetermined threshold. In some embodiments, the shut off power function prevents the damaging or destroying of transducer 110.

[0068] Turning to FIG. 6, system 133 is illustrated, in accordance with some embodiments. System 133 can comprise drivers 102, transducer 110, temperature sensor 127, and oscillator 120. In some embodiments, temperature sensor 127 can be combined with or integrated to at least one of oscillator 120 and drivers 102. In various embodiments, oscillator 120 generates a frequency which is communicated to drivers 102 to power transducer 110 to produce energy transmission 150 at the frequency. In some embodiments, temperature sensor 127 monitors temperature of transducer 110. In some embodiments, temperature sensor 127 coupled to transducer 110. In some embodiments, temperature sensor 127 is integrated to transducer 110. Temperature sensor 127 can be any suitable temperature sensor, now known or later developed. In some embodiments, temperature sensor 127 communicates with controller 115, which communicates with oscillator 120. In some embodiments, temperature sensor 127 communicates with oscillator 120. In some embodiments, controller 115 receives signal from temperature sensor 127 and controls a frequency generated by oscillator 120 based on the received signal. In some embodiments, temperature sensor 127 communicates the temperature of by transducer 110.

[0069] As transducer 110 efficiency of energy transmission 150 degrades, for example as illustrated in FIG. 3, heat generated by transducer 110 changes. For example, drivers 102 changes the power input to transducer 110, which can change the heat generated by transducer 110. In some embodiments, temperature sensor 127 detects the change in heat generation by transducer 110 and communicates with controller 115, which controls oscillator 120, the change in heat generation. In some embodiments, oscillator 120 generates a correction to the frequency which is communicated to the drivers 102, which is based on the communication from the piezoelectric device 124. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102, which can lower the amount of heat that is generated by transducer 110. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102. In some embodiments, energy transmission 150 is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the power input from the drivers 102 to transducer 110 below a threshold, temperature sensor 127 communicates this elevated heat generation by transducer 110 to oscillator 124 for another generation of a correction to the frequency. In some embodiments, system 132 comprises a shut off power function, which is initiated if temperature sensor 127 detects a heat generation level or a temperature of transducer 110 is above a predetermined threshold. In some embodiments, the shut off power function prevents the damaging or destroying of transducer 110.

[0070] Moving to FIG. 7, system 135 is illustrated, in accordance with some embodiments. System 135 can comprise drivers 102, voltage monitor 105, transducer 110, controller 115, and oscillator 120. In various embodiments, oscillator 120 generates a frequency which is communicated to drivers 102 to power transducer 110 to produce energy trans-

mission 150 at the frequency. Oscillator 120 can be an oscillator or any frequency generator, now known or later developed. For example, oscillator 120 can be but is not limited to, a function generator, a frequency generator, a waveform generator, a signal generator, pitch generator, a wave generator, or a pulse generator, frequency synthesizer, direct digital synthesizer, or combinations thereof. In some embodiments, oscillator 120 can be combined with or integrated to drivers 102. In some embodiments, oscillator 120 is programmable. In some embodiments, controller 115 can be combined with or integrated to at least one of oscillator 120 and drivers 102. In some embodiments, voltage monitor 105 can be combined with or integrated to at least one of oscillator 120, controller 115 and drivers 102. In some embodiments, voltage monitor 105 can be combined with or integrated to at least one of oscillator 120, and drivers 102. In some embodiments, voltage monitor 105 can be combined with or integrated to at least one of controller 115 and drivers 102. In some embodiments, voltage monitor 105 can be combined with or integrated to at least one of oscillator 120, and controller 115. In some embodiments, voltage monitor 105 monitors voltage of power from drivers 102 to transducer 110. In some embodiments, voltage monitor 105 communicates with controller 115, which controls oscillator 120. In some embodiments, controller 115 receives signal from voltage monitor 105 and controls a frequency generated by oscillator 120 based on the received signal. In some embodiments, voltage monitor 105 communicates a voltage level of the voltage of power from drivers 102.

[0071] As transducer 110 efficiency of energy transmission 150 degrades, for example as illustrated in FIG. 3, drivers 102 changes the voltage of power to transducer 110. In some embodiments, voltage monitor 105 detects the increase in voltage of power to transducer 110 and communicates with controller 115, which controls oscillator 120 to change in the voltage level of the voltage of power from supply and/or drivers 102. In some embodiments, oscillator 120 generates a correction to the frequency which is communicated to the drivers 102, which is based on the communication from the voltage monitor 105. In some embodiments, the correction to the frequency lowers the voltage level of voltage of power from drivers 102. In some embodiments, energy transmission 150 is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the voltage of power from the drivers 102 to transducer 110 below a threshold, voltage monitor 105 communicates this elevated voltage level to controller 115, which controls oscillator 120 for another generation of a correction to the frequency. In some embodiments, system 135 comprises a shut off power function, which is initiated if voltage monitor 105 detects a voltage level that is above a predetermined threshold. In some embodiments, the shut off power function prevents the damaging or destroying of transducer 110.

[0072] FIG. 8 With reference to FIG. 8, system 135 is illustrated, in accordance with some embodiments. System 135 can comprise drivers 102, transducer 110, temperature sensor 127, and oscillator 120. In some embodiments, temperature sensor 127 can be combined with or integrated to at least one of oscillator 120 and drivers 102. In various embodi-

ments, oscillator 120 generates a frequency which is communicated to drivers 102 to power transducer 110 to produce energy transmission 150 at the frequency. In some embodiments, temperature sensor 127 monitors temperature of transducer 110. In some embodiments, temperature sensor 127 coupled to transducer 110. In some embodiments, temperature sensor 127 is integrated to transducer 110. Temperature sensor 127 can be any suitable temperature sensor, now known or later developed. In some embodiments, temperature sensor 127 communicates with controller 115, which communicates with oscillator 120. In some embodiments, temperature sensor 127 communicates with oscillator 120. In some embodiments, controller 115 receives signal from temperature sensor 127 and controls a frequency generated by oscillator 120 based on the received signal. In some embodiments, temperature sensor 127 communicates the temperature of by transducer 110. As transducer 110 efficiency of energy transmission 150 degrades, for example as illustrated in FIG. 3, drivers 102 changes the power to transducer 110, which change the voltage across the transducer 110. In some embodiments, controller 115 detects the change in voltage across transducer 110 and communicates with controller 115. In some embodiments, oscillator 120 generates a correction to the frequency which is communicated to the drivers 102, which is based on the communication from controller 115. In some embodiments, the correction to the frequency lowers the voltage level of voltage across transducer 110. In some embodiments, energy transmission 150 is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the voltage across transducer 110 below a threshold, controller 115 communicates this elevated voltage level to oscillator 120 for another generation of a correction to the frequency.

[0073] As transducer 110 efficiency of energy transmission 150 degrades, for example as illustrated in FIG. 3, heat generated by transducer 110 changes. For example, drivers 102 changes the power input to transducer 110, which can change the heat generated by transducer 110. In some embodiments, temperature sensor 127 detects the change in heat generation by transducer 110 and communicates with controller 115, which controls oscillator 120, the change in heat generation. In some embodiments, oscillator 120 generates a correction to the frequency which is communicated to the drivers 102, which is based on the communication from the piezoelectric device 124. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102, which can lower the amount of heat that is generated by transducer 110. In some embodiments, the correction to the frequency lowers the power level of power input from drivers 102. In some embodiments, energy transmission 150 is corrected to specific frequency f_c as illustrated in FIG. 2. If this correction to specific frequency f_c does not lower the power input from the drivers 102 to transducer 110 below a threshold, temperature sensor 127 communicates this elevated heat generation by transducer 110 to oscillator 124 for another generation of a correction to the frequency. In some embodiments, system 132 comprises a shut off power function, which is initiated if temperature sensor 127 detects a heat generation level or a temperature of transducer 110 is above a predetermined threshold. In some embodiments, the shut off power function prevents the damaging or destroying of transducer 110.

[0074] The following patents and patent applications are incorporated by reference: US Patent Application Publication

No. 20050256406, entitled “Method and System for Controlled Scanning, Imaging, and/or Therapy” published Nov. 17, 2005; US Patent Application Publication No. 20060058664, entitled “System and Method for Variable Depth Ultrasound Treatment” published Mar. 16, 2006; US Patent Application Publication No. 20060084891, entitled “Method and System for Ultra-High Frequency Ultrasound Treatment” published Apr. 20, 2006; U.S. Pat. No. 7,530,958, entitled “Method and System for Combined Ultrasound Treatment” issued May 12, 2009; US Patent Application Publication No. 2008071255, entitled “Method and System for Treating Muscle, Tendon, Ligament, and Cartilage Tissue” published Mar. 20, 2008; U.S. Pat. No. 6,623,430, entitled “Method and Apparatus for Safely Delivering Medicants to a Region of Tissue Using Imaging, Therapy, and Temperature Monitoring Ultrasonic System, issued Sep. 23, 2003; U.S. Pat. No. 7,571,336, entitled “Method and System for Enhancing Safety with Medical Peripheral Device by Monitoring if Host Computer is AC Powered” issued Aug. 4, 2009; US Patent Application Publication No. 20080281255, entitled “Methods and Systems for Modulating Medicants Using Acoustic Energy” published Nov. 13, 2008; US Patent Application Publication No. 20060116671, entitled “Method and System for Controlled Thermal Injury of Human Superficial Tissue,” published Jun. 1, 2006; US Patent Application Publication No. 20060111744, entitled “Method and System for Treatment of Sweat Glands,” published May 25, 2006; US Patent Application Publication No. 20080294073, entitled “Method and System for Non-Ablative Acne Treatment and Prevention,” published Oct. 8, 2009; U.S. Pat. No. 8,133,180, entitled “Method and System for Treating Cellulite,” issued Mar. 13, 2012; U.S. Pat. No. 8,066,641, entitled “Method and System for Photoaged Tissue,” issued Nov. 29, 2011; U.S. Pat. No. 7,491,171, entitled “Method and System for Treating Acne and Sebaceous Glands,” issued Feb. 17, 2009; U.S. Pat. No. 7,615,016, entitled “Method and System for Treating Stretch Marks,” issued Nov. 10, 2009; and U.S. Pat. No. 7,530,356, entitled “Method and System for Noninvasive Mastopexy,” issued May 12, 2009.

[0075] It is believed that the disclosure set forth above encompasses at least one distinct invention with independent utility. While the invention has been disclosed herein, the specific embodiments thereof as disclosed and illustrated herein are not to be considered in a limiting sense as numerous variations are possible. The subject matter of the inventions includes all novel and non-obvious combinations and sub combinations of the various elements, features, functions and/or properties disclosed herein.

[0076] Various embodiments and the examples described herein are not intended to be limiting in describing the full scope of systems and methods of this invention. Equivalent changes, modifications and variations of various embodiments, materials, systems, and methods may be made within the scope of the present invention, with substantially similar results.

1. A method of providing ultrasound energy having a stable power output, the method comprising:

providing ultrasound energy from an ultrasound transducer;
monitoring a power level of the ultrasound energy over time of the ultrasound energy;
communicating a power level to a controller; adjusting the frequency of the ultrasound energy upon a change in the power level;
monitoring a temperature of the ultrasound transducer over time;
communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon a change in the temperature; and
maintaining the power level threshold of the ultrasound energy.

2. The method according to claim 1 further comprising determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

3. The method according to claim 1 further comprising emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage.

4. The method according to claim 1 further comprising terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

5. A method of providing ultrasound energy having a stable power output, the method comprising:

providing ultrasound energy from an ultrasound transducer;
monitoring a power level of the ultrasound energy over time of the ultrasound energy;
communicating a power level to a controller;
adjusting the frequency of the ultrasound energy upon a change in the power level;
monitoring a temperature of the ultrasound transducer over time;
communicating the temperature to a controller; adjusting the frequency of the ultrasound energy upon a change in the temperature; and
maintaining the power level threshold of the ultrasound energy.

6. The method according to claim 5 further comprising determining a temperature threshold of the ultrasound transducer and terminating the providing ultrasound energy when the temperature of the ultrasound transducer is above the temperature threshold.

7. The method according to claim 5 further comprising emitting the ultrasound energy at a specific frequency and correcting the frequency to the specific frequency upon the change of voltage.

8. The method according to claim 5 further comprising terminating the providing the ultrasound energy upon a change of the power level above the power level threshold.

* * * * *

专利名称(译)	用于监视和控制超声功率输出和稳定性的系统和方法		
公开(公告)号	US20150190121A1	公开(公告)日	2015-07-09
申请号	US14/666958	申请日	2015-03-24
申请(专利权)人(译)	引导治疗系统公司		
当前申请(专利权)人(译)	引导治疗系统有限责任公司		
[标]发明人	SLAYTON MICHAEL H JAEGER PAUL		
发明人	SLAYTON, MICHAEL H. JAEGER, PAUL		
IPC分类号	A61B8/00 A61N7/02		
CPC分类号	A61N7/02 A61B8/546 A61B8/4444 A61B8/4483 A61B2018/00678 A61B2018/00732 A61B2018/00779 A61B2018/00791 A61N7/00		
优先权	61/506609 2011-07-11 US 61/506610 2011-07-11 US		
其他公开文献	US9526477		
外部链接	Espacenet USPTO		

摘要(译)

一些实施例提供了一种提供具有稳定功率输出的超声能量的方法。该方法可以包括从超声换能器提供超声能量;确定超声能量的功率水平阈值;监测超声能量随时间的功率水平;将功率电平传送给控制器;在功率水平变化时调节超声能量的频率;并保持超声能量的功率水平阈值。

