



US 20160143618A1

(19) **United States**(12) **Patent Application Publication**
PARK(10) **Pub. No.: US 2016/0143618 A1**(43) **Pub. Date: May 26, 2016**(54) **DETACHABLY JOINED ULTRASONIC
PROBE DEVICE****Publication Classification**(71) Applicant: **HUMANSKAN CO., LTD.**, Ansan-si,
Gyeonggi-do (KR)(51) **Int. Cl.**
A61B 8/00 (2006.01)(72) Inventor: **Wonseop PARK**, Seoul (KR)(52) **U.S. Cl.**
CPC **A61B 8/4411** (2013.01); **A61B 8/4488**
(2013.01); **A61B 8/4444** (2013.01)(73) Assignee: **HUMANSKAN CO., LTD.**,
Gyeonggi-do (KR)(57) **ABSTRACT**(21) Appl. No.: **14/784,912**

The present invention relates to a detachably joined ultrasonic probe device, including modular ultrasonic probe and a case for detachably joining with the modular ultrasonic probes, which enables the user to select a suitable ultrasonic probe according to desired performance and diagnosis frequency region. The device according to the present invention includes: a plurality of ultrasonic probe modules horizontally arranged in the direction of generating an ultrasonic wave; a case consisting of an outer housing with one open side for receiving and enclosing the plurality of ultrasonic probe modules, and a separation housing provided between the plurality of ultrasonic probe modules for separating the ultrasonic modules from one another, so as to detachably join with the ultrasonic modules; and a control module installed in the case for controlling the plurality of ultrasonic probe modules.

(22) PCT Filed: **Mar. 21, 2014**(86) PCT No.: **PCT/KR2014/002386**

§ 371 (c)(1),

(2) Date: **Oct. 15, 2015**(30) **Foreign Application Priority Data**

May 9, 2013 (KR) 10-2013-0052553

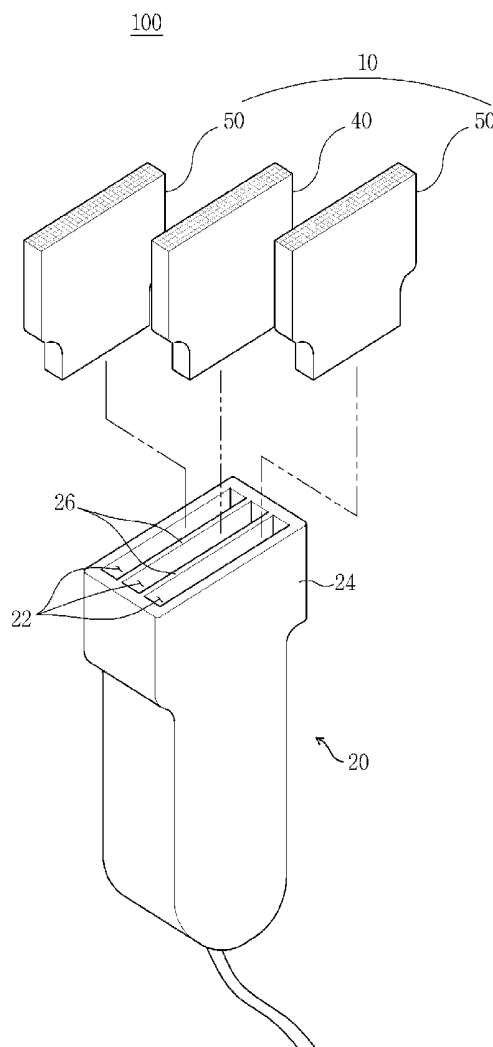


FIG. 1

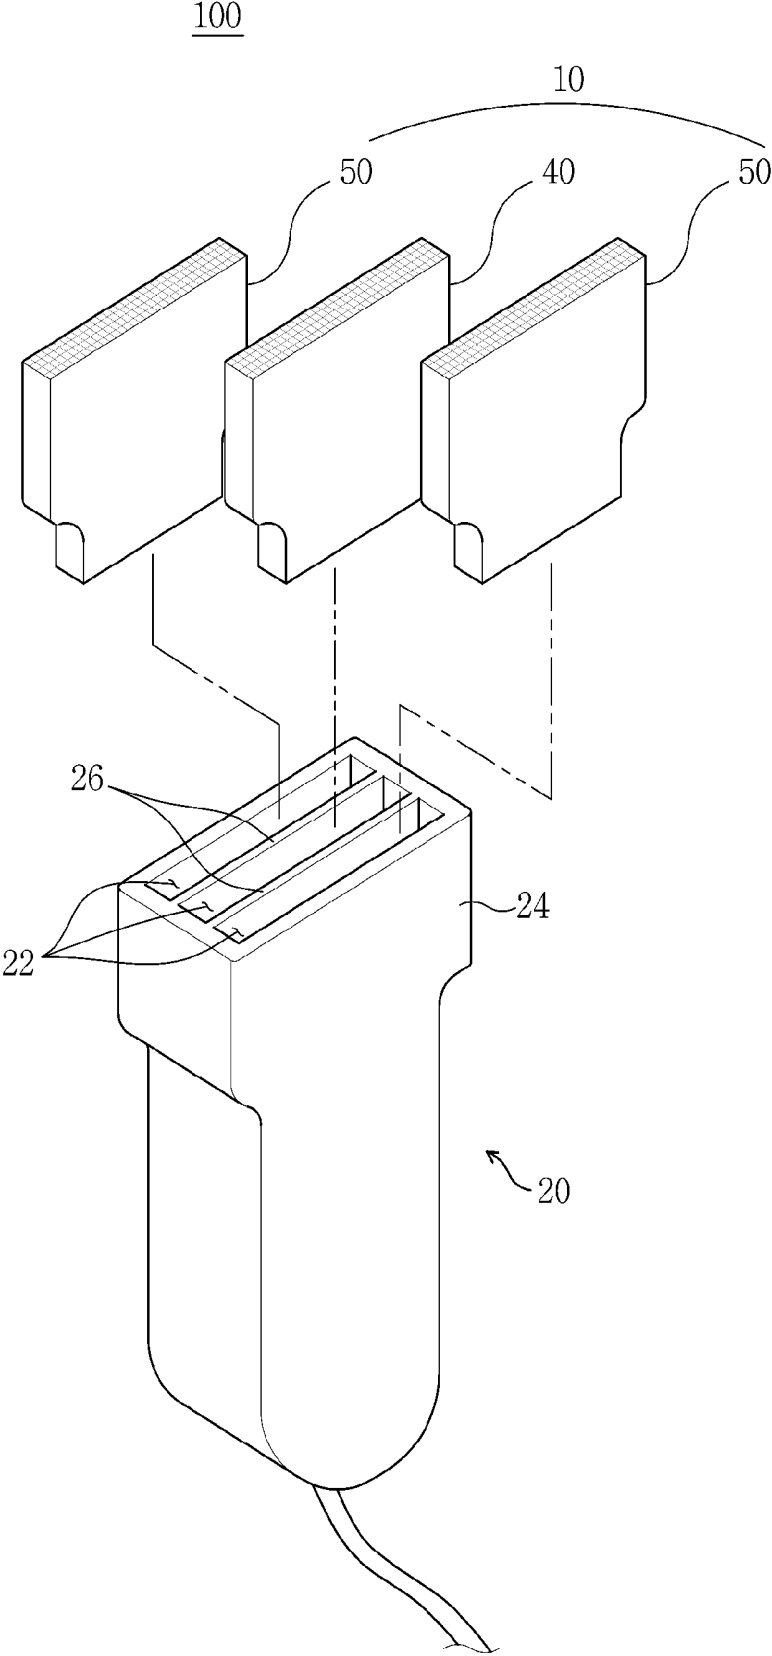


FIG. 2

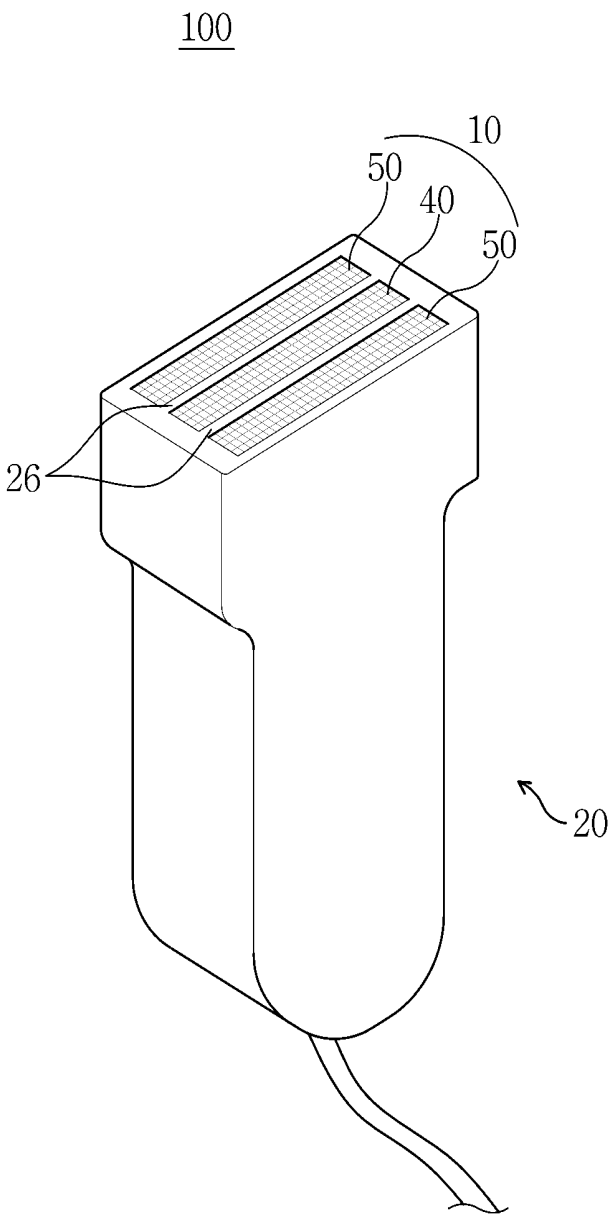


FIG. 3

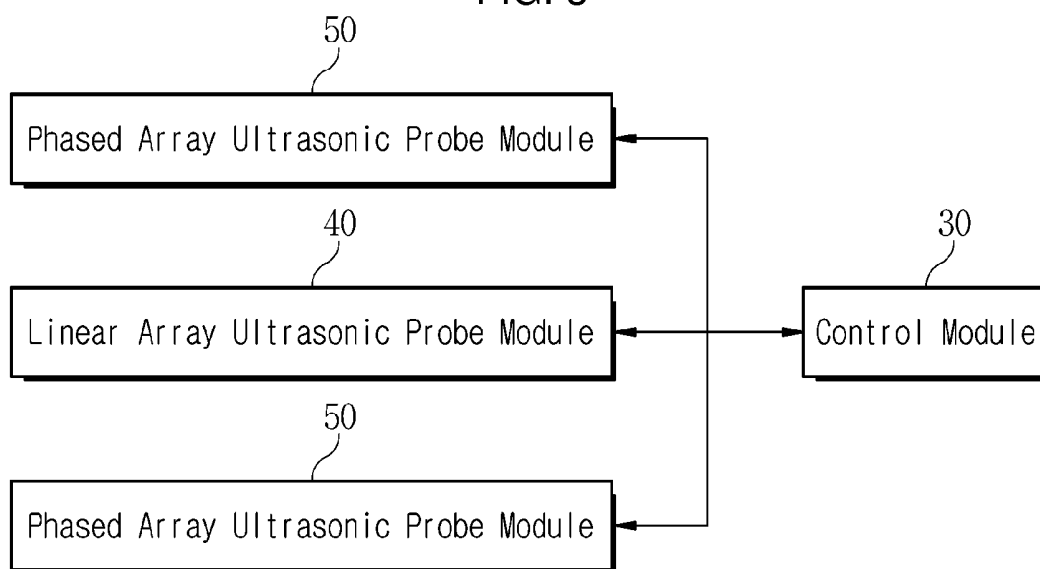


FIG. 4


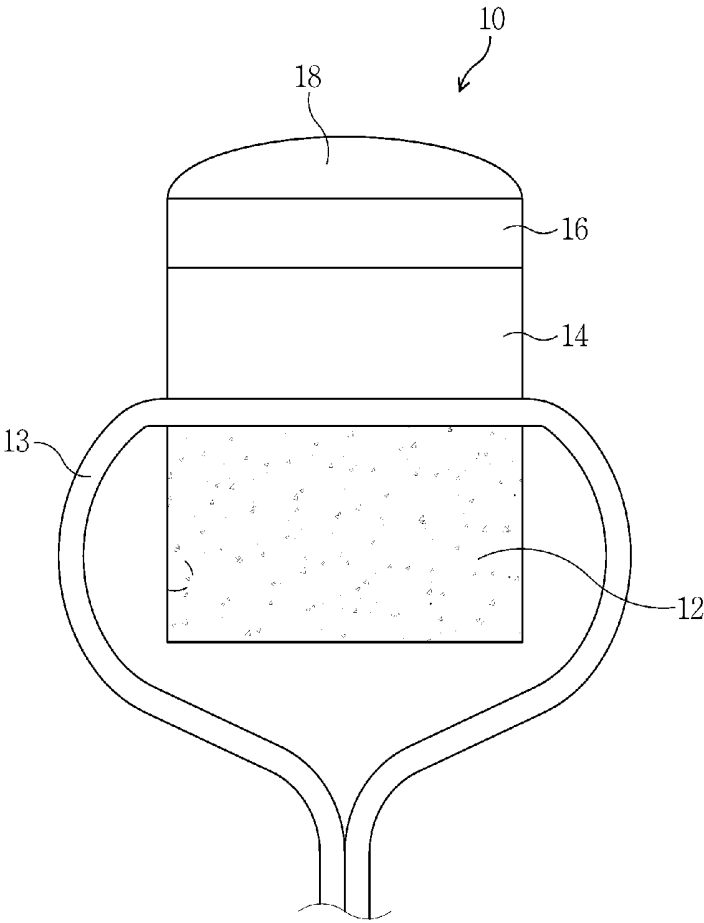


FIG. 5

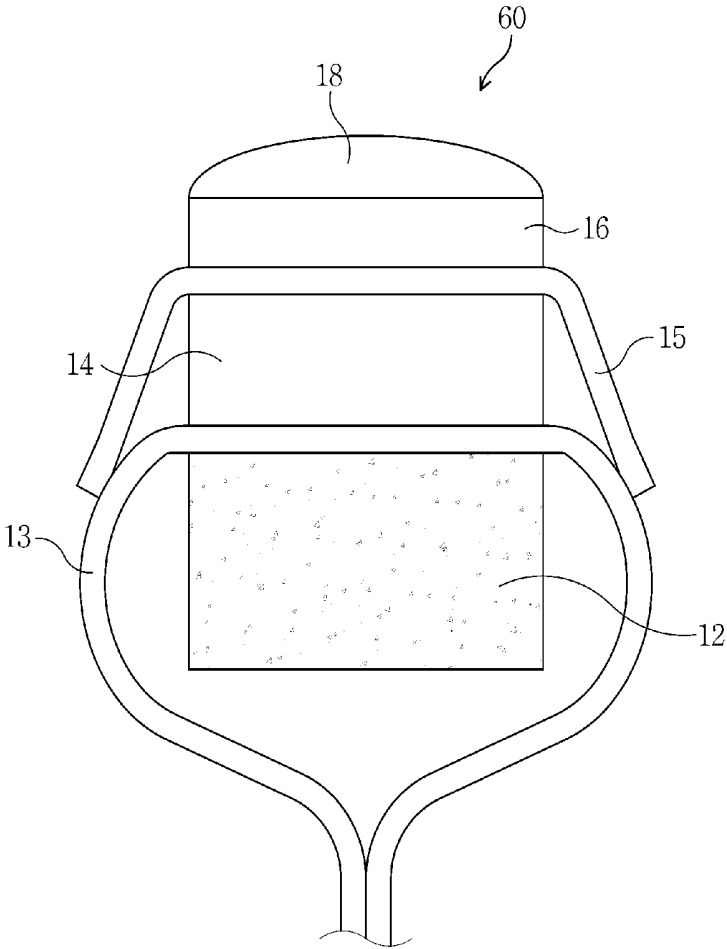

DETACHABLY JOINED ULTRASONIC PROBE DEVICE

TECHNICAL FIELD

[0001] The present invention relates to an ultrasonic probe, and more particularly, a detachably joined ultrasonic probe device in which probes are modularized and various types of the probes are detachably joined and used to one ultrasonic probe apparatus

BACKGROUND ART

[0002] An ultrasonic wave is an acoustic wave having a frequency above the range of human audibility, and a sound wave having a frequency which is between about 20 kHz and 100 kHz.

[0003] Ultrasonic waves are used for inspecting inner parts of a human body or animal or for measuring, in a non-destructive manner, the thicknesses or inside combinations of solid matters such as a metal or a plastic. In these cases, ultrasonic waves are implemented in the form of a probe (hereinafter, referred to as "an ultrasonic probe") for easy handling by users.

[0004] This ultrasonic probe includes a piezoelectric ceramic to interchangeably convert an electrical signal to an acoustic signal by vibration of a piezoelectric material, an acoustic matching layer configured to decrease an acoustic impedance difference between the piezoelectric ceramic and an object so that ultrasonic waves generated in the piezoelectric ceramic can be fully delivered to the object, and a lens layer to focus ultrasonic waves propagating in a forward direction of the piezoelectric ceramic at a certain position, and a rear-side block to exclude ultrasonic waves propagating in a rearward direction of a piezoelectric layer to prevent image distortion.

[0005] Ultrasonic probes formed as these configurations have been widely used in medical field. An ultrasonic diagnosis apparatus using an ultrasonic probe applies ultrasonic waves to an organism, converts reflected ultrasonic waves to electrical signals, transmits the electrical signals to an image processing unit, and generates an image through the signals received by the image processing unit.

[0006] Through the above-described process, the ultrasonic probes have been advantageously used for detecting a foreign material in an organism, measuring the degree of injury, observing a tumor, and observing a fetus.

[0007] Since ultrasonic waves have various frequency areas, in ultrasonic diagnosis using ultrasonic probes, the range of diagnosis is limited based on the frequency areas.

[0008] Therefore, since an appropriate probe is used for a diagnosis desired by a user, there are inconveniences in that different probes should be used according to intended use.

DISCLOSURE

Technical Problem

[0009] Therefore, in a purpose of the present invention, an embodiment includes a modular ultrasonic probe and a case detachably coupled with the modular ultrasonic probe and provides a detachably joined ultrasonic probe device in which a user selects and uses an appropriate ultrasonic probe according to a performance and diagnosis frequency range which a user desires.

Technical Solution

[0010] To embody the above, one embodiment of the present invention provides a detachably joined ultrasonic probe device including a plurality of ultrasonic probe modules horizontally arranged in a direction ultrasonic wave generation, a case with an open portion in one side accommodating the plurality of ultrasonic probe modules through the open portion, an outer housing configured to enclose an exterior of the plurality of ultrasonic probe modules, and having a separation housing provided between the plurality of ultrasonic probe modules to separate each of the plurality of ultrasonic probe modules and configured to be detachably coupled with the ultrasonic probe modules, and a control module installed in the case and configured to control the plurality of ultrasonic probe modules.

[0011] In the detachably joined ultrasonic probe device according to the present invention, the ultrasonic probe module may be a linear array ultrasonic probe module in which ultrasonic waves propagate in a fixed direction or a phased array ultrasonic probe module in which the ultrasonic waves are steered and proceed in propagating according to a propagation direction and a depth.

[0012] In the detachably joined ultrasonic probe device according to the present invention, the control module may be electrically connected to the ultrasonic probe module to operate at least one of the linear array ultrasonic probe module and the phased array ultrasonic probe module.

[0013] In the detachably joined ultrasonic probe device according to the present invention, the case may accommodate the pair of phased array ultrasonic probe modules, and the linear array ultrasonic probe module disposed between the pair of phased array ultrasonic probe modules. The control module may operate the pair of the phased array ultrasonic probe module, and the linear array ultrasonic probe module to generate three dimensional image data.

[0014] In the detachably joined ultrasonic probe device according to the present invention, the ultrasonic probe device module may include a rear-side block, a piezoelectric ceramic formed on top of the rear-side block, an acoustic matching layer formed on top of the piezoelectric ceramic, an acoustic lens formed on top of the acoustic matching layer, a flexible printed circuit board disposed between the rear-side block and the piezoelectric ceramic, and a module case surrounding the rear-side block, the piezoelectric ceramic, the acoustic matching layer, the acoustic lens, and an exterior of the flexible printed circuit board excluding an upper portion of the acoustic lens, wherein the flexible printed circuit board is connected to the control module and the control module controls the ultrasonic probe module.

[0015] In the detachably joined ultrasonic probe device according to the present invention, the ultrasonic probe module may further include a ground plate formed between the acoustic matching layer and the piezoelectric ceramic.

Advantageous Effects

[0016] A detachably joined ultrasonic probe device according to the present invention includes a modular ultrasonic probe and a case to accommodate the modular ultrasonic probe, which allows a user to select and use an appropriate ultrasonic probe based on a performance and diagnosis frequency range which a user desires so that the user uses probes of various types in one ultrasonic probe device without needing a plurality of ultrasonic probe devices.

DESCRIPTION OF DRAWINGS

[0017] FIG. 1 is a view illustrating a configuration of a plurality of ultrasonic probe modules coupled with a case according to an embodiment of the present invention.

[0018] FIG. 2 is a view illustrating a detachably joined ultrasonic probe device according to the embodiment of the present invention.

[0019] FIG. 3 is a block diagram for describing the detachably joined ultrasonic probe device according to the embodiment of the present invention.

[0020] FIG. 4 is a view illustrating an ultrasonic probe module excluding a module case according to the embodiment of the present invention.

[0021] FIG. 5 is a view illustrating an ultrasonic probe module except a module case according to a second embodiment of the present invention.

MODES OF THE INVENTION

[0022] In the following description, only the parts necessary to understand an exemplary embodiment of the present invention will be described, the omission of descriptions of other parts is not intended to obscure the spirit of the present invention.

[0023] It should be understood that the terms used in the specification and claims set forth below are not to be construed as limited to typical or dictionary meanings, but were simply interpreted by the inventor as terms appropriately defining and explaining the invention properly on the basis of the principle that can be interpreted based on the meanings and concepts corresponding to technical aspects of the present invention. Therefore, the configurations shown in the embodiments and drawings set forth herein are merely preferable embodiments of the present invention, because they are representative of all of the technical features of the present invention, and not intended to limit the scope of the present application. In the present application it should be understood that that equivalents and modifications may be made thereto.

[0024] Hereinafter, a detachably joined ultrasonic probe device according to the present invention will be described in detail with reference to the accompanying drawings.

[0025] An ultrasonic probe is implemented in a probe shape to easily handle ultrasonic waves for inspecting inner parts of a human body or animal or for measuring, in a non-destructive manner, the thickness or inside combinations of solid matters such as a metal or a plastic.

[0026] In an ultrasonic probe, ultrasonic waves may be generated with a piezoelectric ceramic in a configuration of the ultrasonic probe, a rear-side block may absorb the ultrasonic waves which propagate toward the rear-side block, the ultrasonic waves which propagate toward an acoustic matching layer may be transferred to an object to be examined through the acoustic matching layer and an acoustic lens. This description will be described below.

[0027] FIG. 1 is a view illustrating a configuration of a plurality of ultrasonic probe modules coupled with a case according to one embodiment of the present invention. FIG. 2 is a view illustrating the detachably joined ultrasonic probe device according to one embodiment of the present invention. FIG. 3 is a block diagram for describing the detachably joined ultrasonic probe device according to one embodiment of the present invention.

[0028] Referring to FIGS. 1 to 3, a detachably joined ultrasonic probe device 100 according to the embodiment of the

present invention includes a plurality of ultrasonic probe modules 10, a case 20 and a control module 30.

[0029] The ultrasonic probe modules 10 are modular ultrasonic probes which can be detachably coupled through open portion 22 of the case 20. That is, the ultrasonic probe modules 10 are formed for the ultrasonic probe to be accommodated and used in receiving portions formed inside the case 20 through the open portion 22 of the case 20.

[0030] The detachably joined ultrasonic probe device 100 according to one embodiment of the present invention includes the plurality of ultrasonic probe modules 10. The plurality of ultrasonic probe modules 10 is arranged in a horizontal direction with respect to a direction in which ultrasonic waves are generated and are coupled to be accommodated in the receiving portions through the open portion 22 of the case 20. The ultrasonic probe module 10 accommodated in the case 20 may be a linear array ultrasonic probe module 40 or a phased array ultrasonic probe module 50, descriptions which relate to the above modules will be described below.

[0031] The case 20 has open portion 22 formed in one side thereof, accommodates the plurality of ultrasonic probe modules 10 through the open portion 22, and includes an outer housing 24 and a separation housing 26.

[0032] The outer housing 24 encloses the exterior of the plurality of ultrasonic probe modules 10 accommodated in the open portion 22. That is, the outer housing 24 protects the plurality of ultrasonic probe modules 10 from external shocks by enclosing the exterior of the plurality of ultrasonic probe modules 10 accommodated inside the case 20.

[0033] The separation housing 26 is disposed between the plurality of ultrasonic probe modules 10 to separate each of the ultrasonic probe modules 10. That is, the separation housing 26 serves a partition role to divide the inside of the case 20 into a plurality of open portions 22, separates each of the ultrasonic probe modules 10 so that the ultrasonic probe modules 10 do not come in contact with each other and are not affected by vibrations of each other.

[0034] Materials of the case 20 may be plastic materials such as polyethylene (PE), polypropylene (PP), or polyethylene terephthalate (PET), but an aspect of the present invention is not limited thereto, and a material having a lightweight, an excellent durability, and non-conductivity may be used.

[0035] A control module 30 is installed inside the case 20 to control the plurality of ultrasonic probe modules 10. That is, the control module 30 may be electrically connected to the plurality of ultrasonic probe modules 10 which are coupled with the open portion 22 of the case 20 to operate or halt each of the ultrasonic probe modules 10.

[0036] The detachably joined ultrasonic probe device 100 according to one embodiment of the present invention may accommodate in the case 20 a pair of the phased array ultrasonic probe modules 50, and the linear array ultrasonic probe module 40 disposed between the pair of the phased array ultrasonic probe modules 50. The control module 30 is electrically connected to the pair of the phased array ultrasonic probe modules 50 and the linear array ultrasonic probe module 40 and controls each operation thereof. For example, when a user desire to use only the linear array ultrasonic probe module 40, the control module 30 halts the pair of phased array ultrasonic probe modules 50 and operates only the linear array ultrasonic probe module 40 to generate ultrasonic waves.

[0037] As described above, the ultrasonic probe module 10 according to the embodiment of the present invention may be

a linear array ultrasonic probe module **40** or a phased array ultrasonic probe module **50**. In connection with the above, the description made with reference to FIG. **4** is as follows.

[0038] FIG. **4** is a view illustrating the ultrasonic probe module excluding a module case according to the embodiment of the present invention.

[0039] Referring to FIG. **4**, the ultrasonic probe module **10** according to one embodiment of the present invention includes a rear-side block **12**, a piezoelectric ceramic **14**, an acoustic matching layer **16**, an acoustic lens **18**, a flexible circuit board **13**, and the module case.

[0040] The rear-side block **12** serves to absorb ultrasonic waves among ultrasonic waves which is generated in the piezoelectric ceramic **14** and is propagating toward the rear-side block **12**. An acoustic characteristic of the ultrasonic probe module **10** may be controlled through the rear-side block **12**.

[0041] The piezoelectric ceramic **14** is formed on top of the rear-side block **10**, converts an electrical signal into an acoustic signal to transmit it to air, and changes an ultrasonic wave reflected and returned in air back into an electrical signal again to deliver it to the device.

[0042] A ceramic material such as lead-zirconate titanate (PZT) or a single crystal material such as lead magnesium niobate-lead titanate (PMN-PT) may be used as a material of the piezoelectric ceramic **14**.

[0043] The acoustic matching layer **16** may be formed on top of the piezoelectric ceramic **14**, that is, on an electrode of a transceiver surface of the piezoelectric ceramic **14**, to increase a reflection rate and efficiency of an ultrasonic wave. Further, the acoustic matching layer **16** may be formed to have one or more layer so as to increase the reflection rate and efficiency of an ultrasonic wave.

[0044] The acoustic lens **18** is formed on top of the acoustic matching layer **16**, focuses and applies an ultrasonic wave transmitted to the object to be examined so as to increase a resolution of an ultrasonic image.

[0045] As a material of the acoustic lens **18**, for example, a silicone similar to living tissue may be used.

[0046] The flexible circuit board **13** is formed between the rear-side block **12** and the piezoelectric ceramic **14** and is electrically connected to the piezoelectric ceramic **30** and the rear-side block **10**. That is, interconnection patterns formed in the flexible circuit board **13** are electrically connected to electrodes formed in a rear surface of the piezoelectric ceramic **14**, for example, signal electrodes, ground electrodes, and the rear-side block **12**.

[0047] Furthermore, since the flexible circuit board **13** is electrically connected to the control module **30**, the control module **30** may control the ultrasonic probe module **10**.

[0048] The flexible circuit board **13** is electrically connected to the electrodes of the piezoelectric ceramic **14**, and grounded to the rear-side block **10**, and a tape circuit board of a polyimide material in which interconnection patterns are formed in the front surface may be used. Further, according to need, a tape circuit board which has both sides in which interconnection patterns are formed may be used as the flexible circuit board **13**.

[0049] Since the module case encloses the exterior of the rear-side block **12**, the piezoelectric ceramic **14**, the acoustic matching layer **16**, the acoustic lens **18** and the flexible circuit board **13** excluding the top of the acoustic lens **18**, the module case protects the ultrasonic probe module **10** excluding the top of the acoustic lens **18** from external shocks.

[0050] As described above, the ultrasonic probe module **10** according to one embodiment of the present invention may be one of a linear array ultrasonic probe module **40** and a phased array ultrasonic probe module **50**.

[0051] The linear array ultrasonic probe module **40** may include the piezoelectric ceramic **14** in which the ultrasonic waves propagate in a fixed direction. Here, the piezoelectric ceramic **14** is divided into a plurality of piezoelectric devices. The linear array ultrasonic probe module **40** may be used on superficial organs such as the breast, the thyroid gland, the musculoskeletal system and the like.

[0052] The phased array ultrasonic probe module **50** may steerably generate ultrasonic waves according to a propagation direction and a depth. That is, the piezoelectric ceramic **14** of the phased array ultrasonic probe module **50** may include a plurality of piezoelectric devices and each of the piezoelectric devices may generate and propagate acoustic pulses which have phase differences. In other words, the phased array ultrasonic probe module **50** may generate ultrasonic waves having phase differences by arranging every piezoelectric device in phase and steering a propagation direction of the ultrasonic waves to obtain an image. An organ such as the heart between the ribs may be tested through scanning using the phased array ultrasonic probe **90**.

[0053] As described above, the detachably joined ultrasonic probe device **100** according to the embodiment of the present invention may accommodate the pair of phased array ultrasonic probe modules **50** in the case **20** and the linear array ultrasonic probe module **40** between the pair of phased array ultrasonic probe modules **50**. The control module **30** may be electrically connected to and control the pair of the phased array ultrasonic probe modules **50** and the linear array ultrasonic probe module **40**, respectively.

[0054] When the control module **30** operates the linear array ultrasonic probe module **40** to generate ultrasonic waves, the ultrasonic waves may be used to diagnose superficial organs such as the breast, the thyroid gland, the musculoskeletal system and the like.

[0055] When the control module **30** operates both or one of the pair of the phased array ultrasonic probe modules **50** to generate ultrasonic waves, the ultrasonic waves may be used to diagnose an organ such as the heart and/or the like through scanning. When both of the pair of phased array ultrasonic probe modules **50** are operated, ultrasonic waves may be generated to have a lower frequency than one of the pair thereof.

[0056] When the control module **30** simultaneously operates the pair of phased array ultrasonic probe modules **50** and the linear array ultrasonic probe module **40** to generate ultrasonic waves, the detachably joined ultrasonic probe device **100** according to the embodiment of the present invention may arrange each of the piezoelectric ceramics **14** in the form of a matrix array and generate a three dimensional image data.

[0057] As described above, the detachably joined ultrasonic probe device **100** according to one embodiment of the present invention may detachably couple the ultrasonic probe module **10** with the case **20** and use the ultrasonic probe module **10** having an appropriate diagnosis range and performance which a user desires.

[0058] As shown in FIG. **5**, an ultrasonic probe module **10** according to a second embodiment of the present invention may further include a ground plate **15**.

[0059] Here, FIG. 5 is a view illustrating an ultrasonic probe module excluding a module case according to the second embodiment of the present invention.

[0060] Referring to FIG. 5, since an ultrasonic probe module 60 according to the second embodiment of the present invention may have the same configuration comparatively as the ultrasonic probe module 10 in FIG. 4 except that a ground plate 15 is further provided, the following description will be focused on a structure in which the ground plate 15 is formed.

[0061] The ground plate 15 is formed between an acoustic matching layer 16 and a piezoelectric ceramic 14, and both end portions thereof are in contact with interconnection patterns of a flexible circuit board 13. That is, the ground plate 15 is in contact with the ground patterns of interconnection patterns in the flexible circuit board 13.

[0062] Since the ground plate 15 is included, the ultrasonic probe module 60 according to the second embodiment of the present invention may improve an acoustic characteristic.

[0063] On the other hand, the embodiments of the invention disclosed in the specification and drawings are merely presented as specific example for clarity and are not intended to limit the scope of the invention. It will be apparent to those of ordinary skill in the art that other modifications based on the technical concept of the present invention, in addition to the embodiments disclosed herein, can be carried out.

1. A detachably joined ultrasonic probe device comprising:
 - a plurality of ultrasonic probe modules configured to be horizontally arranged in a direction of generating an ultrasonic wave;
 - a case configured to accommodate the plurality of ultrasonic probe modules through an open portion formed in one side thereof and detachably couple the ultrasonic probe modules, the case including an outer housing configured to enclose an exterior of the plurality of ultrasonic probe modules and a separation housing provided between the plurality of ultrasonic probe modules to separate the plurality of ultrasonic probe modules from each other such that the plurality of ultrasonic probe modules are prevented from coming in contact with each other and affecting each other by vibration thereof; and
 - a control module configured to be installed in the case and to control the plurality of ultrasonic probe modules,

wherein each of the ultrasonic probe modules includes a module case, wherein each of the module case includes a rear-side block.

2. The device of claim 1, wherein the ultrasonic probe module is a linear arrayed ultrasonic probe module in which an ultrasonic wave proceed in a fixed direction or a phase arrayed ultrasonic probe module in which an ultrasonic wave is steered and proceeds in proportion to a proceeding direction and depth of the ultrasonic wave.

3. The device of claim 2, wherein the control module is electrically connected to the ultrasonic probe module to operate at least one of the linear arrayed ultrasonic probe module and the phase arrayed ultrasonic probe module.

4. The device of claim 3, wherein the case accommodates a pair of the phase arrayed ultrasonic probe module, and the linear arrayed ultrasonic probe module disposed between a pair of the phase arrayed ultrasonic probe module, and wherein the control module operates a pair of the phase arrayed ultrasonic probe module, and the linear arrayed ultrasonic probe module to generate data of a three dimensional image data.

5. The device of claim 1, wherein the ultrasonic probe device includes:

- a rear-side block;
 - a piezoelectric ceramic disposed on an upper portion of the rear-side block;
 - an acoustic matching layer disposed on an upper portion of the piezoelectric ceramic;
 - an acoustic lens disposed on an upper portion of the acoustic matching layer; and
 - a flexible printed circuit board disposed between the rear-side block and the piezoelectric ceramic,
- wherein the module case surrounds the rear-side block, the piezoelectric ceramic, the acoustic matching layer, the acoustic lens, an exterior of the flexible printed circuit board except an upper portion of the acoustic lens, wherein the flexible printed circuit board is connected to the control module for controlling the ultrasonic probe module.

6. The device of claim 5, wherein the ultrasonic probe module further includes a ground plate formed between the acoustic matching layer and the piezoelectric ceramic.

* * * * *

专利名称(译)	可拆卸地连接超声波探头装置		
公开(公告)号	US20160143618A1	公开(公告)日	2016-05-26
申请号	US14/784912	申请日	2014-03-21
申请(专利权)人(译)	HUMANSKAN CO. , LTD.		
当前申请(专利权)人(译)	HUMANSKAN CO. , LTD.		
[标]发明人	PARK WONSEOP		
发明人	PARK, WONSEOP		
IPC分类号	A61B8/00		
CPC分类号	A61B8/4411 A61B8/4444 A61B8/4488 A61B8/4455 A61B8/4477 A61B8/4494 G01N29/226 G01N2291/02475 G01N2291/106 G10K11/004 G10K11/34		
优先权	1020130052553 2013-05-09 KR		
其他公开文献	US10178985		
外部链接	Espacenet USPTO		

摘要(译)

可拆卸地连接的超声波探头装置本发明涉及一种可拆卸地连接的超声波探头装置，包括模块化超声波探头和用于与模块化超声波探头可拆卸地连接的壳体，使用户能够根据所需的性能和诊断频率区域选择合适的超声波探头。根据本发明的装置包括：多个超声波探头模块，其在产生超声波的方向上水平布置；壳体包括：外壳，具有一个开口侧，用于容纳和封闭多个超声波探头模块；以及分离壳体，设置在多个超声波探头模块之间，用于将超声波模块彼此分离，以便可拆卸地与所述超声波探头模块连接。超声波模块；控制模块安装在壳体中，用于控制多个超声波探头模块。

