



(11) **EP 2 073 717 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
23.12.2015 Bulletin 2015/52

(21) Application number: **07843973.4**

(22) Date of filing: **08.10.2007**

(51) Int Cl.:
A61B 1/015 ^(2006.01) **A61B 1/00** ^(2006.01)
A61B 1/12 ^(2006.01) **A61B 1/313** ^(2006.01)
A61B 17/34 ^(2006.01) **A61M 13/00** ^(2006.01)
A61B 19/00 ^(2006.01) **A61B 17/00** ^(2006.01)

(86) International application number:
PCT/US2007/080724

(87) International publication number:
WO 2008/043100 (10.04.2008 Gazette 2008/15)

(54) **VISUAL INSUFFLATION PORT**
VISUELLER ANSAUGUNGSPORT
PORT D'INSUFFLATION VISUEL

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **06.10.2006 US 828529 P**

(43) Date of publication of application:
01.07.2009 Bulletin 2009/27

(60) Divisional application:
15185511.1

(73) Proprietor: **APPLIED MEDICAL RESOURCES
CORPORATION**
Rancho Santa Margarita, CA 92688 (US)

(72) Inventors:
• **TAYLOR, Scott, V.**
Mission Viejo, CA 92692 (US)
• **BALSCHWEIT, Paul, W.**
Irvine, CA 92602 (US)
• **ALBRECHT, Jeremy, J.**
Rancho Santa Margarita, CA 92688 (US)

- **JOHNSON, Gary, M.**
Mission Viejo, CA 92692 (US)
- **HILAL, Said, S.**
Coto De Caza, CA 92679 (US)
- **FALKENSTEIN, Zoran**
Rancho Santa Margarita, CA 92688 (US)

(74) Representative: **Fitchett, Stuart Paul**
Saunders & Dolleymore LLP
European Patent Attorneys
9 Rickmansworth Road
Watford
WD18 0JU (GB)

(56) References cited:
WO-A1-96/01132 US-A- 4 779 613
US-A- 5 392 766 US-A- 5 454 791
US-A- 5 464 008 US-A- 5 752 970
US-A- 5 957 884 US-A1- 2004 106 942
US-A1- 2004 204 671 US-A1- 2005 216 028
US-A1- 2005 216 028 US-A1- 2005 227 610
US-A1- 2005 288 622 US-A1- 2005 288 622
US-B1- 6 387 043

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Cross-reference to related applications

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 60/828,529, filed October 6, 2006.

Background

[0002] The present invention generally relates to surgical access devices for entering a patient's body, and in particular to visual insufflation obturators providing a visual and gaseous pathway.

[0003] Laparoscopic surgery of the abdominal area typically requires the introduction of an insufflation gas into the peritoneal cavity of the patient. The insufflation gas is usually pressurized to about 10 mm Hg above atmospheric pressure. This in turn lifts the abdominal wall away from the organs underlying it. Cannulas having seals are then placed at various locations through the abdominal wall to allow the use of a laparoscope and operating instruments. It is well known that establishing access to a non-inflated peritoneal cavity can be a very dangerous part of any laparoscopic procedure. The most common method to achieve insufflation is to pass a sharp needle through the abdominal wall and into the abdominal region, and then inject a gas through the needle and into the region thereby creating an enlarged or ballooned cavity to accommodate a laparoscopic procedure. Unfortunately, insertion of the needle has been required without any visual aid to facilitate location of the sharp needlepoint.

[0004] In order to reduce the probability of inadvertent penetration of delicate internal organs in this "blind" procedure, the sharp insufflation needle has been provided with a blunt or rounded member disposed within the lumen of the needle, and biased by a spring to an extended position beyond the needle tip. A drawback of this "blind" insertion is the surgeon may inadvertently contact the organs and tissues underlying the abdominal wall such as major blood vessels and the intestinal tract. Once access is gained, it can take several minutes for the gas to insufflate the abdomen and while this is happening the surgeon may be unaware of any complications caused by the insertion of the needle.

[0005] The Hasson technique can also be used to gain initial access to the peritoneal cavity. This technique involves making a mini-laparotomy and using the fingers to bluntly dissect the tissues of the abdominal wall and thereby creating an access similar to an open surgical procedure. Although generally considered less complicated, it can result in an access site that is not well suited for the subsequent introduction and use of a laparoscopic cannula. The cannula is typically held in place with an additional device that allows the cannula to be tied down with sutures to prevent it from slipping out of the abdominal wall. This may also leave a large defect and is difficult

to perform in large abdominal walls.

[0006] Some surgeons have used trocar cannulas with an obturator for the initial entry into the peritoneal cavity. However, in order to allow the subsequent introduction of insufflation gas through the cannula, the trocar cannula must be inserted all the way through the wall of the abdomen and this in turn can be potentially dangerous as the tip of the trocar may have to advance as much as one inch beyond the distal surface of the abdominal wall and into the underlying anatomical structures. Additionally, the obturator must thereafter be removed in order to allow the introduction of the insufflation gas. As such, there remains a need in the art for an improved surgical instrument that provides enhanced visual entry and visual insufflation that minimizes the risks to organs, tissues and vessels underlying a body wall.

[0007] WO 96/01132 discloses a high flow insufflation instrument comprising a sharp-tipped hollow cannula and a hollow obturator located in the hollow cannula.

[0008] US 2005/0288622 A1 discloses an insufflating optical surgical instrument comprising a shaft having an insufflation channel, a tip at the distal end of the shaft and at least one vent hole formed at the tip or along the shaft.

Summary

[0009] A visual insufflation obturator/port according to claim 1 is provided. In one aspect, a visual insufflation obturator comprises an elongate body having a proximal end, a distal end and a body lumen extending from the proximal end of the elongate body to the distal end of the elongate body. A handle is connected to the proximal end of the elongate body and has a handle lumen extending from a proximal end of the handle to the proximal end of the elongate body and is connected to the body lumen. A transparent tip is connected to the distal end of the elongate body and has a tip cavity. The tip has an outer surface with an aperture extending through the outer surface into the tip cavity and defines an insufflation gas pathway from the elongate body out through the aperture. A micro-seal is located within the tip cavity and is adjacent to the aperture.

[0010] In one aspect, a visual insufflation obturator comprises an elongate body having a proximal end, a distal end and a body lumen extending from the proximal end of the elongate body to the distal end of the elongate body along a longitudinal axis of the elongate body. A handle is connected to the proximal end of the elongate body. A transparent bladeless tip without cutting edges is connected to the distal end of the elongate body. The tip has a tip cavity and an outer surface with an aperture extending through the outer surface into the tip cavity and a micro-seal is located within the aperture of the tip between the outer surface and the tip cavity.

[0011] A visual insufflation obturator in one aspect comprises an elongate body having a proximal end, a distal end and a body lumen extending from the proximal

end of the elongate body to the distal end of the elongate body. A handle is connected to the proximal end of the elongate body and has a handle lumen extending from a proximal end of the handle to the proximal end of the elongate body and is aligned to the body lumen. A transparent tip is connected to the distal end of the elongate body and has a tip cavity aligned to the handle lumen. The tip has a distal enclosed end and an outer surface extending from the distal end of the elongate body to the distal enclosed end with an aperture extending through the outer surface into the tip cavity. A laparoscope seal attached to the proximal end of the elongate body comprises an anti-fog applicator saturated with an anti-fog solution and positioned in a direct pathway through the seal and into the elongate body, the laparoscope seal having a zero seal and an instrument seal axially aligned to and preceding the zero seal.

[0012] In one aspect, a visual insufflation obturator comprises an elongate body having a proximal end, a distal end and a body lumen extending from the proximal end of the elongate body to the distal end of the elongate body. A handle is connected to the proximal end of the elongate body and has a handle lumen extending from a proximal end of the handle to the proximal end of the elongate body axially aligned to the body lumen. A transparent tip is connected to the distal end of the elongate body and has a tip cavity. The tip has an outer surface with an aperture extending through the outer surface into the tip cavity and a lens is located within the tip cavity before the aperture and a distal enclosed end of the transparent tip, the lens being coated with an anti-fog solution

[0013] In one aspect, a visual insufflation obturator comprises an elongate body having a proximal end, a distal end and a body lumen extending from the proximal end of the elongate body to the distal end of the elongate body. At least one insufflation channel extends parallel to the body lumen starting from a body aperture positioned perpendicular to a longitudinal axis of the elongate body and through the elongate body to the body lumen defining an inflow insufflation gas pathway from outside the elongate body into the body lumen. A handle is connected to the proximal end of the elongate body and having a handle lumen extending from a proximal end of the handle to the proximal end of the elongate body axially aligned to the body lumen. A transparent bladeless non-cutting tip is connected to the distal end of the elongate body and has a tip cavity axially aligned to the handle lumen, the tip having a distal enclosed end and an outer surface extending from the distal end of the elongate body to the distal enclosed end with a tip aperture extending through the outer surface into the tip cavity and defining an outflow insufflation gas pathway from the at least one insufflation channel out through the tip aperture. Means for allowing antegrade insufflation gas flow out of the aperture and preventing retrograde insufflation gas flow into the elongate body, e.g., a micro-seal, is located within the tip cavity.

[0014] Many of the attendant features of the present

invention will be more readily appreciated as the same becomes better understood by reference to the foregoing and following description and considered in connection with the accompanying drawings in which like reference symbols designate like parts throughout

Brief Description of the Drawings

[0015]

FIG. 1 is a side view of a visual insufflation port in accordance with various aspects of the present invention;

FIGs. 2-3 are side views of an obturator in accordance with various aspects of the present invention; FIG. 4 is a cross-sectional view of an obturator in accordance with various aspects of the present invention;

FIG. 5 is a cross-sectional view of a tip of an obturator in accordance with various aspects of the present invention;

FIG. 6 is a cross-sectional view of a laparoscopic seal and a proximal end of an obturator in accordance with various aspects of the present invention; FIGs. 7-14 are side views of various tips of an obturator in accordance with various aspects of the present invention;

FIGs. 15-27 are cross-sectional views of various tips of an obturator in accordance with various aspects of the present invention;

FIG. 28 is a side view of a tip of an obturator in accordance with various aspects of the present invention;

FIGs. 29-33 are cross-sectional views of various tips of an obturator in accordance with various aspects of the present invention;

FIG. 34 is a cross-sectional view of an obturator in accordance with various aspects of the present invention; and

FIGs. 35-37 are cross-sectional views of various tips of an obturator in accordance with various aspects of the present invention.

Detailed Description

[0016] Aspects of an obturator with visualization and insufflation properties are provided. In one aspect, a micro-seal within the distal tip of the obturator enables the outflow (antegrade) of insufflating gasses such as carbon dioxide yet prevents the inflow (retrograde) of moisture and/or body fluids which could obstruct or impair the visualization properties through the distal tip of the obturator. The distal end of the obturator or portions thereof is formed of a material to enable visualization of tissue during the insertion of the obturator through a body wall. The obturator enables the insertion of a laparoscope 40, which typically includes an imaging element and fiber optic light fibers

[0017] During an operational exemplary use, the obturator is inserted into and through trocar seal housing 30 and cannula 20. A laparoscope 40 is inserted into the proximal end of the obturator and advanced to the distal tip of the obturator. An endoscopic video camera is attached to the proximal end of the laparoscope. As the surgeon advances the trocar through the body wall, the surgeon can visually observe the tissue through the obturator tip as the tissue is being separated without cutting via a video monitor, which is connected to the endoscopic video camera. The surgeon can also readily determine when the body wall has been traversed to enable the most distal portion of the obturator to enter the body cavity. The most distal portion of the obturator includes insufflation vent holes or apertures through which an insufflation gas may flow from the obturator and into the peritoneal cavity. Insufflation of the abdominal cavity can then occur with minimal entry into the cavity by the obturator thereby reducing unintended contact with tissue or organs. The insufflated abdominal cavity enlarges the surgical area further reducing unintended contact and complications. The obturator can then be removed from the trocar cannula leaving behind a readily usable access port into the abdominal cavity.

[0018] A micro-seal is positioned just proximal to the insufflation apertures or vent holes on the obturator. The micro-seal is located inside the distal tip of the obturator and prevents the ingress of moisture and body fluids, which could impair or obstruct the visibility through the tip of the obturator. The micro-seal acting as a zero seal allows the flow of insufflation gas through the obturator and out through the insufflation vent holes

[0019] In one aspect, the bladeless (non-cutting) obturator provides visualization of body tissue fibers as they are being separated, a controlled traversal across a body wall, and a trocar, which enables insufflation of a body cavity through the distal tip of the obturator. The obturator accommodates a laparoscope without imposing special requirement on the laparoscope used with the obturator. The bladeless obturator tip also extends beyond the distal end of the trocar cannula and thereby advances ahead of the trocar cannula that can have tips that are angled or shaped with a point or sharp tip. Thus, advancement of the trocar cannula and obturator can be accomplished while avoiding unintended contact by the trocar cannula

[0020] As shown in FIGs. 1-6, a visual insufflation obturator is shown having an elongate body 5 extending from an obturator handle 3 to a distal tip 7. A laparoscope seal 9 is attached to the obturator handle 3. The elongate body or shaft 5 is hollow having a body lumen extending from the proximal end of the body to a distal end and continuing into a cavity formed in the tip 7. The tip is bladeless with non-cutting edges or surfaces. The handle 3 is hollow having a handle lumen extending from its proximal end to its distal end in communication with the body lumen of the elongate body 7. As such, a viewing channel or pathway is provided from the proximal end of the obturator handle 3 through the elongate body 5 to the tip 7.

Also, a gaseous channel or pathway is provided from the elongate body 5 to the tip 7.

[0021] The tip 7 has one or more apertures or holes disposed through the tip. The aperture provides a gaseous pathway from the lumen (interior) of the elongate body and out through the aperture in the tip 7 (exterior of the obturator). In one aspect, one or more apertures or holes through the elongate body provides a gaseous pathway for the flow of insufflation gas from a trocar cannula into the elongate body and out through the aperture in the tip 7, the tip extending beyond the distal end of the trocar cannula. The elongate body, in one aspect, can have one or more insufflation channels embedded in or attached to the walls of the elongate body in gaseous communication with the aperture(s) in the tip. Pressurized insufflation gas in one aspect is introduced through the stopcock 2 into the trocar cannula 20. Trocar seal housing 30 prevents the gas from escaping proximally out from the cannula 20. The gas from the trocar cannula 20 enters the one or more apertures or holes in the elongate body and flows out distally through the aperture in the tip.

[0022] The tip 7, in one aspect, has a micro-seal 11 positioned therein through which insufflation gasses may flow and then out through the hole or aperture 12 in the tip. However, the micro-seal acting as a zero seal is normally closed and therefore prevents moisture and body fluids from flowing into the tip of obturator. In the absence of the micro-seal, moisture and body fluids could flow into the tip 7 of the obturator and create condensation on the inner walls or lumen of the obturator (e.g., elongate body and/or tip) and on the lens of the laparoscope. The condensation can diminish the visibility through the obturator and in some cases, can entirely obstruct the view through the tip 7 of the obturator. The micro-seal 11 prevents the ingress of moisture and body fluids and therefore enhances the visibility through the tip of the obturator while also enabling the flow of insufflation gasses through the tip of the obturator. The micro-seal size is substantially diminished in size and thereby reduces obstruction of the view of a laparoscope inserted into the obturator. In one aspect, the micro-seal is about 2 to 4 mm in diameter and about 2 to 3 mm tall. The micro-seal provides a one-way pathway allowing insufflation gas to flow out through the tip while preventing gas, fluid, etc. from entering back through the micro-seal.

[0023] The obturator handle 3 provides a place for a surgeon to hold or grasp the obturator. The obturator handle 3 as shown has a generally domed shape that is connectable to a trocar seal housing 30. In one aspect, the handle is a pistol-like grip or generally flanged portion providing finger grips. The obturator handle, in one aspect, can also be manipulated to apply torque to the obturator for insertion of the obturator into the body cavity.

[0024] In one aspect, a laparoscope seal 9 is positioned at the proximal end of the obturator handle 3. The laparoscope seal 9 has a zero seal 8 preventing the egress of insufflation gases when the obturator is used

without an inserted laparoscope. The laparoscope seal 9 also includes a septum seal 6 forming a seal with a laparoscope to prevent the egress of insufflation gases when the obturator is used with an inserted laparoscope. The zero seal 8 in one aspect is a double duckbill valve that minimizes the forces utilized to insert and remove the laparoscope. By minimizing the forces to insert and remove the laparoscope from the laparoscope seal 9, the application of lubricants such as silicone grease or silicone fluid on the laparoscope seal is obviated or minimized. Some form of lubrication such as silicone grease or silicone fluid can be used to reduce the insertion and removal forces of laparoscopic instrumentation. These lubricants however can be transferred to the lens of a laparoscope as the laparoscope is inserted through the trocar seal resulting in distorted and diminished visibility through the laparoscope. As such, the laparoscope seal 9 in one aspect enables the laparoscope to be inserted into the obturator and withdrawn from the obturator with minimal force while ensuring that optimal visibility through the laparoscope is maintained.

[0025] The laparoscope seal 9 also minimizes the torque required to rotate the obturator relative to the inserted laparoscope. The trocar cannula with the optical obturator is rotated in an alternating clockwise and counterclockwise fashion during traversal across a body wall. During this time, it is desirable to keep the laparoscope in a rotationally fixed position relative to the trocar and the optical obturator to ensure a stable image on the video monitor. The double duckbill valve incorporated into the laparoscope seal enables the obturator to be easily rotated relative to the inserted laparoscope.

[0026] In one aspect, the micro-seal 11 that prevents the ingress of moisture is located entirely within the inner walls of the tip 7 of the obturator. With the micro-seal being an internal component, it is not possible to dislodge or separate the micro-seal from the obturator and thereby fall into the surgical site. The micro-seal 11 in one aspect is a double duckbill configuration, which enables the maximum flow rate through the valve while minimizing the overall size of the duckbill valve. The double duckbill valve also reduces the amount of pressure required to open the duckbill valve during initial flow of insufflation gasses. This can be desirable as some pressures used during the insufflation of a body cavity are low, e.g., about 15mm Hg.

[0027] The duckbill or double duckbill valve 11 in one aspect is a single-piece component, which is injection molded of a transparent material such as silicone or Kraton® to ensure that visibility through the duckbill valve is achieved and thereby ensuring a further reduction in potential obstruction of a laparoscope's view. The duckbill valve 11 in one aspect is molded from an opaque material such as polyisoprene to provide contrast between the duckbill valve and the obturator. The duckbill valve 11 in one aspect is tinted or colored to provide contrast and to visually indicate proper positioning of the distal tip of the obturator relative to a body wall.

[0028] The duckbill valve 11 is fixed in position via an interference slip fit within the obturator. The obturator in one aspect has a small cylinder or cylindrical spacing formed or carved within the tip of the obturator that is in fluid communication with the insufflation vent holes. The duckbill valve 11 is inserted into the cylinder, e.g., via a mandrel and remains in place via the interference slip fit and thereby avoids the use of adhesives or other attachments that may obstruct a laparoscope's view. In one aspect, a flange, lip or projection portion of the micro-seal is wedged into the cylindrical space in which a ledge engaged with the flange secures the micro-seal in place.

[0029] The obturator in traversing the body wall or conduit can encounter fluids, such as gastric fluids that may damage a laparoscope, and tissue, e.g., fat that may obscure the laparoscope's view. The micro-seal prevents such fluids and tissue from contacting the laparoscope (often an expensive and delicate instrument). The introduction of insufflation gas via the insufflation gas pathway through the micro-seal and out of the tip aperture can also clear the view by expelling fluid or tissue that entered inside and/or positioned around the tip. The obturator also allows subsequent use of the obturator in the same surgical procedure, for example, use for a second, third or more insertion sites as used in some laparoscopic procedures. The micro-seal acting as a zero seal prevents the egress or escape of gas from the insufflated cavity or conduit. As such, the obturator could be used to form additional insertion sites into the insufflated cavity without losing pneumoperitoneum. The subsequent use of the obturator reduces surgical cost, time and other issues that arise from instrument exchanges or introducing additional instruments to the surgical procedure. The micro-seal can also obviate the use of other seals with the initial and/or subsequent use of the obturator.

[0030] In one aspect, the obturator shaft 5 is configured with integral sealing bands 15 at either distal or proximal ends or both to affect a seal between the obturator 10 and mating components of a trocar or other portions of the obturator to prevent the egress of insufflation gases. The obturator 10 in one aspect has a small integral band of material 15 at its distal tip designed to create an interference fit between the obturator 10 and the trocar cannula 20 with the obturator inserted into the trocar cannula. The interference fit prevents the outflow of insufflation gas between the outer wall of the obturator and the inner bore of the cannula 20. The obturator in one aspect has a small integral band of material 16 at its proximal end arranged to create an interference fit between the outer wall of the obturator 10 and the inner wall of the trocar handle/seal housing 30. The interference fit prevents the outflow of insufflation gas between the inner bore of the trocar handle 30 and the outer wall of the obturator 10.

[0031] In one aspect, the laparoscope seal 9 prevents the egress of insufflation gas and is positioned on the proximal end of the obturator handle 3 via a snap fit with the handle. The laparoscope seal comprises a proximal septum seal 6 and a distal double duckbill valve 8. The

laparoscope seal in one aspect is a single-piece component, which is injection molded of a transparent or opaque elastomeric material such as silicone, polyisoprene, or Kraton. The laparoscope seal 9 in one aspect is coated with a dry lubricant or treated with various materials to further reduce the forces used to insert and withdraw a laparoscope 40 and/or reduce the friction associated with insertion and withdrawal of the laparoscope. Examples of such coatings and treatments include Teflon® coatings, parylene coatings, plasma surface treatments, and chlorination treatments. In one aspect, the duckbill valve of the laparoscope seal 9 is a single duckbill valve.

[0032] As shown in FIGs. 7-11, the tip 7 of the obturator can have varied configurations each providing a particular functionality and characteristics utilized in a particular surgical procedure and/or user. For example, the obturator has a sharp pointed tip 16 (FIG. 7), a pyramidal tip 17 (FIG. 8), a bladed tip 18 (FIG. 9), sharp edges 18a, or sharpened edges to facilitate traversal through body tissue. The obturator in one aspect has a conical blunt tip 19 configuration to facilitate traversal through body tissue (FIG. 10). The obturator has a radiused blunt tip 20 for traversal through an existing body orifice or through relatively soft or fatty tissue (FIG. 11). In one aspect, the tip is bladeless with no cutting or sharp edges or surfaces. The bladeless tip in one aspect has a generally tapered configuration with an outer surface extending distally to a blunt point with a pair of side sections having a common shape and being separated by at least one intermediate section. The side sections extend from the blunt point radially outwardly with progressive positions proximally along the axis. With this aspect, the tapered configuration facilitates separation or spreading of different layers of the body tissue and provides proper alignment of the tip between the layers. The distal portion of the side sections are twisted radially with respect to the proximal portion of the side sections. The distal portion of the intermediate section is twisted in a first radial direction and the proximal portion of the intermediate section is twisted in a second radial direction opposite the first radial direction. Each tip has an insufflation vent hole or aperture 12 and a micro-seal placed within the tip adjacent to the vent hole 12. The tip 7 and/or shaft 5 or portions thereof in one aspect can be formed of a rigid material, flexible material or a combination thereof.

[0033] In one aspect, the tip provides and allows viewing through the tip or portion thereof, for example, by using a laparoscope inserted into the obturator. The tip or portions thereof is transparent. One would recognize that transparent would include translucent and other means that provides/allows viewing through at least a portion of the tip with a laparoscope. Windows, viewing channels or magnifiers could be also added or embedded into the tip to enhance laparoscope vision. The tip in one aspect may have one or more indicators, markings or deformations on the tip for example to identify the position of the tip. Such indicators may have to be positioned close to the aperture to prevent interference with the viewing

path of the laparoscope. Likewise, the aperture and/or micro-seal are positioned close to the most distal portion of the tip to also prevent interference with the viewing path of the laparoscope. For example, the aperture may be a few millimeters from the distal portion of the tip and a micro-seal a few millimeters away from the aperture.

[0034] Referring now to FIGs. 12-13, the obturator, in one aspect, has screens 21 across the insufflation apertures or vent holes 12 to prevent the ingress of body tissue such as fat into the insufflation vent holes and into tip 7 of the obturator. In place or in addition to the screens, the insufflation vent holes are configured with raised ribs 22 across the diameter of the holes to deflect body tissue away from the holes and thereby prevent the ingress of body tissue into the vent holes and into the tip of the obturator. As shown in FIG. 14, the obturator could also include integral tissue deflectors 23 just distal to the insufflation vent holes that would serve to move body tissue away from the holes and thereby prevent the ingress of body tissue into the holes and into the tip of the obturator. In one aspect, the tissue deflectors 23 are attached to the tip 7 and are made of an elastomeric material, such as rubber.

[0035] In one aspect, the internal micro-seal 11 is coated or treated with various materials to enable the duckbill valve to be slightly opened with less force and to increase the insufflation fluid flow characteristics of the duckbill valve. Examples of such coatings and treatments are Teflon® coatings, parylene coatings, plasma surface treatments, and chlorination treatments.

[0036] The internal micro-seal prevents the ingress of moisture and body fluids into the distal tip of the obturator. As previously described and also shown in FIGs. 15-16, the internal micro-seal of the obturator can have varied configurations each providing a particular functionality and characteristics utilized in a particular surgical procedure and/or user. For example, the internal micro-seal is a single or double duckbill valve, a flat disc type valve 25 with either a single slit or a plurality of slits, a double duckbill valve 26 with slits 27 running parallel to the distal end surface of the duckbill and to the longitudinal axis of the duckbill or a combination of valves thereof. In one aspect, the double duckbill valve with slits running parallel to the distal end surface of the duckbill and to the longitudinal axis of the duckbill are lengthened to run up the sides of the duckbill valve, thereby increasing the flow rate through the duckbill valve. In one aspect, the double duckbill valve has a single slit, which runs parallel to the distal end surface of the duckbill and to the longitudinal axis of the duckbill.

[0037] As previously described, the obturator is configured with the internal micro-seal and an insufflation vent hole at the most distal portion of the obturator tip next to the internal micro-seal. As shown in FIG. 17, the vent hole 12' in one aspect is generally coaxial with the longitudinal axis of the obturator. The micro-seal 11 would normally be closed to prevent the ingress of moisture and body fluids. Under pressure from the insufflation

gas, the micro-seal 11 would open to enable the flow of the insufflation gas into the body cavity.

[0038] Various other exemplary micro-seals will now be described. In FIG. 19, the obturator includes an external spring biased tip 35 at its distal end adjacent to the vent hole 12. The spring 33 biases the tip in a distal position. During traversal across a body wall, the body wall provides a compressive force on the spring tip 35 moving it to a proximal or sealed position. While in the proximal position, the spring tip 35 prevents the ingress of moisture and body fluids into the obturator by sealing the insufflation vent hole 12. Once the tip of the obturator enters the body cavity, the spring tip 35 deploys into the distal unsealed position. The insufflation gas is then transferred through perpendicular vent holes 12 and into the body cavity. The spring tip 35 in one aspect through movement between the sealed and unsealed positions and vice versa or color coding the tip, the spring tip 35 provides a visual indication to the surgeon that access into the body cavity had been achieved. The spring tip 35 in one aspect can provide an audible indication, e.g., a snap, to the surgeon that access into the body cavity had been achieved..

[0039] Referring now to FIGs. 20-21, in one aspect, the obturator has a non-biased moveable tip 36 at its distal end. The tip 36 is initially positioned in a distal unsealed position. During traversal across a body wall, the body wall provides a compressive force on the tip moving it to a proximal sealed position covering and sealing the vent hole 12. While in the proximal position, the tip 36 prevents the ingress of moisture and body fluids into the obturator. Once the tip of the obturator enters the body cavity, the movable tip would remain in the proximal sealed position. During pressurization of the obturator via insufflation gas, the moveable tip 36 would be forced to the distal unsealed position thus allowing the flow of insufflation gas through the vent hole 12 and into the body cavity. The movable tip in one aspect also comprises an o-ring or an elastomeric seal at its proximal end to assist in sealing the movable tip 36 with the internal walls of the obturator.

[0040] In FIGs. 22-23, the obturator in one aspect has an internal check valve in the distal tip of the obturator near the vent hole 12. The check valve comprises a piston 37 in a cylinder with a spring 38 positioned below the piston such that the piston is biased in a proximal sealed position. In the proximal sealed position, the piston seals one or more perpendicular insufflation vent holes 12. During pressurization of the obturator via insufflation gas, the top of the piston is exposed to the pressure and thus is moved to a distal unsealed position allowing the insufflation gas to flow through the vent holes 12 and into the body cavity. The piston 37 in one aspect is injection molded of a transparent polycarbonate material.

[0041] In FIG. 24, the obturator in one aspect has a membrane 41 positioned inside the distal tip 7 of the obturator which prevents the ingress of moisture and body fluids from the vent hole 12 yet allows insufflation gasses

to flow through the membrane 41 and out the vent hole 12. The membrane 41 is porous and is formed from a hydrophobic material such as Gore-Tex® material. The membrane 41 is inserted into a small cylinder within the distal tip of the obturator adjacent to the insufflation vent hole 12. The membrane in one aspect is also bonded or welded to the inside wall of the distal tip 7 of the obturator.

[0042] Referring now to FIG. 25, in one aspect, the obturator has a perforated membrane 43 positioned inside the distal tip 7 of the obturator, as an alternative to a duckbill valve, for example, which prevents the ingress of moisture and body fluids from the vent hole 12. The perforated membrane 43 tears open or bursts apart when exposed to the pressure of the insufflation gas allowing the insufflation gas to flow out through the insufflation vent holes 12 and into the body cavity. The membrane 43 is formed from paper, cellophane, polyethylene, or polyurethane. The membrane 43 provides a single use visual insufflation port. For example, once the membrane 43 tears open and the insufflation gas flow halts, the ingress of moisture and/or body fluids will not be stopped by the torn perforated membrane 43. Thus, the re-use of the obturator is prevented thereby if so arranged the obturator can be designated as a disposable or single-use instrument preventing unintended operation or improper sterilization of the used obturator.

[0043] As shown in FIG. 26, the obturator in one aspect has an elastomeric external valve 45 such as an umbrella valve at the distal end of the obturator. The umbrella valve 45 is flush with the distal end of the obturator and covers longitudinal insufflation vent holes 12". The umbrella valve moves distally relative to the tip 7 of the obturator when exposed to the pressure of the insufflation gas. The insufflation gas flows through the vent holes into the body cavity. The umbrella valve 45 is attached to the distal tip of the obturator via an integral elastomeric stem 46, which runs through a central axial hole in the obturator. As the obturator is pressurized via the insufflation gas, the elastomeric stem 46 elongates to enable the external portion of the umbrella valve 45 to move distally thus unblocking the vent holes 12" and allowing insufflation gas to flow through the vent holes and into the body cavity. The umbrella valve 45 in its initial or normal condition also prevents the ingress of moisture and body fluids into the obturator during insertion into a body cavity by blocking the vent holes 12" and ensures that optimal visibility through the laparoscope and the obturator is maintained. The umbrella valve 45 in one aspect is a single-piece component, which is injection molded of a transparent or opaque silicone, polyisoprene, or Kraton® material.

[0044] In FIG. 27, in one aspect, the obturator has an elastomeric internal umbrella valve 49 at the distal end of the obturator. The umbrella valve 49 is positioned just proximal to perpendicular or longitudinal vent hole 12' at the distal tip of the obturator. The umbrella valve 49 covers one or more intermediate flow channels 42 to prevent the ingress of moisture and body fluids into the obturator during insertion into a body cavity. During pressurization

from the insufflation gas, the elastomeric stem 48 of the umbrella valve 49 elongates to enable distal movement of the umbrella valve thus allowing the insufflation gas to flow through the intermediate flow channel or channels 42, out through the insufflation vent hole 12', and into the body cavity. The internal umbrella valve 49 in one aspect is a single-piece injection molded component formed from a transparent or opaque silicone, polyisoprene, or Kraton® material.

[0045] In FIG. 28, the obturator in one aspect comprises one or more over-molded elastomeric valves 51 at the tip 17 of the obturator. The elastomeric valves 51 in one aspect are flat disc type valves that are formed of materials such as polyisoprene, Kraton®, and silicone materials. The elastomeric valves 51 encases perpendicular insufflation vent holes 12 at the distal tip 7 of the obturator and with slits 52 in the valves, such that the slits are normally closed to prevent the ingress of body fluids and moisture. Under pressure from the insufflation gas, the slits 52 in the valves slightly open enabling the insufflation gas to flow into the body cavity. Once pressure from the insufflation gas is removed, the slits 52 in the valves close thereby preventing the ingress of body fluids and moisture through the vent holes 12.

[0046] As shown in FIG. 29, in one aspect the obturator has a single over-molded elastomeric valve 53 covering a portion or apex portion of the distal tip 7. The elastomeric valve 53 encases a single longitudinal insufflation vent hole 12' at the distal tip 7 of the obturator. The elastomeric valve 53 has a slit 54 at its distal end or apex generally aligned with the longitudinal vent hole 12' such that the slit 54 is normally closed to prevent the ingress of body fluids and moisture. Under pressure from the insufflation gas, the slit 54 in the valve slightly opens enabling the insufflation gas to flow into the body cavity. The elastomeric valve 53 in one aspect also encases a pair of perpendicular insufflation vent holes. The elastomeric valve in one aspect encases a plurality of longitudinal insufflation vent holes 12' at the distal end of the tip 7 of the obturator.

[0047] Referring now to FIG. 30, in one aspect, the obturator has an internal elastomeric flapper valve 55 located proximal to the perpendicular insufflation vent holes 12. The flapper valve 55 in one aspect is a single-piece component with a hinged flapper door. The flapper door remains closed during traversal of the obturator across a body wall to prevent the ingress of moisture and body fluids into the distal tip of the obturator from the vent holes 12. Under pressure from the insufflation gas, the flapper door opens enabling the insufflation gas to flow into the body cavity.

[0048] As shown in FIGs. 31-32, the obturator in one aspect has longitudinal and/or concentric inner and outer tubes 56,57 where the inner tube 56 rotates freely within the outer tube 57 about a central axis of the obturator. Both the inner tube 56 and the outer tube 57 have insufflation vent holes 58,59. During traversal across a body wall, the inner tube 56 is rotationally positioned such that

the vent holes 58 in the inner tube 56 are not aligned with the vent holes 59 in the outer tube 57 thus creating a sealed condition to prevent the ingress of moisture and body fluids into the tip 7 of the obturator. Upon entry into the body cavity, the inner tube 56 is rotated such that the vent holes 58 on the inner tube are aligned with the vent holes 59 on the outer tube 57 allowing the flow of insufflation gas through the vent holes 58,59 and into the body cavity. The inner tube 56 and/or the outer tube 57 in one aspect are injection molded of transparent polycarbonate materials.

[0049] Referring now to FIG. 33, the obturator shaft 5 is formed of a flexible material with a rigid or semi-rigid tip 7, arranged in one aspect to be used with a flexible scope, and without a cannula 20 to visually gain access to an area within a body including but not limited to a body conduit, a body cavity, a body organ, and a body wall. The obturator in one aspect has a longitudinal vent hole 12' in the tip 7 with the micro-seal, e.g., duckbill valve, positioned proximal to the vent hole in the tip of the obturator. The micro-seal prevents the ingress of moisture, body tissue, and body fluids enabling precise visual placement of the tip 7 of the obturator into a targeted area. Once the obturator is properly positioned within the body, the area surrounding the obturator is insufflated with an insufflation gas to facilitate access to the targeted area. Another device can be inserted into a working channel of the obturator to conduct a surgical procedure such as brachytherapy or a breast biopsy. The surgical procedure, such as a breast biopsy, could be completed with or without visualization. The obturator could also include other types of internal micro-seals such as flapper valves or disc type valves. The internal micro-seal acting as a zero seal could also include a septum or instrument seal to seal around inserted instruments.

[0050] In one aspect, as the obturator traverses body tissue, pressurized insufflation gas are utilized to separate or dissect tissue away from the tip 7 of the obturator 5 thus lowering the force required to traverse the body tissue. The insufflation gas flows through the distal insufflation vent holes in the obturator 5 and into the body tissue forcing the body tissue away from the obturator tip 7. The insufflation gas is also used to separate relatively soft body tissue to enable access to a targeted body area within a relatively confined space. The obturator 5 in one aspect is formed of either a flexible material or a rigid material and used with or without a cannula 20.

[0051] In especially tortuous body conduits or surgical access pathways, the micro-seal preventing the ingress of fluid and/or tissue, e.g., fat, provides the ability to leave the laparoscope inserted into the obturator as it travels the pathway, thereby enhancing accuracy in movement of the obturator and access to the surgical site. As such, removal of the laparoscope to clean and/or de-fog the scope is avoided. Also, it may not be feasible, to subsequently re-enter the laparoscope and obturator into the body conduit after removal of the laparoscope.

[0052] As shown in FIG. 34, the inside wall 71 of the tip 7 of the obturator in one aspect is coated with an anti-fog solution to prevent excessive moisture from collecting on the inner wall of the obturator and to assist in maintaining optimal visibility through the tip of the obturator. The anti-fog solution is used with or without a valve in the tip of the obturator. In one aspect, a valve in the tip of the obturator is replaced with two perpendicular vent holes 12 in the tip 7 of the obturator. The anti-fog solution is applied via a dipping or coating process and then allowed to dry. Upon exposure to moisture, the anti-fog agent activates thereby preventing condensation from collecting on the inside walls 71 of the obturator. The anti-fog solution in one aspect is formulated from a mixture of 1% by weight docusate sodium and 99% by weight distilled water.

[0053] The laparoscope seal 9 in one aspect is coated with an anti-fog solution such that as the laparoscope passes through the laparoscope seal, the lens of the laparoscope is coated with the anti-fog solution. Once the laparoscope lens is coated with the anti-fog solution, condensation will not form on the laparoscope lens or is greatly minimized thereby maintaining optimal visibility during traversal of the obturator across a body wall. In one aspect, the laparoscope seal comprises an insert, pad or cap 73 saturated with an anti-fog solution. The insert 73 of the laparoscope seal 9 in one aspect is a form with a single slit, a plurality of slits, an aperture, or a combination thereof defining a passageway for the laparoscope through the foam. As the laparoscope is inserted into the obturator, the laparoscope passes through the saturated foam 73 thereby coating the lens of the laparoscope with the anti-fog solution. Once the lens of the laparoscope is coated with the anti-fog solution, condensation will not form on the laparoscope lens or is greatly minimized thereby maintaining optimal visibility during traversal of the obturator across a body wall. In one aspect, one or more applicators, e.g., foam or gel rollers or cylinders, saturated with anti-fog solution, is positioned within the handle of the obturator, such that as the laparoscope passes through the applicator coats the lens of the laparoscope with anti-fog solution.

[0054] The insert, pad or cap 73 in one aspect is formed, entirely or partially, from various materials such as silicone foam, polyurethane foam, polyethylene foam, ethylene vinyl acetate foam, PVC foam, felt, and cotton. The saturated cap in one aspect is bonded to the proximal end of the obturator and/or the proximal end of the laparoscope seal. To prevent evaporation of the anti-fog solution, the obturator in one aspect is packaged in a non-breathable package such as a mylar pouch or a foil pouch, both of which could be sterilized via gamma radiation sterilization or electron beam sterilization. The cap 73 in one aspect can also be contained within a sealed section of the obturator to prevent migration of the anti-fog solution from the cap.

[0055] In FIG. 35, the obturator in one aspect has a transparent lens 81 fitted adjacent to or into the tip 7 of

the obturator that includes an internal elastomeric seal 83 configured to seal around the outside diameter of the laparoscope. The lens 81 encases the tip of the laparoscope to prevent fogging of the laparoscope. The lens 81 and/or the elastomeric seal 83 in one aspect is arranged to have a relatively close fit with the outside diameter of the laparoscope 40 to minimize the flow of moisture into the space between the lens 81 and the distal tip of the laparoscope. The lens in one aspect is also coated with an anti-fog solution to prevent condensation from collecting on the lens. The lens 81 in one aspect is shaped to provide additional magnification of the image. The additional magnification of the image provided by the lens enhances the visibility of the surrounding tissue during traversal of the obturator 10 across a body wall. The thickness of the lens 81 in one aspect ranges from about 001" to about 250". The lens 81 in one aspect is formed from various transparent materials including glass, infrared absorbent glass, polycarbonate, acrylic, polyvinyl chloride, PET, PETE, PETG, cellophane, silicone, polyurethane, polyetherimide, polyamide, and polysulfone. In one aspect, the lens 81 is positioned such that the lens does not obstruct the insufflation pathway through the elongate body and out the aperture in the tip. In one aspect, an insufflation channel parallel with the longitudinal axis of the elongate body assists in providing a pathway around the lens extending across the tip cavity and out through the aperture in the tip.

[0056] Referring now to FIG. 36, the obturator 10 in one aspect has a transparent disc lens 85 fitted into the tip 7 of the obturator 10. The distal end of the laparoscope 40 is juxtaposed to the disc lens 85. Heat generated by the light from the laparoscope serves to heat the polycarbonate disc lens 85, which in turn heats the lens of the laparoscope 40 to prevent condensation from forming on the lens of the laparoscope 40. The disc lens 85 in one aspect is coated with an anti-fog solution to prevent condensation from forming on the lens 85. The thickness of the lens 85 in one aspect ranges from about 001" to about 250". The lens 85 in one aspect is formed from various transparent materials such as glass, infrared absorbent glass, polycarbonate, acrylic, polyvinyl chloride, PET, PETE, PETG, cellophane, silicone, polyurethane, polyetherimide, polyamide, and polysulfone.

[0057] In FIG. 37, in one aspect, the obturator has a transparent disc lens 85 as described above with an elastomeric perimeter seal 88 loosely positioned on the proximal side of the lens. The seal in one aspect is arranged as an o-ring or a planar type seal and serves to create a seal between the distal end of the laparoscope and the proximal face or side of the disc lens 85. The seal 88 prevents body moisture from contacting the lens of the laparoscope 40 and therefore prevents condensation from collecting on the laparoscope lens. The disc lens 85 in one aspect is coated with an anti-fog solution to prevent condensation from collecting on the surfaces of the disc lens 85. The elastomeric perimeter seal 88 in one aspect is formed from various materials such as

polyisoprene, silicone, urethane, ethylene propylene diene monomer, Kraton®, nitrile, neoprene, or various closed cell foam materials. The elastomeric perimeter seal 88 in one aspect is adhered to the disc lens 85 through an over-molding process. The elastomeric perimeter seal 88 in one aspect is bonded to the disc lens 85 with an adhesive

[0058] Accordingly, the present invention provides a visual insufflation port/obturator. Although this invention has been described in certain specific embodiments, many additional modifications and variations would be apparent to those skilled in the art. It is therefore to be understood that this invention may be practiced otherwise than specifically described, including various changes in the size, shape and materials. Thus, embodiments of the present invention should be considered in all respects as illustrative only.

Claims

1. A visual insufflation obturator comprising:

an elongate body (5) having a proximal end, a distal end and a body lumen extending from the proximal end of the elongate body to the distal end of the elongate body;

a handle (3) connected to the proximal end of the elongate body and having a handle lumen extending from a proximal end of the handle (3) to the proximal end of the elongate body and being connected to the body lumen;

a transparent tip (7) connected to the distal end of the elongate body and having a tip cavity, the tip (7) having an outer surface with an aperture (12) extending through the outer surface into the tip cavity and defining an insufflation gas pathway from the elongate body out through the aperture (12); and

a laparoscope seal (9) attached to the proximal end of the elongate body (5); the laparoscope seal (9) having a zero seal (8) and an instrument seal (6) axially aligned with and proximal to the zero seal (8);

characterized in further comprising an anti-fog applicator (73) saturated with an anti-fog solution positioned at the proximal end of the elongate body (5) and the laparoscope seal (9) and in a direct pathway through the laparoscope seal and into the elongate body (5).

2. The obturator of claim 1, wherein the body lumen has a diameter less than a diameter of the handle lumen.

3. The obturator of claim 1 or claim 2, further comprising a cannula (20) having a proximal end and a distal end, the elongate body (5) and tip movable into the

cannula (20) and removable from the cannula (20) with the handle (3) extending away from the proximal end of the cannula (20) and the tip (7) extending through and beyond the distal end of the cannula (20).

4. The obturator of any of the preceding claims, further comprising a laparoscope (40) movable into and out of the handle and body lumen of the elongate body (5).

5. The obturator of any of the preceding claims further comprising a micro-seal located within the tip cavity and adjacent to the aperture.

6. The obturator of claim 5, wherein the micro-seal (11) comprises at least one of a double duckbill seal (26) with an outer flange sealing engaged along an inner periphery of the tip cavity; a disc seal (25); a movable tip (35, 36) movable within the tip cavity traversing from a first position covering the aperture to a second position uncovering the aperture; and a porous membrane (41, 43) extending across an inner wall of the tip (7).

7. The obturator of any of the preceding claims, wherein the transparent tip (7) is partially obscured.

8. The obturator of any of the preceding claims, further comprising a screen (21) located within the aperture (12) of the tip (7) between the outer surface and the tip cavity.

9. The obturator of any of claims 4 to 6, configured such that, in use the laparoscope does not extend through the tip of the obturator.

10. The obturator of any of the preceding claims, wherein the anti-fog applicator (73) comprises a foam roller saturated with an anti-fog solution.

11. The obturator of any of the preceding claims, further comprising a lens (81, 85) located within the tip cavity before the aperture (12) and a distal enclosed end of the transparent tip (7), the lens (81) being coated with an anti-fog solution.

12. The obturator of claim 11, further comprising an elastomeric perimeter seal (83, 88) located within the tip cavity adhered to the lens (81).

13. The obturator of claim 11 or claim 12, wherein the lens (81, 85) has a thickness of 0.025 mm (0.001 inches) to 6.4 mm (0.250 inches).

14. The obturator of any of the preceding claims, further comprising an insufflation channel parallel with a longitudinal axis of the elongate body (5) and a lens (85)

extending across the tip cavity unobstructing the insufflation channel, and a seal (88) positioned on the lens (85), the lens being a polycarbonate disc lens (85).

15. The obturator of any of the preceding claims wherein the anti-fog applicator (73) is an insert, pad, cap, foam or gel roller or cylinder with anti-fog solution.
16. The obturator of claim 15 wherein the insert pad or cap (73) is formed entirely or partially from silicone foam, polyurethane foam, polyethylene foam, ethylene vinyl acetate foam, PVC foam, felt or cotton.
17. The obturator of claim 15 wherein the cap (73) is bonded to the proximal end of the obturator or the proximal end of the laparoscope seal (9).

Patentansprüche

1. Ein visueller Insufflationsobturator, der Folgendes beinhaltet:

einen länglichen Hauptteil (5) mit einem proximalen Ende, einem distalen Ende und einem Hauptteillum, das sich aus dem proximalen Ende des länglichen Hauptteils bis zum distalen Ende des länglichen Hauptteils erstreckt;

einen Handgriff (3), der mit dem proximalen Ende des länglichen Hauptteils verbunden ist und ein Handgriffumen aufweist, das sich von einem proximalen Ende des Handgriffs (3) bis zum proximalen Ende des länglichen Hauptteils erstreckt und mit dem Hauptteillum verbunden ist;

eine durchsichtige Spitze (7), die mit dem distalen Ende des länglichen Hauptteils verbunden ist und einen Spitzenhohlraum aufweist, wobei die Spitze (7) eine Außenfläche mit einer Öffnung (12) aufweist, die sich durch die Außenfläche in den Spitzenhohlraum hinein erstreckt und einen Insufflationsgasweg von dem länglichen Hauptteil durch die Öffnung (12) heraus definiert; und

eine Laparoskopdichtung (9), die an dem proximalen Ende des länglichen Hauptteils (5) befestigt ist; wobei die Laparoskopdichtung (9) eine Nulldichtung (8) und eine Instrumentendichtung (6) aufweist, die axial mit der Nulldichtung ausgerichtet ist und proximal zu der Nulldichtung (8) liegt;

dadurch gekennzeichnet, dass er ferner einen mit einer Anti-Beschlag-Lösung gesättigten Anti-Beschlag-Applikator (73) beinhaltet, der an dem proximalen Ende des länglichen Hauptteils (5) und der Laparoskopdichtung (9) und in einem direkten Weg durch die Laparoskopdich-

tung und in den länglichen Hauptteil (5) hinein positioniert ist.

2. Der Obturator gemäß Anspruch 1, wobei das Hauptteillum einen Durchmesser aufweist, der geringer als ein Durchmesser des Handgriffumens ist.

3. Der Obturator gemäß Anspruch 1 oder 2, der ferner eine Kanüle (20) mit einem proximalen Ende und einem distalen Ende beinhaltet, wobei der längliche Hauptteil (5) und die Spitze in die Kanüle (20) hinein bewegt und aus der Kanüle (20) entfernt werden können, wobei der Handgriff (3) sich von dem proximalen Ende der Kanüle (20) weg erstreckt und die Spitze (7) sich durch das distale Ende der Kanüle (20) erstreckt.

4. Der Obturator gemäß einem der vorhergehenden Ansprüche, der ferner ein Laparoskop (40) beinhaltet, das in und aus dem Handgriff heraus und in und aus dem Hauptteillum des länglichen Hauptteils (5) heraus bewegt werden kann.

5. Der Obturator gemäß einem der vorhergehenden Ansprüche, der ferner eine Mikrodichtung beinhaltet, die innerhalb des Spitzenhohlraums und neben der Öffnung liegt.

6. Der Obturator gemäß Anspruch 5, wobei die Mikrodichtung (11) mindestens eine der Folgenden beinhaltet: eine doppelte Entenschnabdichtung (26) mit einem Außenflansch, der in dichtendem Eingriff an einem inneren Umfang des Spitzenhohlraums entlang steht; eine Scheibendichtung (25); eine bewegliche Spitze (35, 36), die innerhalb des Spitzenhohlraums beweglich ist, wobei sie von einer ersten, die Öffnung abdeckenden Position zu einer zweiten, die Öffnung aufdeckenden Position läuft; und eine poröse Membran (41, 43), die sich über eine Innenwand der Spitze (7) hinweg erstreckt.

7. Der Obturator gemäß einem der vorhergehenden Ansprüche, wobei die durchsichtige Spitze (7) teilweise verdunkelt ist.

8. Der Obturator gemäß einem der vorhergehenden Ansprüche, der ferner eine Abschirmung (21) beinhaltet, die innerhalb der Öffnung (12) der Spitze (7) zwischen der Außenfläche und dem Spitzenhohlraum liegt.

9. Der Obturator gemäß einem der Ansprüche 4 bis 6, der so konfiguriert ist, dass das Laparoskop im Gebrauch sich nicht durch die Spitze des Obturators erstreckt.

10. Der Obturator gemäß einem der vorhergehenden Ansprüche, wobei der Anti-Beschlag-Applikator (73)

einen Schaumroller beinhaltet, der mit einer Anti-Beschlag-Lösung gesättigt ist.

11. Der Obturator gemäß einem der vorhergehenden Ansprüche, der ferner eine Linse (81, 85) beinhaltet, die innerhalb des Spitzenhohlraums vor der Öffnung (12) und einem distalen abgeschlossenen Ende der durchsichtigen Spitze (7) liegt, wobei die Linse (81) mit einer Anti-Beschlag-Lösung beschichtet ist. 5
12. Der Obturator gemäß Anspruch 11, der ferner eine innerhalb des Spitzenhohlraums liegende, elastomere Umfangsdichtung (83, 88) beinhaltet, die an der Linse (81) haftet. 10
13. Der Obturator gemäß Anspruch 11 oder Anspruch 12, wobei die Linse (81, 85) eine Dicke von 0,025 mm (0,001 Zoll) bis 6,4 mm (0,250 Zoll) aufweist. 15
14. Der Obturator gemäß einem der vorhergehenden Ansprüche, der ferner Folgendes beinhaltet: einen Insufflationskanal, der parallel zu einer Längsachse des länglichen Hauptteils (5) liegt, und eine Linse (85), die sich über den Spitzenhohlraum hinweg erstreckt und den Insufflationskanal nicht behindert, und eine Dichtung (88), die auf der Linse (85) positioniert ist, wobei die Linse eine Polycarbonatscheibenlinse ist (85). 20 25
15. Der Obturator gemäß einem der vorhergehenden Ansprüche, wobei der Anti-Beschlag-Applikator (73) ein Einsatz, ein Kissen, eine Kappe, ein Schaum- oder Gelroller oder ein Zylinder mit einer Anti-Beschlag Lösung ist. 30
16. Der Obturator gemäß Anspruch 15, wobei das Einsatzkissen oder die Kappe (73) ganz oder teilweise aus Siliconschaum, Polyurethanschaum, Polyethylenschaum, Ethylenvinylacetatschaum, PVC-Schaum, Filz oder Baumwolle gebildet ist. 35 40
17. Der Obturator gemäß Anspruch 15, wobei die Kappe (73) an das proximale Ende des Obturators oder das proximale Ende der Laparoskopdichtung (9) gebunden ist. 45

Revendications

1. Obturateur d'insufflation optique comprenant : 50
 - un corps allongé (5) comportant une extrémité proximale, une extrémité distale et une lumière qui se prolonge de l'extrémité proximale du corps allongé à l'extrémité distale du corps allongé ; 55
 - une poignée (3) connectée à l'extrémité proximale du corps allongé et comportant une lumière

re qui se prolonge d'une extrémité proximale de la poignée (3) à l'extrémité proximale du corps allongé et qui est connectée à la lumière du corps ;

une pointe transparente (7) connectée à l'extrémité distale du corps allongé et présentant une cavité, la pointe (7) ayant une surface externe dotée d'une ouverture (12) qui se prolonge au travers de la surface externe jusqu'à la cavité de la pointe et définit une voie d'insufflation gazeuse qui va du corps allongé à l'ouverture (12) ; et un joint du laparoscope (9) rattaché à l'extrémité proximale du corps allongé (5), le joint du laparoscope (9) ayant un joint d'étanchéité (8) et un joint d'instrument (6) alignés axialement avec le joint d'étanchéité (8) en position proximale à celui-ci ;

caractérisé en ce qu'il comprend également un applicateur antibuée (73) saturé avec une solution antibuée qui est positionné à l'extrémité proximale du corps allongé (5) et du joint du laparoscope (9) et dans une voie directe passant au travers du joint du laparoscope et dans le corps allongé (5).

2. Obturateur de la revendication 1, dans lequel le diamètre de la lumière du corps est plus faible qu'un diamètre de la lumière de la poignée.
3. Obturateur de la revendication 1 ou de la revendication 2, qui comprend en outre une canule (20) comportant une extrémité proximale et une extrémité distale, le corps allongé (5) et la pointe déplaçable dans la canule (20) et retirable de la canule (20) avec la poignée (3) se prolongeant à distance de l'extrémité proximale de la canule (20) et la pointe (7) se prolongeant au travers et au-delà de l'extrémité distale de la canule (20)
4. Obturateur de l'une quelconque des revendications précédentes, qui comprend en outre un laparoscope (40) déplaçable dans et hors de la poignée et de la lumière du corps allongé (5).
5. Obturateur de l'une quelconque des revendications précédentes, qui comprend en outre un micro-joint situé dans la cavité de la pointe en position adjacente à l'ouverture.
6. Obturateur de la revendication 5, dans lequel le micro-joint (11) comprend un au moins des éléments suivants : double joint en bec de canard (26) avec joint d'étanchéité externe de la bride accouplé le long d'une périphérie interne de la cavité de la pointe ; joint à disque (25) ; embout déplaçable (35, 36) à l'intérieur de la cavité de la pointe passant d'une première position couvrant l'ouverture à une deuxième

position exposant l'ouverture ; et membrane poreuse (41, 43) se prolongeant au travers d'une paroi interne de la pointe (7).

7. Obturateur de l'une quelconque des revendications précédentes, dans lequel la pointe transparente (7) est partiellement obscurcie. 5
8. Obturateur de l'une quelconque des revendications précédentes, qui comprend en outre un crible (21) situé dans l'ouverture (12) de la pointe (7) entre la surface externe et la cavité de la pointe. 10
9. Obturateur de l'une quelconque des revendications 4 à 6 dont la configuration est telle qu'à l'usage, le laparoscope ne se prolonge pas au travers de la pointe de l'obturateur. 15
10. Obturateur de l'une quelconque des revendications précédentes, dans lequel l'applicateur antibuée (73) comprend un rouleau de mousse saturé avec une solution antibuée. 20
11. Obturateur de l'une quelconque des revendications précédentes, qui comprend en outre une lentille (81, 85) située dans la cavité de la pointe en amont de l'ouverture (12) et d'une extrémité distale fermée de la pointe transparente (7), la lentille (81) étant revêtue d'une solution antibuée. 25
30
12. Obturateur de la revendication 11, qui comprend en outre un joint élastomère périphérique (83, 88) situé dans la cavité de la pointe et adhérent à la lentille (81). 35
13. Obturateur de la revendication 11 ou de la revendication 12, dans lequel l'épaisseur de la lentille va de 0,025 mm (0,001 pouce) à 6,4 mm (0,250 pouce).
14. Obturateur de l'une quelconque des revendications précédentes, qui comprend en outre un canal d'insufflation parallèle à un axe longitudinal du corps allongé (5), une lentille (85) se prolongeant au travers de la cavité de la pointe sans obstruer le canal d'insufflation et un joint (88) positionné sur la lentille (85), la lentille étant une lentille constituée d'un disque de polycarbonate (85). 40
45
15. Obturateur de l'une quelconque des revendications précédentes, dans lequel l'applicateur antibuée (73) est un élément intercalaire, un tampon, une garniture ou un rouleau ou cylindre de mousse ou de gel saturé avec une solution antibuée. 50
16. Obturateur de la revendication 15, dans lequel l'élément intercalaire, le tampon ou la garniture (73) est constitué entièrement ou en partie d'une mousse de silicone, d'une mousse de polyuréthane, d'une

mousse de polyéthylène, d'une mousse d'éthylène-acétate de vinyle, d'une mousse de PVC, d'un feutre ou d'un coton.

17. Obturateur de la revendication 15, dans lequel le capuchon (73) est fixé à l'extrémité proximale de l'obturateur ou à l'extrémité proximale du joint du laparoscope (9).

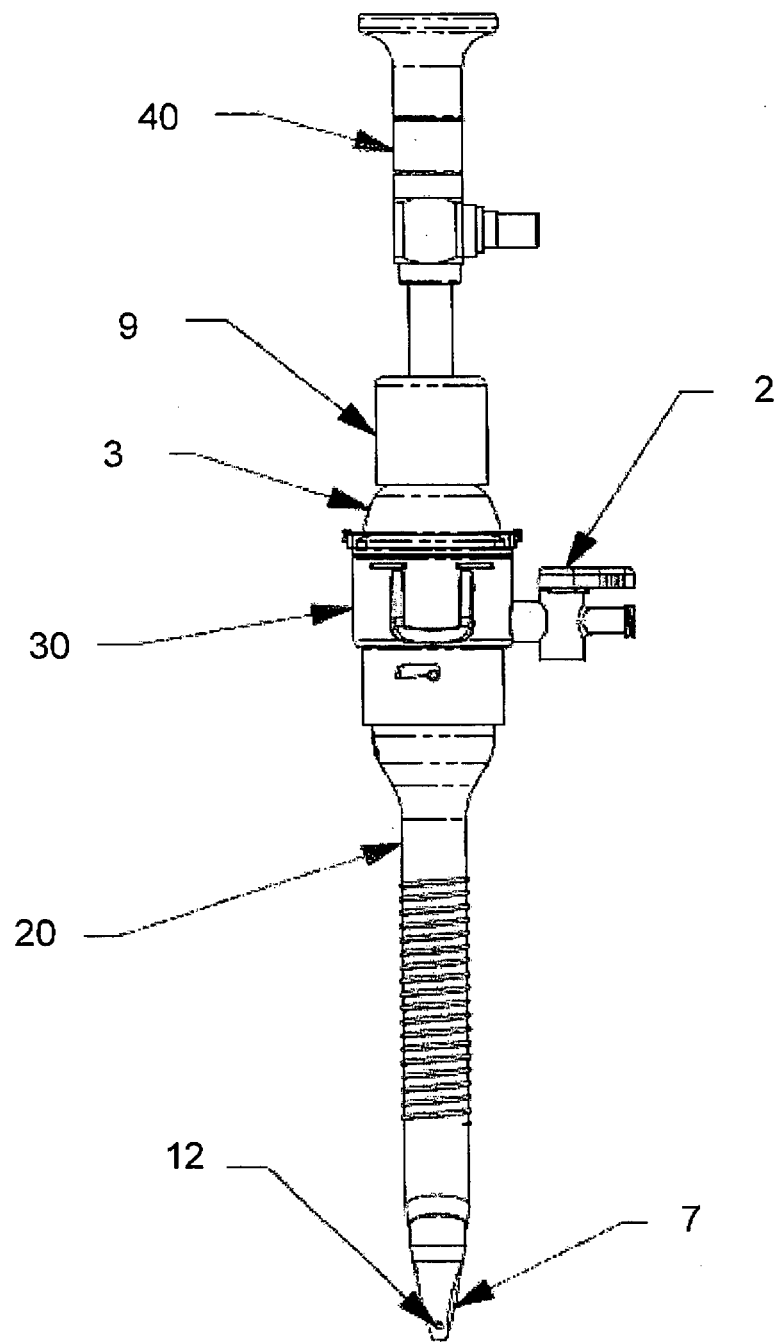


FIG. 1

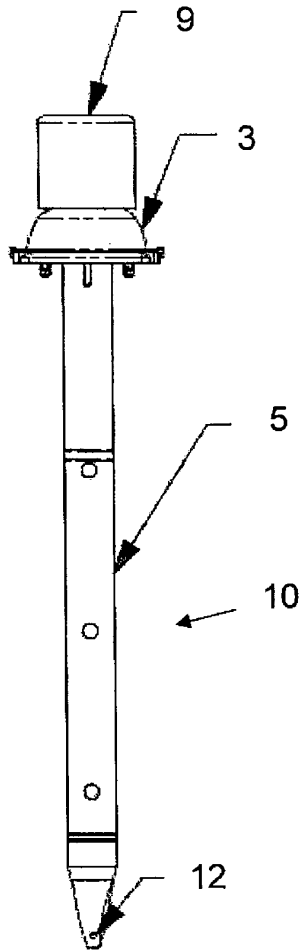


FIG. 2

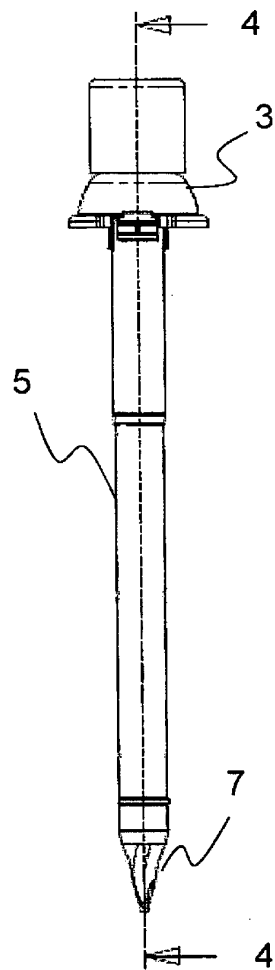


FIG. 3

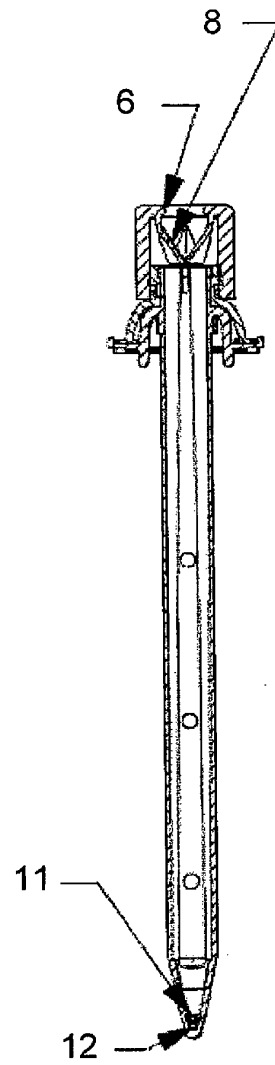


FIG. 4

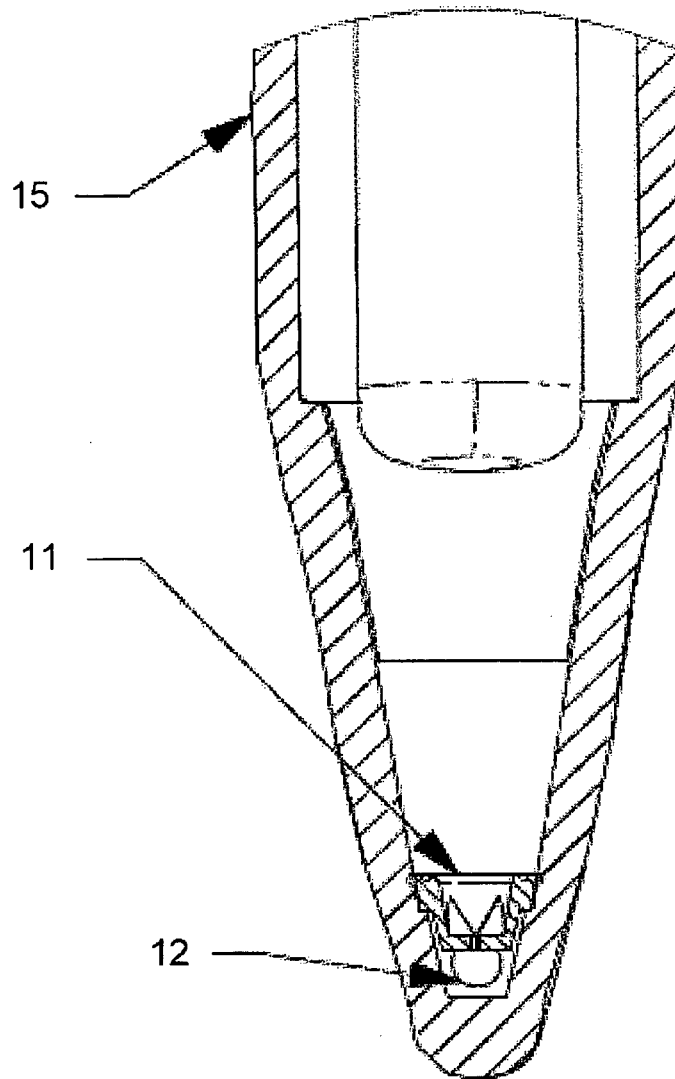


FIG. 5

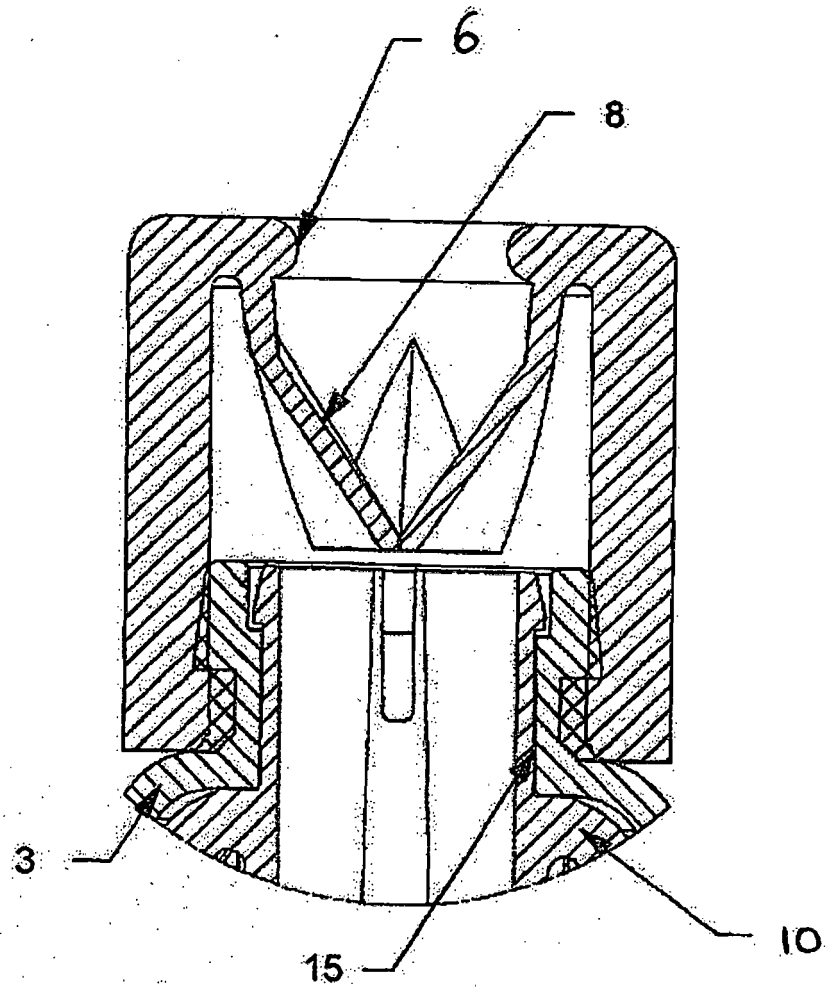


FIG. 6

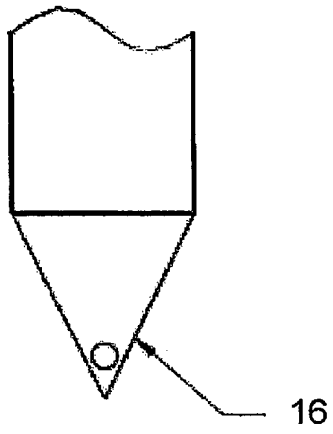


FIG. 7

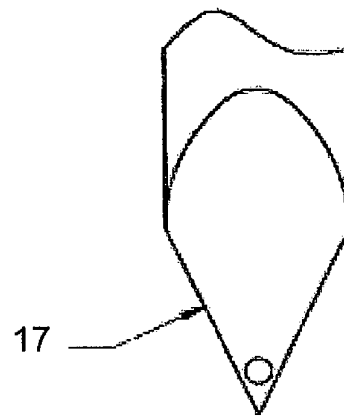


FIG. 8

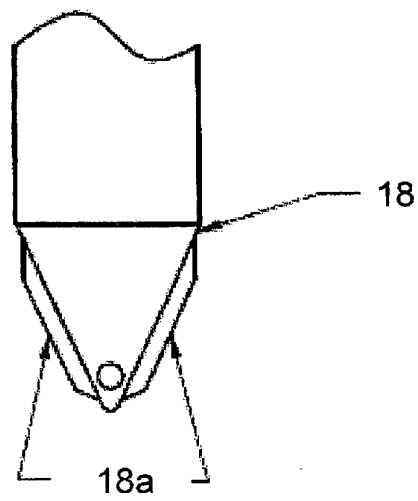


FIG. 9

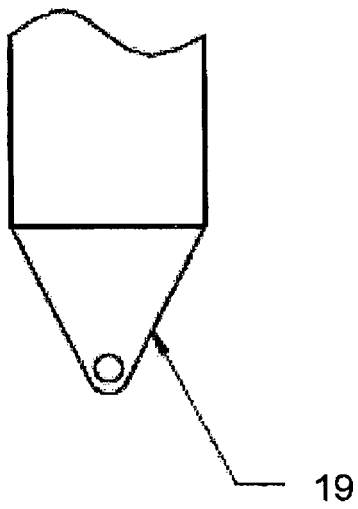


FIG. 10

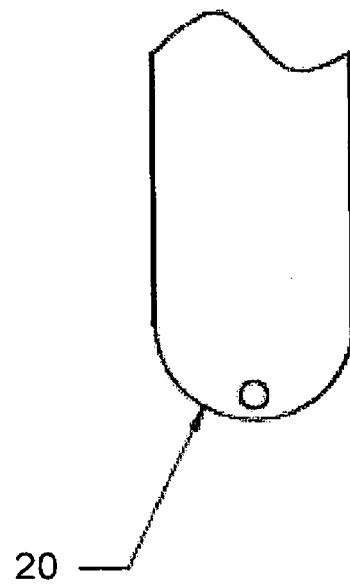


FIG. 11

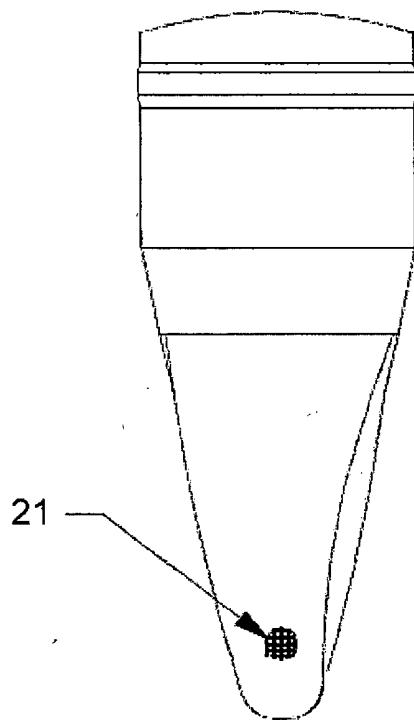


FIG. 12

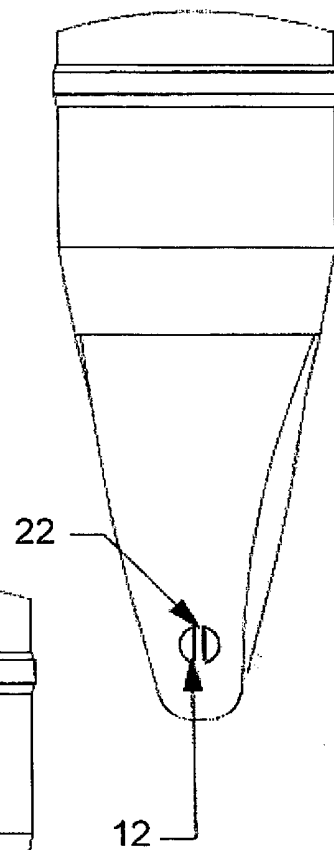


FIG. 13

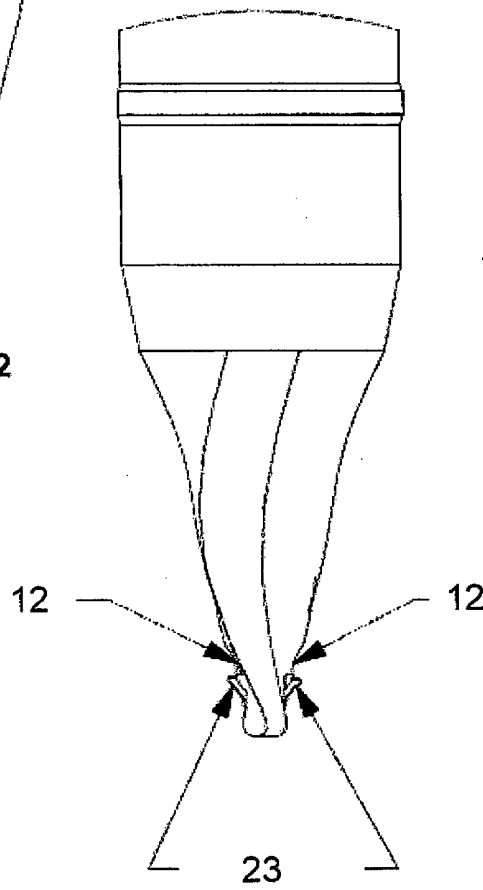


FIG. 14

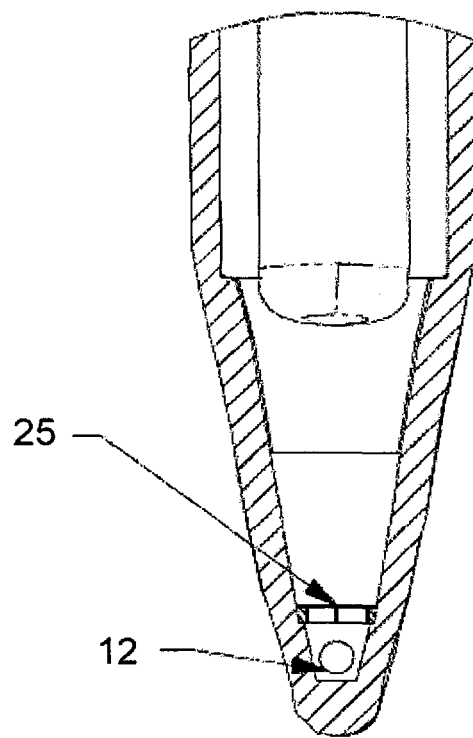


FIG. 15

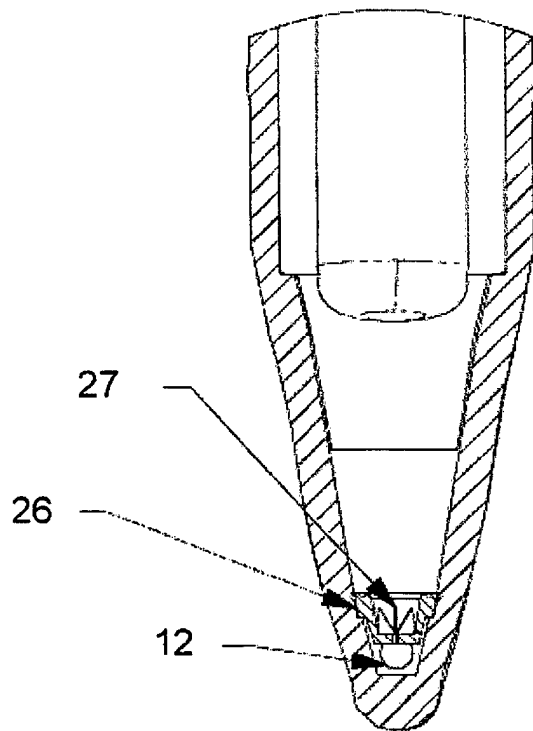


FIG. 16

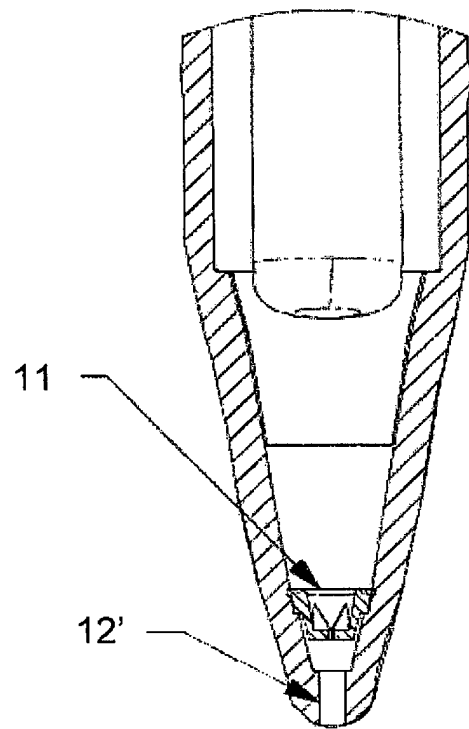


FIG. 17

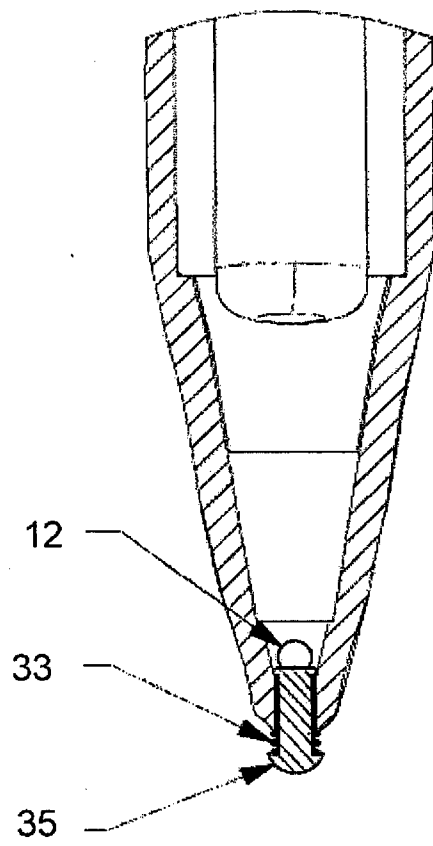


FIG. 18

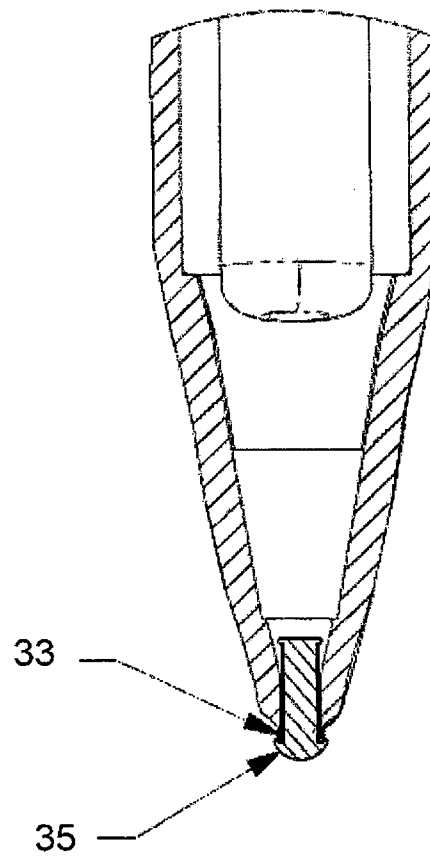


FIG. 19

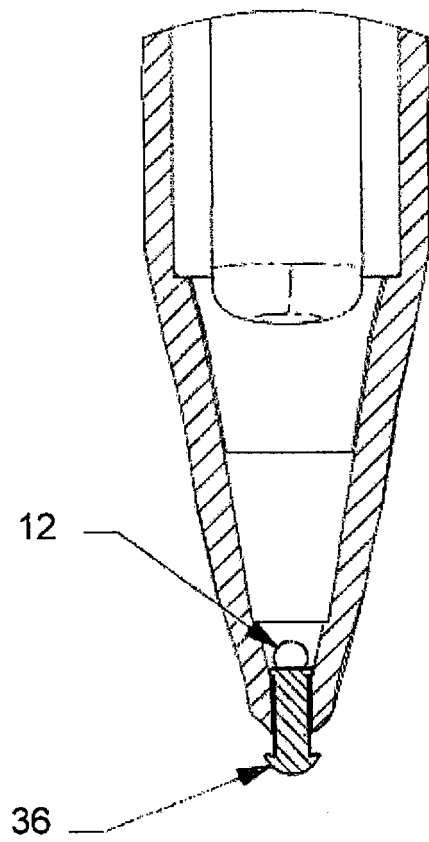


FIG. 20

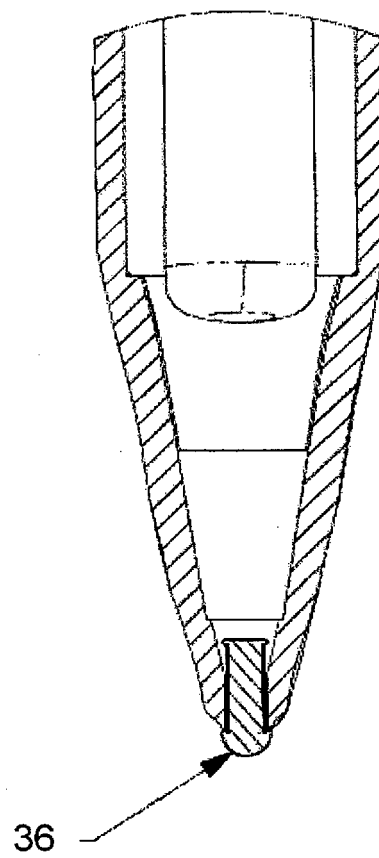


FIG. 21

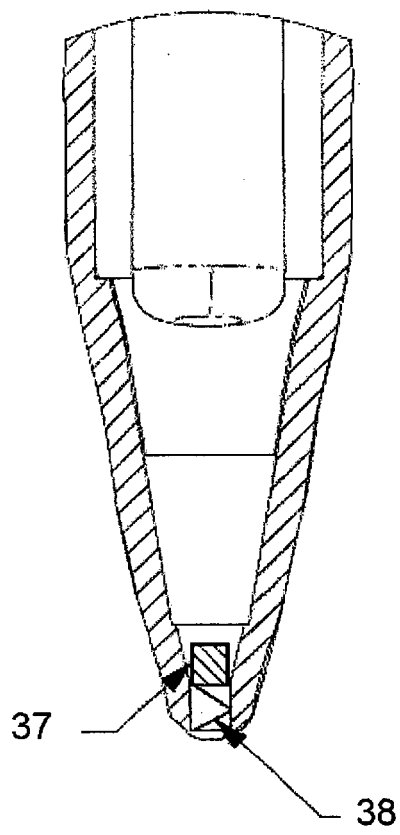


FIG. 22

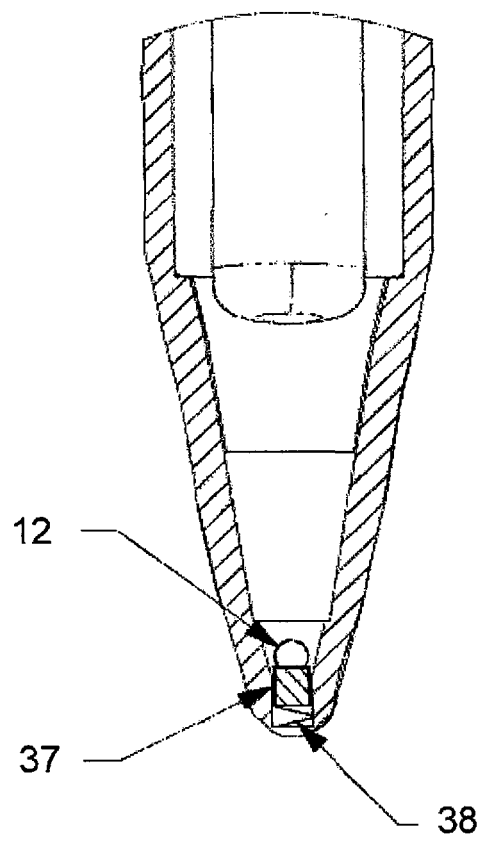


FIG. 23

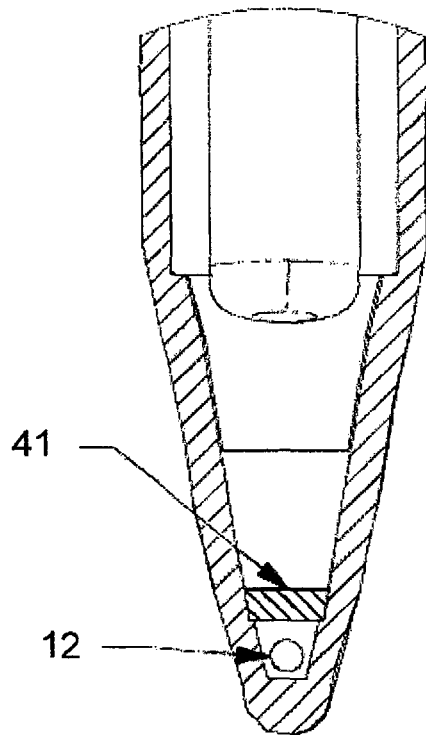


FIG. 24

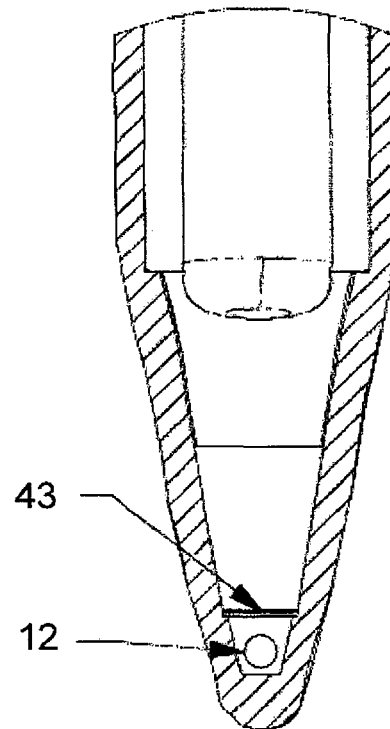


FIG. 25

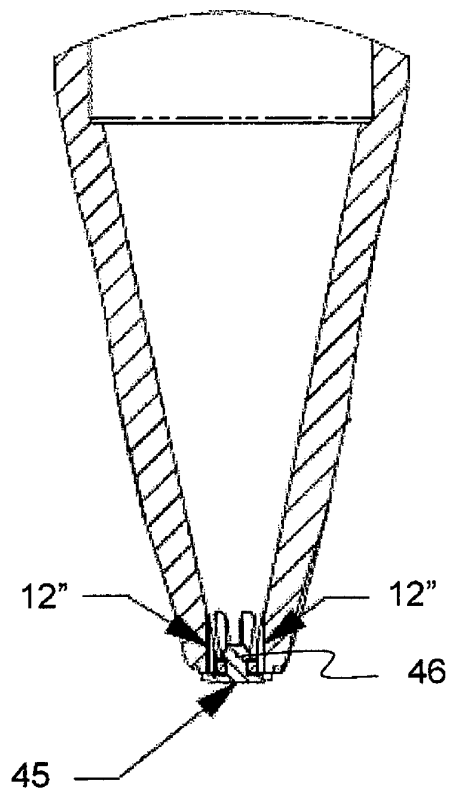


FIG. 26

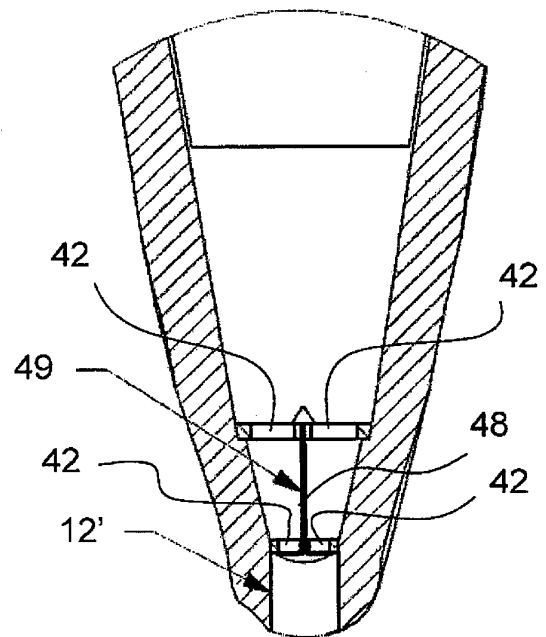


FIG. 27

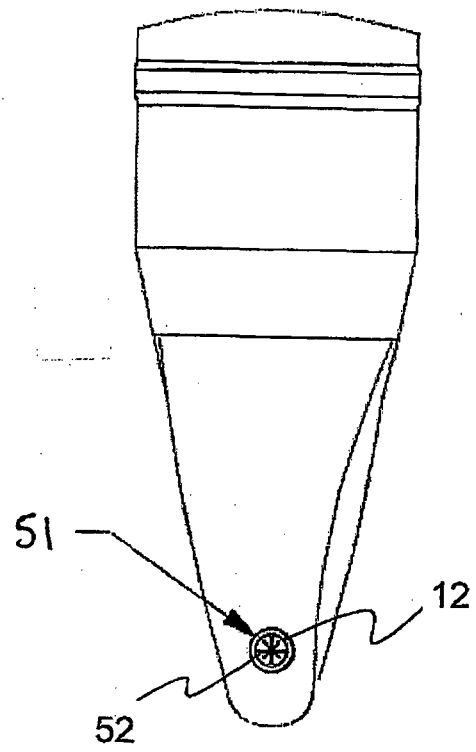


FIG. 28

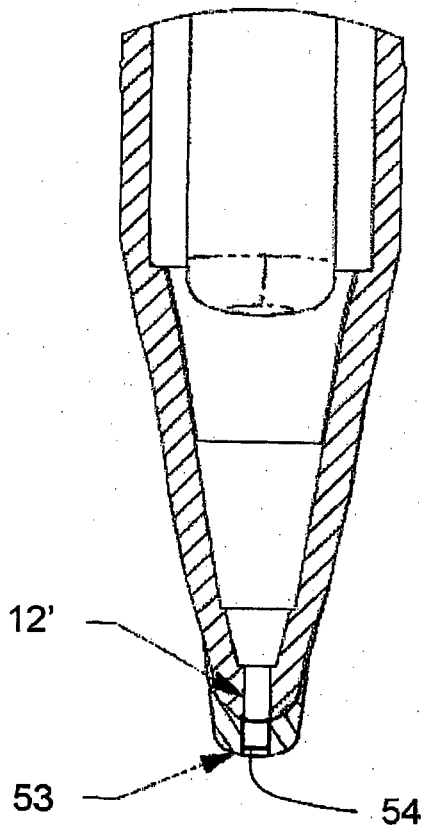


FIG. 29

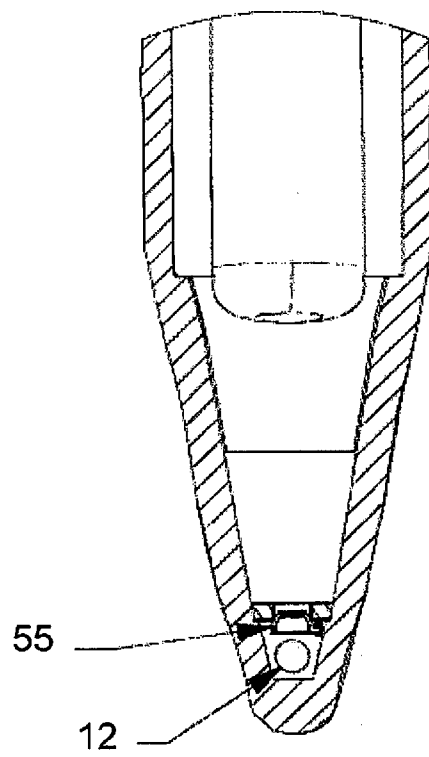


FIG. 30

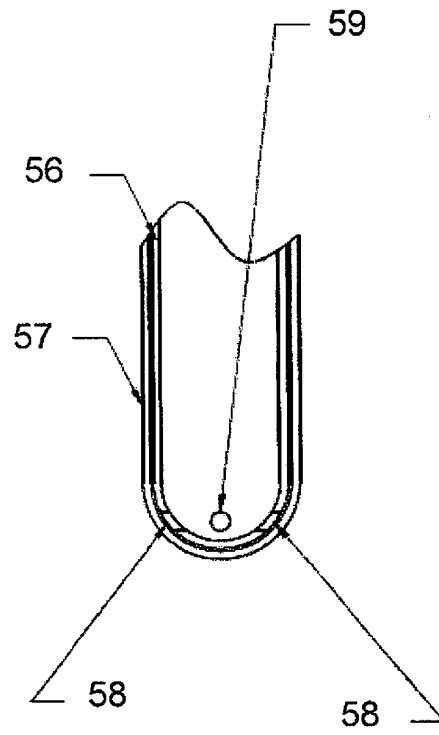


FIG. 31

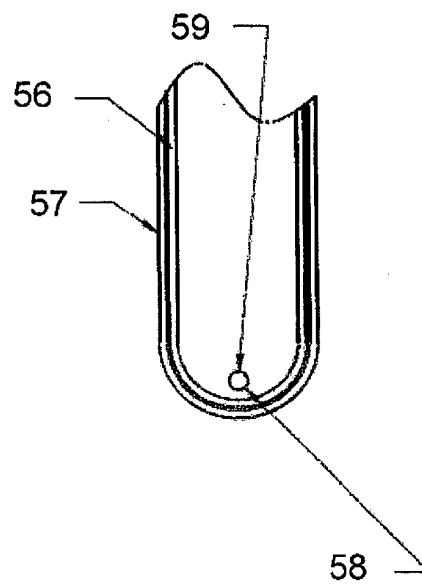


FIG. 32

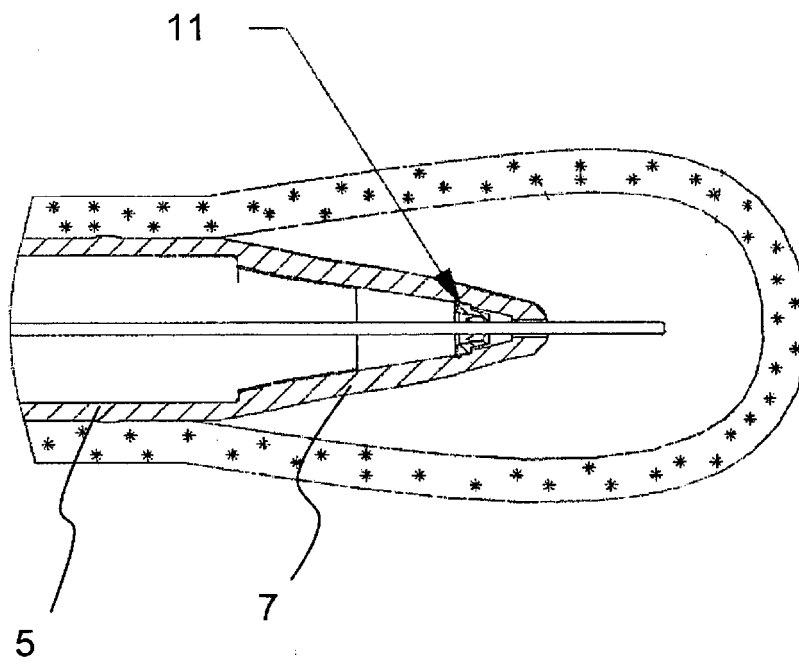


FIG. 33

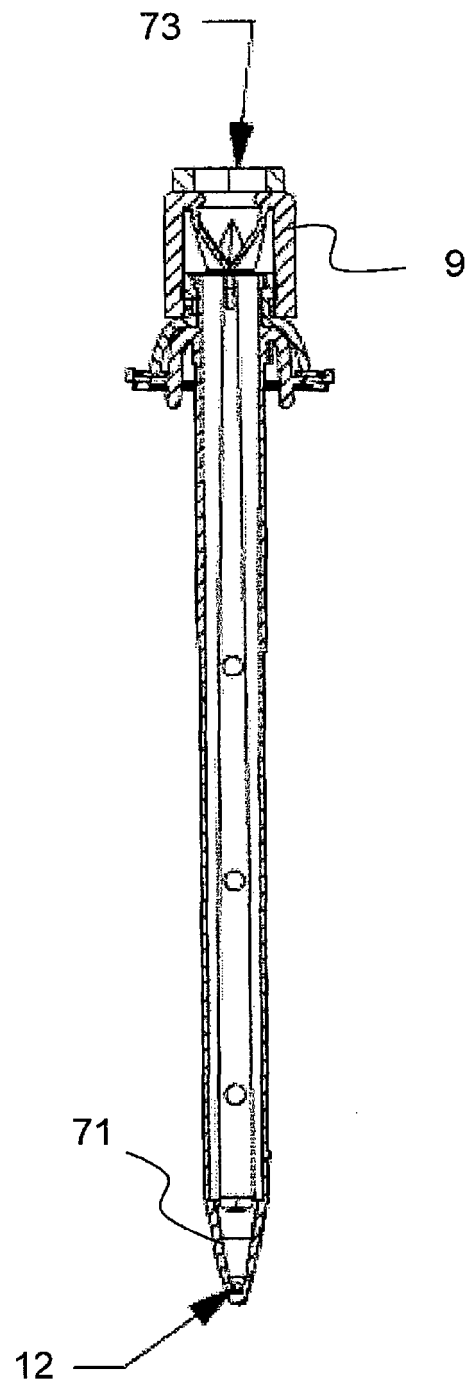


FIG. 34

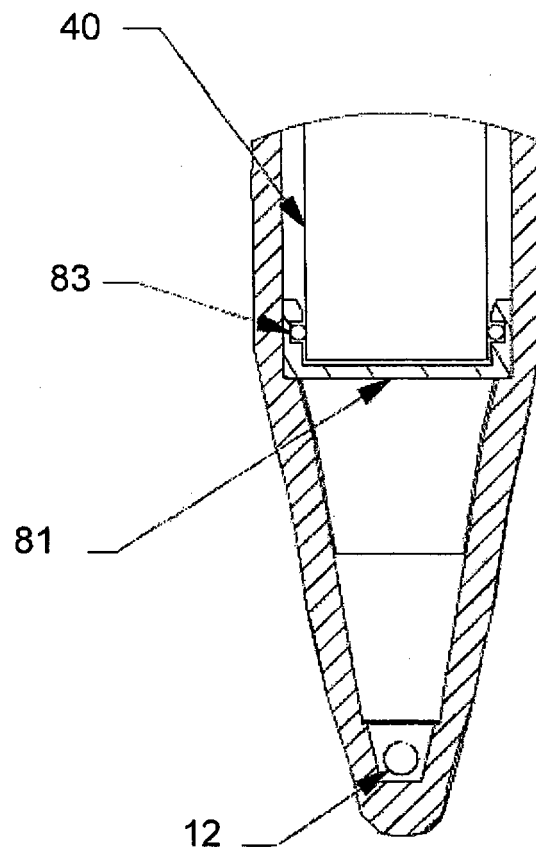


FIG. 35

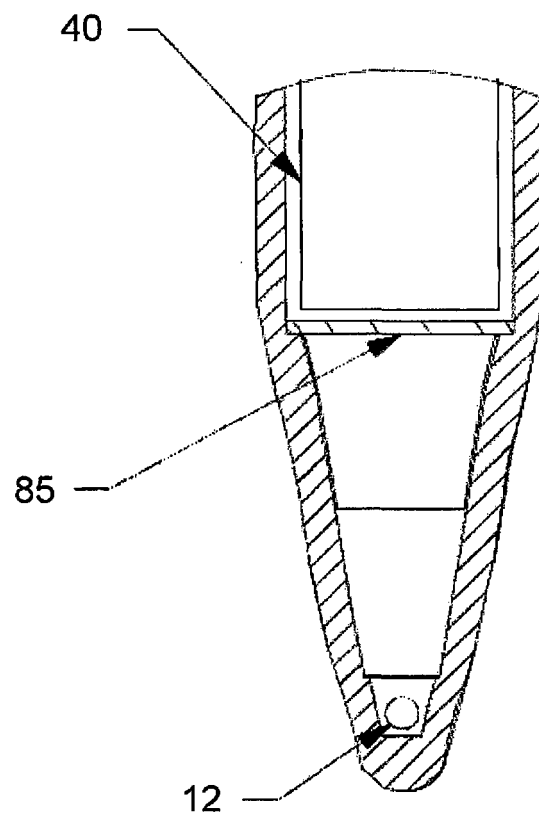


FIG. 36

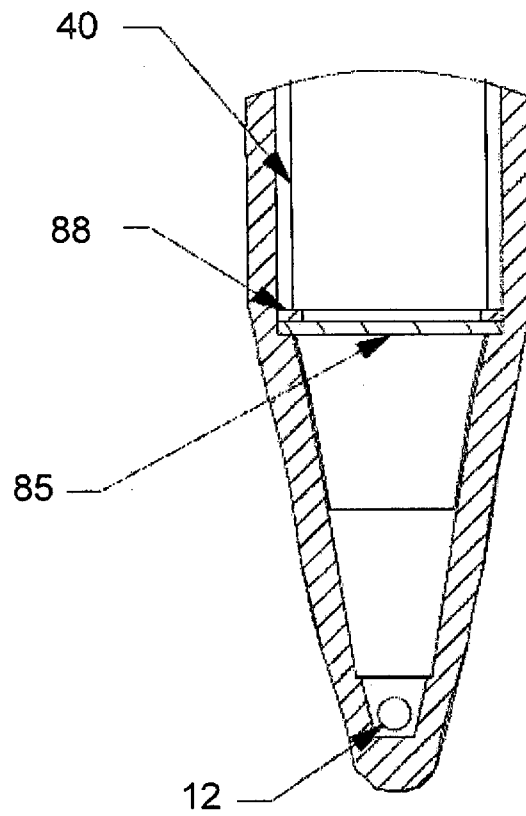


FIG. 37

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 82852906 P [0001]
- WO 9601132 A [0007]
- US 20050288622 A1 [0008]

专利名称(译)	视觉注气口		
公开(公告)号	EP2073717B1	公开(公告)日	2015-12-23
申请号	EP2007843973	申请日	2007-10-08
[标]申请(专利权)人(译)	应用医疗资源		
申请(专利权)人(译)	应用医疗资源CORPORATION		
当前申请(专利权)人(译)	应用医疗资源CORPORATION		
[标]发明人	TAYLOR SCOTT V BALSCHWEIT PAUL W ALBRECHT JEREMY J JOHNSON GARY M HILAL SAID S FALKENSTEIN ZORAN		
发明人	TAYLOR, SCOTT, V. BALSCHWEIT, PAUL, W. ALBRECHT, JEREMY, J. JOHNSON, GARY, M. HILAL, SAID, S. FALKENSTEIN, ZORAN		
IPC分类号	A61B1/015 A61B1/00 A61B1/12 A61B1/313 A61B17/34 A61M13/00 A61B19/00 A61B17/00		
CPC分类号	A61B1/0008 A61B1/00154 A61B1/015 A61B1/127 A61B1/3132 A61B17/3474 A61B90/361 A61B2017/00907 A61B2017/3441 A61B2017/3454 A61B2017/3456 A61B2017/346 A61M13/003 A61B17/3498		
优先权	60/828529 2006-10-06 US		
其他公开文献	EP2073717A2 EP2073717A4		
外部链接	Espacenet		

摘要(译)

提供了视觉吹气闭孔器。闭塞器包括密封件，阀门，筛网和/或各种其他尖端特征，以消除可破坏设置在闭塞器内的腹腔镜的视野的流体，物质和/或气体的进入。闭塞器提供额外的特征，例如镜片和防雾特征，以进一步增加镜片的可视性，有效地吹入患者，并且一旦移除视觉吹气闭孔器，最终提供进入通气腹部的进入通道。

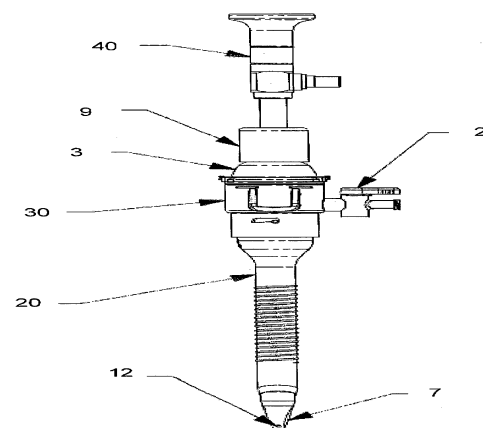


FIG. 1