

(19)



(11)

EP 2 579 790 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.12.2016 Bulletin 2016/51

(51) Int Cl.:

A61B 17/29 *(2006.01)*

(86) International application number:

PCT/US2011/038506

(21) Application number: **11725274.2**

(22) Date of filing: **31.05.2011**

(87) International publication number:

WO 2011/156168 (15.12.2011 Gazette 2011/50)

(54) SURGICAL DEVICE WITH REUSABLE HANDLE

CHIRURGISCHE VORRICHTUNG MIT WIEDERVERWENDBAREM GRIFF

DISPOSITIF CHIRURGICAL AVEC POIGNÉE RÉUTILISABLE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **CRUMLEY, Jesse**

Atlanta, GA 30312 (US)

• **LEONARD, Robert F.**

Furlong, PA 18925 (US)

(30) Priority: **10.06.2010 US 797933**

(74) Representative: **Potter Clarkson LLP**

The Belgrave Centre

Talbot Street

Nottingham NG1 5GG (GB)

(43) Date of publication of application:
17.04.2013 Bulletin 2013/16

(73) Proprietor: **CareFusion 2200 Inc.**
San Diego, CA 92130 (US)

(56) References cited:

EP-A2- 1 889 578 WO-A2-99/03405

DE-U1- 20 118 882 DE-U1- 29 708 568

US-A- 5 727 428 US-B1- 6 340 352

US-B1- 6 595 984

(72) Inventors:

• **CHEN, How-Lun**

San Diego, CA 92121 (US)

EP 2 579 790 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to medical devices, and more particularly to a reusable handle configured to manipulate a removable tool end assembly of a laparoscopic surgical device.

BACKGROUND

[0002] As depicted in FIG. 1, a typical monopolar electrosurgical laparoscopic tool device 100 generally has five main components: a handle 102, an outer shaft 104 extending longitudinally from the handle, an actuation rod 106 extending through the outer shaft, an electrode 108 in electroconductive contact with the actuation rod, and an actuatable end effector 110, disposed at the distal end of the device. The handle 102 illustrated is a "ring handle", which has a stationary finger portion 112 attached to the outer shaft 104 and an actuatable thumb portion 114 attached to the actuation rod 106. Actuation of the thumb portion 114 by pivoting relative to the finger portion 112 moves the actuation rod 106 axially within the outer shaft 104 to operate the end effector 110. Although many different variations of each of the above components have been introduced into the art, there exists a need for designs that provide efficiency in manufacturing, and that provide surgeons and other users with ergonomic features to enhance safety and ease of use. In particular, there is a need for a handle design that includes an easy-to-use locking feature that provides for secure attachment and convenient detachment of a tool end assembly.

[0003] US 5,727,428 discloses a surgical instrument comprising a pair of jaws at its distal end, a handle having first and second handle members at its proximal end, a shaft extending between the handle and the jaws and an actuating rod extending through the shaft for actuating the jaws.

[0004] DE 201 18 882 U1, which is the closest prior art to the claimed invention, discloses a surgical instrument comprising a handle having: a first handle member; and a second handle member pivotably attached to the first handle member, configured to pivot relative thereto; a body comprising: a tubular outer shaft removably attached to the first handle member; and an inner rod extending through a longitudinal lumen of the outer shaft and removably attached to the second handle member in a manner permitting reciprocal longitudinal movement relative to the outer shaft; and an engagement mechanism configured to provide a releasable connection between the handle and the body, wherein the instrument is configured such that pivoting one of the first and second handle members relative to the other longitudinally moves the inner rod relative to the outer shaft.

[0005] US 6,595,984 discloses a surgical instrument comprising a pair of jaws at its distal end, a handle having

first and second handle members at its proximal end, a sheath extending between the handle and the jaws, and an actuating rod extending through the sheath for actuating the jaws. The sheath is removably attached to the handle by means of a collet assembly comprising a collet arranged around the sheath, collet detent members which reside within radial bores provided in the collet and a collet closer. The collet closer is screwed in position over the collet to compress the collet around the sheath and press the collet detent members against a circumferentially extending groove provided around the proximal end of the sheath.

[0006] US 6,340,352 discloses an ultrasound treatment system comprising a pair of jaws at its distal end, a handle having first and second handle members at its proximal end, an elongated sheath extending between the handle and the jaws and an ultrasonic probe extending through the sheath.

BRIEF SUMMARY

[0007] The present invention provides a surgical instrument according to claim 1 and a handle for a laparoscopic surgical instrument according to claim 11.

[0008] Embodiments of the present invention are configured to address the needs in the art for ergonomic designs that present advantages in manufacture and use. Preferred embodiments of the present invention may be configured such that they may be cleaned, sterilized, and reused, or they may be disposable. The most preferred embodiments of the present invention include a tool end retention mechanism that is biased so as to engage a one-piece or two-piece tool end assembly, which can be released using a two-button component of the retention mechanism. This retention mechanism provides a secure engagement of an outer shaft and an inner actuation rod of a tool end, as well as a handle that may be reusable. In certain embodiments, reusable tool end assemblies may also be used. While embodiments of the present invention discussed herein are directed to aspects of a handle for a laparoscopic surgical device, those of skill in the art will appreciate that handle embodiments of the present invention may be used with a variety of shaft configurations and end effectors (e.g., needle holders, clamps, scissors, dissectors, graspers), and that such uses may be practiced within the scope of the present invention.

[0009] In one aspect, embodiments of a surgical device handle may include a tool end body that includes an inner actuation rod reciprocally disposed through a longitudinal lumen of an outer shaft, where the distal ends of the rod and shaft may be permanently attached or may be removably attached.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

FIG. 1 shows a prior art laparoscopic tool device;
 FIG. 2 illustrates a disassembled view of first embodiment of a laparoscopic device;
 FIG. 2A shows a longitudinal section view, taken along line 2A-2A of FIG. 2, of the tool end retention mechanism of the first handle embodiment;
 FIG. 2B is a longitudinal sectional view of a proximal portion of the tool end body shaft assembly taken along line 2B-2B of FIG. 2;
 FIG. 2C shows a detail view of a proximal end portion of the actuation rod of the device of FIG. 2;
 FIGS. 3A-3B show a section view as in FIG. 2A, illustrating a method of assembly; and
 FIG. 3C shows a distal end connection embodiment between the actuation rod and tool end shaft body;
 FIG. 4 shows a detail perspective view from FIG. 3C;
 FIG. 5A-5C show, respectively, side, top, and transverse section views of an inner shaft embodiment.

DETAILED DESCRIPTION

[0011] The exterior of a first embodiment of a laparoscopic surgical device 200 is illustrated with reference to FIGS. 2-2C. As shown in FIG. 2, which is a disassembled view of a "three-piece embodiment," the handle 210 includes a thumb ring member 204 (commonly referred to as a "thumb bow") pivotably attached at a pivot pin 208 to a finger ring member 206 (commonly referred to as a "finger bow"). The handle members 204, 206 preferably are biased away from each other by, for example, a torsion spring or leaf spring. The thumb and finger ring members 204, 206 preferably are constructed of a resin material but may alternatively be constructed of plastic or other materials known in the art to be suitable for multiple sterilizations in an autoclave. A single-use embodiment may be constructed of materials known in the art, but not necessarily configured for multiple sterilizations. The device 200 may be configured as a monopolar or bipolar instrument configured for cutting and coagulation/ electrocautery, including a Bovie post 207 or other electrode connection. A knob 212, configured to rotate about its longitudinal axis in an indexed or smooth-rotating manner (various constructions for both of which are well-known in the art), may be included at the distal end of the handle 210.

[0012] A tool end body including an elongate tubular outer shaft 240 extends distally from the finger ring member 206. An actuation rod 260 extends distally from the thumb ring member 204 through a longitudinal lumen of the shaft 240 and includes a tool tip 270 at its distal end. At the distal end of the device 200, an end effector 264 is operably connected both to the shaft 240 and the actuation rod 260. The actuation rod connection to the outer shaft 240 may be permanent, or it may be removable (e.g., with a bayonet, threaded, snap-fit, or other connection). The shaft 240 may be constructed of metallic or polymeric materials, and preferably has an electroinsulative coating when the device 200 is configured as an

electrosurgical instrument with a length that will most often be rigid, semi-rigid, or have very limited flexibility along its longitudinal axis. The shaft 240 preferably is configured for use with laparoscopy trocars for abdominal or other laparoscopic/ minimally invasive surgical techniques (e.g., standard embodiments may have an outer diameter of about 5 mm to about 10 mm). All components of preferred embodiments will be configured to maintain fluid seal conditions desirable for use during a procedure on an insufflated patient. The handle 210 may include one or more ratchet mechanisms configured to assist a user in positioning and operating the device 200. Detailed depictions of handle construction as well as examples of ratchet and other retention/ manipulation mechanisms that may be used within the scope of the present invention include those described in U.S. Pat. App. Publ. No. 2007/0299469, to Carpenter et al.

[0013] FIG. 2A is a partial longitudinal section view of the handle 210 along line 2A-2A, showing the handle portion of an engagement mechanism for releasably connecting the tool body shaft 240 to the handle 210. A central channel 211 extends through the knob 212 and the upper portion of the finger bow handle member 206. This channel 211 is configured to receive the proximal ends of the tool body outer shaft 240 and inner actuation rod 260. The thumb ring handle member 204 includes an opening 205 configured as a ball-cage that is configured to capture a proximal-end ball 262 of the actuation rod 260.

[0014] The knob 212 substantially houses the shaft-engagement and rod-engagement portions of the engagement mechanism (the ball-cage 205 of the thumb bow 204 not being considered part of the engagement mechanism for purposes of the present description, although it serves an important function in retaining/actuating the inner rod 260). The knob includes two opposing, depressible buttons 216, 222. As shown in FIG. 2A, the first button 216 is attached to and disposed opposite a two-toothed retaining member 218, which includes teeth 219 that are biased up toward the first button 216 into the channel 211. The second button 222 is attached to and disposed opposite a one-toothed retaining member 224, which includes a tooth 225 that is biased down toward the second button 222 into the channel 211. As shown, the retaining members and their teeth (which collectively may be referred to as "shutters") are permanently attached to the handle 210 and in direct mechanical communication with their respective/ corresponding buttons. Actuation of the retaining members is described below with reference to FIGS. 3A-3B. The bias for each of the retaining members is shown as being provided by coil springs, but other biasing means may be used, as known in the art.

[0015] FIG. 2B shows a longitudinal section view (taken along line 2B-2B of FIG. 2) of the proximal portion of the tool end body shaft assembly 240. In this embodiment, an inner portion 242 of the shaft 240 is metal, and an outer covering portion 244 includes an electroinsula-

tive polymer. In the embodiment shown, which is a "larger outer diameter" embodiment, the outer covering 244 is separated from the inner portion 242 of the shaft 240, but - in certain "smaller outer diameter" embodiments, the outer covering 244 may be directly in contact with and/or be constructed as an overlay of the inner shaft portion 242. A nose portion 246, configured to be received in a complementarily shaped cavity of the knob 212 is mounted near the proximal shaft end. The nose portion 246 includes a flush port 247 that provides fluid communication with a longitudinal lumen 250 extending through the length of the shaft 240. A proximal endmost portion of the shaft 240, which is configured to be received into the handle channel 211, includes at least first and second apertures that are at least partially opposed to each other. In the embodiment shown in FIGS. 2-3C, the first aperture is embodied as a pair of apertures 249 configured to align with and receive the first retaining member teeth 219. The second aperture is embodied as an aperture 255 that is disposed opposite the first aperture and is configured to align with and receive the second retaining member tooth 225.

[0016] FIG. 2C shows an external top-down view of the proximal portion of the actuation rod 260. A ball 262 or other flared structure is disposed at its proximal end, configured for capture by the upper end of the thumb-ring handle member 204. The ball 262 may include a larger outer diameter than a majority length of the rod 260 and most preferably includes a larger outer diameter than a rod portion immediately distally adjacent the ball. The inner rod 260 is configured to be slidably disposed through the shaft lumen 250. As shown, a proximal rod length may include a larger outer diameter than a majority length of the rod 260 that will facilitate flushing of the shaft lumen 250 with the rod not being removed therefrom while providing a desirable proximal seal therebetween. Pivoting actuation of the thumb bow 204 relative to the finger bow 206 will longitudinally reciprocate the inner rod 260 relative to the shaft 240. At its distal end the rod 260 includes a tool assembly 270 that is configured to be attached to the outer shaft 240. This attachment may be removable, as is described below with reference to FIG. 3C, or it may be permanent such that the shaft 240 and rod 260 may be attached/removed from the handle 210 as a single unit. Embodiments where the rod and shaft are permanently connected may be configured to have the distal rod/shaft/tool assembly disposable after a single use or configured to be cleaned and/or sterilized. Many different tool tip assemblies 270 are known in the prior art for use/ actuation with a reciprocating inner rod and an outer shaft that is relatively fixed. Tool tips may include clamps, graspers, cutting scissors, or other actuatable tool tips currently known or later-developed, while being practiced within the scope of the present invention. The inner rod 260 may be constructed as a single piece, or in multiple pieces, including that one or more portions (in addition to the proximal ball 262 may have a larger outer diameter than a majority length of the rod).

[0017] A proximal region of the rod 260 includes an elongate inner rod groove or aperture 267. The inner rod aperture 267 is shown as generally obround, but may have varied internal geometry including that it may be embodied as a pair of opposing grooves that do not go all the way through the rod (not shown, but easily able to be understood by those of skill in the art as including a longitudinal wall between the opposed faces of the aperture 267). It is configured to receive the ends of the first and/or second retaining member teeth 219, 225. When the teeth 219, 225 are engaged with the inner rod aperture 267, they will allow it to reciprocate longitudinally, but will generally prevent the rod 260 from rotating about its longitudinal axis. As such, when the teeth 219, 225 are engaged through the outer shaft apertures 249, 255 into the inner rod aperture 267, they (the teeth) will: (i) generally maintain the outer shaft 240 in a fixed longitudinal and rotational position relative to the handle 210; and (ii) generally maintain the inner rod 260 in a fixed rotational position relative to the outer shaft 240 and handle 210 while permitting it to reciprocate longitudinally relative to the handle 210 and outer shaft 240 upon pivoting actuation of the thumb bow 204 relative to the finger bow 206. This structure and its related functionality are described below with reference to a method of assembling the device 200.

[0018] In most embodiments, the thumb bow 204 will be rotatable relative to the finger bow 206 in only a single plane. However, handle constructions are known in the art, where out-of-plane rotation maybe used. Preferred embodiments of the device 200 will include insulative material over all handle and other proximal-region surfaces that are likely to conduct current when the device is configured as an electrosurgical device and attached to an electrosurgical power supply. As shown in FIG. 3B, discussed below, in embodiments where a nose portion is used, it is permanently fixed to the outer shaft and will prevent the outer shaft from rotating relative to the engagement mechanism (whether that engagement mechanism is disposed in an indexing knob, as shown, or disposed in a fixed portion of the handle assembly 210).

[0019] A method of assembling the device 200 of FIGS. 2-2C is described with reference to FIGS. 3A-3C. In FIG. 3A, the thumb bow 204 is over-rotated up and away from the finger bow 206. This orientation exposes a top end opening of the ball-cage 205 in line with the proximal end of the longitudinal handle channel 211. The inner rod 260 is disposed through the shaft lumen 250 and longitudinally directed into the handle channel 211. The first and second buttons 216, 222 are depressed in toward the central longitudinal axis of the engagement mechanism in the indexing knob 212. This actuation of the first button 216 pushes the teeth 219 of the two-toothed retaining member 218 down and out of the handle channel 211. Likewise, this actuation of the second button 222 pushes the tooth 225 of the second retaining member 224 up and out of the handle channel 211.

[0020] With the retaining teeth 219, 225 held out of the

way, the handle channel 211 allows the inner rod 260 and outer shaft 240 to be advanced proximally thereinto until the proximal ball 262 of the rod enters and is captured by the ball-cage 205. As shown in FIG. 3A, one or more of the teeth 219, 225 may have an angled, cambered, or rounded distal surface such that the rod 260 and/or shaft 240 can more readily approach, dislodge, and pass the teeth, even if the buttons 216, 222 are not initially fully depressed. The thumb bow 204 can be released and directed/pivoted down toward the finger bow 206, fully capturing the ball 262 in the ball-cage 205, which has a key-hole cross section such that a broader proximal portion engages the ball 262 while a narrower distal portion prevents the ball from being released distally when the thumb bow 204 is rotated down as shown in FIG. 3B. The ball-cage 205 preferably will not interfere with actuation of the handle members nor of rotation of the inner rod 260 about its longitudinal axis. The elongate inner rod aperture 267 is visible in FIG. 3A, with the rod 260 and outer shaft 240 being shown about 90 degrees out of the rotational position that will allow the retaining teeth 219, 225 to engage that inner rod aperture 267 through the outer shaft apertures 249, 255.

[0021] FIG. 3B shows the tool body assembly including the outer shaft 240 and inner rod 260 as being fully advanced proximally. The shaft 240 and rod 260 have been rotated and the buttons 216, 222 have been released so that: (i) the shaft apertures 249, 255 are aligned with the inner rod aperture 267; (ii) the retaining teeth 219, 225 are extended into their respective biased positions to engage the inner rod aperture 267 through the outer shaft apertures 249, 255; and (iii) the nose portion 246 is aligned and engaged with the indexing knob 212. As shown in this engaged configuration/ position, the inner rod 260 will reciprocate longitudinally relative to the outer shaft 240 and finger bow 206, which are longitudinally fixed relative to each other. In embodiments where the indexing knob 212 is rotatable, the knob 212, outer shaft 240, and inner rod 260 can rotate relative to the handle 210 about their mutual longitudinal axis.

[0022] FIG. 3C shows one connection construction for embodiments of the device 200 wherein the inner rod 260 is removable from the outer shaft 240 rather than being permanently distally attached thereto. The tool tip 270 is shown as a grasper assembly, but may be constructed as cutting scissors, biopsy forceps, or any number of other laparoscopy-type tool tips. The proximal base 272 of the tool tip body is generally cylindrical and includes a bayonet groove having a longitudinal groove portion 274 and a radial groove portion 275. The inner rod 260 is axially movable relative to the base 272. FIG. 3C also shows the distal end of the outer shaft 240, which includes a distal opening 257 configured to snugly receive the tip base 272. A groove-engaging pin 258 extends radially into the opening 257. FIG. 4 shows a perspective detail view of FIG. 3C.

[0023] When the actuation rod 260 is directed into the shaft lumen 250, the groove engaging pin 258 can be

guided to the distal end of the longitudinal bayonet groove portion 274, then the tool tip can be rotated to engage the pin 258 to the end of the radial groove portion 275. The bayonet mechanism including the pin and groove preferably is constructed such that when the pin 258 is fully engaged at the end of the groove 275, the rotational position of the inner rod 260 aligns its proximal aperture 267 with the outer shaft apertures 249, 255. It should be appreciated that one, two or more bayonet pins and grooves may be used in various embodiments. In other embodiments, a threaded connection including a Luer-like connection requiring only a fractional turn for engagement (e.g., quarter-turn) or traditional multi-twist threading, snap-fit, reverse-bayonet, and/or other connection structures may be used to effect a connection between the distal ends of the shaft 240 and rod 260, without departing from the scope of the present invention. Whether or not the rod and shaft are engaged with a handle, it is preferable that a distal connection of the outer shaft is configured to engage the distal regions of the inner rod and the outer shaft when the inner shaft aperture is rotationally aligned with at least one of the outer rod apertures.

[0024] FIGS. 5A-5C show another embodiment of an inner actuation rod 560. It includes a proximal-end ball 562 with a region 563 immediately distally adjacent the ball 562 that has a smaller outer diameter than the next adjacent portion of the rod 560, and that transitions thereto with a circumferential face oriented at about a 45-degree angle relative to a longitudinal central axis of the rod 560. Rather than the aperture 267 discussed above with reference to an inner rod embodiment 260, this embodiment includes a narrowed rod portion 567 having a generally transverse rectangular cross-sectional geometry as shown in FIG. 5C (which is a section view of FIG. 5A taken along line 5C-5C).

[0025] It will be appreciated that this rod embodiment may be used in conjunction with a handle such as the handle 210 described above. In such an application, the teeth 219, 225 may engage the faces 567a, 567b of the narrowed portion 567 (when oriented relatively horizontal as shown in FIG. 5A), or they may be modified to include generally vertical longitudinal grooves (not shown) configured to be engaged with/about the narrowed rod portion 567 (in an embodiment where the flat portion is oriented relatively vertical as shown in FIG. 5B; of course, the distal end in each of FIGS. 5A-5B may be configured differently to appropriately engage a tool tip/ end effector as is well-known in the art).

[0026] Those of skill in the art will appreciate that there are known means for controlling the relative position/bias of the ratchet members disclosed above that are appropriate for use within the scope of the present invention, and that different materials may be useful in embodiments of the present invention. Those of skill in the art will also appreciate that, for handle embodiments of the present invention, the thumb ring member and/or the finger ring member may not actually require a closed ring

structure, but may include an open ring or other-shaped support structure for a user's thumb and fingers, respectively. It is intended that the foregoing detailed description be regarded as illustrative rather than limiting.

[0027] Those of skill in the art will appreciate that embodiments not expressly illustrated herein may be practiced within the scope of the present invention, including that features described herein for different embodiments may be combined with each other. It is therefore intended that the foregoing detailed description be regarded as illustrative rather than limiting. Furthermore, the advantages described above are not necessarily the only advantages of the invention, and it is not necessarily expected that all of the described advantages will be achieved with every embodiment of the invention as defined by the appended claims.

Claims

1. A surgical instrument (200), comprising:

a handle (210) comprising:

a first handle member (206); and
a second handle member (204) pivotably attached to the first handle member (206), configured to pivot relative thereto;

a body comprising: a tubular outer shaft (240) removably attached to the first handle member (206); an inner rod (260) extending through a longitudinal lumen (250) of the outer shaft (240) and removably attached to the second handle member (204) in a manner permitting reciprocal longitudinal movement relative to the outer shaft (240); and an engagement mechanism configured to provide a releasable connection between the handle (210) and the body, comprising:

at least a first outer shaft aperture (249) and a second outer shaft aperture (255), which are at least partially opposed to each other and are disposed through a proximal region of the outer shaft (240);

a first retaining member (218) permanently actuatably attached to the first handle member (206) and biased into a releasable engagement with the at least a first outer shaft aperture (249); and

a second retaining member (224) permanently actuatably attached to the first handle member (206), at least partially opposed to the first retaining member (218), and biased into a releasable engagement with the at least a second outer shaft aperture (255);

wherein the instrument (200) is configured such that pivoting one of the first and second handle members (206, 204) relative to the other longitudinally moves the inner rod (260) relative to the outer shaft (240).

2. The surgical instrument of claim 1, wherein the inner rod (260) further comprises a proximal inner rod aperture (267) that is configured to align with the at least one of the outer shaft apertures (249, 255) and to receive at least one of the first and second retaining members (218, 224) while allowing the inner rod (260) to move longitudinally relative to the outer shaft (240) when the handle (210) is actuated by pivoting one of the handle members (204, 206) relative to the other.

3. The surgical instrument according to claim 2, wherein the inner rod (260) further comprises a distal connection with the outer shaft (240) configured to engage the inner rod (260) to the outer shaft (240) when the inner rod aperture (267) is rotationally aligned with at least one of the outer shaft apertures (249, 255).

4. The surgical instrument according to any one of the preceding claims, wherein the handle (210) further comprises an indexing knob (212) configured to rotate the body about its longitudinal axis, and wherein, when the instrument is assembled, the indexing knob (212) substantially houses the engagement mechanism.

5. The surgical instrument according to any one of the preceding claims, wherein the first and second retaining members (218, 224) are operatively associated with first and second buttons (216, 222), respectively, wherein actuation of each of said buttons (216, 222) is configured to oppose the bias of its corresponding retaining member (218, 224) and move it out of an engagement with a corresponding outer shaft aperture (249, 255).

6. The surgical instrument according to any one of claims 1 to 4, further comprising a first button (216) in direct mechanical communication with the first retaining member (218) and configured so that actuation of the first button (216) opposes the bias of the first retaining member (218) and moves it out of an engagement with the first outer shaft aperture (249).

7. The surgical instrument of claim 6, further comprising a second button (222) in direct mechanical communication with the second retaining member (224) and configured so that actuation of the second button (222) opposes the bias of the second retaining member (224) and moves it out of an engagement with the second outer shaft aperture (255).

8. The surgical instrument according to any one of the preceding claims, further comprising a tool tip (270) attached to a distal portion of the outer shaft (240) and to the inner rod (260).

9. The surgical instrument of claim 8, wherein the attachment of the tool tip (270) to the outer shaft (240) is removable.

10. The surgical instrument according to any one of the preceding claims, wherein a proximal end (262) of the inner rod (260) includes a greater outer diameter than a majority length of the inner rod (260).

11. A handle for a laparoscopic surgical instrument (200), the handle comprising:

a first handle member (206);

a second handle member (204) pivotably attached to the first handle member (206), configured to pivot relative thereto along a single plane; and

an engagement mechanism configured to provide a releasable connection between the first handle member (206) and a shaft body (240) having a first outer shaft aperture (249), the engagement mechanism comprising:

a body-receiving channel (211) configured to longitudinally receive a proximal end of the shaft body (240);

a first retaining member (218) permanently actuatably attached to the first handle member (206) and biased to extend at least partially into the body-receiving channel (211); a second retaining member (224) permanently actuatably attached to the first handle member (206), at least partially opposed to the first retaining member (218), and biased to extend at least partially into the body-receiving channel (211); and

a first button (216) in direct mechanical communication with the first retaining member (218) and configured so that actuation of the first button (216) opposes the bias of the first retaining member (218) to move it out of an engagement with the first outer shaft aperture (249),

wherein the second handle member (204) includes an opening (205) configured to capture and retain a proximal end (262) of an actuation rod (260).

12. The handle of claim 11, wherein the first handle member (206) comprises an indexing knob (212) configured to rotate relative thereto about a longitudinal axis of the body-receiving channel (211) and wherein the engagement mechanism is comprised

by the indexing knob (212).

13. The surgical instrument of claim 11, further comprising an inner actuation rod (260) removably attached at a proximal rod end to the second handle member (204).

14. The surgical instrument of claim 13, wherein a distal end of the actuation rod (260) comprises a surgical tool tip (270) and further comprising an outer shaft (240) removably attached at a proximal shaft end to the first handle member (206).

15. The surgical instrument of claim 14, wherein a distal end of the outer shaft (240) is removably attached or is permanently attached to the tool tip (270).

Patentansprüche

1. Chirurgisches Instrument (200), Folgendes umfassend:

einen Griff (210), Folgendes umfassend:

ein erstes Griffelement (206); und
ein zweites Griffelement (204), schwenkbar an dem ersten Griffelement (206) befestigt und konfiguriert, um darauf bezogen zu schwenken;

einen Körper, Folgendes umfassend:

einen röhrenförmigen äußeren Schaft (240), der abnehmbar an dem ersten Griffelement (206) befestigt ist;
einen inneren Stab (260), der sich durch ein längs verlaufendes Lumen (250) des äußeren Schafts (240) erstreckt und abnehmbar an dem zweiten Griffelement (204) auf eine Weise befestigt ist, die eine Hin- und Herbewegung in Längsrichtung bezogen auf den äußeren Schaft (240) ermöglicht; und

einen Eingriffmechanismus, konfiguriert, eine lösbare Verbindung zwischen dem Griff (210) und dem Körper bereitzustellen, Folgendes umfassend:

wenigstens eine erste Öffnung (249) des äußeren Schafts und eine zweite Öffnung (255) des äußeren Schafts, die einander wenigstens teilweise gegenüberliegen und durch einen proximalen Bereich des äußeren Schafts (240) hindurch angeordnet sind;
ein erstes Halteelement (218), permanent auslösbar an dem ersten Griffele-

ment (206) befestigt und in einen lös-
baren Eingriff mit der wenigstens einen
ersten Öffnung (249) des äußeren
Schafts vorgespannt; und
ein zweites Halteelement (224), per-
manent auslösbar an dem ersten Griff-
element (206) befestigt, wenigstens
teilweise dem ersten Halteelement
(218) gegenüberliegend und in einen
lösbaren Eingriff mit der wenigstens ei-
nen zweiten Öffnung (255) des äuße-
ren Schafts vorgespannt;

wobei das Instrument (200) derart konfiguriert ist,
dass ein Schwenken eines aus dem ersten und dem
zweiten Griffelement (206, 204) mit Bezug auf das
andere den inneren Stab (260) mit Bezug auf den
äußeren Schaft (240) in Längsrichtung bewegt.

2. Chirurgisches Instrument nach Anspruch 1, wobei
der innere Stab (260) ferner eine proximale Öffnung
(267) des inneren Stabs umfasst, die konfiguriert ist,
an wenigstens einer der Öffnungen (249, 255) des
äußeren Schafts ausgerichtet zu sein und das erste
und/oder das zweite Halteelement (218, 224) aufzu-
nehmen und gleichzeitig zu ermöglichen, dass der
innere Stab (260) sich bezogen auf den äußeren
Schaft (240) in Längsrichtung bewegt, wenn der Griff
(210) betätigt wird, indem eines der Griffelemente
(204, 206) bezogen auf das andere geschwenkt
wird.
3. Chirurgisches Instrument nach Anspruch 2, wobei
der innere Stab (260) ferner eine distale Verbindung
mit dem äußeren Schaft (240) umfasst, konfiguriert,
den inneren Stab (260) mit dem äußeren Schaft
(240) in Eingriff zu bringen, wenn die Öffnung (267)
des inneren Stabs in der Drehung an wenigstens
einer der Öffnungen (249, 255) des äußeren Schafts
ausgerichtet ist.
4. Chirurgisches Instrument nach einem der vorherge-
henden Ansprüche, wobei der Griff (210) ferner ei-
nen Anzeigeknopf (212) umfasst, konfiguriert, den
Körper um dessen Längsachse zu drehen, und wo-
bei, wenn das Instrument zusammengesetzt ist, der
Anzeigeknopf (212) im Wesentlichen den Eingriff-
mechanismus aufnimmt.
5. Chirurgisches Instrument nach einem der vorherge-
henden Ansprüche, wobei das erste und das zweite
Halteelement (218, 224) mit einem ersten bezie-
hungsweise einem zweiten Knopf (216, 222) wirk-
verbunden sind, wobei ein Betätigen jedes der Knöp-
fe (216, 222) konfiguriert ist, der Vorspannung des
jeweiligen Halteelements (218, 224) entgegenzuwir-
ken und dieses aus einem Eingriff mit einer jewei-
ligen Öffnung (249, 255) im äußeren Schaft heraus-

zubewegen.

6. Chirurgisches Instrument nach einem der Ansprü-
che 1 bis 4, ferner umfassend einen ersten Knopf
(216) in direkter mechanischer Verbindung mit dem
ersten Halteelement (218) und derart konfiguriert,
dass ein Betätigen des ersten Knopfs (216) der Vor-
spannung des ersten Halteelements (218) entge-
genwirkt und es dieses aus einem Eingriff mit der
ersten Öffnung (249) des äußeren Schafts heraus-
bewegt.
7. Chirurgisches Instrument nach Anspruch 6, ferner
umfassend einen zweiten Knopf (222) in direkter me-
chanischer Verbindung mit dem zweiten Halteele-
ment (224) und derart konfiguriert, dass ein Betäti-
gen des zweiten Knopfs (222) der Vorspannung des
zweiten Halteelements (224) entgegenwirkt und es
dieses aus einem Eingriff mit der zweiten Öffnung
(255) des äußeren Schafts herausbewegt.
8. Chirurgisches Instrument nach einem der vorherge-
henden Ansprüche, ferner umfassend eine Werk-
zeugspitze (270), die an einem distalen Abschnitt
des äußeren Schafts (240) und an dem inneren Stab
(260) befestigt ist.
9. Chirurgisches Instrument nach Anspruch 8, wobei
die Befestigung der Werkzeugspitze (270) an dem
äußeren Schaft (240) abnehmbar ist.
10. Chirurgisches Instrument nach einem der vorherge-
henden Ansprüche, wobei ein proximales Ende
(262) des inneren Stabs (260) einen größeren Au-
ßendurchmesser aufweist, als ein Großteil der Län-
ge des inneren Stabs (260).
11. Griff für ein laparoskopisches chirurgisches Instru-
ment (200), wobei der Griff Folgendes umfasst:

ein erstes Griffelement (206);
ein zweites Griffelement (204), schwenkbar an
dem ersten Griffelement (206) befestigt und
konfiguriert, um darauf bezogen in einer einzi-
gen Ebene zu schwenken; und
einen Eingriffmechanismus, konfiguriert, eine
lösbare Verbindung zwischen dem ersten Griff-
element (206) und einem Schaftkörper (240) mit
einer ersten Öffnung (249) des äußeren Schafts
bereitzustellen, wobei der Eingriffmechanismus
Folgendes umfasst:

einen Körperaufnahmekanal (211), konfi-
guriert, ein proximales Ende des Schaftkör-
pers (240) in Längsrichtung aufzunehmen;
ein erstes Halteelement (218), permanent
auslösbar an dem ersten Griffelement (206)
befestigt und vorgespannt, um sich wenig-

tens teilweise in den Körperaufnahmekanal (211) zu erstrecken;
 ein zweites Halteelement (224), permanent auslösbar an dem ersten Griffelement (206) befestigt, wenigstens teilweise dem ersten Halteelement (218) gegenüberliegend und vorgespannt, um sich wenigstens teilweise in den Körperaufnahmekanal (211) zu erstrecken; und
 einen ersten Knopf (216) in direkter mechanischer Verbindung mit dem ersten Halteelement (218) und derart konfiguriert, dass ein Betätigen des ersten Knopfs (216) der Vorspannung des ersten Halteelements (218) entgegenwirkt, um dieses aus einem Eingriff mit der ersten Öffnung (249) des äußeren Schafts herauszubewegen,

wobei das zweite Griffelement (204) eine Öffnung (205) enthält, die konfiguriert ist, ein proximales Ende (262) eines Betätigungsstabs (260) zu erfassen und zu halten.

12. Griff nach Anspruch 11, wobei das erste Griffelement (206) einen Anzeigeknopf (212) umfasst, konfiguriert, sich darauf bezogen um eine Längsachse des Körperaufnahmekanals (211) zu drehen und wobei der Eingriffmechanismus in dem Anzeigeknopf (212) aufgenommen ist.

13. Chirurgisches Instrument nach Anspruch 11, ferner umfassend einen inneren Betätigungsstab (260), der abnehmbar an einem proximalen Stabende an dem zweiten Griffelement (204) befestigt ist.

14. Chirurgisches Instrument nach Anspruch 13, wobei ein distales Ende des Betätigungsstabs (260) eine chirurgische Werkzeugspitze (270) umfasst, ferner umfassend einen äußeren Schaft (240), der abnehmbar an einem proximalen Schaftende an dem ersten Griffelement (206) befestigt ist.

15. Chirurgisches Instrument nach Anspruch 14, wobei ein distales Ende des äußeren Schafts (240) abnehmbar oder permanent an der Werkzeugspitze (270) befestigt ist.

Revendications

1. Instrument chirurgical (200), comprenant :

une poignée (210) comprenant :

un premier élément de poignée (206) ; et
 un second élément de poignée (204) fixé de façon pivotante au premier élément de poignée (206), configuré pour pivoter par

rapport à celui-ci ;

un corps comprenant :

un arbre externe (240) tubulaire fixé de façon amovible au premier élément de poignée (206) ;
 une tige intérieure (260) s'étendant à travers une lumière longitudinale (250) de l'arbre externe (240) et fixée de façon amovible au second élément de poignée (204) d'une manière permettant un mouvement longitudinal en va-et-vient par rapport à l'arbre externe (240) ; et

un mécanisme d'enclenchement configuré pour fournir un raccordement libérable entre la poignée (210) et le corps, comprenant :

au moins un premier orifice d'arbre externe (249) et un second orifice d'arbre externe (255), qui sont au moins partiellement opposés l'un à l'autre et sont disposés à travers une région proximale de l'arbre externe (240) ;
 un premier élément de retenue (218) fixé de façon actionnable permanente au premier élément de poignée (206) et sollicité dans un enclenchement libérable avec l'au moins un premier orifice d'arbre externe (249) ; et
 un second élément de retenue (224) fixé de façon actionnable permanente au premier élément de poignée (206), au moins partiellement opposé au premier élément de retenue (218), et sollicité dans un enclenchement libérable avec l'au moins un second orifice d'arbre externe (255) ;

dans lequel l'instrument (200) est configuré pour qu'un pivotement de l'un des premier et second éléments de poignée (206, 204) par rapport à l'autre déplace longitudinalement la tige intérieure (260) par rapport à l'arbre externe (240).

2. Instrument chirurgical selon la revendication 1, dans lequel la tige intérieure (260) comprend en outre un orifice proximal de tige intérieure (267) qui est configuré pour s'aligner avec l'au moins un des orifices d'arbre externe (249, 255) et pour recevoir au moins l'un des premier et second éléments de retenue (218, 224) tout en permettant à la tige intérieure (260) de se déplacer longitudinalement par rapport à l'arbre externe (240) lorsque la poignée (210) est actionnée en pivotant l'un des éléments de poignée (204, 206) par rapport à l'autre.

3. Instrument chirurgical selon la revendication 2, dans

- lequel la tige intérieure (260) comprend en outre un raccordement distal avec l'arbre externe (240) configuré pour enclencher la tige intérieure (260) avec l'arbre externe (240) lorsque l'orifice de tige intérieure (267) est aligné de façon rotative avec au moins l'un des orifices d'arbre externe (249, 255).
4. Instrument chirurgical selon l'une quelconque des revendications précédentes, dans lequel la poignée (210) comprend en outre une molette d'indexation (212) configurée pour faire tourner le corps autour de son axe longitudinal, et dans lequel, lorsque l'instrument est assemblé, la molette d'indexation (212) loge sensiblement le mécanisme d'enclenchement.
5. Instrument chirurgical selon l'une quelconque des revendications précédentes, dans lequel les premier et second éléments de retenue (218, 224) sont associés opérationnellement avec des premier et second boutons (216, 222), respectivement, dans lequel un actionnement de chacun desdits boutons (216, 222) est configuré pour s'opposer à la sollicitation de son élément de retenue (218, 224) correspondant et le retirer d'un enclenchement avec un orifice d'arbre externe (249, 255) correspondant.
6. Instrument chirurgical selon l'une quelconque des revendications 1 à 4, comprenant en outre un premier bouton (216) en communication mécanique directe avec le premier élément de retenue (218) et configuré pour qu'un actionnement du premier bouton (216) s'oppose à la sollicitation du premier élément de retenue (218) et le retire d'un enclenchement avec le premier orifice d'arbre externe (249).
7. Instrument chirurgical selon la revendication 6, comprenant en outre un second bouton (222) en communication mécanique directe avec le second élément de retenue (224) et configuré pour qu'un actionnement du second bouton (222) s'oppose à la sollicitation du second élément de retenue (224) et le retire d'un enclenchement avec le second orifice d'arbre externe (255).
8. Instrument chirurgical selon l'une quelconque des revendications précédentes, comprenant en outre un embout d'outil (270) fixé à une partie distale de l'arbre externe (240) et à la tige intérieure (260).
9. Instrument chirurgical selon la revendication 8, dans lequel la fixation de l'embout d'outil (270) à l'arbre externe (240) est amovible.
10. Instrument chirurgical selon l'une quelconque des revendications précédentes, dans lequel une extrémité proximale (262) de la tige intérieure (260) inclut un plus grand diamètre externe qu'une longueur principale de la tige intérieure (260).
11. Poignée pour un instrument chirurgical laparoscopique (200), la poignée comprenant :
- un premier élément de poignée (206) ;
 - un second élément de poignée (204) fixé de façon pivotante au premier élément de poignée (206), configuré pour pivoter par rapport à celui-ci le long d'un seul plan ; et
 - un mécanisme d'enclenchement configuré pour fournir un raccordement libérable entre le premier élément de poignée (206) et un corps d'arbre (240) ayant un premier orifice d'arbre externe (249), le mécanisme d'enclenchement comprenant :
 - un canal de réception de corps (211) configuré pour recevoir longitudinalement une extrémité proximale du corps d'arbre (240) ;
 - un premier élément de retenue (218) fixé de façon actionnable permanente au premier élément de poignée (206) et sollicité pour s'étendre au moins partiellement dans le canal de réception de corps (211) ;
 - un second élément de retenue (224) fixé de façon actionnable permanente au premier élément de poignée (206), opposé au moins partiellement au premier élément de retenue (218), et sollicité pour s'étendre au moins partiellement dans le canal de réception de corps (211) ; et
 - un premier bouton (216) en communication mécanique directe avec le premier élément de retenue (218) et configuré pour qu'un actionnement du premier bouton (216) s'oppose à la sollicitation du premier élément de retenue (218) pour le retirer d'un enclenchement avec le premier orifice d'arbre externe (249),
- dans laquelle le second élément de poignée (204) comporte une ouverture (205) configurée pour capturer et retenir une extrémité proximale (262) d'une tige d'actionnement (260).
12. Poignée selon la revendication 11, dans laquelle le premier élément de poignée (206) comprend une molette d'indexation (212) configurée pour tourner par rapport à celui-ci autour d'un axe longitudinal du canal de réception de corps (211) et dans laquelle le mécanisme d'enclenchement est composé de la molette d'indexation (212).
13. Instrument chirurgical selon la revendication 11, comprenant en outre une tige d'actionnement intérieure (260) fixée de façon amovible au niveau d'une extrémité de tige proximale au second élément de poignée (204).

14. Instrument chirurgical selon la revendication 13, dans lequel une extrémité distale de la tige d'actionnement (260) comprend un embout d'outil chirurgical (270) et comprenant en outre un arbre externe (240) fixé de façon amovible au niveau d'une extrémité d'arbre proximale au premier élément de poignée (206). 5
15. Instrument chirurgical selon la revendication 14, dans lequel une extrémité distale de l'arbre externe (240) est fixée de façon amovible ou est fixée de façon permanente à l'embout d'outil (270). 10

15

20

25

30

35

40

45

50

55

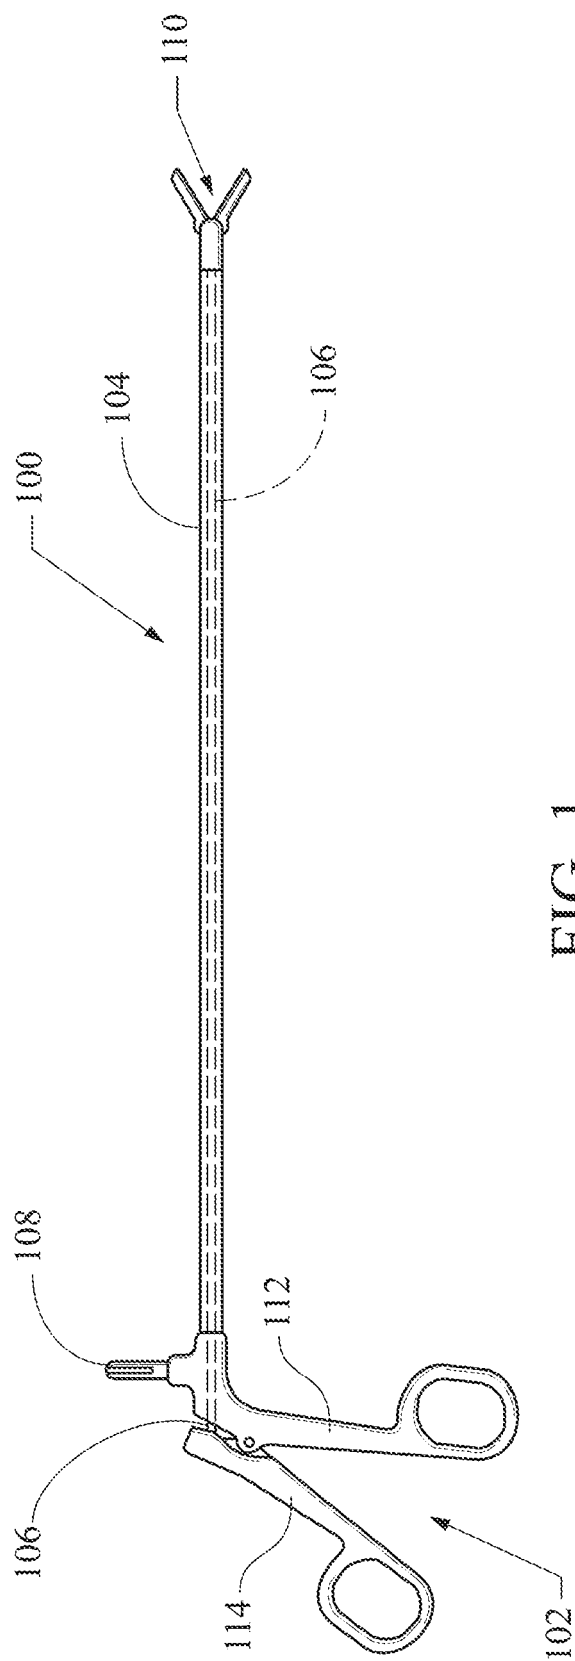


FIG. 1
(PRIOR ART)

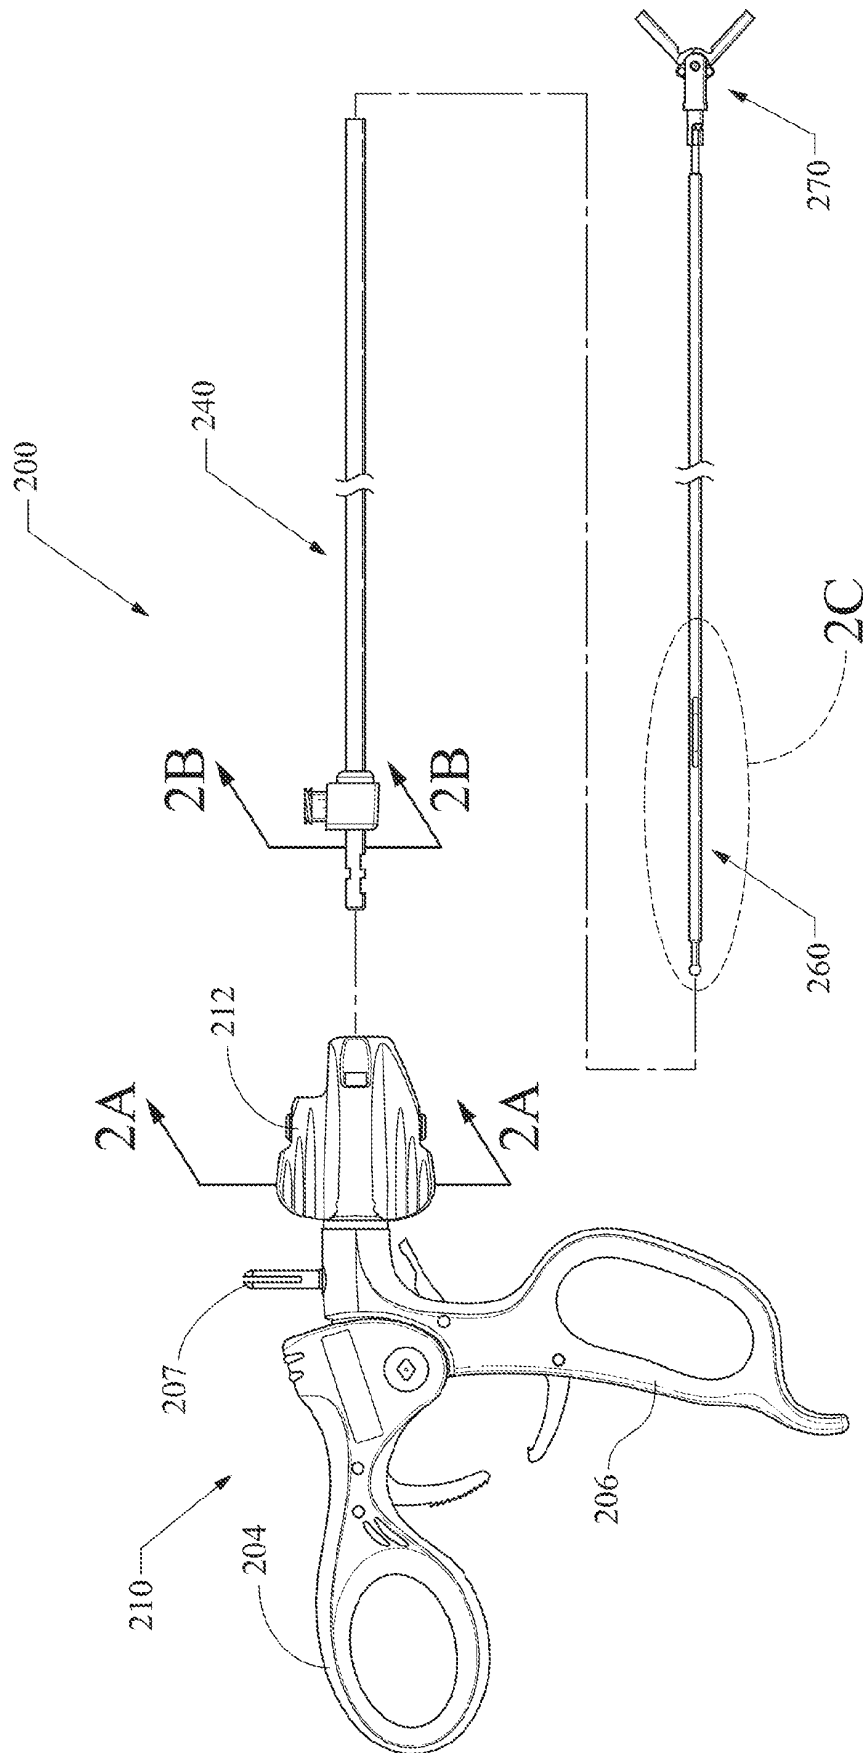
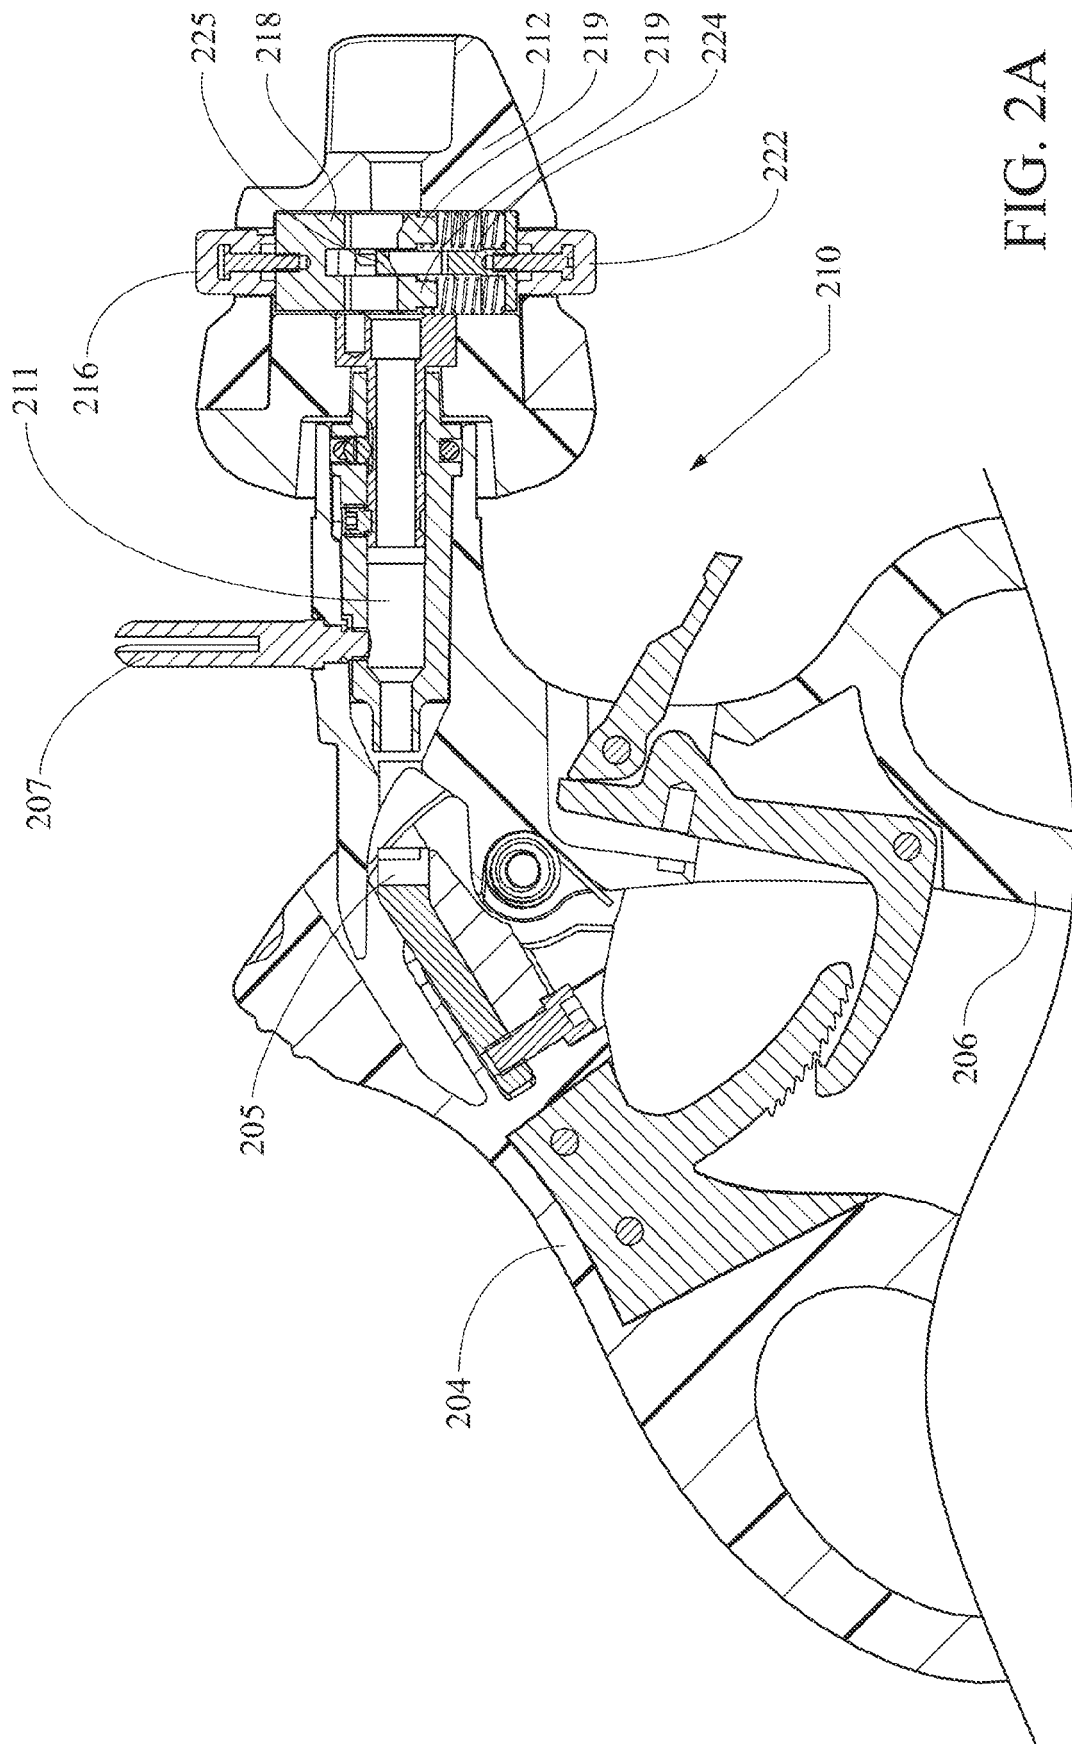


FIG. 2



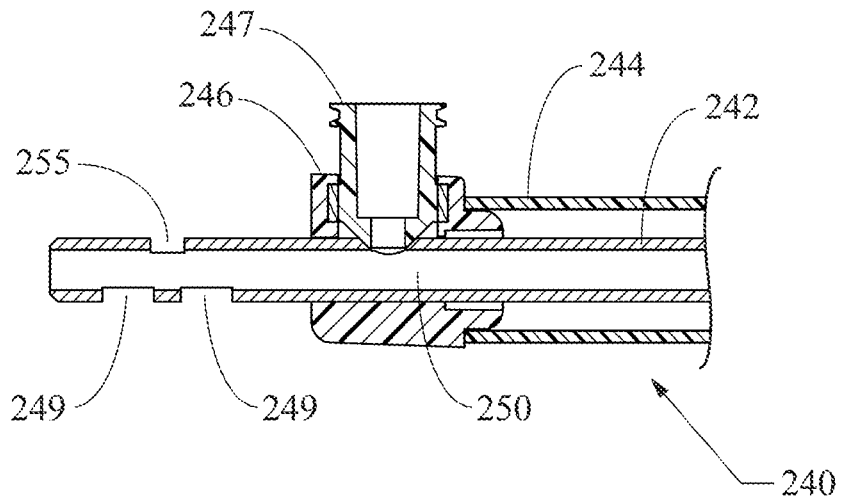


FIG. 2B

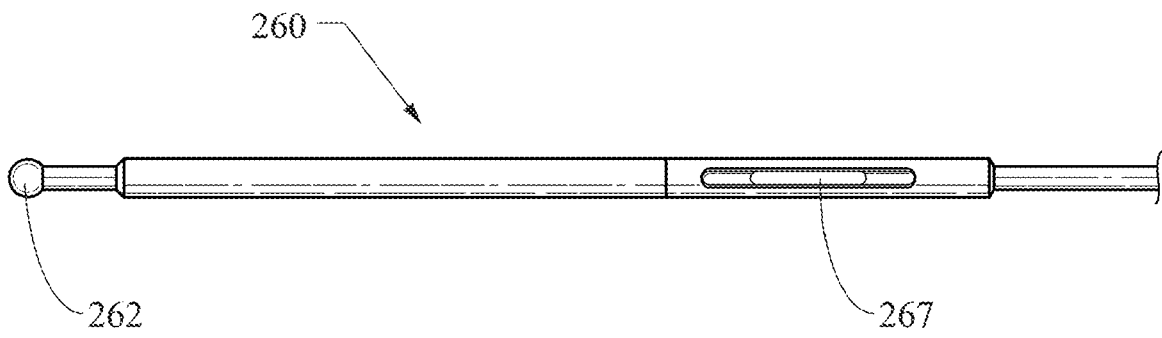


FIG. 2C



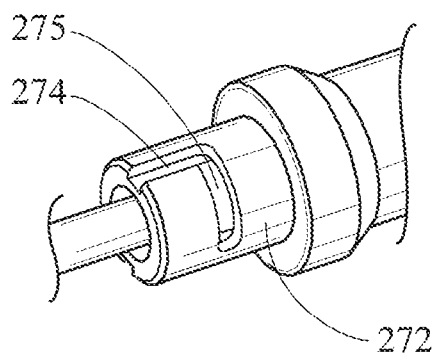


FIG. 4

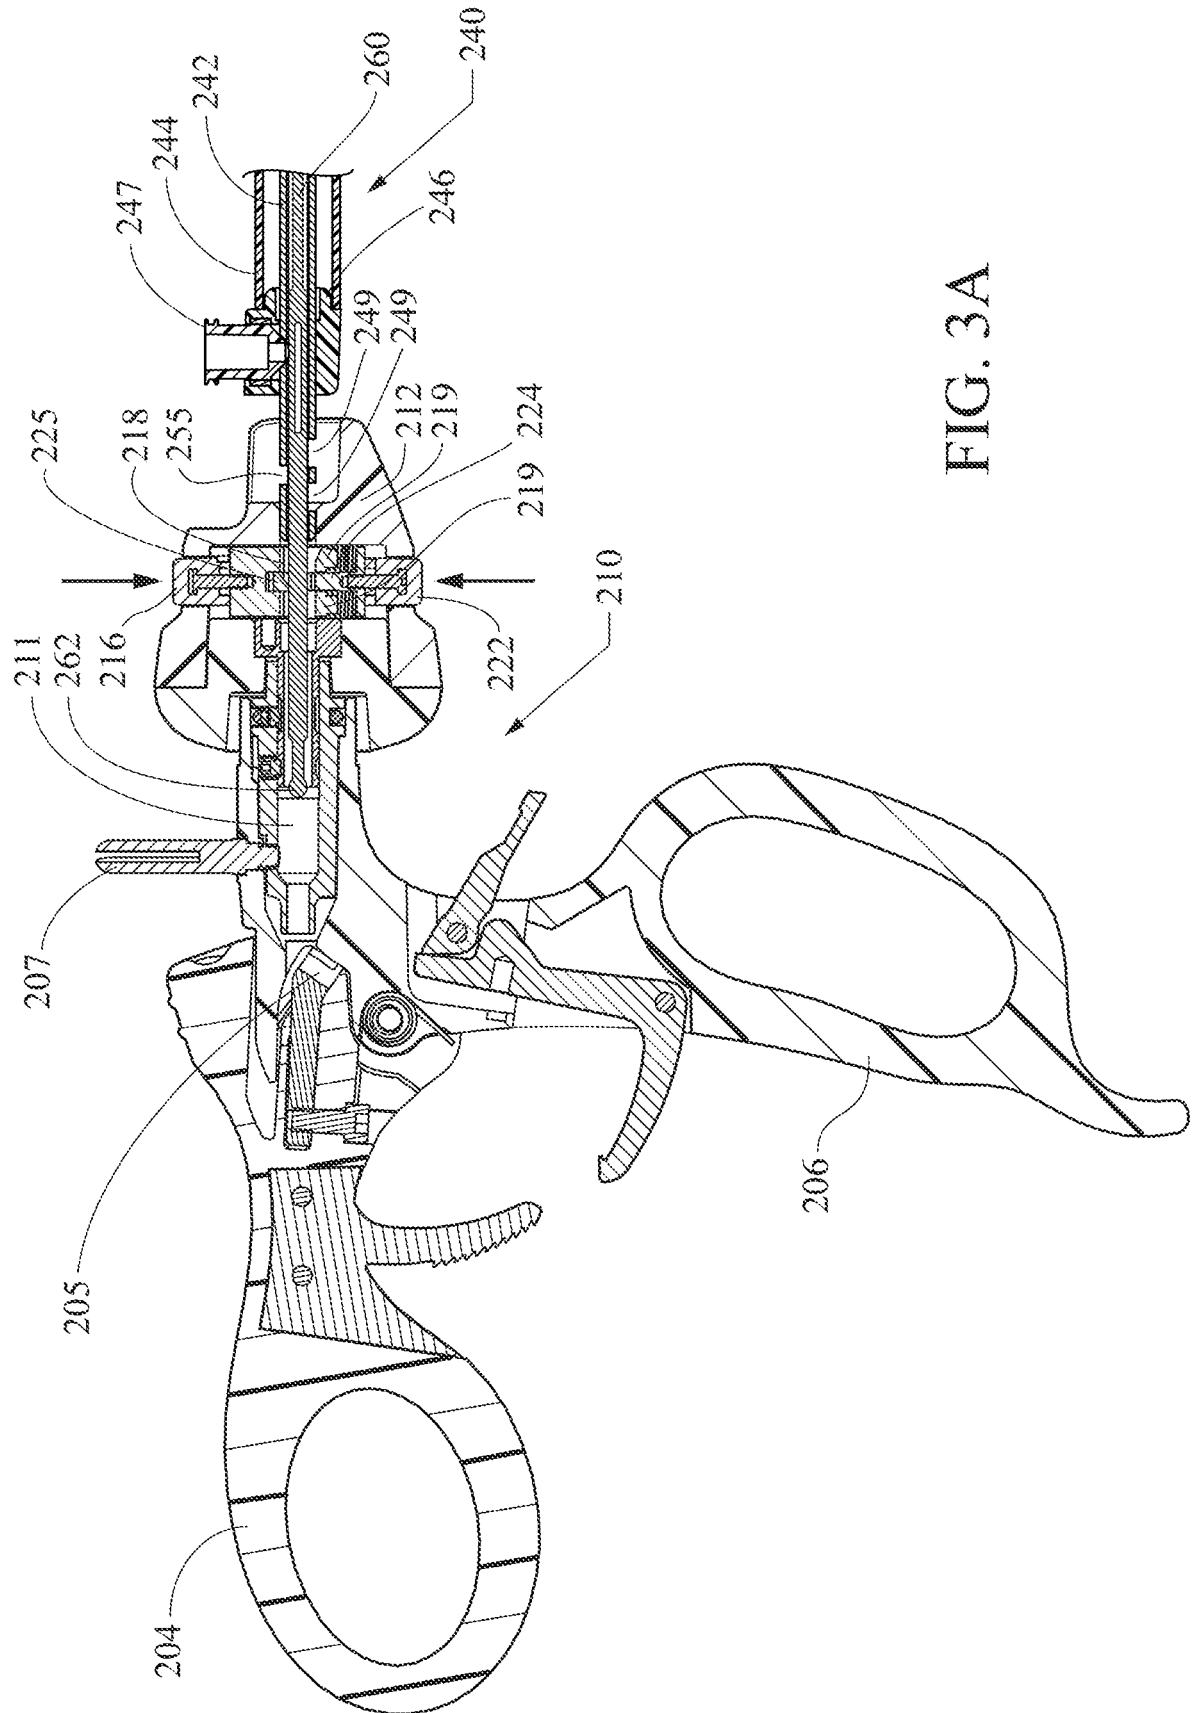

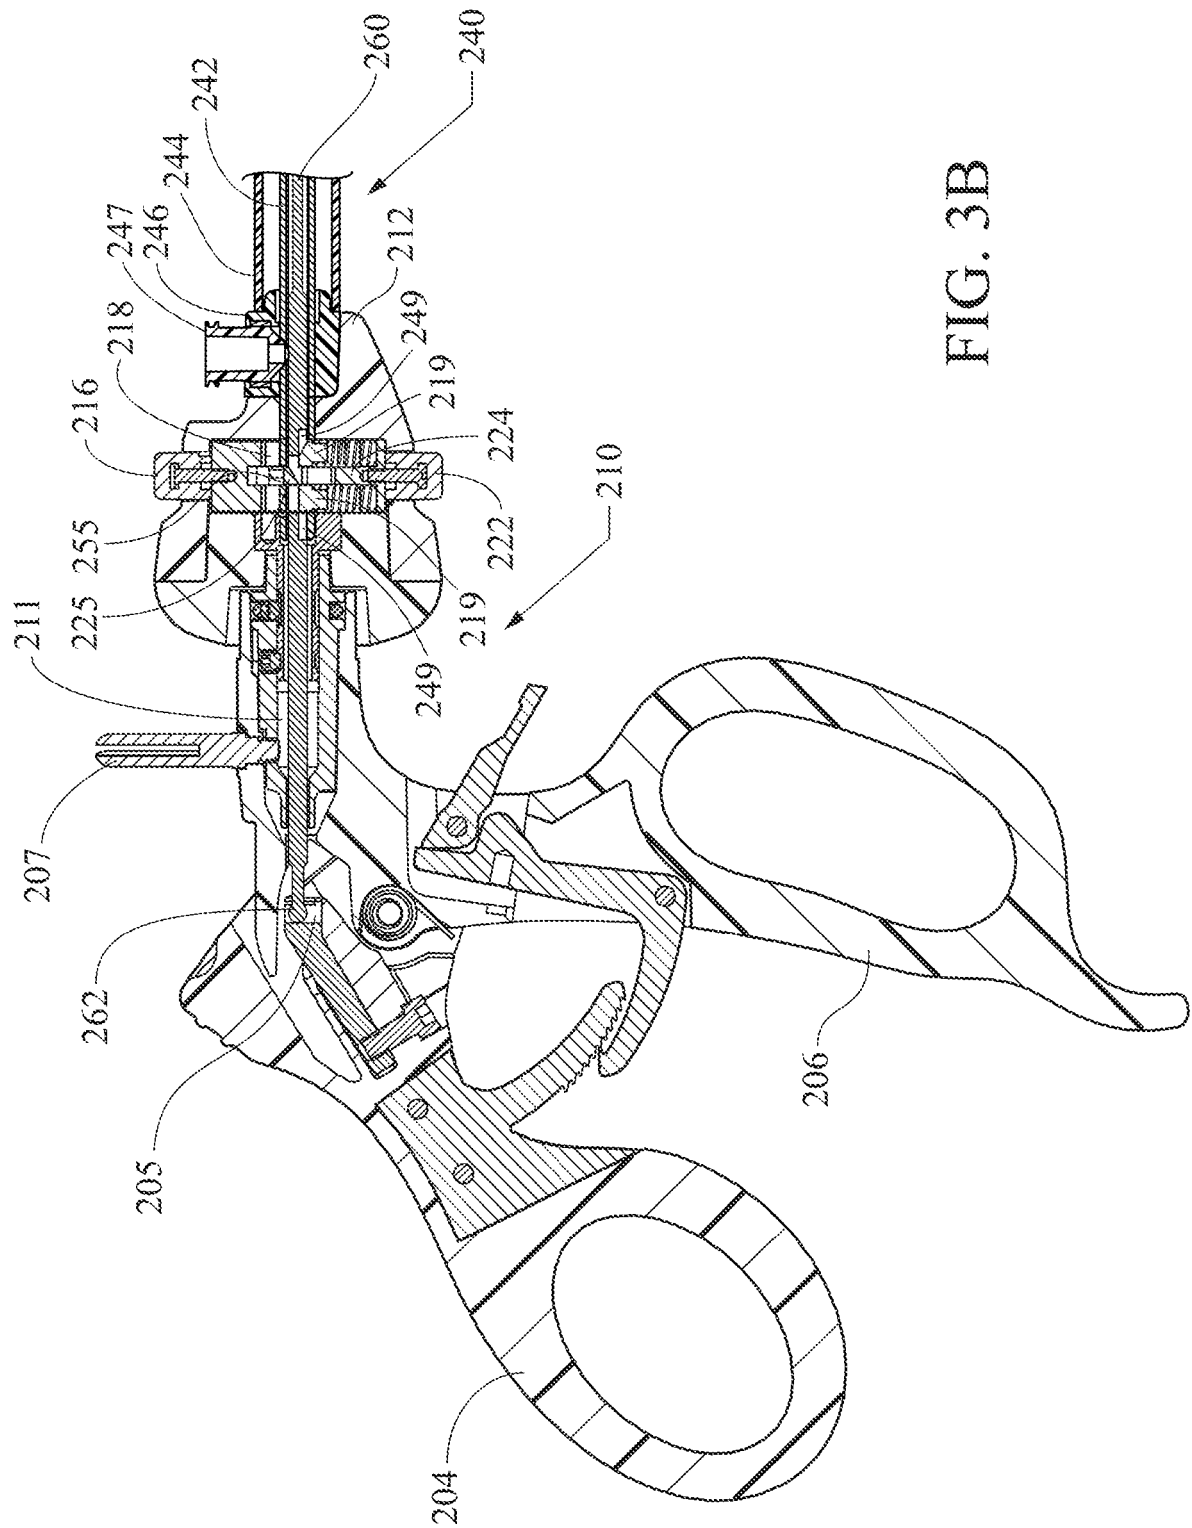

336

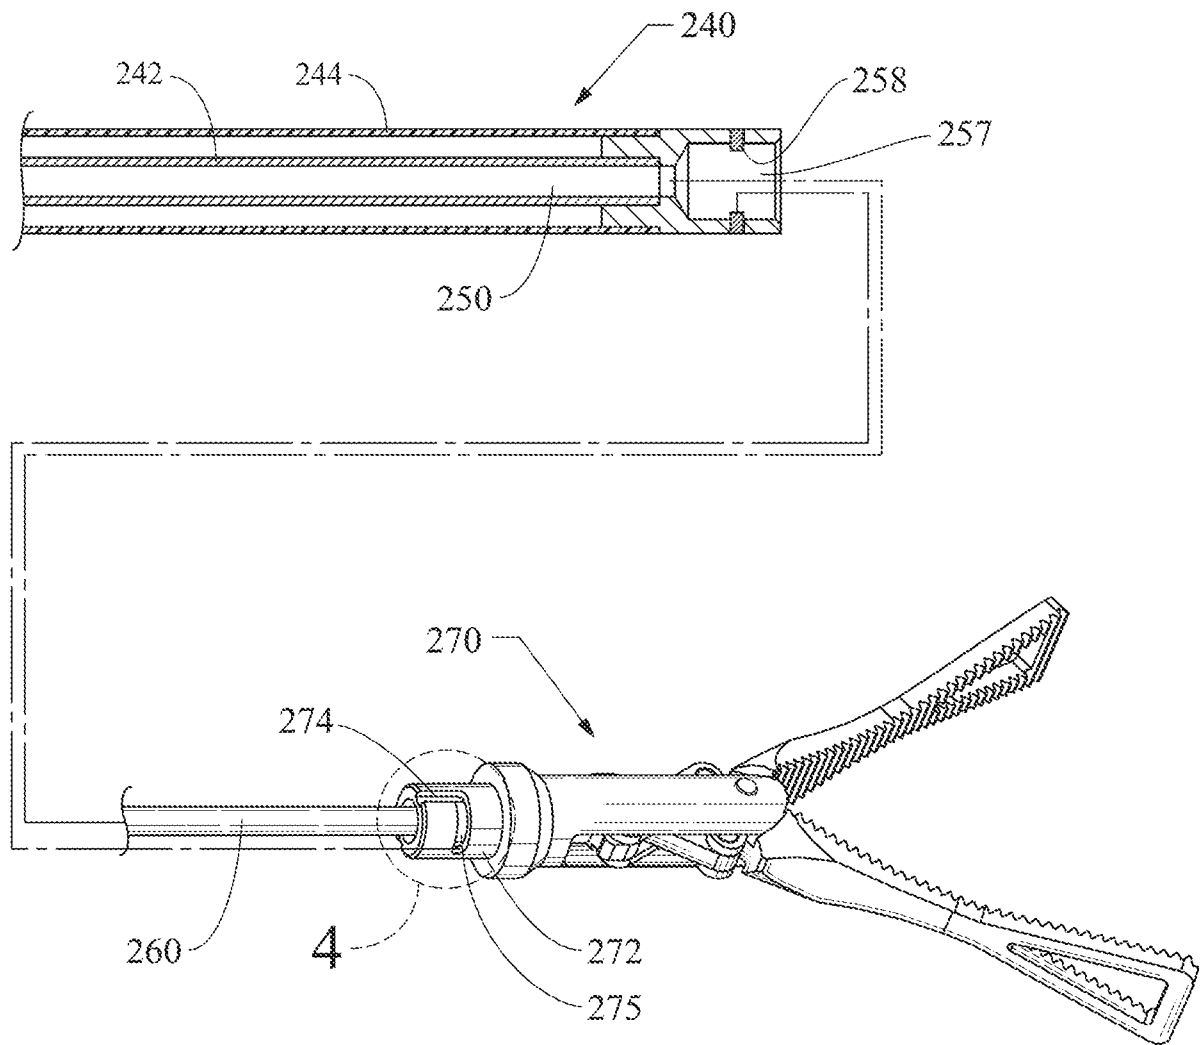


FIG. 3C

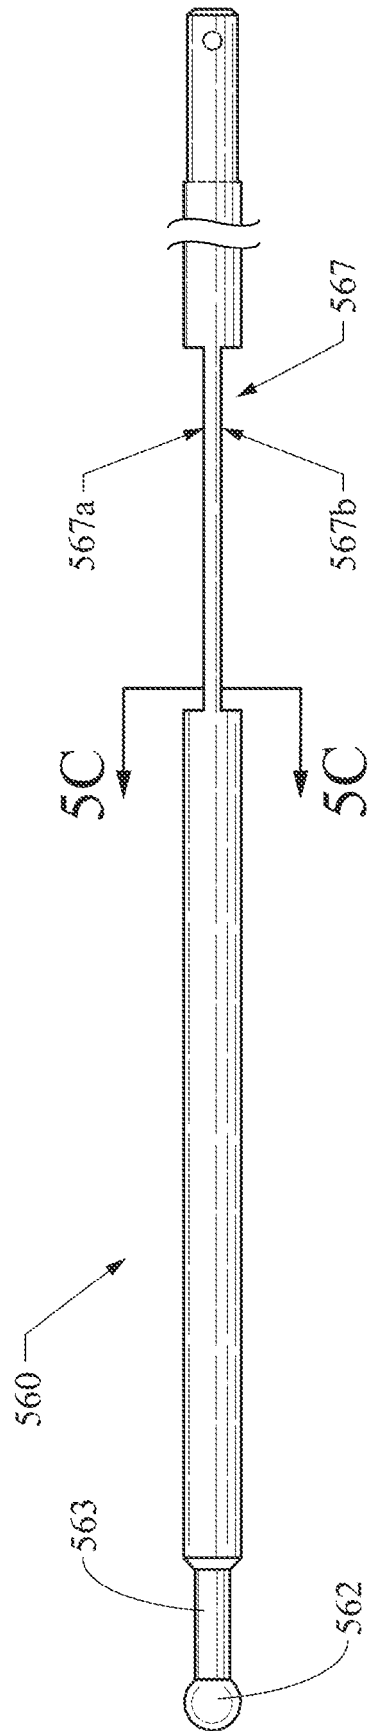


FIG. 5A

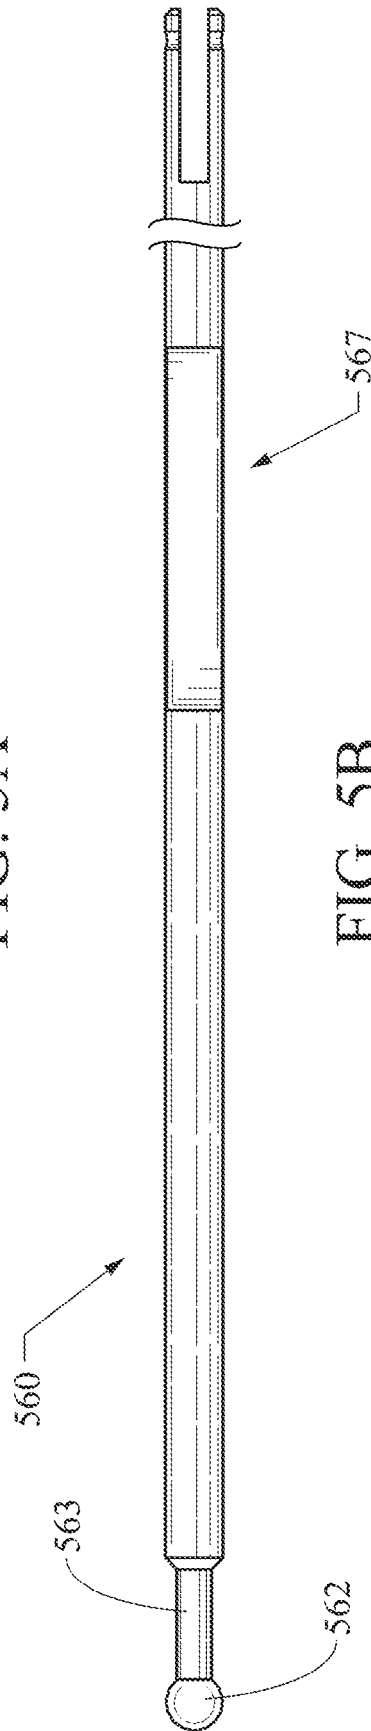


FIG. 5B




FIG. 5C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5727428 A [0003]
- DE 20118882 U1 [0004]
- US 6595984 B [0005]
- US 6340352 B [0006]
- US 20070299469 A, Carpenter [0012]

专利名称(译)	具有可重复使用手柄的手术设备		
公开(公告)号	EP2579790B1	公开(公告)日	2016-12-21
申请号	EP2011725274	申请日	2011-05-31
[标]申请(专利权)人(译)	CAREFUSION 2200		
申请(专利权)人(译)	CAREFUSION 2200 INC.		
当前申请(专利权)人(译)	CAREFUSION 2200 INC.		
[标]发明人	CHEN HOW LUN CRUMLEY JESSE LEONARD ROBERT F		
发明人	CHEN, HOW-LUN CRUMLEY, JESSE LEONARD, ROBERT F.		
IPC分类号	A61B17/29		
CPC分类号	A61B17/29 A61B18/1445 A61B2017/0046 A61B2017/292 A61B2017/2929 A61B2017/293 A61B2017/2931 A61B2090/0813		
代理机构(译)	POTTER CLARKSON LLP		
优先权	12/797933 2010-06-10 US		
其他公开文献	EP2579790A1		
外部链接	Espacenet		

摘要(译)

提供了一种腹腔镜手术装置，包括可移除工具的轴，该轴具有外轴和可以可拆卸地或永久地连接在一起的内致动杆。该装置的手柄包括双按钮机构，用于接合和释放可移除工具的轴。双按钮机构构造造成接合外轴的重叠的相应孔和延伸穿过外轴的内杆。

