

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 January 2012 (12.01.2012)

(10) International Publication Number
WO 2012/005671 A1

PCT

(51) International Patent Classification:

A61B 17/04 (2006.01) A61B 17/128 (2006.01)
A61B 17/122 (2006.01)

(21) International Application Number:

PCT/SE2011/050902

(22) International Filing Date:

4 July 2011 (04.07.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1050737-4 5 July 2010 (05.07.2010) SE

(71) Applicant (for all designated States except US):

LAPROTECH AB [SE/SE]; Stigbergsgatan 7 A, S-723
41 Västerås (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): NAJAR, Azad
[SE/SE]; Skiljebovägen 9, S-723 41 Västerås (SE).

(74) Agent: MINDMAP IPR AB; c/o Nellpat, P.O. Box. 138,
S-683 23 Hagfors (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LAPAROSCOPIC INSTRUMENT

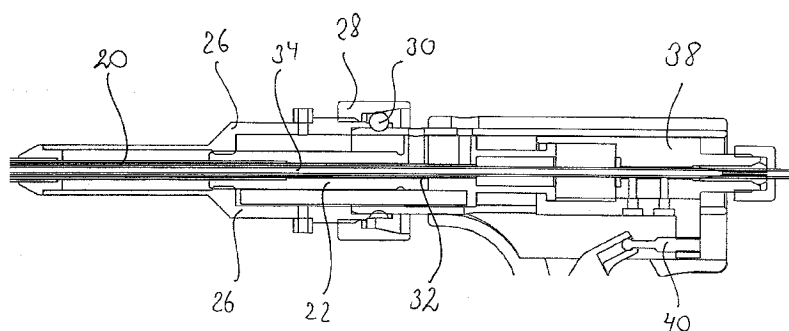


Fig. 4

(57) Abstract: The present invention relates to a laparoscopic instrument comprising a handle unit by which a user may hold the instrument, an elongated first tube attached to said handle unit, a second tube arranged slidably in relation to said first tube, that said second tube is provided with a thread gripping member capable of gripping suture threads, a locking member arranged to said tubes such that, when said second tube is moved in relation to said first tube, gripped suture threads are locked. The invention is characterised in that the device further comprises storage means for a number of rings, and a ring feeding member capable of, upon activation, moving said ring from said storage means to a free position in which said suture threads run through said ring.

WO 2012/005671 A1

LAPAROSCOPIC INSTRUMENT

TECHNICAL AREA

The present invention relates to a laparoscopic instrument and in particular an
5 instrument that facilitates the knotting of stitches in the interior of a patient.

BACKGROUND OF INVENTION

During a laparoscopic operation instruments with long handles are used in order to perform all steps of the operation. As a summary, the most important sewing-steps in
10 a laparoscopic operation are the following: a first instrument holds the needle. The needle and the hanging thread are on one side of the tissues. With the help of the first instrument the needle is guided through the tissues that are to be sewn together. A second instrument receives the needle and then the first instrument releases the needle. The second instrument pulls the needle through the tissues so that the
15 needle goes through from one side to a second side. The second instrument releases the needle and instead grips the thread at a suitable distance from the tissue on the second side. With suitable movements the thread is twisted around the first instrument. Then the first instrument grips the thread on the first side of the tissue. The first instrument pulls the end of the thread back so that a knot is created.
20 Both instruments are pulled so that the tissues are brought together. A similar process is repeated two or more times so that at least three knots on each other are obtained so that the risk of them loosing the grip is minimized.

As understood from the above description, to make a knot during a laparoscopic
25 operation is one of the most time-consuming parts of the operation. Limited possibilities of movement, two-dimensional viewing via a TV screen and the long handle in the instrument are some important factors that contribute to a higher degree of complexity. It is often that a knot may take more than ten minutes and the surgeon has to try several times before succeeding. Longer operation time is a large
30 load for both the patient and the surgeon.

The applicant of the present invention has therefore developed a number of laparoscopic instruments that greatly facilitates a laparoscopic operation and thus

shortens the operation time. These instruments are disclosed in the patent application, publication no. WO2007/073343. With the aid of these instruments both the entering of the thread through the tissues as well as the following knotting are handled much more easily than before. There is also described a method and a device where the ends of the thread through the tissue are brought together not by a knot but by a metal clip which is pressed by the device to secure the threads.

However, even if the step of bringing the ends of the thread together with the above mentioned instruments has been reduced compared to before, there is still room for improvements in this area.

BRIEF DESCRIPTION OF INVENTION

A main object of the present invention is to provide a laparoscopic instrument that will further facilitate and shorten the operation time and in particular the step of bringing the threads together.

This object is obtained by a laparoscopic instrument according to the features of the independent patent claim. Preferable embodiments of the present invention form the subject of the dependent patent claims.

According to a main aspect of the invention it is characterised by a laparoscopic instrument comprising a handle unit by which a user may hold the instrument, an elongated first tube attached to said handle unit, a second tube arranged slidable in relation to said first tube, that said second tube is provided with a thread gripping member capable of gripping suture threads, a locking member arranged to said tubes such that, when said second tube is moved in relation to said first tube, gripped suture threads are locked, characterised in that the device further comprises storage means for a number of ring, and a ring feeding member capable of, upon activation, moving said ring from said storage means to a free position in which said suture threads run through said ring.

According to another aspect of the invention, it comprises a lever member arranged adjacent to said handle and operationally connected to said second tube for enabling movement in relation to said first tube.

- 5 According to yet another aspect of the invention, said storage means comprises the outer surface of said second tube, on which the ring are releasibly positioned.

According to a further aspect of the invention, said ring feeding member comprises a third tube arranged outside said second tube.

10

According to yet a further aspect of the invention, said ring feeding member further comprises a rotational member threadedly arranged to said housing and connected to said third tube such that rotation causes said third tube to be moved in the proximal direction, releasing a ring.

15

According to another aspect of the invention, it comprises a fourth tube arranged outside said third tube for protecting said ring.

20

According to a further aspect of the invention, the proximal end of said fourth tube is arranged with flexible arms having inwardly directed ledges at their proximal ends for releasibly holding said ring.

25

There are a number of advantages with the present invention. By utilizing at least one tube in which a gripping member is slidably arranged, a very fast and accurate gripping of the suture threads is ascertained. Further since the ring are readily available from a storage means on the instrument, it is easy to place the ring in relation to the suture threads for joining them by the ring.

30

A further advantage is to have further tubes surrounding the gripping and locking tubes, which operate and move the rings when they are to be used by sliding movement, which sliding movement can be provided by a threaded rotational member. preferably the suture thread runs through the instrument and cooperates with a needle laparoscopic instrument, whereby one part of the thread is already

present in the instrument before a stitch and whereby the other end of the thread is easily gripped by the instrument for the subsequent joining of the threads for performing a stitch. In all a very versatile and time-saving instrument is obtained.

- 5 These and other aspects of, and advantages with, the present invention will become apparent from the following detailed description of the invention and from the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

- 10 In the following detailed description of the invention, reference will be made to the accompanying drawings, of which

Fig. 1 shows a cross-sectional side view of a distal part of the instrument according to the present invention,

15

Fig. 2 shows a cross-sectional side view of a proximal part of the instrument according to the present invention,

Fig. 3 shows a side view of the proximal part of the instrument,

20

Fig. 4 shows a detailed cross-sectional view of the instrument,

Fig. 5 shows another detailed cross-sectional view of the instrument, and

- 25 Fig. 6 shows the principle of squeezing ring that are used with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

- 30 In the present application, when the term “distal part/end” is used, this refers to the part/end of the device, or the parts/ends of the members thereof, which is/are located the furthest away from the patient when in use. Correspondingly, when the term “proximal part/end” is used, this refers to the part/end of the device, or the parts/ends

of the members thereof, which, is/are located closest to, or inside, the patient during use.

The instrument shown in the drawings comprises a generally tubular housing 10. A handle 12 is attached to the outer surface of the housing and shaped as to provide a grip for a user. At a proximal end of the housing a first tube 14, hereafter named guide tube, is attached. The proximal end of the guide tube 14 is arranged with longitudinally extending slits, forming arms 16 between the slits, Fig. 3, which arms are resilient in the radial direction. At the proximal end of the arms 16 inwardly directed ledges 18 are arranged. The function of the arms 16 will be described below.

Inside the guide tube 14 a second tube 20 is arranged, hereafter named feed tube, is slidably arranged. The distal end of the feed tube is attached to a support 22, which support is arranged with threads 24 on its outer surface, Fig. 5. These threads cooperate with threads 25 on a generally cylindrical feed member 26 arranged rotatable at the proximal end of the housing. A feed nut 28 is attached to the feed member 26 and supported to the housing via bearings 30. The feed nut 28 may be rotated by a user such that when said feed nut 28 and thus said feed member 26 are rotated, the feed tube 20 is moved in the proximal direction of the device.

Inside the feed tube 20 a third tube 32 is arranged, hereafter named shuttle tube, which shuttle tube 32 is attached to the housing of the device. Inside the shuttle tube a fourth tube 34, hereafter named thread locking tube, is arranged slidable in relation to the shuttle tube 32. The proximal end of the thread locking tube 34 is arranged with an inwardly directed notch 36, Fig. 2. The distal end of the thread locking tube 34 is attached to a post 38 inside the housing, which post is arranged slidable. The post is provided with a pivot 40. A lever 42 is pivotally arranged to the housing adjacent the handle and having an upper end attached to the pivot 40 of the post 38. The lower end of the lever is designed with a circle 44 in which a finger of a user may fit, such as the thumb. The handle 12 is further arranged with a distally directed arm 46, having notches 48 on a side surface, which notches 48 are arranged to cooperate with corresponding notches on an opposite side surface of the lever 42, thereby providing a reliable locking function of the lever 42 in relation to the handle

12. Further, the distal end of the device is preferably arranged with a reel (not shown), on which suture thread is wound. The thread is arranged through the thread locking tube 34 from the distal end to the proximal end.

- 5 The device is intended to function as follows. Beforehand a number of clips 50, of any suitable material, having a general ring-shape, have been pushed onto the shuttle tube 32 from the proximal end of the device, Fig. 2, past the inwardly directed ledges 18 of the arms 16 of the guide tube 14. The end of the thread at the proximal end of the device is during use connected to a needle of another laparoscopic
- 10 instrument and is pushed through the tissue to be sewn together. Then the free end of the thread is put around the notch 36 of the thread locking tube 34. Then the lever 42 is pushed in the proximal direction towards the handle 12. This causes the post 38, pivotally connected to the upper end of the lever 42, to be pushed in the distal direction, as well as the thread locking tube 34 since it is attached to the post. This in
- 15 turn causes the proximal end of the thread locking tube 34, together with the threads to be pulled inside shuttle tube 32, thereby locking the threads. The lever 42 is now releasibly locked to the handle 12 and the grip of the handle may now be removed. Instead, the user now grips the knob 28 and turns it in relation to the housing. The rotation then causes the feed tube 20 to be moved in the proximal direction due to
- 20 the threaded connection between the feed member 26 and the support of the feed tube 20. The movement of the feed tube 20 causes the rings 50 to be pushed in the proximal direction until the most proximal ring 50 is pushed past the ledges 18 of the resilient arms of the outer tube. The ring 50 now is free with the threads through it, Fig. 6a. Now a suitable instrument 60 containing a pair of pliers 62 is introduced by which
- 25 the ring 50 may be moved to an appropriate position along the threads and is deformed by the pair of pliers to squeeze the threads, Fig. 6b, whereby the stitch is finished. The thread is cut and a subsequent stitch may be performed as described above.
- 30 It is to be understood that the embodiment described above and shown in the drawings is to be regarded only as a non-limiting example of the invention and that it may be modified in many ways within the scope of the patent claims.

PATENT CLAIMS

1. Laparoscopic instrument comprising a handle unit by which a user may hold the instrument,
 - an elongated first tube attached to said handle unit,
 - 5 - a second tube arranged slidable in relation to said first tube,
 - that said second tube is provided with a thread gripping member capable of gripping suture threads,
 - a locking member arranged to said tubes such that, when said second tube is moved in relation to said first tube, gripped suture threads are locked,
 - 10 characterised in that the device further comprises storage means for a number of ring, and
 - a ring feeding member capable of, upon activation, moving said ring from said storage means to a free position in which said suture threads run through said ring.
 - 15
2. Laparoscopic instrument according to claim 1, wherein it comprises a lever member arranged adjacent to said handle and operationally connected to said second tube for enabling movement in relation to said first tube.
- 20 3. Laparoscopic instrument according to claim 1 or 2, wherein said storage means comprises the outer surface of said second tube, on which the ring are releasibly positioned.
4. Laparoscopic instrument according to any of the preceding claims, wherein
25 said ring feeding member comprises a third tube arranged outside said second tube.
5. Laparoscopic instrument according to claim 4, wherein said ring feeding member further comprises a rotational member threadedly arranged to said
30 housing and connected to said third tube such that rotation causes said third tube to be moved in the proximal direction, releasing a ring.

6. Laparoscopic instrument according to any of the preceding claims, wherein it comprises a fourth tube arranged outside said third tube for protecting said ring.
- 5 7. Laparoscopic instrument according to claim 6, wherein the proximal end of said fourth tube is arranged with flexible arms having inwardly directed ledges at their proximal ends for releasibly holding said ring.
- 10 8. Laparoscopic instrument according to any of the preceding claims, wherein a suture thread is drawn through said second tube.

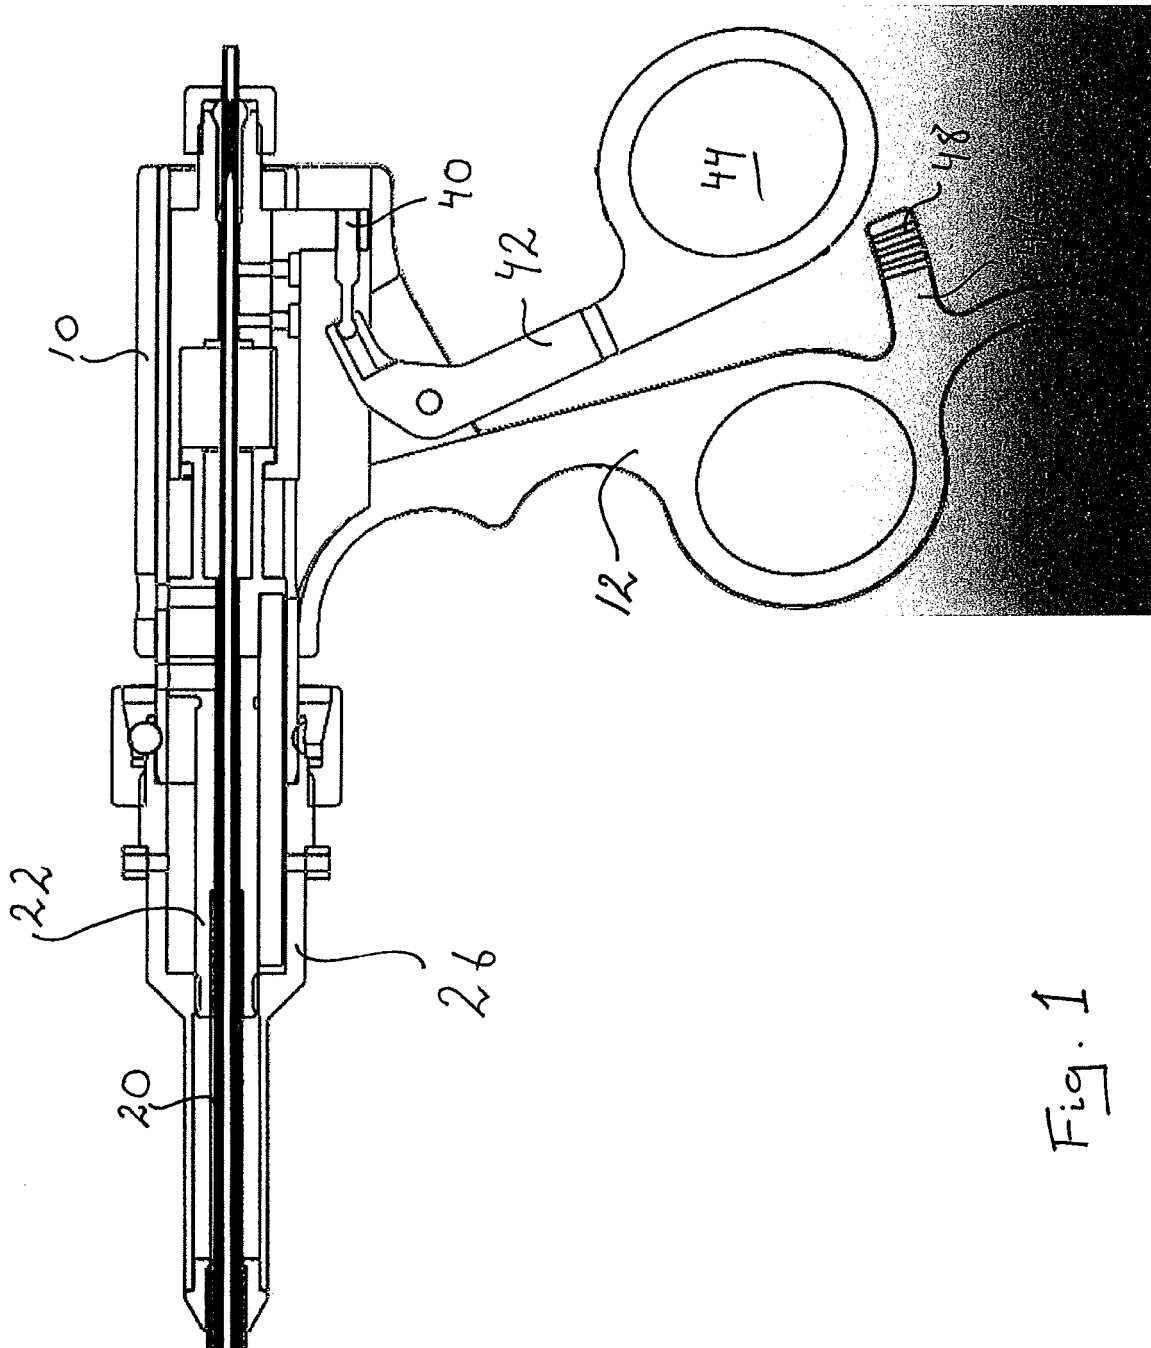


Fig. 1

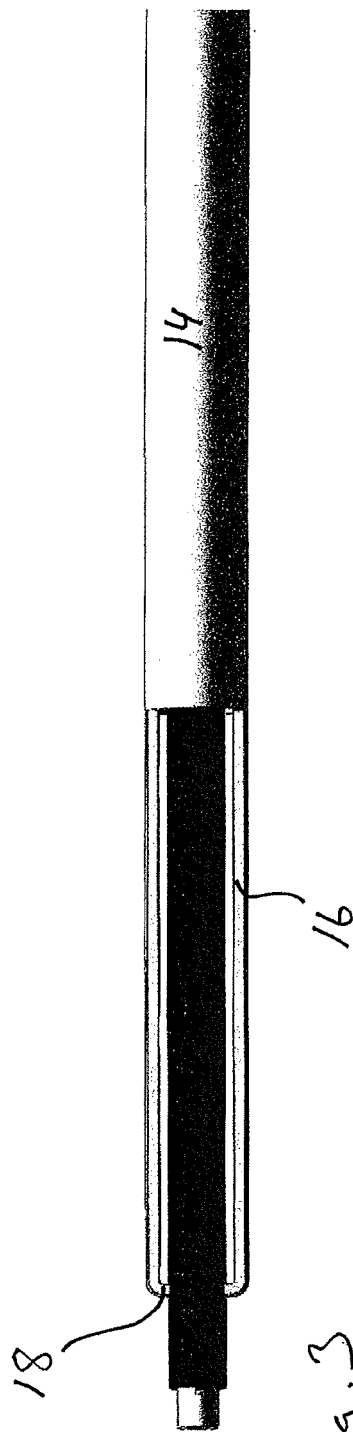


Fig. 3

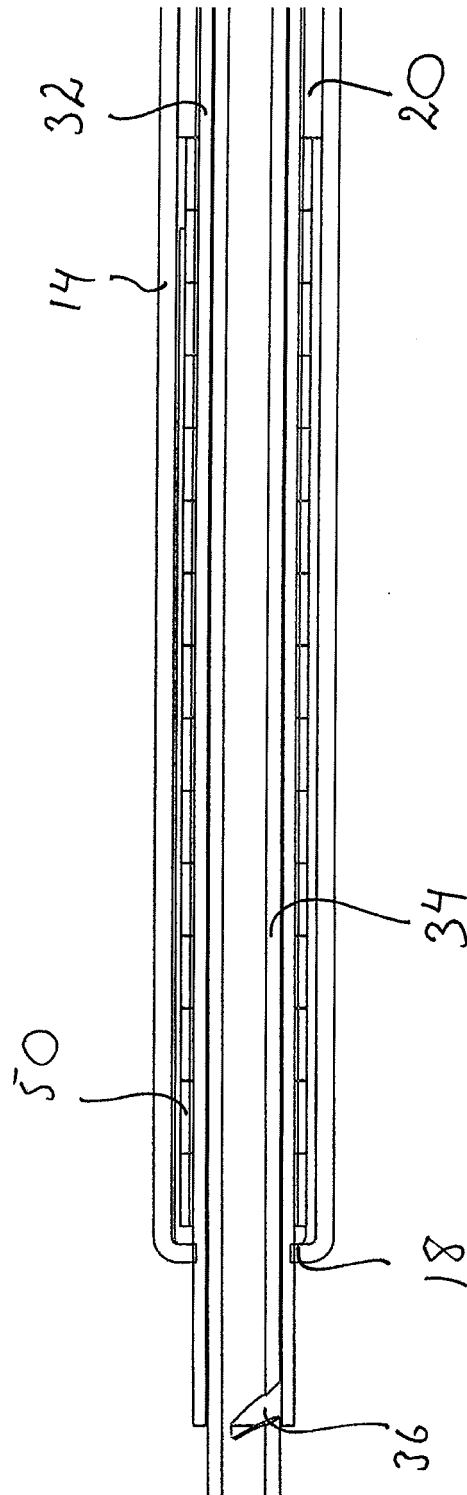
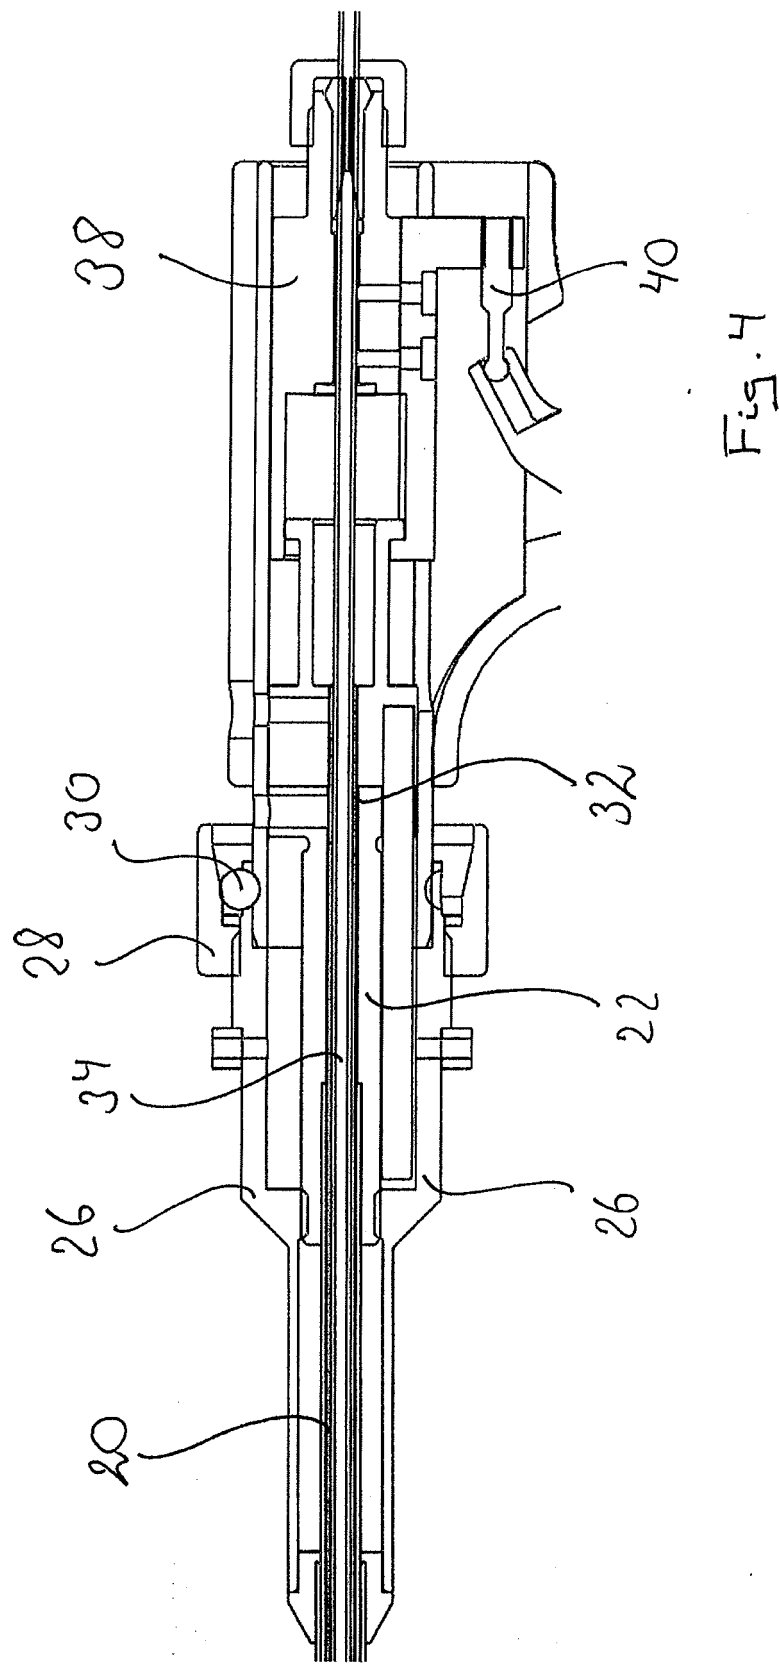
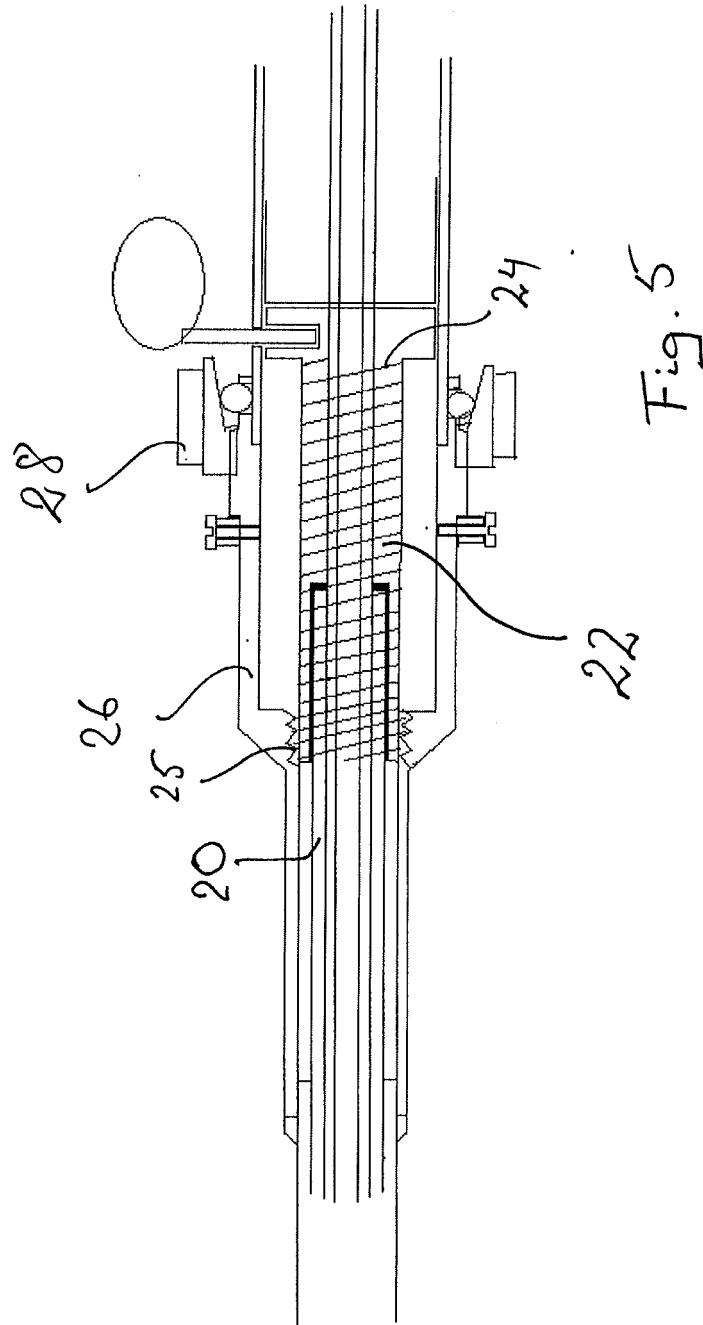


Fig. 2





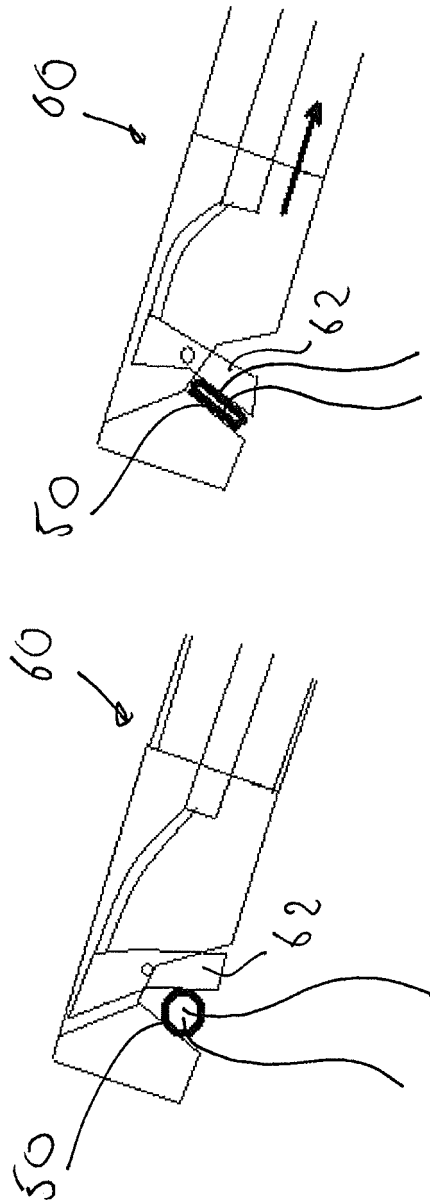


Fig. 6b

Fig. 6a

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050902

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data, MEDLINE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2007073343 A1 (AL-NAJJAR AZAD), 28 June 2007 (2007-06-28); whole document --	1-8
A	EP 2098176 A2 (FUJIFILM CORP), 9 September 2009 (2009-09-09); abstract; figure 10 --	1-8
A	US 5709694 A (GREENBERG ALEX M ET AL), 20 January 1998 (1998-01-20); abstract; figure 4 --	1-8
A	US 5817107 A (SCHALLER GUENTER), 6 October 1998 (1998-10-06); whole document --	1-8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T”

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X”

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y”

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&”

document member of the same patent family

Date of the actual completion of the international search

10-10-2011

Date of mailing of the international search report

25-10-2011

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Leif Brander

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050902

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5984932 A (YOON INBAE), 16 November 1999 (1999-11-16); abstract; figure 17 --	1-8
A	US 6022360 A (REIMELS WILLIAM J ET AL), 8 February 2000 (2000-02-08); abstract; figures 9-17 --	1-8
A	US 6159224 A (YOON INBAE), 12 December 2000 (2000-12-12); abstract; figures 1, 10-14 --	1-8
A	US 6165204 A (LEVINSON MELVIN E ET AL), 26 December 2000 (2000-12-26); abstract; figures 22-31 -- -----	1-8

Continuation of: second sheet

International Patent Classification (IPC)

A61B 17/04 (2006.01)

A61B 17/122 (2006.01)

A61B 17/128 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se (English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se (Swedish version)

Use the application number as username. The password is **GCELEHDVNI**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE2011/050902

WO	2007073343 A1	28/06/2007	EP	1962699 A1	03/09/2008
			US	20080319459 A1	25/12/2008
EP	2098176 A2	09/09/2009	EP	2335611 A1	22/06/2011
			US	20090223028 A1	10/09/2009
US	5709694 A	20/01/1998	US	5810852 A	22/09/1998
US	5817107 A	06/10/1998	NONE		
US	5984932 A	16/11/1999	US	5954733 A	21/09/1999
			US	5759188 A	02/06/1998
US	6022360 A	08/02/2000	AU	8687898 A	01/03/1999
			EP	1009290 A1	21/06/2000
			EP	2263557 A2	22/12/2010
			EP	2286730 A2	23/02/2011
			US	5910148 A	08/06/1999
			WO	9907291 A1	18/02/1999
US	6159224 A	12/12/2000	NONE		
US	6165204 A	26/12/2000	AU	6527800 A	18/02/2002
			US	6508829 B1	21/01/2003
			WO	0211622 A1	14/02/2002

专利名称(译)	腹腔镜仪器		
公开(公告)号	EP2590575A1	公开(公告)日	2013-05-15
申请号	EP2011803902	申请日	2011-07-04
[标]申请(专利权)人(译)	LAPROTECH		
申请(专利权)人(译)	LAPROTECH AB		
当前申请(专利权)人(译)	LAPROTECH AB		
[标]发明人	NAJAR AZAD		
发明人	NAJAR, AZAD		
IPC分类号	A61B17/04 A61B17/122 A61B17/128		
CPC分类号	A61B17/0469 A61B17/0487 A61B2017/0488		
优先权	1050737 2010-07-05 SE		
其他公开文献	EP2590575A4		
外部链接	Espacenet		

摘要(译)

腹腔镜器械技术领域本发明涉及一种腹腔镜器械，其包括用户可以握住器械的手柄单元，附接到所述手柄单元的细长的第一管，相对于所述第一管可滑动地布置的第二管，所述第二管具有一种能够夹住缝合线的线夹持构件，一个设置在所述管上的锁定构件，使得当所述第二管相对于所述第一管移动时，夹持的缝合线被锁定。本发明的特征在于，该装置还包括用于多个环的存储装置，以及一个环形供给构件，其能够在激活时将所述环从所述存储装置移动到自由位置，在所述自由位置，所述缝合线穿过所述环。