



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.01.2007 Bulletin 2007/04

(51) Int Cl.:
A61F 5/00 (2006.01) A61B 17/00 (2006.01)

(21) Application number: **06076851.2**

(22) Date of filing: **05.09.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 IE IT LI LU MC NL PT SE SK TR**

(72) Inventor: **Forsell, Peter**
6300 Zug (CH)

(30) Priority: **05.09.2001 US 316987 P**

(74) Representative: **Mercer, Christopher Paul et al**
Carpmaels & Ransford,
43-45 Bloomsbury Square
London WC1A 2RA (GB)

(62) Document number(s) of the earlier application(s) in
 accordance with Art. 76 EPC:
02797720.6 / 1 435 884

Remarks:

This application was filed on 06 - 10 - 2006 as a
 divisional application to the application mentioned
 under INID code 62.

(71) Applicant: **Potencia Medical AG**
6341 Baar (CH)

(54) **Stoma opening forming apparatus with connection device**

(57) An apparatus for forming a stoma opening in the stomach or oesophagus of a patient includes an elongate adjustable constriction member (1) that extends in a loop around and constricts the stomach (16) or oesophagus to form the stoma opening therein. A connection device releasably connects the end portions (4,6) of the constriction member to each other and an adjustment device

(2) adjusts the longitudinal extension of the constriction member (1) in said loop to change the size of the stoma opening, The connection device includes a female part (7) and a male part (5) fitting into the female part to lock them together. The design of the connection device facilitates laparoscopic surgery for implanting the apparatus

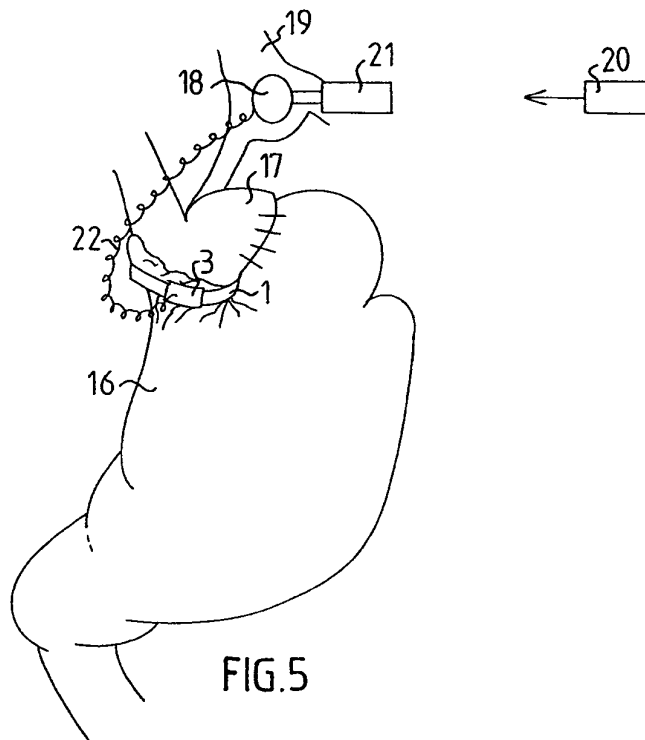


FIG.5

Description

[0001] The present invention relates to an apparatus for forming a stoma opening in the stomach or oesophagus of a patient. The apparatus comprises a constriction device adapted to be applied on the patient's stomach or oesophagus and including an elongate adjustable constriction member adapted to extend in a loop around and constrict the stomach or oesophagus to form the stoma opening therein, the constriction member having first and second end portions. The apparatus further comprises a connection device for releasably connecting the first and second end portions of the constriction member to each other, and an adjustment device that adjusts the longitudinal extension of the constriction member in said loop to change the size of the stoma opening

[0002] This kind of apparatus in the form of a gastric banding device, in which a band encircles a portion of a patient's stomach to restrict the food intake of the patient, have been used in surgery for morbid obesity to form a small gastric pouch above the band and a reduced stoma opening in the stomach. Although such a band is applied around the stomach to obtain an optimal stoma opening during surgery, some prior gastric banding devices are provided with an adjustment device enabling a minor post-operation adjustment of the size of the stoma opening.

[0003] The kind of apparatus presented initially has also been used for treating heartburn and reflux disease due to hiatal hernia, *i.e.* a portion of the stomach immediately below the gastric fundus slides upwardly through the esophageal hiatus. In consequence, stomach acids and foods are regurgitated into the oesophagus. In the late 1970s a prior art prosthesis called Angelchik, according to U.S. Patent No. 3.875 928, was used to operatively treat heartburn and reflux disease. However, the Angelchik prosthesis had a major disadvantage in that it was not possible to adjust the size of the restriction opening after the operation. A further disadvantage was that the prosthesis did not satisfactorily protect the oesophagus and the surrounding area against injuries due to poor shape of the prosthesis. Therefore, operations using the Angelchik prosthesis are no longer practised.

[0004] An operation technique, semi-fundoduplicatio, is currently in use for treating heartburn and reflux disease. A most common operation is Nissen semi-fundoduplicatio, in which one takes the fundus of the stomach and makes a three quarter of a turn around the oesophagus and sutures between the stomach and oesophagus. Although this operation works fairly well it has three main disadvantages. Firstly, most patients treated in accordance to semi-fundoduplicatio lose their ability to belch. Secondly, many of these patients get dysphagia, *i.e.* difficulties to swallow after the operation. Thirdly, it is not possible to adjust the stoma opening in the oesophagus or stomach in any way after the operation. Characteristic for these patients is the variation of their problems over the day. For example, many patients have difficulties dur-

ing the night when they lie down because of stomach acid leaking up into the oesophagus.

[0005] The prime object of the present invention is to provide a new adjustable apparatus designed to form an adjustable stoma opening in the stomach or oesophagus of a patient, wherein the new apparatus is suited for treating obese patients as well as patients suffering from heartburn and reflux disease.

[0006] Another object of the present invention is to provide a new convenient apparatus for forming a stoma opening, which is easy to apply around the stomach or oesophagus and easy to remove from the stomach or oesophagus.

[0007] These objects are obtained by an apparatus of the kind presented initially characterised in that the connection device includes a female part and a male part fitting into the female part to lock them together.

[0008] In accordance with a preferred embodiment of the invention, the male part includes a shank and a head on the shank and the female part includes two jaws defining a bore for receiving the head of the male part and a passage narrower than and extending from the bore for receiving the shank of the male part, whereby the male part can be locked to the female part by laterally displacing the head and shank of the male part into the bore and passage, respectively. The jaws are formed with indentations in the bore adjacent the passage, such that the head can be displaced laterally relative to the bore into the indentations, whereby the head is prevented from being displaced out of the bore.

[0009] Other embodiments of the invention are also conceivable. For example, the male and female parts may be designed as snap fasteners or male and female pipes, which may or may not be provided with threads.

[0010] The constriction member may be non-inflatable and the adjustment device may include a motor for adjusting the non-inflatable constriction member. Alternatively, the constriction member may be a hydraulic constriction member, typically with an inflatable cavity, and the adjustment device may include a pump hydraulically connected to the hydraulic constriction member.

[0011] Generally, the adjustment device comprises a powered adjustment device, for example including a motor, preferably an electric motor. The apparatus may comprise an implantable energy-transforming device adapted to transform wireless energy emitted from outside the patient's body into an energy form suited for powering the adjustment device. Such an energy form may be electric energy for powering an electric motor of the adjustment device.

[0012] To conveniently adjust the size of the stoma opening the apparatus may comprise a wireless remote control for controlling the adjustment device from outside the patient's body to adjust the constriction device to change the size of the stoma opening.

[0013] The invention also provides a method for laparoscopically implanting in a patient a constriction device of the apparatus as described above to form a stoma

opening in the patient's stomach or oesophagus. The method comprises insufflating the patient's abdomen, placing at least two laparoscopic trocars in the abdomen, using a dissecting tool inserted through the laparoscopic trocar, dissecting the region of the oesophagus or stomach, introducing a constriction device of the apparatus described above through the trocars, and using tools inserted in the trocars forming a loop of the constriction member of the restriction device around the stomach or oesophagus in the dissected region and connecting the male and female parts to each other.

[0014] The invention also provides a method for laparoscopically removing a constriction device of the apparatus as described above applied on the stomach or oesophagus of a patient. The method comprises insufflating the patient's abdomen, placing at least two laparoscopic trocars in the abdomen, and using tools inserted in the trocars releasing the male and female parts of the constriction device from each other and then removing the constriction device from the patient.

[0015] In the enclosed drawings:

Figure 1 is a view of the apparatus of the invention with a connection device,

Figure 2 is a schematic view of the connection device in an unlocked state,

Figure 3 is a schematic view of the connection device in a pre-locked state,

Figure 4 is a schematic view of the connection device in a final locked state, and

Figure 5 illustrates the apparatus of the invention implanted in an obese patient.

[0016] Figure 1 shows the apparatus of the present invention including a constriction device having an elongate constriction member 1 to be formed into a closed loop around a patient's stomach or oesophagus to form a stoma opening therein. An adjustment device 2 includes an elongate housing 3 connected to an end portion 4 of the constriction member 1. There is a connection device in the form of a male part 5 on another end portion 6 of the constriction member 1 and a female part 7 formed on the housing 3. (Alternatively, the male part 5 may be provided on the housing 3 and the female part 7 may be formed on the end portion 6.)

[0017] With reference to Figures 2 - 4, the male part 5 has a shank 8 and a spherical head 9 on the shank 8 and the female part 7 has two jaws 10,11 defining a circular bore 12 for receiving the head 9 and a passage 13 narrower than and extending from the bore 12 for receiving the shank 8. As appears from Figure 3 the male part 5 can be pre-locked to the female part 7 by laterally displacing the head 9 and shank 8 into the bore 12 and passage 13, respectively. The jaws 10,11 are formed with spherical segment indentations 14,15 complementary to the spherical head 9. The indentations 14,15 are located in the bore 12 adjacent the passage 13. As appears from Figure 4 the male part 5 can be finally locked to the female

part 7 by displacing the head 9 laterally relative to the bore 12 into the indentations 14,15. The pressure that the stomach or oesophagus constantly exerts on the constriction member when the apparatus is implanted ensures that the connection device 5,7 is kept in a locked state.

[0018] In case the apparatus should be removed from the patient, the surgeon may conveniently use laparoscopic surgery to introduce a suitable tool into the patient's abdomen to release the head 9 from the jaws 11,11 and displace the head 9 out of the bore 12.

[0019] Figure 5 illustrates the constriction device the embodiment shown in Figures 1-4 applied on the stomach 16 of an obese patient. The elongate constriction member 1 and housing 3 of the constriction device extend in a loop around and constricts the stomach 16 to form an upper pouch 17 of the stomach 16 and a restricted stoma opening in the stomach 17. A rechargeable electric power supply 18 is implanted in the patient and fixed to the breastbone 19 (the sternum). An external remote control 20 controls the adjustment device 2 and transmits signals that are received by a combined control and energy transforming unit 21 subcutaneously implanted in the patient. The unit 21 is electrically connected to the electric power supply 18 and transforms the energy of the signals into an electric current that is used for charging the electric power supply 18. For example, the signals may include electromagnetic waves and the unit 21 may include an electric p-n junction element that transforms the wireless energy into an electric current. A resilient insulated electric wire 22 connects the power supply 18 and an electric motor of the adjustment device 2 contained in the housing 3. The electric wire 22 extends helically between the power supply 18 and housing 3, in order to permit the electric wire 22 to be temporarily extended when dynamic movements of the stomach 16 and oesophagus occur, so that the risk of breaking the electric wire 22 is eliminated.

Claims

1. An apparatus for forming a stoma opening in the stomach (16) or oesophagus of a patient, the apparatus comprising a constriction device (1,3) adapted to be applied on the patient's stomach or oesophagus, the constriction device including an elongate adjustable constriction member (1) adapted to extend in a loop around and constrict the stomach or oesophagus to form the stoma opening therein, the constriction member having first and second end portions (4,6), a connection device (5,7) for releasably connecting the first and second end portions of the constriction member to each other, and an adjustment device (2) that adjusts the longitudinal extension of the constriction member (1) in said loop to change the size of the stoma opening, **characterised in that** the connection device includes a female

part (7) and a male part (5) fitting into the female part to lock them together.

2. An apparatus according to claim 1, wherein the male part (5) comprises a shank (8) and a head (9) on the shank and the female part (7) comprises two jaws (10,11) defining a bore (12) for receiving the head of the male part and a passage (13) narrower than and extending from the bore for receiving the shank of the male part, whereby the male part can be connected to the female part by laterally displacing the head and shank of the male part into the bore and passage, respectively. 5
10

3. An apparatus according to claim 2, wherein the jaws (10,11) are formed with indentations (14,15) in the bore (12) adjacent the passage (13) fitting the head (9) of the male part (5), such that the head can be displaced laterally relative to the bore into the indentations to lock the male and female parts to each other. 15
20

4. An apparatus according to any of claims 1-3, wherein the constriction member (1) is non-inflatable. 25

5. An apparatus according to claim 4, wherein the adjustment device (2) comprises a motor.





6. An apparatus according to any of claims 1-3, wherein the constriction member comprises a hydraulic constriction member and the adjustment device (2) comprises a pump hydraulically connected to the hydraulic constriction member. 30


7. An apparatus according to any of claims 1-6, wherein the adjustment device (2) comprises a powered adjustment device and further comprising an implantable energy transforming device (21) adapted to transform wireless energy emitted from outside the patients body into an energy form suited for powering the adjustment device. 35
40

8. An apparatus according to any of claims 1-7, further comprising a wireless remote control (20) for controlling the adjustment device (2) to adjust the constriction device (1,3) to change the size of the stoma opening. 45

50

55

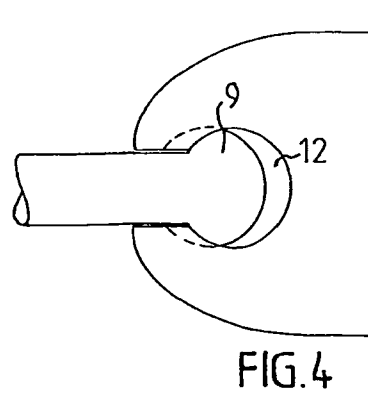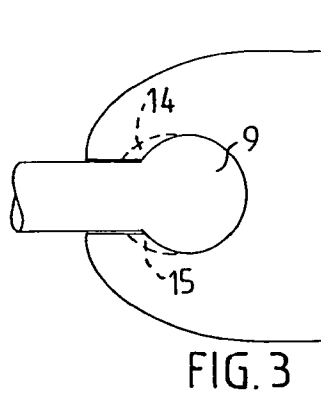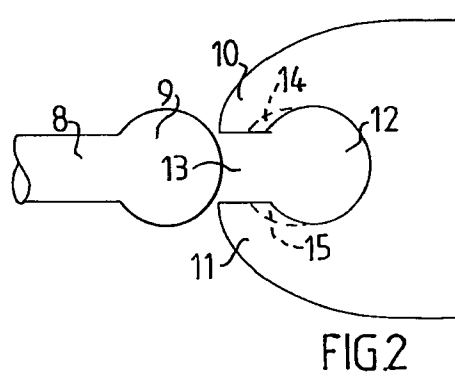

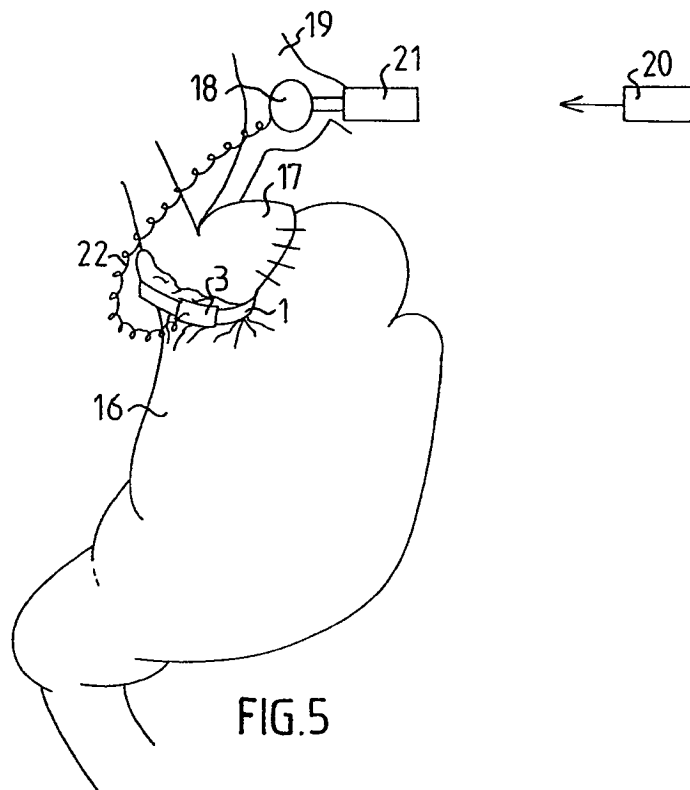

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3875928 A [0003]

| | | | |
|----------------|---|---------|------------|
| 专利名称(译) | 具有连接装置的造口开口形成装置 | | |
| 公开(公告)号 | EP1745765A2 | 公开(公告)日 | 2007-01-24 |
| 申请号 | EP2006076851 | 申请日 | 2002-09-05 |
| [标]申请(专利权)人(译) | 波滕西亚医疗公司 | | |
| 申请(专利权)人(译) | POTENCIA医药股份公司 | | |
| 当前申请(专利权)人(译) | POTENCIA医药股份公司 | | |
| [标]发明人 | FORSELL PETER | | |
| 发明人 | FORSELL, PETER | | |
| IPC分类号 | A61F5/00 A61B17/00 A61B17/132 | | |
| CPC分类号 | A61B17/1322 A61B17/1327 A61B2017/00539 A61F5/0003 | | |
| 代理机构(译) | MERCER, CHRISTOPHER PAUL | | |
| 优先权 | 60/316987 2001-09-05 US | | |
| 其他公开文献 | EP1745765A3 EP1745765B1 | | |
| 外部链接 | Espacenet | | |

摘要(译)

一种用于在患者的胃或食道中形成造口开口的装置包括细长的可调节收缩构件(1)，所述细长可调节收缩构件(1)围绕并围绕胃(16)或食道收缩以在其中形成造口开口。连接装置可释放地将收缩构件的端部(4,6)彼此连接，并且调节装置(2)调节所述环中的收缩构件(1)的纵向延伸，以改变造口开口的尺寸，连接装置包括阴部分(7)和配合到阴部分中以将它们锁定在一起的阳部分(5)。连接装置的设计便于腹腔镜手术以植入装置

