



(11) **EP 2 305 151 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.04.2011 Bulletin 2011/14

(51) Int Cl.:
A61B 17/34 (2006.01)

(21) Application number: **10251718.2**

(22) Date of filing: **01.10.2010**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(30) Priority: **02.10.2009 US 248035 P**
22.09.2010 US 887802

(71) Applicant: **Tyco Healthcare Group LP**
New Haven, CT 06511 (US)

(72) Inventor: **Stopek, Joshua**
Guilford, CT 06437 (US)

(74) Representative: **Soames, Candida Jane**
Edwards Angell Palmer
& Dodge Innovations LLP
10 Carlton Crescent
Southampton SO15 2EZ (GB)

(54) **Single port device including selectively closeable openings**

(57) A surgical port (100) includes a port body (1) having a lumen (3,4,5) extending therethrough and a plate (2) having an opening. The port body may be made from foam. The port is configured such that rotation of

the plate with respect to the port body aligns the opening and lumen defining a passage therethrough for the insertion of surgical instruments.

EP 2 305 151 A1

Description**CROSS-REFERENCE TO RELATED APPLICATION**

[0001] The present application claims the benefit of and priority to U.S. Provisional Patent Application Serial No. 61/248,035, filed October 2, 2009, the disclosure of which is herein incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to seals for use in surgical procedures. More particularly, the present disclosure relates to a seal anchor member adapted for insertion into an incision or opening in tissue.

BACKGROUND

[0003] Today, many surgical procedures are performed through small incisions in the skin, as compared to the larger incisions typically required in traditional procedures, in an effort to reduce both trauma to the patient and recovery time. Generally, such procedures are referred to as endoscopic, unless performed on the patient's abdomen, in which case the procedure is referred to as laparoscopic. Throughout the present disclosure, the term "minimally invasive" should be understood to encompass both endoscopic and laparoscopic procedures.

[0004] During a typical minimally invasive procedure, surgical objects, such as surgical access devices, e.g., trocar and cannula assemblies, or endoscopes, are inserted into the patient's body through the incision in tissue. In general, prior to the introduction of the surgical object into the patient's body, insufflation gasses are used to enlarge the area surrounding the target surgical site to create a larger, more accessible work area. Accordingly, the maintenance of a substantially fluid-tight seal is desirable so as to minimize or inhibit the escape of the insufflation gases and the deflation or collapse of the enlarged surgical site.

[0005] To this end, various valves and seals are used during the course of minimally invasive procedures. However, a continuing need exists for a seal anchor member that can be inserted directly into the incision in tissue and that can accommodate a variety of surgical objects while maintaining the integrity of an insufflated workspace.

SUMMARY

[0006] In accordance with various embodiments, the present disclosure is directed toward a surgical port having a compliant port body having at least one lumen extending therethrough. A plate may be moveably connected to the port body. The plate defines an opening that is selectively alignable with the at least one lumen. The surgical plate may be disposed in a substantial perpendicular relationship to the lumen. The plate may be ro-

tatably moveable relative to the port body. The plate may be disposed on a proximal surface, a distal surface, or both surfaces of the port body. The plate may be movable through a discrete number of positions relative to the port body. When the plate is in a first position relative to the port body, all of the at least one opening of the plate is in complete alignment with the at least one lumen of the port body and when the plate is in a second position relative to the port body, less than all of the at least one opening of the plate is in partial alignment with the at least one lumen of the port body. The port body may be formed of foam.

[0007] In accordance with various example embodiments, the present disclosure is also directed towards a surgical port including a compliant port body having a lumen extending therethrough. The surgical port includes a plate rotatably disposed relative to the lumen, the plate defining an opening that, at least once in the plate's rotational path, is selectively alignable with the lumen so as to define a passage through the lumen and the opening for a surgical instrument. The surgical port may also include a first structure configured to facilitate rotation of the plate relative to a longitudinal axis of the port body. The first structure may comprise a pin. The surgical port may also include a second structure configured to maintain the relative position of the plate. The second structure may be a shoulder disposed at the circumference of the plate which abuts a retaining shoulder on the body of the laparoscopic port. The plate may be located on a proximal surface of the port body. The surgical port may also include a second plate, and the second plate may be located on a distal surface of the port body. The plate and the second plate may be connected to each other so as to be moveable together relative to the port body. There may be multiple positions along a rotational path of the plate relative to the body such that a unique configuration of lumens therebetween is defined at each position. The plate may have a substantially arcuate convex profile. The plate may have a substantially arcuate concave profile. The plate may define an indentation along the circumference of the plate to facilitate rotation of the plate relative to the body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Various embodiments of the present disclosure are described herein with references to the drawings, wherein;

- FIG 1 is a perspective view of an embodiment of a port, according to an example embodiment of the present invention;
 FIG 1a is a side perspective view of a related seal anchor member of shown in the expanded condition and subsequent to its insertion into an incision;
 FIG 2a is a top view of an embodiment of a port insert in a closed configuration;
 FIG 2b is a top view of the port of fig. 2a in an open

configuration;

FIG 2c is a top view of the port of figs. 2a and 2b in an intermediate configuration;

FIG 3a is a cut-away plan view of a port having a plate retained by a circumferential shoulder disposed on a port body;

FIG 3b is a cut-away plan view of a port having a plate retained by a circumferential shoulder disposed on a plate;

FIG 3c is a cut-away plan view of a port having a plate retained by an angled circumferential shoulder disposed on a plate;

FIG 3d is a cut-away plan view of a port having a plate retained by a pin; and

FIG 3e is a cut-away plan view of a port having a plate retained by a conical protrusion;

FIG 3f is a cut-away plan view of a port having a distal plate and a connecting pin.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0009] While embodiments of the present disclosure are susceptible to various modifications and alternative constructions, certain illustrated embodiments thereof have been shown in the drawings and will be described below in detail. It should be understood, however, that there is no intention to limit the embodiments of the present disclosure to the specific form disclosed, but, on the contrary, the embodiments are intended to cover all modifications, alternative constructions, and equivalents falling within the spirit and scope of the present disclosure as defined in the claims.

[0010] In the drawings and in the description which follows, in which like references numerals identify similar or identical elements, the term "proximal" will refer to the end of the apparatus which is closest to the clinician during use, while the term "distal" will refer to the end which is furthest from the clinician, as is traditional and known in the art.

[0011] With reference to **FIG. 1**, an embodiment of the presently disclosed access port is shown. The seal anchor member **100** includes a body **1** which is a temporary percutaneous implant configured to traverse the skin of a patient. Although the embodiment in **FIG. 1** shows a percutaneous implant, it is contemplated that body **1** could traverse any biological barrier to provide selective communication between the volumes on opposing sides of the barrier. These include inter and intra organ barriers as well as systemic barriers within the body. It is further envisioned that the surgical port presently disclosed may be used in a naturally occurring orifice.

[0012] The body **1** of the access port has a generally cylindrical form with a proximal surface **9** having a first diameter **9D** and a distal surface **10** having a second diameter **10D** with a medial plane **11** having a third diameter **11D** disposed therebetween such that third diameter **11D** is less than second diameter **10D** and first diameter **9D** defining a profile which narrows near the

medial plane and widens at the proximal surface **9** and distal surface **10**, thereby defining a generally hourglass configuration. An example of an access port is disclosed by commonly assigned United States Patent Application Serial Number 12/244,024, filed on October 2, 2008 which is incorporated by reference in its entirety herein and illustrated in **FIG. 1a** as seal member **500** extending through an opening **W** in body tissue **T**.

[0013] Although **FIG. 1** shows proximal surface **9** and distal surface **10** as planar, it is contemplated that the profile of either surface could be arcuate such that the surface is concave to facilitate the placement of surgical implements and reduce the likelihood of tearing the surface when instruments are angulated or convex to facilitate the removal of fluid from the surface.

[0014] It is further contemplated that body **1** is composed of a substantially compliant or compressible material such that when body **1** is inserted into an incision, the tissue disposed along the sides of the incision compresses body **1** with the resultant restorative force between body **1** and the tissue defining a sealing pressure therebetween. The sealing pressure forms a substantially fluid tight seal with its surrounding tissue which separates the volumes which body **1** traverses, e.g. between an insufflated cavity and the extra-corporeal environment.

[0015] A plurality of lumens **3, 4, and 5** traverses body **1** parallel to a longitudinal axis "A." Lumens **3, 4, and 5** may be configured to allow fluid communication between ends **9** and **10** or the insertion of surgical instruments (e.g. cannulas, trocars, endoscopes, etc.) therethrough.

[0016] As shown in **FIG. 1**, a plate **2** is disposed on proximal surface **9**. Further, plate **2** has openings **6, 7, and 8** extending therethrough.

[0017] As shown in **FIG. 2b**, plate **2** may be rotated relative to body **1** about the longitudinal axis "A" to an "open" position wherein openings **6, 7, and 8** and lumens **3, 4, and 5** align defining passages therebetween.

[0018] As shown in **FIG. 2a**, plate **2** may be rotated relative to body **1** about the longitudinal axis "A" such that the holes **6, 7, and 8** and lumens **3, 4, and 5** are configured in a "closed" position wherein no holes align with any lumen thereby obscuring the passage previously defined therebetween.

[0019] As shown in **FIG. 2c**, plate **2** may be rotated relative to body **1** about the longitudinal axis "A" such that the holes **6, 7, and 8** and lumens **3, 4, and 5** are configured in a transition or intermediate position wherein holes **6, 7, and 8** partially align with lumen **3, 4, and 5** thereby partially obscuring the passage previously defined therebetween.

[0020] It is further contemplated that there may be a plurality of holes and lumens in a specific arrangement corresponding to a plurality of positions along the rotational path of the plate. When so configured, rotation of the plate relative to the body about the longitudinal axis "A" to each unique position defines a unique configuration of passages which traverse the port in terms of both

number and location of the lumens. For example, the holes disposed the plate and body may be arranged in a pentagon centered at a position other than the longitudinal axis "A". Consequently, if the plate is then rotated relative to the body about longitudinal axis "A", there will be a first position in which two pairs of holes and lumens on the plate and body align defining two passages therebetween. Similarly, there will be a second position, in which a different hole and lumen on the plate and body will align defining only one passage.

[0021] It is further contemplated that there may be a spring or other biasing device disposed in the port **100** to bias the plate **2** toward a neutral position when no force is applied such that there is a passage between the plate **2** and body **1** in the neutral position.

[0022] Alternatively, there may be a spring or other biasing device disposed in the port **100** to bias plate **2** toward a neutral position such that when no force is applied holes **6**, **7**, and **8** and lumens **3**, **4**, and **5** do not align thereby obscuring the passage previously defined therebetween.

[0023] In an embodiment shown in FIG. 3a, a body **1a** has a stepped retaining shoulder **12** configured to abut a stepped ring **13** on a plate **2a** such that plate **2a** is retained relative to body **1** while being able to rotate relative to an axis parallel to a lumen **20a**.

[0024] It is further contemplated, as shown in FIG. 3b, that a plate **2b** has a stepped retaining shoulder **15** configured to abut a stepped ring **14** on a body **1b** such that plate **2b** is retained relative to body **1b** while being able to rotate relative to an axis parallel to a lumen **20b**.

[0025] It is further contemplated, as show in FIG 3c, that a plate **2c** has an angled stepped retaining shoulder **17** configured to abut an angled stepped ring **16** on a body **1c** such that plate **2c** is retained relative to body **1c** while being able to rotate relative to an axis parallel to a lumen **20c**.

[0026] It is further contemplated, as show in FIG 3d, that there is a pin **18** which traverses plate **2** and a body **1d** such that a plate **2d** is retained relative to body **1** while being able to rotate relative to an axis parallel to lumen **20d**.

[0027] It is further contemplated, as show in FIG 3e, that a body **1e** has a substantially conical or frustoconical protrusion **19** which traverses a plate **2e** such that plate **2e** is retained relative to body **1e** while being able to rotate relative to an axis parallel to a lumen **20e**.

[0028] It is further contemplated, as shown in FIG. 3f, that a body **1f** includes a proximal plate **2f** having hole **8f**, a distal plate **21** having a hole **23**, and a traverse pin **22**, and a lumen **20f**. Traverse pin **22** couples the movement of distal plate **21** and proximal plate **2f** such that hole **23** is aligned with lumen **20f** when proximal hole **8f** aligns with a lumen **20f** defining a passage therebetween.

[0029] It is further contemplated that the axis about which plate **2** rotates is eccentric relative to plate **2** and body **1**. It is further contemplated that, in various embodiments of the present invention, the seal anchor member

100 mat include multiple plates, each plate separately disposed so as to selectively cover and uncover different lumen, thereby providing a surgeon with additional flexibility, e.g., to cover a first lumen while leaving an instrument disposed within a second lumen, etc.

[0030] The use and function of seal anchor member **100** will be discussed during the course of a typical minimally invasive procedure.

[0031] Initially, the seal anchor member **100** is inserted into a tissue tract using known surgical techniques. Either subsequent or prior to the aforementioned insertion procedure, plate **2** on body **1** is configured in a first position, such that no holes on plate **2** align with any lumen disposed in body **1** thereby obscuring the lumen. In the course of this procedure, an operator may rotate plate **2** about the longitudinal axis "A" relative to body **1** into a second position such that one or more holes on plate **2** correspond to lumens on body **1** to define one or more passages therethrough. Thereafter, laparoscopic and endoscopic surgical instruments known in the art may be inserted into the lumen in order to carry out a surgical procedure.

[0032] During the course of the surgical procedure, an operator may replace or remove the instruments disposed in the port insert as needed.

[0033] Although the illustrative embodiments of the present disclosure have been described herein with reference to the accompanying drawings, it is to be understood that the disclosure is not limited to those precise embodiments, and that various other changes and modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the disclosure.

[0034] Those skilled in the art, having the benefit of the teachings of the present invention as herein and above set forth, may effect modifications thereto. Such modifications are to be construed as lying within the scope of the present invention, as defined by the appended claims.

[0035] Although specific features of the single port device are shown in some of the drawings and not in others, this is for convenience only as each feature may be combined with any or all of the other features in accordance with the aspects of the present disclosure. Other embodiments will occur to those skilled in the art and are within the following claims.

Claims

1. A surgical port comprising:

a compliant port body having at least one lumen extending therethrough;
a plate moveably connected to the port body, the plate defining at least one opening that is selectively alignable with the at least one lumen.

2. The surgical port of claim 1, wherein the plate is disposed in substantial perpendicular relation to the lumen.
3. The surgical port of claim 1 or claim 2, wherein the plate is rotatably moveable relative to the port body. 5
4. The surgical port of any preceding claim, wherein the plate is disposed on a proximal surface of the port body or wherein the plate is disposed on a distal surface of the port body. 10
5. The surgical port of any preceding claim, wherein the plate is movable through a discrete number of positions relative to the port body. 15
6. The surgical port of any preceding claim, wherein when the plate is in a first position relative to the port body, all of the at least one opening of the plate is in complete alignment with the at least one lumen of the port body and/or the surgical port of claim 1, wherein when the plate is in a second position relative to the port body, less than all of the at least one opening of the plate is in partial alignment with the at least one lumen of the port body. 20
25
7. The surgical port of any preceding claim, wherein the port body is formed of foam.
8. A surgical port comprising: 30
 a compliant port body having a lumen extending therethrough;
 a plate rotatably disposed relative to the lumen, the plate defining an opening that, at least once in the plate's rotational path, is selectively alignable with the lumen so as to define a passage through the lumen and the opening for a surgical instrument. 35
40
9. The surgical port of claim 8, further comprising a first structure configured to facilitate rotation the plate relative to a longitudinal axis of the port body.
10. The surgical port of claim 9, wherein the first structure comprises a pin. 45
11. The surgical port of any of claims 8 to 10, further comprising a second structure configured to maintain the relative position of the plate 50
12. The surgical port of claim 11, wherein the second structure is a shoulder disposed at the circumference of the plate which abuts a retaining shoulder on the body of the laparoscopic port. 55
13. The surgical port of claim 12, wherein the plate is located on a proximal surface of the port body.
14. The surgical port of any of claims 8 to 13, further comprising a second plate.
15. The surgical port of claim 14, wherein the second plate is located on a distal surface of the port body, preferably wherein the plate and the second plate are connected to each other so as to be moveable together relative to the port body.
16. The surgical port of any of claims 8 to 15, wherein there are multiple positions along a rotational path of the plate relative to the body such that a unique configuration of lumens therebetween is defined at each position.
17. The surgical port of any of claims 8 to 16, wherein the plate has a substantially arcuate convex profile or wherein the plate has a substantially arcuate concave profile.
18. The surgical port of any of claims 8 to 17, wherein the plate defines an indentation along the circumference of the plate to facilitate rotation of the plate relative to the body.

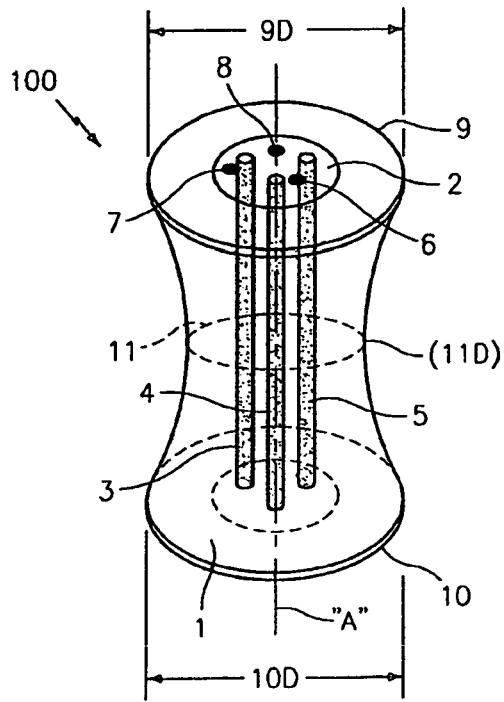


FIG. 1

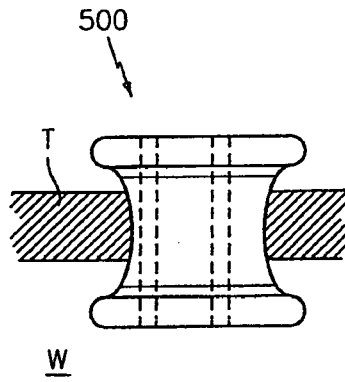


FIG. 1a




FIG. 2a




FIG. 2b




FIG. 2c

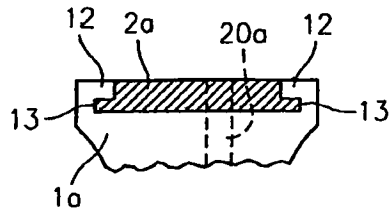


FIG. 3a




FIG. 3b




FIG. 3c




FIG. 3d




FIG. 3e

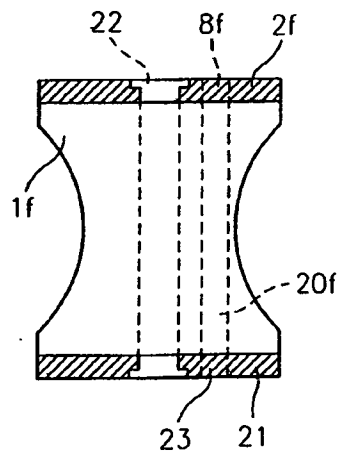


FIG. 3f



EUROPEAN SEARCH REPORT

Application Number
EP 10 25 1718

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,P	EP 2 226 026 A1 (ETHICON ENDO SURGERY INC [US]) 8 September 2010 (2010-09-08) * paragraph [0131] * * figures 34A,34B * -----	1-6,8,9, 14-16	INV. A61B17/34
A	US 2009/093752 A1 (RICHARD PAUL D [US] ET AL) 9 April 2009 (2009-04-09) * figures 15-18 *	1,8	
A	US 4 112 932 A (CHIULLI ROBERT D) 12 September 1978 (1978-09-12) * figures 1-3 * -----	1,8	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			A61B
Place of search		Date of completion of the search	Examiner
Munich		28 January 2011	Schießl, Werner
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

1
EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 10 25 1718

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-01-2011

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2226026	A1	08-09-2010	AU 2010200632 A1	23-09-2010
			CA 2695831 A1	06-09-2010
			CN 101822555 A	08-09-2010
			JP 2010207579 A	24-09-2010
			KR 20100100707 A	15-09-2010
			US 2010228094 A1	09-09-2010

US 2009093752	A1	09-04-2009	AT 476920 T	15-08-2010
			AU 2008229796 A1	23-04-2009
			CA 2640395 A1	05-04-2009
			CN 101401742 A	08-04-2009
			EP 2044889 A1	08-04-2009
			JP 2009101150 A	14-05-2009
			WO 2009046164 A1	09-04-2009

US 4112932	A	12-09-1978	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 61248035 A [0001]
- US 12244024 B [0012]

专利名称(译)	单端口装置包括选择性可闭合的开口		
公开(公告)号	EP2305151A1	公开(公告)日	2011-04-06
申请号	EP2010251718	申请日	2010-10-01
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	泰科医疗集团LP		
当前申请(专利权)人(译)	泰科医疗集团LP		
[标]发明人	STOPEK JOSHUA		
发明人	STOPEK, JOSHUA		
IPC分类号	A61B17/34		
CPC分类号	A61B17/3423 A61B17/0218 A61B17/3431 A61B2017/0225 A61B2017/3429 A61B2017/3433 A61B2017/3445 A61B2017/3447 A61B2017/347		
优先权	61/248035 2009-10-02 US 12/887802 2010-09-22 US		
其他公开文献	EP2305151B1		
外部链接	Espacenet		

摘要(译)

手术口 (100) 包括端口主体 (1) , 其具有穿过其延伸的内腔 (3,4,5) 和具有开口的板 (2) 。端口主体可以由泡沫制成。该端口构造使得板相对于端口主体的旋转对准开口和内腔 , 该内腔限定了穿过其中的通道 , 用于插入外科器械。

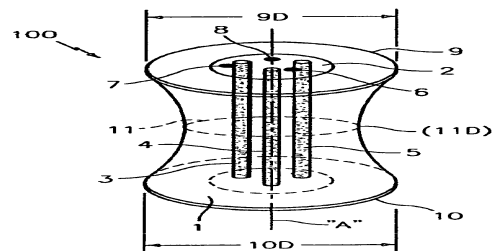


FIG. 1




FIG. 1a