



(11) **EP 2 348 950 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
18.03.2015 Bulletin 2015/12

(51) Int Cl.:
A61B 1/00 (2006.01) **A61B 17/00** (2006.01)
A61B 1/018 (2006.01) **A61B 17/04** (2006.01)

(21) Application number: **09745205.6**

(86) International application number:
PCT/US2009/062057

(22) Date of filing: **26.10.2009**

(87) International publication number:
WO 2010/051250 (06.05.2010 Gazette 2010/18)

(54) **ENDOSCOPE ENDCAP FOR SUTURING TISSUE**

ENDOSKOPENDKAPPE ZUM NÄHEN VON GEWEBE

CAPUCHON D'ENDOSCOPE POUR SUTURER DES TISSUS

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR

(30) Priority: **29.10.2008 US 109337 P**

(43) Date of publication of application:
03.08.2011 Bulletin 2011/31

(73) Proprietor: **Cook Medical Technologies LLC**
Bloomington, IN 47404 (US)

(72) Inventors:
• **HASHIBA, Kiyoshi**
0547-000 Sao Paulo (BR)

• **SURTI, Vihar, C.**
Winston-Salem
NC 27104 (US)

(74) Representative: **Wächter, Jochen et al**
Kroher-Strobel
Rechts- und Patentanwälte PartmbB
Bavariaring 20
80336 München (DE)

(56) References cited:
EP-A1- 1 629 780 EP-A2- 1 584 294
WO-A1-2004/069056 US-A1- 2003 236 535

EP 2 348 950 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to a medical system and a device for suturing tissue, and more particularly for endoscopically suturing openings in tissue.

BACKGROUND OF THE INVENTION

[0002] Openings or perforations in the walls of internal organs and vessels may be naturally occurring, or formed intentionally or unintentionally. These openings may be used to gain access to adjacent structures of the body, such techniques being commonly referred to as transluminal procedures. For example, culdoscopy was developed over 70 years ago, and involves transvaginally accessing the peritoneal cavity by forming an opening in the *cul de sac*. This access to the peritoneal cavity allows medical professionals to visually inspect numerous anatomical structures, as well as perform various procedures such as biopsies or other operations, such as tubal ligation. Many transluminal procedures for gaining access to various body cavities using other bodily lumens have also been developed. Natural orifices such as the mouth, nose, ear, anus or vagina may provide access to such bodily lumens and cavities. The bodily lumen(s) of the gastrointestinal tract are often endoscopically explored and can be utilized to provide access to the peritoneal cavity and other body cavities, all in a minimally invasive manner.

[0003] Compared to traditional open surgery or laparoscopic surgery, transluminal procedures are less invasive by eliminating abdominal incisions (or other exterior incisions) and incision related complications, while also reducing postoperative recovery time, reducing pain, and improving cosmetic appearance. At the same time, there remain challenges to transluminal procedures, including providing a suitable conduit to the openings and body cavities, robust medical devices that are maneuverable via the conduit and operable within the body cavity, sterility of the conduit, maintaining insufflation of the body cavity, proper closure of the opening, and prevention of infection. For example, when an opening is formed in a bodily wall of the gastrointestinal tract, such as in the stomach or intestines, spillage of the stomach contents, intestinal contents or other bodily fluids into the adjacent body cavity can occur. Travel of bacteria laden fluids outside of the gastrointestinal tract may cause unwanted and sometimes deadly infection.

[0004] In order to permanently close naturally occurring, intentionally or unintentionally formed perforations and allow the tissue to properly heal, numerous medical devices and methods have been developed employing sutures, adhesives, clips, tissue anchors and the like. One such class of devices aims to endoscopically close perforations, such as those within the gastrointestinal

tract. Accordingly, various medical devices have been proposed that attach to the endoscope to facilitate perforation closure. Some of these medical devices employ suction to orient the tissue for suturing or anchor placement, while others employ tissue graspers or other devices to orient the tissue. EP 1 584 294 A2 discloses a suture device for medical application that sutures biomedical tissue that has been suctioned by a suction device. The suture device is intended for use with an endoscope and comprises a tubular end cap having an interior space and a side port for receiving and locating the tissue within the interior space. Further, in the interior space a substantially T-shaped restricting member is positioned. The restricting member projects into the interior space and is provided to restrict contact between the endoscope and a pledget into which needles can be inserted.

BRIEF SUMMARY OF THE INVENTION

[0005] The present invention provides a medical device and a system for suturing a perforation in tissue, that may be used endoscopically and/or laparoscopically, and that offer simple, reliable and controllable placement of sutures around a perforation for complete closure thereof. The medical device, constructed in accordance with the teachings of the present invention, generally includes an endcap for use with an endoscope to suture an opening in tissue using a tissue anchor. The endcap has a tubular shape defined by an annular sidewall, and the sidewall defines an interior space. A side port is further defined by the annular sidewall and is in communication with the interior space. The side port is sized to receive and locate the tissue within the interior space for suturing. A support rib is positioned within the interior space and distal to the side port. The support rib extends laterally from a first position on the sidewall to a second position on the sidewall. The support rib and sidewall define a piercing aperture therebetween which is sized to be larger than a length of the tissue anchor, allowing the anchor to freely exit the interior space via the piercing aperture and side port. The support rib bisects a portion of the interior space that is distal to the side port. A proximal edge of the support rib defines a support surface. The support rib, together with a portion of the sidewall that is exposed by the side port, define an annular support surface for supporting the tissue.

[0006] According to more detailed aspects of the medical device, the piercing aperture and the side port are located on the same lateral side of the endcap and preferably engage each other over a line. The support rib is preferably oriented longitudinally. The endcap may also include an end wall, wherein the support rib preferably extends between the end wall and the first and second positions along the sidewall. In preferred constructions, a majority of the end wall is exposed to the endoscope permitting visualization through the end wall, and thus the endcap is preferably formed of an optical-grade plas-

tic.

[0007] The medical system, constructed in accordance with the teachings of the present invention, generally includes the medical device having the endcap, an endoscope, and a needle assembly. The endoscope has a working channel defining a longitudinal axis. The needle assembly has a needle defining a distal end and a needle lumen. A tissue anchor is slidably received within the needle lumen, and a suture is attached to the tissue anchor. The needle assembly is slidably received within the working channel of the endoscope. The endcap has an annular sidewall defining a proximal interior space, and an intermediate interior space, and a distal interior space. The proximal interior space is sized to receive a distal end of the endoscope. The side wall defines a side port in communication with the intermediate interior space and is sized to receive the tissue therein. The endcap includes a support rib bisecting the annular sidewall and the distal interior space to define an anchor ejection portion of the distal interior space. The anchor ejection portion is sized to receive the tissue anchor therein when the tissue anchor is in a lengthwise orientation.

[0008] According to more detailed aspects of the medical system, the anchor ejection portion of the distal interior space is circumferentially aligned with the working channel of the endoscope. The anchor ejection portion of the distal interior space is in direct communication with the side port without any intervening structure therebetween. The area between the ejection portion of the distal interior space and the intermediate interior space defines a piercing aperture that is preferably sized to pass the tissue anchor therethrough in its lengthwise orientation.

[0009] An application of the medical device and the system for suturing an opening in tissue is described in the following. The endcap of the medical device is fitted to the distal end of the endoscope. The endoscope and medical device are introduced to a first site proximate the opening, and the tissue is positioned within the intermediate interior space of the endcap. The needle assembly is advanced distally through the tissue and the piercing aperture. A tissue anchor is deployed into the distal interior space, and the needle assembly is retracted proximally through the tissue. The endoscope and medical device can then be moved along the periphery of the opening while the tissue remains within the intermediate interior space, whereby the tissue anchor passes directly back through the piercing aperture and exits the side port. The needle assembly is advanced distally through the tissue at a second site proximate the opening and a second tissue anchor is deployed. The free ends of the suture are tightened to close the opening.

[0010] According to more detailed aspects of the application of the medical device and the system, the free ends of the suture are pulled proximally to draw the tissue anchors closer together and close the opening. Preferably, the plurality of tissue anchors are connected to a single suture, and each tissue anchor is slidably attached to the suture. The application of the medical device and

the system may thus further comprise the steps of positioning the plurality of tissue anchors around the opening and tensioning the ends of the suture to reduce the distance between the tissue anchors and compress the tissue around the opening to close the opening in a purse-string fashion.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings incorporated in and forming a part of the specification illustrate several aspects of the present invention, and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 is a perspective view of a medical system constructed in accordance to the teachings of the present invention;

FIG. 2 is an exploded view of the medical system depicted in FIG. 1;

FIG. 3 is a cross-sectional view of a medical device forming a portion of the medical system depicted in FIGS. 1 and 2;

FIG. 4 is a cross-sectional view of the medical device depicted in FIG. 3;

FIG. 5 is a side view of a tissue anchor forming a portion of the medical system depicted in FIGS. 1 and 2;

FIGS. 6-13 are views illustrating use of the medical system depicted in FIGS. 1 and 2 to close an opening in tissue in accordance with teachings of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0012] In the present application, the term "proximal" refers to a direction that is generally towards a physician during a medical procedure, while the term "distal" refers to a direction that is generally towards a target site within a patient's anatomy during a medical procedure.

[0013] Turning now to the figures, FIGS. 1-2 depict a medical system 20 for suturing closed a perforation 10 in tissue 12 (see, e.g., FIG. 6), constructed in accordance with the teachings of the present invention. The medical system 20 generally comprises an endoscope 22, a needle assembly 24 and a medical device 26 adapted for use with the endoscope 22. The endoscope 22 may be any scope known to those skilled in the art, and therefore may have various lengths, diameters and functionality. The endoscope 22 generally defines a longitudinal axis 14, and a working channel 28 extends longitudinally through the endoscope 22. The needle assembly 24 is received within the working channel 28, and as best seen in FIG. 2 includes a needle 30 with a needle lumen 32 receiving one or more tissue anchors 34 having suture 36 connected thereto. A stylet 38 or other pushing element is typically fitted within the needle lumen 32 to eject the anchors 34, as is known in the art. Likewise, a needle

sheath 40 may also be provided to shield and control exposure of the piercing distal tip of the needle 30.

[0014] The medical device 26 generally includes an endcap 42 having a tubular or annular sidewall 44 defining an interior space 46 accessible via a side port 48 for suturing the tissue 12 with the needle assembly 24. A proximal portion 46p of the interior space 46 is sized to receive the distal end of the endoscope 22. The endcap 42 may be structured to frictionally engage the endoscope 22 for selective retention of the endcap 42 on the endoscope 22, although other means for connecting the endcap 42 to the endoscope 22 may be employed, as is known in the art. The endoscope 22 and medical device 26 are therefore adapted to be traversed through the body of a patient in this connected configuration shown in the figures.

[0015] Turning now to FIGS. 3 and 4, the medical device 26 has been shown in cross-section. The annular sidewall 44 defines an interior space 46, portions of which include the proximal interior space 46p, an intermediate interior space 46i and a distal interior space 46d. Adjacent the intermediate interior space 44i, the sidewall 44 defines the side port 48 through which the tissue 12 enters the interior space 46. The medical device 26 preferably also includes an endwall 50 located at the distal end of the sidewall 44. The endwall 50 encloses the distal interior space 46d, and is preferably constructed of an optical-grade plastic that permits the endoscope 22 to visualize through the endcap 42, discussed in greater detail herein.

[0016] The medical device 26 also includes a support rib 52 which bisects the annular sidewall 44 in the distal interior space 46d. On one side of the support rib 52, there is an anchor ejection portion 54 of the distal interior space 46d, which is defined by the space between the support rib 52 and sidewall 44. The anchor ejection portion 54 of the distal interior space 46d is sized to receive the needle assembly 24, and in particular the needle 30 and the tissue anchor 34. As best seen in FIG. 4, the support rib 52 extends from a first position 52a on the sidewall to a second position 52b on the sidewall. Thus, the support rib 52 and sidewall 44 also define a piercing aperture 56 therebetween, which is the area where the anchor ejection portion 54 meets the intermediate interior space 46i. The edge 58 of the support rib 52 defines a support surface, and together with the portion of the sidewall that is exposed by the side port 48, defines an annular support surface for supporting tissue during suturing, as will be described in further detail herein. The anchor ejection portion 54 meets the side port 48 over a line, namely the curved line of the piercing aperture 56 defined by the sidewall 44.

[0017] The piercing aperture 56 is semi-circular in shape (although it may have other shapes depending upon the tubular or annular shape of the endcap 42) defined by a largest diameter D_1 and a smallest diameter D_2 . Preferably the largest diameter D_1 is greater than a length L_A of the tissue anchor 34 (shown in FIG. 5) while

the smallest diameter D_2 is less than the length L_A of the tissue anchor 34. This helps to orient the tissue anchor 34 within the anchor ejection portion 54 of the distal interior space 46d. In another embodiment, both the largest diameter D_1 and the smallest diameter D_2 may be greater than a length L_A of the tissue anchor 34. In either case, the anchor ejection portion 54 of the distal interior space 46d is sized to receive the tissue anchor 34 therein while the tissue anchor 34 is in a lengthwise orientation, meaning its axis 37 extends laterally and is generally perpendicular to the longitudinal axis 14 (i.e. within about 15 degrees of perpendicular). Likewise, the tissue anchor 34 can pass through piercing aperture 56 in its lengthwise orientation. It will be recognized by those skilled in the art that the anchor ejection portion 54 of the distal interior space 46d is in direct and immediate communication with the side port 48 without any intervening structure therebetween, permitting easy passage of the tissue anchor 34.

[0018] The sidewall 44 preferably has a circular cross-sectional shape as shown, and the first and second positions 52a, 52b on the sidewall 44 span an arc A_{SR} of less than about 180 degrees, although in other embodiments A_{SR} can be about 180 degrees. The side port 48 spans a second arc A_{SP} which is greater than the first arc A_{SR} bisected by the support rib 52. Accordingly, and as best seen in FIG. 4, the edge 58 of the support rib 52 and the exposed sidewall 44 define a support surface that has a general D-shape (see, e.g., the un-hatched area shown in FIG. 4).

[0019] As best seen in FIG. 3, the support rib 52 also extends longitudinally and engages the endwall 50. The longitudinal length of the support rib 52 positions its support surface (namely edge 58) proximate the longitudinal position of the side port 48. In the depicted embodiment, the endwall 50 has a semi-spherical shape to provide an atraumatic tip to the medical system 20, although the endwall 50 may take other shapes such as flat or conical. Notably, a majority of the endwall 50 is exposed to the endoscope 22 (see, e.g., FIG. 8) thereby permitting visualization through the endwall 50. As such, the medical device 26, and in particular endcap 42, is preferably formed of an optical-grade plastic that permits visualization therethrough. Suitable plastics include but are not limited to acrylic, polyacrylates, polyacrylonitrile, polyvinylchloride, polyetherketone, and polyethylene.

[0020] As shown in FIG. 5, the tissue anchor 34 is preferably of a form where the anchor member is slidable relative to the suture 36. One preferred tissue anchor 34 shown in FIG. 5, and includes a wire loop 35 which slidably receives the suture 36. Further details of this and other tissue anchors are disclosed in U.S. Patent Application No. 11/946,565 filed November 25, 2007 and U.S. Patent No. 5,123,914 issued June 23, 1992.

[0021] One preferred method for utilizing the medical system 20 and its medical device 26 will now be described with reference to FIGS. 6-13. As shown in FIG. 6, an upper portion of the gastrointestinal tract 15, such

as the esophagus 16 and stomach 17, may be accessed via the mouth (not shown). A cutting instrument, with or without the aid of an endoscope or other visualization device, may be employed to form an opening 10 in the gastric wall or gastric tissue 12. Wire guides, dilators and other medical devices may be employed through the opening 10 to perform a transluminal procedure. These initial steps of the method have been described for reference purposes and to give context, and, it will be recognized that the medical system 20 of the present invention may be used to endoscopically suture any tissue within the body. Likewise, the medical system 20 may be employed through any natural orifice as (e.g., the mouth, anus, vagina, ears, nose.) as well as intentionally formed orifices such as those made during laparoscopic or similar procedures. The bodily opening 10 defined by the tissue of an internal bodily lumen may be intentionally formed or may be naturally occurring, and the internal bodily lumen may comprise a portion of the gastrointestinal tract or any other internal bodily lumen, as will be recognized by those skilled in the art.

[0022] The medical device 26 and its endcap 42 are fitted on the distal end of the endoscope 22 as shown in FIGS. 1 and 6. The medical system 20 is introduced to a position proximate the opening 10, and the distal portion of the endcap 42 is passed through the opening 10 as shown in FIG. 7. As shown in FIG. 8, the medical system 20 is manipulated such that the tissue 12 passes through the side port 48 and is positioned within the interior space 46, and in particular the intermediate interior space 46i. The visualization element 23 of the endoscope 22 is capable of visualizing the placement of the tissue 12 within the interior space 46, and when there is no tissue 12 within the interior space 46, it can visualize distally beyond the medical device 26 through the endwall 50 of the endcap 42.

[0023] With the medical system 20 positioned at a first site along the tissue 12 proximate the opening 10 as shown in FIG. 8, the needle assembly 24 and its needle 30 will be advanced distally through the working channel 28 of the endoscope 22, through the tissue 12, through the piercing aperture 56 and into the anchor ejection portion 54 of the distal interior space 46d. Notably, the proximal edge 58 of the support rib 52, as well as the exposed portion of the sidewall 44, support the tissue 12 as the needle 30 is advanced therethrough. At the proximal end of the medical system 20, the stylet 38 of needle assembly 24 may be moved relative to the needle 30 to deploy the tissue anchor 34 into the anchor ejection portion 54 of the distal interior space 46d.

[0024] The needle assembly 24 may then be retracted proximally through the working channel 28 of the endoscope 22 such that it is removed from the tissue 12 while leaving the tissue anchor 34 on the distal side of the tissue 12, as shown in FIG. 10. The suture 36 will pass through the tissue 12, and one end of the suture will continue through the working channel 28 and/or the needle 30 for connection to additional tissue anchors 34 and to the

proximal end of the medical system 20. The other free end of the suture 36 will pass through the side port 48 and along the exterior of the medical system 20 to a location outside of the body, whereby both ends of the suture 36 may be manipulated by the medical professional.

[0025] Due to the construction of the medical device 26 and its endcap 42, the tissue anchor 34 is capable of moving through the anchor ejection portion 54 of the distal interior space 46d in its lengthwise orientation shown in FIG. 10. Likewise, the piercing aperture 56 and the side port 48 permit the tissue anchor 34 to pass directly therethrough such that the medical system 20 may be slid along the periphery of the opening 10 in the tissue 12 to a second site proximate the opening 10. When the medical system is moved, the tissue anchor 34 will simply exit the medical device 26 via the side port 48 and remain at the first site where it was deployed. The medical system 20 need not be slid along the periphery of the opening 10, but may also be moved laterally away from the tissue 12 so that it exits the interior space 46, whereafter a second site may be identified and targeted for deployment of additional tissue anchors 34.

[0026] As shown in FIG. 11, multiple tissue anchors 34 may be deployed around the periphery of the opening 10 in the tissue 12, while the suture 36 largely remains on the proximal side of the tissue 12. The plurality of tissue anchors 34 may be deployed around the opening 10, such as in a generally circular configuration, although any number and any configuration of anchor deployment may be used, such as zig-zag configurations. Both of the free ends 36a, 36b of the suture 36 extend proximally through the bodily lumen and external orifice for individual manipulation by the medical professional to close the opening 10. In particular, the ends 36a, 36b may be tensioned to reduce the distance between the tissue anchors 34 and compress the tissue 12 around the opening 10 to close the opening 10 in a purse-string fashion, as shown in FIG. 13. A suture lock 60 may be employed to connect the ends 36a, 36b of the suture 36 together and maintain the tension thereon, although the suture 36 may also be tied using knots or other techniques or devices as will be readily appreciated by those skilled in the art. Several exemplary suture locks are disclosed in U.S. Patent Application Nos. 12/125,525 filed May 22, 2008 and 12/191,001 filed August 13, 2008.

[0027] It will be recognized by those skilled in the art that, while the applications described above generally include placing the tissue devices in tissue through an internal bodily lumen, it will be recognized that the systems and devices may be used on any layer of material (e.g. fabrics, cloth, polymers, elastomers, plastics and rubber) that may or may not be associated with a human or animal body and a bodily lumen. For example, the systems and devices can find use in laboratory and industrial settings for placing devices through one or more layers of material that may or may not find application to the human or animal body, and likewise closing holes or perforations in layers of material that are not bodily tissue.

[0028] The foregoing description of various embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Numerous modifications or variations are possible in light of the above teachings. The embodiments discussed were chosen and described to provide the best illustration of the principles of the invention and its practical application to thereby enable one of ordinary skill in the art to utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. All such modifications and variations are within the scope of the invention as determined by the appended claims when interpreted in accordance with the breadth to which they are fairly, legally, and equitably entitled.

Claims

1. A medical device (26) for use with an endoscope (22) to suture an opening (10) in tissue (12) using a tissue anchor (34), the medical device (26) comprising:
 - an endcap (42) having a tubular shape defined by an annular sidewall (44), the sidewall (44) defining an interior space (46);
 - a side port (48) defined by the annular sidewall (44), the side port (48) in communication with the interior space (46), the side port (48) sized to receive and locate the tissue (12) within the interior space (46);
 - a support rib (52) positioned within the interior space (46) and distal to the side port (48), the support rib (52) extending laterally from a first position (52a) on the sidewall (44) to a second position (52b) on the sidewall (44) so that the support rib (52) bisects a portion of the interior space (46) that is distal to the side port (48), the support rib (52) and sidewall (44) defining a piercing aperture (56) therebetween, the piercing aperture (56) having a largest diameter (D_1) that is greater than a length of the tissue anchor (34); and
 - an anchor ejection portion (54) of the interior space (46) on one side of the support rib (52) defined by the space between the support rib (52) and the sidewall (44);
 - wherein a proximal edge (58) of the support rib (52) defines a support surface to support the tissue (12) during suturing;
 - characterized in that**
 - the proximal edge (58) of the support rib (52), together with a portion of the sidewall (44) that is exposed by the side port (48), define an annular support surface for supporting the tissue (12).
2. The medical device (26) of claim 1, wherein the piercing aperture (56) and the side port (48) are located on the same lateral side of the endcap (42).
3. The medical device (26) of claim 1, wherein the piercing aperture (56) and the side port (48) meet along a line.
4. The medical device (26) of claim 1, wherein the endcap (42) further includes a distal endwall (50), and wherein the support rib (52) extends longitudinally to the endwall (50).
5. The medical device (26) of claim 4, wherein a majority of the endwall (50) is exposed to the endoscope (22) and constructed of a material permitting visualization through the endwall (50).
6. The medical device (26) of claim 1, wherein the proximal edge (58) of the support rib (52) is coplanar with the portion of the sidewall (44) that is exposed by the side port (48).
7. The medical device (26) of claim 1, wherein the sidewall (44) has a circular cross-sectional shape, and wherein the first (52a) and second (52b) positions on the sidewall (44) span an arc (A_{SR}) of less than about 180 degrees.
8. The medical device (26) of claim 1, wherein the sidewall (44) has a circular cross-sectional shape, and wherein the first (52a) and second (52b) positions on the sidewall (44) span a first arc (A_{SR}), and wherein the side port (48) spans a second arc (A_{SP}), the first arc (A_{SR}) being less than the second arc (A_{SP}).
9. The medical device (26) of claim 1, wherein the smallest diameter (D_2) of the piercing aperture (56) is less than a length of the tissue anchor (34).
10. A medical system (20) comprising the medical device (26) of any of the preceding claims, the medical system (20) further comprising:
 - an endoscope (22) having a working channel (28) and defining a longitudinal axis (14); and
 - a needle assembly (24) having a needle (30) defining a distal end and a needle lumen (32), a tissue anchor (34) slidably received within the needle lumen (32), and a suture (36) attached to the tissue anchor (34), the needle assembly (24) being slidably received within the working channel (28) of the endoscope (22);
 - the interior space (46) denoted by a proximal interior space (46p), an intermediate interior space (46i), and a distal interior space (46d), the proximal interior space (46p) sized to receive a distal end of the endoscope (22), the side port

(48) in communication with the intermediate interior space (46i), the support rib (52) bisecting the distal interior space (46d) to define the anchor ejection portion (54) of the distal interior space (46d).

11. The medical system (20) of claim 10, wherein the anchor ejection portion (54) of the distal interior space (46d) is circumferentially aligned with the working channel (28) of the endoscope (22).

12. The medical system (20) of claim 10, wherein the anchor ejection portion (54) of the distal interior space (46d) is in direct communication with the side port (48) without any intervening structure therebetween.

Patentansprüche

1. Medizinische Vorrichtung (26) zur Verwendung mit einem Endoskop (22) zum Zunähen einer Öffnung (10) in Gewebe (12) unter Verwendung eines Gewebeankers (34), wobei die medizinische Vorrichtung (26) umfasst:

eine Endkappe (42), die eine röhrenförmige Form aufweist, die durch eine ringförmige Seitenwand (44) definiert wird, wobei die Seitenwand (44) einen Innenraum (46) definiert; einen Seitenport (48), der durch die ringförmige Seitenwand (44) definiert ist, wobei der Seitenport (48) in Verbindung mit dem Innenraum (46) steht, wobei der Seitenport (48) derart dimensioniert ist, dass er das Gewebe (12) innerhalb des Innenraums (46) aufnimmt und fixiert; eine Stützrippe (52), die innerhalb des Innenraums (46) und distal zu dem Seitenport (48) angeordnet ist, wobei sich die Stützrippe (52) seitlich von einer ersten Position (52a) an der Seitenwand (44) zu einer zweiten Position (52b) an der Seitenwand (44) erstreckt, so dass die Stützrippe (52) einen Abschnitt des Innenraums (46) halbiert, der distal zu dem Seitenport (48) ist, wobei die Stützrippe (52) und die Seitenwand (44) eine dazwischenliegende Durchstechöffnung (56) definieren, wobei die Durchstechöffnung (56) einen maximalen Durchmesser (D_1) aufweist, der größer ist als eine Länge des Gewebeankers (34); und einen Anker auswerfungsabschnitt (54) des Innenraums (46) auf einer Seite der Stützrippe (52), der durch den Raum zwischen der Stützrippe (52) und der Seitenwand (44) definiert ist; wobei eine proximale Kante (58) der Stützrippe (52) eine Stützfläche zum Stützen des Gewebes (12) während des Vernähens definiert; **dadurch gekennzeichnet, dass**

die proximale Kante (58) der Stützrippe (52) zusammen mit einem Abschnitt der Seitenwand (44), der von dem Seitenport (48) freigelegt ist, eine ringförmige Stützfläche zum Stützen des Gewebes (12) definiert.

2. Medizinische Vorrichtung (26) nach Anspruch 1, wobei die Durchstechöffnung (56) und der Seitenport (48) an der gleichen seitlichen Seite der Endkappe (42) angeordnet sind.

3. Medizinische Vorrichtung (26) nach Anspruch 1, wobei sich die Durchstechöffnung (56) und der Seitenport (48) entlang einer Linie treffen.

4. Medizinische Vorrichtung (26) nach Anspruch 1, wobei die Endkappe (42) weiterhin eine distale Stirnwand (50) aufweist, und wobei sich die Stützrippe (52) in Längsrichtung zu der Stirnwand (50) erstreckt.

5. Medizinische Vorrichtung (26) nach Anspruch 4, wobei ein Großteil der Stirnwand (50) gegenüber dem Endoskop (22) freigelegt ist und aus einem Material gebildet ist, das ein Durchschauen durch die Stirnwand (50) zulässt.

6. Medizinische Vorrichtung (26) nach Anspruch 1, wobei die proximale Kante (58) der Stützrippe (52) koplanar mit dem Abschnitt der Seitenwand (44) ist, der von dem Seitenport (48) freigelegt ist.

7. Medizinische Vorrichtung (26) nach Anspruch 1, wobei die Seitenwand (44) eine runde Querschnittsform aufweist und wobei die erste (52a) und die zweite (52b) Position an der Seitenwand (44) einen Kreisbogen (A_{SR}) von weniger als etwa 180 Grad aufspannen.

8. Medizinische Vorrichtung (26) nach Anspruch 1, wobei die Seitenwand (44) eine runde Querschnittsform aufweist und wobei die erste (52a) und die zweite (52b) Position an der Seitenwand (44) einen ersten Bogen (A_{SR}) aufspannen und wobei der Seitenport (48) einen zweiten Kreisbogen (A_{SP}) aufspannt, wobei der erste Kreisbogen (A_{SR}) kleiner ist als der zweite Kreisbogen (A_{SP}).

9. Medizinische Vorrichtung (26) nach Anspruch 1, wobei der kleinste Durchmesser (D_2) der Durchstechöffnung (46) kleiner ist als eine Länge des Gewebeankers (34).

10. Medizinisches System (20), das die medizinische Vorrichtung (26) nach einem der vorangehenden Ansprüche umfasst, wobei das medizinische System (20) weiterhin umfasst:

ein Endoskop (22), das einen Arbeitskanal (28) aufweist und eine Längsachse (14) definiert; und
 eine Nadelanordnung (24), die eine Nadel (30), die ein distales Ende und ein Nadellumen (32) definiert, einen Gewebeancker (34), der verschiebbar innerhalb des Nadellumens (32) aufgenommen ist, und einen Faden (36) aufweist, der an dem Gewebeancker (34) befestigt ist, wobei die Nadelanordnung (24) verschiebbar innerhalb des Arbeitskanals (28) des Endoskops (22) aufgenommen ist;
 wobei sich der Innenraum (46) aus einem proximalen Innenraum (46p), einem mittleren Innenraum (46i) und einem distalen Innenraum (46d) zusammensetzt, wobei der proximale Innenraum (46p) derart dimensioniert ist, dass er ein distales Ende des Endoskops (22) aufnimmt, wobei der Seitenport (48) in Verbindung mit dem mittleren Innenraum (46i) steht, wobei die Stützrippe (52) den distalen Innenraum (46d) halbiert, um den Anker auswerfabschnitt (54) des distalen Innenraums (46d) zu definieren.

11. Medizinisches System (20) nach Anspruch 10, wobei der Anker auswerfabschnitt (54) des distalen Innenraums (46d) mit dem Arbeitskanal (28) des Endoskops (22) in Umfangsrichtung fluchtet.
12. Medizinisches System (20) nach Anspruch 10, wobei der Anker auswerfabschnitt (54) des distalen Innenraums (46d) ohne eine dazwischenliegende intervenierende Struktur in direkter Verbindung mit dem Seitenport (48) steht.

Revendications

1. Dispositif médical (26) destiné à être utilisé avec un endoscope (22) dans le but de suturer une ouverture (10) dans un tissu (12) au moyen d'un élément de fixation au tissu (34), le dispositif médical (26) comprenant :
- un embout (42) présentant une forme tubulaire définie par une paroi latérale annulaire (44), la paroi latérale (44) définissant un espace intérieur (46) ;
 un orifice latéral (48) défini par la paroi latérale annulaire (44), l'orifice latéral (48) communiquant avec l'espace intérieur (46), l'orifice latéral (48) étant dimensionné afin de recevoir et de positionner le tissu (12) à l'intérieur de l'espace intérieur (46) ;
 une partie saillante de support (52) positionnée à l'intérieur de l'espace intérieur (46) et distale vis-à-vis de l'orifice latéral (48), la partie saillante de support (52) s'étendant latéralement d'une

première position (52a) sur la paroi latérale (44) à une seconde position (52b) sur la paroi latérale (44) de telle sorte que la partie saillante de support (52) divise en deux une partie de l'espace intérieur (46) qui est distale vis-à-vis de l'orifice latéral (48), la partie saillante de support (52) et la paroi latérale (44) définissant un trou de transperçement (56) entre elles, le trou de transperçement (56) présentant un diamètre maximal (D_1) qui est supérieur à une longueur de l'élément de fixation au tissu (34) ; et
 une partie d'éjection d'élément de fixation (54) de l'espace intérieur (46) sur un côté de la partie saillante de support (52) définie par l'espace entre la partie saillante de support (52) et la paroi latérale (44) ;
 un bord proximal (58) de la partie saillante de support (52) définissant une surface de support destinée à supporter le tissu (12) lors de la suture ;

caractérisé en ce que

le bord proximal (58) de la partie saillante de support (52), conjointement avec une partie de la paroi latérale (44) qui est exposée par le biais de l'orifice latéral (48), définissent une surface de support annulaire destinée à supporter le tissu (12).

2. Dispositif médical (26) selon la revendication 1, dans lequel le trou de transperçement (56) et l'orifice latéral (48) sont situés sur le même côté latéral de l'embout (42).
3. Dispositif médical (26) selon la revendication 1, dans lequel le trou de transperçement (56) et l'orifice latéral (48) se rejoignent le long d'une ligne.
4. Dispositif médical (26) selon la revendication 1, dans lequel l'embout (42) comprend en outre une paroi d'extrémité distale (50), et dans lequel la partie saillante de support (52) s'étend longitudinalement jusqu'à la paroi d'extrémité (50).
5. Dispositif médical (26) selon la revendication 4, dans lequel une majeure partie de la paroi d'extrémité (50) est exposée à l'endoscope (22) et composée d'un matériau permettant une visualisation à travers la paroi d'extrémité (50).
6. Dispositif médical (26) selon la revendication 1, dans lequel le bord proximal (58) de la partie saillante de support (52) est coplanaire avec la partie de la paroi latérale (44) qui est exposée par le biais de l'orifice latéral (48).
7. Dispositif médical (26) selon la revendication 1, dans lequel la paroi latérale (44) présente une forme en section transversale circulaire, et dans lequel les

première (52a) et seconde (52b) positions sur la paroi latérale (44) délimitent un arc (A_{SR}) inférieur à environ 180 degrés.

8. Dispositif médical (26) selon la revendication 1, dans lequel la paroi latérale (44) présente une forme en section transversale circulaire, et dans lequel les première (52a) et seconde (52b) positions sur la paroi latérale (44) délimitent un premier arc (A_{SR}), et dans lequel l'orifice latéral (48) délimite un second arc (A_{SP}), le premier arc (A_{SR}) étant inférieur au second arc (A_{SP}). 5
10
9. Dispositif médical (26) selon la revendication 1, dans lequel le diamètre minimal (D_2) du trou de transpercement (56) est inférieur à une longueur de l'élément de fixation au tissu (34). 15
10. Système médical (20) comprenant le dispositif médical (26) selon l'une quelconque des revendications précédentes, le système médical (20) comprenant en outre : 20
- un endoscope (22) comportant un canal opérateur (28) et définissant un axe longitudinal (14) ; 25
et un ensemble d'aiguille (24) comportant une aiguille (30) définissant une extrémité distale et une lumière d'aiguille (32), un élément de fixation au tissu (34) reçu à coulissement à l'intérieur de la lumière d'aiguille (32), et un fil de suture (36) attaché à l'élément de fixation au tissu (34), l'ensemble d'aiguille (24) étant reçu à coulissement à l'intérieur du canal opérateur (28) de l'endoscope (22) ; 30
l'espace intérieur (46) représenté par un espace intérieur proximal (46p), un espace intérieur intermédiaire (46i) et un espace intérieur distal (46d), l'espace intérieur proximal (46p) étant dimensionné afin de recevoir une extrémité distale de l'endoscope (22), l'orifice latéral (48) communiquant avec l'espace intérieur intermédiaire (46i), la partie saillante de support (52) divisant en deux l'espace intérieur distal (46d) de façon à définir la partie d'éjection d'élément de fixation (54) de l'espace intérieur distal (46d). 35
40
45
11. Système médical (20) selon la revendication 10, dans lequel la partie d'éjection d'élément de fixation (54) de l'espace intérieur distal (46d) est alignée au niveau de la circonférence avec le canal opérateur (28) de l'endoscope (22). 50
12. Système médical (20) selon la revendication 10, dans lequel la partie d'éjection d'élément de fixation (54) de l'espace intérieur distal (46d) communique directement avec l'orifice latéral (48), aucune structure intermédiaire n'étant présente entre eux. 55

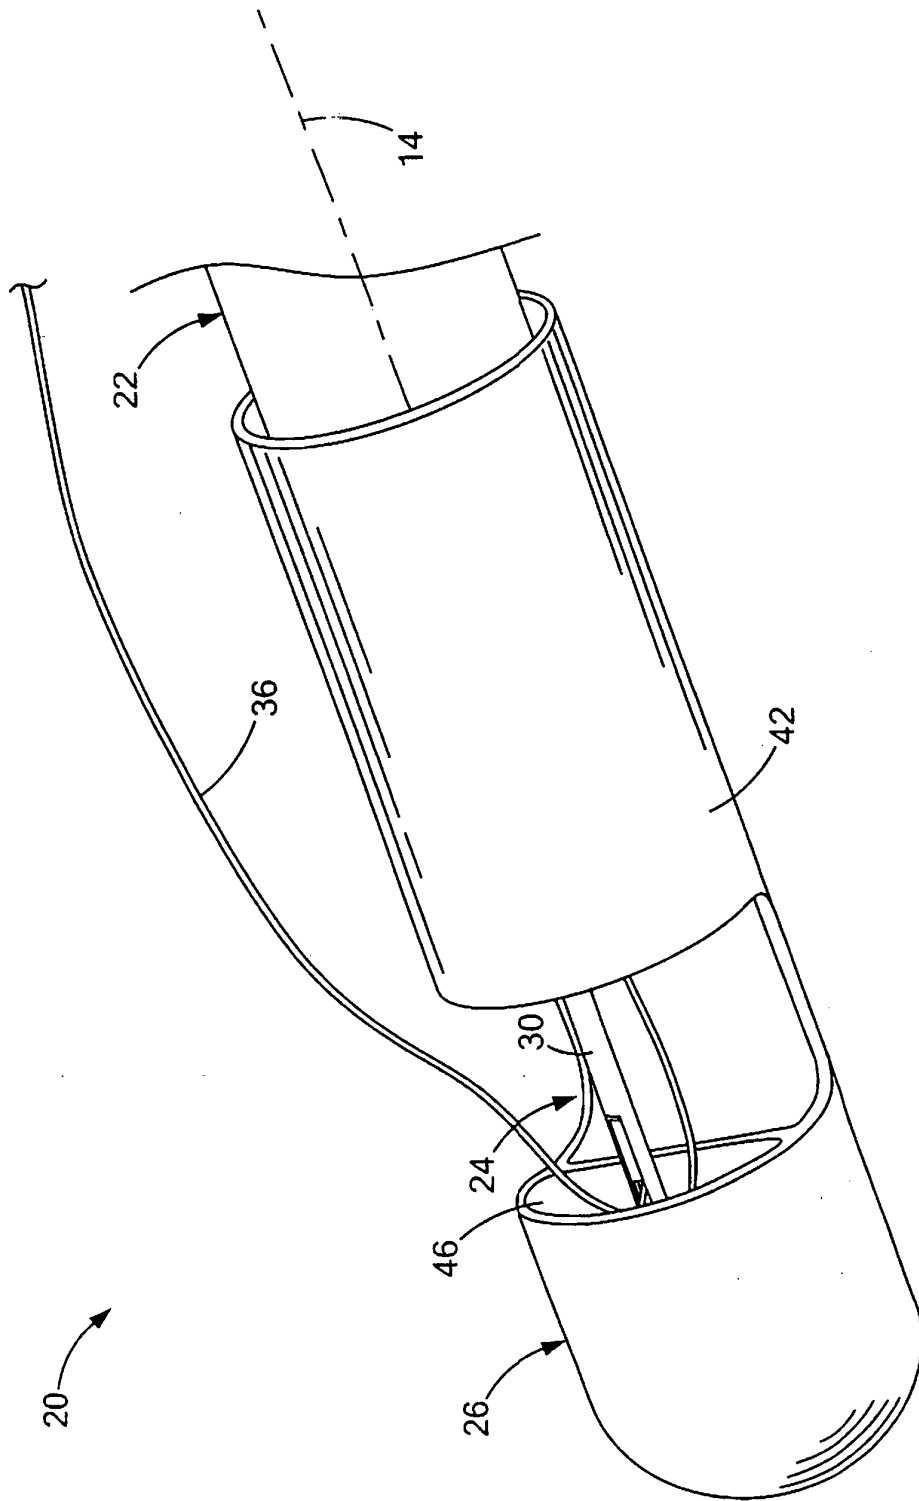


Fig. 1

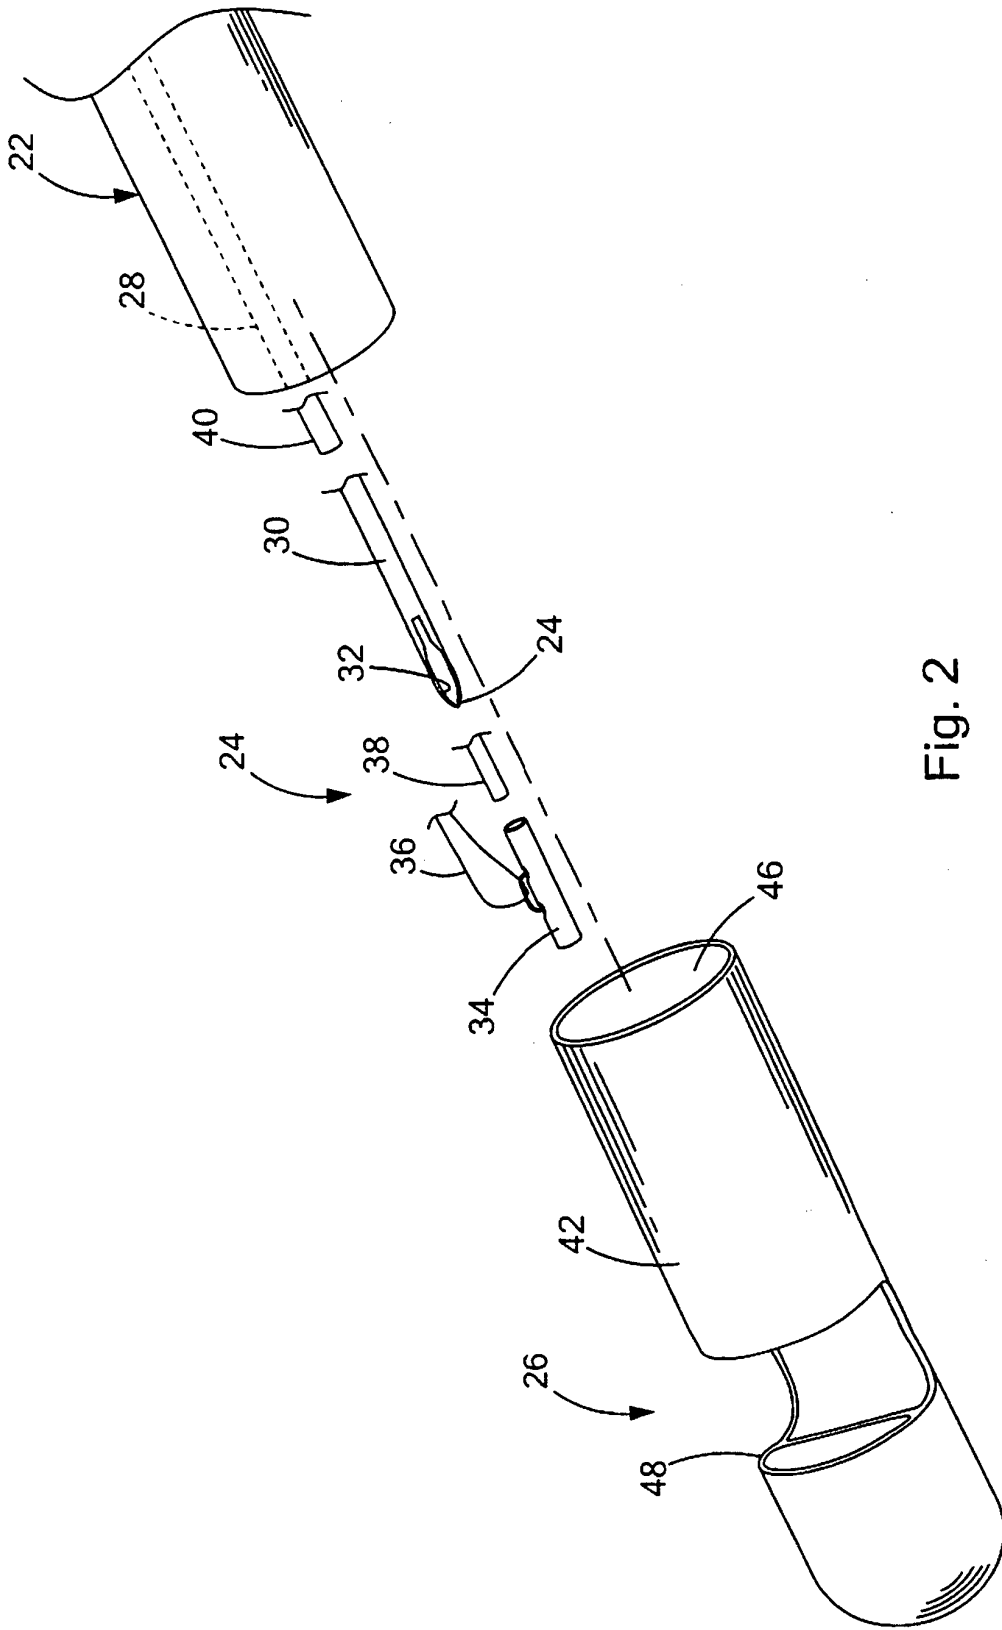


Fig. 2

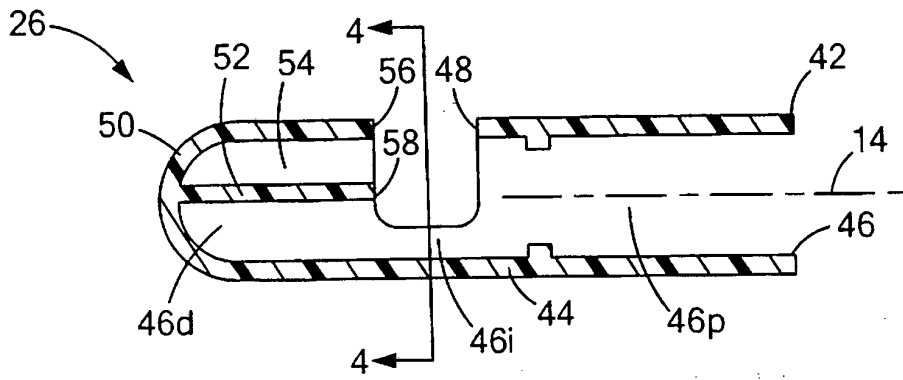


FIG. 3

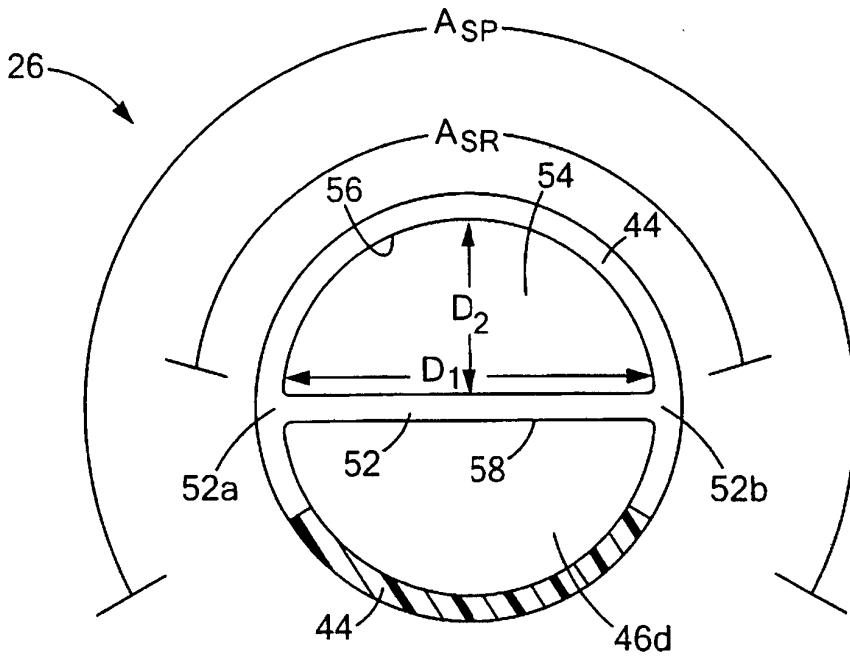


FIG. 4

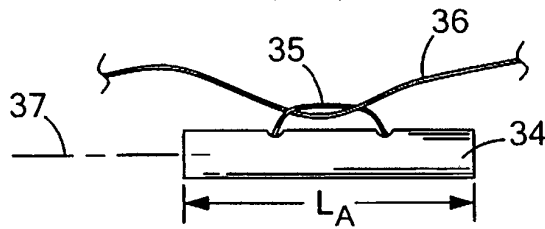


FIG. 5

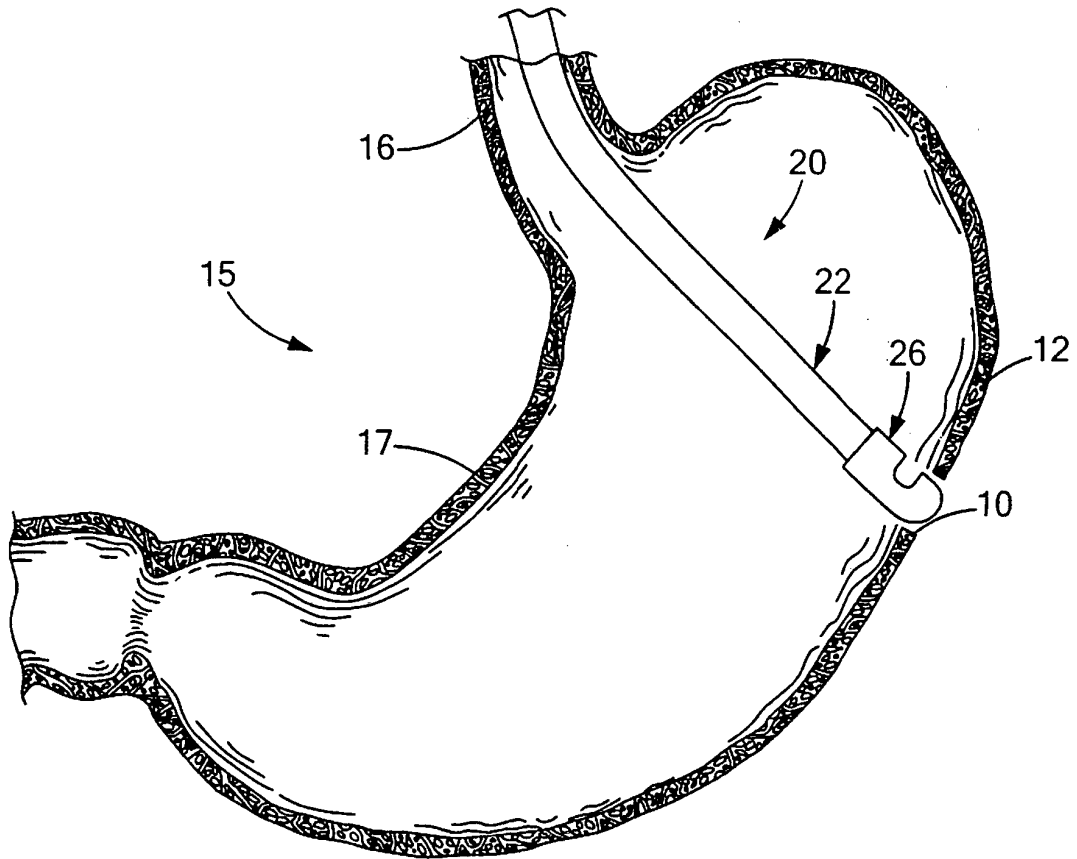


FIG. 6

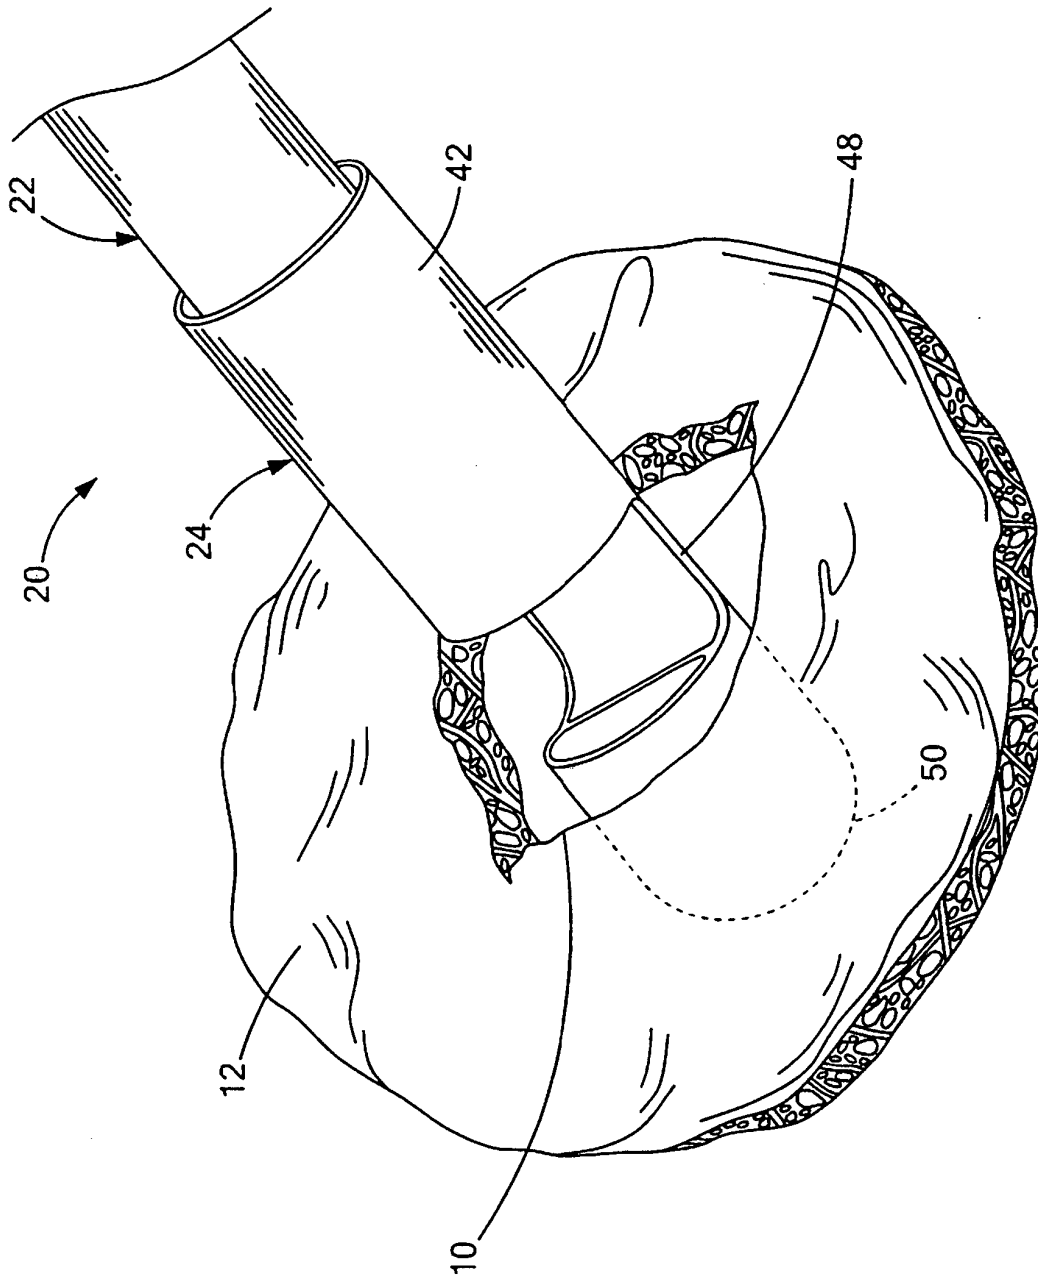


Fig. 7

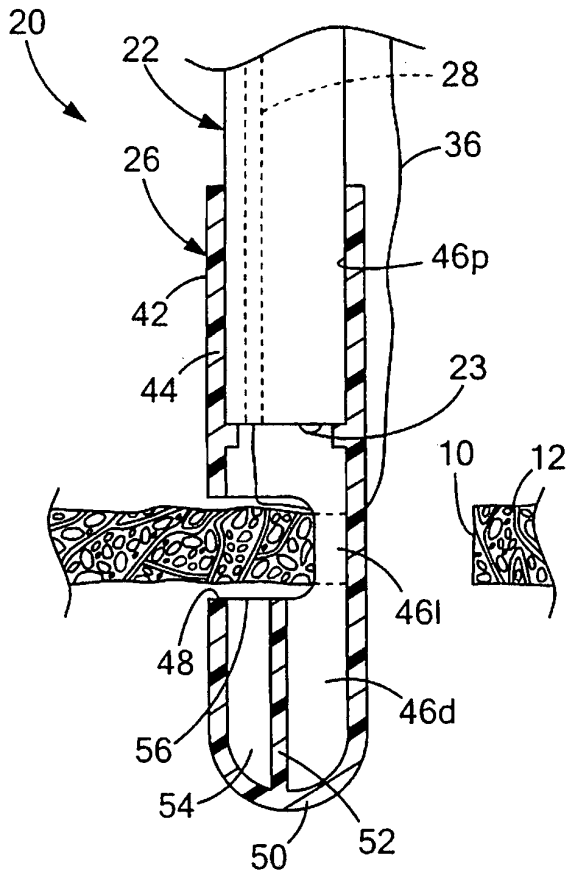


FIG. 8

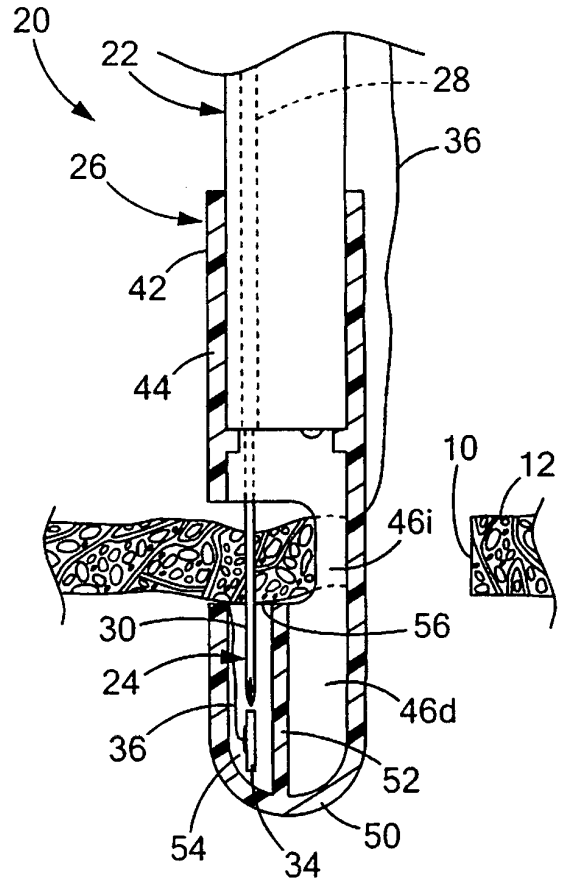


FIG. 9

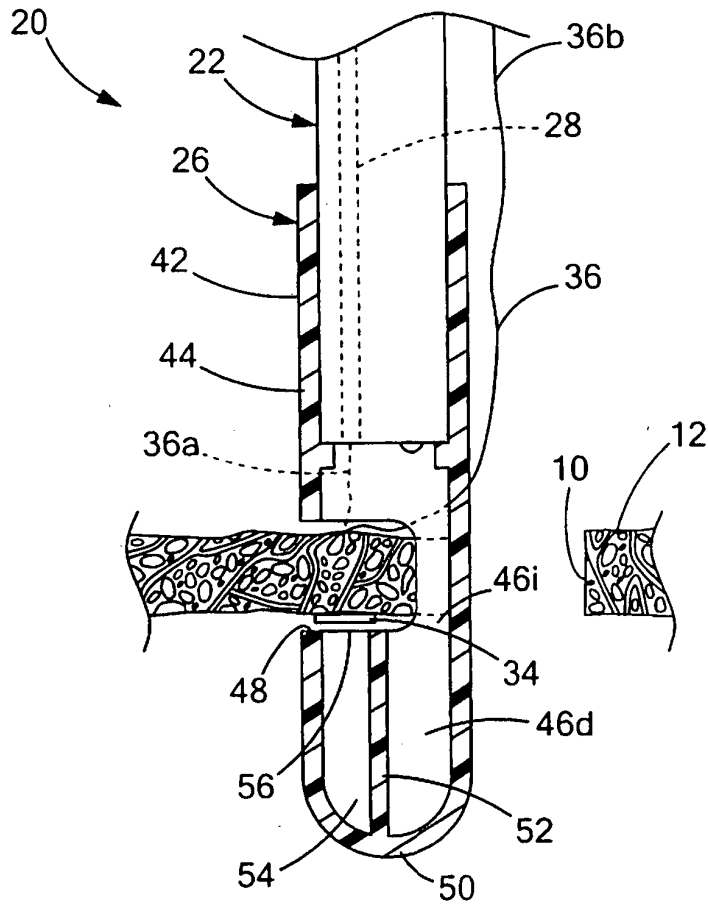


FIG. 10

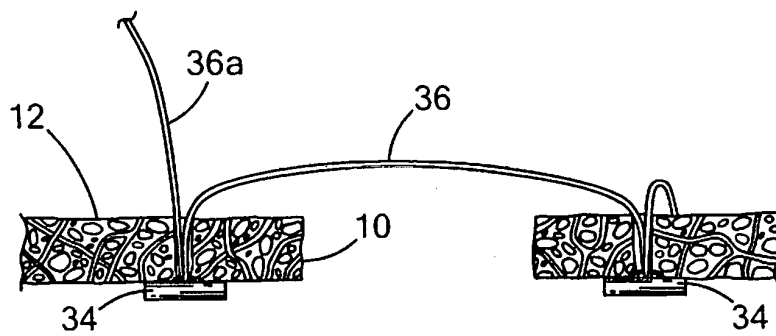


FIG. 11

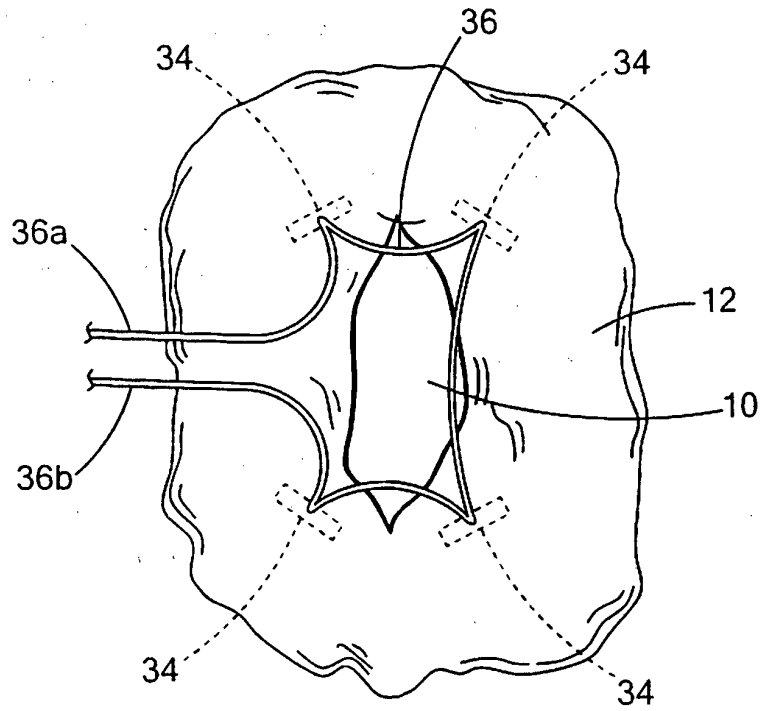


FIG. 12

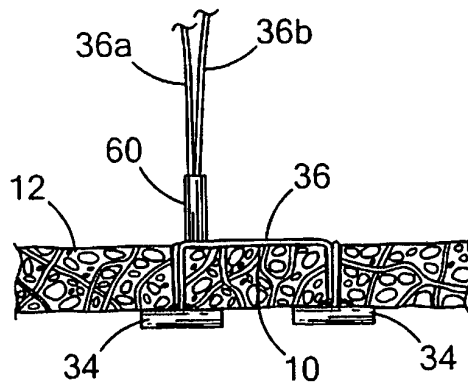


FIG. 13

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1584294 A2 [0004]
- US 94656507 A [0020]
- US 5123914 A [0020]
- US 12552508 A [0026]
- US 12191001 B [0026]

专利名称(译)	用于缝合组织的内窥镜端盖		
公开(公告)号	EP2348950B1	公开(公告)日	2015-03-18
申请号	EP2009745205	申请日	2009-10-26
[标]申请(专利权)人(译)	WILSONCOOK医疗		
申请(专利权)人(译)	WILSON-COOK MEDICAL INC.		
当前申请(专利权)人(译)	库克医疗技术有限责任公司		
[标]发明人	HASHIBA KIYOSHI SURTI VIHAR C		
发明人	HASHIBA, KIYOSHI SURTI, VIHAR, C.		
IPC分类号	A61B1/00 A61B17/00 A61B1/018 A61B17/04		
CPC分类号	A61B17/0401 A61B1/0008 A61B1/00087 A61B1/018 A61B17/0487 A61B2017/00296 A61B2017/0409 A61B2017/0417		
优先权	61/109337 2008-10-29 US		
其他公开文献	EP2348950A1		
外部链接	Espacenet		

摘要(译)

公开了用于在组织中缝合穿孔的医疗系统，装置和方法，其可以通过内窥镜和/或腹腔镜使用，并且提供围绕穿孔的缝合线的简单，可靠和可控的放置以完全闭合。医疗装置的一个实施例通常包括端盖，其与内窥镜一起使用以使用组织锚固件缝合组织中的开口。端盖具有由环形侧壁限定的管状形状，并且侧壁限定内部空间。侧端口由环形侧壁进一步限定并且与内部空间连通。侧端口的尺寸适于接收和定位内部空间内的组织以进行缝合。支撑肋定位在内部空间内并且远离侧端口。支撑肋和侧壁在其间限定了刺穿孔，该刺穿孔支撑被缝合的组织。

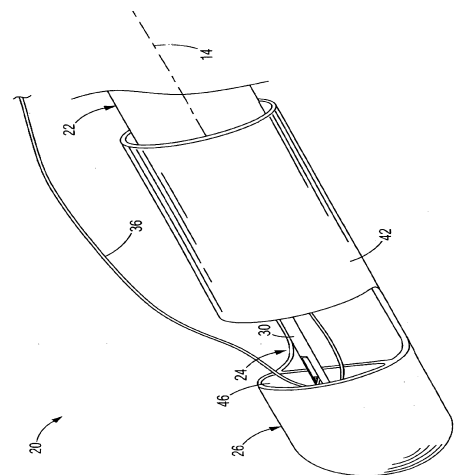


Fig. 1