

(19)



(11)

EP 2 621 347 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
24.01.2018 Bulletin 2018/04

(51) Int Cl.:
A61B 17/00 (2006.01)

(21) Application number: **11830071.4**

(86) International application number:
PCT/US2011/054647

(22) Date of filing: **03.10.2011**

(87) International publication number:
WO 2012/045087 (05.04.2012 Gazette 2012/14)

(54) LAPAROSCOPIC TISSUE RETRIEVAL SYSTEM

LAPAROSKOPISCHES GEWEBEENTNAHMESYSTEM

SYSTÈME DE RÉCUPÉRATION LAPAROSCOPIQUE DE TISSU

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **KAHLE, Henry**
Rancho Santa Margarita, CA 92688 (US)

(30) Priority: **01.10.2010 US 389107 P**

(74) Representative: **Dolleymores**
9 Rickmansworth Road
Watford, Hertfordshire WD18 0JU (GB)

(43) Date of publication of application:
07.08.2013 Bulletin 2013/32

(56) References cited:
GB-A- 2 460 099 US-A- 5 312 416
US-A- 5 312 416 US-A- 5 341 815
US-A- 5 480 404 US-A- 5 524 633
US-A1- 2008 033 451 US-B1- 6 206 889

(73) Proprietor: **Applied Medical Resources Corporation**
Rancho Santa Margarita, CA 92688 (US)

(72) Inventors:
• **TAYLOR, Scott, V.**
Rancho Santa Margarita, CA 92688 (US)

EP 2 621 347 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionBACKGROUND OF THE INVENTIONFIELD OF THE INVENTION

[0001] The present application relates generally to apparatus for capturing and retrieving tissue from body cavities and in particular to a specimen retrieval system including a tissue retrieval bag device.

DESCRIPTION OF THE RELATED ART

[0002] Laparoscopic surgery is typically performed through trocars, which provide access across the abdominal wall and into the abdominal cavity. In some of surgeries, tissue disposed within the abdominal cavity is cut and removed from the body. However, removal of such tissue from the body may prove difficult due to the limited confines inherent with laparoscopic surgery and the available laparoscopic surgical instruments. For example, to reduce the invasiveness to a patient, it can be desirable to introduce all of the surgical instruments through a single laparoscopic port having a relatively small size. Also, removed tissue may include an infected or cancerous mass or organ, as well as blood, bile and other liquids, all referred to herein as tissue, which may pose infection issues or other complications if left within the body.

[0003] Prior art retrieval bags have been provided without introducer tubes and require the use of a grasper to introduce the retrieval bag into the body cavity. The prior art retrieval bags are typically grasped with a grasper in the cuff portion of the retrieval bag and then pushed through the trocar. If resistance is encountered during advancement of the retrieval bag through the trocar, it is possible to tear the retrieval bag. Also, the jaw configurations of laparoscopic graspers vary tremendously from manufacturer to manufacturer. Some laparoscopic grasper jaws include padding to provide for an atraumatic grip while other laparoscopic grasper jaws include teeth which can be traumatic. The diameters of the jaws and shafts of laparoscopic graspers can also vary from manufacturer to manufacturer. Larger diameter graspers can increase the force required to insert prior art retrieval bags through trocars increasing the potential for the retrieval bag to tear during advancement through a trocar.

[0004] It is desirable to grasp, capture, retain and enclose this tissue while in the body cavity, and then remove the enclosed tissue through the trocar or incision. Containment of the tissue as quickly as possible with minimal disturbance to the surgical site is also desirable. A generally compact and single unit device would also prove desirable as devices generally bulky and complicated have several shortcomings and lack optimal efficiency in particular with the limited space in operating rooms and access ports in the body cavity.

[0005] Examples of retrieval bags of the general type

with which the present invention is concerned are disclosed in patent applications having publication numbers US 5,312,416A1, GB2460099A and US 2008/0033451 A. At least some embodiments disclosed in these documents have retrieval bags housed in an inserter tube, to assist in inserting the retrieval bags into a body cavity. The invention is defined in claim 1. Further embodiments of the invention are defined in the dependent claims.

10 SUMMARY OF THE INVENTION

[0006] According to the present invention there is provided a tissue retrieval system comprising: a tissue retrieval bag having an open end, a closed end, and a cuff extending peripherally around at least a portion of the open end; and a foldable actuator having a first end and a second end opposite the first end, the actuator comprising: an elongate arm between the first end and the second end, the elongate arm defining a longitudinal axis of the actuator; and a hoop segment extending from the elongate arm to the second end, the hoop segment biased into an open state, the hoop segment disposed within the cuff of the tissue retrieval bag, wherein the hoop segment comprises at least one hinge section having a relatively high flexibility to facilitate folding the hoop segment between a folded state in which the hoop segment and the tissue retrieval bag extends from the elongate arm back along the elongate arm in a first direction towards the first end, and an unfolded state in which the hoop segment and the tissue retrieval bag extend from the elongate arm in a second direction opposite the first direction away from the first end.

[0007] The tissue retrieval system may further include an introducer comprising a tubular introducer member. The tubular introducer member has a first end, a second end opposite the first end, and a lumen extending therebetween. The actuator is slidably disposed in the lumen of the introducer such that at least a portion of the hoop segment extends from the second end of the introducer.

40 BRIEF DESCRIPTION OF THE DRAWINGS**[0008]**

45 Figure 1 is a perspective view of an embodiment of tissue retrieval system;

Figure 2 is a side view of the tissue retrieval system of Figure 1;

50 Figure 3 is a top view of the tissue retrieval system of Figure 1;

55 Figure 4 is a side view of the tissue retrieval system of Figure 1 positioned for insertion to a surgical site through a trocar;

Figure 5 is a top view of the tissue retrieval system

of Figure 1 in an insertion configuration for insertion to a surgical site through a trocar;

Figure 6 is a top view of the tissue retrieval system of Figure 1 as inserted through a trocar to a surgical site;

Figure 7 is a top view of the tissue retrieval system of Figure 1 as inserted through a trocar to a surgical site with an actuator of the tissue retrieval system withdrawn and a tissue retrieval bag in a cinched state;

Figure 8 is a top view of the tissue retrieval system of Figure 1 at a surgical site with an insertion trocar withdrawn from the surgical site;

Figure 9 is a top view of the tissue retrieval system of Figure 1 at a surgical site with an insertion trocar withdrawn from the surgical site and with a handle of an actuator of the tissue retrieval system in a folded state; and

Figure 10 is a top view of an actuator of the tissue retrieval system of Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

[0009] The tissue retrieval systems 10 described herein can provide an easy to use and cost effective system that effectively contains excised tissue specimens to prevent loss or spillage of tissue specimens into a body cavity. Furthermore, the tissue retrieval systems 10 can protect the body wall access port site from contamination with the excised tissue specimens during withdrawal of the tissue specimens from within the body cavity.

[0010] With reference to Figures 1-3, an embodiment of laparoscopic tissue retrieval system is illustrated. In various embodiments, the tissue retrieval system 10 can contain and withdraw excised tissue specimens from within a body cavity. After insertion of the tissue specimens into a retrieval bag 20 or pouch of the tissue retrieval system 10, the retrieval bag is then cinched closed to prevent spillage of its contents and to prevent contamination of the body cavity and body cavity wall during withdrawal of the retrieval bag from within the body cavity.

[0011] With continued reference to Figures 1-3, in some embodiments, the tissue retrieval system 10 comprises a tissue retrieval bag 20, an actuator 30 (see Figure 10) having a first end 32 and a second end 34, and an introducer 50. In certain embodiments, the tissue retrieval system 10 can further comprise a grip section 60. In certain embodiments, the tissue retrieval system 10 can further comprise a segment of shrink tubing 70.

[0012] With continued reference to Figures 1-3, the tissue retrieval bag 20 can be formed of a polymeric film material. For example, in some embodiments, the tissue retrieval bag 20 comprises a polyurethane film material.

In other embodiments, the tissue retrieval bag can be formed of one or a combination of a variety of materials including polyurethane, polyethylene, polyimide, ripstop Nylon®, polyester, and Mylar®. Moreover, in certain embodiments, the tissue retrieval bag can be formed from laminated materials such as polyurethane coated ripstop Nylon, silicone coated ripstop Nylon, polyurethane coated ripstop polyester, silicone coated ripstop polyester, polyurethane coated taffeta, polyurethane coated spandex, or another suitable laminate.

[0013] In some embodiments, the retrieval bag 20 can be formed with two different thicknesses of the same film material. In these embodiments, the distal end, closed end, or tip portion of the retrieval bag would be formed with a thick film while the remainder of the retrieval bag would be formed with a thinner film. By incorporating a film with an increased thickness in the tip of the retrieval bag, the tensile and burst strengths of the retrieval bag can be increased. Furthermore, in certain embodiments, the tissue retrieval bag 20 can be formed with two different film materials. In this case, the tip of the retrieval bag would be formed from one material while the remainder of the retrieval bag would be formed from a different material. For example, the tip of the retrieval bag can be formed from a polyurethane and ripstop Nylon laminate while the remainder of the retrieval bag can be formed from a polyurethane film. The material utilized for the tip of the retrieval bag can have an increased thickness as compared to the material utilized for the remainder of the retrieval bag.

[0014] The tissue retrieval bag 20 can have an open end 22, a closed end 24, and a cuff 26 extending peripherally about the open end 22. In some embodiments, the retrieval bag 20 can be formed by welding a sheet of polymeric film material to form the closed end 24 while leaving an open end 22 unwelded. In other embodiments, other techniques of joining the material of the tissue retrieval bag 20 can be used to form the closed end 24. For example, in some embodiments, chemical adhesives can be used to form the closed end 24.

[0015] In some embodiments, the cuff 26 can be formed by welding or otherwise joining a portion of the material of the tissue retrieval bag 20 adjacent the open end 22 to itself to create a cuff 26 extending peripherally around the open end 22. The cuff 26 can have a passage extending therethrough.

[0016] With reference to Figures 1-3 and 10, the tissue retrieval system 10 comprises the actuator 30 having the first end 32 and a second end 34 opposite the first end 32. The actuator 30 extends generally longitudinally between the first end 32 and the second end 34, defining a longitudinal axis A of the actuator. In the illustrated embodiment, the actuator 30 comprises a loop 40 or hoop segment at the second end 34. The loop 40 can be formed of a segment of flexible band 42. The flexible band 42 can have a generally rectangular cross-sectional profile with a height that is relatively large compared with a width of the band 42. Advantageously, this rectangular cross-

sectional profile can provide flexural strength to support the tissue retrieval bag 20. In other embodiments, other cross-sectional profiles can be used. It can be desirable that these cross-sectional profiles include a relatively high height compared with a width. For example, in some embodiments, an oval cross-section can be used.

[0017] With reference to Figures 1-3 and 10, as illustrated, the tissue retrieval bag 20 is disposed on the loop 40 of the actuator 30. In some embodiments, the tissue retrieval system 10 can be assembled by: positioning the tissue retrieval bag 20 with its open end 22 adjacent the loop 40 of actuator 30; folding a portion of material of the tissue retrieval bag 20 at the open end 22 over the loop 40; and welding the portion of material of the tissue retrieval bag 20 that is folded over the loop 40 to the tissue retrieval bag 20. Desirably, the loop 40 of the actuator 30 for the retrieval bag is sized to be joined to the cuff 26 portion of the retrieval bag 20 in such a fold over and join technique to position the loop within the cuff of the retrieval bag.

[0018] With continued reference to Figures 1-3 and 10, as illustrated, the actuator 30 comprises at least one elongate arm such as a generally cylindrical segment 36 positioned between the first end 32 and the second end 34. In the illustrated embodiment, the actuator 30 comprises two elongate arms illustrated as generally cylindrical segments 36 joined by a flexible region such as a relatively lower diameter neck 37 extending therebetween. In other embodiments, the actuator 30 can comprise more or fewer than two generally cylindrical segments 36 such as, for example a single generally cylindrical segment or three or more generally cylindrical segments joined by a corresponding number of flexible regions or necks. In some embodiments, the at least one generally cylindrical segment 36 can comprise a solid rod. In other embodiments, the at least one generally cylindrical segment 36 can comprise a tubular member having a lumen extending longitudinally therethrough. While it can be desirable for sealing performance with a septum or other instrument seal that the elongate arm comprise at least one cylindrical segment 36, in some embodiments, the at least one elongate arm can comprise a non-cylindrical segment such as, for example an elongate arm having a generally rectangular, triangular, oval, elliptical, or other geometric cross-sectional profile.

[0019] With reference to Figure 10, in the illustrated embodiment of actuator 30, the loop 40 is joined to a generally cylindrical segment 36, at a flexible or foldable segment 44. The flexible or foldable segment 44 can be formed by a localized relatively thin segment of the loop 40. In some embodiments the foldable segment 44 can be disposed on the loop 40 adjacent where the loop 40 joins the generally cylindrical segment 36. As further described herein, during insertion the tissue retrieval system 10 through an access device, such as a trocar, the loop 40 of the actuator 30 can be folded towards the first end 32 of the actuator at the foldable segment 44 to configure the tissue retrieval system 10 in an insertion con-

figuration. Concerning the invention, the loop 40 comprises one or more hinge sections 45 having a relatively high flexibility to facilitate folding the loop 40 into the insertion configuration. In some embodiments, the hinge section 45 can be formed by a localized relatively thin segment of flexible band 42 material. In some embodiments, the loop 40 can include a hinged section 45 at a distal end thereof to allow the loop to be easily deformed from a generally circular profile to an almond-shaped or oval profile about the hinged section 45. In other embodiments, the loop 40 can comprise several hinged sections 45 peripherally spaced about the loop 40 to provide a desired flexibility. Advantageously, this foldability to an insertion configuration facilitates use of the tissue retrieval system 10 in a surgical procedure as described in further detail with reference to Figures 4-9.

[0020] With reference to Figures 1-3 and 10, in the illustrated embodiment, the actuator 30 comprises a handle segment 38 at the first end 32. In some embodiments, the handle segment 38 can comprise a flexible band formed to a loop configuration. As with the loop 40 at the second end 34 of the actuator 30, the flexible band of handle segment 38 can have a cross-sectional profile shaped and configured to provide a desired amount of flexural strength. For example, in some embodiments, the flexible band of the handle segment 38 has a substantially rectangular cross-section with a height relatively large compared to its width. In some embodiments, the actuator 30 does not comprise a handle segment. Rather, the elongate arm such as a generally cylindrical segment 36 can define the first end of the device.

[0021] In some embodiments, the actuator 30 can be formed of a unitary, monolithic construction. For example, the actuator 30 can be formed by a molding operation. Accordingly, in the illustrated embodiments, the actuator 30 is desirably formed of a flexible, moldable material. In some embodiments, the actuator 30 comprises a NYLON® material. Advantageously, a molded, monolithic actuator 30 can be manufactured quickly and at relatively low-cost. In other embodiments, the actuator can be formed of separate components that are welded, bonded, or otherwise joined to each other. For example, the flexible band of handle 38 and the loop 40 can be formed by extrusion and joined to a generally cylindrical segment 36 such as a tube or solid rod formed by molding. In some embodiments, the actuator could also be formed from an extruded strip and fastened together to create the loop and the handle. In these embodiments, the strip could be fastened by a variety of techniques, including heat staking, ultrasonic welding, adhesive bonding, and mechanical fastening.

[0022] In some embodiments, the handle 38 and/or the loop 40 can be welded, bonded, or otherwise joined to an outer surface of the generally cylindrical segment 36. In other embodiments, the generally cylindrical segment 36 can comprise a tubular member having a lumen therein. The handle 38 and/or the loop 40 can be welded, bonded, snap fit, or otherwise joined to the generally cy-

lindrical segment 36 within the lumen. In these embodiments, once the handle 38 and/or the loop 40 are joined to the generally cylindrical segment 36, longitudinal movement of the handle 38 and/or the loop 40 relative to the generally cylindrical segment 36 is prevented. In certain embodiments, the handle can comprise a cord that is joined to a molded actuator by one of a variety of techniques. Moreover, in other embodiments, the actuator can be formed of a cord, or flexible braided tubing. In some embodiments, a polymer tube could also be used in place of the actuator.

[0023] With reference to Figures 1-3, the introducer 50 of the tissue retrieval system 10 comprises a tubular introducer member 52. The tubular introducer member 52 can extend generally longitudinally between a first end 54 and a second end 56. The tubular introducer member 52 can have a lumen 58 extending from the first end 54 to the second end 56. The introducer 50 can also include a grip 60 positioned about the tubular introducer member 52 adjacent the first end 54. In some embodiments, the grip 60 can be positioned elsewhere on the tubular introducer member 52.

[0024] While the illustrated embodiment includes an introducer 50 with a tubular member having a relatively constant outer diameter along its length, in other embodiments, introducer tube could have a small diameter section at the second end relative to the first end. In these embodiments, the small diameter section can correspond with the width of the retrieval bag 20 such that the retrieval bag could nest in the small diameter section of the introducer tube during insertion through a trocar to reduce the force required to advance the retrieval system through the trocar. The proximal portion of the introducer tube would have a larger diameter and would be sized to enable an access device such as a trocar to effectively maintain a seal around the introducer tube.

[0025] With reference to Figures 1-3 and 10, the actuator 30 is longitudinally slidably disposed within the lumen 58 of the introducer 50. Desirably, the generally cylindrical segment 36 of the actuator 30 is sized to sealingly engage an interior surface of the lumen 58 of the introducer 50. In some embodiments where the actuator includes an elongate arm that does not include a cylindrical segment, the introducer can have an interior geometry corresponding to that of the elongate arm such as, for example, a generally rectangular, triangular, oval, elliptical, or other geometric cross-sectional profile. Accordingly, the generally cylindrical segment 36 of the actuator can prevent loss of pneumoperitoneum through the introducer during a laparoscopic surgical procedure. In other embodiments, it can be desirable that a tissue retrieval system comprise a foldable actuator 30 without a corresponding introducer 50. Accordingly, advantageously, further manufacturing efficiencies and cost reduction can be achieved with a tissue retrieval system without an introducer 50.

[0026] In some embodiments, the tubular introducer member 52 can comprise a length of tubular material.

For example, in certain embodiments, the tubular introducer member 52 can comprise an ABS extruded tube. In other embodiments, other suitable materials and manufacturing processes can be used to form the tubular introducer member. In some embodiments, the grip 60 can be formed of elastomeric material. For example, in some embodiments the grip 60 can comprise a KRA-TON® material.

[0027] With reference to Figures 1-3, the tissue retrieval system 10 can include a coupler, such as a segment of shrink tubing 70. The shrink tubing 70 can be positioned at the second end 56 of the introducer 50. In use, the shrink tubing 70 can maintain the position of the retrieval bag 20 and prevent migration of the retrieval bag 20 relative to the second end 56 of the tubular introducer member 52 and the loop 40 of the actuator 30 during insertion of the tissue retrieval system 10 through an access device. The coupler can also maintain the position of the retrieval bag 20 such that it can be cinched shut by sliding of the actuator 30 relative to the introducer 50. In some embodiments, the shrink tubing 70 can comprise a polyolefin material. In other embodiments, other suitable materials can be used.

[0028] In some embodiments, the tissue retrieval systems described herein can be sized and configured for application through a 10mm trocar. Thus, an exterior surface of the introducer tubular member 52 can be sized to enable trocar seals of a 10mm trocar to effectively maintain a seal around the introducer tubular member 52 to prevent loss of pneumoperitoneum during use of the device. Additionally, the combined diameters of an exterior surface of the introducer tubular member 52 having the tissue retrieval bag 20 adjacent in a folded, insertion configuration can be sized to pass through a 10mm trocar. If it is desired that the retrieval bag 20 be inserted in an open, but unfolded configuration, in some embodiments, the combined diameters of an exterior surface of the introducer tubular member 52 and a grasper or other insertion tool can be sized to pass through a 10mm trocar. In other embodiments, the tissue retrieval systems described herein can be sized and configured for application through a trocar having a size smaller or greater than 10mm. For example, in some embodiments, the tissue retrieval system 10 can be sized to fit through a 12mm or 15mm trocar. In these embodiments, the tissue retrieval system can have a retrieval bag with a larger volume than that of the retrieval system 10 sized for a 10mm trocar. In other embodiments, the tissue retrieval system could be provided with a more elongated retrieval bag and sized to fit through a 5mm or 8mm trocar. In these embodiments, the introducer can have a small diameter section at the second end to allow the retrieval bag to nest into, thereby facilitating passage of the retrieval system through a 5mm or 8mm trocar. The proximal portion of the introducer tube would have a larger diameter to enable the trocar seal to effectively maintain a seal around the introducer tube

[0029] A streamlined and relatively low cost method of

assembling the tissue retrieval system 10 can be performed. In the method, an actuator 30 having a loop 40 is formed in a molding operation. A sheet of retrieval bag 20 material can be folded over the actuator loop 40 to form a cuff 26. The cuff can then be joined to the tissue bag 20 such as by a welding operation to restrain the loop 40 within the cuff 26 of the retrieval bag. The retrieval bag 20 material can then be folded and joined such as by welding to form a closed end. The shrink tubing 70 can be loosely placed over the introducer tubular member 52. The elastomeric grip 60 can be placed over the end of the introducer tubular member 52 opposite the shrink tubing 70. The elastomeric grip 60 can be secured in place via an interference fit with the introducer tubular member 52, or in some embodiments, can be adhered or otherwise joined to the introducer tubular member 52. The handle segment 38 on the actuator can then be folded to a flattened state and advanced through the second end 56 of the introducer tubular member 52 until the handle segment 38 extends beyond the first end 54 of the introducer tubular member 52. With the actuator 30 and retrieval bag 20 assembly positioned within the introducer 50, a portion of the retrieval bag 20 can be placed over the second end 56 of the introducer tubular member 52 and the shrink tubing 70 can be positioned over the retrieval bag 20. With the shrink tubing 70 positioned over the retrieval bag 20, the shrink tubing 70 can be heated to shrink the tubing and couple the retrieval bag to the outside of the introducer tube.

[0030] With reference to Figures 4-9, a method of using the tissue retrieval systems 10 described herein through an access device such as a trocar 80 is illustrated. An access device is positioned through a body wall 82 to access a surgical site 84 using laparoscopic surgical techniques. With reference to Figure 4, a tissue retrieval system 10 is first positioned exterior to the body wall 82 outside access device 80.

[0031] With reference to Figure 5, the tissue retrieval system 10 can be manipulated to an insertion configuration. For example, as described above, the flexible band 42 of the loop 40 of the actuator has flexural strength to support the retrieval bag 20 and 10 serves to expand the retrieval bag 20 opening to facilitate the insertion of tissue specimens therein. However, the flexibility of the band 42 can allow the loop 40 of the actuator 30 to be folded about the foldable segment 44 and hinge segments 45 such that the loop 40 and the retrieval bag 20 extend along the actuator 30 towards the first end 32 of the actuator. Accordingly, with the tissue retrieval system 10 in the insertion configuration, the folded loop 40 can be aligned with a longitudinal axis of the introducer tubular member 52.

[0032] With reference to Figure 6, the tissue retrieval system 10 in the insertion configuration (Figure 5) can be advanced through the access device into the body cavity 84 until the retrieval bag 20 is extended beyond the distal end of the access device. The loop 40 of the actuator 30 then unfolds away from the introducer tubular

member 52 into a deployed configuration defined by the bias of the flexible band 42. In the deployed configuration, a majority of the loop 40 is outside the introducer 50 to position the retrieval bag 20 in an expanded open configuration within the body cavity 84. One or more tissue specimens can then be loaded into the retrieval bag 20.

[0033] With reference to Figure 7, the tissue bag 20 can be cinched closed by withdrawing the actuator handle 38 relative to the introducer 50. As the handle is retracted, a majority of the loop 40 is pulled into the lumen of the introducer tubular member 52 until the open end 22 of the retrieval bag 20 is cinched closed by longitudinal sliding of the loop 40 relative to the cuff 26. The coupling of the retrieval bag 20 to the introducer 50 can provide resistance to cinch the tissue bag 20. In some embodiments, the actuator 30 can comprise a bead slidably disposed on the loop 40. In these embodiments, the actuator and loop can remain stationary and the bead can be longitudinally slid with a grasper or other instrument to cinch the bag closed. In embodiments of tissue retrieval system without an introducer 50, the bag can be left open and the open end withdrawn from the body cavity by withdrawing the elongate arm.

[0034] With reference to Figure 8, the introducer tubular member 52 and the handle 38 of the retrieval system can be configured such that a 10mm or larger trocar can be withdrawn over the first end 32 of the introducer tubular member 52 and the handle 38. Accordingly, in some embodiments, the trocar 80 can be removed from the surgical site while leaving the retrieval system 10 disposed in the body cavity 84 and across the body wall 82.

[0035] With reference to Figure 9, once the trocar 80 is removed from the surgical site, the retrieval system 10 can then be withdrawn from the body cavity 84 and the body wall 82. Upon cinching of the retrieval bag 20, a neck 37 section of the actuator can be exposed beyond the first end 54 of the introducer tubular member 52. The neck 37 section serves as a hinge area and allows the actuator handle 38 to be folded toward the second end 34 of the actuator 30 at the actuator 30 and introducer 50 interface into a folded configuration such that the folded handle 38 is aligned with the axis of the introducer 50. Advantageously, the foldable handle 38 enables the handle 38 and the introducer 50 to be simultaneously grasped to facilitate withdrawal of the retrieval bag from the body cavity and the body wall. Furthermore, folding the handle 38 forward along the introducer 50 reduces the span from the retrieval bag 20 to the handle 38 and facilitates the withdrawal of the retrieval bag 20 from the patient.

[0036] In certain methods of use, the retrieval bag 20 can be partially withdrawn from the body wall and then re-opened by sliding the introducer 50 relative to the actuator 30. This reopening enables access to the retrieval bag 20 for removal of some of the contents to reduce the volume of the retrieval bag 20, thus facilitating withdrawal of the retrieval bag 20 through the body wall 82. In some procedures, a surgeon can also avoid the need for ex-

tending the body wall incision by reducing the volume of the contents in the retrieval bag 20 prior to withdrawal through the body wall 82. Graspers, forceps or aspiration devices can be used to remove contents from the retrieval bag. After removal of some or all of the contents, the retrieval bag 20 can be cinched closed by retracting the actuator.

[0037] By providing the tissue retrieval system with a foldable actuator 30 described herein, tissue retrieval systems 10 can be inserted without the use of a separate grasper or applicator. Thus, advantageously, the tissue retrieval systems 10 can be relatively rapidly applied without risking damage to the tissue bag 20 from some types of grasper tip.

[0038] In some embodiments, tissue retrieval systems can be configured to be inserted without folding the actuator with the use of a separate grasper or insertion instrument. For example, a tissue retrieval system with a tissue retrieval bag in the open configuration can be advanced through an access port via a grasper. As described above, it is desirable that in such a configuration it can be desirable that the tissue retrieval system be sized and configured to be received in a trocar having a predetermined diameter. The tissue retrieval bag can then be cinched closed by withdrawing the actuator with respect to the introducer such that the coupling of the tissue retrieval bag to the introducer cinches the bag closed as described above. Accordingly, it is contemplated that in some embodiments a tissue retrieval system can comprise a non-foldable actuator slidable within an introducer to which the tissue retrieval bag is coupled as described above.

[0039] Although this application discloses certain preferred embodiments and examples, it will be understood by those skilled in the art that the present inventions extend beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the invention and obvious modifications and equivalents thereof. Further, the various features of these inventions can be used alone, or in combination with other features of these inventions other than as expressly described above. Thus, it is intended that the scope of the present inventions herein disclosed should not be limited by the particular disclosed embodiments described above, but should be determined only by a fair reading of the claims that follow.

Claims

1. A tissue retrieval system (10) comprising:

a tissue retrieval bag (20) having an open end (22), a closed end (24), and a cuff (26) extending peripherally around at least a portion of the open end; and

a foldable actuator (30) having a first end (32) and a second end (34) opposite the first end,

the actuator (30) comprising:

an elongate arm (36) between the first end (32) and the second end (34), the elongate arm (36) defining a longitudinal axis of the actuator; and

a hoop segment (40) extending from the elongate arm to the second end (34), the hoop segment (40) biased into an open state, the hoop segment (40) disposed within the cuff of the tissue retrieval bag (20),

characterized in that the hoop segment (40) comprises at least one hinge section (45) having a relatively high flexibility to facilitate folding the hoop segment (40) between a folded state in which the hoop segment (40) and the tissue retrieval bag (20) extends from the elongate arm back along the elongate arm in a first direction towards the first end (32), and an unfolded state in which the hoop segment (40) and the tissue retrieval bag (20) extend from the elongate arm in a second direction opposite the first direction away from the first end (32).

2. The tissue retrieval system of Claim 1, further comprising an introducer (50) comprising a tubular member (52) having a first end (54), a second end (56) opposite the first end (54), and a lumen (58) extending therebetween, and wherein the actuator (30) is slidably disposed in the lumen (58) such that at least a portion of the elongate arm (36) is disposed within the lumen (58).
3. The tissue retrieval system of Claim 2, wherein the actuator (30) is slidable within the lumen (58) from a first position in which substantially all of the hoop segment (40) is disposed outside the lumen (58) such that the hoop segment (40) biases the open end (22) of the tissue retrieval bag (20) into an open state to a second position in which at least a portion of the hoop segment (40) is withdrawn into the lumen (58) such that the cuff (26) of the bag is slid along the hoop segment (40) to a cinched position.
4. The tissue retrieval system of any of Claims 2 or 3, wherein the introducer (50) comprises a grip (60) positioned on an exterior surface of the tubular member (52).
5. The tissue retrieval system of Claim 4, wherein the grip (60) comprises an elastomeric material.
6. The tissue retrieval system of any of the preceding claims, wherein the actuator (30) is unitarily formed in a monolithic construction.
7. The tissue retrieval system of any of Claims 1-5, wherein the elongate arm (36) and the hoop segment

(40) are joined to one another.

8. The tissue retrieval system of any of Claims 1-5 and 7, wherein the elongate arm (36) comprises a tubular member having a lumen and wherein the hoop segment (40) is affixed within the lumen of the tubular member. 5
9. The tissue retrieval system of any of the preceding claims, wherein the hoop segment (40) comprises at least one foldable segment (44). 10
10. The tissue retrieval system of Claim 9, wherein the at least one foldable segment (44) is defined by a thinned portion of the hoop segment (40). 15
11. The tissue retrieval system of Claim 9, wherein the at least one foldable segment (44) of the hoop segment (40) is adjacent the elongate arm (36). 20
12. The tissue retrieval system of any of the preceding claims, wherein the actuator (30) further comprises a handle segment (38) extending from the first end (32) to the elongate arm (36). 25
13. The tissue retrieval system of any Claims 2-12, wherein the elongate arm (36) comprises a generally cylindrical segment. 30
14. The tissue retrieval system of Claim 13, wherein the generally cylindrical segment of the actuator (30) is sized and configured to substantially sealingly engage the lumen (58) of the introducer (50). 35
15. The tissue retrieval system of any of the preceding claims, wherein the hoop segment (40) comprises a flexible band (42). 40
16. The tissue retrieval system of Claim 15, wherein the flexible band (42) has a substantially rectangular cross-section. 45
17. The tissue retrieval system of any of the preceding claims, wherein the hoop segment (40) is biased into the unfolded state. 50

Patentansprüche

1. Gewebeentnahmesystem (10), das Folgendes umfasst: 50
 - einen Gewebeentnahmebeutel (20), der Folgendes aufweist: ein offenes Ende (22), ein geschlossenes Ende (24) und einen Umschlag (26), der sich peripher um zumindest einen Teil des offenen Endes erstreckt; und 55
 - ein faltbares Betätigungsmittel (30), das ein ers-

tes Ende (32) und ein zweites Ende (34) gegenüber dem ersten Ende aufweist, wobei das Betätigungsmittel (30) Folgendes umfasst:

einen langgestreckten Arm (36) zwischen dem ersten Ende (32) und dem zweiten Ende (34), wobei der langgestreckte Arm (36) eine Längsachse des Betätigungsmittels definiert; und
ein Reifensegment (40), das sich von dem langgestreckten Arm bis zum zweiten Ende (34) erstreckt, wobei das Reifensegment (40) in einen offenen Zustand vorgespannt ist, das Reifensegment (40) innerhalb des Umschlags des Gewebeentnahmebeckens (20) angeordnet ist,

dadurch gekennzeichnet, dass das Reifensegment (40) mindestens einen Gelenkabschnitt (45) umfasst, der eine relativ hohe Flexibilität zur Ermöglichung des Faltens des Reifensegments (40) zwischen Folgenden aufweist: einem gefalteten Zustand, in dem sich das Reifensegment (40) und der Gewebeentnahmebeutel (20) von dem langgestreckten Arm zurück entlang des langgestreckten Arms in einer ersten Richtung in Richtung des ersten Endes (32) erstrecken, und einem entfalteten Zustand, in dem sich das Reifensegment (40) und der Gewebeentnahmebeutel (20) von dem langgestreckten Arm in einer zweiten Richtung entgegengesetzt der ersten Richtung weg von dem ersten Ende (32) erstrecken.

2. Gewebeentnahmesystem nach Anspruch 1, das weiter ein Einführungsmittel (50) umfasst, das ein röhrenförmiges Element (52) umfasst, das ein erstes Ende (54), ein zweites Ende (56) gegenüberliegend dem ersten Ende (54) und einen Hohlraum (58), der sich dazwischen erstreckt, aufweist, und wobei das Betätigungsmittel (30) in dem Hohlraum (58) derart verschiebbar angeordnet ist, dass zumindest ein Teil des langgestreckten Arms (36) innerhalb des Hohlraums (58) angeordnet ist.
3. Gewebeentnahmesystem nach Anspruch 2, wobei das Betätigungsmittel (30) innerhalb des Hohlraums (58) verschiebbar ist von einer ersten Position, in der im Wesentlichen das gesamte Reifensegment (40) außerhalb des Hohlraums (58) derart angeordnet ist, dass das Reifensegment (40) das offene Ende (22) des Gewebeentnahmebeckens (20) in einen offenen Zustand vorspannt, zu einer zweiten Position, in der zumindest ein Teil des Reifensegments (40) in den Hohlraum (58) derart zurückgezogen ist, dass der Umschlag (26) des Beckens entlang des Reifensegments (40) zu einer zusammengezogenen Position verschoben ist.

4. Gewebeentnahmesystem nach einem der Ansprüche 2 oder 3, wobei das Einführungsmittel (50) ein Griffelement (60) umfasst, das auf einer äußeren Oberfläche des röhrenförmigen Elements (52) positioniert ist.
5. Gewebeentnahmesystem nach Anspruch 4, wobei das Griffelement (60) ein elastomeres Material umfasst.
6. Gewebeentnahmesystem nach einem der vorstehenden Ansprüche, wobei das Betätigungsmittel (30) in einer monolithischen Konstruktion einheitlich ausgebildet ist.
7. Gewebeentnahmesystem nach einem der Ansprüche 1-5, wobei der langgestreckte Arm (36) und das Reifensegment (40) miteinander verbunden sind.
8. Gewebeentnahmesystem nach einem der Ansprüche 1-5 und 7, wobei der langgestreckte Arm (36) ein röhrenförmiges Element umfasst, das einen Hohlraum aufweist, und wobei das Reifensegment (40) innerhalb des Hohlraums des röhrenförmigen Elements befestigt ist.
9. Gewebeentnahmesystem nach einem der vorstehenden Ansprüche, wobei das Reifensegment (40) mindestens ein faltbares Segment (44) umfasst.
10. Gewebeentnahmesystem nach Anspruch 9, wobei das mindestens eine faltbare Segment (44) durch einen schmaleren Abschnitt des Reifensegments (40) definiert ist.
11. Gewebeentnahmesystem nach Anspruch 9, wobei sich das mindestens eine faltbare Segment (44) des Reifensegments (40) benachbart zum langgestreckten Arm (36) befindet.
12. Gewebeentnahmesystem nach einem der vorstehenden Ansprüche, wobei das Betätigungsmittel (30) weiter ein Griffsegment (38) umfasst, das sich von dem ersten Ende (32) zu dem langgestreckten Arm (36) erstreckt.
13. Gewebeentnahmesystem nach einem der Ansprüche 2-12, wobei der langgestreckte Arm (36) ein allgemein zylindrisches Segment umfasst.
14. Gewebeentnahmesystem nach Anspruch 13, wobei das allgemein zylindrische Segment des Betätigungsmittels (30) dimensioniert und konfiguriert ist, um in den Hohlraum (58) des Einführungsmittels (50) im Wesentlichen abdichtend einzugreifen.
15. Gewebeentnahmesystem nach einem der vorstehenden Ansprüche, wobei das Reifensegment (40)

ein flexibles Band (42) umfasst.

16. Gewebeentnahmesystem nach Anspruch 15, wobei das flexible Band (42) einen im Wesentlichen rechteckigen Querschnitt aufweist.

17. Gewebeentnahmesystem nach einem der vorstehenden Ansprüche, wobei das Reifensegment (40) in den entfalteten Zustand vorgespannt ist.

Revendications

1. Un système de récupération de tissus (10) comprenant :

Un sac de récupération de tissus (20) ayant une extrémité ouverte (22), une extrémité fermée (24), et un manchon (26) s'étendant de façon périphérique autour d'au moins une partie de l'extrémité ouverte ; et

Un actionneur repliable (30) ayant une première extrémité (32) et une deuxième extrémité (34) opposée à la première, cet actionneur (30) comprenant :

Une tige allongée (36) entre la première extrémité (32) et la seconde extrémité (34), cette tige allongée (36) définissant un axe longitudinal de l'actionneur ; et

Un segment en forme de cercle (40) s'étendant de la tige allongée à la seconde extrémité (34), ce segment en forme de cercle (40) s'évasant vers un état ouvert, le segment en forme de cercle (40) étant disposé le long du manchon du sac de récupération de tissus (20),

Caractérisé en ce que le segment en forme de cercle (40) comprend au moins une section charnière (45) dotée d'une flexibilité relativement élevée afin de faciliter le repli du segment en forme de cercle (40) entre un état replié dans lequel le segment en forme de cercle (40) et le sac de récupération de tissus (20) s'étendent de la tige allongée le long de la tige allongée dans une première direction vers la première extrémité (32), et un état déplié dans lequel le segment en forme de cercle (40) et le sac de récupération de tissus (20) s'étendent de la tige allongée dans une deuxième direction opposée à la première direction en s'éloignant de la première extrémité (32).

2. Le système de récupération de tissus de la revendication 1, comprenant en outre un dispositif d'introduction (50) comprenant un corps tubulaire (52) ayant une première extrémité (54), une deuxième extrémité (56) opposée à la première (54), et une

- lumière (58) s'étendant entre les deux, et dans lequel l'actionneur (30) est disposé dans la lumière (58) de façon à pouvoir y coulisser et de manière à ce qu'au moins une partie de la tige allongée (36) soit disposée à l'intérieur de la lumière (58).
3. Le système de récupération de tissus de la revendication 2, dans lequel l'actionneur (30) peut coulisser à l'intérieur de la lumière (58) à partir d'une première position dans laquelle presque la totalité du segment en forme de cercle (40) est disposée à l'extérieur de la lumière (58) de sorte que le segment en forme de cercle (40) fasse passer l'extrémité ouverte (22) du sac de récupération de tissus (20) dans un état ouvert à une deuxième position dans laquelle au moins une partie du segment en forme de cercle (40) rentre dans la lumière (58) de sorte que le manchon (26) du sac coulisse le long du segment en forme de cercle (40) vers une position resserrée.
 4. Le système de récupération des tissus de l'une quelconque des revendications 2 ou 3, dans lequel le dispositif d'introduction (50) comprend d'une poignée (60) placée sur une surface extérieure du corps tubulaire (52).
 5. Le système de récupération de tissus de la revendication 4, dans lequel la poignée (60) est composée d'un matériau élastomère.
 6. Le système de récupération des tissus de l'une quelconque des revendications précédentes, dans lequel l'actionneur (30) est formé de façon unitaire par une construction monolithique.
 7. Le système de récupération des tissus de l'une quelconque des revendications 1 à 5, dans lequel la tige allongée (36) et le segment en forme de cercle (40) sont joints l'un à l'autre.
 8. Le système de récupération des tissus de l'une quelconque des revendications 1 à 5 et 7, dans lequel la tige allongée (36) est composée d'un corps tubulaire doté d'une lumière et dans lequel le segment en forme de cercle (40) est fixé à l'intérieur de la lumière du corps tubulaire.
 9. Le système de récupération des tissus de l'une quelconque des revendications précédentes, dans lequel le segment en forme de cercle (40) comprend au moins un segment repliable (44).
 10. Le système de récupération de tissus de la revendication 9, dans lequel au moins un segment repliable (44) est défini par une partie amincie du segment en forme de cercle (40).
 11. Le système de récupération de tissus de la revendication 9, dans lequel au moins un segment repliable (44) du segment en forme de cercle (40) est adjacent à la tige allongée (36).
 12. Le système de récupération des tissus de l'une quelconque des revendications précédentes, dans lequel l'actionneur (30) dispose d'un segment supplémentaire servant de poignée (38) s'étendant de la première extrémité (32) à la tige allongée (36).
 13. Le système de récupération des tissus de l'une quelconque des revendications 2 à 12, dans lequel la tige allongée (36) comprend un segment généralement cylindrique.
 14. Le système de récupération de tissus de la revendication 13, dans lequel le segment généralement cylindrique de l'actionneur (30) est sensiblement d'une taille et d'une configuration permettant d'engager la lumière (58) du dispositif d'introduction (50) en la resserrant.
 15. Le système de récupération de tissus de l'une quelconque des revendications précédentes, dans lequel le segment en forme de cercle (40) comprend une bande flexible (42).
 16. Le système de récupération de tissus de la revendication 15, dans lequel la bande flexible (42) comprend une section transversale substantiellement rectangulaire.
 17. Le système de récupération des tissus de l'une quelconque des revendications précédentes, dans lequel le segment en forme de cercle (40) peut prendre une forme dépliée.

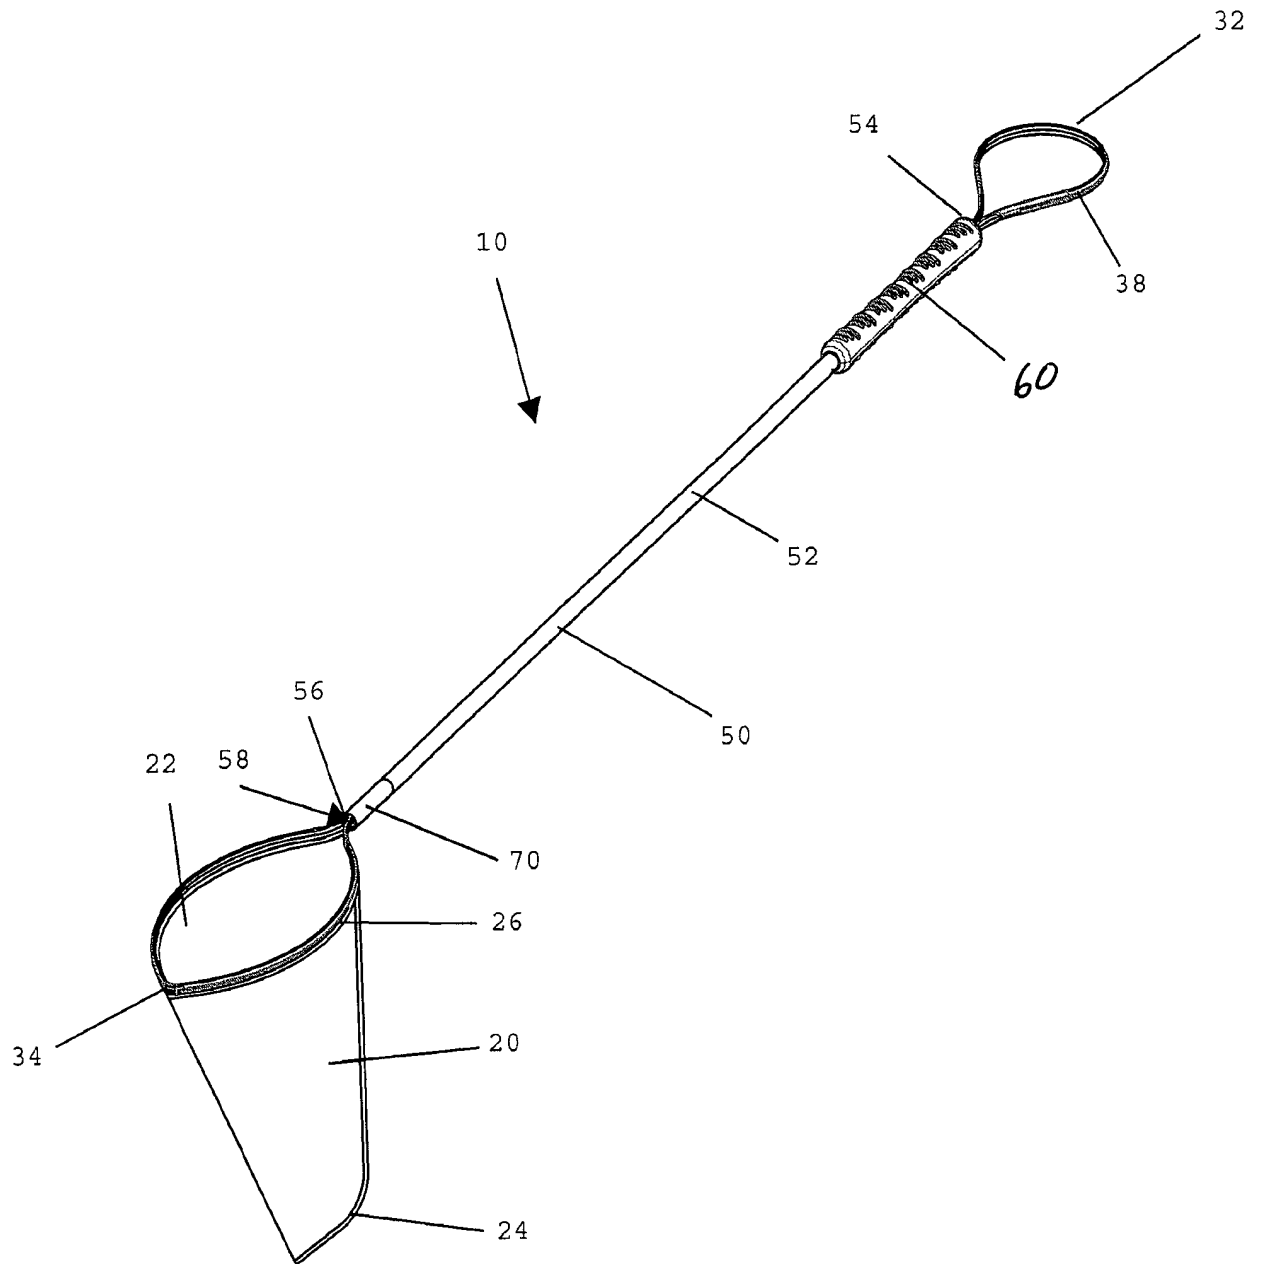


FIG. 1

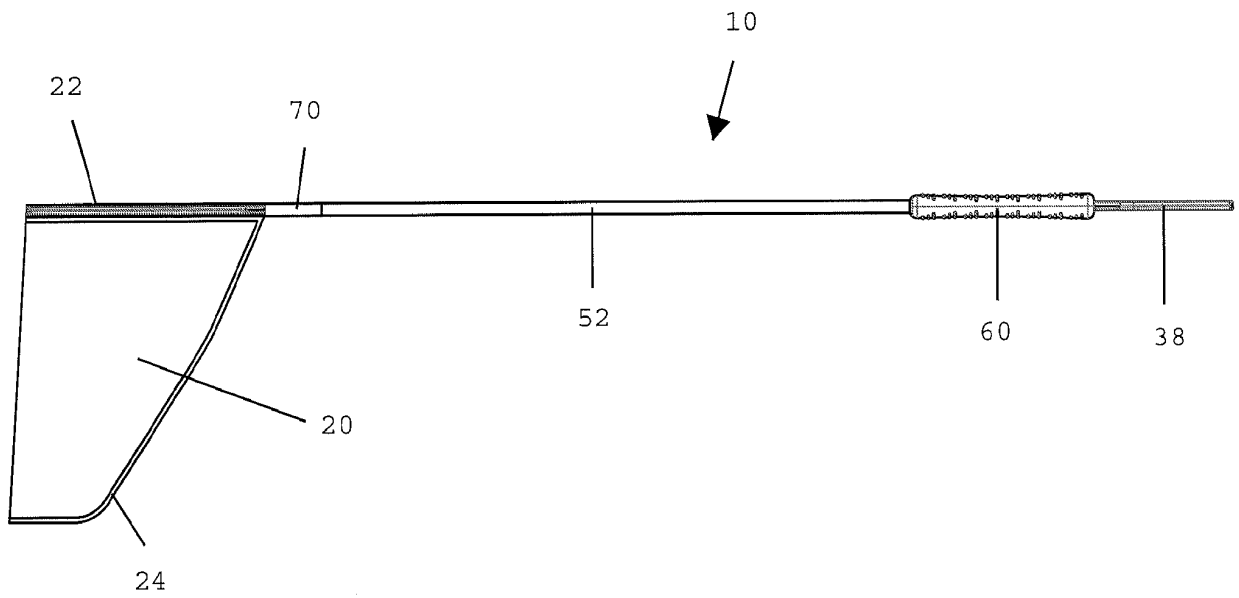


FIG. 2

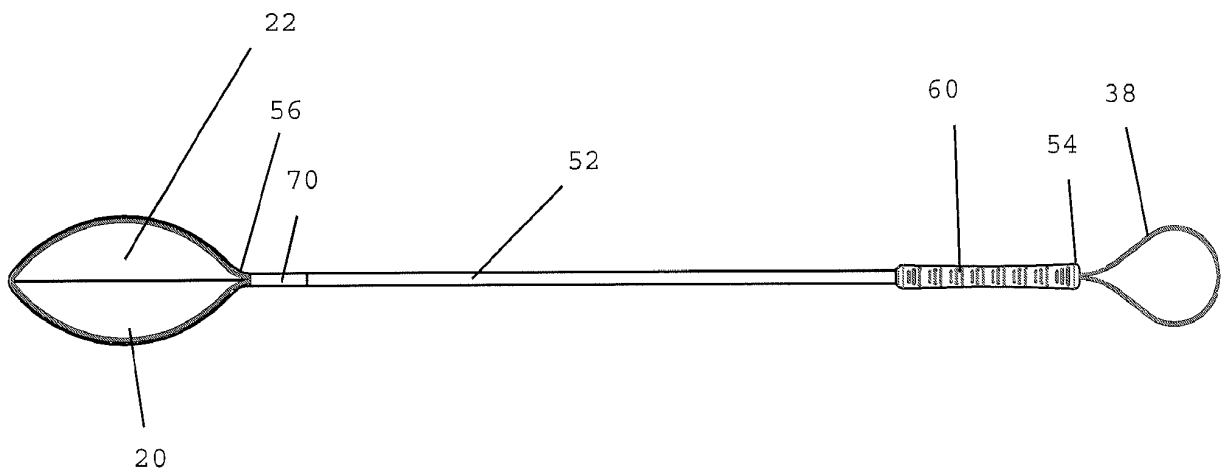


FIG. 3

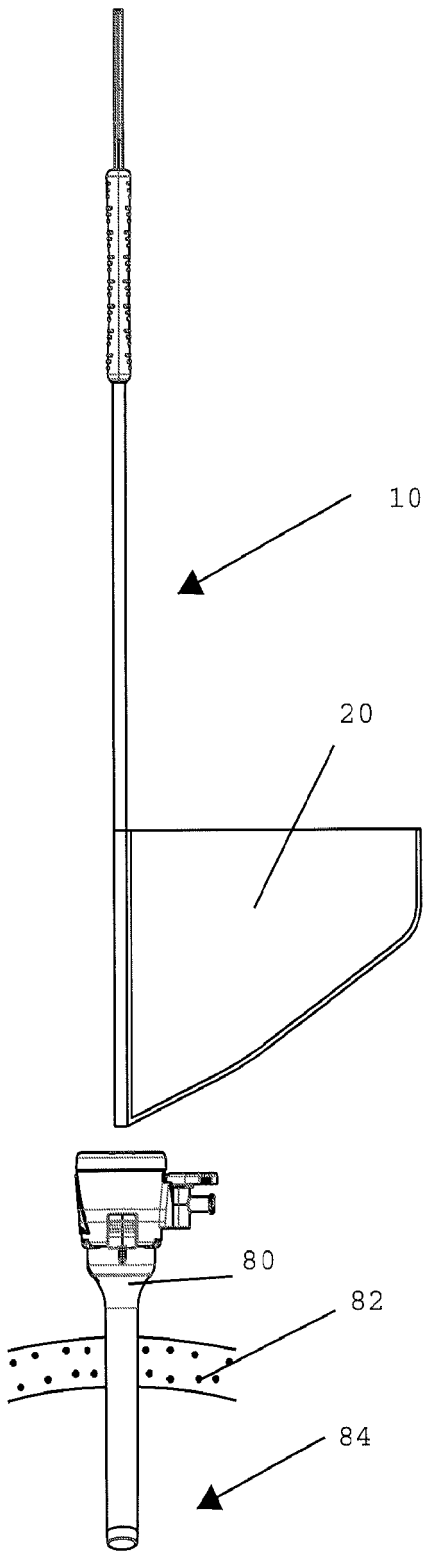


FIG. 4

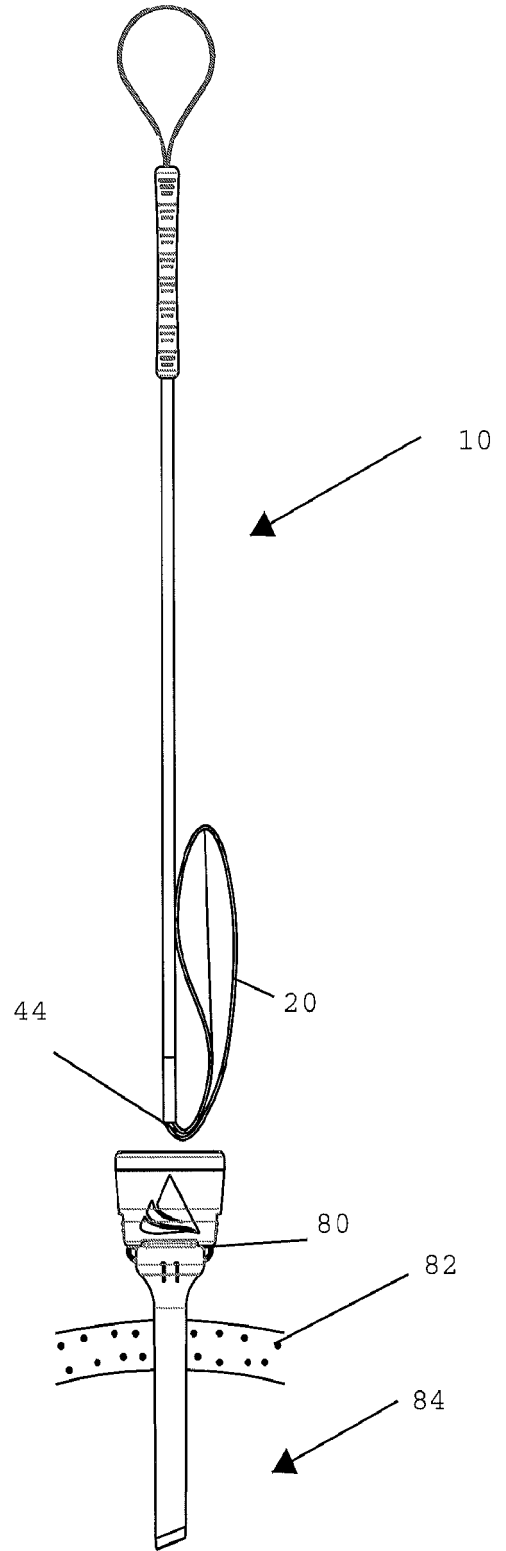


FIG. 5

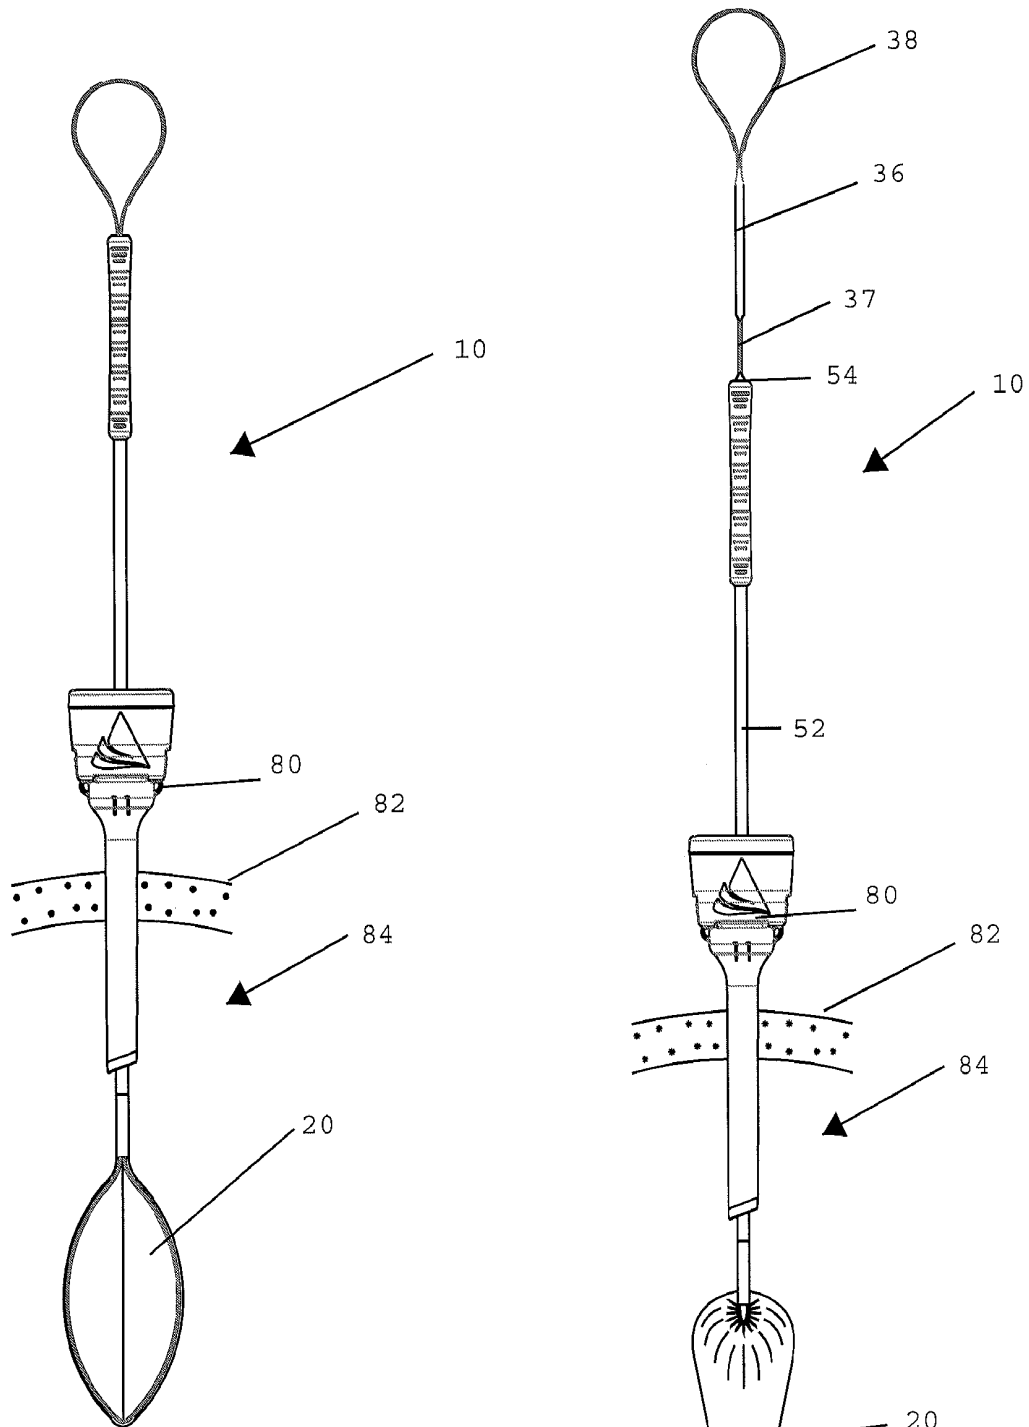


FIG. 6

FIG. 7

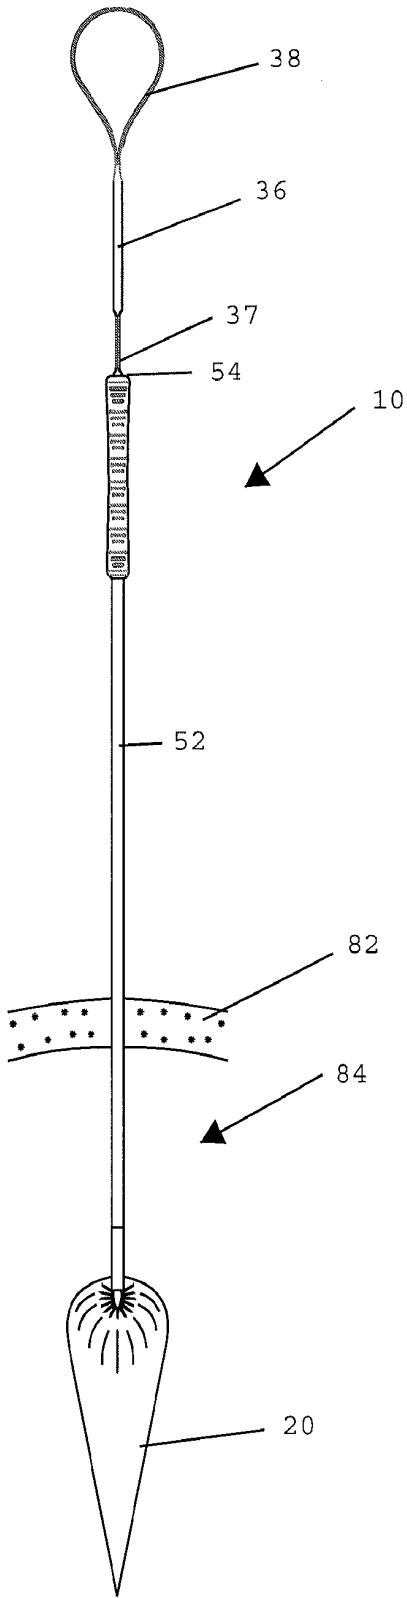


FIG. 8

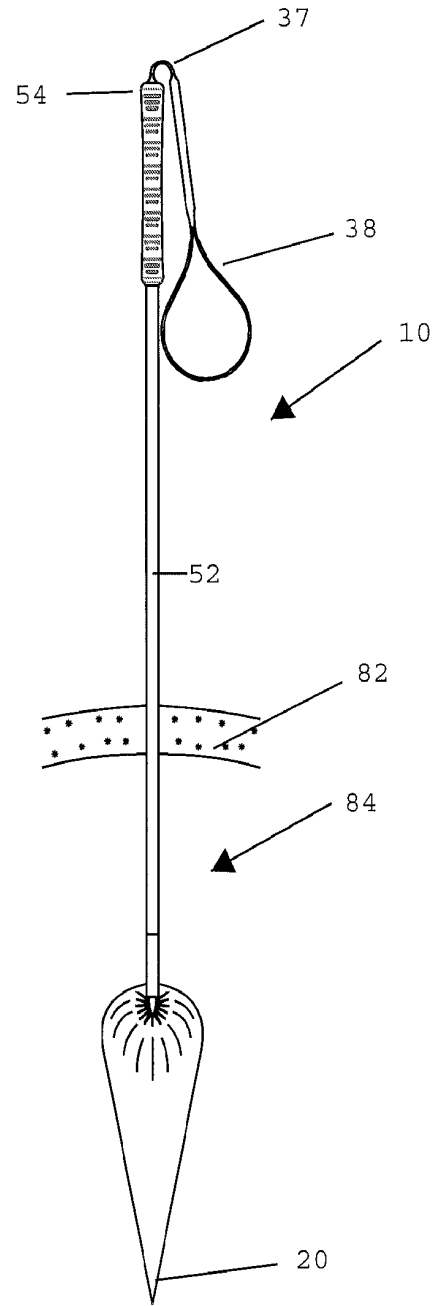


FIG. 9

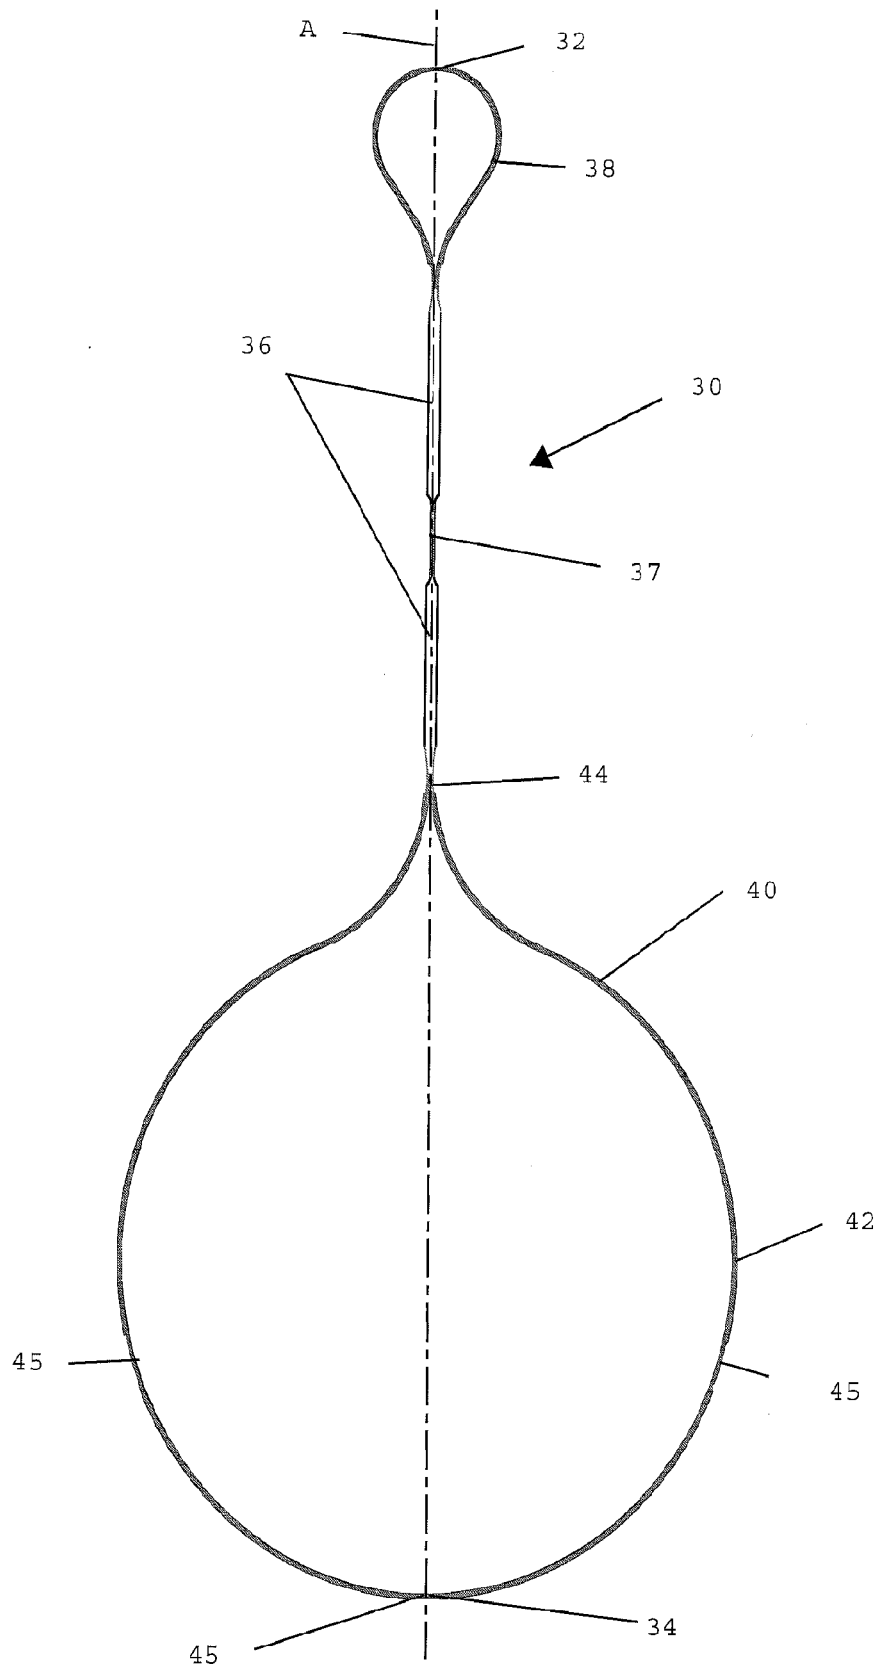


FIG 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5312416 A1 [0005]
- GB 2460099 A [0005]
- US 20080033451 A [0005]

