



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.04.2014 Bulletin 2014/15

(21) Application number: **13186950.5**

(22) Date of filing: **01.10.2013**

(51) Int Cl.:
A61B 17/29 (2006.01) **A61B 1/12** (2006.01)
A61B 19/00 (2006.01) **A61B 1/313** (2006.01)
A61B 17/00 (2006.01) **A61B 17/32** (2006.01)
A61B 17/34 (2006.01)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **02.10.2012 US 201261708677 P**
11.09.2013 US 201314023500

(71) Applicant: **Covidien LP**
Mansfield, MA 02048 (US)

(72) Inventor: **Schaning, Matthew**
Cambridge, WI 53523 (US)

(74) Representative: **Maschio, Antonio**
Maschio & Soames LLP
20 Carlton Crescent
Southampton, SO15 2ET (GB)

(54) **Laparoscopic lens wipe feature on surgical device shaft or jaw member**

(57) A first surgical instrument includes a shaft having an extension member such as a pair of jaw members at a distal end that are movable about a pivot for grasping tissue. The first surgical instrument enables a user to move the shaft and the pair of jaw members. A cleaning material is disposed on an external surface of the extension member such as at least one jaw member or disposed on the shaft. The first surgical instrument and the second surgical instrument define a distance between

each other. The cleaning material is configured to clean at least a portion of at least a second surgical instrument in proximity to the first surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced. A corresponding method of cleaning the second surgical instrument with the cleaning material of the first surgical instrument is also disclosed.

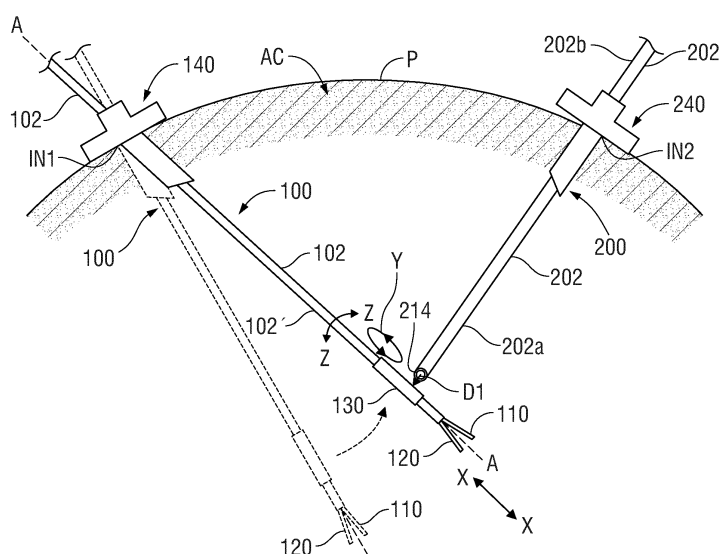


FIG. 3

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of and priority from U.S. Provisional Patent Application No. 61/708,677, filed October 2, 2012, the entire disclosure of which is incorporated by reference herein

BACKGROUND

Technical Field

[0002] This application relates to maintaining optical clarity of a surgical instrument.

Description of Related Art

[0003] Known practices of cleaning a lens of a laparoscopic instrument scope involve removing the scope from the patient, wiping with a cloth, reinserting the scope, and then finding the proper location in the body again. This can occur multiple times during a procedure and increases overall procedure time as fog and/or smoke and/or bodily fluids often accumulate on the laparoscopic lens during a laparoscopic surgical procedure. Moreover, removing a device and reinserting increases infection risk, albeit a very small risk as this is performed in a sterile field.. Surgeons typically must remove the laparoscope from the patient and lose time re-orienting themselves and their instruments to the operative site.

SUMMARY

[0004] To advance the state of the art with respect to maintaining optical clarity of a surgical instrument during a surgical procedure, the present disclosure relates to a first surgical instrument having a cleaning material configured to clean a second surgical instrument. More particularly, in one embodiment, the first surgical instrument includes a handle assembly defining a proximal end of the first surgical instrument and an extension member extending distally from the handle assembly and defining a distal end of the first surgical instrument. The extension member defines an external surface. The handle assembly is configured to enable a user to move the extension member. The improvement includes a cleaning material disposed on the external surface of the extension member at the distal end. The cleaning material is configured to clean at least a portion of a second surgical instrument in proximity to the first surgical instrument. The first surgical instrument and the second surgical instrument define a distance therebetween. The cleaning material is configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0005] In one embodiment, the extension member is a

shaft having a pair of jaw members at a distal end of the shaft. The jaw members are movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to a at least a second position wherein the jaw members are closer to one another for grasping tissue. The first surgical instrument is configured to enable a user to move the shaft and the pair of jaw members. The shaft and the jaw members each define external surfaces. The first surgical instrument includes a cleaning material disposed on the external surface of at least one jaw member or disposed on the external surface of the shaft.

[0006] The cleaning material may be disposed on the distal end of the shaft in proximity to the pair of jaw members. The second surgical instrument may be a laparoscopic instrument including a lens surface and the cleaning material is configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0007] In one embodiment, the cleaning material may be adhered to the extension member, e.g., at least one jaw member or the shaft, via an adhesive adhering a surface of the cleaning material to the external surface of the extension member, e.g., to the external surface of the at least one jaw member or to the external surface of the shaft respectively.

[0008] In one embodiment, the extension member, such as the shaft, defines a depression therein and the cleaning material is disposed in the depression in the extension member.

[0009] In yet another embodiment, the cleaning material includes a blade-like structure. The blade-like structure may be configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced. The blade-like structure may be formed from a flexible material. The flexible material may be made from one of cloth, rubber or silicone. In one embodiment, when the second surgical instrument is a laparoscopic instrument including a lens surface, the blade-like structure may be configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0010] In one embodiment, the extension member defines a longitudinal axis and the first surgical instrument may be configured to reciprocally move in the direction of the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0011] In still another embodiment, the first surgical instrument may be configured to enable the cleaning material to move in a curved path to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0012] In yet another embodiment, the extension member defines a longitudinal axis and the first surgical instrument may be configured to rotate the cleaning material around the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0013] The present disclosure relates also to a method of cleaning at least a portion of a second surgical instrument in proximity to a first surgical instrument. In one embodiment, the first surgical instrument includes a handle assembly and an extension member that extends distally from the handle assembly. The method includes disposing a cleaning material on an external surface of the extension member; positioning the first surgical instrument in proximity to a second surgical instrument to define a distance between the first and second surgical instruments; reducing the distance between the first surgical instrument and the second surgical instrument; and cleaning at least a portion of the second surgical instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0014] In one embodiment, the extension member is a shaft having a pair of jaw members at a distal end thereof. The jaw members are movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to at least a second position wherein the jaw members are closer to one another for grasping tissue. The step of disposing the cleaning material includes disposing the cleaning material on an external surface of the shaft or an external surface of at least one jaw member. The step of disposing the cleaning material includes disposing the cleaning material on the external surface of the shaft at the distal end of the shaft in proximity to the pair of jaw members.

[0015] In one embodiment, the second surgical instrument is a laparoscopic instrument including a lens surface and the method includes cleaning at least a portion of the lens of the laparoscopic instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0016] In one embodiment, the step of disposing the cleaning material may include adhering the cleaning material to the external surface of the extension member, e.g., to the external surface of at least one jaw member or to the external surface of the shaft, via an adhesive adhering a surface of the cleaning material to the external surface of the extension member.

[0017] In one embodiment, the extension member defines a depression therein and the step of disposing the cleaning material may include disposing the cleaning material in the depression in the extension member.

[0018] In yet another embodiment, the step of disposing the cleaning material on an external surface of the extension member includes disposing a cleaning material having a blade-like structure, and the step of cleaning

at least a portion of the second surgical instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instrument is reduced may include cleaning at least a portion of the second surgical instrument with the cleaning material having a blade-like structure.

[0019] In one embodiment, the second surgical instrument is a laparoscopic instrument including a lens surface, and the method includes cleaning at least a portion of the lens of the laparoscopic instrument with the cleaning material having a blade-like structure.

[0020] In yet another embodiment, the extension member defines a longitudinal axis, and the method includes the step of reciprocally moving the first surgical instrument in the direction of the longitudinal axis such that the cleaning material cleans the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0021] In one embodiment, the step of cleaning may include moving the cleaning material in a curved path to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

[0022] In yet another embodiment, the extension member defines a longitudinal axis and the step of cleaning includes rotating the cleaning material around the longitudinal axis such that the cleaning material cleans the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] Various embodiments will be described herein below with reference to the drawings wherein:

[0024] FIG. 1 is a side view of surgical instrument having a cleaning material disposed on a shaft of the instrument according to one embodiment of the present disclosure;

[0025] FIG. 1A is a detailed view of the cleaning material of FIG. 1 disposed on the shaft;

[0026] FIG. 2 is a cross-sectional view of the abdominal cavity of a patient in which the surgical instrument of FIG. 1 having a cleaning material disposed on a shaft of the instrument is inserted into the abdominal cavity in proximity to a second surgical instrument having a lens which can be cleaned by the cleaning material;

[0027] FIG. 3 is cross-sectional view of the abdominal cavity of FIG. 2 in which the cleaning material is in position to directly contact and clean the lens of the second surgical instrument;

[0028] FIG. 4 is a perspective view the shaft of the surgical instrument of FIG. 1 wherein the shaft defines a depression therein and wherein the cleaning material is disposed in the depression in the shaft according to one embodiment of the present disclosure;

[0029] FIG. 5 is a perspective view of the shaft of the surgical instrument of FIG. 1 wherein the cleaning mate-

rial has a blade-like configuration according to one embodiment of the present disclosure; and

[0030] FIG. 6 is a perspective view of jaw members of the surgical instrument of FIG. 1 surgical instrument having a cleaning material disposed on a jaw member of the instrument.

DETAILED DESCRIPTION

[0031] The embodiments of the present disclosure relate to a surgical instrument having a cleaning material that is disposed on a shaft or on a jaw member of a first surgical instrument in which the cleaning material is configured to clean at least a portion of at least a second surgical instrument in proximity to the first surgical instrument. The embodiments of the present disclosure advance the state of the art of surgical procedures by speeding procedure time, by requiring fewer steps for cleaning, and by lowering the risk of infection.

[0032] The surgical instrument having a cleaning material according to the embodiments of the present disclosure eliminates time costly steps by incorporating a laparoscopic wipe feature on the shaft of a commonly used laparoscopic surgical instrument such as a radio frequency (RF) sealer/divider, manufactured by Covidien, Inc (Boulder, Colorado, USA) under the trademark LIGASURE™ or an ultrasonic dissector, manufactured by Covidien, Inc. (Boulder, Colorado, USA) under the trademark SONICISION™.

[0033] The cleaning material or wipe may be made from a material that is felt-like and adhered to the shaft of the device near the jaws. Other material options include rubbers/silicones that behave similarly to windshield wipers.

[0034] It is worthy to note that any reference in the specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment. The appearances of the phrase "in one embodiment" in various places in the specification are not necessarily all referring to the same embodiment.

[0035] Turning now to FIG. 1, there is disclosed an exemplary first surgical instrument 100 that includes a handle assembly 104. An extension member 101 extends distally from the handle assembly 104 to define a proximal end 102b and a distal end 102a of the first surgical instrument 100. The extension member 101 defines an external surface 102'. In the exemplary embodiment of FIG. 1, the handle assembly 104 may include a handle 114 that includes a movable trigger or actuator 116 on a distal side of the handle 114.

[0036] More particularly, as shown in the exemplary embodiment of FIG. 1, the first surgical instrument is an electrosurgical forceps wherein the extension member 101 includes a shaft 102 having a pair of jaw members, e.g., lower jaw member 110 and upper jaw member 120, at distal end 120a of the shaft 102. The jaw members

110 and 120 are movable about a pivot 106 from a first position wherein the jaw members 110 and 120 are disposed in spaced relation relative to one another, as shown in FIG. 1, to a second position wherein the jaw members 110 and 120 are closer to one another (not shown) for grasping tissue (not shown). In the example herein of an electrosurgical forceps, at least one jaw member 110 and/or 120 is adapted to connect to a source of electrical energy (not shown) and such that the jaw members 110 and 120 are capable of conducting energy to tissue held between the jaw members 110 and 120. The movable trigger or actuator 116 actuates a drive assembly, included within shaft 102, to move the jaw members 110 and 120 relative to one another.

[0037] As can be appreciated from the foregoing, the first surgical instrument 100 is configured to enable a user, e.g., a surgeon or a remotely controlled machine (neither of which are shown), to move the shaft 102 and the pair of jaw members 110 and 120.

[0038] As illustrated in FIG. 1A, in one embodiment, a cleaning material 130 may be adhered to the shaft 102 via an adhesive 132 adhering a surface 130' of the cleaning material 130 to external surface 102' of the extension member 101 as represented by the shaft 102. 11. The cleaning material may be made from cloth, rubber or silicone or other suitable material.

[0039] In conjunction with FIG. 2, the cleaning material 130 is disposed on the shaft 102 in proximity to the distal end 102a. The shaft 102 and the jaw members 110 and 120 of the first surgical instrument 100 are disposed through a first trocar 140 that penetrates a first incision **IN1** into the abdominal cavity **AC** in a patient **P**.

[0040] At least a second exemplary surgical instrument 200 includes a shaft 202 having a distal end 202a and a proximal end 202b. The distal end 202a of the shaft 202 is disposed through a second trocar 240 that penetrates a second incision **IN2** into the abdominal cavity **AC** of the patient **P**. The second surgical instrument 200 may be inserted through the second trocar 240 via a movable handle (not shown) that may be disposed in the vicinity of the proximal end 202b of the shaft 202. The first surgical instrument 100 and the second surgical instrument 200 are positioned through the first and second incisions **IN1** and **IN2** at an angle with respect to each other to define a variable distance **D1** between the distal end 102a of the first surgical instrument 100 and the distal end 202a of the second surgical instrument 200.

[0041] Turning now to FIG. 3, when the variable distance **D1** is reduced sufficiently, such as by moving either handle 104 of the first surgical instrument 100 or the movable handle of the second surgical instrument 200 or both, the cleaning material 130 is moved into position in proximity to the distal end 202a of the second surgical instrument 200 to contact the second surgical instrument 200 such that the cleaning material 130 is thus configured to clean at least a portion of the second surgical instrument 200.

[0042] As illustrated in FIGS. 2 and 3, the exemplary

second surgical instrument 200 is a laparoscopic instrument that includes a lens surface 214 disposed at the distal end 202a of the shaft 202. As illustrated in FIGS. 1, 2 and 3, the extension member 101, as represented by shaft 102, defines a longitudinal axis **A-A** such that the shaft 102 can move in multiple directions to enable the cleaning material 130 to clean the second surgical instrument 200, and more particularly in the exemplary embodiment of FIGS. 2 and 3, the lens 214 of the second or laparoscopic instrument 200.

[0043] In one embodiment, the first surgical instrument 100 can be reciprocally moved, and thus is configured to reciprocally move, in the direction of the longitudinal axis **A-A** as shown by the double-headed arrow **X** to enable the cleaning material 130 to clean the second surgical instrument 200 when the distance **D1** is reduced sufficiently as described above.

[0044] In one embodiment, the first surgical instrument 100 can be moved in a curved path, and thus is configured to move in a curved path, as shown by the curved path **Y** to enable the cleaning material 130 to move in the curved path **Y** to clean the second surgical instrument 200 when the distance **D1** is reduced sufficiently again as described above.

[0045] The first surgical instrument 100 can also be caused to rotate the cleaning material 130 around the longitudinal axis **A-A**, and thus the first surgical instrument 100 is configured to rotate the cleaning material 130 around the longitudinal axis **A-A**, as shown by the double-headed circular arrow **Z** to enable the cleaning material 130 to clean the second surgical instrument 200 when the distance **D1** is reduced sufficiently as described above. The rotation of the cleaning material 130 may be effected by rotation of the shaft 102 around the longitudinal axis **A-A**.

[0046] As can be appreciated by those skilled in the art, by means of the aforementioned means of motion of the cleaning material 130, the cleaning material 130 is thus also configured to clean at least a portion of the lens 214 of the second or laparoscopic instrument 200 when the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200 is reduced sufficiently as described above.

[0047] FIG. 4 illustrates one embodiment of the present disclosure wherein the extension member 101 represented by the shaft 102 defines a depression 108 in external surface 102' in proximity to distal end 102a and a cleaning material 1301 is disposed in the depression 108 in the shaft 102 to enable more secure retention of the cleaning material 1301 within the depression 108 and attachment to the shaft 102 during a surgical procedure. As before, the cleaning material 1301 may be formed from a flexible material such as cloth, rubber or silicone.

[0048] Although the cleaning material 1301 may be moved in the **X** and/or **Y** directions described above with respect to FIG. 3, the cleaning material 1301 is particularly suitable for rotational motion in the **Z** direction as also described above with respect to FIG. 3. Thus, the

cleaning material 1301 is configured to clean at least a portion of the second surgical instrument 200 when the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200 is reduced sufficiently as described above.

[0049] FIG. 5 illustrates one embodiment of the present disclosure wherein a cleaning material 1302, disposed on external surface 102' of the extension member 101 represented by shaft 102, is defined by a blade-like structure that includes, for example, first, second, third and fourth blade-like projections 1302a, 1302b, 1302c and 1302d that radially project outwardly from the shaft centerline axis **A-A**. The blade-like structure 1302 may be formed from a flexible material such as cloth, rubber or silicone.

[0050] In a similar manner, although the blade like projections 1302a to 1302d may be moved in the **X** and/or **Y** directions described above with respect to FIG. 3, the blade-like projections 1302a to 1302d are also particularly suitable for rotational motion in the **Z** direction as described above with respect to FIG. 3. Thus, the blade-like structure of cleaning material 1302 is configured to clean at least a portion of the second surgical instrument 200 when the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200 is reduced sufficiently as described above.

[0051] FIG. 6 illustrates one embodiment of the present disclosure wherein a cleaning material 1303 is disposed on the extension member 101, as represented by at least one of the jaw members 110 and 120 of the first surgical instrument 100. More particularly, upper jaw member 120 is illustrated as having cleaning material 1303 disposed on upper surface 120' of the jaw member 120 by means such as an adhesive layer 1321 adhering upper surface 120' to interior surface 1303' of the cleaning material 1303. Again, the cleaning material 1303 may be made from a flexible material such as cloth, rubber or silicone or other suitable material.

[0052] The cleaning material 1303 on the jaw member 120 (or on jaw member 110) may be moved in the **X** and/or **Y** and/or **Z** directions described above with respect to FIG. 3. Thus, in a similar manner, the cleaning material 1303 is configured to clean at least a portion of the second surgical instrument 200 when the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200 is reduced sufficiently as described above.

[0053] Those skilled in the art will recognize upon reading the foregoing disclosure that FIGS. 1, 1A and 2-6 illustrate a method of cleaning at least a portion of at least second surgical instrument 200 when in proximity to first surgical instrument 100.

[0054] The method includes disposing a cleaning material on external surface 102' of extension member 101, e.g., cleaning material 1303 on external surface 120' of jaw member 120 of first surgical instrument 100, as illustrated in FIG. 6, or on an external surface of a shaft of the first surgical instrument, e.g., cleaning material 130

or 1301 or 1302 disposed on external surface 102' of shaft 102 of the first surgical instrument 100 as illustrated in FIGS. 1, 1A and 2-5. The method also includes positioning the first surgical instrument 100 in proximity to second surgical instrument 200 to define distance **D1** therebetween, as illustrated in FIG. 2.

[0055] As illustrated in FIG. 3, the method also includes reducing the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200, such as by moving first surgical instrument 100 closer to second surgical instrument 200, or by moving second surgical instrument 200 closer to first surgical instrument 100, or by moving both surgical instruments 100 and 200 at the same time towards each other such that the cleaning material 130 contacts the second surgical instrument 200.

[0056] As also illustrated in FIG. 3, the method also includes cleaning at least a portion of the second surgical instrument 200 with the cleaning material 130 when the distance **D1** between the first surgical instrument 100 and the second surgical instrument 200 is reduced as described above.

[0057] As illustrated in FIGS. 1, 1A, and 2-5, the step of disposing the cleaning material may include disposing the cleaning material, e.g., cleaning materials 130, 1301 and 1302, on external surface 102' at the distal end 102a of the shaft 102 in proximity to the pair of jaw members 110 and 120.

[0058] As illustrated in FIG. 6, the step of disposing the cleaning material may include disposing the cleaning material 1303 on at least one jaw member, e.g., on surface 120' of jaw member 120, as described above.

[0059] As illustrated in FIG. 1A, disposing the cleaning material may include, for example, adhering the cleaning material 130 to the shaft 102 via adhesive 132 adhering surface 130' of the cleaning material 130 to external surface 102' of the shaft 102. As illustrated in FIG. 6, disposing the cleaning material may also include adhering the cleaning material 1303 disposed on external or upper surface 120' of the jaw member 120 by means such as adhesive layer 1321 adhering upper surface 120' to interior surface 1303' of the cleaning material 1303.

[0060] As illustrated in FIG. 4, the external surface 102' of shaft 102 may define a depression 108 therein and the step of disposing the cleaning material may include disposing the cleaning material 1301 in the depression 108 in the shaft 102.

[0061] As illustrated in FIG. 5, the step of disposing the cleaning material may include disposing cleaning material 1302 having a blade-like structure, and the step of cleaning at least a portion of the second surgical instrument 200 when the distance **D1** is reduced may include cleaning at least a portion of the second surgical instrument 200 with the cleaning material 1302 having a blade-like structure, including cleaning at least a portion of the lens 214 of the laparoscopic instrument 200 with the cleaning material 1302 having a blade-like structure.

[0062] The step of cleaning may include cleaning at

least a portion of the lens 214 of the laparoscopic instrument 200 when the distance **D1** between the first surgical instrument 100 and laparoscopic instrument 200 is reduced sufficiently as described above.

[0063] As particularly illustrated in FIG. 3, the step of cleaning may include reciprocally moving the first surgical instrument 100 in the direction of the longitudinal axis **A-A**, as illustrated by arrow **X-X**, or in a zig-zag manner generally in the direction of the longitudinal axis **A-A** (not explicitly shown), such that the cleaning material, e.g. cleaning material 130, 1301, 1302 or 1302, cleans the second surgical instrument 200 when the distance **D1** is reduced sufficiently as described above.

[0064] The step of cleaning may also include moving the cleaning material in curved path **Y** to clean the second surgical instrument 200 when the distance **D1** is reduced sufficiently.

[0065] The step of cleaning may also include rotating the cleaning material, e.g. cleaning material 130, 1301, 1302 or 1302, around the longitudinal axis **A-A** such that the cleaning material cleans the second surgical instrument 200 when the distance **D1** is reduced sufficiently.

[0066] While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosures be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments.

[0067] The invention may be described by reference to the following numbered paragraphs:-

1. A first surgical instrument, comprising: a handle assembly defining a proximal end of the first surgical instrument; and an extension member extending distally from the handle assembly and defining a distal end of the first surgical instrument, the extension member defining an external surface, the handle assembly configured to enable a user to move the extension member, wherein the improvement comprises: a cleaning material disposed on the external surface of the extension member at the distal end thereof, the cleaning material configured to clean at least a portion of a second surgical instrument in proximity to the first surgical instrument, the first surgical instrument and the second surgical instrument defining a distance therebetween, the cleaning material configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

2. The first surgical instrument according to paragraph 1, wherein the extension member is a shaft having a pair of jaw members at a distal end thereof, the jaw members movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to a at least

a second position wherein the jaw members are closer to one another for grasping tissue, the shaft and the jaw members each defining external surfaces; and the cleaning material is disposed on the external surface of at least one jaw member or disposed on the external surface of the shaft.

3. The first surgical instrument according to paragraph 2, wherein the cleaning material is disposed on the distal end of the shaft in proximity to the pair of jaw members.

4. The first surgical instrument according to paragraph 1, wherein the second surgical instrument is a laparoscopic instrument including a lens surface, and the cleaning material is configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

5. The first surgical instrument according to paragraph 1, wherein the cleaning material is adhered to the extension member via an adhesive adhering a surface of the cleaning material to the external surface of the extension member.

6. The first surgical instrument according to paragraph 2, wherein the cleaning material is adhered to the at least one jaw member or to the shaft via an adhesive adhering a surface of the cleaning material to the external surface of the at least one jaw member or to the external surface of the shaft respectively.

7. The first surgical instrument according to paragraph 1, wherein the extension member defines a depression therein and wherein the cleaning material is disposed in the depression in the extension member.

8. The first surgical instrument according to paragraph 1, wherein the cleaning material includes a blade-like structure, the blade-like structure configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

9. The first surgical instrument according to paragraph 8, wherein the blade-like structure is formed from a flexible material.

10. The first surgical instrument according to paragraph 9, wherein the flexible material is made from one of cloth, plastic, rubber or silicone.

11. The first surgical instrument according to paragraph 8, wherein the second surgical instrument is a laparoscopic instrument including a lens surface, the blade-like structure configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

12. The first surgical instrument according to paragraph 1, wherein the cleaning material is made from one of cloth, plastic, rubber or silicone.

13. The first surgical instrument according to para-

graph 1, wherein the extension member defines a longitudinal axis and the first surgical instrument is configured to reciprocally move in the direction of the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

14. The first surgical instrument according to paragraph 1, wherein the first surgical instrument is configured to enable the cleaning material to move in a curved path to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

15. The first surgical instrument according to paragraph 1, wherein the extension member defines a longitudinal axis and the first surgical instrument is configured to rotate the cleaning material around the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

16. A method of cleaning at least a portion of a second surgical instrument in proximity to a first surgical instrument, the first surgical instrument comprising a handle assembly and an extension member extending distally from the handle assembly, the method comprising: disposing a cleaning material on an external surface of the extension member; positioning the first surgical instrument in proximity to a second surgical instrument to define a distance therebetween; reducing the distance between the first surgical instrument and the second surgical instrument; and cleaning at least a portion of the second surgical instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instrument is reduced.

17. The method of cleaning according to paragraph 16, wherein the extension member is a shaft having a pair of jaw members at a distal end thereof, the jaw members movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to a at least a second position wherein the jaw members are closer to one another for grasping tissue and wherein the step of disposing the cleaning material includes disposing the cleaning material on an external surface of the shaft or on an external surface of at least one jaw member.

18. The method of cleaning according to paragraph 17, wherein the step of disposing the cleaning material includes disposing the cleaning material on the external surface of the shaft at the distal end of the shaft in proximity to the pair of jaw members.

19. The method of cleaning according to paragraph 16, wherein the second surgical instrument is a laparoscopic instrument including a lens surface, the method comprising cleaning at least a portion of the lens of the laparoscopic instrument with the cleaning

material when the distance between the first surgical instrument and the second surgical instrument is reduced.

20. The method of cleaning according to paragraph 16, wherein the step of disposing the cleaning material includes adhering the cleaning material to the external surface of the extension member via an adhesive adhering a surface of the cleaning material to the external surface of the extension member.

Claims

1. A first surgical instrument, comprising:

a handle assembly defining a proximal end of the first surgical instrument; and
an extension member extending distally from the handle assembly and defining a distal end of the first surgical instrument,
the extension member defining an external surface,
the handle assembly configured to enable a user to move the extension member, and
a cleaning material disposed on the external surface of the extension member at the distal end thereof, the cleaning material configured to clean at least a portion of a second surgical instrument in proximity to the first surgical instrument, the first surgical instrument and the second surgical instrument defining a distance therebetween, the cleaning material configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

2. The first surgical instrument according to claim 1, wherein the extension member is a shaft having a pair of jaw members at a distal end thereof, the jaw members movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to a at least a second position wherein the jaw members are closer to one another for grasping tissue, the shaft and the jaw members each defining external surfaces; and wherein the cleaning material is disposed on the external surface of at least one jaw member or disposed on the external surface of the shaft.

3. The first surgical instrument according to claim 2, wherein the cleaning material is disposed on the distal end of the shaft in proximity to the pair of jaw members.

4. The first surgical instrument according to any of the preceding claims, wherein the second surgical instrument is a laparoscopic instrument including a

lens surface, and the cleaning material is configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

5. The first surgical instrument according to any of the preceding claims, wherein the cleaning material is adhered to the extension member via an adhesive adhering a surface of the cleaning material to the external surface of the extension member.

6. The first surgical instrument according to any of claims 2 to 5, wherein the cleaning material is adhered to the at least one jaw member or to the shaft via an adhesive adhering a surface of the cleaning material to the external surface of the at least one jaw member or to the external surface of the shaft respectively.

7. The first surgical instrument according to any of the preceding claims, wherein the extension member defines a depression therein and wherein the cleaning material is disposed in the depression in the extension member.

8. The first surgical instrument according to any of the preceding claims, wherein the cleaning material includes a blade-like structure, the blade-like structure configured to clean at least a portion of the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

9. The first surgical instrument according to claim 8, wherein the blade-like structure is formed from a flexible material, preferably, wherein the flexible material is made from one of cloth, plastic, rubber or silicone.

10. The first surgical instrument according to claim 8 or claim 9, wherein the second surgical instrument is a laparoscopic instrument including a lens surface, the blade-like structure configured to clean at least a portion of the lens of the laparoscopic instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

11. The first surgical instrument according to any of the preceding claims, wherein the cleaning material is made from one of cloth, plastic, rubber or silicone; and/or wherein the extension member defines a longitudinal axis and the first surgical instrument is configured to reciprocally move in the direction of the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced; and/or

wherein the first surgical instrument is configured to enable the cleaning material to move in a curved path to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced; and/or

wherein the extension member defines a longitudinal axis and the first surgical instrument is configured to rotate the cleaning material around the longitudinal axis to enable the cleaning material to clean the second surgical instrument when the distance between the first surgical instrument and the second surgical instrument is reduced.

12. A method of cleaning at least a portion of a second surgical instrument in proximity to a first surgical instrument, the first surgical instrument comprising a handle assembly and an extension member extending distally from the handle assembly, the method comprising:

disposing a cleaning material on an external surface of the extension member;

positioning the first surgical instrument in proximity to a second surgical instrument to define a distance therebetween;

reducing the distance between the first surgical instrument and the second surgical instrument; and

cleaning at least a portion of the second surgical instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instrument is reduced.

13. The method of cleaning according to claim 12, wherein the extension member is a shaft having a pair of jaw members at a distal end thereof, the jaw members movable about a pivot from a first position wherein the jaw members are disposed in spaced relation relative to one another to a at least a second position wherein the jaw members are closer to one another for grasping tissue and wherein the step of disposing the cleaning material includes disposing the cleaning material on an external surface of the shaft or on an external surface of at least one jaw member; and/or
- wherein the step of disposing the cleaning material includes disposing the cleaning material on the external surface of the shaft at the distal end of the shaft in proximity to the pair of jaw members

14. The method of cleaning according to any of claims 12 or 13, wherein the second surgical instrument is a laparoscopic instrument including a lens surface, the method comprising cleaning at least a portion of the lens of the laparoscopic instrument with the cleaning material when the distance between the first surgical instrument and the second surgical instru-

ment is reduced.

15. The method of cleaning according to any of claims 12 to 14, wherein the step of disposing the cleaning material includes adhering the cleaning material to the external surface of the extension member via an adhesive adhering a surface of the cleaning material to the external surface of the extension member.

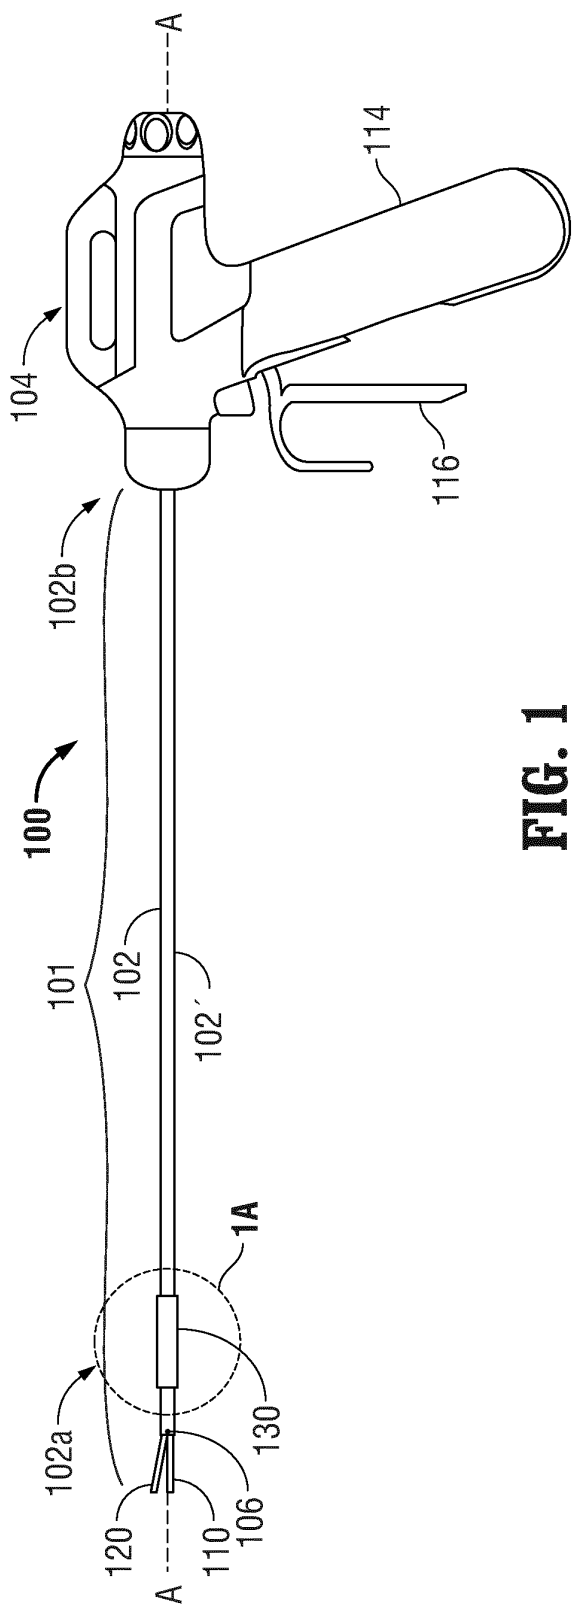


FIG. 1

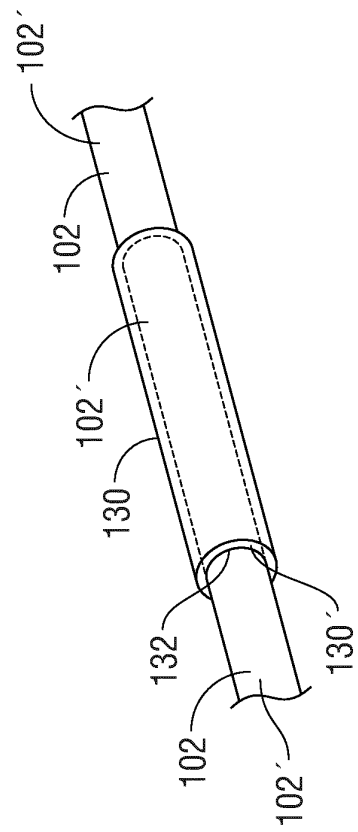


FIG. 1A

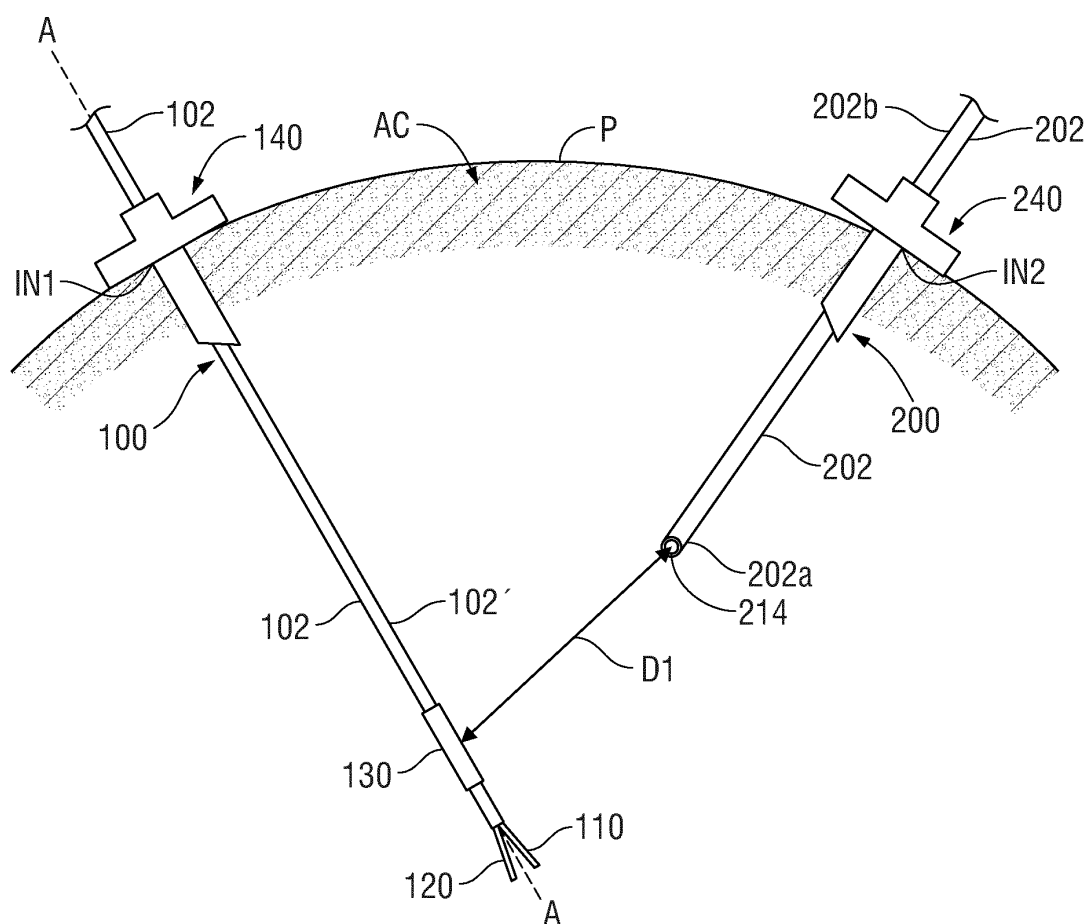


FIG. 2

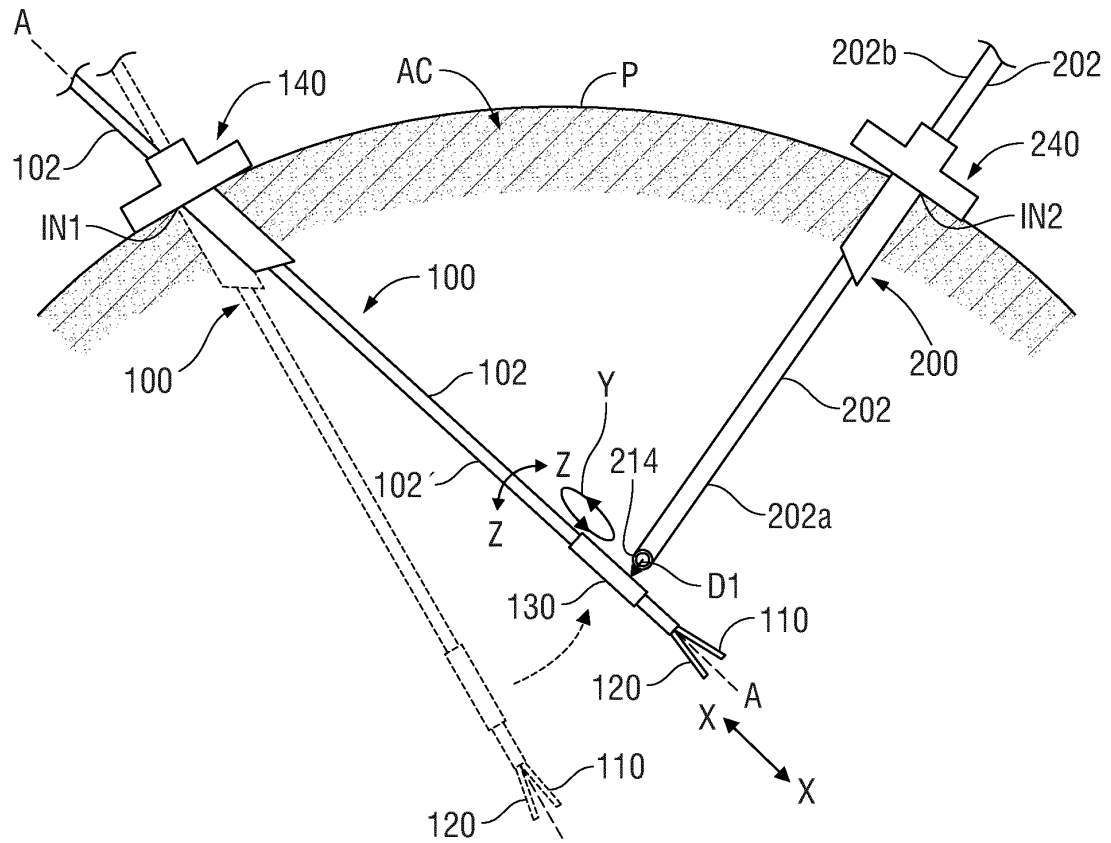


FIG. 3

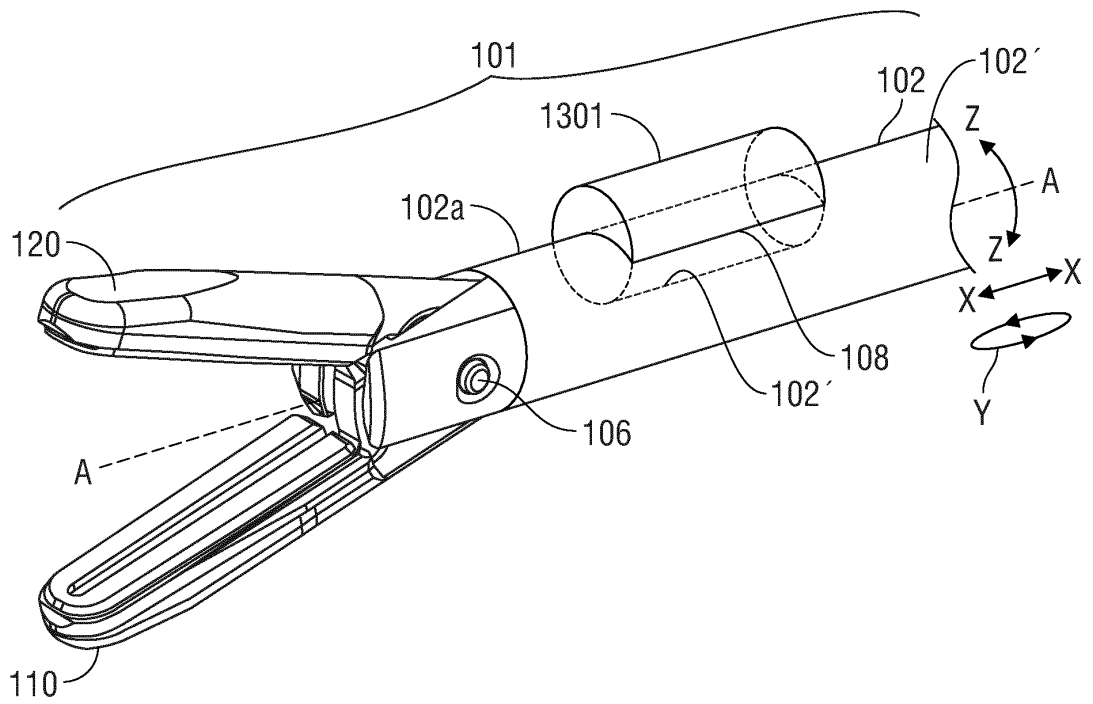


FIG. 4

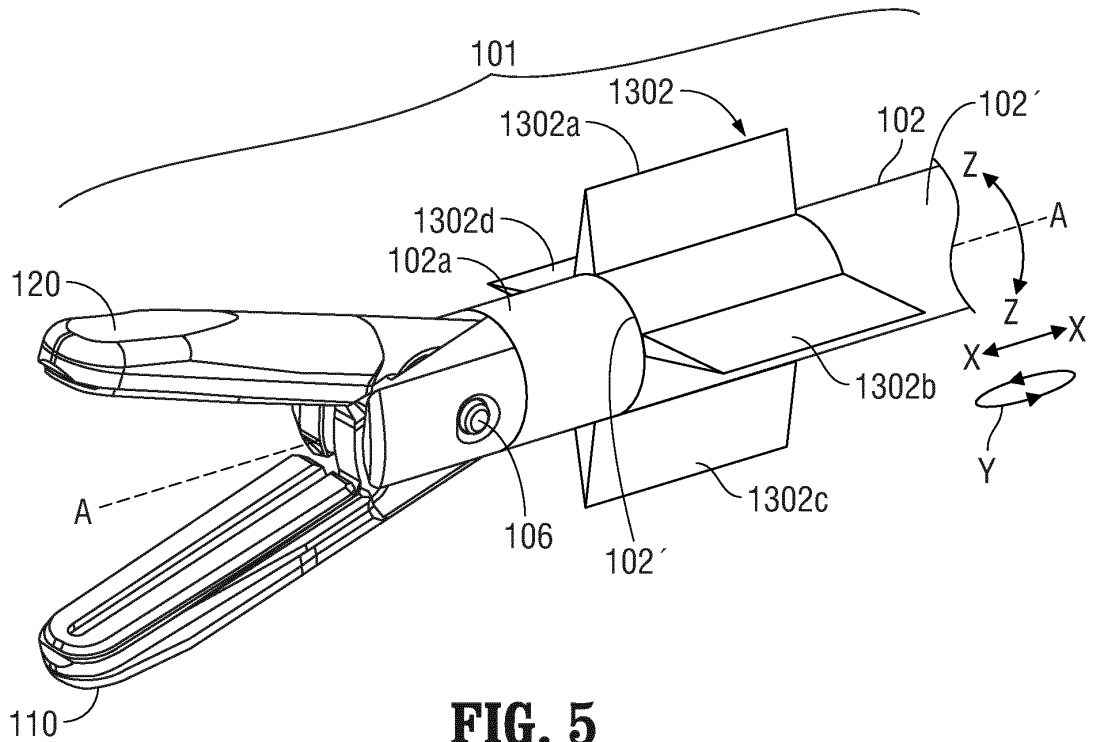


FIG. 5

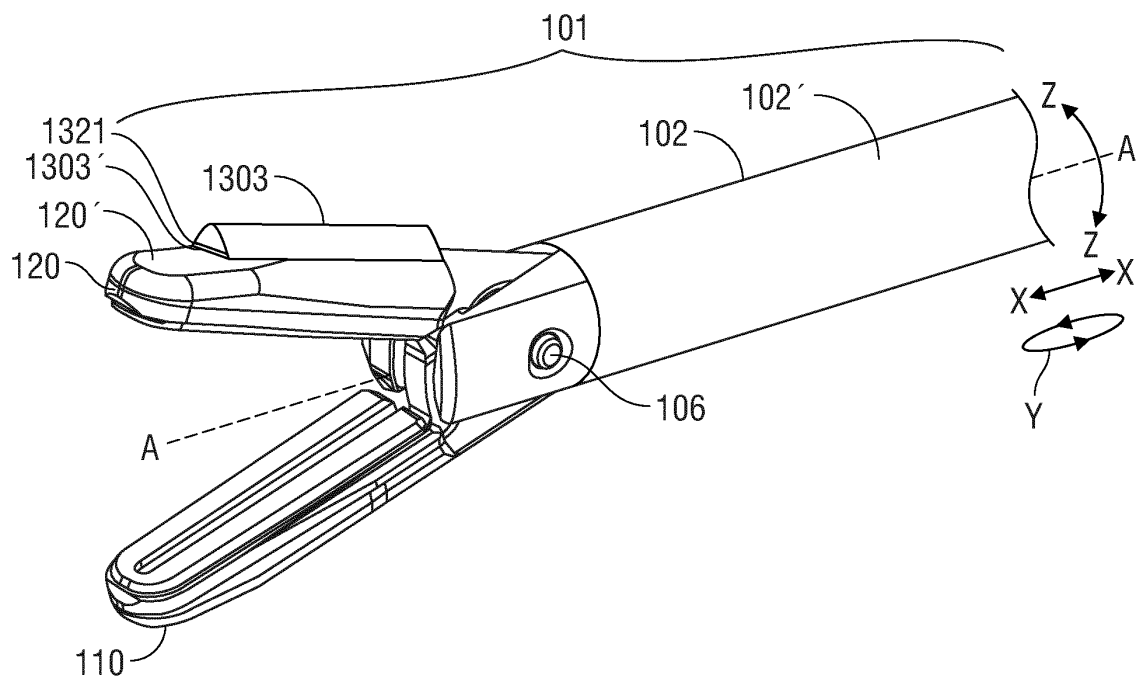


FIG. 6



EUROPEAN SEARCH REPORT

Application Number
EP 13 18 6950

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2009/018288 A1 (BARRX MEDICAL INC [US]; WALLACE MICHAEL [US]; UTLEY DAVID [US]; GERBER) 5 February 2009 (2009-02-05) * paragraph [0045] - paragraph [0085]; figures 1-24 *	1-11	INV. A61B17/29 A61B1/12 A61B19/00
X	EP 2 111 782 A2 (TYCO HEALTHCARE [US]) 28 October 2009 (2009-10-28) * paragraph [0027] - paragraph [0035]; figures 1-3 *	1-11	ADD. A61B1/313 A61B17/00 A61B17/32 A61B17/34
A	US 5 514 084 A (FISHER YALE [US]) 7 May 1996 (1996-05-07) * column 4, line 31 - column 7, line 8; figures 1-9 *	1-11	
A	US 2009/105543 A1 (MILLER ERIC C [US] ET AL) 23 April 2009 (2009-04-23) * paragraph [0037] - paragraph [0061]; figures 1-16 *	1-11	
A	US 5 203 767 A (CLOYD DAVID W [US]) 20 April 1993 (1993-04-20) * column 1, line 64 - column 3, line 19; figures 1-3 *	1-11	TECHNICAL FIELDS SEARCHED (IPC) A61B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 29 November 2013	Examiner Neef, Tatjana
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 6950

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-11-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009018288 A1	05-02-2009	TW 200914072 A	01-04-2009
		US 2009036733 A1	05-02-2009
		US 2013218153 A1	22-08-2013
		WO 2009018288 A1	05-02-2009

EP 2111782 A2	28-10-2009	AU 2009201180 A1	05-11-2009
		CA 2661238 A1	21-10-2009
		EP 2111782 A2	28-10-2009
		EP 2193742 A1	09-06-2010
		JP 2009261923 A	12-11-2009
		US 2009264703 A1	22-10-2009
		US 2012116169 A1	10-05-2012

US 5514084 A	07-05-1996	NONE	

US 2009105543 A1	23-04-2009	NONE	

US 5203767 A	20-04-1993	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 61708677 A [0001]

专利名称(译)	腹腔镜镜片擦拭功能在手术装置轴或钳口构件上		
公开(公告)号	EP2716238A1	公开(公告)日	2014-04-09
申请号	EP2013186950	申请日	2013-10-01
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	COVIDIEN LP		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	SCHANING MATTHEW		
发明人	SCHANING, MATTHEW		
IPC分类号	A61B17/29 A61B1/12 A61B19/00 A61B1/313 A61B17/00 A61B17/32 A61B17/34		
CPC分类号	A61B1/126 A61B1/313 A61B17/282 A61B17/29 A61B90/70 A61B2017/00353 A61B2017/2901 A61B2017/2926 A61B2017/320004 A61B2017/3437 A61B2090/701		
代理机构(译)	MASCHIO , ANTONIO		
优先权	14/023500 2013-09-11 US 61/708677 2012-10-02 US		
外部链接	Espacenet		

摘要(译)

第一手术器械包括具有延伸构件的轴，所述延伸构件例如在远端处的一对钳口构件，所述钳口构件可围绕用于抓取组织的枢轴移动。第一手术器械使使用者能够移动轴和一对钳夹构件。清洁材料设置在延伸构件的外表面上，例如至少一个钳口构件或设置在轴上。第一手术器械和第二手术器械限定彼此之间的距离。清洁材料被配置为当第一手术器械和第二手术器械之间的距离减小时，清洁第一手术器械附近的至少第二手术器械的至少一部分。还公开了用第一手术器械的清洁材料清洁第二手术器械的相应方法。

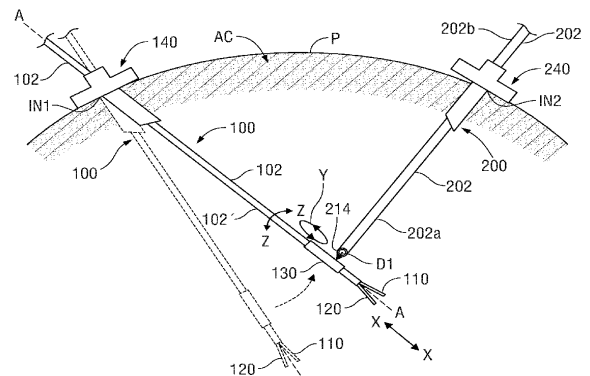


FIG. 3