

(19)



(11)

**EP 2 958 499 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**19.06.2019 Bulletin 2019/25**

(51) Int Cl.:  
**A61B 17/34** (2006.01)      **A61B 17/29** (2006.01)  
**A61B 90/30** (2016.01)      **A61B 17/00** (2006.01)

(21) Application number: **14709418.9**

(86) International application number:  
**PCT/IB2014/059213**

(22) Date of filing: **24.02.2014**

(87) International publication number:  
**WO 2014/128672 (28.08.2014 Gazette 2014/35)**

**(54) SURGICAL TOOL INTRODUCER**

EINFÜHRVORRICHTUNG FÜR CHIRURGISCHES WERKZEUG

INTRODUCTEUR D'OUTIL CHIRURGICAL

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(72) Inventors:  
• **FARIN, Danny**  
**45272 Hod-Hasharon (IL)**  
• **BACHAR, Yehuda**  
**54051 Givat-Shmuel (IL)**

(30) Priority: **25.02.2013 US 201361768846 P**

(74) Representative: **Jacob, Reuben Ellis et al**  
**Maucher Jenkins**  
**26 Caxton Street**  
**London SW1H 0RJ (GB)**

(43) Date of publication of application:  
**30.12.2015 Bulletin 2015/53**

(73) Proprietor: **EON Surgical**  
**69710 Tel-Aviv (IL)**

(56) References cited:  
**WO-A1-2011/089565 WO-A2-2012/035524**  
**US-A1- 2012 259 325**

**EP 2 958 499 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**FIELD OF THE INVENTION

**[0001]** The present invention generally relates to systems for surgeries preparations, and more specifically to devices for assembling laparoscopic surgical instrumentation in a patient's body cavity.

BACKGROUND OF THE INVENTION

**[0002]** In laparoscopic surgery, several relatively small ports are made in the abdomen for allowing introduction of different types of instrumentation and accessories into the abdominal cavity for different surgical interventions (usually performed under endoscopic vision). Although usually considered superior in several aspects to open surgery, the use of a plurality of 5 to 15 mm ports still leads to local pain, scars, and possibly port related complications such as hernia in scars and the need for one or two assistants in addition to the surgeon. A known concept which aims at relieving some of such disadvantages includes the use of a single port for introducing regular sized surgical heads which are interchangeably connectable to manipulators extendable into the abdominal cavity via small sized entry points, usually 3 mm or less. The manipulators usually includes an elongated slender shaft being 3 mm or less in diameter, emerging from a robotic or handheld actuator part provided outside patient body, and they are introduced into the abdominal cavity either percutaneous (if having sharp distal end, for example) or through a minimal invasive laparoscopic port. Prior publications describing relevant techniques and instrumentation include: US5352219, US5441059, US5593402, US6723043, US7666181 and US8133254. US 2012/259325, WO 2011/089565, and WO 2012/035524 also describe relevant background art.

**[0003]** US 2012/259325 purports to disclose a surgical device comprises an elongate shaft defining a longitudinal axis. The shaft comprises a distal end and a proximal end. An arm medially deflectable and comprises a mating feature. An elongate pin is positioned medially relative the arm. The elongate pin is axially slideable relative the arm between a locked position preventing medial deflection of the arm and an unlocked position allowing medial deflection of the arm. An energy based surgical end effector is selectively attachable and detachable to the mating feature of the arm. The end effector may include a torque arm to engage the elongate shaft.

**[0004]** WO 2011/089565 describes a system and method for deploying an elongated unit in a body cavity, for introducing an interchangeable tool to a slender shaft having a distal end. The system comprising: an elongated unit comprising a longitudinal axis and a distal portion arranged to protrude through a first port into the body cavity. At least one maneuvering unit connected to the elongated unit for maneuvering the distal portion of the elongated unit in a 3D coordinate system to a determined

depth and orientation in the body cavity. The at least one maneuvering unit is arranged to selectively deploy the distal portion of the elongated unit at the determined depth and orientation at a distance with respect to the distal end of the slender shaft and selectively align the longitudinal axis thereof with a longitudinal axis of the slender shaft. The elongated unit and/or the slender shaft is arranged advanceable relative each other, such that once the distal portion of the elongated unit is deployed the distal portion of the elongated unit reaches and/or captures the distal end of the slender shaft.

**[0005]** WO 2012/035524 describes an apparatus for reversely deactivating a port seal in a laparoscopic port and providing a continuous passage between the laparoscopic port and a remote location in a body cavity.

**[0006]** Nevertheless, assembling any two parts projecting from remote entry points in a body cavity still possesses certain challenges that should be answered in further improvement of currently proposed means and methods. One challenge is to safely engage and then assemble these two parts, even under laparoscopic vision, without possibly harming nearby tissues and organs and of course without dropping any of these parts before or during engagement and/or assembly in the body cavity. Second challenge is to locate, engage and assemble the two parts easily and rapidly so that no significant burden will be added to surgeon's work.

SUMMARY OF THE INVENTION

**[0007]** The present invention generally relates to systems for surgeries preparations, and more specifically to devices for assembling and/or disassembling laparoscopic surgical instrumentation in a patient's body cavity. The invention provides a tool introducer according to claim 1. Further embodiments of the invention are provided in the dependent claims.

**[0008]** In accordance with an aspect of the present invention, there is provided a tool introducer which is configured for introduction in an elongated body comprising a straight tube. The tube encloses a tube lumen opened at its distal end with a tube opening. Optionally, the tube is sized and shaped for introducing in a body cavity via a laparoscopic port. In accordance with some embodiments, the tube is extendable through and from the laparoscopic port by at least 5 cm, optionally by at least 10 cm, optionally by at least 15 cm, optionally by at least 20 cm, or higher, or lower, or by any intermediate value.

**[0009]** Optionally, the elongated body includes an enlarged portion sized and/or shaped for barricading by the laparoscopic port. In accordance with an aspect of the invention, a seal member is provided in or proximal to the lumen for sealing gas flow therefrom from a distal environment (such as the body cavity) to a proximal environment (such as an outer environment to the body cavity).

**[0010]** In accordance with an aspect of the invention, the tool introducer includes locking means configured to

selectively lock or unlock an interchangeable surgical tool to the tube from displacing axially and/or rotationally in the tube lumen. The locking means are configured such that, at locking, a tool connector of the tool projects towards the tube opening and distanced therefrom by at least 3 cm, optionally by at least 5 cm. In accordance with some embodiments, the tool introducer includes visualization means or allows introduction of such via the lumen. Optionally and additionally, the tool introducer includes lighting means or allows introduction of such via the lumen.

**[0011]** In accordance with some embodiments, the tool is connectable with the tool connector to a fitting portion of a tool manipulator. Optionally, the fitting portion is located at a distal end of an elongated shaft. In accordance with some embodiments, the elongated shaft has a maximal diameter equal or smaller than 3 mm, optionally equal or smaller than 2 mm. In accordance with some embodiments, the tool manipulator and/or elongated shaft are introducible into the body cavity via an entry point remote to tool introducer entry. Optionally, the entry point is maintained by a second laparoscopic port or is made by percutaneous progression of the elongated shaft through a body cavity wall enclosing the body cavity.

**[0012]** In some embodiments, there is provided a system which includes an elongated tube, comprising a tube proximal opening, a tube distal opening, a tube lumen extending between the tube proximal opening and the tube distal opening. In some embodiments, the elongated tube has a proximal segment and distal segment, and optionally the proximal segment has a larger outer diameter than the distal segment. In accordance with some examples, the system also includes a tool holder which includes locking means to selectively lock or unlock an interchangeable surgical tool from displacing axially and/or rotationally in the tube lumen. In accordance with some examples, the elongated tube is telescopically introducible at a port proximal end, through a port lumen and bypassing a seal mechanism of a laparoscopic port interconnecting a body cavity and an outer environment. In accordance with some examples, the tool holder is adapted to be inserted through the tube proximal opening to be deployed in the tube lumen and thereby projecting a tool connector of the tool towards the tube distal opening and in a distance of at least 3 cm therefrom.

**[0013]** In accordance with some examples, the tool holder comprises a holder distal opening, a sealed proximal end and a holder lumen extending at least partially therebetween.

**[0014]** In accordance with some examples, the holder lumen is adapted to receive an end portion of a needle system when the needle entering the tube distal opening via the port distal opening.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** Some embodiments of the invention are herein described, by way of example only, with reference to the

accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced. It is noted that Figures 2A-D, 5, 6, 7A-K, 8, and 9 provide related examples that are useful for the understanding of the present invention.

**[0016]** In the drawings:

Fig. 1 schematically illustrates a cut view representing a tool introducer, in accordance with an exemplary embodiment of the present invention;

Figs. 2A-D schematically illustrate cut views representing different stages of deploying a laparoscopic surgical tool, in accordance with an example;

Figs. 3A-B schematically illustrate cut views representing use of an exemplary tool introducer for aligning between a surgical head and a manipulator distal end in a safe environment, in accordance with an exemplary embodiment of the present invention;

Figs. 4A-B schematically illustrate cut views representing two exemplary tool introducers with different visualization means, in accordance with an exemplary embodiment of the present invention;

Fig. 5 schematically illustrates a cut view representing an exemplary system for introducing a surgical tool in a body cavity via a laparoscopic port and for engaging with, aligning and assemble the surgical tool to a tool manipulator in the body cavity, in accordance with an example;

Fig. 6 schematically illustrates a cut view representing an exemplary tool holder member of the exemplary system represented in Fig.5, in accordance with an example;

Figs. 7A-K schematically illustrate cut views representing different stages of deploying a laparoscopic surgical tool using the exemplary system represented in Fig. 5, in accordance with an example;

Fig. 8 schematically illustrates a cut view representing a tool introducer introducible in a laparoscopic port, in accordance with an example; and

Fig. 9 schematically illustrates a cut view representing a tool introducer with powered tool deployer, in accordance with an example.

#### DETAILED DESCRIPTIONS OF EXEMPLARY EMBODIMENTS

**[0017]** The present invention generally relates to systems for surgeries preparations, and more specifically to devices for assembling laparoscopic surgical instrumentation in a patient's body cavity.

**[0018]** In some embodiments, there is provided a device or a "tool introducer" for introducing surgical tools into a patient's body cavity, such as an abdominal cavity. Surgical tools according to present disclosure may in-

clude any surgical tool known to art having outer diameter generally being equal or smaller than 20 mm, or equal or smaller than 10 mm, or in some exemplary embodiments being substantially between 3 mm to 5 mm in outer diameter. As such, surgical tools according to present disclosure may include but not be limited to graspers, coagulators, hooks, staplers, scalpels, suturing means, heat or light sources, surgical monitoring devices, scissors, needle holders, retractors, clip applicators or others. In some embodiments, surgical tools according to present disclosure are surgical heads connectable to manipulators, which may be either manually or robotically operable. In some embodiments, surgical heads according to present disclosure are interchangeable in the sense that different surgical heads can be connected, sequentially, onto a single manipulator. Manipulators according to present disclosure generally include an elongated shaft, optionally needle like, with means to connect to and actuate the surgical head. Connection between surgical head and elongated shaft may include any type of connection means such as but not limited to snap locking, elastic teeth, threading, bayonet locking, clamp/chuck connection, ball and socket, magnet, friction, expandable portion (e.g., balloon member), or others. In some embodiments, such elongated shafts are generally 5 mm or less in diameter, optionally 3 mm or less, optionally 2 mm or less, or higher, or lower, or in any intermediate value.

**[0019]** In some embodiments, the tool introducer includes or is introducible in an elongated sleeve or tubular member (optionally, though not necessarily, cylindrical) in which the elongated shaft may be inserted for assembling or disassembling with the surgical heads positionable and lockable therein. In some embodiments, surgical tool docking and/or locking position in the tool introducer is distant enough from its distal opening therefore forcing the elongated shaft of the manipulator to align at least partially so that easier assembling condition is met. In some such embodiments, distance from distal opening may be at least 3 cm, optionally at least 5 cm, optionally at least 10 cm, optionally at least 20 cm. In some embodiments, assembling or disassembling is possible in the body cavity, optionally and alternatively outside patient's body, or optionally anywhere in between.

**[0020]** Reference is made to Fig. 1 which schematically illustrates a cut view representing a tool introducer 100, in accordance with an exemplary embodiment of the present invention. Tool introducer 100 includes an elongated body comprising a straight tube 110, the tube enclosing a tube lumen 160 opened at its distal end with a tube opening 130. Tool introducer 100 also includes locking means 170 which are provided in tube lumen 160 to selectively lock or unlock an interchangeable surgical tool 200 to tube 110 from displacing axially and/or rotationally.

**[0021]** In some embodiments, the locking means are configured such that, at locking, a tool connector 210 of the tool 200 projects towards tube opening 130 and distanced with a distance  $d_1$  therefrom being at least 3 cm,

or optionally by at least 5 cm, or optionally by at least 10 cm, or optionally by at least 20 cm, or higher, or lower, or any intermediate value.

**[0022]** Tool introducer 100 includes a seal member 150 provided in or proximal to lumen 160 for sealing gas flow therefrom from a distal environment to a proximal environment, so, for example, inflation gas (normally CO<sub>2</sub>) will not escape abdominal cavity during tool introduction and/or assembly/disassembly. Seal member 150 may be permanent or selectively removable, may be firm or pliable (e.g., a valve) or have any form as known in the art. Tool 200 may be readily provided in lumen 160 or can be introducible thereto via tube's proximal opening 140, optionally with or without locking means 170.

**[0023]** Tool introducer 100 may be deliverable into the body cavity via a pre-made cut or puncture, or it may be introduced in a percutaneous fashion while penetrating and piercing through tissues from the outer environment and into the inner environment enclosed in the body cavity. Optionally and alternatively, tool introducer 100 is introducible via a laparoscopic port so, optionally, tube 110 is sized and shaped for introducing in a body cavity via a laparoscopic port. In some embodiments, and as shown in Fig. 1, tool introducer 100 includes an enlarged portion 120 sized and/or shaped for barricading by a laparoscopic port.

**[0024]** Reference is now made to Figs. 2A-D which schematically illustrate cut views representing different stages of deploying surgical tool 200, in accordance with an example. In the suggested method, tool 200 is introduced from outer environment OE into body cavity BC through body cavity wall CW so that it can be connected while in body cavity BC to a distal end portion 315 of a manipulator 300. As shown in Fig. 2A, a laparoscopic port 400 is provided in body cavity wall CW, through a first entry point E1, thereby creating a selectively sealed passage between body cavity BC and an outer environment OE. Laparoscopic port 400 may be of any type known to art, a trocar, a sheath or other, with means to connect to a gas pressurizing source and to seal gas backflow therethrough. In some examples, laparoscopic port 400 allows passing therethrough of objects (such as tools and instruments) that if aligned with its elongated axis has external boundaries of about 20 mm or less in diameter, or optionally about 10 mm or less in diameter or optionally about 5 mm or less in diameter. In some embodiments, laparoscopic port 400 is the largest laparoscopic port provided in cavity wall CW during surgery to introduce large or normal size surgical tools in body cavity BC. Optionally and alternatively, laparoscopic port 400 is the single laparoscopic port used during surgery hence other means (e.g., manipulators) may be introduced in body cavity BC otherwise, such as by percutaneous penetration through cavity wall CW. In some examples, if body cavity BC is an abdominal cavity, first entry point E1 may be the umbilicus. Laparoscopic port 400 introduction and setting may be done as commonly practiced in laparoscopic surgery.

**[0025]** Before, after or in parallel to providing laparoscopic port 400 in first entry point E1, tool manipulator 300 is introduced as well and deployed in body cavity BC. Tool manipulator 300 includes an elongated shaft 310 ending distally with end portion 315 and with a proximal handheld part 320 having at least one actuating member 325. Elongated shaft 310 penetrates into body cavity BC through a second entry point E2, being substantially remote to first entry point E1. In some examples, end portion 315 is sharp such that it can be used to pierce through a percutaneous passage through body cavity wall CW at second entry point E2. Elongated shaft 310 comprises a fitting portion (not shown) connectable with a tool connector of a surgical tool (such as tool connector 210 of tool 200). Elongated shaft 310 is sized and shaped such so it can be advanced in a tube lumen (such as lumen 160 of tool introducer 100), at least until an adjoining fitting portion and tool connector is applicable.

**[0026]** As shown in Fig. 2A, tool introducer 100 equipped with tool 200 is passed via laparoscopic port 400 such that tube 110 projects in body cavity BC and tube opening 130 is opened to body cavity BC. Before, during or after such passing of tool introducer 100 through laparoscopic port 400, visualization means (not shown) can be used in order to trace elongated shaft 310 and/or its distal end 315. Such visualization means may include any of a laparoscope, endoscope, optical fiber, and a camera, optionally accompanied with illumination means, and these may be provided as an integral part of tool introducer 100 or laparoscopic port 400, or can be inserted as a separate device via tool introducer 100 or laparoscopic port 400. Tool introducer 100 is then manipulated and/or extended, under vision or blindly, in order to reach and engage elongated shaft 310 and/or its distal end 315. In some examples, tube 110 is extendable through and from laparoscopic port 400 by at least 5 cm, optionally by at least 10 cm, optionally by at least 15 cm, optionally by at least 20 cm. Optionally and alternatively (not shown), the visualization means are introduced from a separate entry point into body cavity BC and can be used to survey engagement and connection of the system components as described below, from the side.

**[0027]** As shown in Fig. 2C, elongated shaft 310 is inserted in tube lumen 160 via tube opening 130 and then advanced therein so that elongated shaft 310 and tool 200 substantially aligns, optionally forced to align by bounded geometries of elongated shaft 310 in tube 110. Elongated shaft is advanced until assembly with tool 200 is possible, optionally when the fitting portion of elongated shaft 310 is in direct contact with tool connector 210. Tool 200 may then be connected to elongated shaft 310 by adjoining tool connector and fitting portion. As shown in Fig. 2D, manipulator 300 may then be withdrawn so that elongated shaft 310 is removed from tube lumen 160, and the assembled surgical instrument can be applied for surgery as needed. Optionally, tool 200 is first unlocked from tool introducer 100 before manipulator 300 can be withdrawn. Tool introducer 100 may be kept in

laparoscopic port 400 or removed therefrom (as shown), optionally replaced with a second tool introducer equipped with another tool for connecting to a second manipulator (not shown).

**[0028]** Reference is made to Figs. 3A-B which schematically illustrate cut views representing use of an exemplary tool introducer 1100 in a laparoscopic system 1000 for aligning between a surgical head 1200 and a manipulator distal end 1300 in a safe environment, in accordance with an exemplary embodiment of the present invention. Tool introducer 1100 includes an elongated tubular body 1110 having an enlarged portion 1120 ending with a sealed proximal end 1140, and a distal end 1130 opened to inner lumen 1160. In lumen 1160 with distance  $d_2$  from distal opening 1130 there is a docking portion 1150 which selectively locks to surgical head 1200 shown nests therein. Docking portion 1150 opens distally with an angle  $\alpha$  for allowing centering of incoming slender artifacts sliding therein until reaching and arriving in direct contact with connector 1210 of surgical head 1200. Manipulator 1300 includes an inner member 1320 and an outer member 1310 which may be fixed or rotatable and/or slidable on with the other. At least inner member 1320 includes a fitting portion at its distal tip, namely thread 1325 that can be threaded in connector 1210 having mating thread for bolt-and-nut type connection. Distance  $d_2$  is chosen such to achieve a maximally allowed angle of attack  $\beta$  when thread 1325 is adjacent docking portion 1150 entry, in order to assist in accurate positioning therein. In some embodiments, angle  $\beta$  is equal or smaller than about  $45^\circ$ , optionally equal or smaller than about  $30^\circ$ , optionally equal or smaller than about  $15^\circ$ , optionally equal or smaller than about  $5^\circ$ , or higher, or lower, or of any intermediate value. In some such embodiments, angle  $\beta$  depends on distance  $d_2$  as well as in geometrical ratios between lumen 1160 size and manipulator outer boundaries dimensions. In some embodiments, distance  $d_2$  is at least 3 cm, optionally at least 5 cm, optionally at least 10 cm. In some embodiments, lumen 1160 diameter distal to docking portion 1150 is between 10 mm and 1 mm, optionally between 7 mm and 2 mm, optionally between 5 mm and 3 mm. In some embodiments, outer diameter of manipulator distal end 1300 is equal to or smaller than about 3 mm, optionally equal to or smaller than 2 mm, optionally about 1.5 mm.

**[0029]** As shown in Fig. 3A, manipulator distal end 1300 advances in lumen 1160 and reaches docking portion 1150. Lumen boundaries imposed by tubular body 1110 are rigid yet smooth enough so that manipulator 1300 would not stuck or cling in-place, while providing a tracked passage thereinside while preventing possible harm to organs or tissues outside tubular body 1110 which may potentially happen in case the surgeon would target manipulator distal end 1300 directly to a small opening such as of surgical head connector 1210. After manipulator distal end 1300 is advanced in lumen 1160 and forced to align thereto, connection with surgical head 1200 can then be made, as shown in Fig. 3B. In some

embodiments, entire manipulator end portion 1300 or only inner member 1320 revolves so that thread 1325 threads into connector 1210.

**[0030]** Figs. 4A-B schematically illustrate cut views representing two exemplary tool introducers 1400 and 1500 with different visualization means, in accordance with an exemplary embodiment of the present invention. As shown in Fig. 4A, tool introducer 1400 includes an elongated tubular body 1410 having an enlarged portion 1420 ending with a sealed proximal end 1440, and a distal end 1430 opened to inner lumen 1460. A docking portion 1450 is provided in lumen 1460 which can selectively lock to a surgical head (not shown). Tubular body 1410 at its distal end around opening 1460 encloses at least one visual capture device 1470 (e.g., digital camera head) and at least one illumination source 1480 (e.g., LED illumination) which may be operational wired or wirelessly to power source and/or image recording unit provided outside patient's body. As shown in Fig. 4B, tool introducer 1500 includes an elongated tubular body 1510 having an enlarged portion 1520 ending with a selectively sealed proximal end 1540, housing a valve 1570, and a distal end 1530 opened to inner lumen 1560. A docking portion 1550 is provided in lumen 1560 which can selectively lock to a surgical head (not shown). An optical fiber 1600 is shown when introduced through lumen 1560 that is configured to transfer image and light from its tip 1610 backwards to image capture and recording means (not shown) provided outside patient's body.

**[0031]** In some embodiments, a tool introducer is provided as a system or a kit which comprises an elongated tubular member (tube) or sleeve for reaching and engaging a distal end of a tool manipulator, and a separate drawer and/or tool locking means that can be inserted from a proximal opening of the tube and deliver a tool therein to a predefined position having a minimal distance from tube's proximal opening, as previously described. As such, systems or kits according to the present disclosure may include locking means that are selectively introducible in tube's lumen, optionally as part of a plug member, and fixedly connectable to the tube. In some such embodiments, locking means may include at least two opposing teeth selectively movable from an inward position at locking to an outward position at unlocking. Optionally, the locking means are normally locking. Optionally, the locking means are manually operational with a button mechanism. Optionally, the tube is sized and configured for passing through a laparoscopic port, such as a commercially available laparoscopic port having inner diameter between 3 mm and 20 mm, or optionally between 5 mm and 10 mm.

**[0032]** Reference is now made to Fig. 5 which schematically illustrates a cut view representing an exemplary system 2000 for introducing a surgical tool in a body cavity via a laparoscopic port 2100 and for engaging with, aligning and assemble the surgical tool to a tool manipulator (not shown) in the body cavity, in accordance with an example of the present invention. System 2000 in-

cludes an engager 2200 and a tool holder 2300. In Fig. 5, tool holder 2300 is shown equipped with an interchangeable grasper 2400 and provided in and assembled to engager 2200; and both are provided in and through laparoscopic port 2100.

**[0033]** System 2000 may be sold or provided to the surgical team as a kit comprising at least one engager 2200 (shown in detail in Fig. 7B) and at least one tool holder 2300 (shown in detail in Fig. 6). The kit may also include laparoscopic port 2100 (shown in detail in Fig. 7A) or be configured to work with commercially available ports. The kit may also include at least one surgical tool, optionally including but not limited to interchangeable grasper 2400 (shown in detail in Fig. 7D). The kit may also include at least one tool loader, optionally including but not limited to a grasper loader 2600 (shown in detail in Figs. 7D-E). The kit may also include at least one manipulator comprising a needle portion, optionally including but not limited to needle 2700 (shown in detail in Fig. 7I).

**[0034]** Laparoscopic port 2100 includes an elongated tubular member or tube 2110 enclosing a lumen 2120 and having a proximal enlarged handheld portion 2130. Handheld portion allows introduction of objects therethrough into body cavities when deployed via proximal port opening 2140 and includes at least one seal such as port seal 2150 to prevent gas escape. Pressure inlet 2160 allows connection to a pressurized gas source. Laparoscopic surgery involves insufflation of a gas (usually carbon dioxide) into the abdominal/peritoneal cavity producing a pneumoperitoneum. This causes an increase in intra-abdominal pressure (IAP). Carbon dioxide is commonly insufflated into the peritoneal cavity for example at a rate of 4-6 liter/min to a pressure of 10-20 mm Hg, for example. The pneumoperitoneum may be maintained for example by a constant gas flow of 200-400 ml/min.

**[0035]** Engager 2200 includes an elongated tubular body 2210 opened at a proximal end 2240 and at a distal end 2270 with a lumen 2220 extending therebetween. According to the present disclosure, elongated tube 2200 includes at least one seal provided in lumen 2220 such as a zero seal 2260 (configured to prevent gas passage at least when it is absent from any object extending therethrough) and an instruments seal 2250 (configured to prevent gas at least when objects having outer diameter of a certain diameter range extends therethrough). Optionally and as shown, at its distal end 2270 there is provided an expandable funnel, optionally and as shown, an asymmetrical funnel component 2212. In some examples, funnel 2212 is a self-expandable partially (or, alternatively, fully) conic structure, expandable from and recollapsible to a substantially tubular form. At its tubular form, funnel 2212 can be passed at both directions through laparoscopic port lumen 2120. At its expanded conic form, funnel 2212 has a substantially greater span which increases covering area around any intruding slender objects, such as a distal end portion of a manipulator

longitudinal shaft. Furthermore, the expanded funnel 2212 facilitates a more smoother introduction and accommodation of a nonaligned shaft (e.g., projecting at an angle between 100-180° of any coordinate axis with respect to engager tube's longitudinal axis) so that instead of impinging and even penetrating through the funnel, the needle can gently slide over the curved walls of the funnel until aligning with its longitudinal axis. With its configuration, including a tapered edge and having a first closed side and a second substantially opened side, funnel 2212 allows a continuous accurate visualization and monitoring using an endoscope or a camera projected forward. Such a design further allows a faster and easier recollapsing of funnel 2212. As shown in Fig. 5 and in Fig. 7B, tube body 2210 is telescopically introducible at proximal end 2140 of laparoscopic port 2100, through lumen 2120 and bypassing seal 2150, yet maintaining sealed passage to gas passage therein (with seals 2250 and/or 2260) or between its outer boundaries and seal 2150.

**[0036]** Tool holder 2300 includes an inner sleeve member 2320 slidable in an outer sleeve member 2310. Outer sleeve member 2310 has an enlarged proximal end portion 2312 with a concavity fitted for a push-button 2330. Button 2330 is connected to proximal end of inner sleeve member 2320 and is interconnected with compression spring 2332 to outer sleeve member 2310 so that is normally pulled back with respect to outer sleeve member 2310 when not pushed in. Tool holder 2300 includes locking means 2326 to selectively lock or unlock an interchangeable surgical tool from displacing axially and/or rotationally in engager tube lumen 2220. In some examples and as shown, locking means 2326 include a distal portion of inner sleeve member 2320 that is slitted partially along its length with slits 2324 so that to create a plurality of teeth 2322 configured to extend outwardly from longitudinal axis when emerging out of outer sleeve member 2310 (when button 2330 is pushed). When button 2330 is at backward position (pulled back) teeth 2322 are inwardly compressed and nest within the boundaries imposed by outer sleeve member 2310, so that in case an surgical tool is housed in tool holder 2300 (as shown for example in Fig. 7G) the inwardly compressed teeth locks the tool in-place. In some examples, and as shown in Fig 5 and in Fig. 7G, tool holder 2300 is adapted to be inserted through engager's proximal opening 2240 to be deployed in lumen 2220 and thereby projecting a tool connector (such as connection threads 2422 and 2424 of interchangeable grasper 2400) towards engager's distal opening 2270. In some examples, a surgical tool, such as interchangeable grasper 2400, when placed with tool holder 2300 in and assembled with engager 2200, has its distal-most face distanced by at least 3 cm from distal end 2270 of engager 2200.

**[0037]** Interchangeable grasper 2400 includes a grasper portion 2410 and a connector portion 2420. Grasper portion 2410 includes a first jaw 2412 and a second jaw 2414 pivotally connected with a joint 2416. Con-

necter portion 2420 includes an inner member comprising a first female thread 2422 slidable in an outer member comprising a second female thread 2424, larger in diameter than first female thread 2422. Relative distance between threads 2422 and 2424 determine relative distance between jaws 2412 and 2414 or magnitude of compression force developed therebetween. A compression spring 2426 keeps threads 2422 and 2424 in a nominal distance such that jaws 2412 and 2414 are kept closed (in-contact) yet with negligible compression.

**[0038]** Needle 2700 of manipulator (which is not shown in full) includes an inner rod member 2730 slidable in cylindrical member 2720. Inner rod member 2730 has a distal dull tip 2734 and a first male thread 2732 adjacent thereto. Cylindrical member 2720 includes a second male thread 2722 provided at its distal end. In some examples, needle 2700 is operable to create a percutaneous penetration path hence includes sharp means to puncture and cut through soft tissues. In some such examples, and as shown, needle 2700 includes an outer cover 2710 with sharp distal end in which cylindrical member 2720 may slide backwards along with inner rod member 2730 until fully retracted therein, so that needle 2700 acts similarly to a veress needle as needed.

**[0039]** Reference is now made to Figs. 7A-K which schematically illustrate cut views representing different stages of deploying interchangeable grasper 2400 using system 2000, in accordance with an example. As shown in Fig. 7A, laparoscopic port 2100 is introduced into body cavity BC through body cavity wall CW using known surgical practiced techniques. Body cavity BC may then be insufflated via pressure inlet 2160. As shown in Fig. 7B, engager 2200 is then passed in laparoscopic port 2100 bypassing its seal 2150 yet keeping a sealed environment using zero seal 2260. As shown in Fig. 7C, a laparoscope 2500 is introduced into body cavity BC via engager 2200 with its distal end 2510 peeping partially beneath and in funnel 2212, or upward or backward thereto. Laparoscope 2500 can be used to trace end portion of a manipulator (such as needle 2700 shown in Figs. 7H-K) and visualize approaching and reaching it with funnel 2212. Once manipulator emerges into engager's lumen 2220, optionally while laparoscope 2500 is partially withdrawn, the laparoscope can be removed and further steps can optionally be made blindly.

**[0040]** Before, after or in parallel to the above-mentioned steps, interchangeable grasper 2400 may optionally be loaded in tool holder 2300 (in case it is not preloaded) using loader 2600. As shown in Fig. 7D, loader 2600 is bolted (optionally manually, using its enlarged end portion 2610) with a threaded portion 2620 into second female thread 2424 of interchangeable grasper 2400. Alternatively and optionally, loader may be plugged in into a recess such as second female thread 2424 of interchangeable grasper 2400 without threading. With loader 2600, interchangeable grasper 2400 is then pushed into tool introducer 2300 while its button 2330 is pushed so that teeth 2322 extend out from outer sleeve member

2310 and outwardly, so that to allow such loading (as shown in Fig. 7E) until interchangeable grasper 2400 is fully nesting in-position (as shown in Fig. 7F). Button 2330 may then be released to pop out, and loader unbolted and removed.

**[0041]** Afterwards, the loaded tool introducer 2300 is inserted (e.g., plugged-in or bolted) in engager 2200 via its proximal opening 2240, optionally instead of laparoscope 2500. Needle 2700 may then advance forward in engager lumen 2210 until reaching distal portion of interchangeable grasper 2400 (Fig. 7H). Connection is made possible, for example, if both inner rod member 2730 and cylindrical member 2720 revolves (e.g., clockwise) until first male thread 2732 is bolted in first female thread 2422 and second male thread 2734 is bolted in second female thread 2424 (Fig. 7J). Only then, button 2330 can be pushed and needle 2700, now equipped with interchangeable grasper 2400) can be withdrawn from tool holder 2300 and engager 2200 and be used in surgery as needed.

**[0042]** In some examples, different or similar tools can be loaded in same or different tool holder, using same or different loader, so same or different needles/manipulators. Tool holder 2300 can be removed and replaced with laparoscope 2500 for visualizing the surgical procedure.

**[0043]** Disassembly of interchangeable grasper 2400 from needle 2700 (or of other likewise instrumentation) can be done similarly in reverse fashion, for example by first using engager 2200 equipped with laparoscope 2500 to locate, reach and engage interchangeable grasper 2400. Then inserting the interchangeable grasper partially in engager 2200 and removing laparoscope 2500. Then inserting unloaded tool holder 2300 in engager 2200 and pushing interchangeable grasper thereto until contacting teeth 2322. In some examples, verification of correct contact is made (optionally, visually and/or tactilely and/or electronically or otherwise). In some examples, the pushing ends with preliminary locking such as by snap-locking means. Then, button 2330 is pushed and interchangeable grasper 2400 can be pushed further to nest in tool introducer 2300 and allow proper release of button 2330. Afterwards, the needle 2700 can be unbolted from interchangeable grasper 2400 and all instruments may be removed from patient's body or replaced as needed.

**[0044]** Reference is made to Fig. 8 which schematically illustrates a cut view representing a tool introducer 3100 introducer in a laparoscopic port 3300, in accordance with an example. Laparoscopic port 3300 may be a commercially available device provided with or separate to tool introducer 3100, from same or different vendor. Laparoscopic port 3300 may be a sheath or cannula of a laparoscopic trocar system having standard or non-standard sizes, for example an inner diameter of 5 mm, 8 mm, 11 mm, 12 mm or 15 mm, or higher, or lower, or intermediate size, and/or a length of 50 mm, 75 mm, 100 mm, 150 mm, 200 mm, or higher, or lower, or intermediate size. Laparoscopic port 3300 includes a hollow tubu-

lar body 3310 with a proximal wide portion 3320, a proximal end 3340 and a distal end 3330. A sealing mechanism 3350, commonly comprising zero seal and/or instruments seal, is configured for sealing inner passage of tubular body 3310 if empty or if occupied with artifacts, such as tool introducer 3100, passing therethrough.

**[0045]** Tool introducer 3100 includes an elongated body 3110 and locking means 3120 to selectively lock or unlock with an interchangeable surgical tool 3200 from moving or displacing axially and/or rotationally. Tool introducer 3100 also includes a handheld portion 3130 at its proximal end for manual actuation and/or maneuverability such as in and out laparoscopic port 3300, and through it, in and out an internal body cavity if laparoscopic port 3300 is deployed in the body cavity wall. Tool introducer 3100 may be configured, such as sized and/or shaped, such that it can place tool 3200 in a certain predetermined position in laparoscopic port 3300 or at least in minimal distance to its distal end 3330. In some such examples, handheld portion 3130 may be shaped and/or sized such as it can serve as a stopper for maximal projection of tool 3200 in tubular body 3310 inner passage.

**[0046]** In some examples, tool introducer 3100 is configured such that, at locking, a tool connector 3220 of the tool 3200 projects towards tube opening at distal end 3330 and distanced with a distance P there from being at least 3 cm, or optionally by at least 5 cm, or optionally by at least 10 cm, or optionally by at least 20 cm, or higher, or lower, or any intermediate value.

**[0047]** Tool 3200 may be readily provided in locking means 3120 and it can be introducer thereto via proximal opening at proximal end 3340 with tool introducer 3100.

**[0048]** Fig. 9 schematically illustrates a cut view representing a tool introducer 4100 with a powered tool deployer 4400, in accordance with an example. Tool introducer 4100 is similar in many respects to tool introducer 3100 and is meant for introduction in an elongated tubular member, such as laparoscopic port 4300, and for positioning and/or locking a surgical tool such as tool 4200 thereinside, to a predetermined distance from a distal opening thereof being at least 3 cm in length. Tool introducer 4100 includes an elongated body comprising of a distal member 4120 with locking means adapted for selectively locking in tool 4200, which is rotationally connected with a hollow proximal member 4130 starting with a handheld portion 4110. At the intersection of distal member 4120 and proximal member 4130 there is a recess 4140 configured for interaction with a corresponding projecting portion 4462 of powered tool deployer 4400, optionally having non-circular cross section, either symmetrical (such as hexagonal cross section) or not symmetrical (such as a rectangular slit).

**[0049]** Powered tool deployer 4400 is configured to couple with tool introducer 4100 (when, optionally, placed in laparoscopic port 4300) and rotate distal member 4120 about proximal member 4130, thereby rotating tool 4200, such that when a distal end of a tool manipulator elon-

gated shaft, having a fitting portion configured to thread to corresponding portion in tool 4200, is pressed thereto, then tool 4200 will connect to the tool manipulator, and vice versa. Powered tool deployer 4400 includes an elongated portion 4410 sized to fit and extend in the hollow proximal member 4130 of tool introducer 4100, and a proximal handheld part 4420 containing the powering components, such as motor 4440, controller 4450 and battery 4430. Alternatively and optionally, the powering element may be a spring that is tensioned manually, and that may be released by an actuator to activate the tool deployer. Elongated portion 4410 houses a driver shaft 4460 ending with projecting portion 4462. Driver shaft 4460 is connected to motor 4440 and controller 4450 is configured to determine timing for powering motor 4440 to revolve diver shaft 4460 and, optionally, other features (such as torque moment, velocity and others). Battery 4430 is optionally rechargeable. Motor 4440 operation may begin selectively upon operator's triggering (such as by pressing a trigger or a push button; not shown), or automatically, for example upon connection of tool 4200 with a corresponding fitting portion of a tool manipulator (not shown). Tool 4200 and manipulator fitting portion may include specific identification and compatibility means such that motor 4440 will not be ignited unless proper identification and/or compatibility are met.

**[0050]** It is noted that citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

### Claims

1. A tool introducer (1100) configured for introduction of a tool in an elongated body of the tool introducer comprising a straight tube (1110), the tube having a tube distal opening (1130), and enclosing a tube lumen (1160); the tool introducer (1100) further comprising locking means (1150) to selectively lock or unlock an interchangeable surgical tool (1200) to said tube from displacing axially and/or rotationally in said tube lumen (1160), wherein said locking means (1150) are configured such that, at said locking, a tool connector (1210) of said interchangeable surgical tool (1200) projects towards said tube distal opening (1130), said locking means being distanced from said tube distal opening (1130) by at least 3 cm and opens at an angle  $\alpha$  relative to a longitudinal axis of said tool introducer (1100) for centering and guiding an elongated shaft of a tool manipulator (1300) to said tool connector (1210) of said interchangeable surgical tool (1200), and said tool introducer (1100) further comprises a seal member provided in or proximal to said tube lumen (1160) for sealing gas flow therefrom from a distal

environment to a proximal environment.

2. A tool introducer according to claim 1, wherein said tube (1100) is sized and shaped for introducing in a body cavity (BC) via a laparoscopic port (400).
3. A tool introducer according to claim 2, wherein said elongated body comprising an enlarged portion sized and/or shaped for barricading by said laparoscopic port (400).
4. A tool introducer according to any preceding claim, wherein at said locking, said tool connector (1210) is distanced from said opening (1130) by at least 5 cm.
5. A tool introducer according to any preceding claim, comprising visualization means or allowing introduction of such via said lumen (1160).
6. A tool introducer according to any preceding claim, comprising lighting means or allowing introduction of such via said lumen (1160).
7. A tool introducer according to any of claims 2 to 6, wherein said tube (1100) is extendable through and from said laparoscopic port (400) by at least 15 cm.
8. A tool introducer according to any preceding claim, wherein said tool is connectable with said tool connector (1210) to a fitting portion of a tool manipulator (1300).
9. A tool introducer according to claim 8, wherein said elongated shaft of said tool manipulator (1300) has a maximal diameter equal or smaller than 3 mm, optionally equal or smaller than 2 mm.
10. A tool introducer according to claim 8, wherein said tool manipulator (1300) is introducible into said body cavity via an entry point (E2) remote to tool introducer entry (E1).
11. A tool introducer according to claim 10, wherein said entry point (E2) is maintained by a second laparoscopic port.
12. A tool introducer according to claim 10, wherein said entry point (E2) is made by percutaneous progression of said elongated shaft (1310, 1320) of said tool manipulator (1300) through a body cavity wall enclosing said body cavity.

### Patentansprüche

1. Werkzeug-Einführvorrichtung (1100), die zum Einführen eines Werkzeugs in einen langgestreckten

- Körper der Werkzeug-Einführvorrichtung konfiguriert ist, umfassend eine gerade Röhre (1110), wobei die Röhre eine distale Röhrenöffnung (1130) aufweist und ein Röhrenlumen (1160) umschließt; wobei die Werkzeug-Einführvorrichtung (1100) weiter Verriegelungsmittel (1150) zum selektiven Verriegeln oder Entriegeln eines austauschbaren chirurgischen Werkzeugs (1200) an der Röhre gegen Axial- und/oder Rotationsverlagerung in dem Röhrenlumen (1160) umfasst, wobei die Verriegelungsmittel (1150) derart konfiguriert sind, dass beim Verriegeln eine Werkzeugkupplung (1210) des austauschbaren chirurgischen Werkzeugs (1200) in Richtung der distalen Röhrenöffnung (1130) vorsteht, wobei die Verriegelungsmittel mindestens 3 cm von der distalen Röhrenöffnung (1130) entfernt sind und unter einem Winkel  $\alpha$  relativ zu einer Längsachse der Werkzeug-Einführvorrichtung (1100) öffnen, um einen langgestreckten Schaft eines Werkzeugmanipulators (1300) an der Werkzeugkupplung (1210) des austauschbaren chirurgischen Werkzeugs (1200) zu zentrieren und zu führen, und wobei die Werkzeug-Einführvorrichtung (1100) weiter ein Dichtungselement umfasst, das in dem oder proximal des Röhrenlumens (1160) vorgesehen ist, um einen Gasstrom daraus von einer distalen Umgebung zu einer proximalen Umgebung abzudichten.
2. Werkzeug-Einführvorrichtung nach Anspruch 1, wobei die Röhre (1100) zum Einführen in eine Körperhöhle (BC) über einen Laparoskopie-Port (400) bemessen und geformt ist.
  3. Werkzeug-Einführvorrichtung nach Anspruch 2, wobei der langgestreckte Körper einen vergrößerten Abschnitt umfasst, der zum Absperrern durch den Laparoskopie-Port (400) bemessen und/oder geformt ist.
  4. Werkzeug-Einführvorrichtung nach einem der vorangehenden Ansprüche, wobei beim Verriegeln die Werkzeugkupplung (1210) mindestens 5 cm von der Öffnung (1130) entfernt ist.
  5. Werkzeug-Einführvorrichtung nach einem der vorangehenden Ansprüche, die Visualisierungsmittel umfasst oder das Einführen derselben über das Lumen (1160) ermöglicht.
  6. Werkzeug-Einführvorrichtung nach einem der vorangehenden Ansprüche, die Beleuchtungsmittel umfasst oder das Einführen derselben über das Lumen (1160) ermöglicht.
  7. Werkzeug-Einführvorrichtung nach einem der Ansprüche 2 bis 6, wobei die Röhre (1100) um mindestens 15 cm durch den und von dem Laparoskopie-Port (400) ragen kann.
  8. Werkzeug-Einführvorrichtung nach einem der vorangehenden Ansprüche, wobei das Werkzeug mit der Werkzeugkupplung (1210) an einen Befestigungsabschnitt eines Werkzeugmanipulators (1300) gekoppelt werden kann.
  9. Werkzeug-Einführvorrichtung nach Anspruch 8, wobei der langgestreckte Schaft des Werkzeugmanipulators (1300) einen maximalen Durchmesser von gleich oder weniger als 3 mm, optional gleich oder weniger als 2 mm aufweist.
  10. Werkzeug-Einführvorrichtung nach Anspruch 8, wobei der Werkzeugmanipulator (1300) über eine von dem Werkzeug-Einführvorrichtungseingang (E1) entfernte Eingangsstelle (E2) in die Körperhöhle eingeführt werden kann.
  11. Werkzeug-Einführvorrichtung nach Anspruch 10, wobei die Eingangsstelle (E2) von einem zweiten Laparoskopie-Port aufrechterhalten wird.
  12. Werkzeug-Einführvorrichtung nach Anspruch 10, wobei die Eingangsstelle (E2) mittels perkutanem Voranbewegen des langgestreckten Schafts (1310, 1320) des Werkzeugmanipulators (1300) durch eine die Körperhöhle umschließende Körperhöhlenwand erzeugt wird.

## Revendications

1. Introducteur d'outil (1100) configuré pour l'introduction d'un outil dans un corps allongé de l'introducteur d'outil comprenant un tube droit (1110), le tube présentant une ouverture distale de tube (1130), et enfermant une lumière de tube (1160) ; l'introducteur d'outil (1100) comprenant en outre un moyen de blocage (1150) pour sélectivement bloquer ou débloquer un outil chirurgical interchangeable (1200) sur ledit tube pour l'empêcher de se déplacer axialement et/ou par rotation dans ladite lumière de tube (1160), dans lequel ledit moyen de blocage (1150) est configuré de sorte que, au moment dudit blocage, un raccord d'outil (1210) dudit outil chirurgical interchangeable (1200) se projette en direction de ladite ouverture distale de tube (1130), ledit moyen de blocage se retrouvant à une distance de ladite ouverture distale de tube (1130) d'au moins 3 cm et s'ouvrant selon un angle  $\alpha$  par rapport à un axe longitudinal dudit introducteur d'outil (1100) pour centrer et guider une tige allongée d'un manipulateur d'outil (1300) vers ledit raccord d'outil (1210) dudit outil chirurgical interchangeable (1200), et ledit introducteur d'outil (1100) comprend en outre un élément d'étanchéité disposé dans ou à proximité de ladite lumière de tube (1160) pour assurer l'étanchéité d'un écoulement de gaz à partir de celle-ci d'un environnement

distal à un environnement proximal.

cavité corporelle.

2. Introducteur d'outil selon la revendication 1, dans lequel ledit tube (1100) est dimensionné et formé pour s'introduire dans une cavité corporelle (BC) via un orifice laparoscopique (400). 5
3. Introducteur d'outil selon la revendication 2, dans lequel ledit corps allongé comprend une partie agrandie dimensionnée et/ou formée pour se barricader par ledit orifice laparoscopique (400). 10
4. Introducteur d'outil selon une quelconque revendication précédente, dans lequel au moment dudit blocage, ledit raccord d'outil (1210) se retrouve à une distance de ladite ouverture (1130) d'au moins 5 cm. 15
5. Introducteur d'outil selon une quelconque revendication précédente, comprenant un moyen de visualisation ou permettant une introduction de celui-ci via ladite lumière (1160). 20
6. Introducteur d'outil selon une quelconque revendication précédente, comprenant un moyen d'éclairage ou permettant une introduction de celui-ci via ladite lumière (1160). 25
7. Introducteur d'outil selon l'une quelconque des revendications 2 à 6, dans lequel ledit tube (1100) est extensible à travers et depuis ledit orifice laparoscopique (400) sur au moins 15 cm. 30
8. Introducteur d'outil selon une quelconque revendication précédente, dans lequel ledit outil peut être raccordé avec ledit raccord d'outil (1210) à une partie de montage d'un manipulateur d'outil (1300). 35
9. Introducteur d'outil selon la revendication 8, dans lequel ladite tige allongée dudit manipulateur d'outil (1300) présente un diamètre maximal égal ou inférieur à 3 mm, éventuellement égal ou inférieur à 2 mm. 40
10. Introducteur d'outil selon la revendication 8, dans lequel ledit manipulateur d'outil (1300) peut être introduit dans ladite cavité corporelle par le biais d'un point d'entrée (E2) distant d'une entrée d'introducteur d'outil (E1). 45
11. Introducteur d'outil selon la revendication 10, dans lequel ledit point d'entrée (E2) est maintenu par un second orifice laparoscopique. 50
12. Introducteur d'outil selon la revendication 10, dans lequel ledit point d'entrée (E2) est réalisé par une progression percutanée de ladite tige allongée (1310, 1320) dudit manipulateur d'outil (1300) à travers une paroi de cavité corporelle enfermant ladite 55

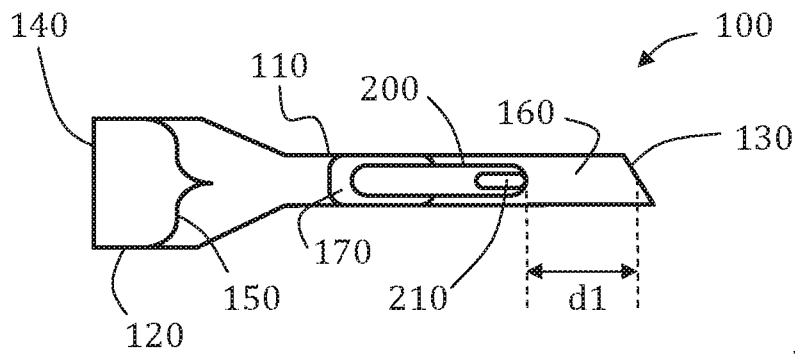


Fig. 1

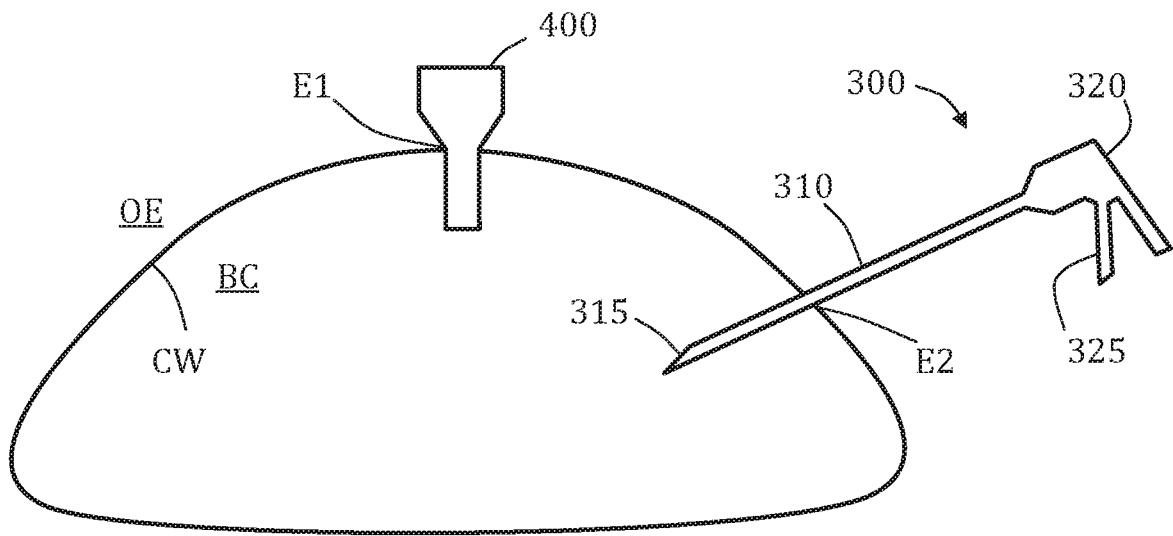


Fig. 2A

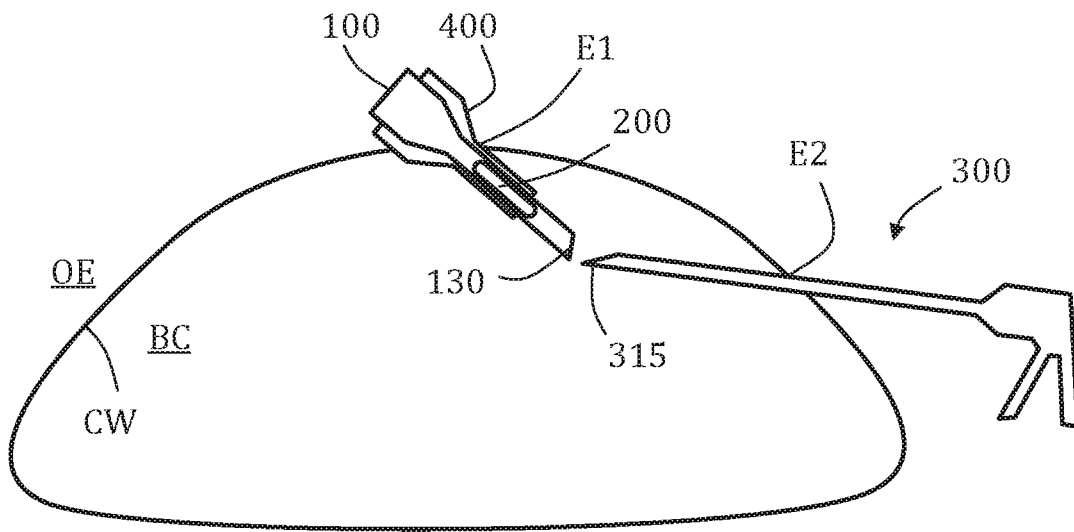


Fig. 2B

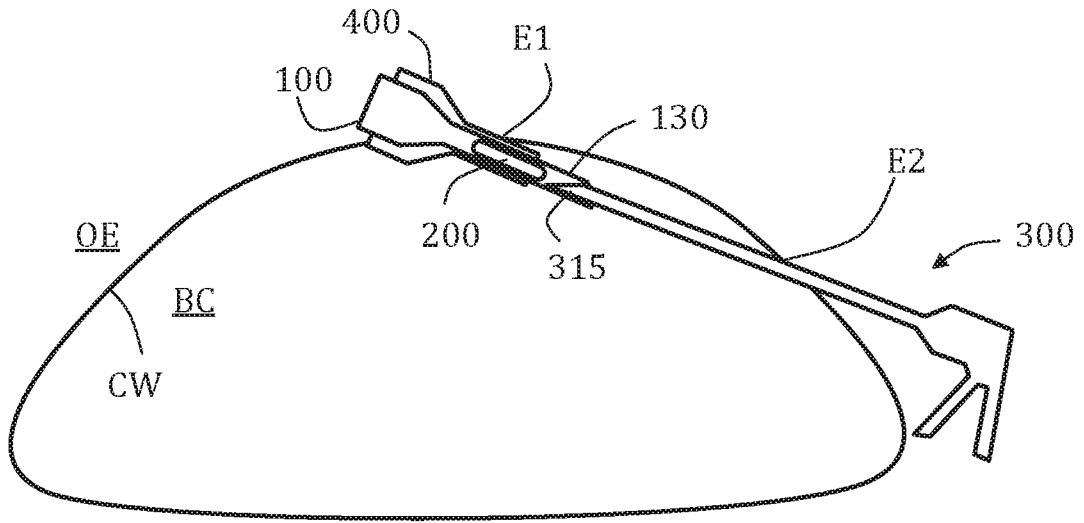


Fig. 2C

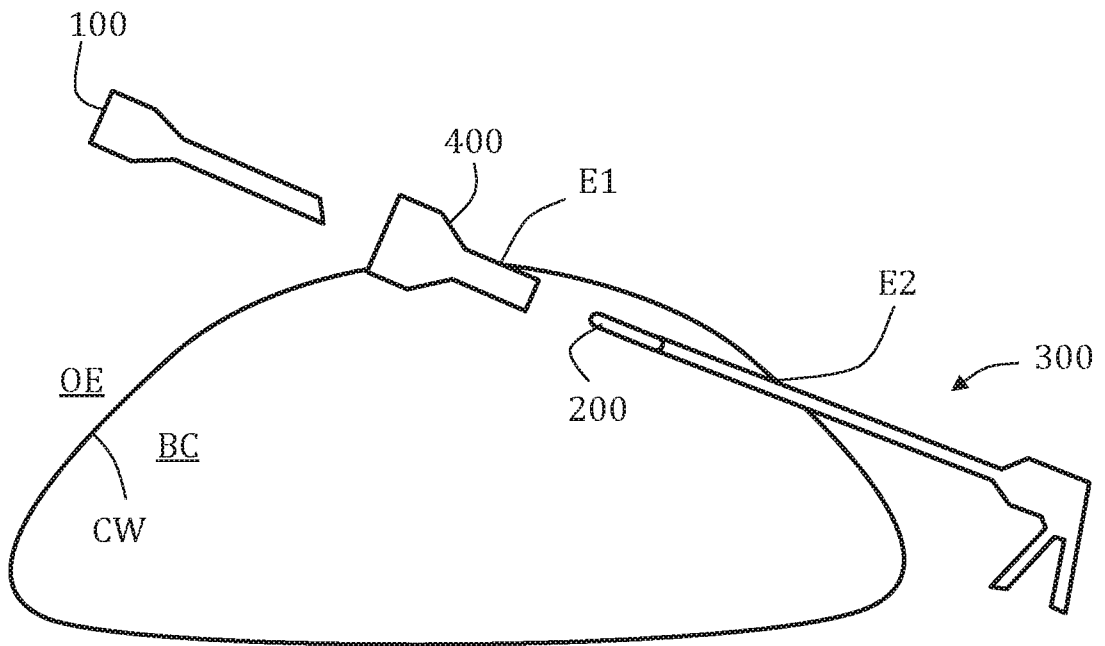


Fig. 2D

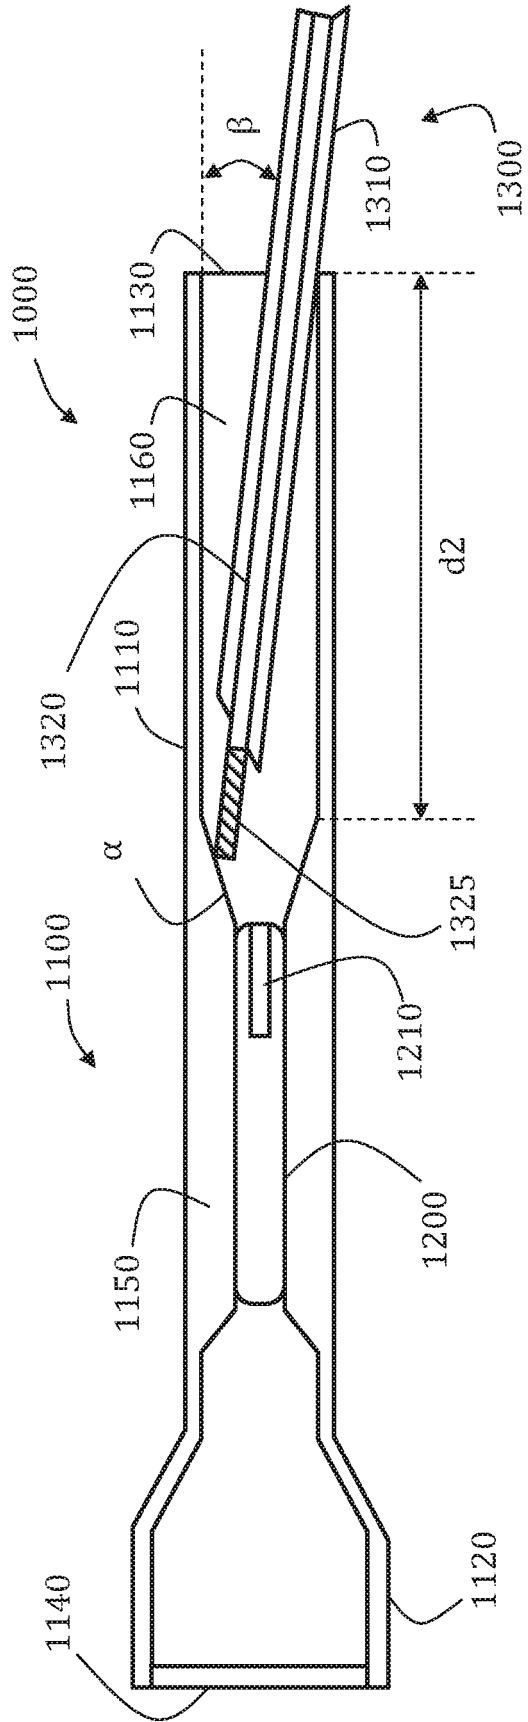


Fig. 3A

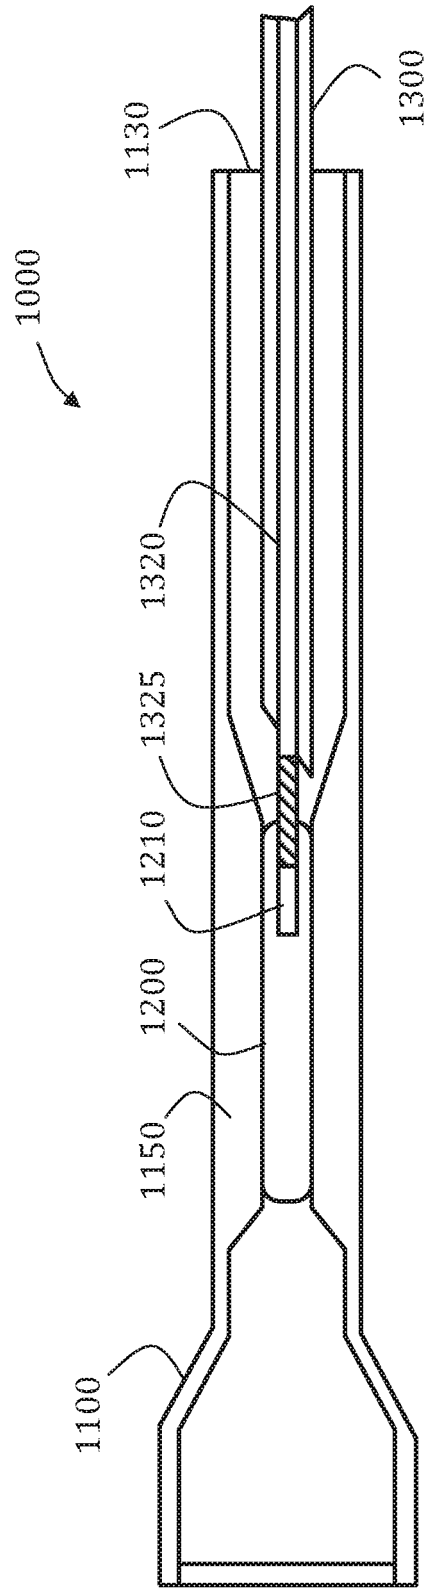


Fig. 3B

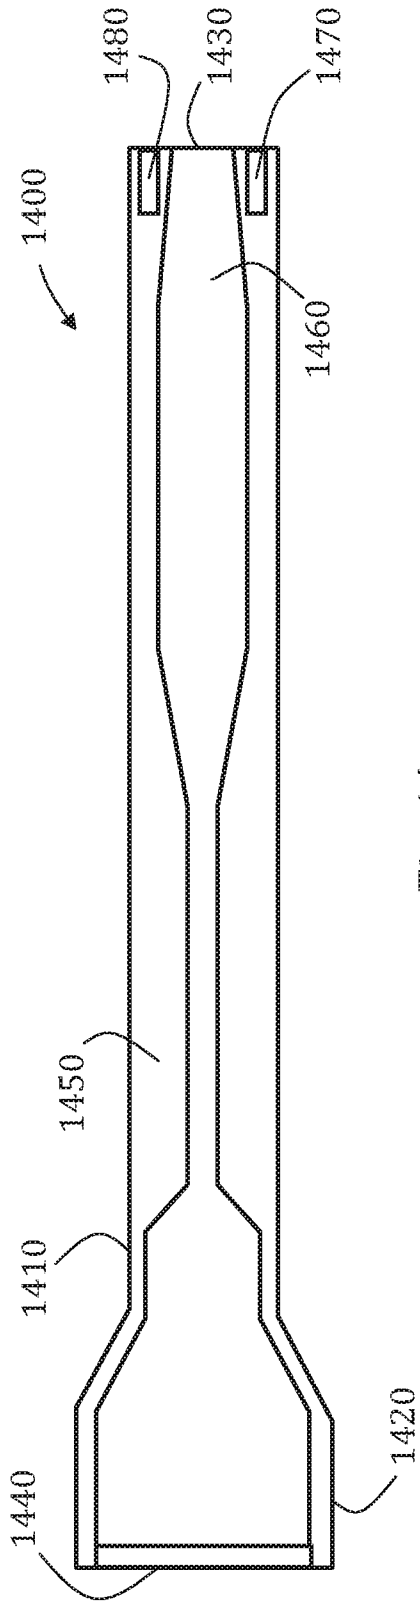


Fig. 4A

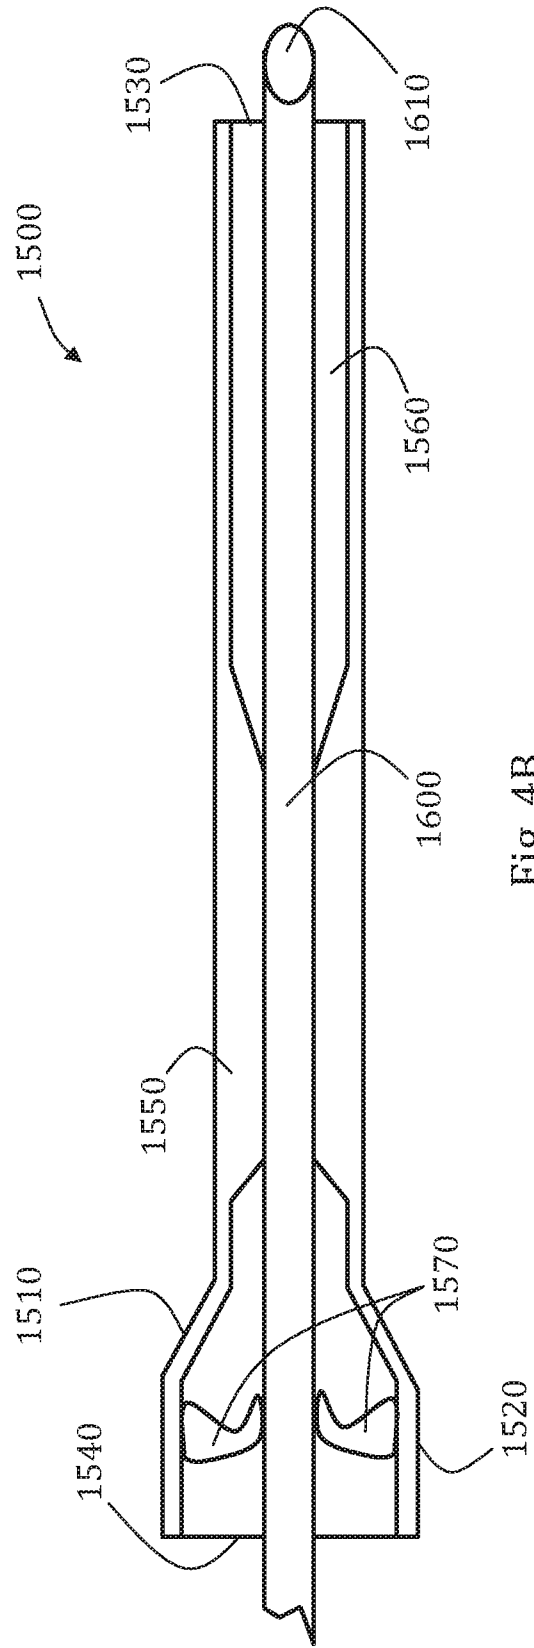
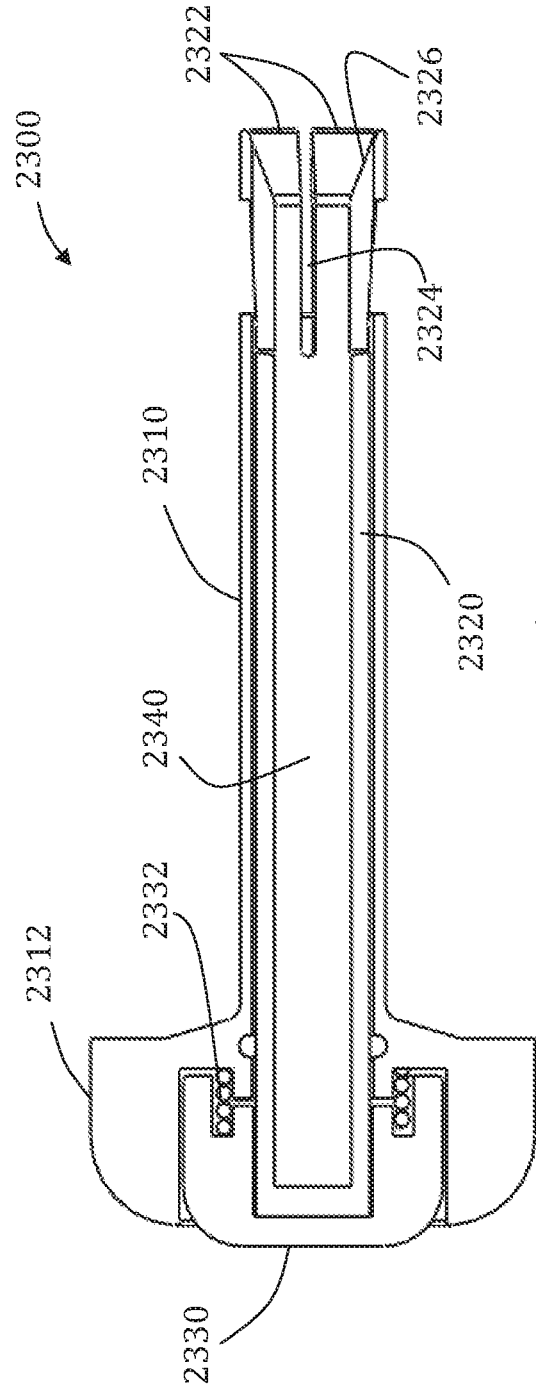
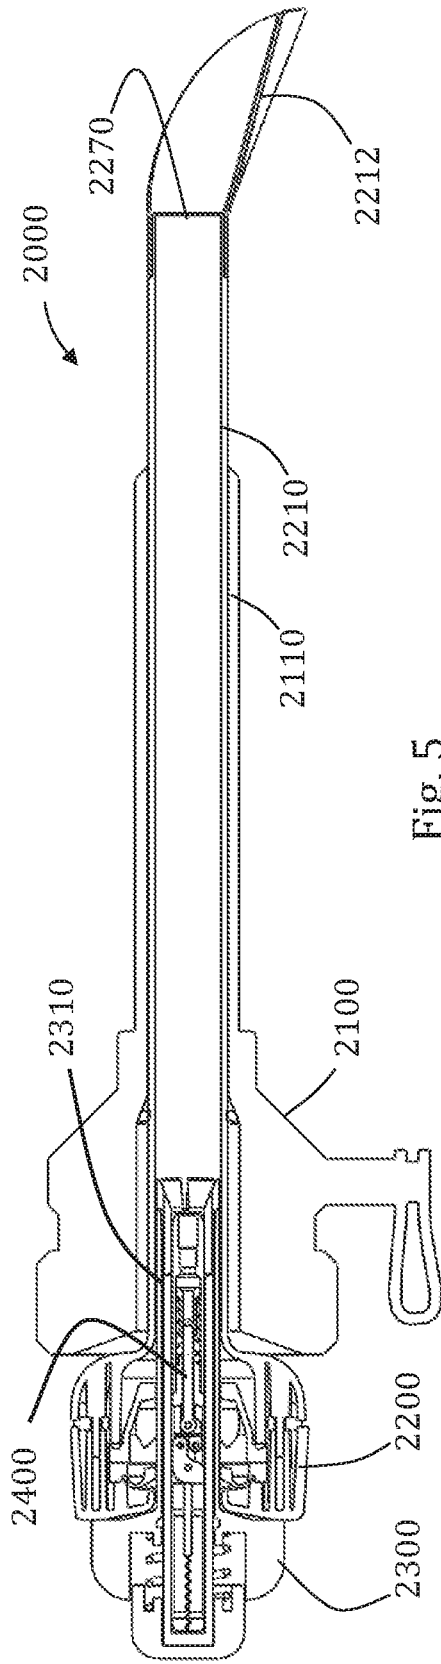


Fig. 4B



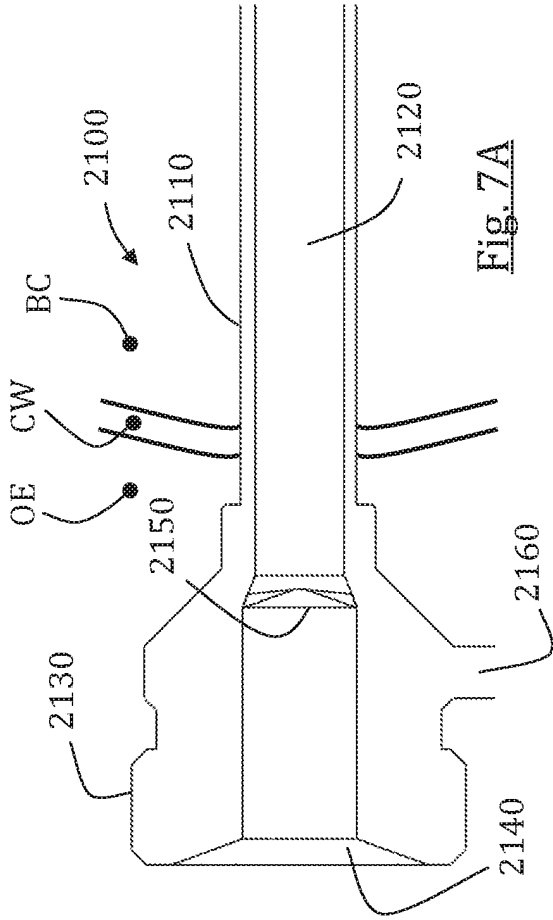


Fig. 7A

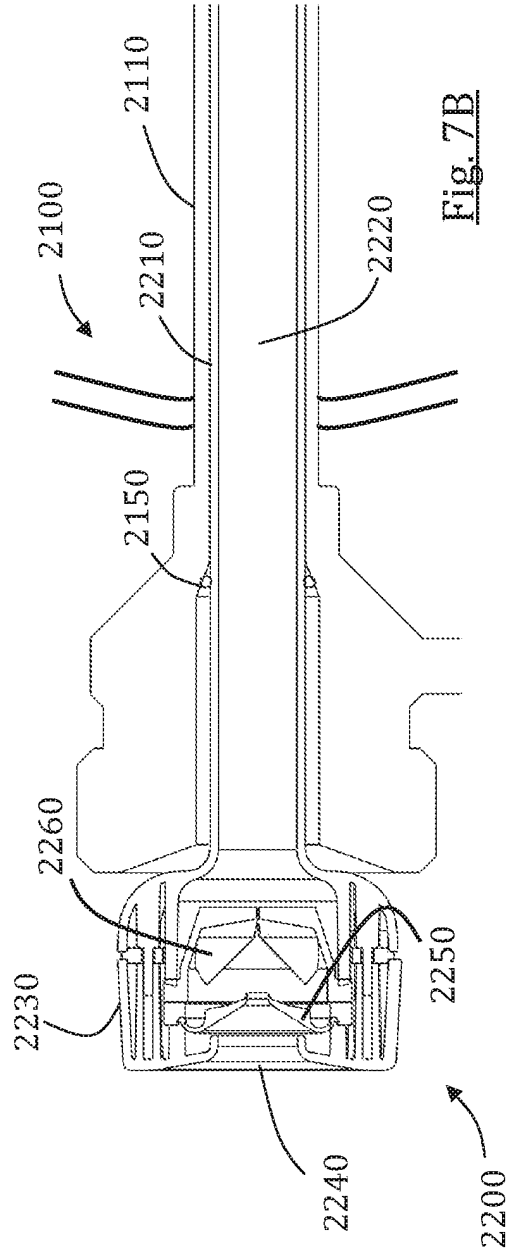


Fig. 7B

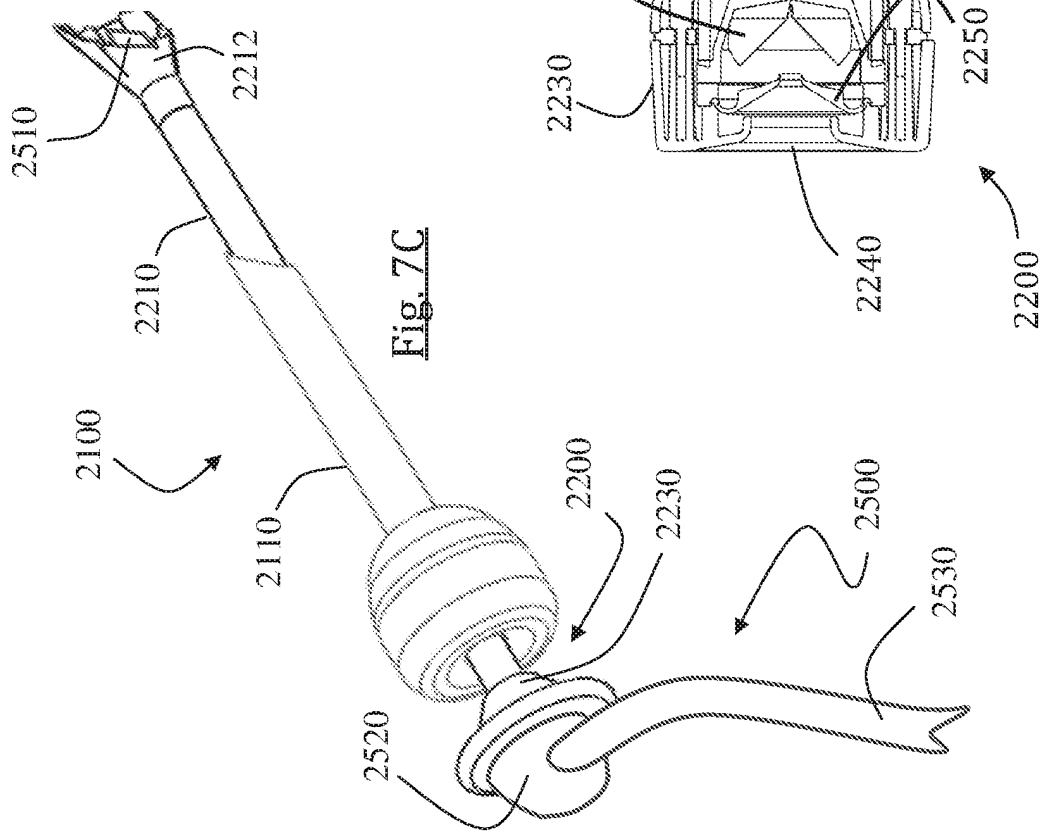


Fig. 7C

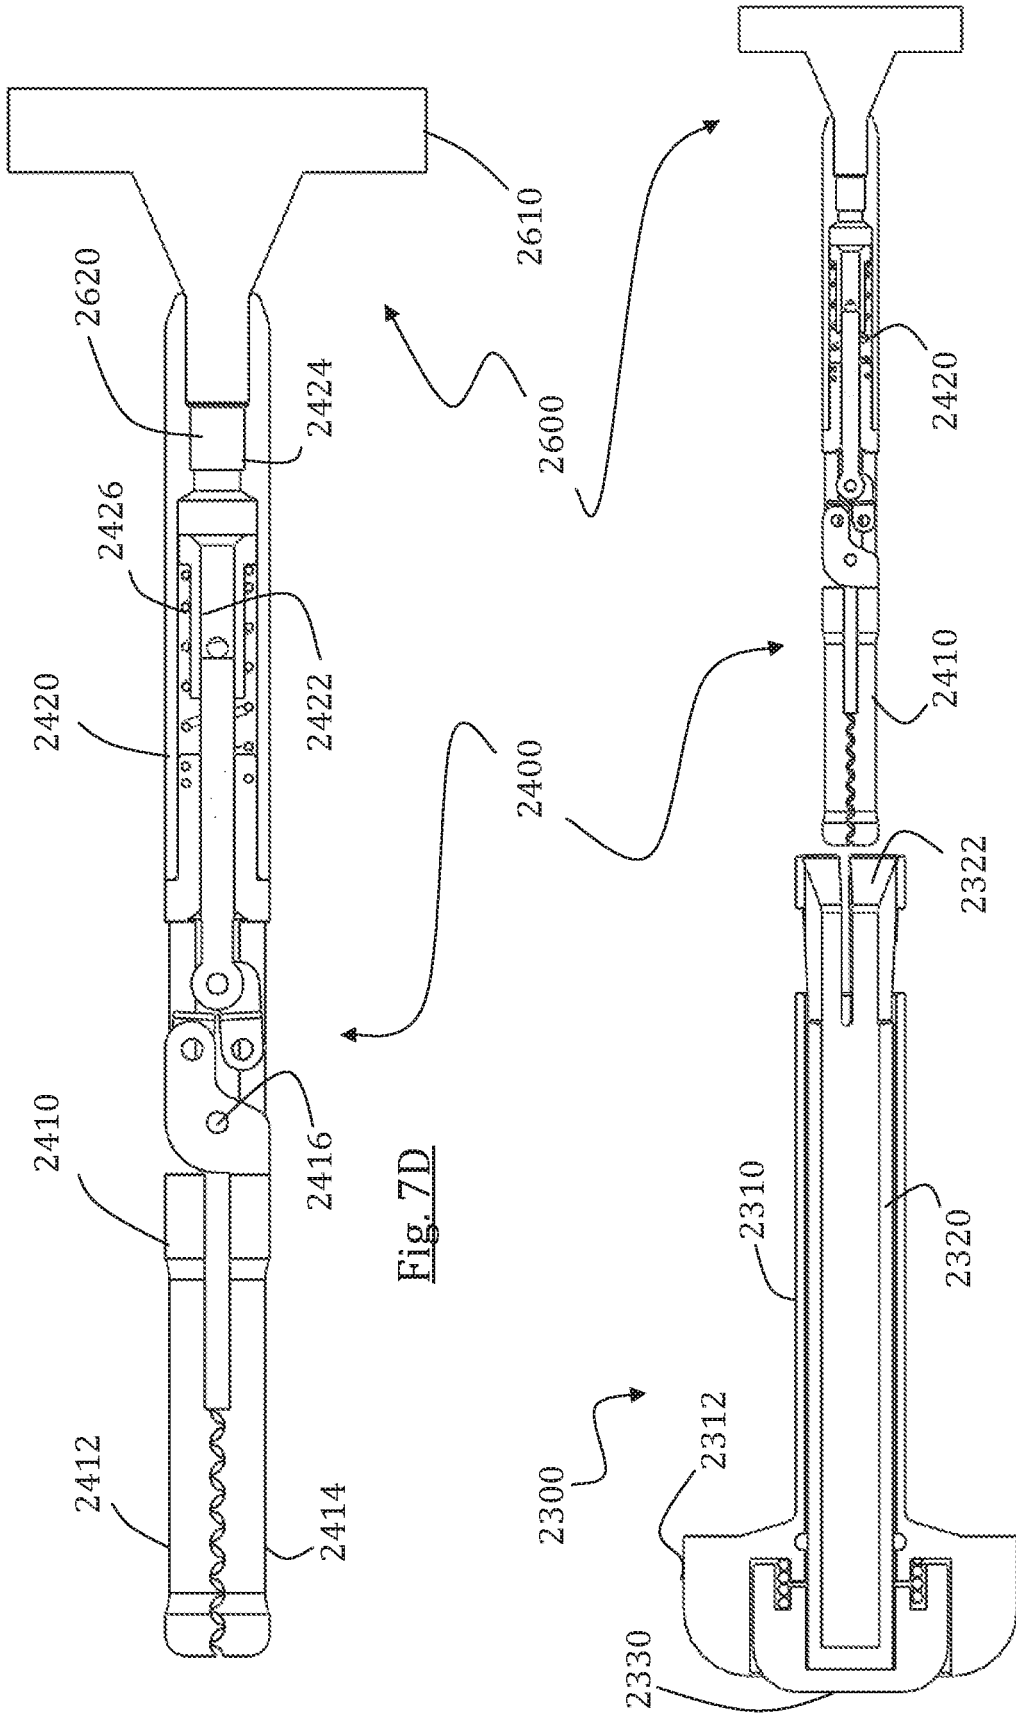


Fig. 7D

Fig. 7E

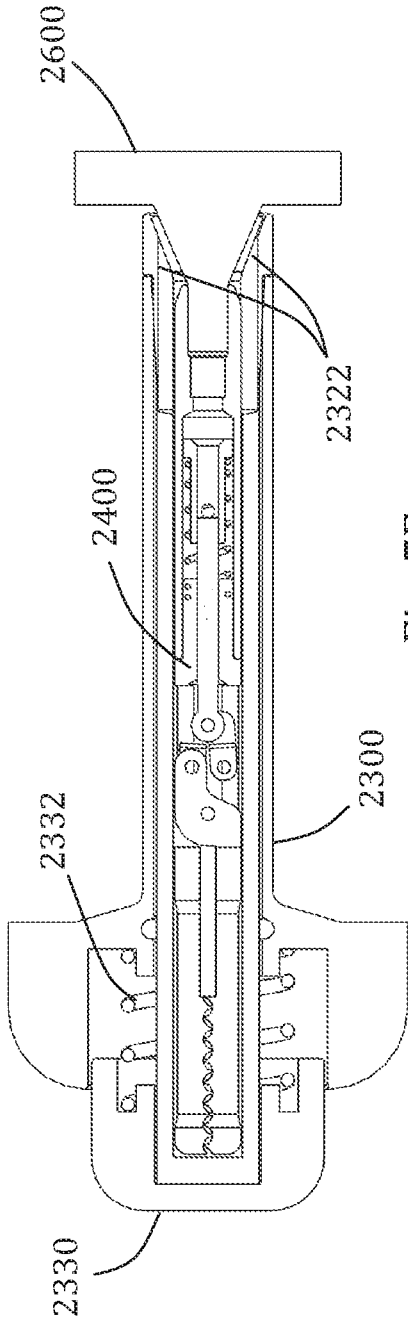


Fig. 7F

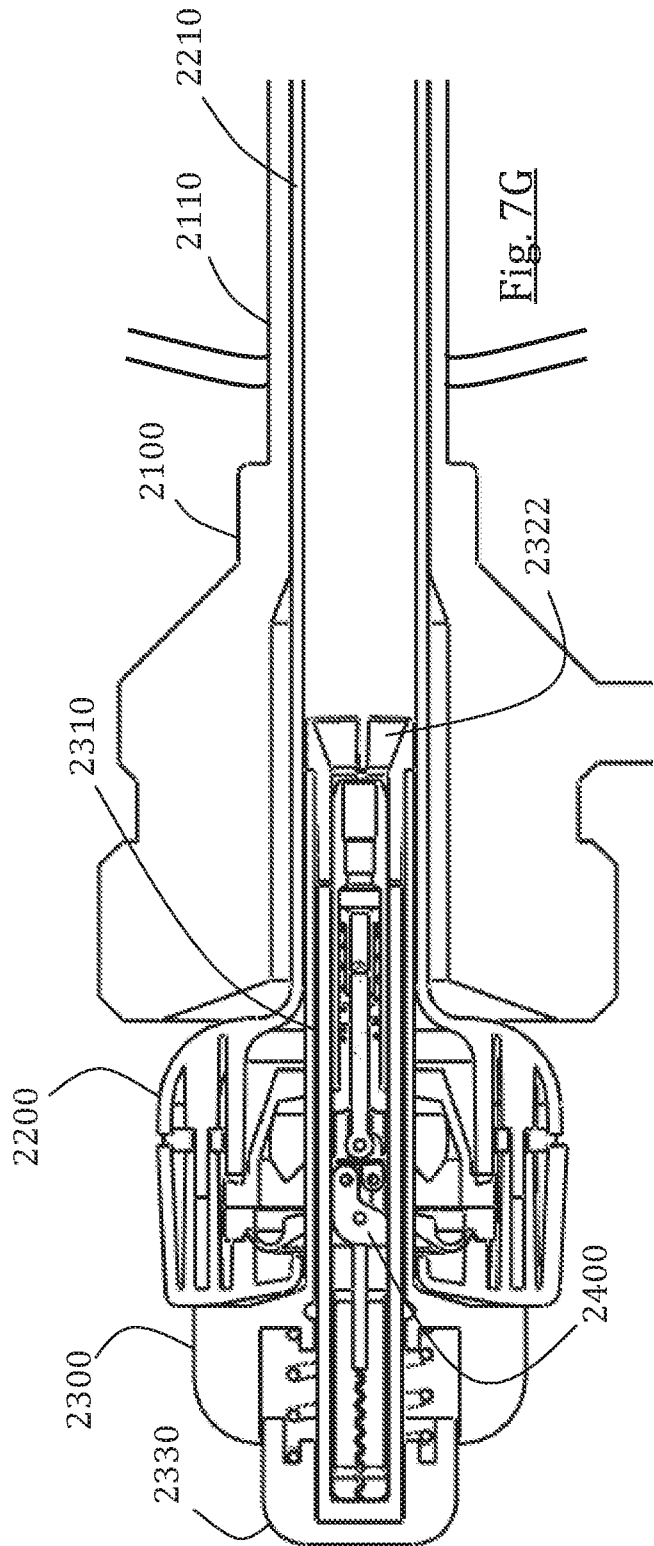


Fig. 7G

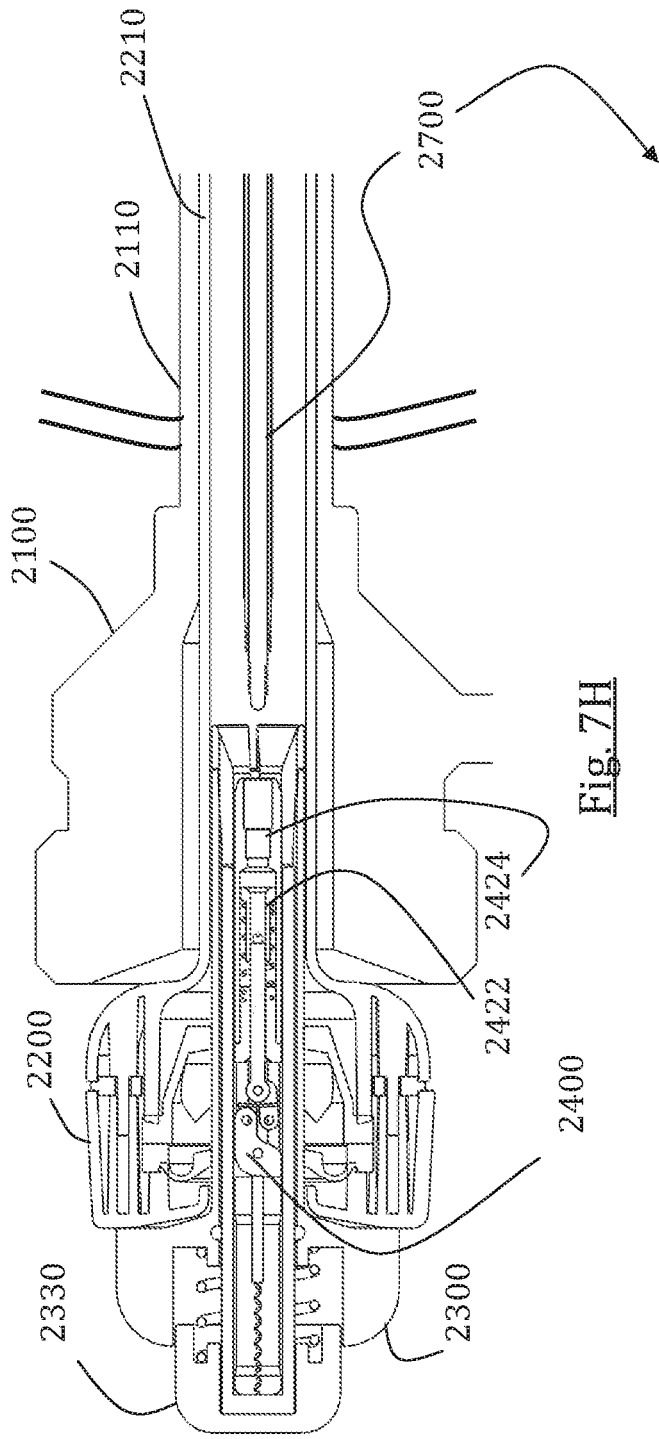


Fig. 7H

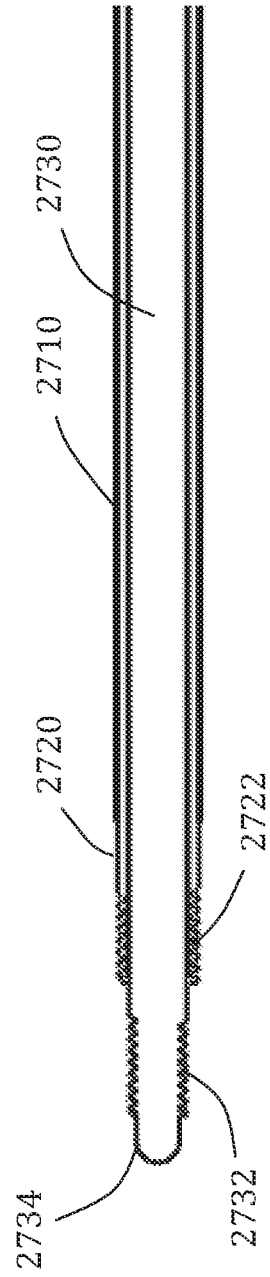


Fig. 7I

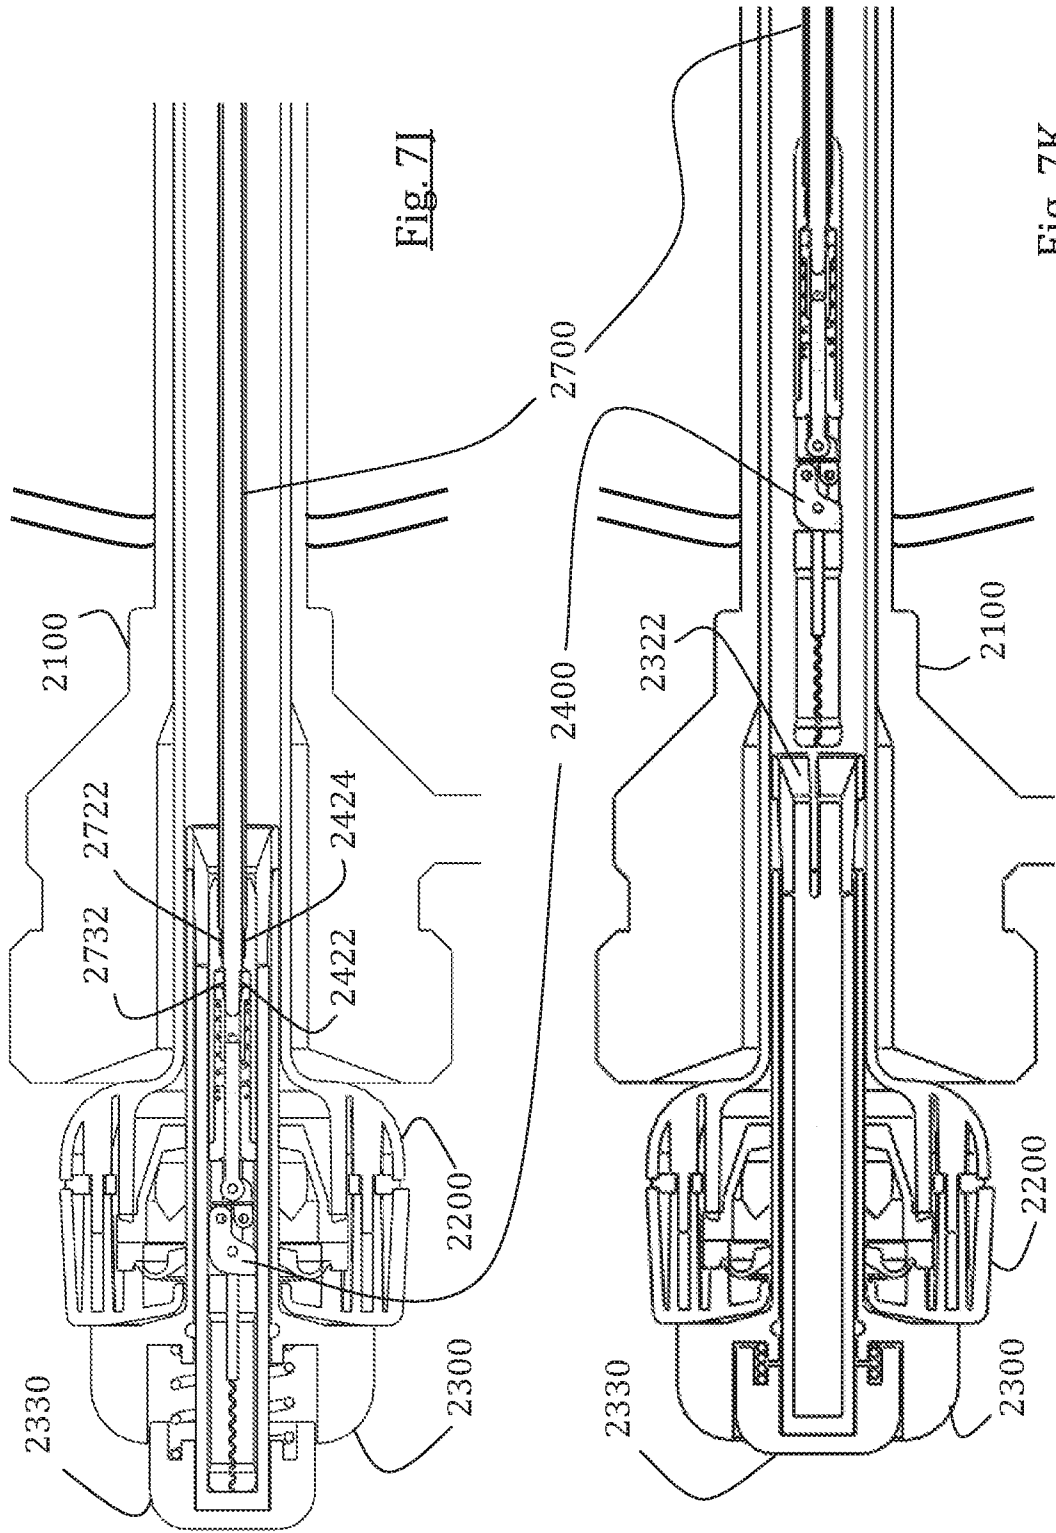


Fig. 7J

Fig. 7K

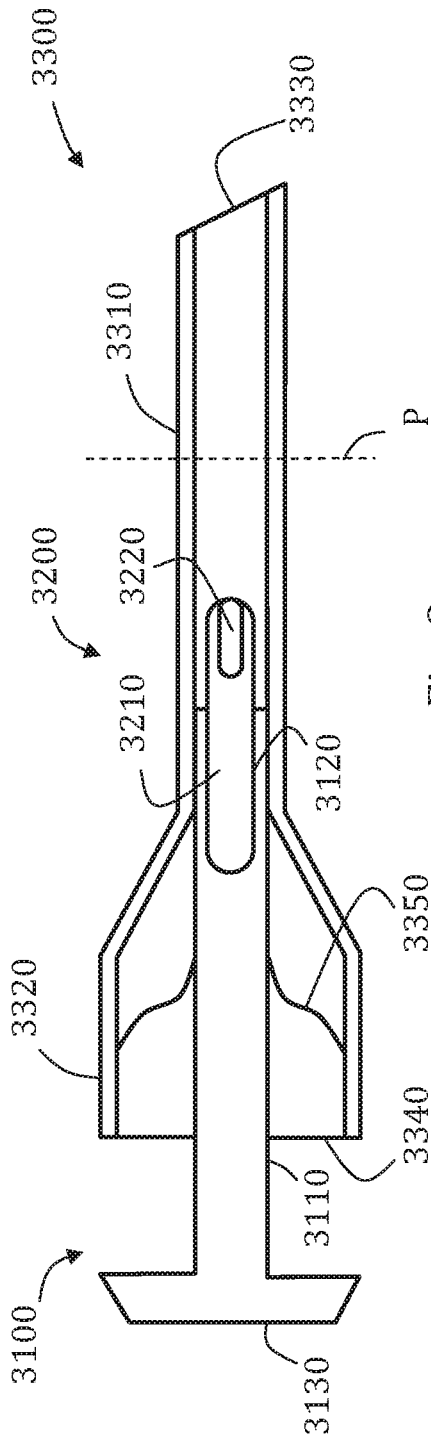


Fig. 8

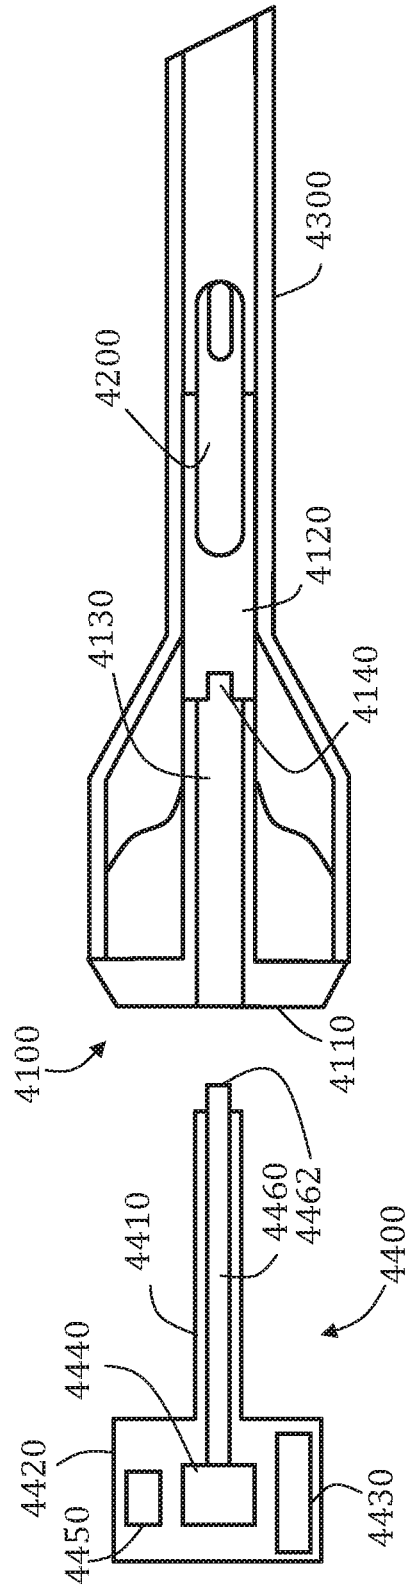


Fig. 9

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 5352219 A [0002]
- US 5441059 A [0002]
- US 5593402 A [0002]
- US 6723043 B [0002]
- US 7666181 B [0002]
- US 8133254 B [0002]
- US 2012259325 A [0002] [0003]
- WO 2011089565 A [0002] [0004]
- WO 2012035524 A [0002] [0005]

专利名称(译)	手术工具介绍人		
公开(公告)号	<a href="#">EP2958499B1</a>	公开(公告)日	2019-06-19
申请号	EP2014709418	申请日	2014-02-24
[标]申请(专利权)人(译)	意昂外科有限公司		
申请(专利权)人(译)	EON手术		
当前申请(专利权)人(译)	EON手术		
[标]发明人	FARIN DANNY BACHAR YEHUDA		
发明人	FARIN, DANNY BACHAR, YEHUDA		
IPC分类号	A61B17/34 A61B17/29 A61B90/30 A61B17/00		
CPC分类号	A61B17/34 A61B17/29 A61B2017/00017 A61B2017/00398 A61B2017/00473 A61B2017/00734 A61B2017/2931 A61B2017/294 A61B2017/2946 A61B2090/309 A61B2090/3614		
优先权	61/768846 2013-02-25 US		
其他公开文献	EP2958499A2		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

工具导引器构造成用于引入包括直管的细长主体，其中管包围在其远端开口的管腔，管腔具有管开口。工具导引器包括锁定装置，以选择性地锁定或解锁可互换的外科工具到管，使其不会在管腔中轴向和/或旋转地移位，锁定装置被配置成使得在锁定时，工具的工具连接器朝向管内突出。管开口与其间隔至少3厘米。一种方法包括定位外科工具导引器，使得其远端部分突出到体腔中，操纵和/或延伸工具导引器以到达并接合经皮引入体腔内的细长轴；并且通过管开口将细长轴插入管腔并将工具连接到细长轴。

