



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.02.2018 Bulletin 2018/06

(51) Int Cl.:
A61B 17/29 ^(2006.01) **A61B 17/00** ^(2006.01)
A61B 90/00 ^(2016.01) **A61B 18/14** ^(2006.01)

(21) Application number: **17183700.8**

(22) Date of filing: **28.07.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **JOSHI, Sharad H.**
Beverly, MA Massachusetts 01915 (US)
• **MONIZ, Michael**
Beverly, MA Massachusetts 01915 (US)
• **BENTWOOD, Michael**
Beverly, MA Massachusetts 01915 (US)

(30) Priority: **02.08.2016 US 201615226183**

(74) Representative: **Schaumburg und Partner**
Patentanwälte mbB
Postfach 86 07 48
81634 München (DE)

(71) Applicant: **Microline Surgical, Inc.**
Beverly, MA 01915 (US)

(54) **LAPAROSCOPIC INSTRUMENT WITH RECESSED SEAL**

(57) A handpiece for interfacing with an instrument tip. The handpiece includes a tube end having an interface at a distalmost end thereof and configured to attach to the instrument tip, the tube end having a retention seal channel about an exterior of the tube end, a retention seal fixedly positioned in the retention seal channel, the retention seal having a sealing ring channel about an

exterior of the retention seal, an elastically-deformable sealing ring press-fit into the sealing ring channel such that the sealing ring is immovable in a longitudinal direction of the tube, and an outer sheath positioned about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal.

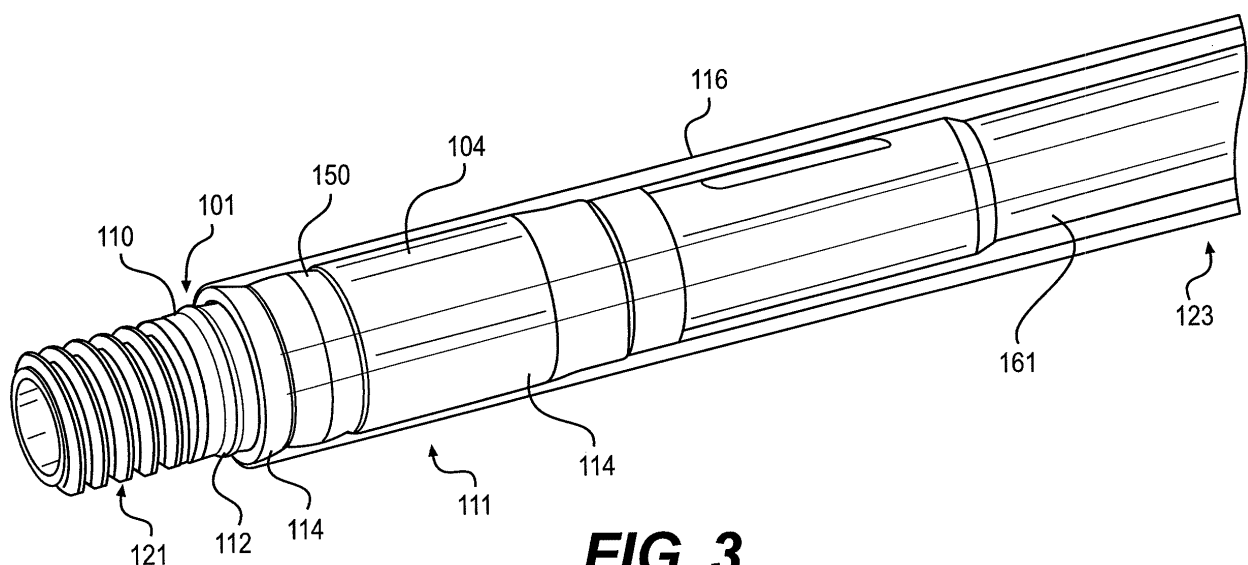


FIG. 3

Description

BACKGROUND

1. Field of the Invention

[0001] This invention relates to an instrument including a surgical apparatus, such as a laparoscopic tube end used for performing laparoscopic, pelvoscopic, arthroscopic, thoroscopic and/or similar such procedures, and more particularly to an electrosurgical apparatus having a handpiece for fluidically sealing, isolating and electrically insulating a detachable tip when engaged with a laparoscopic tube end.

2. Background of the Invention

[0002] Medical procedures such as laparoscopy and the like, which employ a tip at the end of a tube for insertion into the patient, are beneficial because the incisions necessary to perform them are minimal in size, therefore promoting more rapid recovery and lower costs. For example, a patient who undergoes laparoscopic surgery may typically return to normal activity within a period of a few days to about a week, in contrast to more invasive procedures requiring a relatively larger incision (which may require about a month for recovery). Although the term "laparoscopic" is typically used hereinafter, such use of the term "laparoscopic" should be understood to encompass any such similar or related procedures such as, for example, arthroscopic, endoscopic, pelvoscopic and/or thoroscopic or the like, in which relatively small incisions are used.

[0003] However, when a tip is detachably connected to the tube end of a laparoscopic device, complications may occur if fluid breaches the connection and enters the interior of the tip or tube end. For example, septic contamination may arise in the laparoscopic device and/or electrical current may unintentionally leak therefrom. After each laparoscopic procedure, the device is also exposed to brushing, chemicals for cleaning and/or sterilization by various methods which may include heating, cooling, and flushing with additional chemicals. The seal in the handpiece may degrade to the point where it loses its integrity (either over use of hundreds of cycles, or from handpiece abuse; which can result in unintended cautery causing damage and injury to tissue around a surgical site).

[0004] Figs. 1-2 shows a tube end assembly 11 of a reusable handpiece 23 to which a conventional tip (which may be a single-use device, or "SUD") 20 may be removably attached, thereby providing an instrument 10. The tip 20 has an end effector 22 in the form of a scissors, grasper and the like. The tube end assembly 11 distally extends from a tube 61, which in turn distally extends from the handpiece having handles (or other suitable controls, not shown, for actuating the tip 20) operable by the medical personnel or physician performing the sur-

gery. The tube end assembly 11 includes an elastomeric tube end seal 15, which is typically made from EPDM (ethylene propylene diene monomer) and is in the form of an O-ring.

[0005] The seal 15 provides an electrically-safe seal between the interface of the tube end assembly 11 and the tip 20. The main purpose of the seal 15 is to prevent fluids from wicking or seeping into the seam between the two parts of the device (*i.e.*, the point of attachment of the tube end assembly 11 and the tip 20). The seal 15 is typically attached to the tube end assembly 11 via epoxy onto the tube end assembly so that the seal stays in place for multiple uses. One such seal is described in U.S. Patent Publication No. 2007/0027447, the entire contents of which are expressly incorporated herein in their entirety.

[0006] There are two potential problems with a seal of this configuration, namely: (1) it needs to be soft enough (*i.e.*, has a low durometer) to deform and create a seal, which means that the seal 15 wears down quickly, resulting in the handpiece 23 being no longer usable; and (2) the epoxy seal between the seal 15 and the tube end assembly 11 eventually becomes brittle and cracks due to exposure to repeated sterilization cycles (*e.g.*, via chemical sterilization or autoclaving).

[0007] Once the integrity of the seal is lost, collateral damage can occur any time electrosurgical energy is applied to the device. In the illustrated device, the laparoscopic surgical tip 20 is assembled to the tube of the handpiece 23 using a dual-threaded threaded connector. In other words, the tip 20 includes a yoke 50 having external threading, which engages complementary internal threading on an actuation rod (not shown) extending along the length of the tube 61 (thereby providing for the actuation of the end effector), and a back hub 400 includes internal threading (not shown) which engages complimentary external threading 21 on the tube end assembly 11 to secure the back hub to the tube 61. The seal 15 on the handpiece 23 is compressed by the back hub to create a barrier for electricity and fluids.

SUMMARY OF THE INVENTION

[0008] A feature of the disclosure provides handpiece for interfacing with an instrument tip. The handpiece may include a tube end having an interface at a distalmost end thereof and configured to attach to the instrument tip, the tube end having a retention seal channel about an exterior of the tube end, a retention seal fixedly positioned in the retention seal channel, the retention seal having a sealing ring channel about an exterior of the retention seal, an elastically-deformable sealing ring press-fit into the sealing ring channel such that the sealing ring is immovable in a longitudinal direction of the tube end, and an outer sheath positioned about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal.

[0009] The interface may be threaded and configured to attach to complimentary threads on the instrument tip.

Also, the sealing ring may have a pentagonal cross section.

[0010] The retention seal may be made of a material which is softer than the tube end, and the sealing ring may be made of a material which is softer than the retention seal. The retention seal may further include a ridge positioned about a circumference of the tube end, the ridge further positioned, in the longitudinal direction of the tube end, between a distalmost end of the outer sheath and the interface. The ridge may be further configured to engage an inside of a back hub of the instrument tip and create a seal therewith.

[0011] The retention seal may further include a flange inwardly tapering toward a proximal end of the tube end, the flange positioned at a distalmost end of the outer sheath and configured to restrict movement of the outer sheath relative to the tube end. Also, the retention seal may be molded to the retention seal channel. Further, the retention seal may be made of plastic.

[0012] In the longitudinal direction of the tube end, the outside of the sealing ring may be downwardly tapered from a highest center point, and a lowest point of the outside of the sealing ring may be flush with the outside of the retention seal.

[0013] The tube end may further include a protrusion on the outside thereof, the retention seal may further include a recess, such that the protrusion engages with the recess.

[0014] Another feature of the disclosure provides an instrument having an instrument tip, and a handpiece for interfacing with the instrument tip. The handpiece may include a tube end having an interface at a distalmost end thereof and configured to removably attach to the instrument tip, the tube end having a retention seal channel about an exterior of the tube end, a retention seal fixedly positioned in the retention seal channel, the retention seal having a sealing ring channel about an exterior of the retention seal, an elastically-deformable sealing ring press-fit into the sealing ring channel such that the sealing ring may be immovable in a longitudinal direction of the tube end, and an outer sheath positioned about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal.

[0015] The instrument tip may include instrument tip threads, and the interface may include interface threads such that the interface threads threadedly engage with the instrument tip threads.

[0016] The instrument tip may further include a back hub, the retention seal may further include a ridge positioned about a circumference of the tube end, the ridge further positioned, in the longitudinal direction of the tube end, between a distalmost end of the outer sheath and the interface, and the ridge may be configured to engage an inside of the back hub and create a seal therewith.

[0017] The retention seal may further include a flange inwardly tapering toward a proximal end of the tube end, the flange positioned at a distalmost end of the outer

sheath and configured to restrict movement of the outer sheath relative to the tube end. Also, the retention seal may be molded to the retention seal channel. Also, in the longitudinal direction of the tube end, the outside of the sealing ring may be downwardly tapered from a highest center point, and a lowest point of the outside of the sealing ring may be flush with the outside of the retention seal.

[0018] A further feature of the disclosure provides a method of assembling a handpiece for interfacing with an instrument tip. The method may include affixing a retention seal in a retention seal channel on an outside of a tube end, press-fitting an elastically-deformable sealing ring into a sealing ring channel on an outside of the retention seal, such that the sealing ring may be immovable in a longitudinal direction of the tube end, and affixing an outer sheath about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal. Also, the affixing of the retention seal comprises overmolding the retention seal to the outside of the tube end.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

Fig. 1 shows a perspective view of an end of a reusable handpiece with a conventional seal;

Fig. 2 shows a perspective view of an assembled embodiment of a laparoscopic surgical tip of Fig. 1;

Fig. 3 show a partial cutaway view of a tube end assembly according to a feature of the disclosure;

Fig. 4 shows a side view of the tube end assembly according to a feature of the disclosure;

Fig. 5 shows a side sectional view of the tube end assembly according to a feature of the disclosure, taken along lines A-A of Fig. 4;

Fig. 6 shows a side sectional view of the tube end and retention seal according to a feature of the disclosure;

Fig. 7 shows a side view of the tube end and retention seal according to a feature of the disclosure; and

Fig. 8 shows a perspective view of the sealing ring according to a feature of the disclosure.

DETAILED DESCRIPTION

[0020] The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the present invention only, and are presented for providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the present invention. In this regard, no attempt is made to show structural details of the present invention in more detail than is necessary for the fundamental understanding of the present invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the present invention may be embodied in practice.

[0021] FIGS. 3-8 show an exemplary embodiment of components of a tube end assembly 111 of a reusable handpiece 123 in accordance with a non-limiting aspect of the disclosure. The tube end assembly 111 includes a tube end 101 having an interface 121 for engaging and/or attaching to the back hub 400 of the tip 20. This interface 121 may include exterior threading (which may threadedly engage with complimentary threads on the back hub 400 of the tip 21). The tube end may be made of stainless steel or other suitable material.

[0022] The proximal end of the tube end 101 is configured to attach to a distal end of a tube 161 to form a continuous lumen therewith, through which an actuable shaft may be inserted. The tube end 101 also includes a channel 102 located between the interface 121 and proximal end of the tube end. This channel 102 is configured to receive an extended retention seal 104, which is overmolded to the tube end 101 by injection molding. In this way, the use of epoxy or other adhesives is avoided. The retention seal 104 may be made from polypropylene or any other suitable material, and may have a Rockwell hardness of 93, but materials of other suitable hardnesses may be used. The retention seal 104, tube end 101 and sealing ring 150 (and tube 161) are covered with a fluid-resistant outer sheath 116 which may be heat-shrunk and/or extruded thereover, thereby forming the tube end assembly 111. The outer sheath 116 may be made of polyetheretherketone (PEEK) or other suitable material.

[0023] The retention seal 104, once affixed to the tube end 101, is generally flush therewith. The retention seal 104 includes an internal recess 106 for engaging a protrusion 108 on the tube end. In this way, the retention seal 104 is further prevented from movement in the axial direction relative to the tube end 101. The retention seal 104 includes, in this order from the distal direction, a featureless distalmost part 110, a ridge 112, a featureless intermediate part 113, a flange 114, a channel 108 and a proximal part 118 which inwardly tapers in the proximal direction. The diameter of the tube end 101 at the distalmost part may be 0.155 - 0.158 inches, although other suitable dimensions may be used, and the diameter of the tube end at the ridge 112 may be 0.164 - .0166 inches, although other suitable dimensions may be used.

[0024] The ridge 112 may have a trapezoidal or rounded cross-section, or may have a cross-section that is a combination of both, e.g., by having rounded sides and a flat uppermost part, the latter of which may have a width in longitudinal direction X of 0.005 - 0.007 inches, although other suitable dimensions may be used. The ridge is configured to engage the inner surface of the back hub 400 of the tip 20 to create a seal therewith, which prevents fluid from entering the instrument at the tip-handpiece connection point (*i.e.*, the "seam") thereof. This engagement also preserves the electrical safety of the instrument, since electricity does not flow where it is not wanted.

[0025] The flange 114 inwardly tapers toward a prox-

imal end of the tube end 101, and is affixed to a distalmost end of the outer sheath 116. The flange is configured to restrict movement of the outer sheath relative to the tube end 101. The diameter of the tube end 101 at the flange 114 may be 0.196 inches, although other suitable dimensions may be used.

[0026] The channel 108 of the retention seal 104 is configured to retain an elastically-deformable sealing ring 150, which is press-fit into the channel, which serves to prevent movement of the seal in the longitudinal direction X relative to the retention seal. Once inserted into the channel 108, the sealing ring 150 is covered (along with the rest of the tube end assembly 111) by the outer sheath 116. Thus, as shown in Fig. 5, the sealing ring 150 is sandwiched between the outer sheath 116 and the retention seal 104, and therefore the sealing ring and at least a portion of the retention seal are sandwiched between the outer sheath 116 and tube end.

[0027] The channel 108 may have a width in the longitudinal direction X of 0.090 inches, and the sealing ring 150 may have a width in the longitudinal direction X of 0.080 inches, although other widths of each of these elements may be used. Once the sealing ring 150 is covered (along with the rest of the tube end assembly 111) by the outer sheath 116, the pressure of the outer sheath against the sealing ring causes the sealing ring to expand in the longitudinal direction X and therefore fill the channel 108, and can form a secure seal therewith without the use of epoxy or other adhesive. Further, rather than forming a right angle in the channel 108, the intersection between the channel walls and channel bottom may be curved.

[0028] The sealing ring 150 may have a pentagonal cross section. For example, as shown in Figs. 3, 5 and 8, in the longitudinal direction X the outside of the sealing ring 150 may be downwardly tapered from a highest center point 150a to a lowest point at the edge points of the sealing ring, such that the edge points are flush with the outside of the retention seal 104. The sealing ring 150 may have a Shore durometer of 70, but materials of other suitable durometers may be used. The pentagonal cross section of the sealing ring 150, together with the Shore durometer, allows the sealing ring to be installed in the outer sheath 116 without getting torn or otherwise damaged during the assembly process, and further helps prevent the outer sheath from displacement in the longitudinal direction X relative to the sealing ring, while still form a secure seal between the sealing ring and the outer sheath, without the use of epoxy or other adhesive. Further, the sealing ring 150 may be made out of ethylene propylene diene terpolymer (EPDM); however, other flexible materials may be used. Thus, the retention seal 104 is made of a material which is softer than the tube end 101, and the sealing ring 150 is made of a material which is softer than the retention seal.

[0029] A method of assembling the tube end assembly 111 will now be described. First, the extended retention seal 104 is overmolded to the channel 102 of the tube

end 101 by injection molding. Then, the sealing ring 150 is press fit into the channel 108 of the retention seal 104. Next, the retention seal 104, tube end 101 and sealing ring 150 (and tube 161) are covered with the outer sheath 116 by heat shrinking and/or extrusion thereover, thereby forming the tube end assembly 111.

[0030] In view of the foregoing, the present disclosure, through one or more of its various aspects, embodiments and/or specific features or sub-components, is thus intended to bring out one or more of the advantages as specifically noted below. While the present disclosure includes description with respect to a medical device and procedure, the present invention may be used in a variety of other, non-medical, environments.

[0031] The illustrations of the embodiments described herein are intended to provide a general understanding of the structure of the various embodiments. The illustrations are not intended to serve as a complete description of all of the elements and features of apparatus and systems that utilize the structures or methods described herein. Many other embodiments may be apparent to those of skill in the art upon reviewing the disclosure. Other embodiments may be utilized and derived from the disclosure, such that structural and logical substitutions and changes may be made without departing from the scope of the disclosure. Additionally, the illustrations are merely representational and may not be drawn to scale. Certain proportions within the illustrations may be exaggerated, while other proportions may be minimized. Accordingly, the disclosure and the figures are to be regarded as illustrative rather than restrictive.

[0032] One or more embodiments of the disclosure may be referred to herein, individually and/or collectively, by the term "invention" merely for convenience and without intending to voluntarily limit the scope of this application to any particular invention or inventive concept. Moreover, although specific embodiments have been illustrated and described herein, it should be appreciated that any subsequent arrangement designed to achieve the same or similar purpose may be substituted for the specific embodiments shown. This disclosure is intended to cover any and all subsequent adaptations or variations of various embodiments. Combinations of the above embodiments, and other embodiments not specifically described herein, will be apparent to those of skill in the art upon reviewing the description.

[0033] The Abstract of the Disclosure is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, various features may be grouped together or described in a single embodiment for the purpose of streamlining the disclosure. This disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter may be directed to less than all of the features of any of the disclosed embodiments. Thus, the following claims are in-

corporated into the Detailed Description, with each claim standing on its own as defining separately claimed subject matter.

[0034] The above disclosed subject matter is to be considered illustrative, and not restrictive, and the appended claims are intended to cover all such modifications, enhancements, and other embodiments which fall within the true spirit and scope of the present disclosure. Thus, to the maximum extent allowed by law, the scope of the present disclosure is to be determined by the broadest permissible interpretation of the following claims and their equivalents, and shall not be restricted or limited by the foregoing detailed description.

Claims

1. A handpiece for interfacing with an instrument tip, the handpiece comprising:

a tube end comprising an interface at a distal-most end thereof and configured to attach to the instrument tip, the tube end comprising a retention seal channel about an exterior of the tube end;

a retention seal fixedly positioned in the retention seal channel, the retention seal comprising a sealing ring channel about an exterior of the retention seal;

an elastically-deformable sealing ring press-fit into the sealing ring channel such that the sealing ring is immovable in a longitudinal direction of the tube end; and

an outer sheath positioned about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal.

2. The handpiece according to claim 1, wherein the interface is threaded and configured to attach to complementary threads on the instrument tip.

3. The handpiece according to claim 1, wherein the sealing ring has a pentagonal cross section.

4. The handpiece according to claim 1, wherein:

the retention seal is made of a material which is softer than the tube end, and

the sealing ring is made of a material which is softer than the retention seal.

5. The handpiece according to claim 1, wherein:

the retention seal further comprises a ridge positioned about a circumference of the tube end, the ridge further positioned, in the longitudinal direction of the tube end, between a distalmost

- end of the outer sheath and the interface, and the ridge is configured to engage an inside of a back hub of the instrument tip and create a seal therewith.
6. The handpiece according to claim 1, wherein the retention seal further comprises a flange inwardly tapering toward a proximal end of the tube end, the flange positioned at a distalmost end of the outer sheath and configured to restrict movement of the outer sheath relative to the tube end.
7. The handpiece according to claim 1, wherein the retention seal is molded to the retention seal channel.
8. The handpiece according to claim 1, wherein the retention seal is made of plastic.
9. The handpiece according to claim 1, wherein:
in the longitudinal direction of the tube end, the outside of the sealing ring is downwardly tapered from a highest center point, and
a lowest point of the outside of the sealing ring is flush with the outside of the retention seal.
10. The handpiece according to claim 1, wherein:
the tube end further comprises a protrusion on the outside thereof,
the retention seal further comprises a recess, and
the protrusion engages with the recess.
11. An instrument comprising:
an instrument tip; and
a handpiece for interfacing with the instrument tip, the handpiece comprising:
a tube end comprising an interface at a distalmost end thereof and configured to removably attach to the instrument tip, the tube end comprising a retention seal channel about an exterior of the tube end;
a retention seal fixedly positioned in the retention seal channel, the retention seal comprising a sealing ring channel about an exterior of the retention seal;
an elastically-deformable sealing ring press-fit into the sealing ring channel such that the sealing ring is immovable in a longitudinal direction of the tube end; and
an outer sheath positioned about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal.
12. The instrument according to claim 11, wherein:
the instrument tip comprises instrument tip threads, and
the interface comprises interface threads such that the interface threads threadedly engage with the instrument tip threads.
13. The instrument according to claim 11, wherein the sealing ring has a pentagonal cross section.
14. The instrument according to claim 11, wherein:
the retention seal is made of a material which is softer than the tube end, and
the sealing ring is made of a material which is softer than the retention seal.
15. The instrument according to claim 11, wherein:
the instrument tip further comprises a back hub, the retention seal further comprises a ridge positioned about a circumference of the tube end, the ridge further positioned, in the longitudinal direction of the tube end, between a distalmost end of the outer sheath and the interface, and the ridge is configured to engage an inside of the back hub and create a seal therewith.
16. The instrument according to claim 11, wherein the retention seal further comprises a flange inwardly tapering toward a proximal end of the tube end, the flange positioned at a distalmost end of the outer sheath and configured to restrict movement of the outer sheath relative to the tube end.
17. The instrument according to claim 11, wherein the retention seal is molded to the retention seal channel.
18. The instrument according to claim 11, wherein the retention seal is made of plastic.
19. The instrument according to claim 11, wherein:
in the longitudinal direction of the tube end, the outside of the sealing ring is downwardly tapered from a highest center point, and
a lowest point of the outside of the sealing ring is flush with the outside of the retention seal.
20. A method of assembling a handpiece for interfacing with an instrument tip, the method comprising:
affixing a retention seal in a retention seal channel on an outside of a tube end;
press-fitting an elastically-deformable sealing ring into a sealing ring channel on an outside of

the retention seal, such that the sealing ring is immovable in a longitudinal direction of the tube end; and

affixing an outer sheath about the tube end such that the outer sheath and tube end sandwich the sealing ring and at least a portion of the retention seal. 5

21. The method of claim 20, wherein the affixing of the retention seal comprises overmolding the retention seal to the outside of the tube end. 10

15

20

25

30


35

40


45

50


55

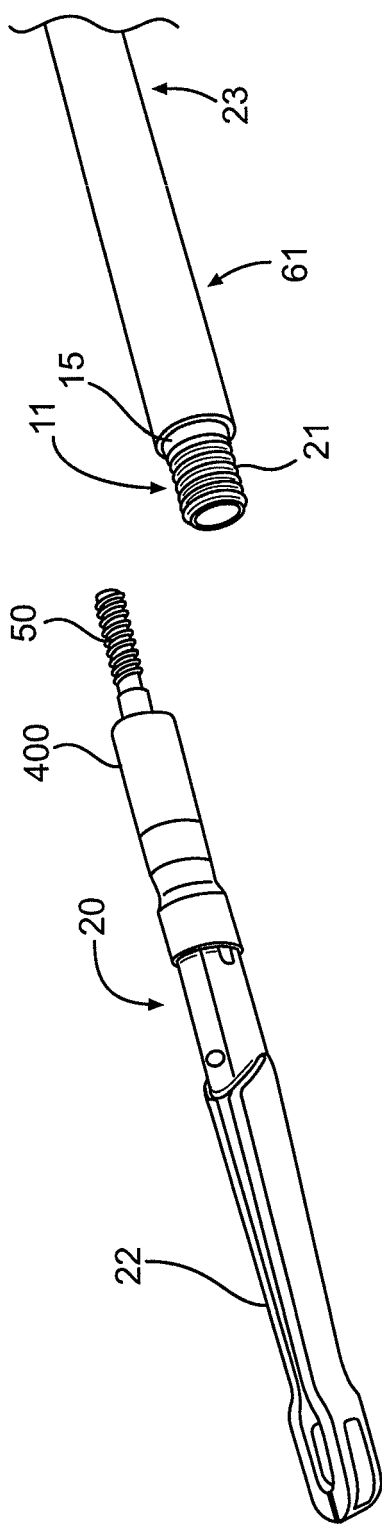

RELATED ART
FIG. 1

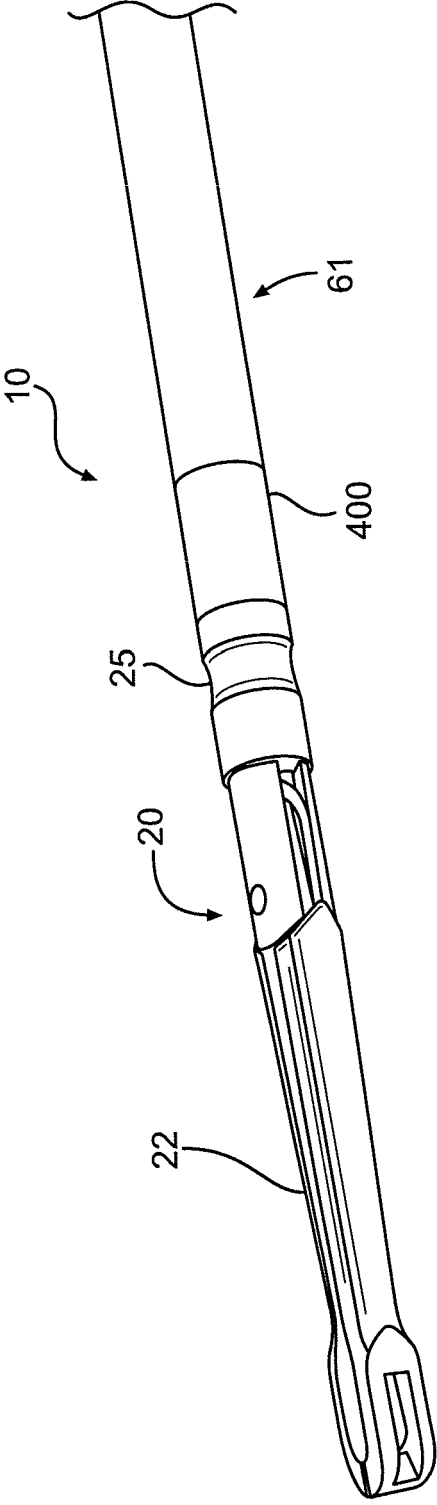

RELATED ART
FIG. 2

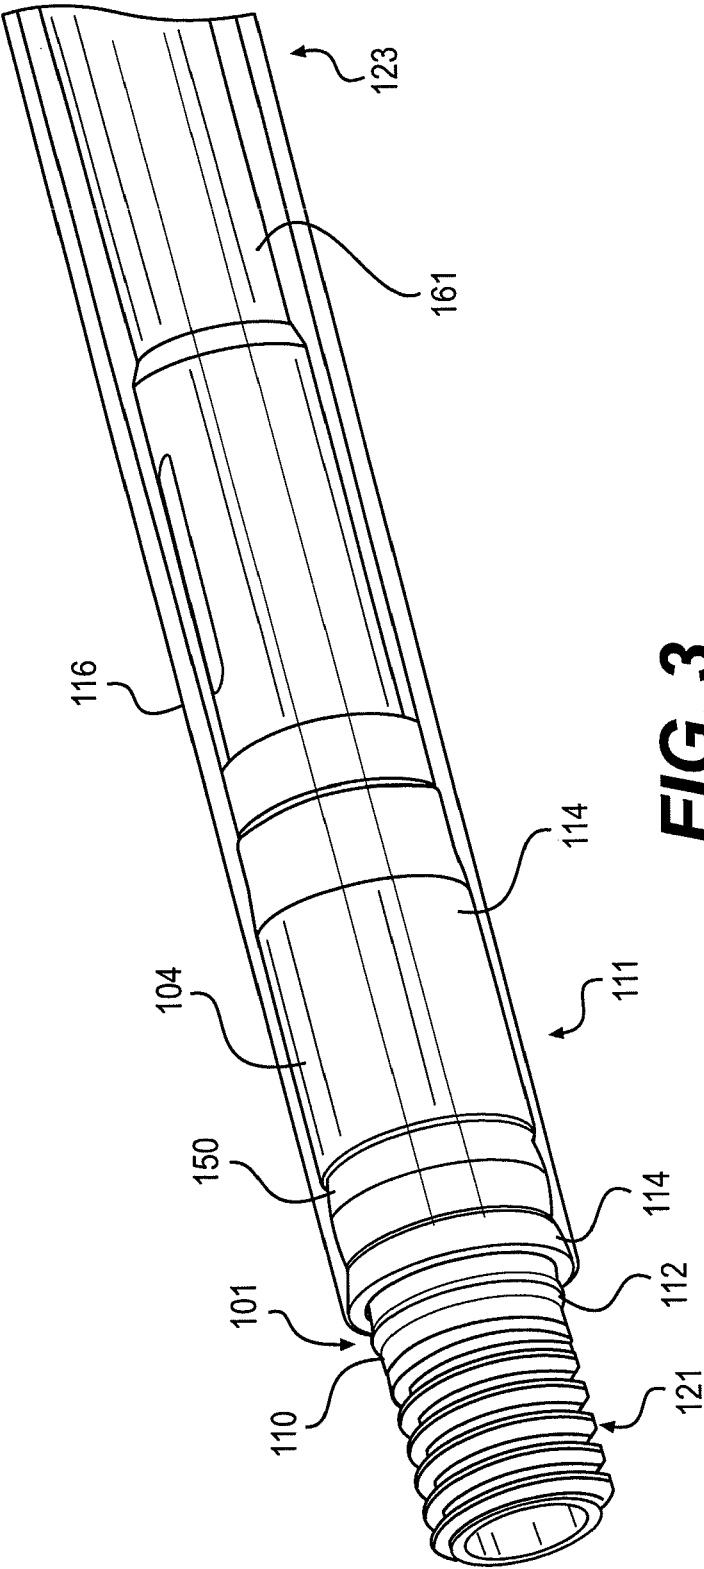

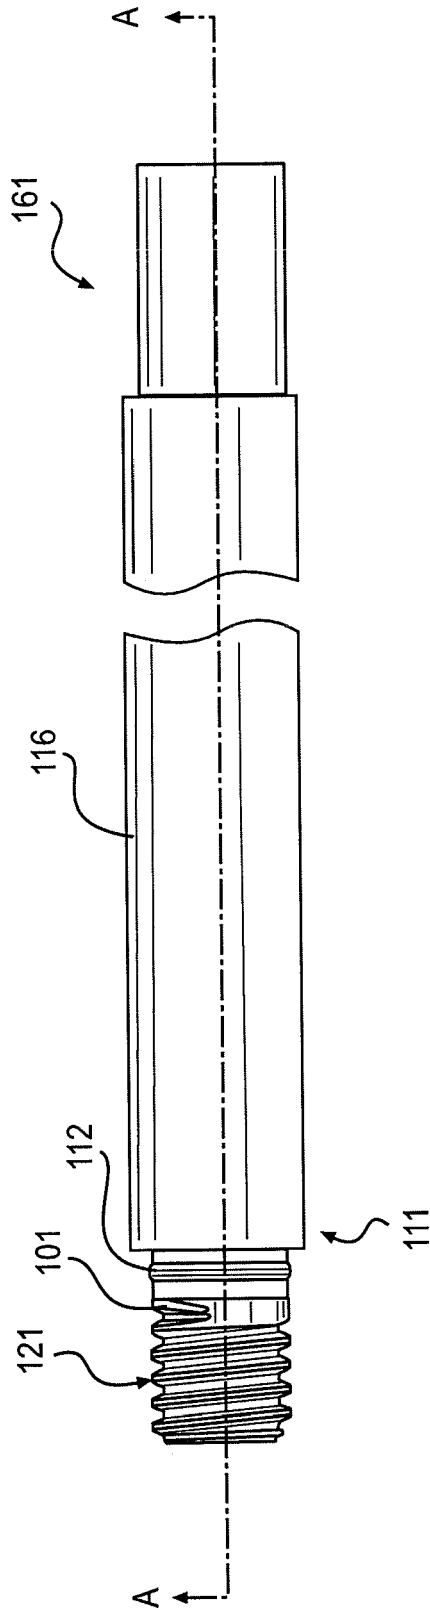


FIG. 4

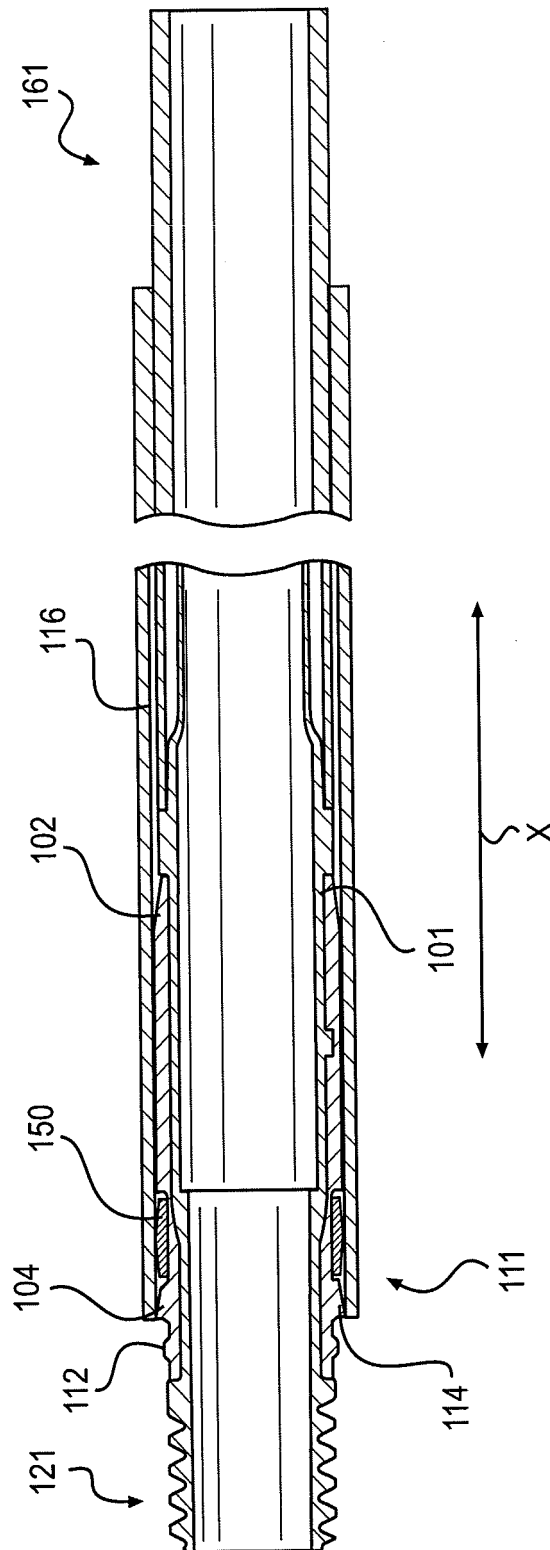


FIG. 5

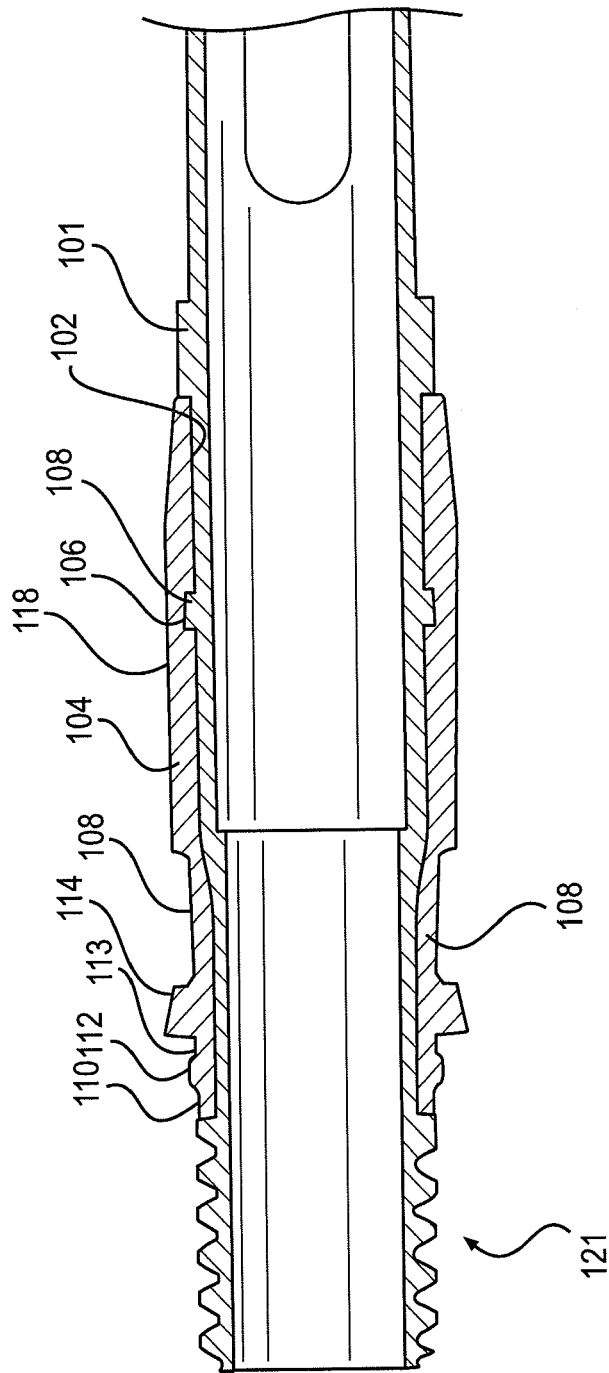


FIG. 6

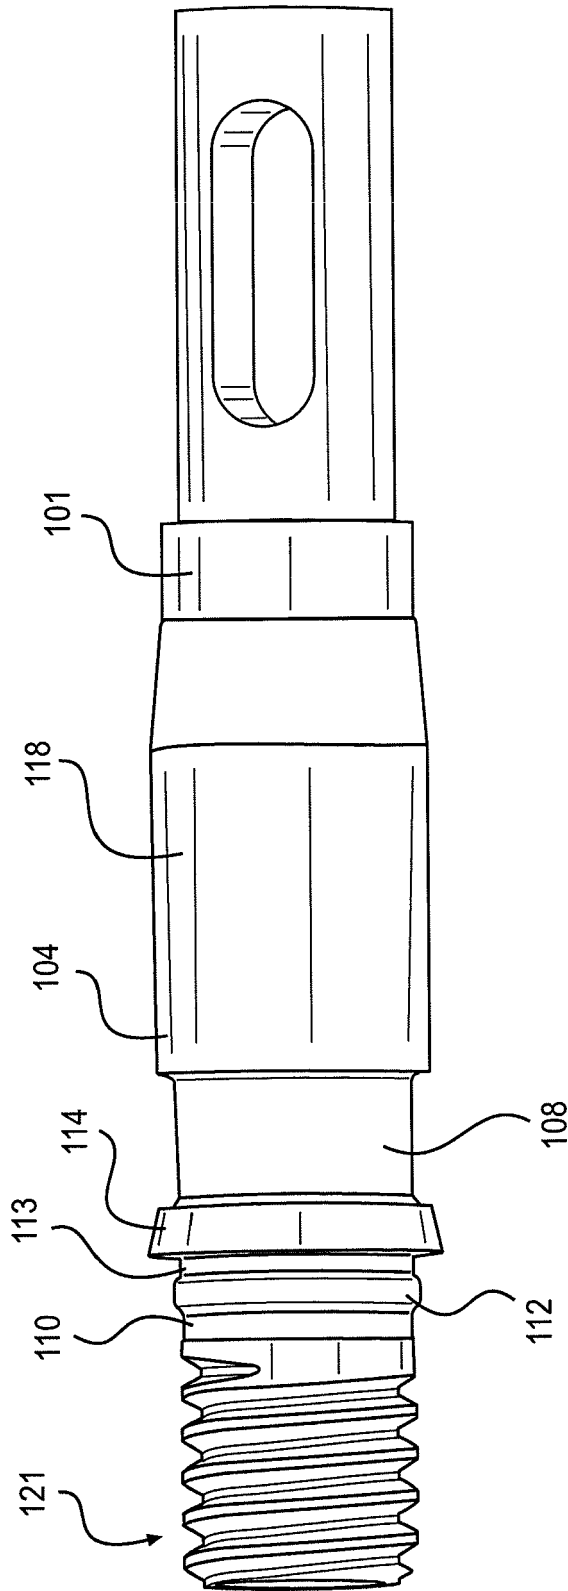


FIG. 7

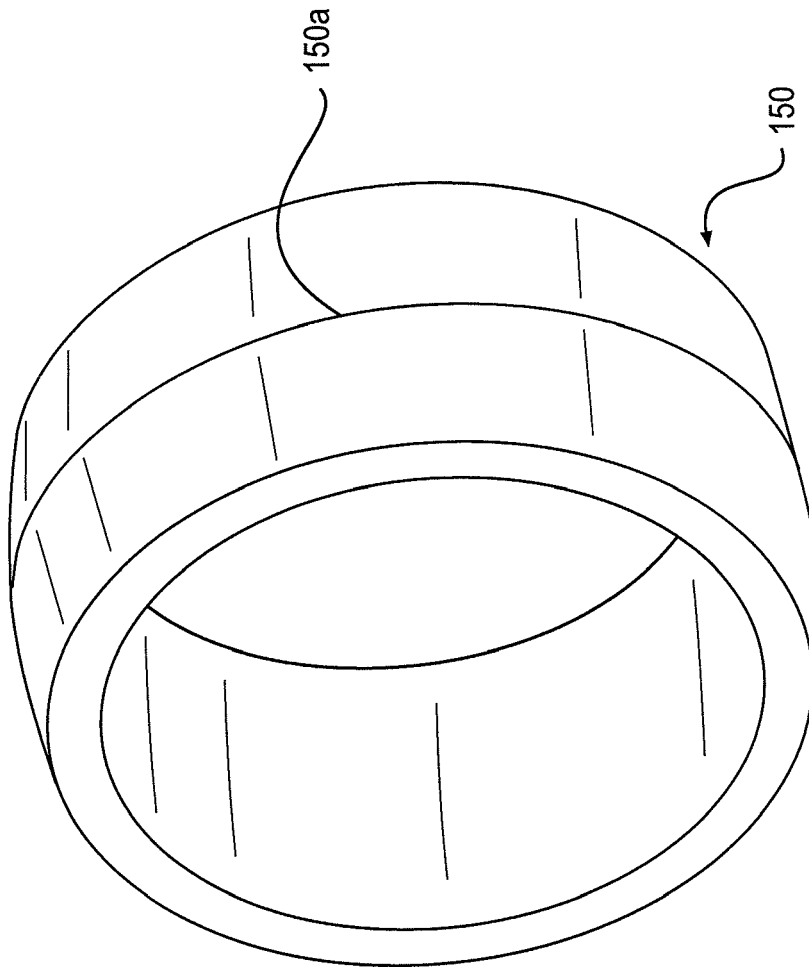


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 17 18 3700

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	US 2007/027447 A1 (THEROUX MARC [US] ET AL) 1 February 2007 (2007-02-01) * paragraph [0023] - paragraph [0034]; figures 1-6 *	1-21	INV. A61B17/29
A	EP 2 522 285 A1 (MICROLINE SURGICAL INC [US]) 14 November 2012 (2012-11-14) * paragraph [0051] - paragraph [0068]; figures 1-9 *	1-21	ADD. A61B17/00 A61B90/00 A61B18/14
A	US 5 261 918 A (PHILLIPS JOHN C [US] ET AL) 16 November 1993 (1993-11-16) * column 3, line 50 - column 6, line 64 *	1-21	
			TECHNICAL FIELDS SEARCHED (IPC)
			A61B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 28 November 2017	Examiner Neef, Tatjana
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 18 3700

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-11-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007027447 A1	01-02-2007	DE 102006034819 A1	01-02-2007
		JP 2007029725 A	08-02-2007
		US 2007027447 A1	01-02-2007

EP 2522285 A1	14-11-2012	CA 2776646 A1	12-11-2012
		EP 2522285 A1	14-11-2012
		JP 5492248 B2	14-05-2014
		JP 2012236025 A	06-12-2012
		US 2012289773 A1	15-11-2012

US 5261918 A	16-11-1993	NONE	

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20070027447 A [0005]

专利名称(译)	腹腔镜仪器带凹进式密封		
公开(公告)号	EP3278747A1	公开(公告)日	2018-02-07
申请号	EP2017183700	申请日	2017-07-28
[标]申请(专利权)人(译)	MICROLINE手术		
申请(专利权)人(译)	MICROLINE外科INC.		
当前申请(专利权)人(译)	MICROLINE外科INC.		
[标]发明人	JOSHI SHARAD H MONIZ MICHAEL BENTWOOD MICHAEL		
发明人	JOSHI, SHARAD H. MONIZ, MICHAEL BENTWOOD, MICHAEL		
IPC分类号	A61B17/29 A61B17/00 A61B90/00 A61B18/14		
CPC分类号	A61B17/29 A61B18/1445 A61B18/1482 A61B2017/0046 A61B2017/00473 A61B2017/2931 A61B2017/2948 A61B2018/0097 A61B2018/146 A61B2018/1495 A61B2090/0813 A61B1/00066 A61B1/00137 A61B1/3132 A61B17/00234		
优先权	15/226183 2016-08-02 US		
其他公开文献	EP3278747B1		
外部链接	Espacenet		

摘要(译)

用于与仪器尖端连接的手机。手持件包括管端，该管端在其最远端具有界面并且构造成连接到器械尖端，管端具有围绕管端外部的保持密封通道，固定地定位在保持密封通道中的保持密封，保持密封件具有围绕保持密封件外部的密封环通道，可弹性变形的密封环压配合到密封环通道中，使得密封环在管的纵向方向上不可移动，并且外护套定位关于管端部，使得外护套和管端部将密封环和至少一部分保持密封件夹在中间。

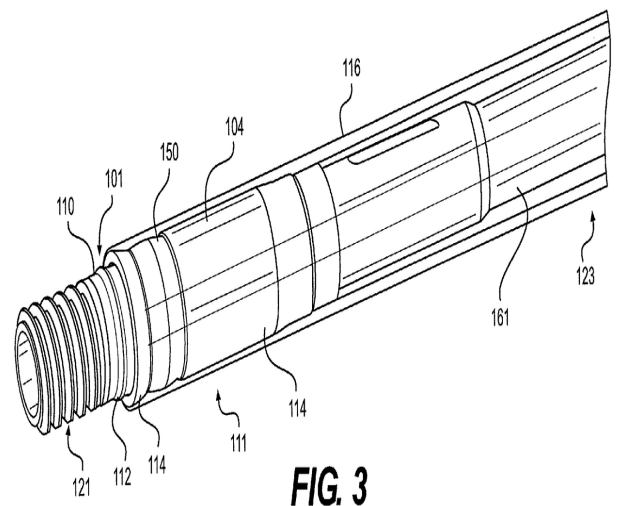


FIG. 3