

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)


PCT

(10) International Publication Number
WO 2005/102185 A1

- (51) International Patent Classification⁷: **A61B 17/34**, 19/00, 17/02
- (21) International Application Number:
PCT/EP2005/004502
- (22) International Filing Date: 25 April 2005 (25.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
S2004/0291 26 April 2004 (26.04.2004) IE
- (71) Applicant and
(72) Inventor: **LEAHY, Patrick** [IE/IE]; 14 Hume Street,
Dublin 2 (IE).
- (74) Agents: **O'NEILL, Brian** et al.; F.R. Kelly & Co., 27
Clyde Road, Ballsbridge, Dublin 4 (IE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A SURGICAL DEVICE

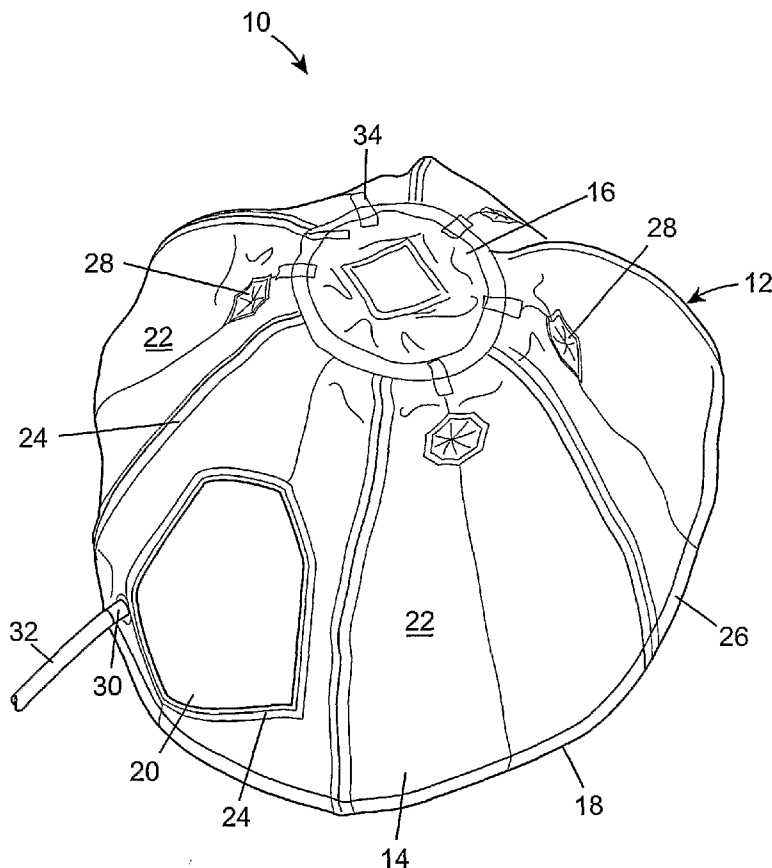

(57) Abstract: The present invention provides a device and method for use in laparoscopic surgery, in particular hand assisted laparoscopic surgery, the device comprising a flexible body having a sidewall of double wall construction which defines an inflatable cavity enabling the body to be inflated from a collapsed state into an expanded state, in order to distend a surgical cavity to provide an enclosure within which a surgical procedure may be performed, the body having an open end to allow communication between the enclosure defined by the body when in the expanded state and tissue/organs surrounding the body, in particular directly adjacent, in use, the open end of the body.

WO 2005/102185 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

“A Surgical Device”

The present invention relates to a surgical device, and in particular a surgical device which may be employed during laparoscopic or hand assisted laparoscopic surgery in order to simplify same.

Although open surgery is still the most commonly performed type of surgery, it is gradually being replaced, where possible, by laparoscopic or hand assisted laparoscopic surgery, otherwise known as “keyhole” surgery. Laparoscopic, or “keyhole” surgery, involves the creation of a relatively small incision, for example in the abdomen or the like, through which incision a surgeons hand and/or surgical instruments or fibre optic cameras may be inserted, in order to operate within the body. This type of surgery is far less traumatic than open surgery, usually requires less recovery time, and also leaves significantly less scarring. Open surgery requires the creation of a large incision or a plurality of incisions to gain access to surgical cavities such as the abdominal or thoracic cavities, the skin and tissue surrounding the incisions then being drawn back to expose the tissues/organs beneath. This type of open surgery therefore enables the surgeon to gain access, using both hands, to the site to be operated on, thereby facilitating a relatively straightforward surgical procedure.

However, the benefits of open surgery are somewhat negated by the drawbacks associated with same. Primarily, the very nature of open surgery, requiring enlarged incisions and the displacement of significant amounts of tissue/organs in order to access the site in question, and perform the necessary surgery, results in significant post-operative trauma for the patient, and will also require an extended time for the incision(s) to heal. In addition, open surgery will also generally leave significant scarring, as a result of the enlarged incisions necessary.

As a result, laparoscopic surgery is greatly preferred, but is not without its own complications. For example, laparoscopic surgery employs very different techniques to conventional surgery, and is generally considered to be more awkward than conventional open surgery, due to a lack of direct “hands on”
5 contact by the surgeon. For this reason alone, many surgeons are unwilling or unable to perform this type of surgery, despite the benefits which may be achieved

The most fundamental problem with laparoscopic surgery is the restrictive space within which to operate, as the site to be operated on is not exposed or openly
10 accessible. Several solutions to this problem are currently employed, the most common solution being the use of an insufflation gas, such as carbon dioxide, which is constantly pumped into the cavity within which surgery is being performed. However this procedure adds to both the cost and complexity of the operation, and adverse reactions to the gas being used have been know to occur.

15 Another solution employed is the use of an inflatable bladder or balloon which, while deflated, is passed through the incision into the surgical cavity, and is then inflated in order to enlarge the cavity. However, these balloons often serve as an impediment or obstacle during surgery, and may need to be continually
20 repositioned in order to allow suitable access to the site being operated on.

As mentioned above, the main problem associated with laparoscopic surgery is the lack of hands on contact by the surgeon, all of the surgical techniques, such as
25 cutting, suturing, etc. being carried out remotely by means of laparoscopic surgical instruments and with the aid of fibre optic imaging systems. This problem can be significantly reduced by the use of hand assisted laparoscopic surgery, in which an incision is made, for example in the abdomen, which incision is dimensioned to permit a surgeon’s hand access through the incision to the site on which surgery is
30 to be performed, thereby allowing palpation and bio-physical feedback, thus greatly simplifying the laparoscopic surgical procedure.

However, this type of hand assisted laparoscopic surgery is not without its complications. As set out above, during conventional laparoscopic surgery, the surgical cavity is distended by means of an insufflation gas, for example carbon dioxide, generally by means of a trocar and cannula arrangement. However, with
5 hand assisted laparoscopic surgery, the access incision for the surgeon's hand provides a ready outlet for the insufflation gases, thereby preventing the necessary build-up of pressure within the gas in order to distend the surgical cavity.

10 One solution to this problem is set out in US Patent US 5,640,977. This Patent sets out a method and apparatus for hand assisted laparoscopic surgery, using a sleeve which must be sealed within the access wound, and which sleeve is provided with an inflatable cuff at the end of the sleeve distal the access wound, which cuff may be inflated such as to create a seal around the surgeon's forearm
15 when located within the sleeve. In this way, the surgical cavity can be inflated, and although gas will initially leak through the access wound into the sleeve, the sleeve, being sealed against the surgeon's arm, will soon pressurise, thereby allowing the surgical cavity to be pressurised and therefore become distended.

20 However, the apparatus employed is complex and time consuming to use, and still requires the pumping of an insufflation gas such as carbon dioxide directly into the surgical cavity, which has been known to have adverse effects on the patient.

The present invention therefore seeks to overcome the problems associated with
25 the above-mentioned known solutions.

The present invention therefore provides, according to a first aspect, a laparoscopic surgical device comprising a flexible body movable between a collapsed state and an expanded state, in which expanded state the body defines an enclosure having at least one opening; and an aperture in a sidewall of the body,
30

the aperture being shaped and dimensioned to enable the passage of a hand through the aperture.

Preferably, the body is distensible into the expanded state.

5

Preferably, the body is inflatable into the expanded state.

Preferably, the body is substantially transparent.

10 Preferably, the body is formed from a flexible polymer.

Preferably, the body comprises a reinforcing member about the at least one opening.

15 Preferably, the reinforcing member is flexible.

Preferably, the at least one opening is defined by an open end of the body.

20 Preferably, the body, when in the expanded state, is substantially hemispherical in shape.

Preferably, the body comprises at least one port which is shaped and dimensioned to allow the passage of a medical instruments therethrough.

25 Preferably, the body is segmented into a plurality of panels.

Preferably, the plurality of panels are individually, sequentially or simultaneously movable between a collapsed state and an expanded state.

30 Preferably, adjacent panels are separated by a reinforcing seam.

Preferably, the sidewall is of double wall construction defining an inflatable cavity.

5 Preferably, the device is adapted to receive and retain at least one biosign sensor.

Preferably, the device is adapted to receive and retain at least one light source in a position such that, when the body is in the expanded state, the light source will direct light towards the at least one opening.

10

Preferably, the device comprises an elongate tube extending from the body and connectable to a remote supply of a fluid, in order to effect inflation of the body.

According to a second aspect of the present invention there is provided a method
15 of performing hand assisted laparoscopic surgery within a surgical cavity, the method comprising the steps of;

providing a surgical device according to the first aspect of the invention;
passing the device, in a collapsed state, into the surgical cavity;
moving the body into an expanded state; and

20 passing a hand through the aperture in the sidewall of the body to gain access to the surgical cavity.

Preferably, the method comprises, in the step of moving the body into the expanded state, inflating the body to effect the expansion.

25

Preferably, the method comprises the further step of passing a medical instrument at least partially through the port in the sidewall into the surgical cavity.

Preferably, the method comprises the further step of illuminating the surgical
30 cavity.

As used herein, the term “enclosure” is intended to mean an area bounded by a sidewall or the like, which enclosure has however at least one open end or side which allows communication between the interior of the enclosure and the
5 surrounding area, in particular the area directly adjacent the open end or side. Such an enclosure could take the form of an open ended dome, an open ended box or cylinder, or any other three dimensional space.

As used herein, the term “hand” is intended to mean a human hand, as well as, a
10 robotic or mechanical hand.

As used herein, the term “distensible” is intended to mean the ability to distend or expand/deform/displace outwardly in order to be capable of enlarging a visceral space within a surgical cavity, in particular for the purposes of aiding laparoscopic
15 surgical procedures, and may be achieved by inflation, mechanical displacement, or by any other suitable means.

As used herein, the term “inflation” is intended to mean the act of inflating an object with a fluid, whether with a gas or a liquid.
20

As used herein, the term “port” is intended to mean an aperture or opening through which a medical instrument may pass, in particular a medical instrument such as laparoscopic medical instrument, a fibre optic camera, etc.

25 As used herein, the term “biosign” is intended to mean any signal relating to or resulting from a biological or physiological process, such as blood pressure, heart rate, electrical activity, a bioacoustic signal, or the like.

The present invention will now be described with reference to the accompanying
30 drawings, in which;

Figure 1 illustrates a perspective view of the surgical device of the present invention, in a collapsed state; and

- 5 Figure 2 illustrates a perspective view of the surgical device of figure 1, in an expanded or inflated state.

Referring now to the accompanying drawings, there is illustrated a surgical device, generally indicated as 10, for use as a surgical aid when performing minimally
10 invasive surgery such as hand assisted laparoscopic surgery, or any other form of surgery which involves the location of a surgical instrument or a surgeon's hand (not shown) within a restricted surgical cavity in order to perform a surgical procedure, in particular hand assisted laparoscopic surgery within the abdominal cavity. The device 10 comprises a flexible body 12 which may be displaced, in
15 particular inflated, from a collapsed state as shown in figure 1, to an expanded state as shown in figure 2, in order to create or define an enclosure bounded by the body 12. Thus the device 10 may be used to effect distension of the abdominal cavity, or any other surgical cavity, from the interior thereof, in order to create a space or enclosure within which a surgeon can perform the necessary surgical
20 procedure(s). The device 10 therefore facilitates the distension of a surgical cavity, for example the abdominal cavity, while avoiding the need to introduce an insufflation gas directly and continually into such a cavity, thereby greatly simplifying, and reducing the cost of, any operation previously requiring such direct insufflation.

25

The device 10 is preferably inserted through a conventional keyhole incision (not shown), for example in the abdomen, in the collapsed state, and once in the correct position, may be inflated in order to distend the abdomen. In this regard, it should be noted that, for the purposes of clarity, the device 10 as illustrated in Figure 1 is
30 shown deflated, but not fully collapsed or compressed, as would be the case

immediately prior to insertion into the abdominal cavity or the like. The flexible nature of the body 12 allows same to be rolled or folded up into a very small volume, in order to facilitate the insertion of the device 10 through the small “keyhole” incisions employed in laparoscopic surgery, or indeed by any other
5 suitable access opening (not shown). To this end it may be preferably to actively evacuate the body 12, for example using a vacuum pump (not shown) or the like, in order to allow the device 10 to be collapsed or compressed into the smallest possible volume. It may also be desirable to then provide a retaining sleeve or sheath (not shown) or the like around the collapsed device 10, in order to maintain
10 the device 10 in the fully collapsed state. Such a retaining sleeve could then be removed once the device 10 is correctly positioned within the surgical cavity. Alternatively, the retaining sleeve (not shown) could be formed from a cellulose material or the like, which simply splits or ruptures on inflation of the body 12, for example as manufactured by Inamed Corporation, Santa Barbara, California, the
15 United States.

The body 12 comprises a sidewall 14 joined to a top 16, each being of double wall configuration, defining a fluid tight cavity therebetween, similar to a double glazing window panel, which cavity may be filled with a pressurised fluid, in
20 particular a gas such as air, in order to inflate the device 10. The body 12, in the preferred embodiment illustrated, is essentially hemispherical or domed shaped, thus defining an opening in the form of an open end 18 which, when the device 10 is inflated, allows the internal organs to be contacted from within the enclosure defined by the device 10. It will of course be understood that the body 12 could be
25 of any other suitable shape which retains the functionality thereof, namely defining an enclosure from which access may be gained to the internal organs and/or tissue to be operated on.

The sidewall 14 is therefore provided with at least one aperture 20 therein, which
30 is shaped and dimensioned to permit the passage of a hand therethrough,

preferably a human hand. Thus when the device 10 is in place within the abdominal cavity, and inflated, the device 10 is preferably positioned such that the aperture 20 is adjacent the surgical incision in the abdomen through which the device 10 was inserted. A surgeon may therefore pass his hand through the surgical incision, and into the interior of the body 12 via the aperture 20. The device 10 will therefore act as a shield or support, retaining the surrounding tissue/organs out of contact with the area to be operated on, namely the area in communication with the open end 18 of the body 12.

It is possible to vary the degree of inflation of the body 12, thereby varying the volume of the cavity created therein. Therefore, should a surgeon be of the opinion that fully inflating the body 12, and therefore substantially distending the abdominal cavity, may result in damage to the surrounding tissue for one reason or another, the surgeon can elect to only partially inflate the body 12. Conversely, if the surrounding tissue/organs in contact with the sidewall 14 and top 16 are exerting significant pressure thereon, the body 12 can be fully inflated, and the pressure within same increased in order to maintain the structural rigidity of the body 12 in the inflated state.

To further increase the structural rigidity of the body 12, the sidewall 14 is preferably formed from a number of panels 22, adjacent panels 22 being separated by a respective seam 24. The seams 24 may be formed by radio frequency welding, or by any other suitable means, for example by the use of an adhesive or the like. This segmented construction, along with the seams 24, adds significant strength and rigidity to the body 12, helping the body 12 to maintain its intended shape during use. In this regard, it will be appreciated that the body 12 could be of any suitable shape, other than the preferred hemispherical shape shown. However, the hemispherical shape provides no sharp corners or edges, and thus facilitates a gradual stretching of the abdominal cavity, with no corners or edges protruding into the surrounding delicate tissue.

To further increase the strength and rigidity of the body 12 when inflated, the open end 18 is preferably provided with a reinforcing member in the form of a flexible ring 26 secured thereto. The ring 26 helps to maintain the circular footprint of the device 10 when inflated, but the flexibility of the ring 26 enables the device 10 to be folded up when in the collapsed or uninflated state.

The body 12 is also preferably provided with at least one, and preferably a plurality of ports 28, which in the embodiment illustrated are located at an upper portion of each panel 22, adjacent the top 16. The outer edge of each of the ports 28 is sealed in order to prevent gas from leaking from the body 12, again preferably using radio frequency welding. The ports 28 are designed to enable surgical instruments (not shown), or a fibre optic camera (not shown) or the like, to be passed through the body 12 into the interior thereof, in order to assist in the surgical procedure(s) being performed. The ports 28 can be shaped, dimensioned, and positioned as required, in order to suit the intended function of same. In use, in addition to the incision made to allow the insertion of the device 10, and the subsequent insertion of a surgeon's hand, one or more additional incisions (not shown) may be required in the patient's abdomen in order to facilitate the insertion of the above mentioned medical instruments (not shown) through one or more of the ports 28. However, as these incisions need only be dimensioned to allow the passage of relatively small surgical instruments (not shown), as opposed to a surgeon's hand, said incisions will quickly heal following completion of the surgical procedure, and will generate little if any trauma at the surgical site, and will should not therefore retard the patients recovery.

In order to effect inflation of the body 12, a nozzle 30 projects from the sidewall 14, to which nozzle 30 is connected a tube 32, which in use passes back through the surgical incision in the abdomen, and is connected to a remote gas supply, such as a simple pump. A one way valve (not shown) is preferably provided, either in

the nozzle 30 or in the tube 32, in order to prevent the body 12 from deflating during use. Alternatively, the fluid supply to the body 12 could be maintained at pressure during use of the device 10, in order to prevent deflation of the body 12. If a one way valve is provided, means must be provided to enable deflation of the
5 body 12 subsequent to use of the device 10. It will also be apparent that some form of pump (not shown), such as a hand operated bladder or the like, could be provided on the device 10, in fluid communication with the body 12, in order to render the device 10 independent of external pumps or gas supplies. Alternatively, it would be possible to provide a small reservoir or canister (not shown) of
10 pressurised air or the like on the device 10 and in fluid communication with the body 12, which could be remotely actuated in order to inflate the body 12.

In the embodiment illustrated, the seams 24 seal adjacent panels 22 from one another, and thus during inflation of the body 12, the gas pumped through the tube
15 32 will first enter the panel 22 containing the aperture 20. The gas will then flow into the top 16, from which extends a channel 34 into each panel 22. Thus the gas can pass from the top 16 through the respective channel 34, into each panel 22, thereby inflating the entire body 12. It will of course be appreciated that the seams 24 could be omitted, or be intermittent in form, in order to allow the panels 22 to
20 be in fluid communication with one another. It will also be appreciated that the top 16 could be omitted, and the entire body 12 formed as a single surface or panel. In addition, it is envisaged that the plurality of panels 22 could be individually, sequentially or simultaneously inflated by suitable means, for example by provided a plurality of inflating tubes (not shown), one for each panel
25 22. In this way the expanded or inflated shape of the body 12 could be slightly altered by deflating or partially deflating one or more of the panels 22, in order to give a desired shaped, or to lessen the pressure exerted by one or more of the panels 22 on a sensitive area of tissue/organ or the like.

The device 10 is also preferably provided with at least one pocket 36, which although located in the top 16 in the preferred embodiment illustrated, may be located at any suitable position on the body 12. The pocket 36 is designed to receive and retain a biosign sensor (not shown) adapted to read various biosigns of the patient, for example from the peritoneal fluid and the cellular elements within the abdomen.

The body 12 is preferably manufactured from a flexible, transparent polymer such as medical grade urethane. The use of a flexible material for the body 12 will prevent or at least minimise the possibility of damage/injury to a patient (not shown) while the device 10 is initially being inserted into a surgical cavity, and again when being withdrawn therefrom. It will be appreciated that there are a large number of materials or combinations thereof, which would be suitable for use in manufacturing the body 12. For example, the body 12 could conceivably be formed from a fabric, but is preferably formed from a polymer, for example a medical grade polyurethane, as manufactured by Dow Corning, of Michigan, the United States, such polyurethane preferably being of a thickness of between 50µm and 150µm.

As fibre optic cameras are typically employed during laparoscopic surgical procedures, and as mentioned above, the body 12 is preferably transparent, in order to allow the full illumination of a surgical cavity created by distension of the body 12, in addition to permitting the visualisation of tissue/organs through the sidewall 14. In addition, the sidewall 14 is preferably formed from a non-absorbent or a liquid impermeable material, as otherwise the device 10 would be significantly more difficult to clean/sterilise following each operation. However, the device 10 could be manufactured as a disposable item, to be discarded after a single use.

It will be appreciated that the use of a transparent material for the body 12, allowing the visualisation of surrounding tissue/organs, would allow the device 10 to be used solely for diagnostic purposes. When used in this capacity, it would be possible to use a smaller “keyhole” incision than would be required when access
5 for a surgeon’s hand is necessary, as the incision need only be sized to allow the passage of the device 10 therethrough, when in the fully collapsed state. Once the device 10 is positioned and inflated in the desired location, a fibre optic camera (not shown) may then be used to scan the surrounding tissue/organs for signs of damage/disease or the like. As the device 10 need only accommodate a fibre optic
10 camera when used for diagnostic purposes, the device 10 may be downsized and thus dimensioned to be accommodated in otherwise inaccessible areas of the body. Due to the smaller incision required for this diagnostic application, and the lack of any surgery actually being performed, such a diagnostic procedure would be relatively minor and would require little if any recovery time, and would leave
15 essentially no scarring.

As mentioned above, it is conventional practice, and typically essential, to use a fibre optic camera (not shown) or the like, during laparoscopic surgical procedures. The device 10 is therefore preferably provided with means (not
20 shown) for guiding a fibre optic camera and/or a light source (not shown), preferably a fibre optic based light source, into a position on the body 12 which will enable the illumination and visualisation, in use, of the tissue/organs located adjacent the open end 18, thereby allowing the clear visualisation of said tissue/organs and the surgeon’s hand and/or medical instrument(s) during any
25 surgical procedure. The guiding means (not shown) could for example take the form of a simple tube (not shown) running along the inwardly facing surface of the sidewall 14, the tube (not shown) being dimensioned to receive a fibre optic camera or the like. It is also envisaged that the device 10 could be provided with a stand alone light source and/or camera (not shown) which may be remotely
30 operated, although such components would require a dedicated power source such

as a battery or the like to be provided on the device 10, which would add to the complexity and cost of the device 10.

The surgical device 10 of the present invention thus provides a means by which
5 insufflation gases are contained within a reservoir, in particular the body 12 of the
device 10. Thus the cost and complexity associated with a continual leakage of
gas from a surgical cavity are avoided. Furthermore, adverse reactions and
complications associated with introducing CO₂ or the like directly into the
abdominal cavity or other surgical cavity can be avoided. The device 10 may also
10 be used for diagnostic purposes, allowing the visualisation of tissue/organs with a
view to determining the condition thereof.

Claims

1. A laparoscopic surgical device comprising a flexible body movable between a collapsed state and an expanded state, in which expanded state the body defines an enclosure having at least one opening; and an aperture in a sidewall of the body, the aperture being shaped and dimensioned to enable the passage of a hand through the aperture.
5
2. A device according to claim 1 in which the body is distensible into the expanded state.
10
3. A device according to any preceding claim in which the body is inflatable into the expanded state.
4. A device according to any preceding claim in which the body is substantially transparent.
15
5. A device according to any preceding claim in which the body is formed from a flexible polymer.
20
6. A device according to any preceding claim in which the body comprises a reinforcing member about the at least one opening.
7. A device according to claim 6 in which the reinforcing member is flexible.
25
8. A device according to any preceding claim in which the at least one opening is defined by an open end of the body.

9. A device according to any preceding claim in which the body, when in the expanded state, is substantially hemispherical in shape.
10. A device according to any preceding claim in which the body
5 comprises at least one port which is shaped and dimensioned to allow the passage of a medical instrument therethrough.
11. A device according to any preceding claim in which the body is segmented into a plurality of panels.
10
12. A device according to claim 11 in which the plurality of panels are individually, sequentially or simultaneously movable between a collapsed state and an expanded state.
13. A device according to claim 11 or 12 in which adjacent panels are separated by a reinforcing seam.
15
14. A device according to any preceding claim in which the sidewall is of double wall construction defining an inflatable cavity.
20
15. A device according to any preceding claim adapted to receive and retain at least one biosign sensor.
16. A device according to any preceding claim adapted to receive and retain at least one light source in a position such that, when the body is in the expanded state, the light source will direct light towards the at least one opening.
25
17. A device according to any preceding claim comprising an elongate tube extending from the body and connectable to a remote supply of a fluid, in order to effect inflation of the body.
30

18. A method of performing hand assisted laparoscopic surgery within a surgical cavity, the method comprising the steps of;
providing a surgical device according to any of claims 1 to 16;
5 passing the device, in a collapsed state, into the surgical cavity;
moving the body into an expanded state; and
passing a hand through the aperture in the sidewall of the body to gain access to the surgical cavity.
- 10 19. A method according to claim 18 comprising, in the step of moving the body into the expanded state, inflating the body to effect the expansion.
20. A method according to claim 18 or 19 comprising the further step of passing a medical instrument at least partially through the port in the sidewall into
15 the surgical cavity.
21. A method according to any of claims 18 to 20 comprising the further step of illuminating the surgical cavity.

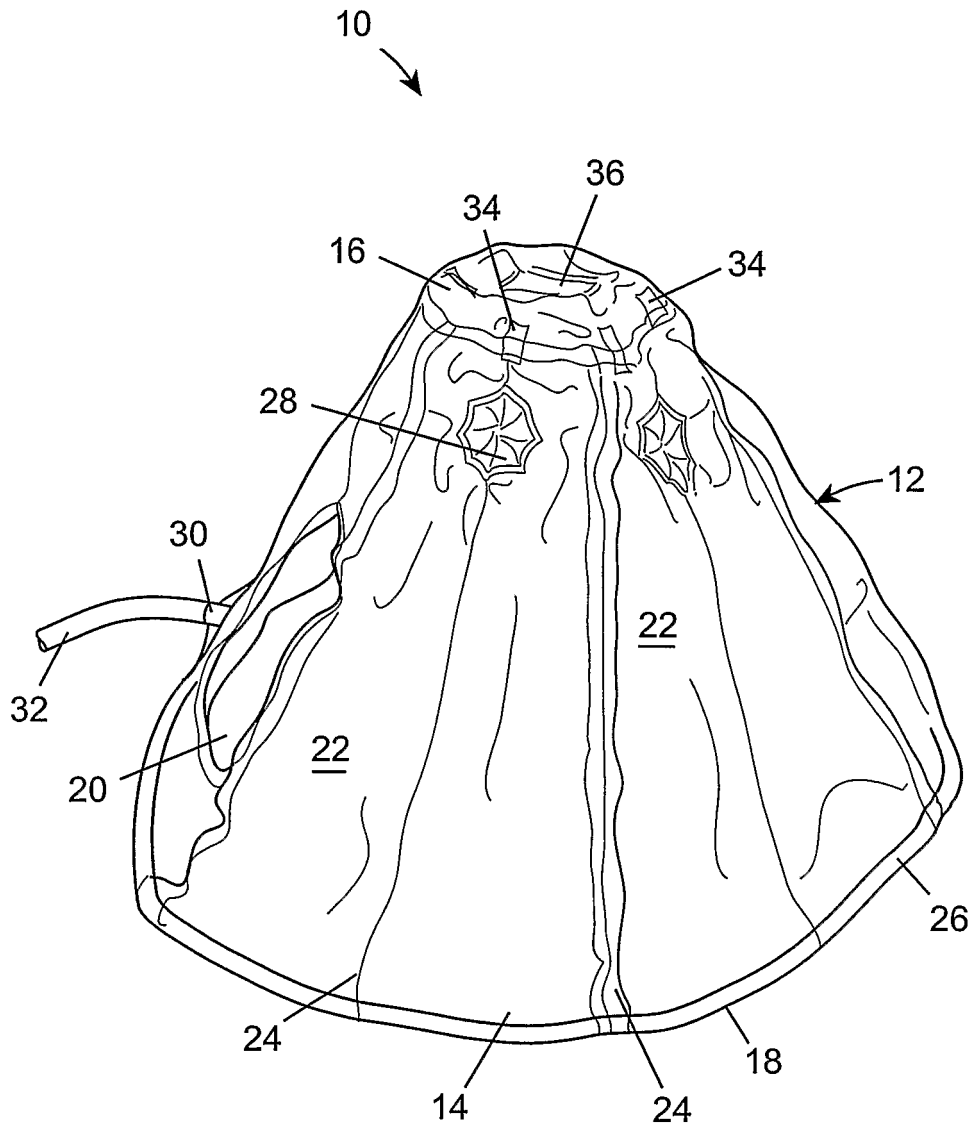


Fig. 1

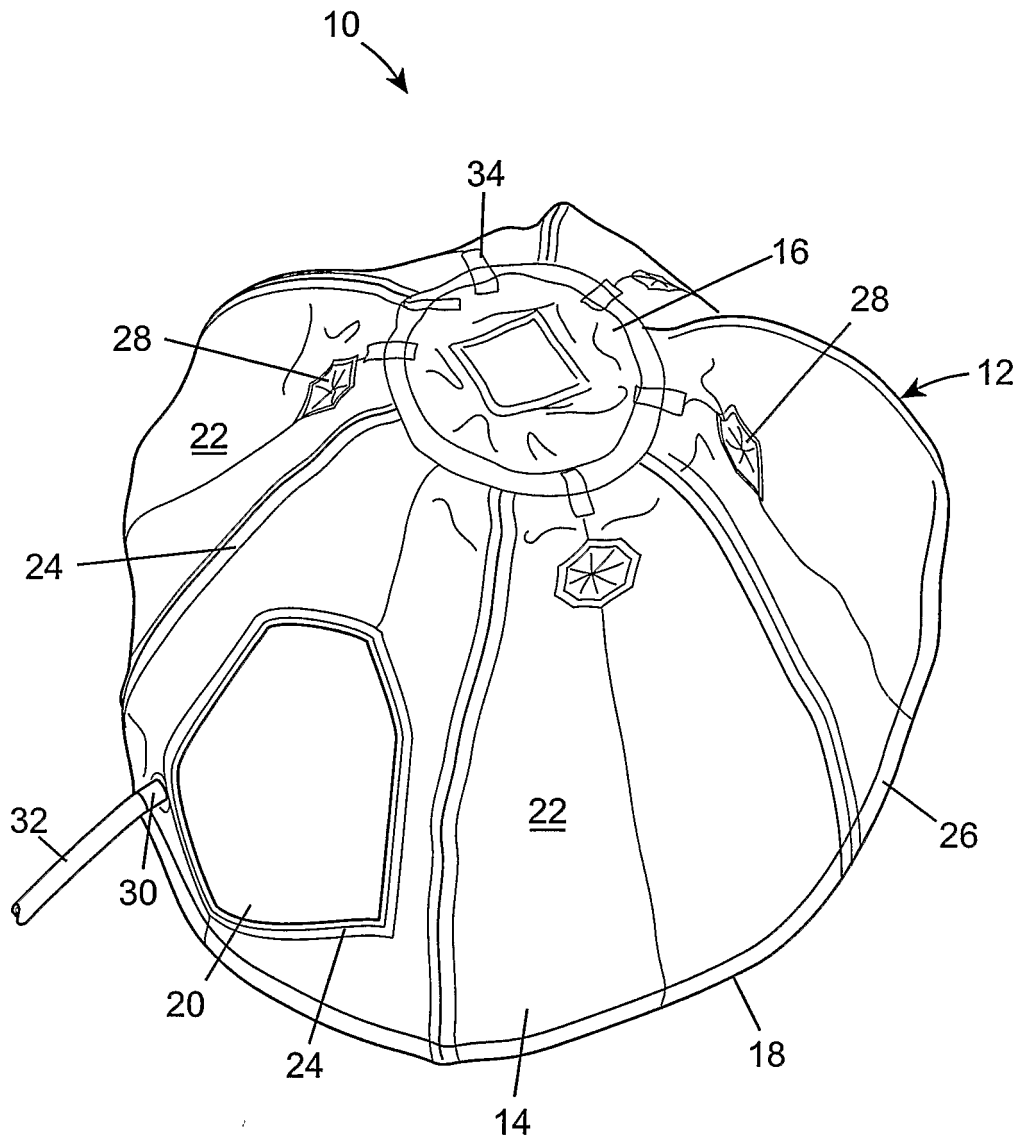


Fig. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/004502

<p>A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61B17/34 A61B19/00 A61B17/02</p>		
<p>According to International Patent Classification (IPC) or to both national classification and IPC</p>		
<p>B. FIELDS SEARCHED</p>		
<p>Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61B</p>		
<p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p>		
<p>Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal</p>		
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p>		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 823 945 A (MOLL ET AL) 20 October 1998 (1998-10-20) abstract; figures 1-28	1-17
A	US 5 640 977 A (LEAHY ET AL) 24 June 1997 (1997-06-24) cited in the application abstract; figure 17	1
A	US 5 480 410 A (CUSCHIERI ET AL) 2 January 1996 (1996-01-02) abstract; figure 1	1
A	US 2003/181939 A1 (BONUTTI PETER M) 25 September 2003 (2003-09-25) paragraph '0141! paragraph '0153!; figure 22	15
<p><input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.</p>		
<p>° Special categories of cited documents :</p> <p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p> <p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>* & * document member of the same patent family</p>		
<p>Date of the actual completion of the international search 20 July 2005</p>		<p>Date of mailing of the international search report 02/08/2005</p>
<p>Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016</p>		<p>Authorized officer Moers, R</p>

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2005/004502

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: 18-21
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/004502

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5823945	A	20-10-1998	US 5743850 A	28-04-1998
			US 5309896 A	10-05-1994
			AT 164745 T	15-04-1998
			AT 142095 T	15-09-1996
			AT 168545 T	15-08-1998
			AT 149312 T	15-03-1997
			AU 656008 B2	19-01-1995
			AU 2145692 A	08-01-1993
			AU 2176892 A	08-01-1993
			AU 2185192 A	08-01-1993
			AU 3136993 A	15-06-1993
			AU 695823 B2	20-08-1998
			AU 6198596 A	24-10-1996
			CA 2109714 A1	10-12-1992
			CA 2109803 A1	10-12-1992
			CA 2110153 A1	10-12-1992
			CA 2123317 A1	27-05-1993
			DE 69213449 D1	10-10-1996
			DE 69217984 D1	10-04-1997
			DE 69217984 T2	12-06-1997
			DE 69225067 D1	14-05-1998
			DE 69225067 T2	13-08-1998
			DE 69226375 D1	27-08-1998
			DE 69226375 T2	03-12-1998
			DK 586555 T3	01-02-1999
			DK 586561 T3	07-10-1996
			DK 637223 T3	26-04-1999
			DK 613351 T3	25-08-1997
			EP 0586555 A1	16-03-1994
			EP 0586561 A1	16-03-1994
			EP 0637223 A1	08-02-1995
			EP 0613351 A1	07-09-1994
			EP 0804902 A2	05-11-1997
			EP 0804903 A2	05-11-1997
			EP 0835639 A2	15-04-1998
			ES 2115672 T3	01-07-1998
			ES 2091476 T3	01-11-1996
			ES 2120449 T3	01-11-1998
			ES 2098563 T3	01-05-1997
			GR 3021838 T3	28-02-1997
			JP 6507809 T	08-09-1994
			JP 3307392 B2	24-07-2002
			JP 6507810 T	08-09-1994
			JP 3307393 B2	24-07-2002
			JP 7501959 T	02-03-1995
			MX 9202601 A1	31-05-1994
			MX 9202602 A1	31-05-1994
			MX 9202603 A1	31-05-1994
			WO 9221292 A2	10-12-1992
			WO 9221293 A1	10-12-1992
US 5640977	A	24-06-1997	AU 2223195 A	30-10-1995
			AU 2240395 A	30-10-1995
			IE 71634 B2	26-02-1997
			WO 9527445 A1	19-10-1995
			WO 9527468 A1	19-10-1995
US 5480410	A	02-01-1996	AU 1997295 A	03-10-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP2005/004502

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5480410	A	EP 0750472 A1	02-01-1997
		WO 9524864 A1	21-09-1995
US 2003181939	A1	25-09-2003	US 2002095160 A1
			US 6358266 B1
			US 6171299 B1
			US 5514153 A
			US 5295994 A
			US 5331975 A
			US 2004193181 A1
			US 6277136 B1
			US 6102928 A
			US 6171236 B1
			US 6187023 B1
			US 5860997 A
			US 6620181 B1
			US 6017305 A
			US 2004098016 A1
			US 2004127930 A1
			US 2004097949 A1
			US 2004097794 A1
			US 2004138689 A1
			US 2004143285 A1
			US 5827318 A
			US 5954739 A
			US 5345927 A
			US 6451042 B1
			US 2003023260 A1
			US 5716325 A
			US 5667520 A
			US 5707390 A
			US 5888196 A
			US 5197971 A
			US 5163949 A
			US 6042596 A
			28-03-2000

专利名称(译)	手术器械		
公开(公告)号	EP1742586A1	公开(公告)日	2007-01-17
申请号	EP2005740508	申请日	2005-04-25
[标]申请(专利权)人(译)	LEAHY PATRICK		
申请(专利权)人(译)	莱希PATRICK		
当前申请(专利权)人(译)	莱希PATRICK		
[标]发明人	LEAHY PATRICK		
发明人	LEAHY, PATRICK		
IPC分类号	A61B17/34 A61B19/00 A61B17/02 A61B17/00		
CPC分类号	A61B17/0218 A61B17/3423 A61B90/40 A61B2017/00265 A61B2017/00283 A61B2017/00557 A61B2090/306		
代理机构(译)	奥尼尔BRIAN		
优先权	S20040291 2004-04-26 IE		
其他公开文献	EP1742586B1		
外部链接	Espacenet		

摘要(译)

本发明提供了一种用于腹腔镜手术，特别是手助腹腔镜手术的装置和方法，该装置包括具有双壁结构侧壁的柔性主体，该侧壁限定了可充气腔，使得身体能够从塌陷状态膨胀到扩张状态，为了扩张外科腔以提供可在其中执行外科手术的外壳，该主体具有开口端以允许在处于扩张状态时由身体限定的外壳与周围的组织/器官之间的连通在使用中，身体，特别是直接相邻的身体的开口端。