



US 20080255519A1

(19) **United States**(12) **Patent Application Publication****Piskun et al.**(10) **Pub. No.: US 2008/0255519 A1**(43) **Pub. Date: Oct. 16, 2008**(54) **LAPAROSCOPIC PORT ASSEMBLY****Related U.S. Application Data**

(75) Inventors: **Gregory Piskun**, Brooklyn, NY (US); **Christopher Battles**, Seymour, CT (US); **Frank Rende**, Westport, CT (US); **Michael Abrams**, New Haven, CT (US); **Oleg Shikhman**, Trumbull, CT (US)

(60) Provisional application No. 60/920,935, filed on Mar. 30, 2007.

Publication Classification

(51) **Int. Cl.**
A61B 17/94 (2006.01)
A61B 17/34 (2006.01)

(52) **U.S. Cl.** 604/174; 600/109; 606/185

Correspondence Address:


COLEMAN SUDOL SAPONE, P.C.**714 COLORADO AVENUE****BRIDGE PORT, CT 06605-1601 (US)**(57) **ABSTRACT**


(73) Assignee: **PNAVEL SYSTEMS, INC.**,
Brooklyn, NY (US)

(21) Appl. No.: **12/079,599**

(22) Filed: **Mar. 27, 2008**

Various embodiments of a laparoscopic trocar assembly are disclosed. The port assemblies include inserted parts that protect the patient's tissues at the point of deployment. The port assemblies include seals for maintaining pneumoperitoneum both when instrument are being used and when instruments are not inserted.

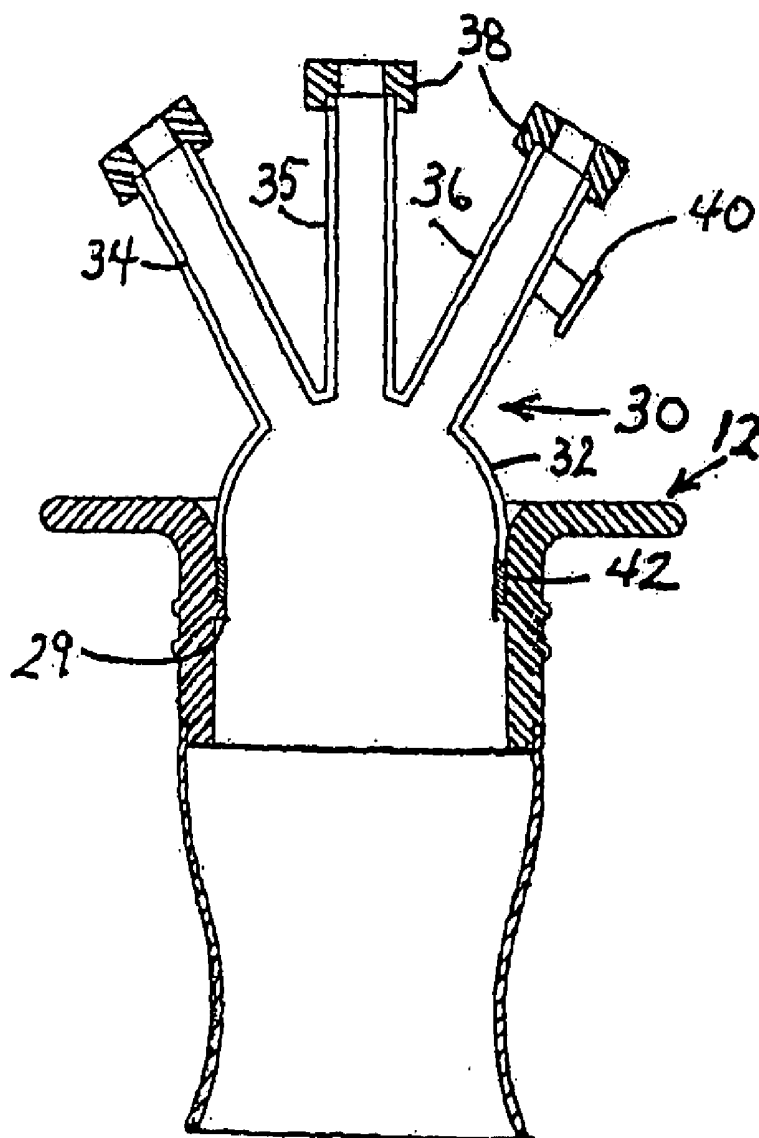

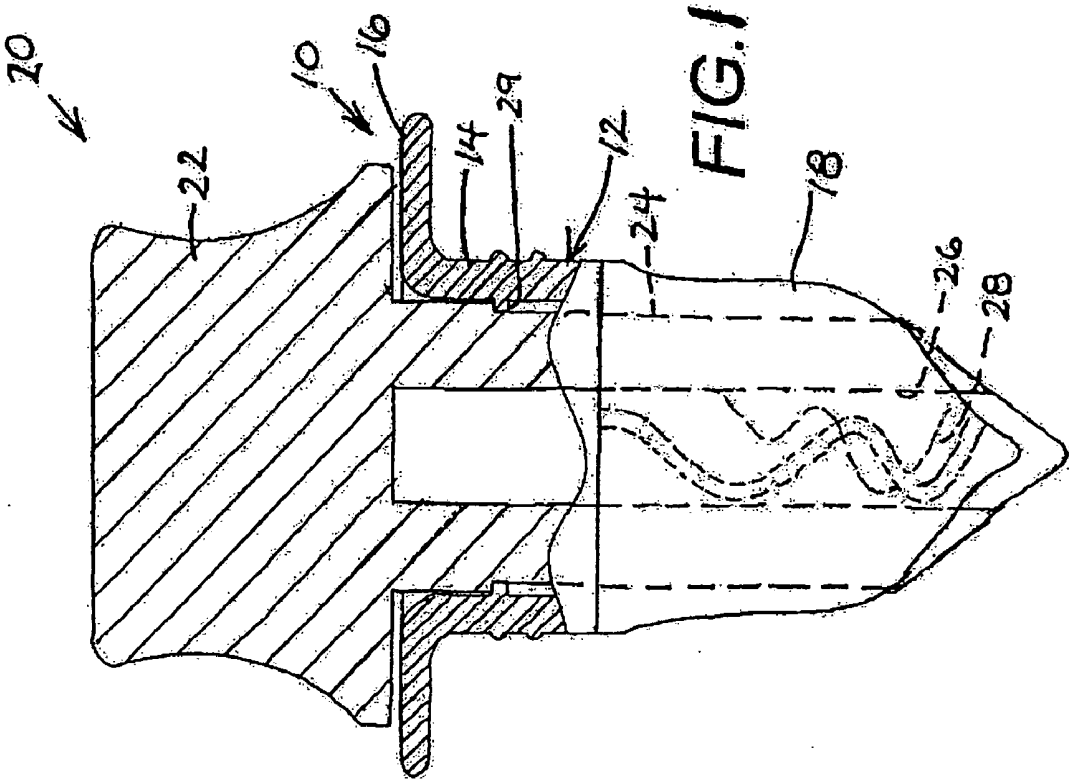

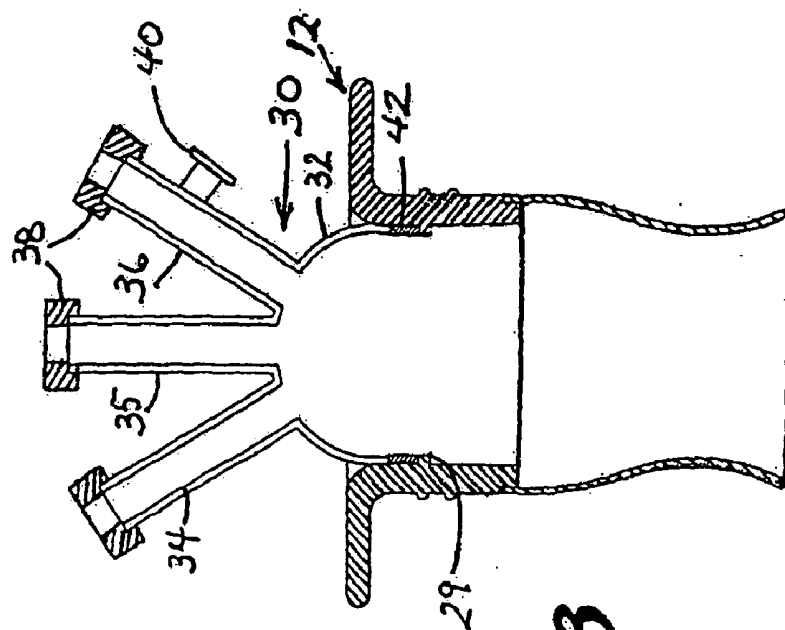


FIG. 3

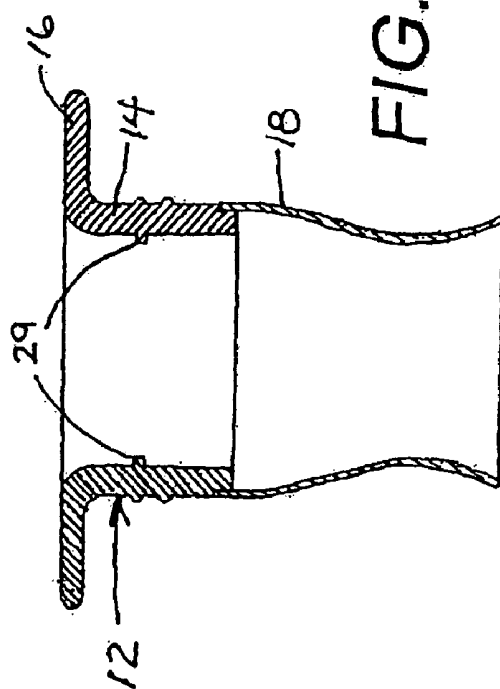


FIG. 2

FIG. 5

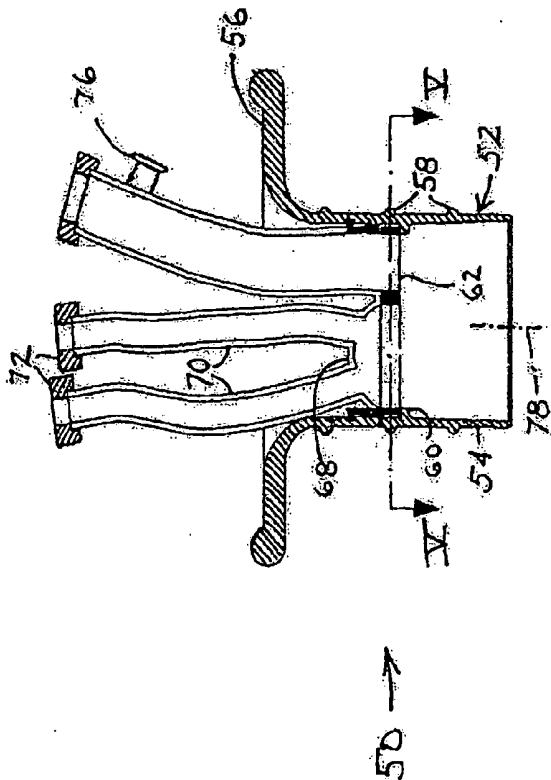
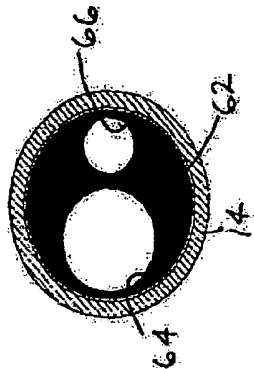


FIG. 4






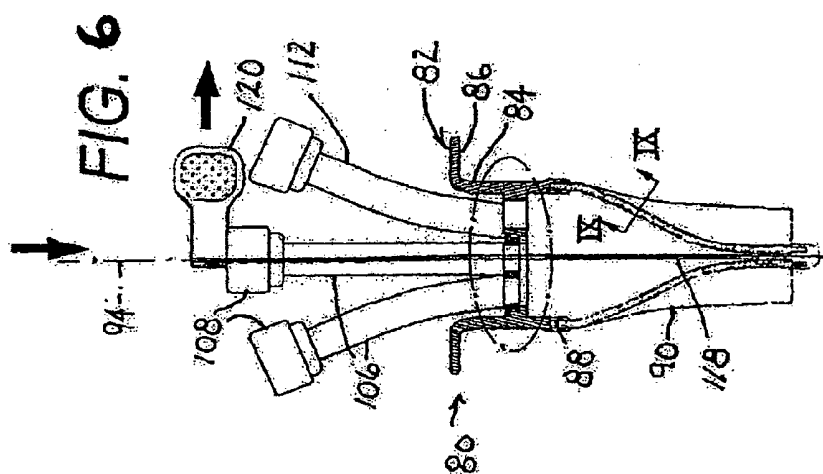


FIG. 7

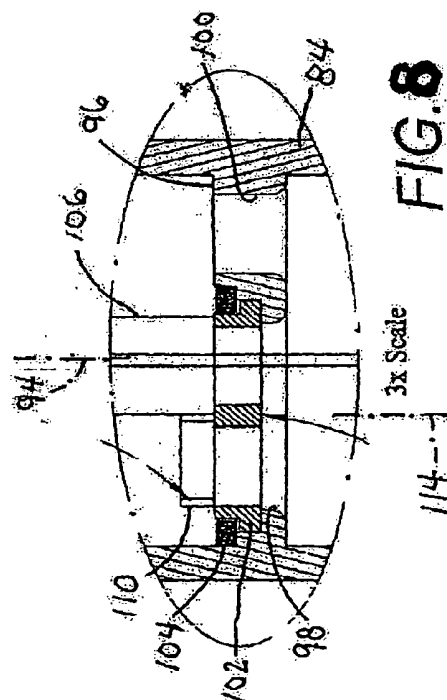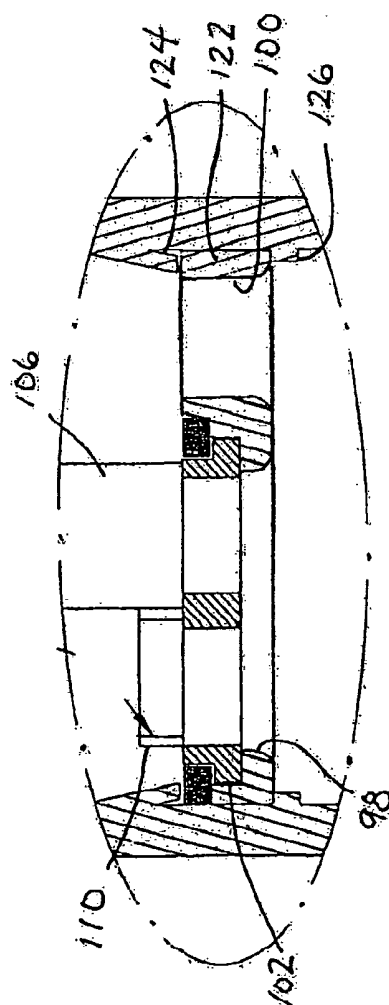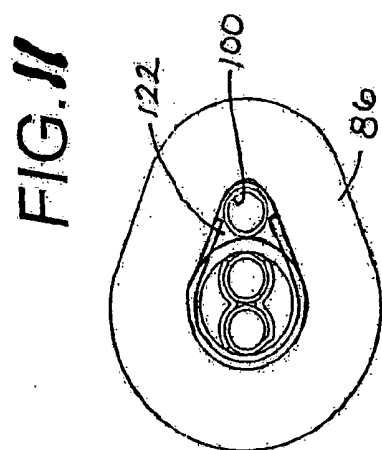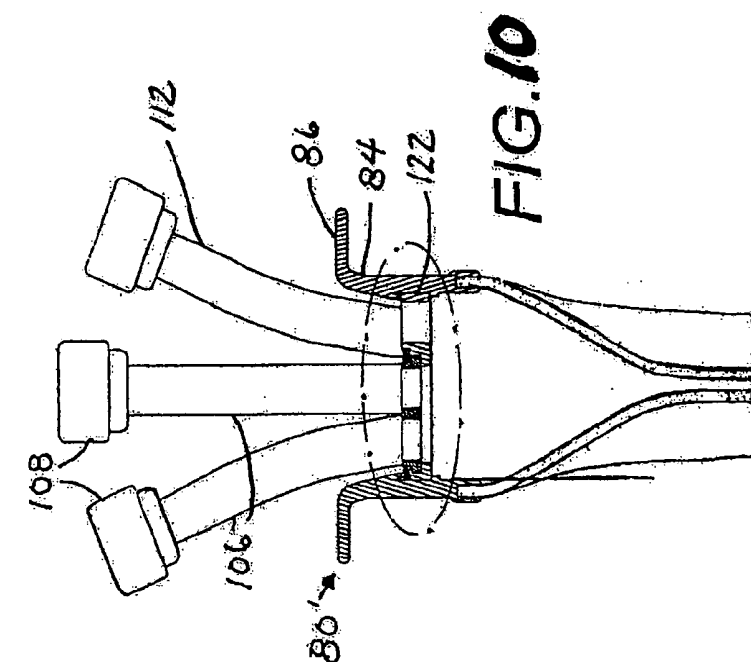

Top View of Trocar





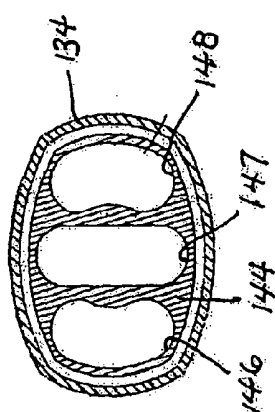


FIG. 14

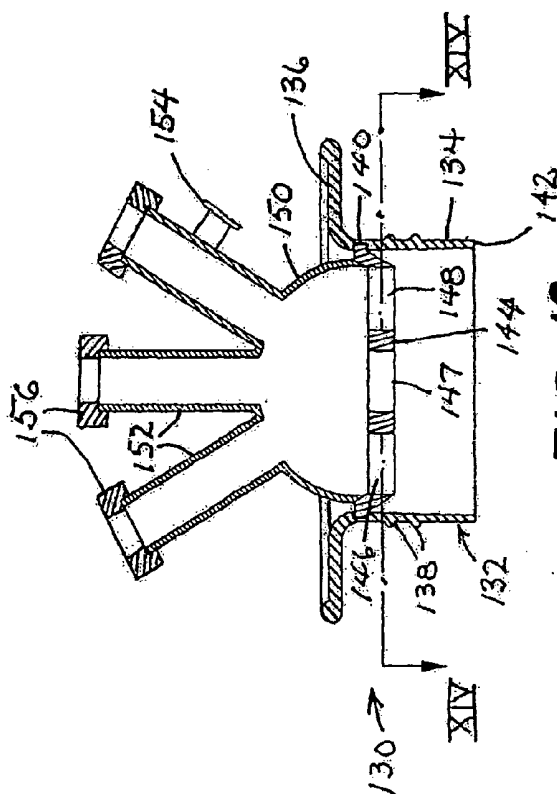


FIG. 13

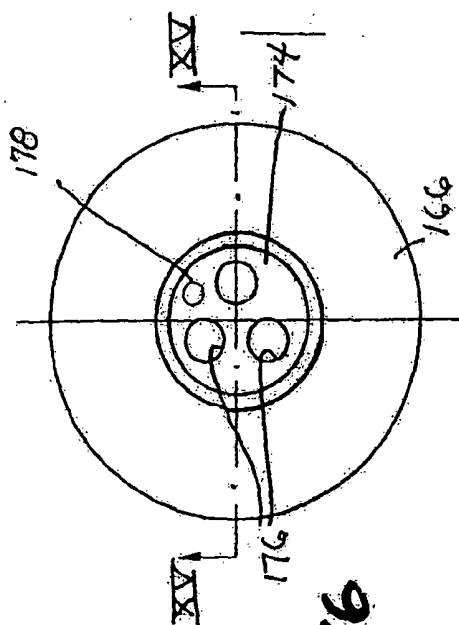


FIG. 16

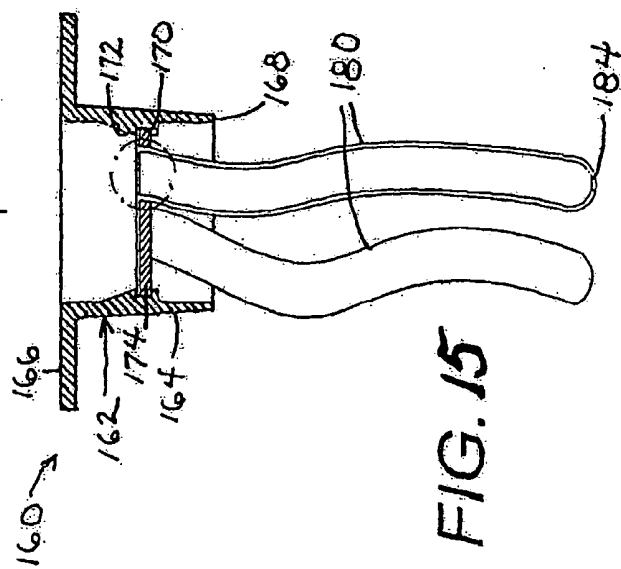


FIG. 15




FIG. 17

FIG. 19

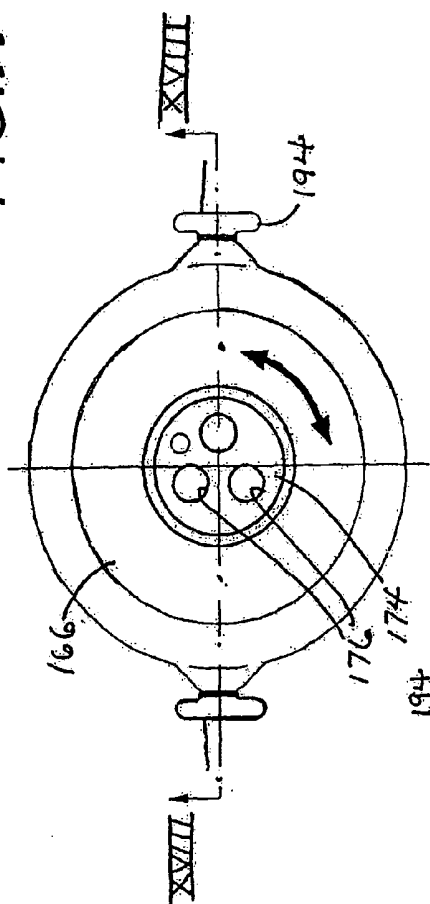
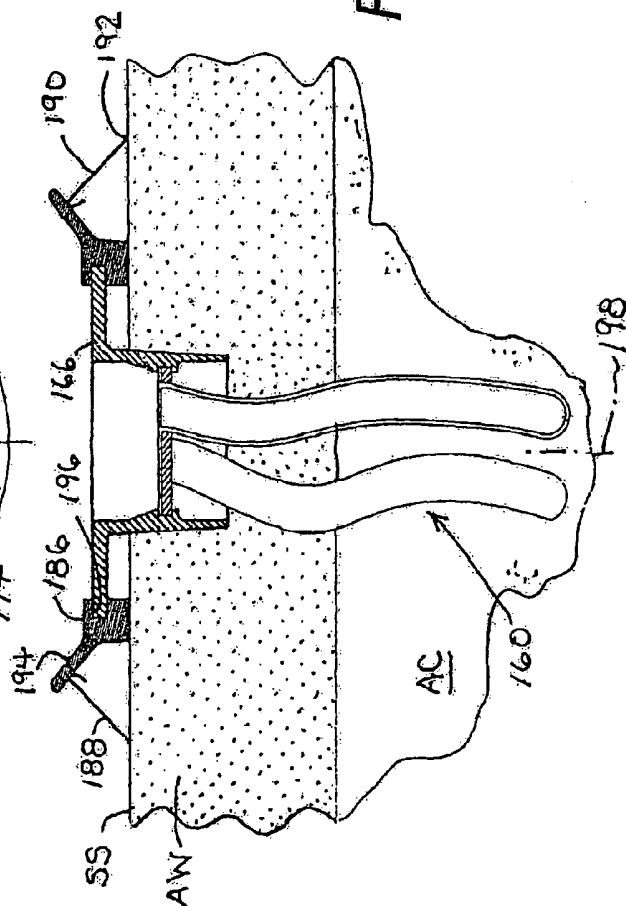


FIG. 18



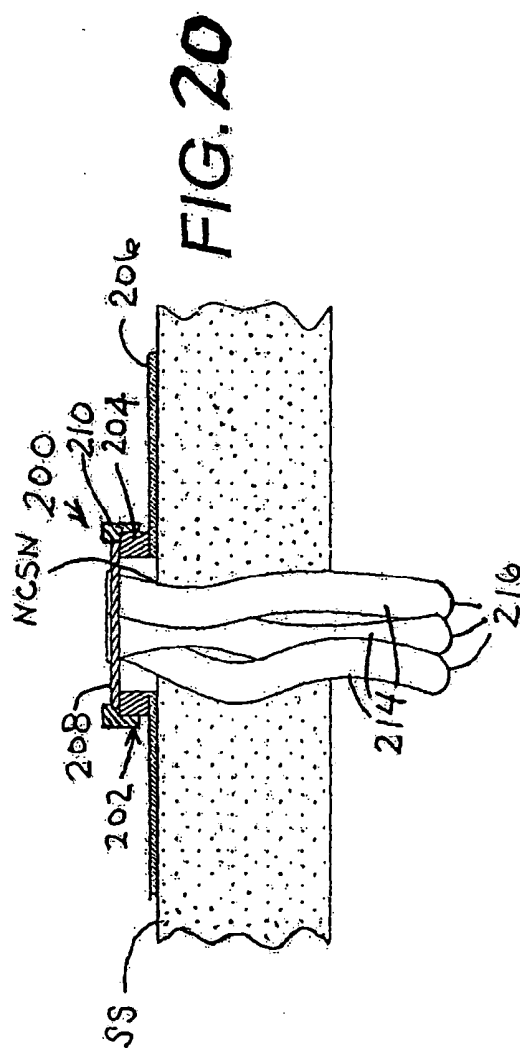
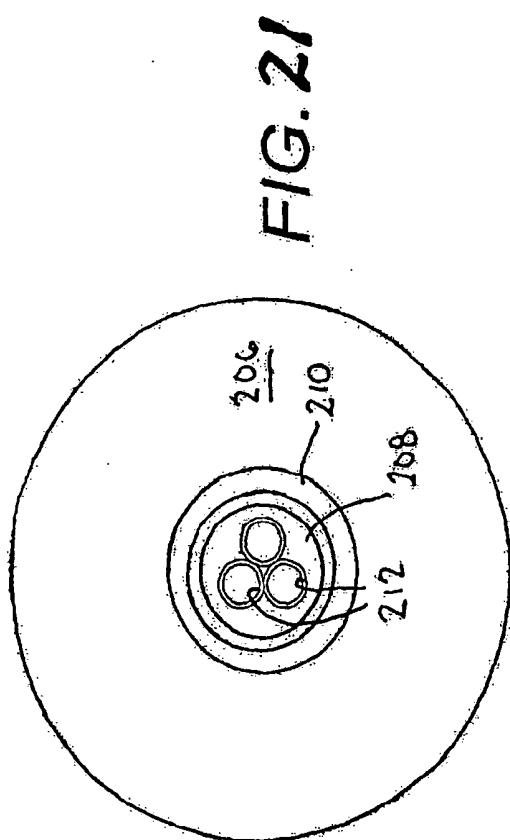


FIG. 23

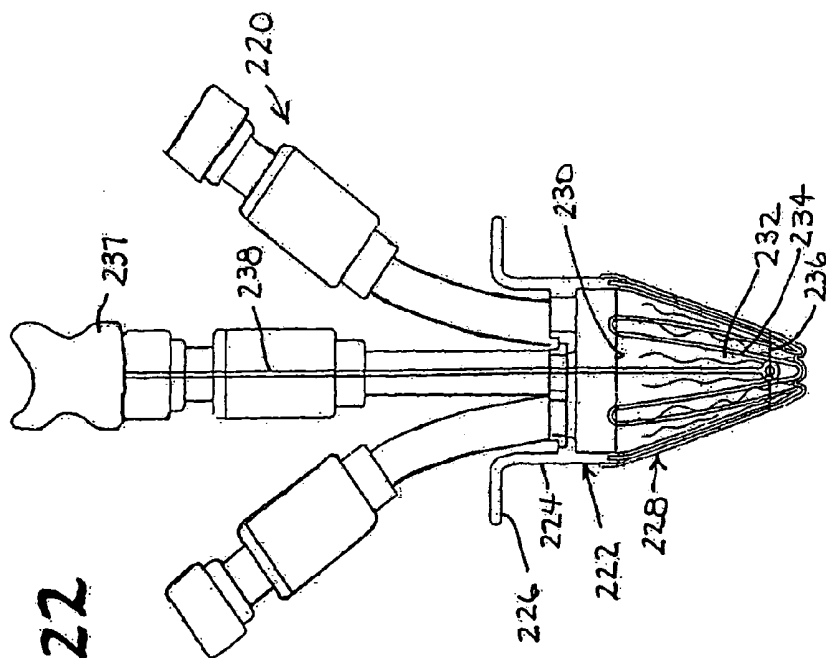
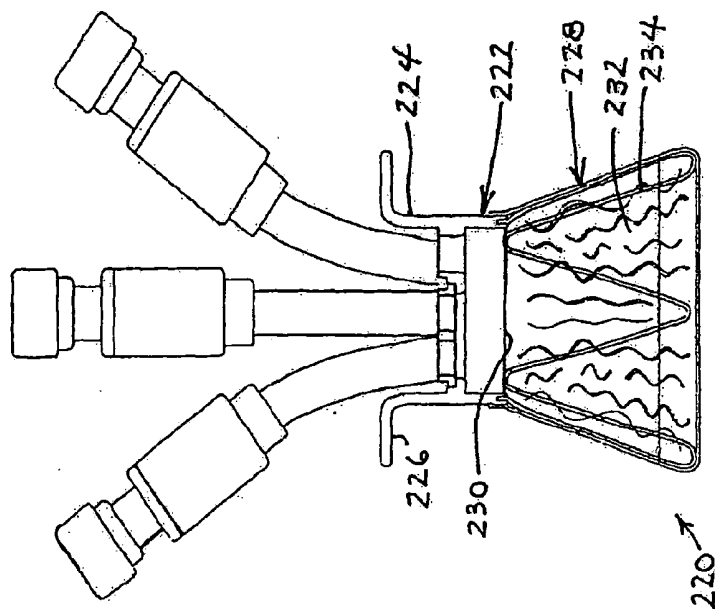


FIG. 25

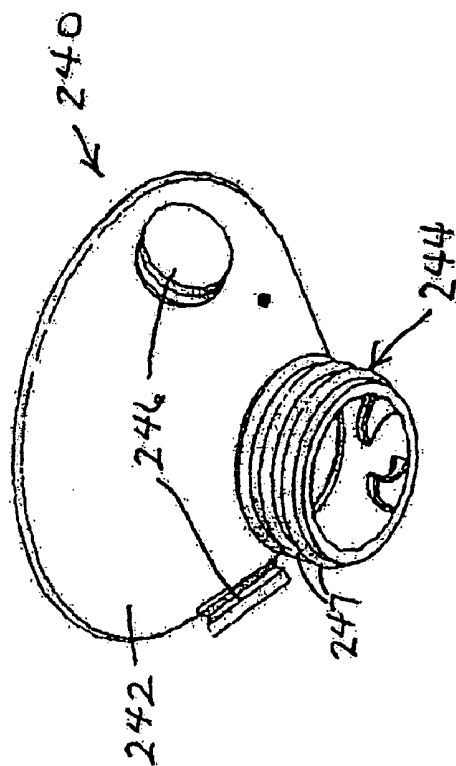
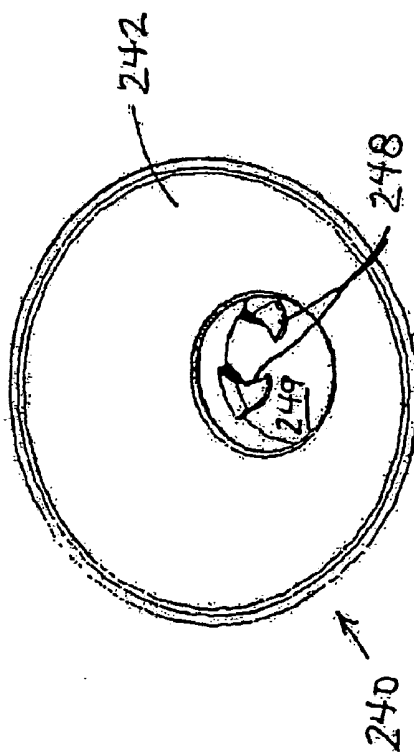
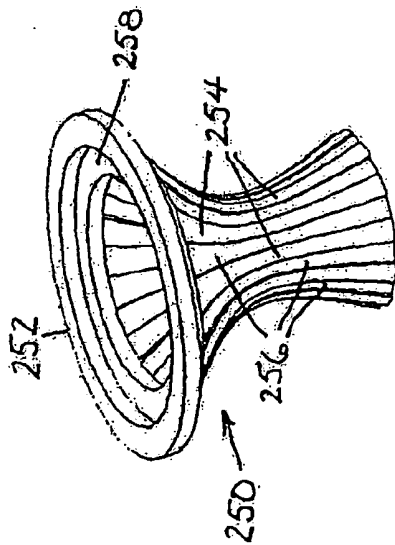
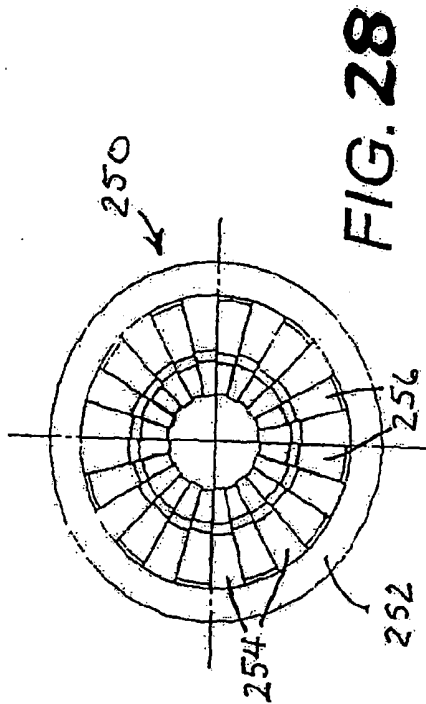
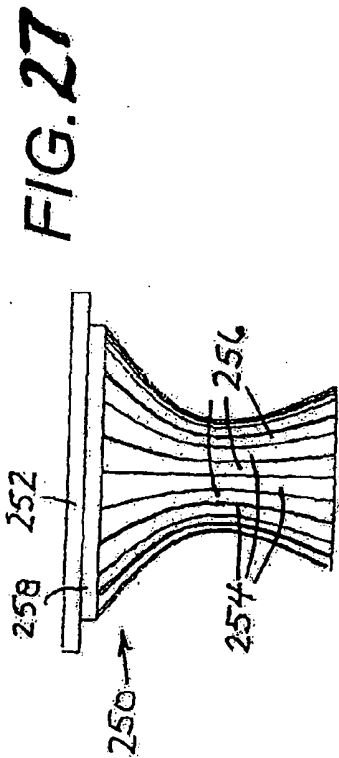


FIG. 24





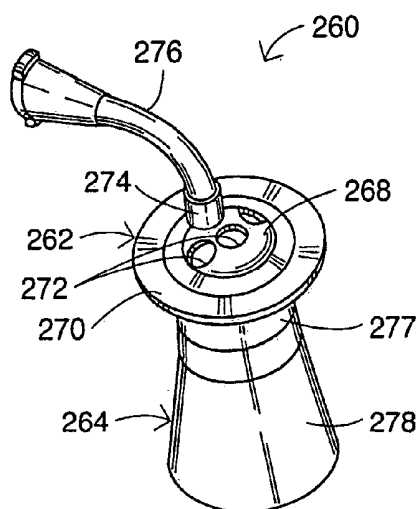


FIG. 29

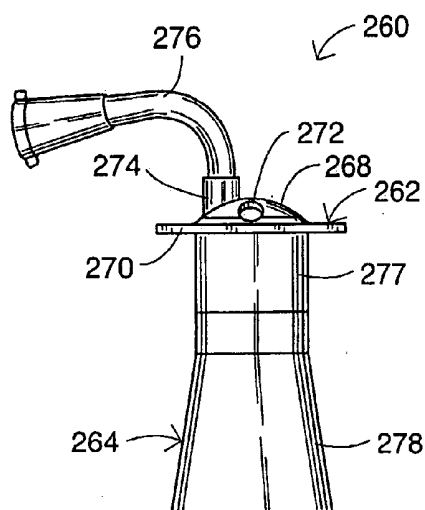


FIG. 30

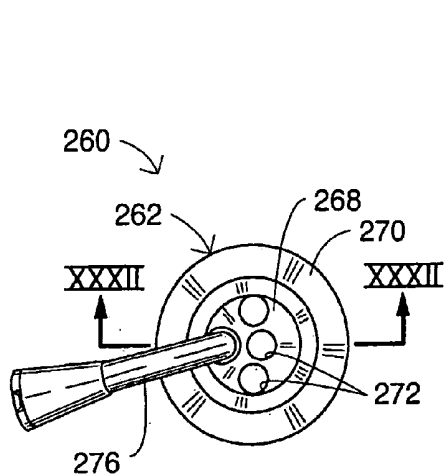


FIG. 31

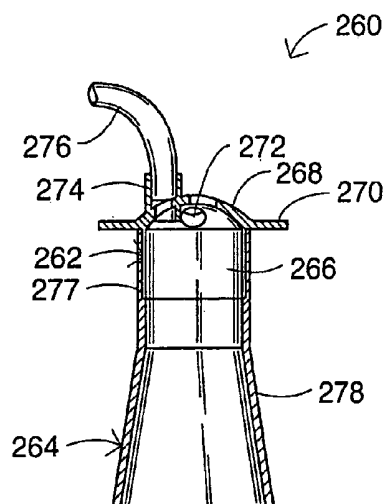


FIG. 32

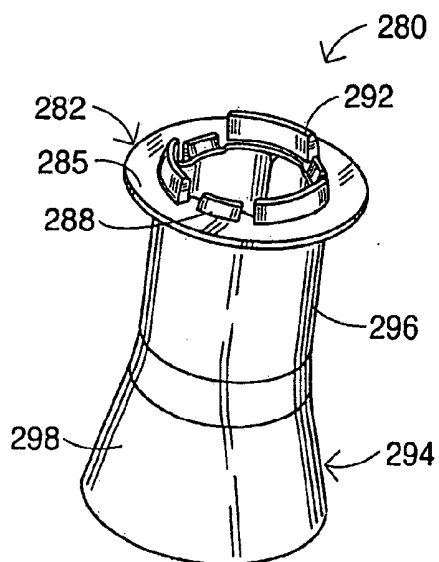


FIG. 33

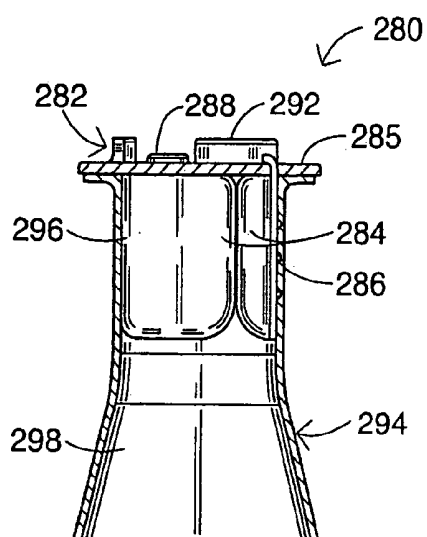


FIG. 34

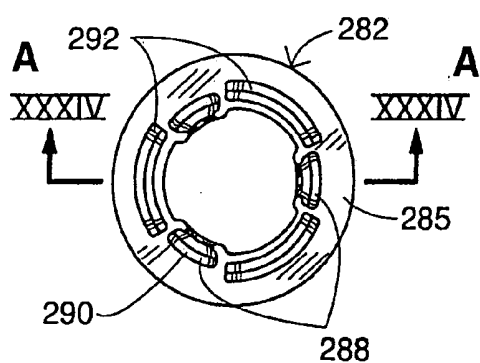


FIG. 35

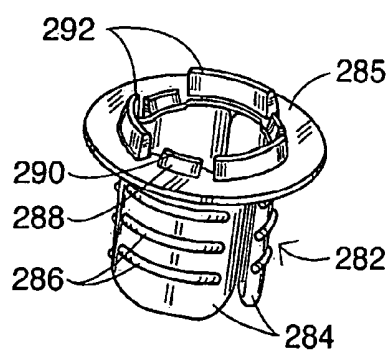


FIG. 36

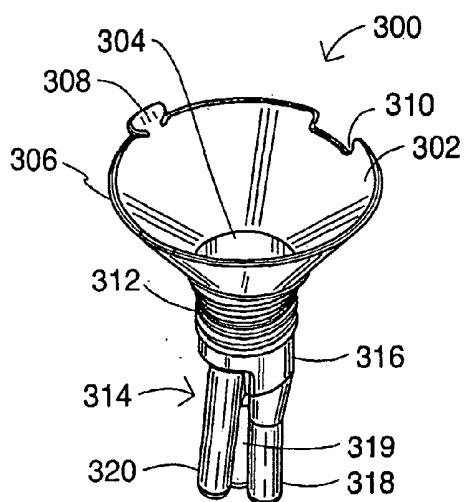


FIG. 37

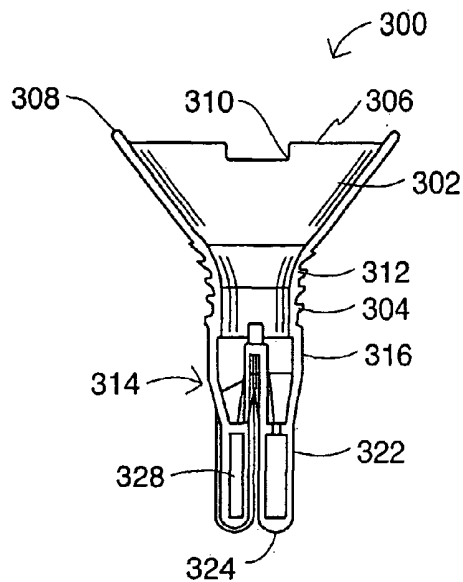


FIG. 38

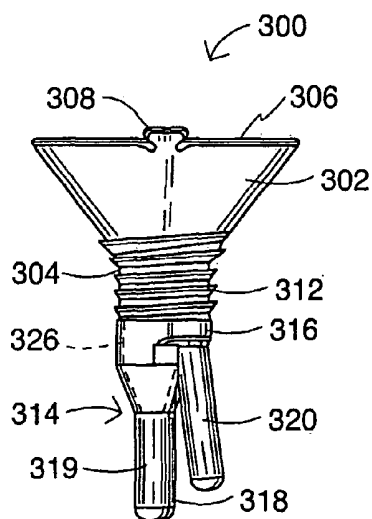


FIG. 39




FIG. 40

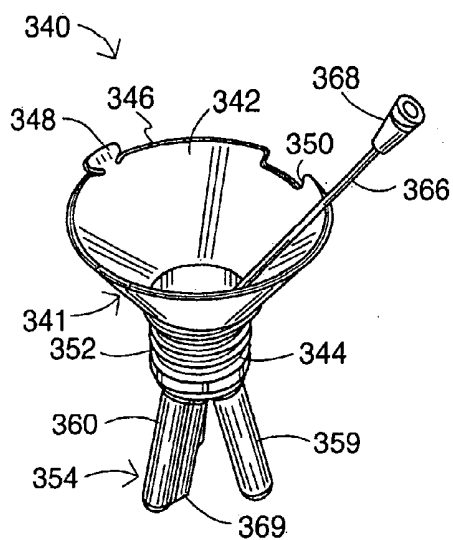


FIG. 41

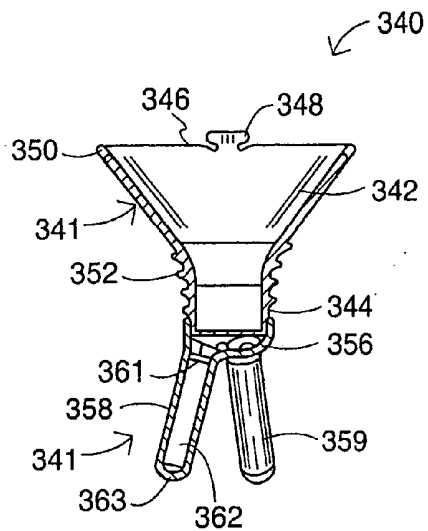


FIG. 42

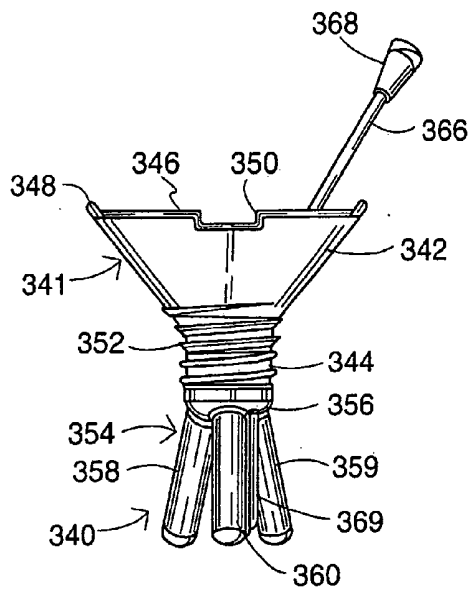


FIG. 43




FIG. 44

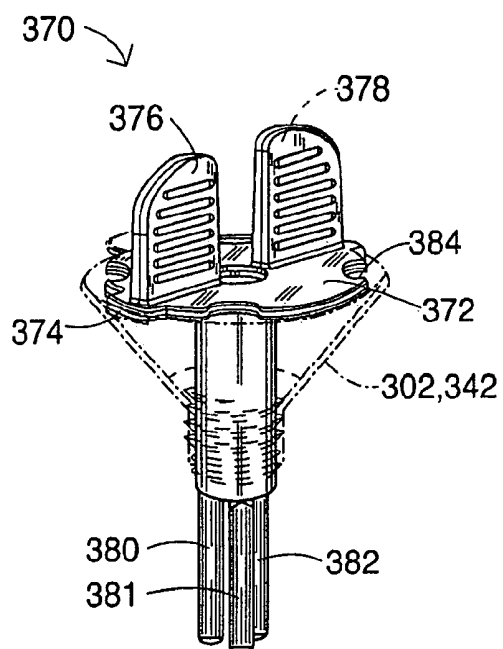


FIG. 45

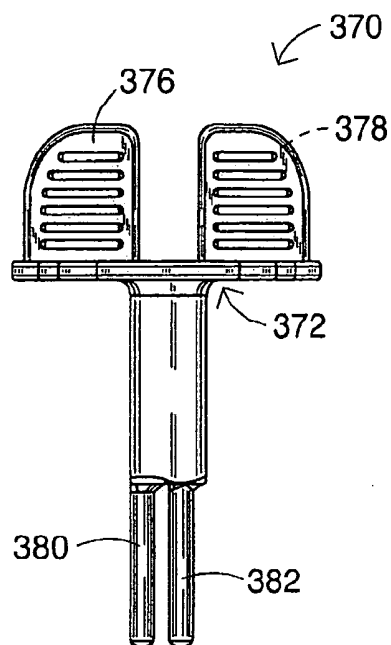


FIG. 46

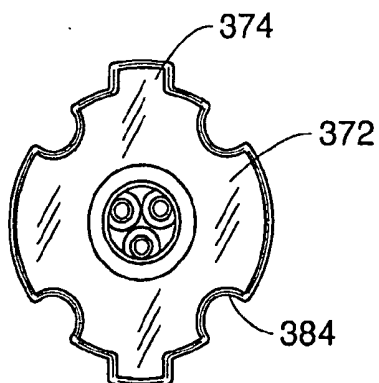


FIG. 47

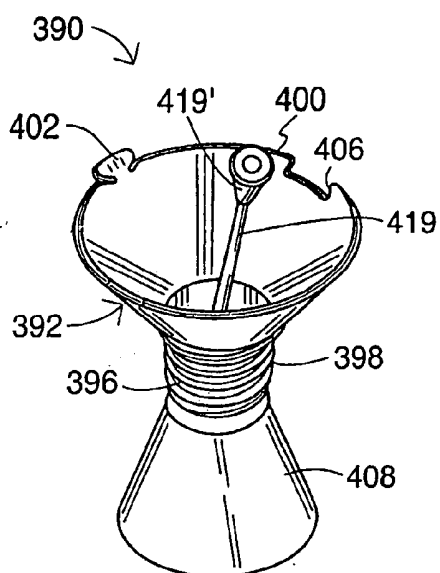


FIG. 48

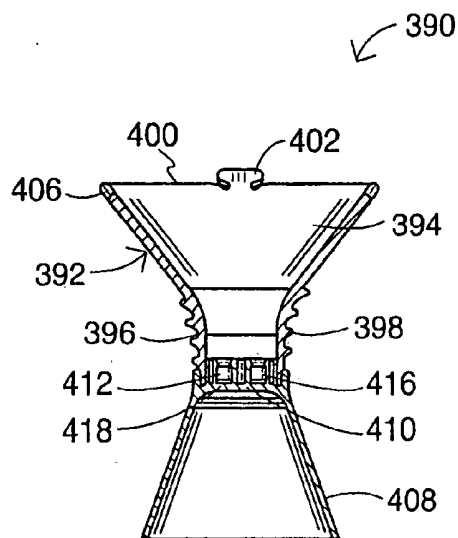


FIG. 49

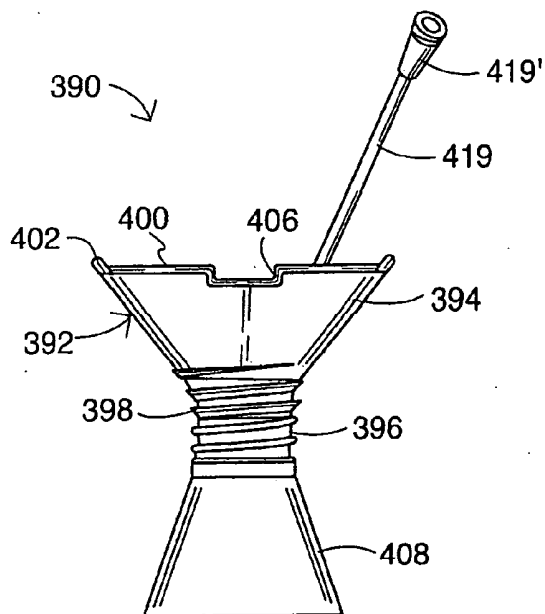


FIG. 50

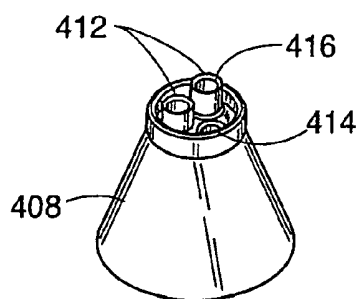


FIG. 51

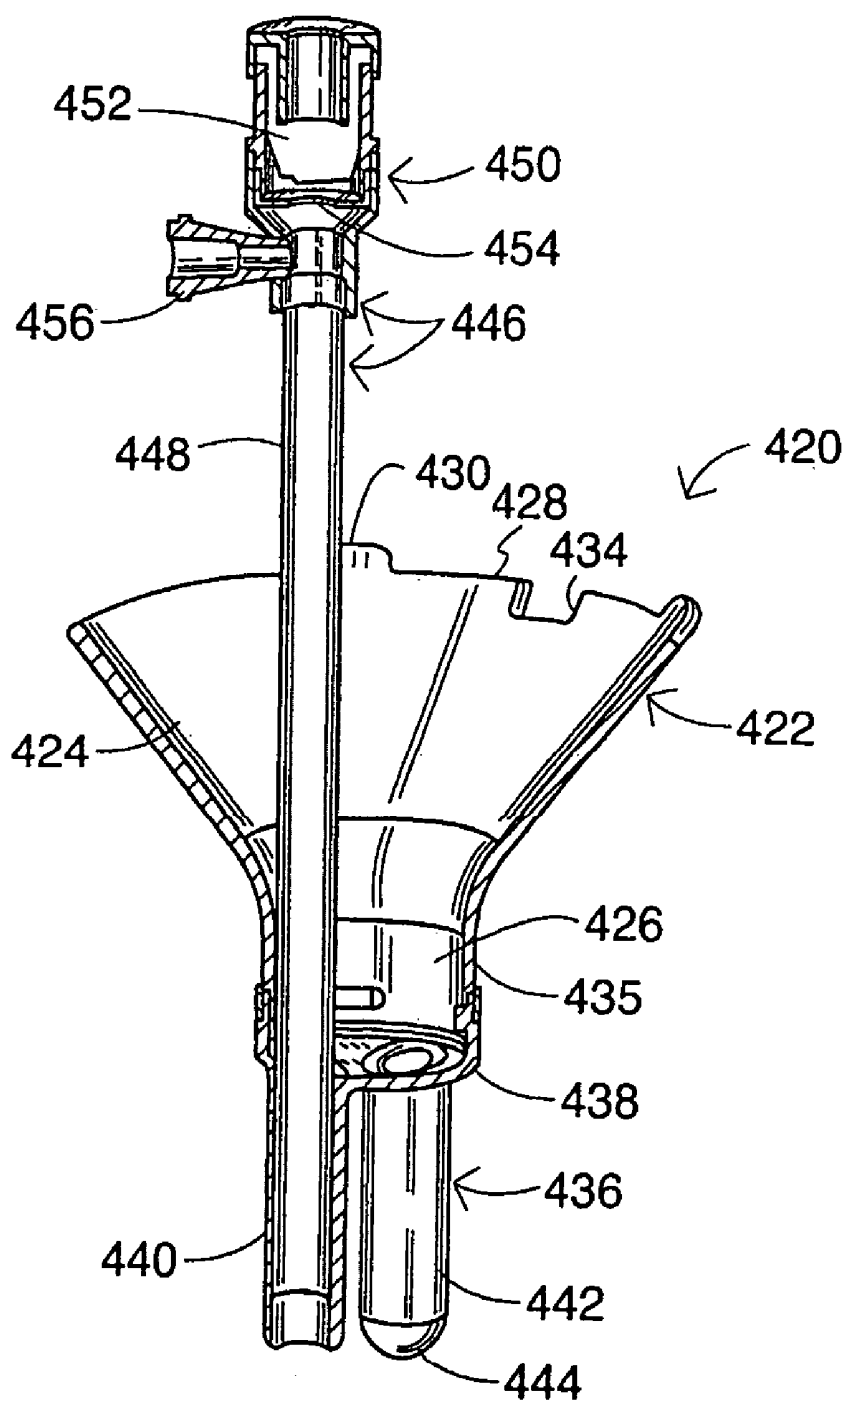


FIG. 52

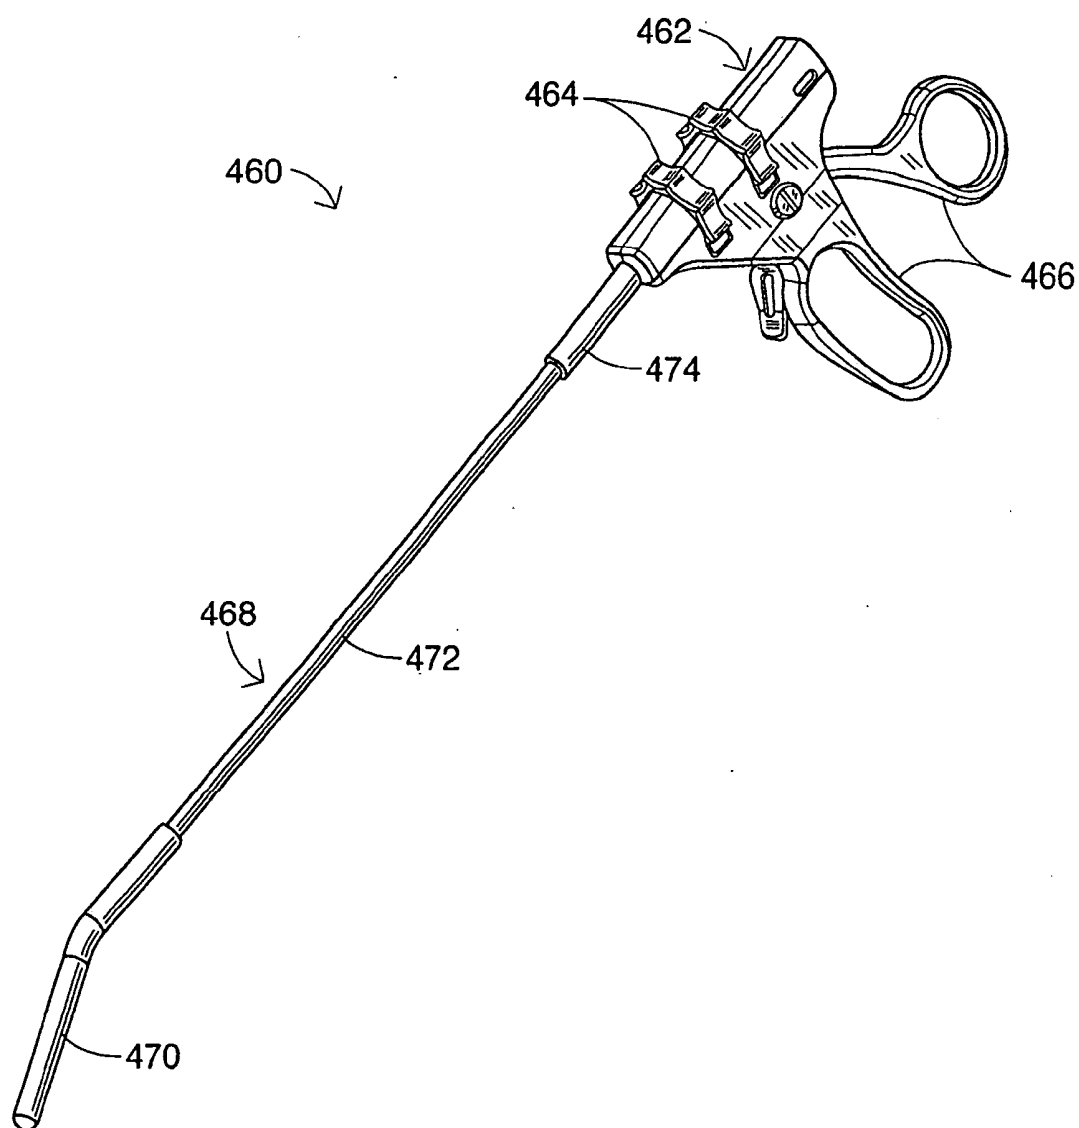
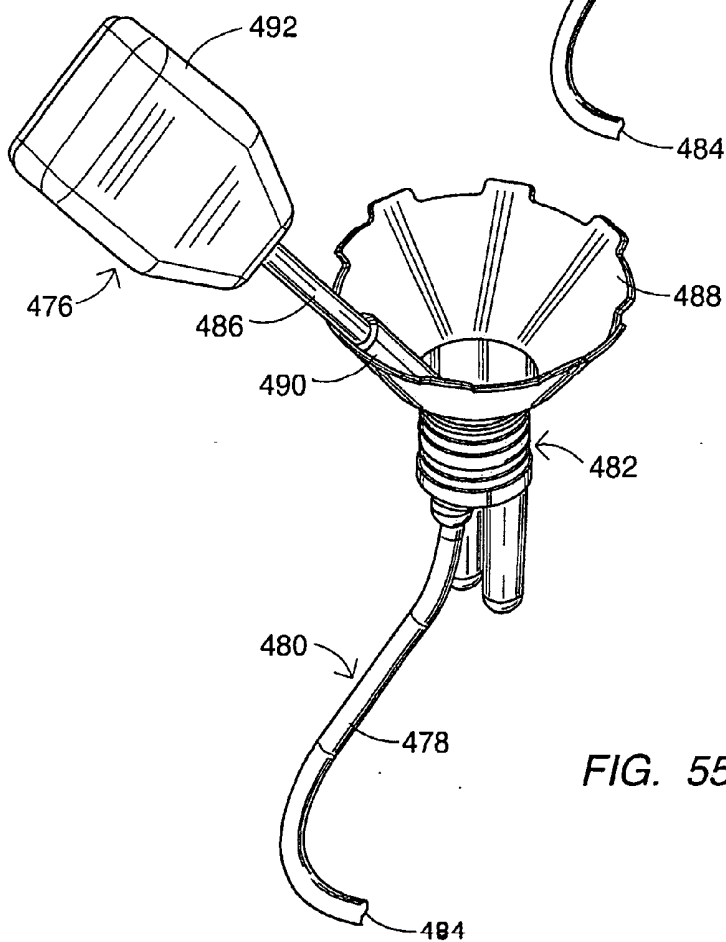
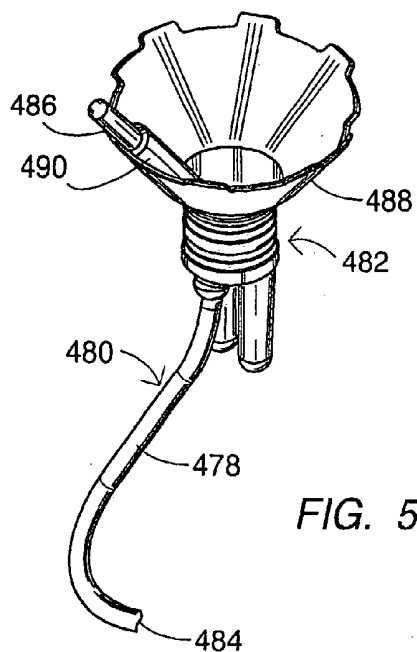


FIG. 53



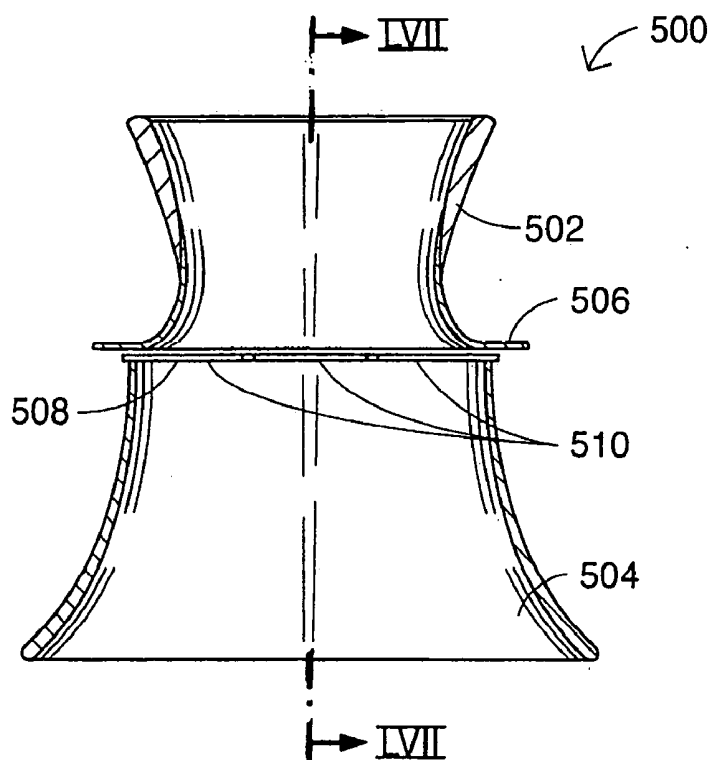


FIG. 56

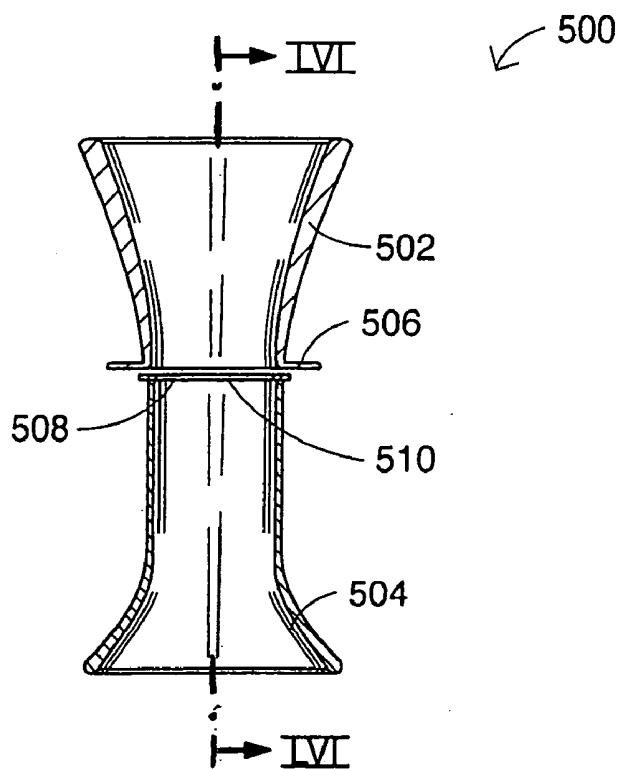


FIG. 57

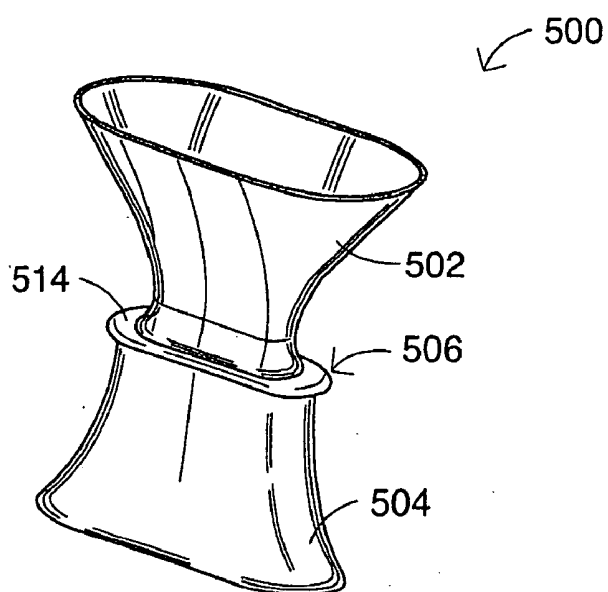


FIG. 58

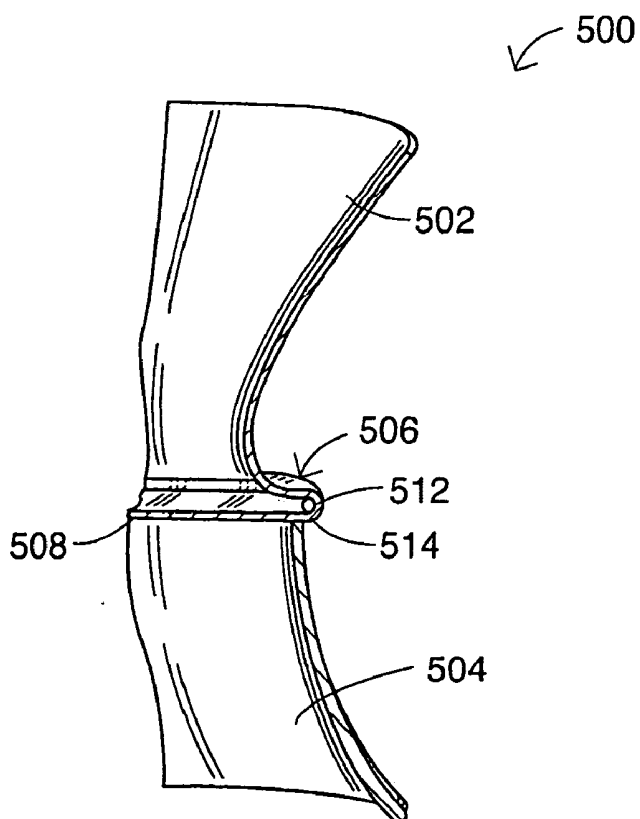


FIG. 59

LAPAROSCOPIC PORT ASSEMBLY

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 60/920,935 filed Mar. 30, 2007.

FIELD OF THE INVENTION

[0002] The present invention relates to surgical port assemblies. The port assemblies of the present invention are particularly useful in minimally invasive surgical procedures such as laparoscopic operations entirely through the umbilicus.

BACKGROUND OF THE INVENTION

[0003] Abdominal laparoscopic surgery gained popularity in the late 1980's, when benefits of laparoscopic removal of the gallbladder over traditional (open) operation became evident. Reduced postoperative recovery time, markedly decreased post-operative pain and wound infection, and improved cosmetic outcome are well established benefits of laparoscopic surgery, derived mainly from the ability of laparoscopic surgeons to perform an operation utilizing smaller incisions of the body cavity wall.

[0004] Laparoscopic procedures generally involve insufflation of the abdominal cavity with CO₂ gas to a pressure of around 15 mm Hg. The abdominal wall is pierced and a 5-10 mm in diameter straight tubular cannula or trocar sleeve is then inserted into the abdominal cavity. A laparoscopic telescope connected to an operating room monitor is used to visualize the operative field, and is placed through (one of) the trocar sleeve(s). Laparoscopic instruments (graspers, dissectors, scissors, retractors, etc.) are placed through two or more additional trocar sleeves for the manipulations by the surgeon and surgical assistant(s).

[0005] Recently, so-called "mini-laparoscopy" has been introduced utilizing 2-3 mm diameter straight trocar sleeves and laparoscopic instruments. When successful, mini-laparoscopy allows further reduction of abdominal wall trauma and improved cosmesis. However, instruments used for mini-laparoscopic procedures are generally more expensive and fragile. Because of their performance limitations, due to their smaller diameter (weak suction-irrigation system, poor durability, decreased video quality), mini-laparoscopic instruments can generally be used only on selected patients with favorable anatomy (thin cavity wall, few adhesions, minimal inflammation, etc.). These patients represent a small percentage of patients requiring laparoscopic procedure. In addition, smaller, 2-3 mm, incisions may still cause undesirable cosmetic outcomes and wound complications (bleeding, infection, pain, keloid formation, etc.).

[0006] Since the benefits of smaller and fewer body cavity incisions are proven, it would be attractive to perform an operation utilizing only a single incision in the navel. An umbilicus is the thinnest and least vascularized, and a well-hidden, area of the abdominal wall. The umbilicus is generally a preferred choice of abdominal cavity entry in laparoscopic procedures. An umbilical incision can be easily enlarged (in order to eviscerate a larger specimen) without significantly compromising cosmesis and without increasing the chances of wound complications. The placement of two or more standard (straight) cannulas and laparoscopic instruments in the umbilicus, next to each other, creates a so-called

"chopstick" effect, which describes interference between the surgeon's hands, between the surgeon's hands and the instruments, and between the instruments. This interference greatly reduces the surgeon's ability to perform a described procedure.

[0007] Thus, there is a need for instruments and trocar systems, which allow laparoscopic procedures to be performed entirely through the umbilicus while at the same time reducing or eliminating the "chopstick effect." A laparoscopic procedure performed entirely through the umbilicus, using the laparoscopic instruments and trocar system according to an embodiment of the present invention, allows one to accomplish the necessary diagnostic and therapeutic tasks while further minimizing abdominal wall trauma and improving cosmesis.

OBJECTS OF THE INVENTION

[0008] The present invention provides cannula or port assemblies for the performance of surgical procedures, particularly including laparoscopic procedures, for instance, entirely through the umbilicus.

[0009] An object of the present invention is to provide an improved port assembly for facilitating access to internal organs of a patient during laparoscopic procedures.

[0010] Another object of the present invention is to provide such a port assembly that provides enlarged workspace for the hands of the surgeon(s) when plural laparoscopic instruments are placed through the umbilicus.

[0011] These and other objects of the invention will be apparent from the drawings and descriptions herein. Although each object of the invention is believed to be attained by at least one embodiment of the invention, there is not necessarily any single embodiment that achieves all of the objects of the invention.

SUMMARY OF THE INVENTION

[0012] The present invention facilitates the performance of laparoscopic surgical procedures wherein several laparoscopic instruments are inserted into a patient through respective cannulas all extending through the same opening in the patient, for instance, through the umbilicus. The advantages of such an operation include minimizing trauma to the patient and accelerating the patient recovery.

[0013] A first embodiment of a surgical port assembly in accordance with the present invention comprises a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. The body has a main axis oriented substantially transversely to the patient's skin surface upon disposition of the body in the incision. The port assembly further comprises a main first plate, a second plate, at least one first tubular member and a second tubular member. The first plate has a first opening and a second opening and is mounted to the body substantially transversely to the axis. The second plate is rotatably disposed in the first opening for turning about an auxiliary axis preferably substantially parallel to the main axis. The first tubular member is attached to the second plate and extends in at least one direction away from the second plate. The second tubular member is attached to the first plate at the second opening and extends in at least one direction away from the first plate.

[0014] The body of the port assembly has an outer side facing away from the patient and an inner side facing

inwardly of or towards the patient's skin surface during a surgical procedure. Pursuant to one alternative design of the port assembly, the first tubular member extends only upwardly or outwardly away from the second plate, on the outer side of the body. Preferably, the first tubular member is one of a plurality of first tubular members all attached to the second plate and extending only upwardly or outwardly away from the second plate, on the outer side of the body. According to a specific feature of this design, at least one of the first tubular members is flexible at least at a point of attachment to the second plate, enabling a pivoting (about a transverse axis) and/or a swiveling (about a longitudinal axis) at the second plate of a surgical instrument inserted through the at least one of the first tubular members. The first tubular members are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such first tubular member and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such first tubular member.

[0015] Pursuant to another alternative design of the port assembly, the first tubular member extends only downwardly or inwardly away from the second plate, on the inner side of the body. Preferably in this design, the first tubular member is one of a plurality of first tubular members all attached to the second plate and extending only downwardly or inwardly away from the second plate, on the inner side of the body. According to a specific feature of this alternative design, at least one of the first tubular members is flexible at least at a point of attachment to the second plate, enabling a pivoting (about a transverse axis) and/or a swiveling (about a longitudinal axis) at the second plate of a surgical instrument inserted through the at least one of the first tubular members. Again, the first tubular members are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such first tubular member and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such first tubular member.

[0016] Pursuant to additional features of the present invention, the second plate is dome-shaped and the second plate is removably attached to the first plate.

[0017] A second embodiment of a surgical port assembly in accordance with the present invention comprises a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, the body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. At least one tubular member depends downwardly or inwardly from the body so that the tubular member is disposed only on the inner side of the body.

[0018] The downwardly depending tubular member is preferably one of a plurality of tubular members all depending downwardly or inwardly from the body so that the tubular members are disposed only on the inner side of the body. Each of the tubular members is preferably provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such tubular member and additionally provided with at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such tubular member.

[0019] The downwardly depending tubular members may be made fully or partially of elastomeric material. Preferably, the tubular members are tiltable at least at an upper end

[0020] In accordance with a further feature of the present invention, the downwardly depending tubular members are each provided along an inner surface with a rigid sleeve so arranged that the tubular members are each pivotable about a point of attachment to the body.

[0021] The body of the port assembly may have a funnel shape. In that case, the tubular members are attached to the funnel shape at an apical end thereof. The funnel shape may be a truncated cone that may have a circular, elliptical, oval or other cross-section.

[0022] In this second embodiment of the present invention, the outer side of the port assembly's body is free of upwardly or outwardly extending tubular cannula members and comprises a rim portion and a plate surrounded by the rim portion, the tubular members being connected to the plate and extending only on an inner side of the plate. The rim portion may sit on the skin surface of the patient and be attached thereto via adhesive. Alternatively, the rim portion may insert at least partially into the incision in the skin surface. In either case, the rim portion may have a circular or annular configuration.

[0023] The one or more downwardly depending tubular members may be detachably attached to the port assembly's body. In that case, the tubular member or members are fixed to a coupling member that in turn is detachably attached to the body at an aperture in the body. The port assembly may further comprise a plug to temporarily seal the aperture upon removal of the coupling member from the aperture.

[0024] Pursuant to another feature of the invention, the singular downwardly depending tubular member or one of the multiple downwardly depending tubular members carries a camera at a free end. The camera-carrying tubular member may be provided with directional cables that are actuatable from the outer or upper side of the port assembly for changing an orientation of the free end of the respective tubular member and the camera.

[0025] A third embodiment of a surgical port assembly comprise, in accordance with the present invention, a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, the body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. A funnel-shaped extension is provided on the outer side of the body. The body together with the funnel-shaped extension may be made of a rigid metallic or polymeric material or a tough elastomeric material with some resilience and flexibility.

[0026] An obturator for deployment of a surgical port assembly (such as the second embodiment described above) through a skin surface comprises a body member, locking formations on the body member releasably engageable with cooperating locking formations on the port assembly, at least two finger contact surfaces on the body member, the finger contact surfaces facing in substantially opposed directions, for enabling manual application of a torque to the body member, and at least one elongate rigid member extending away from the body member on a side thereof opposite the finger contact surfaces, for penetrating through a skin surface.

[0027] The rigid member may be one of a plurality of parallel elongate rigid members extending away from the body member on a side thereof opposite the finger contact

surfaces, for penetrating through a skin surface. The multiple rigid members of the obturator insert into respective downwardly depending tubular members of the second port assembly embodiment described above. The rigid members of the obturator thus serve to stiffen and hold the tubular members when the port assembly is being deployed at the onset of a minimally invasive surgical procedure, for example, a laparoscopic or thoracoscopic operation.

[0028] Accordingly, it is contemplated that the obturator is a component of a surgical access assembly or kit that further comprises a surgical port assembly including (a) a port assembly body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, the body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure, and (b) a plurality of elastomeric tubular members all depending downwardly or inwardly from the port assembly body so that the tubular members are disposed only on the inner side of the body, the tubular members receiving respective ones of the elongate rigid members.

[0029] The locking formations may include projections on the body member or the obturator and recesses on the port assembly. The body member may take the form of a disk, which is provided with at least one cutout for enabling passage of an insufflation tube.

[0030] A surgical port assembly in accordance with one embodiment of the present invention comprises a body member and a skirt member. The body member is attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, the body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. The skirt member is at least partially flexible and is attached to the body on the inner side thereof.

[0031] This embodiment of a surgical port assembly in accordance with the present invention may further comprise a trocar member insertable through the body and traversing the body during a deployment procedure. The skirt member has a collapsed or folded-in insertion configuration, wherein the skirt member is releasably attached to the trocar member during the deployment procedure. A portion of the skirt member may be removably inserted into a slot in the trocar member, to hold the skirt member in the folded-in configuration.

[0032] The skirt member may have a tapered expanded configuration wherein a free end of the skirt member, opposite the body member, has a larger transverse dimension than an end of the skirt attached to the body member.

[0033] The skirt member may include a flexible web member and a resilient support wire connected to the web member for expanding the web member from a folded-in insertion configuration to an expanded use configuration.

[0034] The skirt member may include flexible strip areas interleaved or alternating with more rigid areas.

[0035] Pursuant to additional specific features of the present invention, the body member may include a cylindrical portion, a dome on an upper or proximal side of the cylindrical portion, and a circumferential or annular disk-shaped flange, the dome being formed with a plurality of openings for passage of laparoscopic or thoracoscopic instrument shafts and a laparoscope or endoscope. The skirt member includes a cylindrical section engaging the cylindrical portion of the body and further includes a tapered or conical portion.

[0036] A related surgical port element in accordance with the present invention comprises a skirt made at least partially of flexible material and means for attaching the skirt to a cannula or instrument holder in turn removably attachable to a patient at an opening in a skin surface. The skirt has a folded-in insertion configuration and an expanded use configuration.

[0037] A surgical port component comprises, in accordance with the present invention, a body including a cylindrical portion formed by a plurality of cylindrical sections or flaps. The body further includes a ring-shaped base member, the cylindrical sections or flaps being swingably coupled to the base member. The cylindrical sections or flaps are made of at least a substantially rigid material, and the base member is provided with at least one upwardly or proximally extending arcuate flange section receivable into a distal or lower end of a cylindrical body of a flexible-cannula port member. An at least partially flexible skirt may be coupled to the body of the port component, for instance, by a cylindrical proximal sleeve section of the skirt fitting over the cylindrical sections or flaps.

[0038] Another surgical port assembly in accordance with the present invention comprises a body member and a flexible scope arm. The body member is attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, the body member having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. The flexible scope arm is connected to the body member and extends from an underside of the body member. The scope arm incorporates a digital camera at a distal end, the camera being maneuverable via cables in the scope arm, the scope arm being operatively connectable at a proximal end to an endoscope functional module enabling operation of the camera.

[0039] A thoracoscopic surgical port assembly in accordance with the present invention comprises (a) a downwardly tapering, substantially flexible, upper or proximal part, and (b) an upwardly tapering, substantially flexible lower or distal part connected to the upper or proximal part. The lower or distal part is extendable in between the ribs of a patient into a pleural space. A substantially rigid ring-like structure is disposed proximate a junction between the upper or proximal part and the lower or distal part. The ring structure is locatable, during use of the port assembly, on top of a patient's ribs. A flexible membrane is provided proximate the ring structure, the membrane having a plurality of openings for passage of the instruments.

[0040] A surgical port assembly comprises, in accordance with another embodiment of the present invention, a rigid mounting ring, a body member and a cannula unit. The ring is disposable on and releasably attachable a patient's skin surface. The body member is attachable to the ring to depend downwardly therefrom through an incision in the patient's skin surface to facilitate deployment of instruments in the patient via the incision. The body member has an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. The body member is rotatably attachable to the ring for turning about an axis oriented perpendicularly to a plane defined by the ring. The cannula unit is attachable to the body member and carries a plurality of cannulas.

[0041] Yet another surgical port assembly in accordance with the present invention comprises a body attachable to a patient at an incision in a skin surface of the patient to facili-

tate deployment of instruments in the patient via the incision, the body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure. The port assembly also comprises a cannula unit including an elastomeric dome-shaped base and a plurality of upwardly extending tubular members or cannulas each provided with a cap housing a plurality of seals.

BRIEF DESCRIPTION OF THE DRAWINGS

[0042] FIG. 1 is partially a schematic side elevational view and partially a schematic longitudinal cross-sectional view of a trocar or surgical port assembly in accordance with the present invention, showing a skirt folded into an obturator for deployment.

[0043] FIG. 2 is a schematic cross-sectional view of the trocar or port assembly of FIG. 1, showing the skirt in a free depending configuration.

[0044] FIG. 3 is a schematic cross-sectional view of the trocar or port assembly of FIGS. 1 and 2, showing a dome with finger or seal members attached to a body member in the port assembly.

[0045] FIG. 4 is a schematic longitudinal cross sectional view of another trocar or surgical port assembly in accordance with the present invention, showing a trocar body with an apertured plate therein.

[0046] FIG. 5 is a top plan view of the plate of FIG. 4, showing a pair of openings.

[0047] FIG. 6 is a schematic longitudinal cross-sectional view of a modified trocar or surgical port assembly in accordance with the present invention, showing a trocar body with a perforated plate therein.

[0048] FIG. 7 is a top plan view of the trocar or surgical port assembly of FIG. 6, showing three instrument ports.

[0049] FIG. 8 is a partial schematic cross-sectional view, on a larger scale, of the modified trocar or surgical port assembly of FIGS. 6 and 7.

[0050] FIG. 9 is a partial cross-sectional view taken along line IX-IX in FIG. 6.

[0051] FIG. 10 is a schematic longitudinal cross-sectional view of another modified trocar or surgical port assembly in accordance with the present invention, largely similar to the port assembly of FIGS. 6-8.

[0052] FIG. 11 is a top plan view of the trocar or surgical port assembly of FIG. 10, showing three instrument ports.

[0053] FIG. 12 is a partial schematic cross-sectional view, on a larger scale, of the modified trocar or surgical port assembly of FIGS. 10 and 11.

[0054] FIG. 13 is a schematic longitudinal cross-sectional view of another trocar or surgical port assembly in accordance with the present invention.

[0055] FIG. 14 is a cross-sectional view taken along line XIV-XIV in FIG. 13.

[0056] FIG. 15 is a schematic longitudinal cross-sectional view of a further trocar or surgical port assembly in accordance with the present invention.

[0057] FIG. 16 is a top plan view of the trocar or surgical port assembly of FIG. 15, showing three instrument ports and an insufflation port. The cross-sectional view of FIG. 15 is taken along line XV-XV in FIG. 16.

[0058] FIG. 17 is a partial cross-sectional view, on a larger scale, of a detail XVII of FIG. 15.

[0059] FIG. 18 is a schematic longitudinal cross-sectional view of the trocar or surgical port assembly of FIGS. 15-17,

showing the port assembly rotatably supported via a mounting ring on a patient's abdomen.

[0060] FIG. 19 is a top plan view of the trocar or surgical port assembly and mounting ring of FIG. 16. The cross-sectional view of FIG. 18 is taken along line XVIII-XVIII in FIG. 19.

[0061] FIG. 20 is a schematic longitudinal cross-sectional view of a further trocar or surgical port assembly in accordance with the present invention, showing the port assembly deployed in an abdominal wall of a patient.

[0062] FIG. 21 is a top plan view of the trocar or surgical port assembly of FIG. 20, showing three instrument ports. The cross-sectional view of FIG. 20 is taken along line XX-XX in FIG. 21.

[0063] FIG. 22 is a schematic side elevational view, partially in cross-section, of a further trocar or surgical port assembly in accordance with the present invention, showing a skirt in a collapsed insertion configuration.

[0064] FIG. 23 is partially a side elevational view similar to FIG. 22, showing the skirt in an expanded use configuration.

[0065] FIG. 24 is a schematic perspective top view of another surgical port assembly in accordance with the present invention.

[0066] FIG. 25 is a schematic perspective bottom view of the surgical port assembly of FIG. 24.

[0067] FIG. 26 is a schematic top perspective view of an expandable skirt utilizable in a surgical port assembly in accordance with the present invention.

[0068] FIG. 27 is a side elevational view of the skirt of FIG. 26.

[0069] FIG. 28 is a top view of the skirt of FIGS. 26 and 27.

[0070] FIG. 29 is a schematic top perspective view of an elastomeric two-shot domed trocar or port assembly in accordance with the present invention.

[0071] FIG. 30 is a side elevational view of the port assembly of FIG. 29.

[0072] FIG. 31 is a top plan view of the port assembly of FIGS. 29 and 30.

[0073] FIG. 32 is a longitudinal cross-sectional view taken along line XXXII-XXXII in FIG. 31.

[0074] FIG. 33 is a schematic top perspective view of a body member of a hinged trocar or port assembly in accordance with the present invention.

[0075] FIG. 34 is a longitudinal cross-sectional view of the port assembly body member of FIG. 33, showing the body member together with a skirt.

[0076] FIG. 35 is a top plan view of the port assembly of FIG. 33. The longitudinal cross-sectional view of FIG. 34 is taken along line XXXIV-XXXIV in FIG. 35.

[0077] FIG. 36 is a perspective view of the port assembly of FIGS. 34 and 35.

[0078] FIG. 37 is a schematic top perspective view of yet another trocar or port assembly in accordance with the present invention.

[0079] FIG. 38 is a longitudinal cross-sectional view of the port assembly body member of FIG. 37.

[0080] FIG. 39 is a side elevational view of the port assembly of FIGS. 37 and 38.

[0081] FIG. 40 is a perspective view of a lower portion of the port assembly of FIGS. 37-39, showing multiple insufflation port elements.

[0082] FIG. 41 is a schematic top perspective view of another trocar or port assembly in accordance with the present invention, similar to the trocar or port assembly of FIGS. 37-39.

[0083] FIG. 42 is a longitudinal cross-sectional view of the port assembly of FIG. 41.

[0084] FIG. 43 is a side elevational view of the port assembly of FIGS. 41 and 42.

[0085] FIG. 44 is a perspective view of a lower portion of the port assembly of FIGS. 40-43, showing multiple insufflation port elements.

[0086] FIG. 45 is a schematic top perspective view of a three-fingered obturator, in accordance with the present invention, exemplarily for use in deploying the trocar or port assembly of FIGS. 37-40 or FIGS. 41-44 in a patient at the onset of a minimally invasive laparoscopic or thoracoscopic surgical procedure.

[0087] FIG. 46 is a side elevational view of the obturator of FIG. 45.

[0088] FIG. 46 is a top plan view of the obturator of FIGS. 45 and 46.

[0089] FIG. 48 is a schematic top perspective view of another trocar or port assembly in accordance with the present invention.

[0090] FIG. 49 is a longitudinal cross-sectional view of the port assembly of FIG. 48.

[0091] FIG. 50 is a side elevational view of the port assembly of FIGS. 48 and 49.

[0092] FIG. 51 is a perspective view of a lower portion of the port assembly of FIGS. 40-43, showing multiple insufflation port elements.

[0093] FIG. 52 is a schematic perspective view, partially cut away, of yet another trocar or port assembly in accordance with the present invention.

[0094] FIG. 53 is a schematic perspective view of a laparoscopic instrument for use with a surgical port assembly in accordance with the present invention.

[0095] FIG. 54 is a schematic perspective view of a surgical port assembly with an integrated endoscope shaft or arm, in accordance with the present invention.

[0096] FIG. 55 is a schematic perspective view, similar to FIG. 54 but on a larger scale, showing a functional housing component on a proximal end of the endoscope shaft or arm of FIG. 54.

[0097] FIG. 56 is a schematic cross-sectional view of a thoracic surgical port in accordance with the present invention, taken along a wide dimension of the port, line LVI-LVI in FIG. 57.

[0098] FIG. 57 is a schematic cross-sectional view of a thoracic surgical port, taken along a narrow dimension of the port, line LVII-LVII in FIG. 58.

[0099] FIG. 58 is a schematic perspective view of the thoracic surgical port of FIGS. 56 and 57.

[0100] FIG. 59 is a broken-away schematic perspective view, on a larger scale, of the thoracic surgical port of FIGS. 56-58.

DETAILED DESCRIPTION

[0101] As depicted in FIG. 1, a trocar or surgical port assembly 10 useful for laparoscopic or thoracoscopic surgery includes a rigid annular trocar body 12 having a cylindrical portion 14 and a circular flange 16 at a proximal or outer end of the cylindrical portion. Surgical port assembly 10 further includes a fabric or elastomeric skirt 18 attached to a distal

end of cylindrical portion 14. An obturator 20 includes a knob or handle 22 and a rigid insertion portion 24 slidably insertable through cylindrical portion 14 of trocar body 12. Rigid insertion portion 24 is provided with a longitudinal slot 26 into which a portion 28 of skirt 18 is folded and secured for facilitating deployment of the port assembly at the onset of a minimally invasive surgical procedure. After insertion of the assembly into an incision, obturator 20 is removed, freeing the skirt, as shown in FIG. 2. Subsequently, a pneumoperitoneum maintenance component 30 (FIG. 3) is attached to trocar body 12 for enabling the passage of instrument shafts through port assembly 10 and into a patient. Cylindrical portion 14 of trocar body 12 is formed internally with an annular rib or a plurality of inwardly extending nubs 29 defining a shoulder on which obturator 20 and component 30 alternatively rest.

[0102] Component 30 comprises an elastomeric dome-shaped base 32 and a plurality of upwardly extending tubular members or cannulas 34-36 each provided with a cap 38 housing a plurality of seals (not shown). These seals include a valve (e.g., a tricuspid valve) to prevent air leakage when no instrument is inserted through the tubular member or cannula 34-36. The seals further include an instrument seal exemplarily in the form of a resilient ring or bead fixed to the internal wall of the cannula 34-36 or respective cap 38. Upon insertion of an instrument shaft through a cannula 34-36, the ring or bead hugs the instrument and prevents or minimizes the leakage of insufflation gas. Additional ring or other seals may be incorporated, particularly where the ring or bead seals are provided along a flexible portion of a tubular port member or cannula 34-36. The multiple seals prevent loss of pneumoperitoneum through a cannula 34-36 when an instrument extending therethrough is being manipulated during a procedure.

[0103] Generally, in a laparoscopic operation, one of the fingers or cannulas 34-36 receives a laparoscope, while laparoscopic instrument shafts traverse the other two. All three cannulas 34-36 extend away from trocar body 12 only on an outer or upper side thereof, facing away from a patient during a surgical procedure. The underside of the trocar body 12 is free of cannulas. One of the fingers or cannulas 36 is provided with a luer fitting 40 for enabling insufflation of a patient's abdominal cavity during laparoscopic surgery. The fitting is not needed in many thoracoscopic procedures.

[0104] Dome-shaped base 32 is provided along a lower periphery with a sealing ring 42 that engages rib or shoulder 29 on cylindrical portion 14. Sealing ring 42 has a sliding engagement with an inner surface (not labeled) of cylindrical portion 14 to facilitate a rotation of component 30 about an axis 46 of body member 12. Along an outer surface (not designated), cylindrical portion 14 is formed with a plurality of outwardly extending circumferential ribs or beads 44 for inhibiting slippage in an incision.

[0105] As depicted in FIGS. 4 and 5, a surgical port assembly 50 comprises an annular body 52 attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. More particularly, annular body 52 includes a cylindrical insert portion 54 and a flange 56 surrounding a proximal (closer to the surgeon) or outer end of the cylindrical insert portion. Insertion portion 54 is provided along an outer surface with a plurality of longitudinally spaced circular beads 58 and along an inner surface with a circular shoulder 60 (or at least three inwardly extending nubs defining a ledge). Shoulder 60 sup-

ports a rigid plate **62** formed with an instrument opening **64** and a scope opening **66**. Plate **62** may be rotatably or rigidly secured to cylindrical insert portion **54** of annular body **52**. An ancillary second plate **68** having a dome shape is rotatably and removably attached to the main plate **62** over opening **64**. Ancillary plate **68** carries a pair of integrally formed tubular members or cannulas **70** made of a flexible material and provided at free ends with respective sealing caps **72**. A third tubular sealing member or cannula **74** is attached to main plate **62** over scope opening **66** for enabling the introduction of a distal end portion of a laparoscope or other endoscope into a patient through port assembly **50**. Scope cannula **74** has a luer fitting **76** for insufflation purposes. Tubular fingers or cannulas **70** and **74** extend in an upper direction away from plates **62** and **68** and are disposed only on an upper or outer side thereof, facing away from a patient during a surgical procedure. The lower or inwardly facing side of port assembly **50** is free of cannula parts.

[0106] Plate **68** is rotatably disposed in or at opening **64** for turning about an axis **78** preferably substantially parallel to a main axis **79** of port assembly **50**.

[0107] Tubular fingers or cannulas **70** and **74** are flexible at least at a point of attachment to plates **68** and **62**, respectively, enabling a pivoting (about a transverse axis) and/or a swiveling (about a longitudinal axis) of surgical instruments (or an endoscope) inserted through the tubular fingers or cannulas **70**, **74**. Fingers or cannulas **70**, **74** are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such finger or cannula and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such finger or cannula.

[0108] FIGS. **6-8** illustrate a modified version **80** of the trocar or surgical port assembly of FIGS. **4** and **5**. Surgical port assembly **80** comprises an annular body **82** attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. More particularly, annular body **82** includes a cylindrical insert portion **84** and a flange **86** surrounding a proximal or outer end of the cylindrical insert portion. Insertion portion **84** is provided at a distal or inner end with an annular slot **88** that receives an edge of a skirt **90**. Skirt **90** is an elastomeric annular or slotted web member in which a plurality of longitudinal support wires **92** are embedded (see FIG. **9**). At least some of the wires **92** extend generally parallel to a longitudinal axis **94** of trocar body **82**. Wires **92** serve to form skirt **90** into an expanded funnel shape upon deployment of the surgical port assembly **80** in a patient.

[0109] Trocar body **82** is formed along an inner surface with a ledge or plate **96** defining an instrument opening **98** and a scope opening **100**. Plate **96** is rigidly secured to cylindrical insert portion **84** of annular body **82**. An ancillary second plate or disk **102** is rotatably and removably attached to the main plate **96** over opening **98**. A locking ring **104** may be provided (FIG. **8**) for releasably holding plate or disk **102** to plate **96** at opening **98**. Ancillary plate or disk **102** carries a pair of tubular fingers or cannulas **106** made of a flexible material and provided at free ends with respective sealing caps **108**. Fingers or cannulas **106** may be removably attached to plate or disk **102**. To that end, plate or disk **102** may be formed with a pair of outwardly extending sleeves **110** (FIG. **8**) insertable into tubular fingers or cannulas **106**. A third tubular sealing finger or cannula **112** is attached to main plate **96** over scope opening **100** for enabling the introduction of a

distal end portion of a laparoscope or other endoscope into a patient through port assembly **80**. Scope cannula **112** may have a luer fitting (not shown) for insufflation purposes. Tubular fingers or cannulas **106** and **112** extend in an upper direction away from plates **96** and **102** and are disposed only on an upper or outer side thereof, facing away from a patient during a surgical procedure. The lower or inwardly facing side of port assembly **80** is free of cannula parts.

[0110] Plate or disk **102** serves as a cannula carrier that is rotatably disposed in or at opening **98** for turning about an axis **114** preferably substantially parallel to main axis **94** of port assembly **80**.

[0111] Tubular fingers or cannulas **106** and **112** are flexible at least at a point of attachment to plates **102** and **96**, respectively, enabling a pivoting (about a transverse axis) and/or a swiveling (about a longitudinal axis) of surgical instruments (or an endoscope) inserted through the ports formed by tubular fingers or cannulas **106**, **112**. Fingers or cannulas **106**, **112** are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such finger or cannula and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such finger or cannula.

[0112] FIG. **6** shows an obturator shaft **118** and skirt **90** folded and tucked into a slot along shaft **118**. A knob (not shown) at the proximal or outer end of obturator shaft **118** is pushed to release skirt **90** from obturator shaft **118**. The obturator is then pulled out and discarded. A release and discard safety tab is shown at **120**.

[0113] FIGS. **10-12** depict a port assembly **80'** that is a modified version of port assembly **80** of FIGS. **6-8**. The same reference numerals are used in FIGS. **10-12** to designate the same parts as shown in FIGS. **6-8**. Instead of integral or unitary main plate **96**, port assembly **80'** has a removable main plate **122** that is releasably secured to cylindrical insertion portion **84** via a plurality of spring-loaded detents **124**. Main plate **122** sits on an inwardly extending shoulder **126** (or series of nubs) and is held thereto in a snap lock fit by the plurality of spring-loaded detents **124**.

[0114] As shown in FIGS. **13** and **14**, another trocar or surgical port assembly **130** comprises an annular body **132** attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. Annular body **132** includes a substantially oval insert portion **134** and a flange **136** at a proximal (closer to the surgeon) or outer end of the cylindrical insert portion. Insertion portion **134** is provided along an outer surface with a plurality of longitudinally spaced circular beads **138** and along an inner surface with a substantially annular or endless groove **140**. A skirt (not shown) may be attached to an inner or distal end **142** of cylindrical insert portion **134**.

[0115] Groove **140** receives an outer end of a rigid support or base plate **144** provided with three slots **146-148**. Central slot **147** is intended for insertion of a laparoscope in an abdominal operation, while lateral slots **146** and **148** are intended for the passage of instrument shafts. An ancillary second plate **150** made of elastomeric material having a dome shape is attached to the support or base plate **144** over opening slots **146-148**. Base plate **144** and ancillary plate **150** have a generally elongate or oval cross-section, as seen in FIG. **14**. Ancillary plate **150** carries three integrally formed tubular members or cannulas **152** (one provided with a luer fitting **154** for insufflation) made of flexible elastomeric material and

provided at free ends with respective sealing caps **156**. Tubular fingers or cannulas **152** extend in an upper direction away from plates **144** and **150** and are disposed only on an upper or outer side thereof, facing away from a patient during a surgical procedure. The lower or inwardly facing side of port assembly **130** is free of cannula parts.

[0116] Tubular fingers or cannulas **152** are flexible at least at a point of attachment to plate **150**, enabling a pivoting (about a transverse axis) and/or a swiveling (about a longitudinal axis) of surgical instruments (or an endoscope) inserted through the tubular fingers or cannulas. Fingers or cannulas **152** are each provided (for instance, in caps **156**) with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such finger or cannula and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such finger or cannula.

[0117] As shown in FIGS. **15-17**, a further trocar or surgical port assembly **160** comprises an annular body **162** attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. Annular body **162** includes a cylindrical insert portion **164** and a flange **166** at a proximal or outer end of the cylindrical insert portion. A skirt (not shown) may be attached to an inner or distal end **168** of cylindrical insert portion **164**.

[0118] A groove **170** provided in a widened section **172** of cylindrical insertion portion **164** permanently receives an outer periphery of a perforated support or base plate **174**. Plate **174** may be made of a rigid (e.g. metallic) or elastomeric material and is formed with three instrument openings **176** and a smaller insufflation opening **178**. Three elastomeric tubular fingers or cannulas **180** are connected to plate **174** and communicate with respective openings **176**. In the case of an elastomeric base plate **174**, cannulas **180** are formed integrally therewith. Tubular fingers or cannulas **180** are flexible at least at a point of attachment to plate **174**, enabling a pivoting and/or swiveling of surgical instruments (or an endoscope) inserted through the tubular fingers or cannulas. Fingers or cannulas **152** are each provided with at least one inner ring seal **182** for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such finger or cannula and at least one seal (e.g., a tricuspid valve at a lower end **184**) for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such finger or cannula.

[0119] Tubular fingers or cannulas **180** serve to seal the abdominal cavity during pneumoperitoneum and further serve to protect the patient's internal tissues, such as the abdominal wall tissues. Fingers or cannulas **180** extend only downwardly or inwardly away from support or base plate **174**, on the inner side of the trocar body **162**.

[0120] FIGS. **18** and **19** show a scheme for deploying the port assembly **160** of FIGS. **15-17**. A rigid mounting ring **186** is disposed on a skin surface **SS** over a patient's abdominal cavity **AC** and attached to the skin via sutures **188** and **190**. Sutures **188** and **190** are sewn at one end **192** to the patient and are tied at opposing ends to respective dual-hook members **194** that are upwardly inclined from mounting ring **186**. An outer periphery (not labeled) of flange **166** is slidably inserted into an annular groove **196** provided on an inner surface of mounting ring **186**. Cylindrical portion **164** of port assembly body **162** depends downwardly into the abdominal wall **AW** of a patient during a surgical procedure. Fingers or cannulas **180** extend through a portion of abdominal wall **AW** and into

an abdominal cavity **AC** of the patient. Trocar body **162** may be turned about a longitudinal axis **198** of port assembly **160**, while mounting ring **186** remains stationary relative to the patient, to facilitate the manipulation of laparoscopic instruments (not shown) whose shafts are inserted through respective fingers or cannulas **180**.

[0121] FIGS. **20** and **21** depict an alternative surgical access port assembly **200** comprising an annular body **202** attachable to a patient at an incision **NCSN** in a skin surface **SS** of the patient to facilitate deployment of instruments in the patient via the incision. Annular body **202** includes a mounting ring **204** fixed to an adhesive pad **206** that in turn is releasably adhered to skin surface **SS** about incision **NCSN**. Port assembly **200** further comprises a rigid plate **208** rotatably or rigidly secured to mounting ring **204** via a locking ring **210**. Plate **208** may be made of a rigid (e.g. metallic) or elastomeric material and is formed with three instrument openings **212** and a smaller insufflation opening (not shown). Three elastomeric tubular fingers or cannulas **214** are connected to plate **208** and communicate with respective openings **212**. In the case of an elastomeric base plate **208**, cannulas **214** are formed integrally therewith. Tubular fingers or cannulas **214** are flexible at least at a point of attachment to plate **208**, enabling a pivoting and/or swiveling of surgical instruments (or a scope) inserted through the tubular fingers or cannulas. Fingers or cannulas **214** are each provided with at least one inner ring seal (not shown) for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such finger or cannula and at least one seal (e.g., a tricuspid valve at a lower end **216**) for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such finger or cannula.

[0122] Tubular fingers or cannulas **214** serve to seal the abdominal cavity **AC** during pneumoperitoneum in a laparoscopic procedure and further serve to protect the patient's internal tissues, such as the tissues of abdominal wall **AW**. Fingers or cannulas **214** extend only downwardly or inwardly away from support or base plate **208**, on the inner side of the body **202**. Fingers or cannulas **214** can accommodate instrument shafts that are fully flexible as well as instruments shaft that have preformed rigid shapes, including C-shaped and S-shaped portions.

[0123] As illustrated in FIGS. **22** and **23**, another trocar or surgical port assembly **220** comprises an annular body **222** attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision. Annular body **222** includes a cylindrical insert portion **224** and a flange **226** at a proximal or outer end of the cylindrical insert portion. A skirt **228** is attached to an inner or distal end **230** of cylindrical insert portion **224**. Skirt **228** includes a flexible web **232** and a stent wire **234** attached to the web (e.g., inserted into a cavity or pocket, not shown, formed in the web). Wire **234** has a zig-zag or snaking configuration and serves to spring-bias web **232** into a conical or funnel-shaped open configuration shown in FIG. **23**. Trocar or surgical port assembly **220** additionally comprises a purse-string closure element **236** disposed about a distal or free end of skirt **228** for the skirt in a closed or pointed insertion configuration (FIG. **22**) in opposition to the opening force exerted by wire **234**. Purse string closure element **236** is connected to a deployment knob or button **237** via an obturator shaft **238**. Upon insertion of folded or pointed skirt **228** (FIG. **22**) and cylindrical insert portion **224** into an abdominal wall of a patient, the user actuates knob or button **237** to

release purse-string closure element **236**, thereby enabling the opening of skirt **228** into the opened funnel-shaped use configuration (FIG. **23**) under the biasing force exerted by wire **234**.

[**0124**] Trocar or surgical port assembly **220** of FIGS. **22** and **23** comprises additional structure described hereinabove with reference to FIGS. **10-12**. The same reference numerals are used in FIGS. **10-12** and **22, 23** to designate identical structures. In FIGS. **22** and **23**, fingers or cannulas **106** and **112** are additionally shown with sealing structures **239**.

[**0125**] As shown in FIGS. **24** and **25**, another trocar port assembly **240** comprises a body member (not separately designated) including a funnel-shaped upper or proximal portion **242** and a cylindrical lower or distal portion **244**. Upper or proximal portion **242** is provided along a conical outer surface (not separately labeled) with a plurality of laterally grooved cylindrical posts **246** for receiving tie-down sutures (not shown) to anchor the trocar port assembly **240** to a patient at an incision site (such as the umbilicus). Cylindrical portion **244** is provided along an outer surface with a plurality of annular ribs **247** for enhancing a seating of the cylindrical portion in an incision. On an inner surface and at a bottom or distal end, cylindrical portion **244** is provided with a pair of opposing generally arcuate teeth or prongs **248** that serve to hold or lock a laparoscope or other endoscope in a position at the outlet end of cylindrical portion **244**. During a surgical procedure, laparoscopic instrument shafts (not shown) longitudinally traverse flexible fingers or cannulas (not shown) that pass through an open area **249** in the bottom or distal end of cylindrical portion **244**.

[**0126**] FIGS. **26-28** illustrate a trocar skirt **250** comprising a rigid support ring **252**, a multiplicity of substantially rigid strips or bands **254** connecting to one another via elastomeric sections **256**. Rigid strips **254** are arranged in an annular configuration and are concave in a radially outward direction. Elastomeric sections **256** may be angularly or circumferentially spaced portions of a single web or separate strips. Rigid strips or bands **254** are pivotably attached at an upper or proximal end to a mounting ring **258** in turn fastened to support ring **252**. The pivotable attachment of strips or bands **254** to mounting ring **258** may take the form of a so-called living hinge, for example, wherein mounting ring **258** and strips or bands **254** are integrally made of a substantially rigid polymeric material that is sufficiently thin at connecting points to enable a pivoting and/or swiveling motion.

[**0127**] Elastomeric sections **256** of trocar skirt **250** are capable of stretching sufficiently to permit a full range of instrument and scope motion during a surgical procedure while protecting a patient's abdominal tissues. Trocar skirt **250** has a corset shape, with a waist diameter that may alternately increase and decrease during instrument manipulation.

[**0128**] Trocar skirt **250** is attached to an underside of a trocar assembly such as the port assemblies described hereinabove with reference to FIGS. **1-14**.

[**0129**] As shown in FIGS. **29-32**, a trocar or surgical port assembly **260** comprises an upper or proximal body **262** and a skirt **264**. Body **262** is made of a flexible elastomeric material and includes a cylindrical portion **266**, a dome **268** and a circumferential or annular disk-shaped flange **270**. Dome **268** is formed with a plurality of openings **272** for the passage of laparoscopic or thoracoscopic instrument shafts (not shown) and a laparoscope or endoscope (not shown). Openings **272** are formed with slit-type seals for preventing the loss of pneumoperitoneum both when instruments shafts pass

through the openings and when there are no instruments traversing the openings. Dome **268** is further formed with a tubular stub **274** that receives a distal end of an insufflation tube **276**. Skirt **264** includes a cylindrical proximal sleeve **277** that fits over and is functionally connected to cylindrical portion **266**. Skirt **264** further includes a resilient frusto-conical portion **278** that is folded and preferably held to an obturator shaft during insertion through an incision.

[**0130**] FIGS. **33-36** depict a trocar or surgical port assembly **280** including a body **282** having a cylindrical portion (not separately designated) formed by a plurality of cylindrical sections or flaps **284** swingably connected to a ring-shaped base member **285** in the nature of a flange to the cylindrical portion. Flaps **284** are made of at least a substantially rigid material and each include plural longitudinally spaced arcuate ribs **286** along a respective outer surface. Flaps **284** each have a hinge projection **288** that is inserted through a slot **290** in base member **285**. Projections **288** are hooked, to prevent a disassociation of flaps **284** from base member **285**. Base member **285** is provided with a plurality of upwardly or proximally extending arcuate flange sections **292** that are received into a distal or lower end of a cylindrical body of a flexible-cannula port member such as the domed members of FIGS. **3** and **13, 14**.

[**0131**] Surgical port assembly **280** further comprises a skirt **294** including a cylindrical proximal sleeve **296** that fits over flaps **284** and is thereby functionally connected to body **282**. Skirt **294** further includes a resilient frusto-conical portion **298** that is folded and preferably held to an obturator shaft during insertion through an incision.

[**0132**] As shown in FIGS. **37-39**, yet another trocar port assembly **300** comprises a body member (not separately designated) including a funnel-shaped upper or proximal portion **302** and a cylindrical lower or distal portion **304**. Upper or proximal portion **302** is provided along a circular rim **306** with a plurality of suture anchors **308** in the form of substantially flat, generally triangular upwardly inclined posts for receiving tie-down sutures (not shown) to anchor the trocar port assembly **300** to a patient at an incision site (such as the umbilicus). Upper or proximal portion **302** is additionally provided along circular rim **306** with a plurality of rectangular recesses **310** for receiving mating projections on an obturator (see FIGS. **45-47**). Cylindrical portion **304** is provided along an outer surface with a helical thread or one or more outwardly extending ribs **312** for enhancing a sealed seating of the cylindrical portion in an incision.

[**0133**] Port assembly **300** further includes, at a bottom or distal end (not separately enumerated) of cylindrical portion **304**, an elastomeric "pants" member **314** illustrated separately in FIG. **40**. Pants member **314** includes a cannula carrier **316** and cannula members in the form of three elastomeric legs or downwardly depending fingers **318, 319, 320** that are each provided with an inwardly extending ring seal **322** and a tricuspid seal **324**. Leg **320** is dedicated to the passage of a scope (not shown), while the remaining two legs **318, 319** have a wider and deeper entrance space or antechamber **326** allowing an increased range of instrument motion and an easier crossing of the instrument shafts (not shown).

[**0134**] Legs or fingers **318-320** are provided internally with polytetrafluoroethylene stiffening tubes **328** that provide strength and rigidity and reduce friction. Stiffening tubes **328** facilitate the withdrawal of laparoscopic instrument shafts (including scopes) by preventing the entrainment of the

instrument shafts to the legs or fingers 318-320. Accordingly, stiffening tubes 328 prevent a turning inside-out of legs or fingers 318-320.

[0135] Legs, fingers or cannulas 318-320 are flexible in a region of attachment to domed cannula carrier 316, whereby the legs/fingers/cannulas may be temporarily bent into a parallel configuration for insertion into a patient through an incision with the aid of an obturator (see FIGS. 45-47).

[0136] As shown in FIG. 40, cannula carrier 316 of pants member 314 includes multiple insufflation ports 330 and 332 providing an option of connecting insufflation hoses (not shown) at a center (330) or a periphery (332).

[0137] As depicted in FIGS. 41-44, a similar trocar port assembly 340 comprises a body member 341 including a rigid conical upper or proximal portion 342 and a cylindrical lower or distal portion 344. Upper or proximal portion 342 is provided along a circular rim 346 with a plurality of suture anchors 348 in the form of substantially flat, generally triangular upwardly inclined posts for receiving tie-down sutures (not shown) to anchor the trocar port assembly 340 to a patient at an incision site (such as the umbilicus). Upper or proximal portion 342 is additionally provided along circular rim 346 with a plurality of rectangular recesses 350 for receiving mating projections on an obturator (see FIGS. 45-47). Cylindrical portion 344 is provided along an outer surface with a helical thread or one or more outwardly extending ribs 352 for enhancing a sealed seating of the cylindrical portion in an incision.

[0138] Port assembly 340 further includes, at a bottom or distal end (not separately enumerated) of cylindrical portion 344, an elastomeric "pants" member 354 illustrated separately in FIG. 44. Pants member 354 includes a domed cannula carrier 356 and cannula members in the form of three elastomeric legs or downwardly depending fingers 358, 359, 360 that are each provided with (i) a ring seal 322 in the form of an annular bead and (ii) a tricuspid insufflation seal 324. Legs 358-360 are identical and interchangeably used for the passage of a scope (not shown) or surgical instrument shafts (not shown). Legs 358-360 are circumferentially equispaced and outwardly inclined in a mutually flared configuration.

[0139] Legs or fingers 358-360 are lined with polytetrafluoroethylene stiffening tubes 362 that strengthen and rigidify the major portions of the legs and additionally reduce friction between the instrument shafts and the legs. During the withdrawal of laparoscopic instrument shafts (including scopes) from legs or fingers 358-360, stiffening tubes 362 prevent the entrainment of the instrument shafts to the legs or fingers. Thus, stiffening tubes 362 prevent legs or fingers 358-360 from turning inside out.

[0140] Legs, fingers or cannulas 358-360 are flexible in a region of attachment to domed cannula carrier 356, thereby enabling a temporary deformation of the cannulas into a parallel configuration for insertion into a patient through an incision with the aid of an obturator (see FIGS. 45-47). Legs, fingers or cannulas 358-360 are provided at an upper or proximal end with circumferential ring seals 361 and at a lower or distal end 363 with tricuspid seals.

[0141] As depicted in FIGS. 44, cannula carrier 356 of pants member 354 may include a central insufflation port 364 with an outlet (not shown) on an outer or distal surface (not separately designated) of domed cannula carrier 356. Alternatively or additionally, as depicted in FIGS. 41 and 43, an

insufflation tube 366 with a luer lock 368 may extend through domed carrier 356 and alongside a leg 360, as indicated at 369.

[0142] FIGS. 45-47 illustrate an obturator 370 for deployment of a surgical port assembly such as assembly 300 or 340 through a skin surface of a patient. Obturator 370 comprises a disk-shaped body member 372, locking formations 374 in the form of generally rectangular keys projecting radially outwardly from body member 372 and releasably engageable with cooperating locking formations on port assembly 300 or 340, namely rectangular recesses 310 or 350. At least two finger contact surfaces 376 and 378 are provided on body member 372, the finger contact surfaces facing in substantially opposed directions, for enabling manual application of a torque to the body member. In the illustrated embodiment, finger contact surfaces 376 and 378 are formed on respective upstanding tabs (not separately designated) disposed along a diameter of body member 372. Obturator 370 further comprises at least one elongate rigid member 380 extending away from the body member on a side thereof opposite finger contact surfaces 376 and 378, for penetrating through a skin surface of a patient.

[0143] In the illustrated embodiment, rigid penetrating member 380 is one of three parallel elongate rigid members 380, 381, 382 extending away from body member 372 on a side thereof opposite finger contact surfaces 376 and 378, for penetrating through a skin surface. Rigid members 380-382 insert into respective downwardly depending tubular leg or finger members 318-320 or 358-360 of port assembly 300 (FIGS. 37-40) or 340 (FIGS. 41-44). Rigid members 380-382 serve to stiffen and hold tubular leg or finger members 318-320 or 358-360 when port assembly 300 or 340 is being deployed at the onset of a minimally invasive surgical procedure, for example, a laparoscopic or thoracoscopic operation.

[0144] Disk or body member 372 is formed along a periphery with one or more cutouts 384 serving as insufflation tube exit paths.

[0145] Obturator 370 allows for easy insertion of any trocar or port assembly having three distal leg or finger seals. After the trocar or instrument port assembly is in place, the obturator is simply pulled out of the port assembly and the minimally invasive laparoscopic or thoracoscopic procedure can begin.

[0146] As shown in FIGS. 48-51, a surgical port assembly 390 comprises a body member 392 that includes a rigid conical upper or proximal portion 394 and a cylindrical lower or distal portion 396. Cylindrical portion 396 is formed along an outer surface with a helical sealing thread or one or more outwardly extending ribs 398.

[0147] Upper or proximal portion 394 is provided along a circular rim 400 with a plurality of suture anchors 402 in the form of substantially flat, upwardly inclined posts for receiving tie-down sutures (not shown) to anchor the trocar port assembly 390 to a patient at an incision site (such as the umbilicus). Upper or proximal portion 394 is additionally provided along circular rim 400 with a plurality of rectangular recesses 406 for receiving mating projections or keys 374 on obturator body member 372 (see FIGS. 45-47).

[0148] Surgical port assembly 390 further comprises an elastomeric skirt 408 attached to a distal edge of cylindrical portion 396. Skirt 408 provides a protective barrier between laparoscopic instrument shafts (as well as their operative tips) and abdominal wall tissues. At an upper or proximal end, skirt 408 is formed with a transverse membrane 410 provided with

a pair of upwardly extending sleeves **412** for receiving laparoscopic instruments. A downwardly extending third sleeve **414** is provided for the passage of a scope. Sleeves **412** and **414** are provided at upper ends with circumferential ring seals **416** engageable with instrument shafts during an operation. In addition, membrane **410** is formed with tricuspid seals **418** at the lower ends of sleeves **412**. Sleeve **414** also has a tricuspid seal at a lower end.

[0149] An insufflation tube **419** with a luer lock **419'** extends inside conical upper portion **394** and is attached to membrane **410** so as to provide a fluid communication pathway therethrough.

[0150] As depicted in FIG. 52, a laparoscopic trocar or port assembly **420** comprises a body member **422** including a funnel-shaped upper or proximal portion **424** and a cylindrical lower or distal portion **426**. Upper or proximal portion **424** is provided along a circular rim **428** with a plurality of suture anchors **430** in the form of substantially flat, upwardly inclined posts with clamping slots or indentations **432** at rim **428** for receiving tie-down sutures (not shown) to anchor the trocar port assembly **420** to a patient at an incision site (such as the umbilicus). Upper or proximal portion **424** is additionally provided along circular rim **428** with a plurality of rectangular recesses **434** for receiving projections or keys **374** of obturator **370** (see FIGS. 45-47). Cylindrical portion **426** is provided along an outer surface with a helical thread or one or more outwardly extending ribs **435** for enhancing a sealed seating of the cylindrical portion in an incision.

[0151] Port assembly **420** further includes, at a bottom or distal end (not separately enumerated) of cylindrical portion **426**, an elastomeric "pants" member **436**. Pants member **436** includes a base or cannula carrier **438** and tree cannula members in the form of elastomeric legs or downwardly depending fingers **440** and **442** (only two shown). Two legs **442** are each provided with an inwardly extending ring seal (not shown) and a tricuspid seal at a lower or distal end **444**. Leg **440** is dedicated to the passage of a scope (not shown) and is provided with a dedicated cannula **446** having a tubular member **448** that is inserted into leg **440** and rests at a lower end against a shoulder **448** on an inner surface (not designated) of leg **440**. At an upper or proximal end, cannula **446** has a valve assembly **450** including a tricuspid seal **452**, a ring seal **454**, and an insufflation port **456**. Cannula **446** may be removably inserted into leg **440** and held there by a friction fit.

[0152] Legs or fingers **442** may be provided internally with stiffening tubes (not shown) that provide strength and rigidity and reduce friction. Legs **442** are flexible at least in a region of attachment to carrier **438**, whereby the legs/fingers/cannulas may be temporarily bent into inclined attitudes in response to forces exerted via laparoscopic instruments shafts during a surgical procedure.

[0153] As illustrated in drawings described hereinabove, a skirt for a trocar or surgical port assembly for minimally invasive surgery has a 360° circumferential extent. However, it is possible for a trocar or port assembly skirt to extend less than 360° around. This can be particularly useful where the trocar or port assembly is purposefully or inadvertently dislodged from a fully inserted position. In that event, a partial skirt with a longitudinal gap or slot can contract and close the slot, thereby permitting further instrument movements while still providing protection to abdominal wall tissues.

[0154] A partial skirt may provide for a better range of motions than a full skirt. When instruments are at their extreme lateral positions, a full skirt may restrict the instru-

ments' movements, while partial skirt will not. Moreover, in practice the skirt must be attached (glued, etc.) to the rigid portion of the port. A full skirt will occupy the entire circumference of the cylindrical portion of the port assembly body member, while a partial skirt will occupy only a section of the cylindrical portion. The consequential spatial reduction may be significant when a small cavity wall incision is necessary or desirable. Finally, a partial skirt might be less expensive to manufacture.

[0155] As disclosed herein, a skirt may be used in combination with seal-containing cannulas or fingers that extend either above or below the body of a surgical port assembly. In the latter case, one or more downwardly depending cannulas or leg members may be used in combination with a full or partial skirt. The cannulas or fingers may be shortened while still carrying the sealing elements, while the skirt serves the tissue protection function.

[0156] A cannula module pursuant to the present disclosure may comprise a cannula-carrying member and a plurality of cannulas, fingers, or legs attached thereto. As discussed hereinabove, the carrier member may be dome-shaped above or below the body member of a surgical port assembly. The cannula module may be removably attached to a port assembly body member to enable switching of one cannula module with another during a surgical procedure, depending on specific exigencies as they arise. Thus, an "octopus" module with two legs (for a scope and one larger instrument) could replace a module with three legs or cannulas. When a cannula module is removed, the opening in the body member could be used for tissue evacuation or other procedure that requires a large access opening. Pneumoperitoneum is quickly re-established upon connection of a new cannula module. A temporary port plug fitting into the opening of the body member (e.g., into a cylindrical portion) may be provided to minimize this inconvenience. A plug minimizes or eliminates gas leakage from the abdomen of the patient during an exchange of the instruments.

[0157] The present invention can accommodate special hand instruments where the portion of the instrument shaft traversing the port assembly has a smaller diameter than the distal and/or proximal portion. As illustrated in FIG. 53, a laparoscopic instrument **460** includes a handle **462** with actuators or controls **464** and **466** and an elongate shaft **468**. Shaft **468** includes an enlarged distal end portion **470** incorporating operative components (not shown), a thin middle section **472** and an enlarged proximal portion **474** connected to handle **462**. Such a terminally enlarged instrument **460** can function with a detachable "octopus" with a special "C-shaped" channel. The instrument shaft **468** is sealed between the "C" and the internal wall of the funnel. The smaller diameter cross-section of middle section **472** allows one to maximize the range of motion that is limited by the port's internal diameter. Such an instrument **460** can serve to free up as much space in the restricted area as possible. The longitudinal cross-section of the instrument shaft **468** has an hour-glass (thin waist) configuration. A seal is established by the instrument seal(s)—one or several—which are located inside the cannula and hug the instrument tightly. Since the seals are very flexible, these would not restrict (seals will be deflected) the movements of the larger diameter sections (distal and proximal), but will not allow for gaps between the seals and the central or middle section **472** of the instrument shaft **468**.

[0158] A surgical port assembly as described herein may be provided with a built-in or integrated endoscope 476, as depicted in FIGS. 54 and 55. A distal portion 478 of a scope arm 480 extending from an underside of a port assembly body member 482 is flexible and incorporates digital chip technology such as a charge-coupled device (not shown) at a distal end 484. In this design, only a small electrical cable need pass through the body member 482 of the surgical port assembly at the patient interface or skin surface, thereby reducing the scope's impact on the "effective" cross-section of the port and improving on the degree of motion. The built-in camera is maneuverable via cables (not shown) in the bendable shaft or arm 480. The cables may extend through the port's body member 482 to the proximal side thereof. Alternatively, orientation control may be effectuated wirelessly. In the latter case, a wireless receiver (not shown) may be integrated into the port body member 482 or the distal end portion 478 of scope arm or shaft 480. Motors (not shown) may be provided in scope arm 480 for bending distal end portion 478 in response to incoming wireless control signals.

[0159] As shown in FIGS. 54 and 55, scope arm or shaft 480 has a proximal end portion 486 that extends along a funnel-shaped portion 488 of body member 482 and is permanently or removably connected thereto. Specifically, proximal portion 486 passes through a sleeve 490 attached to funnel-shaped body portion 488. Alternatively, proximal shaft portion 486 may be partially or completely embedded in the wall of funnel-shaped body portion 488. Proximal shaft portion 486 is connected or connectable to an endoscope functional module 492 that may carry bending actuators or control knobs (not illustrated), a light source (not illustrated), electrical cables (not illustrated) for connecting to a video monitor, etc.

[0160] An integrated scope as shown in FIGS. 54 and 55 provides the required image using as little space as possible in the space-restricted area, that is, at the patient interface or skin surface. It is to be noted that rigid laparoscopes with all their straight proximal shafts substantially occupy space above the cannula holder or port assembly and thus interfere with the manipulation of "working" instruments. Existing flexible endoscopes do not provide sufficient visualization and are too fragile and too expensive. The design described above with respect to FIGS. 54 and 55 overcome these drawback.

[0161] As depicted in FIGS. 56-59, a thoracic surgical port 500 comprises a downwardly tapering, substantially flexible, upper or proximal part 502 and an upwardly tapering, substantially flexible lower or distal part 504. During use, upper part 502 is located subcutaneously, while lower part 504 extends in between the ribs of a patient into a pleural space. A substantially rigid ring-like structure 506 is located, during use of surgical port 500, on top of the patient's ribs (not shown). Ring structure 506 surrounds an interface or junction between upper part 502 and lower part 504. Upper part 502 is smaller than lower part 504. This allows one to make a smaller skin incision. Lower part 504 is larger and is accommodated in a slightly larger muscle-splitting incision (not shown) between ribs. A flexible membrane 508 is located inside the port at the level of ring structure 506. Membrane 508 must be located in the proximity of the ribs—the restriction zone—in order to maximize the range of instrument freedom. Membrane 508 carries a variety of openings 510 for passage of the instruments (not shown). Membrane 508 and multiple openings 510 are needed (instead of one big opening) to provide the instruments with individual pivot points and individual

compartments. This configuration improves surgeon ergonomics and minimizes the interference of instruments with each other. Rigid ring structure 506, sitting atop the ribs, provides stability of the port 500. Ring structure 506 does not slide into the chest and provides pivot points for the instruments. Ring structure 506 sits in a soft tissue pocket created by a surgeon with gentle finger dissection just above the patient's ribs. Also, in combination with a smaller skin incision, ring structure 506 eliminates the need for fixing the port 500 to the patient's chest. Port 500 is mobile but stable in the deployed location.

[0162] Ring structure 506 is a part of the entire thoracic port unit 500 and does not become detached from the rest of the unit when the unit is inserted in place. Ring structure 506 can be attached to upper part 502 and/or lower part 504 or to neither of those parts (attached instead to horizontal membrane 508), depending on manufacturing needs.

[0163] Upper part 502 and lower part 504 can have different durometer values. Upper and lower parts 502 and 504 can have the same flexibility, a similar flexibility, or a substantially different flexibility depending on the needs of the operator and the procedure. Upper and lower parts 502 and 504 can be permanently glued to one another during manufacture or could be manufactured (molded) as a single integral unit. Upper and lower parts 502 and 504 can be slidably attached to each other. For example, (1) lower part 504 may slide into upper part 502, which carries the rigid ring 506, (2) upper part 502 may slide into lower part 504, which carries the rigid ring 506, (3) upper and lower parts 502 and 504 may slide into a horizontal plate (a rigid membrane 508) that has openings 510 for the instruments and is surrounded by the rigid ring 506.

[0164] In any event, the rigid ring structure 506 sits on top of the patient's ribs. There is no need to fix the port 500 to the surrounding tissues, either with sutures of some other connectors. The port assembly 500 will stay in place.

[0165] As depicted in FIG. 59, a rigid ring 512 seated inside a hollow flange 514 may form ring structure 506. Flange 514 is continuous with upper part 502 and membrane 508.

[0166] Although the invention has been described in terms of particular embodiments and applications, one of ordinary skill in the art, in light of this teaching, can generate additional embodiments and modifications without departing from the spirit of or exceeding the scope of the claimed invention. Accordingly, it is to be understood that the drawings and descriptions herein are proffered by way of example to facilitate comprehension of the invention and should not be construed to limit the scope thereof.

What is claimed is:

1. A surgical port assembly comprising:

- a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having a main axis oriented substantially transversely to the patient's skin surface upon disposition of said body in the incision;
- a main first plate mounted to said body substantially transversely to said axis, said first plate having a first opening and a second opening;
- a second plate rotatably disposed in said first opening for turning about an auxiliary axis substantially parallel to said main axis;
- at least one first tubular member attached to said second plate and extending in at least one direction away from said second plate; and

a second tubular member attached to said first plate at said second opening extending in at least one direction away from said first plate.

2. The port assembly defined in claim 1 wherein said body has an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure, said first tubular member extending only upwardly or outwardly away from said second plate, on the outer side of said body.

3. The port assembly defined in claim 2 wherein said first tubular member is one of a plurality of first tubular members all attached to said second plate and extending only upwardly or outwardly away from said second plate, on the outer side of said body.

4. The port assembly defined in claim 3 wherein at least one of said first tubular members is flexible at least at a point of attachment to said second plate, enabling a pivoting and a swiveling at said second plate of a surgical instrument inserted through said at least one of said first tubular members.

5. The port assembly defined in claim 3 wherein said first tubular members are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such first tubular member and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such first tubular member.

6. The port assembly defined in claim 1 wherein said body has an outer side disposable outside of the patient and an inner side disposable inside the patient, inwardly of the patient's skin surface during a surgical procedure, said first tubular member extending only downwardly or inwardly away from said second plate, on the inner side of said body.

7. The port assembly defined in claim 6 wherein said first tubular member is one of a plurality of first tubular members all attached to said second plate and extending only downwardly or inwardly away from said second plate, on the inner side of said body.

8. The port assembly defined in claim 7 wherein at least one of said first tubular members is flexible at least at a point of attachment to said second plate, enabling a pivoting and a swiveling at said second plate of a surgical instrument inserted through said at least one of said first tubular members.

9. The port assembly defined in claim 7 wherein said first tubular members are each provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such first tubular member and at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such first tubular member.

10. The port assembly defined in claim 1 wherein said first tubular member is provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses said first tubular member, said first tubular member being provided with at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing said first tubular member.

11. The port assembly defined in claim 1 wherein said second plate is dome-shaped.

12. The port assembly defined in claim 1 wherein said second plate is removably attached to said first plate.

13. A surgical port assembly comprising:

a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and

at least one tubular member depending downwardly or inwardly from said body so that said tubular member is disposed only on said inner side of said body.

14. The port assembly defined in claim 13 wherein said tubular member is one of a plurality of tubular members all depending downwardly or inwardly from said body so that said tubular members are disposed only on said inner side of said body.

15. The port assembly defined in claim 14 wherein each of said tubular members is provided with at least one seal for maintaining pneumoperitoneum when a surgical instrument shaft longitudinally traverses such tubular member, each of said tubular members being provided with at least one seal for maintaining pneumoperitoneum in the absence of a surgical instrument shaft longitudinally traversing such tubular member.

16. The port assembly defined in claim 15 wherein said tubular members are each provided along an inner surface with a rigid sleeve.

17. The port assembly defined in claim 16 wherein said tubular members are each pivotable about a point of attachment to said body.

18. The port assembly defined in claim 16 wherein said body has a funnel shape, said tubular members being attached to said funnel shape at an apical end thereof.

19. The port assembly defined in claim 14 wherein said outer side of said body is free of upwardly or outwardly extending tubular cannula members.

20. The port assembly defined in claim 14 wherein said body comprises a rim portion and a plate surrounded by said rim portion, said tubular members being connected to said plate and extending only on an inner side of said plate.

21. The port assembly defined in claim 13 wherein said tubular member is detachably attached to said body.

22. The port assembly defined in claim 21 wherein said tubular member is fixed to a coupling member that in turn is detachably attached to said body at an aperture in said body, further comprising a plug to temporarily seal said aperture upon removal of said coupling member from said aperture.

23. The port assembly defined in claim 13 wherein said tubular member carries a camera at a free end, further comprising directional control means for changing an orientation of said free end and said camera.

24. A surgical port assembly comprising:

a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and

a funnel-shaped extension on said outer side of said body.

25. An obturator for deployment of a surgical port assembly through a skin surface, comprising:

a body member;

locking formations on said body member releasably engageable with cooperating locking formations on the port assembly;

at least two finger contact surfaces on said body member, said finger contact surfaces facing in substantially opposed directions, for enabling manual application of a torque to said body member; and

at least one elongate rigid member extending away from said body member on a side thereof opposite said finger contact surfaces, for penetrating through a skin surface.

26. The obturator defined in claim **25** wherein said rigid member is one of a plurality of parallel elongate rigid members extending away from said body member on a side thereof opposite said finger contact surfaces, for penetrating through a skin surface.

27. A surgical access assembly comprising the obturator of claim **26** and further comprising the surgical port assembly, said port assembly including: a port assembly body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and a plurality of elastomeric tubular members all depending downwardly or inwardly from said port assembly body so that said tubular members are disposed only on said inner side of said body, said tubular members receiving respective ones of said elongate rigid members.

28. The obturator defined in claim **25** wherein said locking formations include projections on said body member and recesses on said port assembly.

29. The obturator defined in claim **25** wherein said body member comprises a disk, said disk being provided with at least one cutout for enabling passage of an insufflation tube.

30. A surgical port assembly comprising:

a body member having a first opening and a separate second opening through which surgical instruments may pass;

a cannula carrier disposed in said first opening, said cannula carrier being attached to a plurality of first tubular members each provided with at least one instrument seal; and

at least one second tubular member attached to said body member at said second opening, said second tubular member being provided with a seal, said cannula carrier and said first tubular members being rotatably attached to said body member for turning about an axis substantially parallel to a main axis of said body member.

31. The surgical port assembly defined in claim **30** wherein said second tubular member is fixed with respect to said body member.

32. The surgical port assembly defined in claim **30** wherein said cannula carrier and said first tubular members are removably attached to said body member.

33. The surgical port assembly defined in claim **30** wherein said first tubular members extend upwardly or in a proximal direction away from said cannula carrier.

34. A surgical port assembly comprising:

a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and

an at least partially flexible skirt member attached to said body on said inner side thereof.

35. The port assembly defined in claim **34**, further comprising a trocar member insertable through said body and traversing said body during a deployment procedure, said skirt member having a collapsed or folded-in insertion configuration, said skirt member being releasably attached to said trocar member during said deployment procedure.

36. The port assembly defined in claim **34** wherein said skirt member has a tapered expanded configuration wherein a free end of said skirt member, opposite said body member, has a larger transverse dimension than an end of said skirt attached to said body member.

37. The port assembly defined in claim **34** wherein said skirt member includes a flexible web member and a resilient support wire connected to said web member for expanding said web member from a folded-in insertion configuration to an expanded use configuration.

38. The port assembly defined in claim **34** wherein said skirt member includes flexible strip areas interleaved or alternating with more rigid areas.

39. The port assembly defined in claim **34** wherein said body includes a cylindrical portion, a dome on an upper or proximal side of said cylindrical portion, and a circumferential or annular disk-shaped flange, said dome being formed with a plurality of openings for passage of laparoscopic or thoracoscopic instrument shafts and a laparoscope or endoscope, said skirt member including a cylindrical section engaging said cylindrical portion of said body and further including a tapered or conical portion.

40. A surgical port element comprising a skirt made at least partially of flexible material and means for attaching the skirt to a cannula or instrument holder in turn removably attachable to a patient at an opening in a skin surface, said skirt having a folded-in insertion configuration and an expanded use configuration.

41. A surgical port component comprising: a body including a cylindrical portion formed by a plurality of cylindrical sections or flaps, said body further including a ring-shaped base member, said cylindrical sections or flaps being swingably coupled to said base member, said cylindrical sections or flaps being made of at least a substantially rigid material, base member being provided with at least one upwardly or proximally extending arcuate flange section receivable into a distal or lower end of a cylindrical body of a flexible-cannula port member.

42. The surgical port component defined in claim **41**, further comprising an at least partially flexible skirt including a cylindrical proximal sleeve fitting over said cylindrical sections or flaps, thereby coupling said skirt to said body.

43. A surgical port assembly comprising:

a body member attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body member having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and

a flexible scope arm connected to said body member and extending from an underside of said body member, said scope arm incorporating a digital camera at a distal end, said camera being maneuverable via cables in said scope arm, said scope arm being operatively connectable at a proximal end to an endoscope functional module enabling operation of said camera.

44. A surgical port assembly comprising:

a downwardly tapering, substantially flexible, upper or proximal part;

an upwardly tapering, substantially flexible lower or distal part connected to said upper or proximal part, said lower or distal part being extendable in between the ribs of a patient into a pleural space;

a substantially rigid ring-like structure disposed proximate a junction between said upper or proximal part and said lower or distal part, said structure being locatable, during use of the port assembly, on top of a patient's ribs; and

a flexible membrane proximate said structure, said membrane having a plurality of openings for passage of the instruments.

45. A surgical port assembly comprising:

a rigid mounting ring disposable on and releasably attachable a patient's skin surface;

a body member attachable to said ring to depend downwardly therefrom through an incision in the patient's skin surface to facilitate deployment of instruments in the patient via the incision, said body member having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure, said body member being

rotatably attachable to said ring for turning about an axis oriented perpendicularly to a plane defined by said ring; and

a cannula unit attachable to said body member and carrying a plurality of cannulas.

46. A surgical port assembly comprising:

a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure; and

a cannula unit including an elastomeric dome-shaped base and a plurality of upwardly extending tubular members or cannulas.

47. A surgical port assembly comprising:

a body attachable to a patient at an incision in a skin surface of the patient to facilitate deployment of instruments in the patient via the incision, said body having an outer side facing away from the patient and an inner side facing inwardly of or towards the patient's skin surface during a surgical procedure, said body having an outer surface disposable in contact with the patient; and

at least one outwardly extending rib or thread on said outer surface.

* * * * *

专利名称(译)	腹腔镜端口组件		
公开(公告)号	US20080255519A1	公开(公告)日	2008-10-16
申请号	US12/079599	申请日	2008-03-27
[标]申请(专利权)人(译)	PNAVEL SYST		
申请(专利权)人(译)	PNAVEL系统公司.		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	PISKUN GREGORY BATTLES CHRISTOPHER RENDE FRANK ABRAMS MICHAEL SHIKHMAN OLEG		
发明人	PISKUN, GREGORY BATTLES, CHRISTOPHER RENDE, FRANK ABRAMS, MICHAEL SHIKHMAN, OLEG		
IPC分类号	A61B17/94 A61B17/34		
CPC分类号	A61B1/3132 A61B1/32 A61B17/3421 A61B17/3423 A61B2017/3427 A61B2017/3445 A61B2017/3447 A61B2017/3466 A61B2017/349 A61B17/3439		
优先权	60/920935 2007-03-30 US		
其他公开文献	US8888695		
外部链接	Espacenet USPTO		

摘要(译)

公开了腹腔镜套管针组件的各种实施例。端口组件包括插入部件，其在部署点处保护患者的组织。端口组件包括用于在使用器械和未插入器械时保持气腹的密封件。

