




US 20170071597A1




(19) **United States**(12) **Patent Application Publication**
Gorski et al.(10) **Pub. No.: US 2017/0071597 A1**(43) **Pub. Date: Mar. 16, 2017**(54) **LAPAROSCOPIC SUTURING SYSTEM****Publication Classification**(71) Applicant: **Applied Medical Resources Corporation**, Rancho Santa Margarita, CA (US)(51) **Int. Cl.**
A61B 17/04 (2006.01)
A61B 17/06 (2006.01)(72) Inventors: **Steven Gorski**, Costa Mesa, CA (US);
Scott V. Taylor, Rancho Santa Margarita, CA (US); **Kimball B. McGinley**, Rancho Santa Margarita, CA (US)(52) **U.S. Cl.**
CPC **A61B 17/0469** (2013.01); **A61B 17/0482** (2013.01); **A61B 17/06166** (2013.01); **A61B 2017/06176** (2013.01)(21) Appl. No.: **15/261,422**(22) Filed: **Sep. 9, 2016****Related U.S. Application Data**




(60) Provisional application No. 62/217,502, filed on Sep. 11, 2015.

(57) **ABSTRACT**

A laparoscopic suturing device is provided. The suturing device can pass a suturing needle back and forth between jaws of a jaw assembly to suture tissue at a surgical site in a minimally invasive procedure. The jaw assembly can have a pivotable jaw member in each jaw to position the jaw assembly and needle in a low-profile stowed configuration for insertion through a low diameter surgical port. The jaw assembly can be actuated by a handle assembly that provides simultaneous needle passing from a driving jaw to a receiving jaw and latching the needle within the receiving jaw in a single trigger cycle.

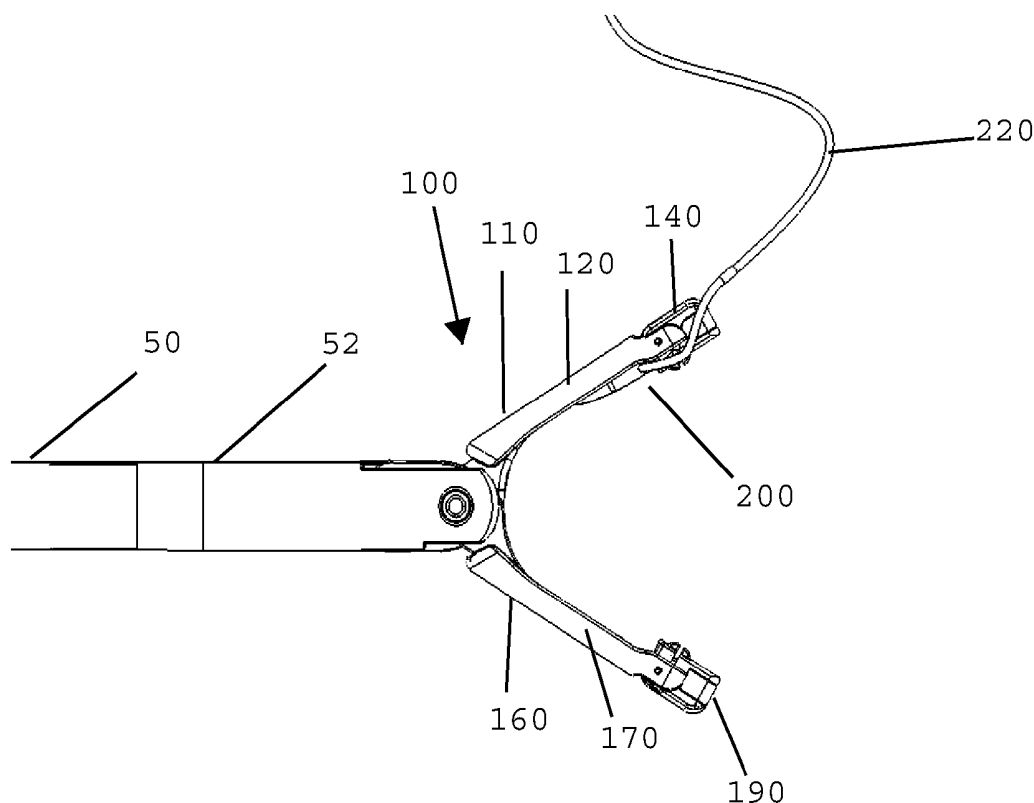

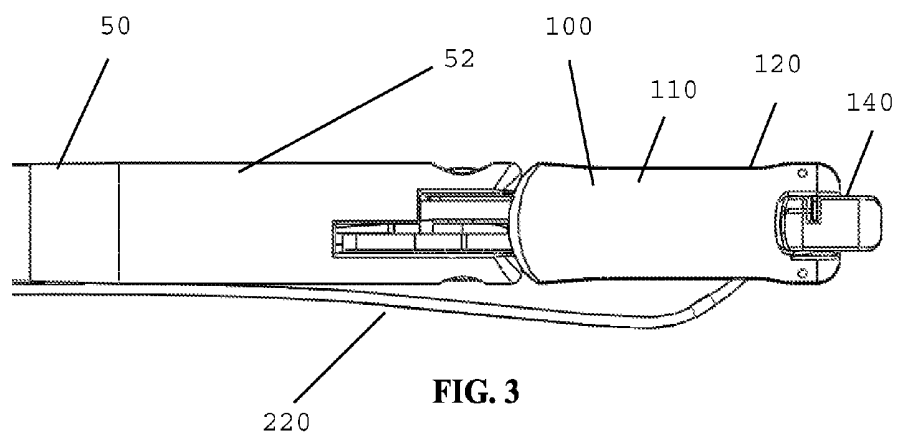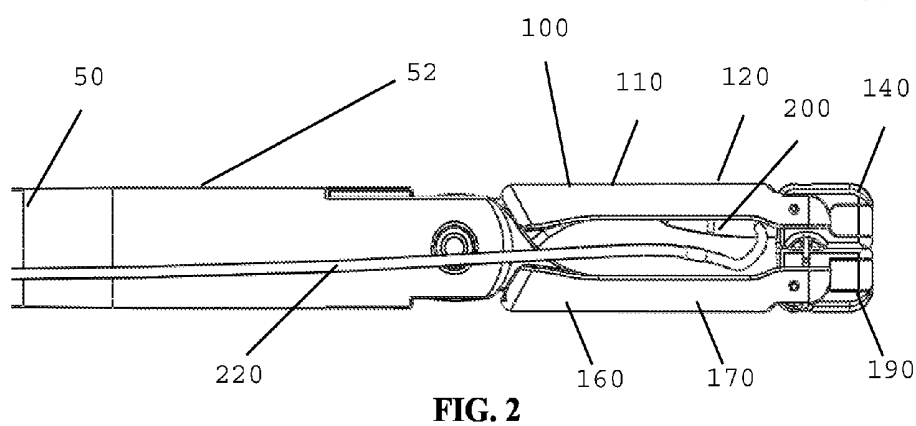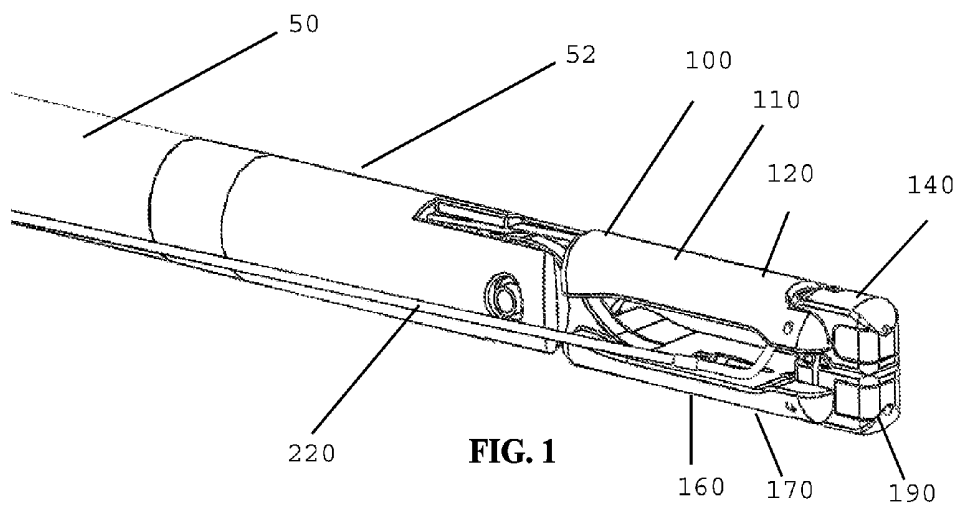

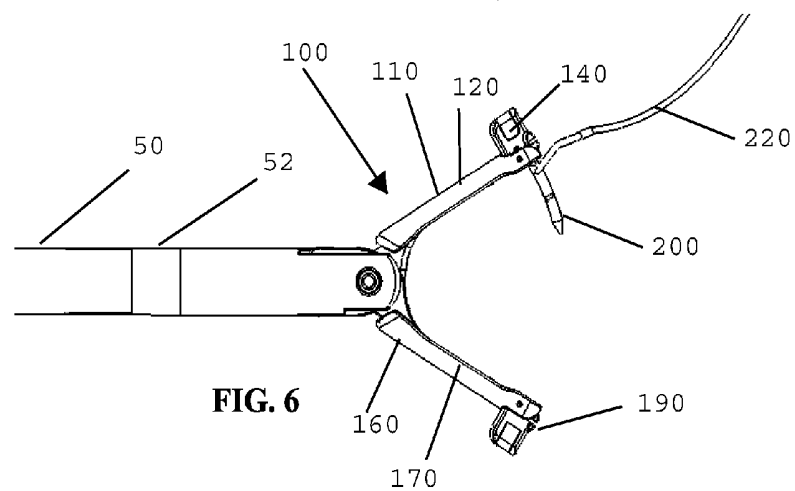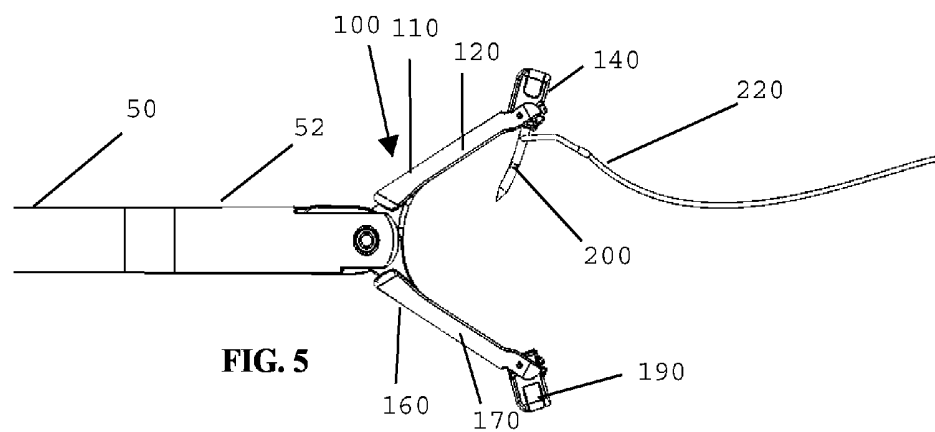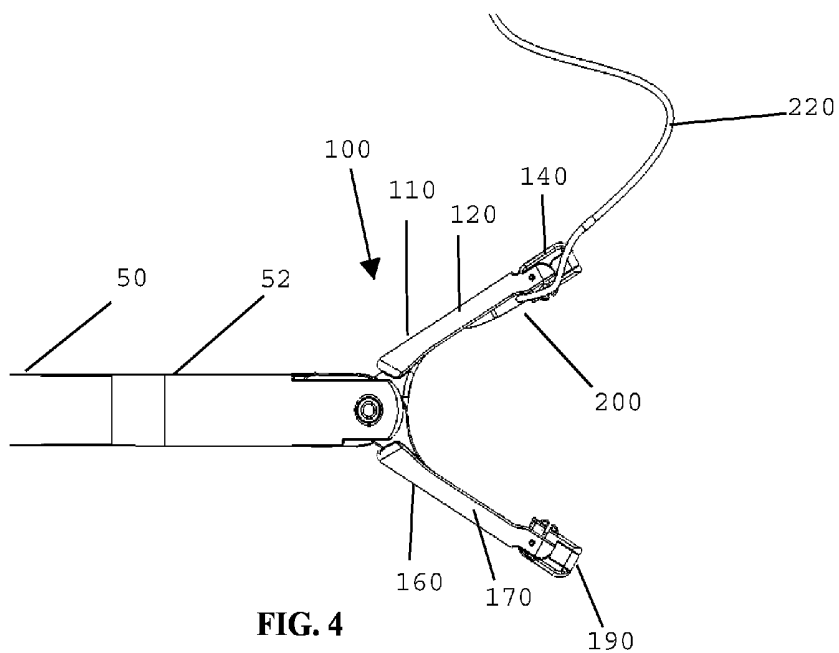

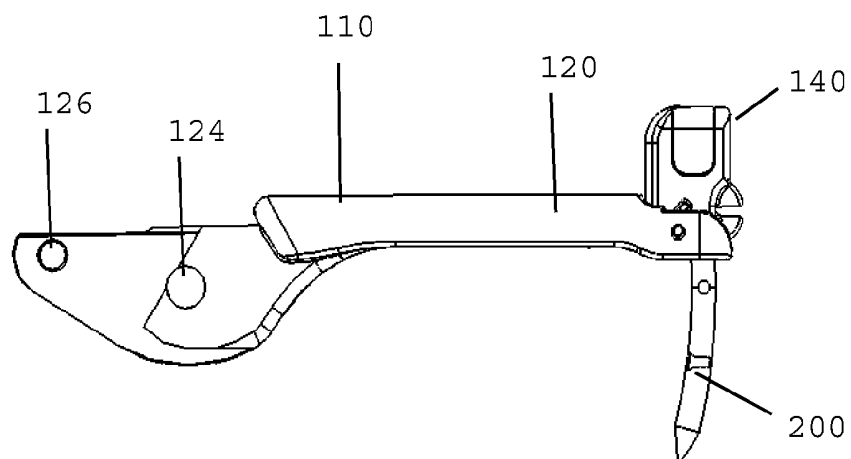


FIG. 7

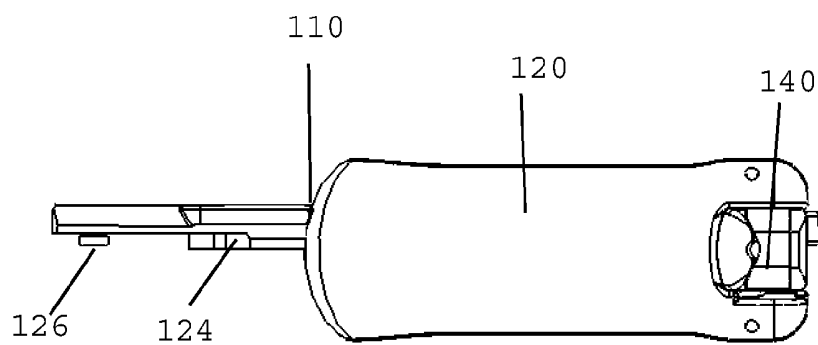


FIG. 8

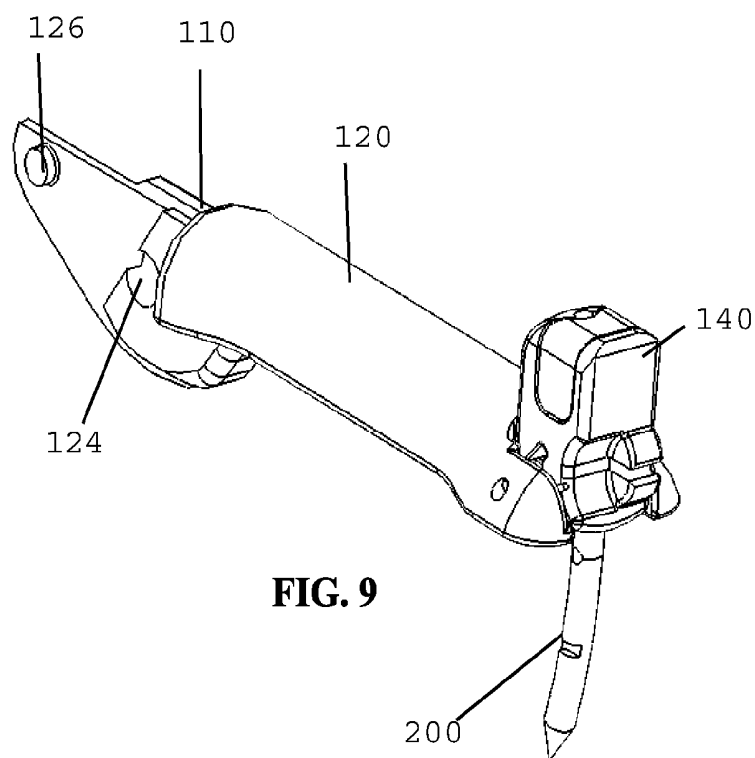
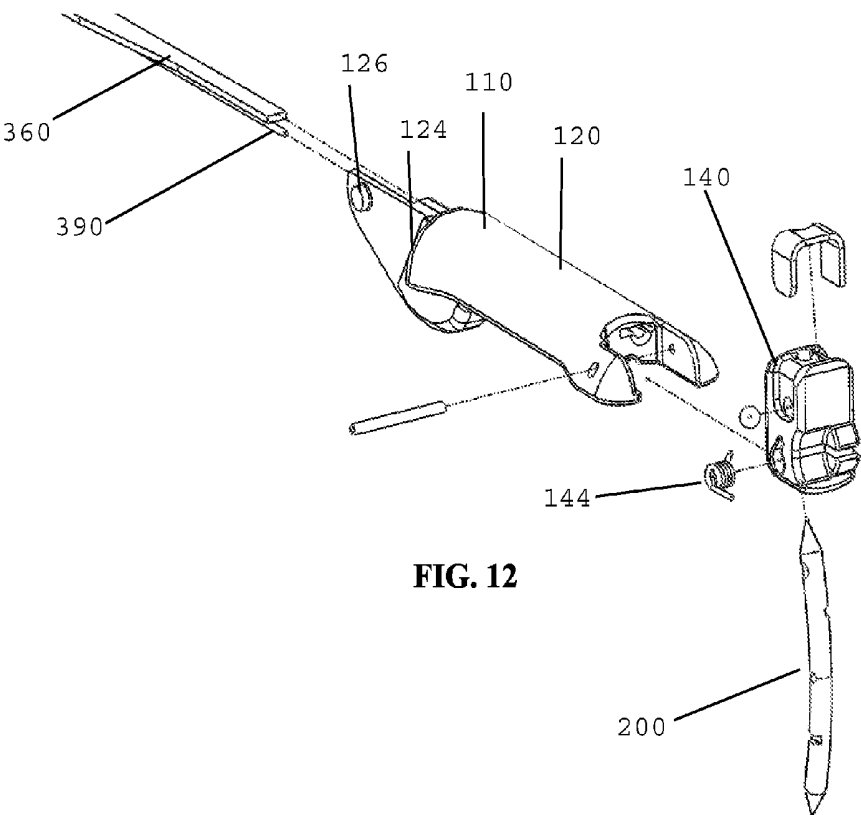
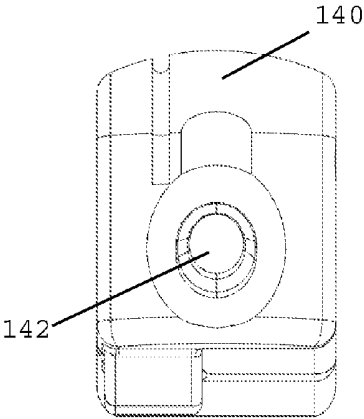
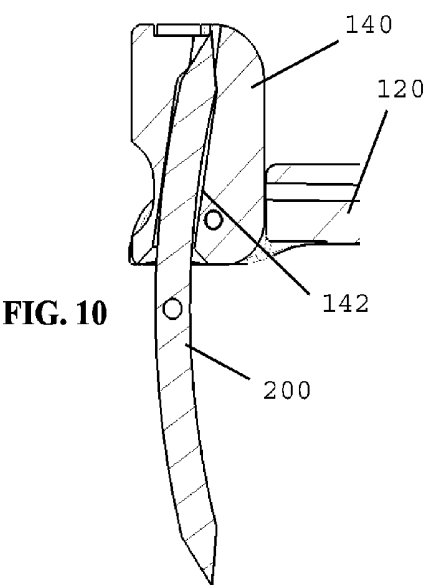


FIG. 9



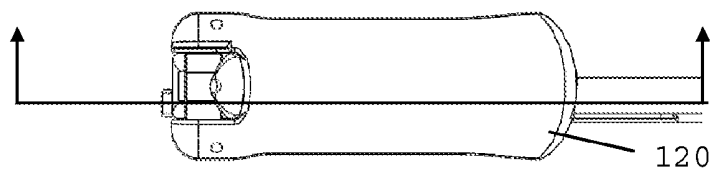


FIG. 13

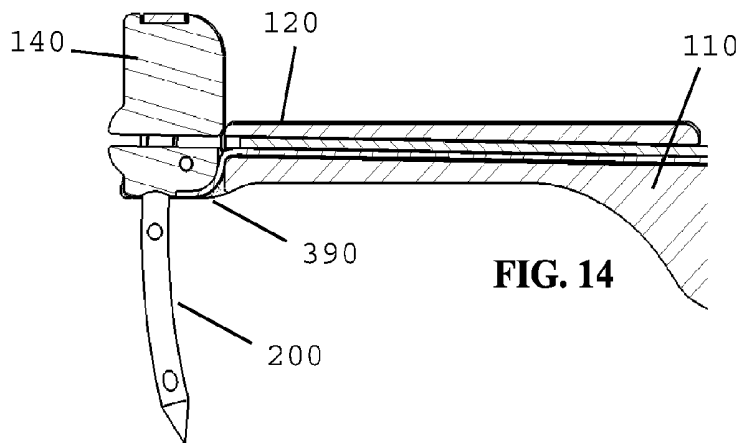


FIG. 14

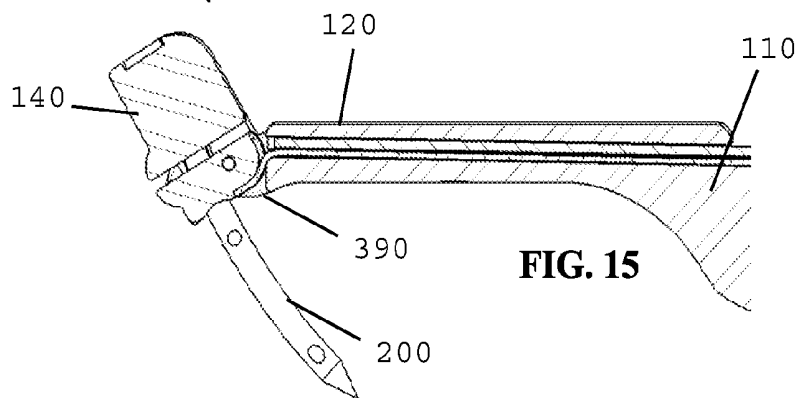


FIG. 15

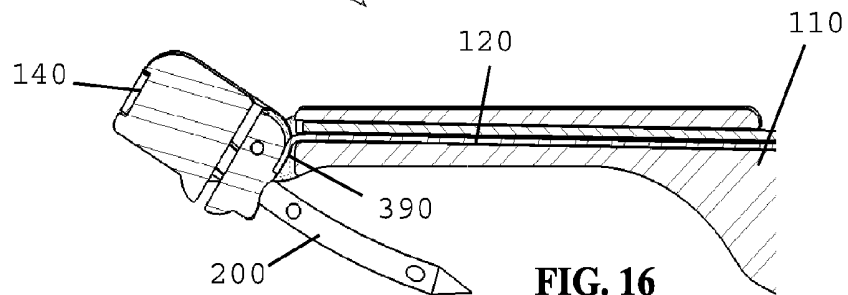


FIG. 16

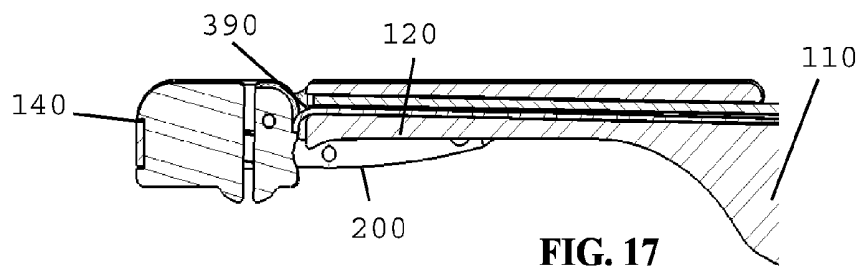


FIG. 17

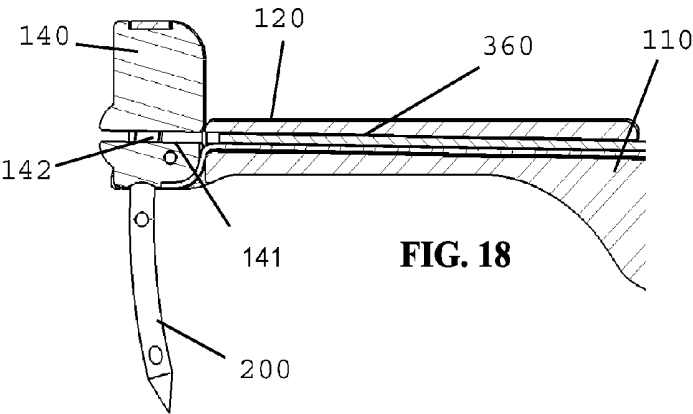


FIG. 18

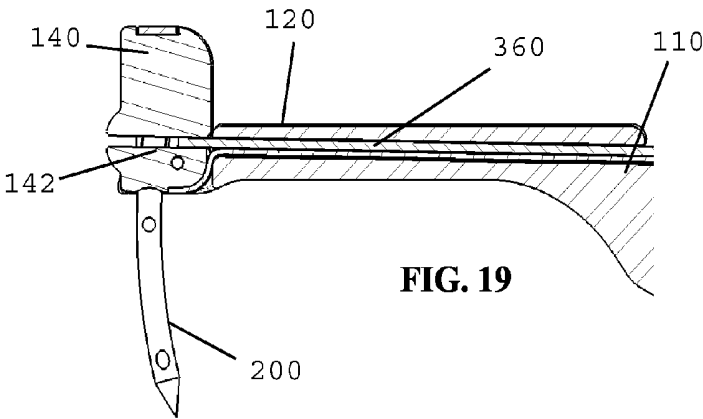


FIG. 19

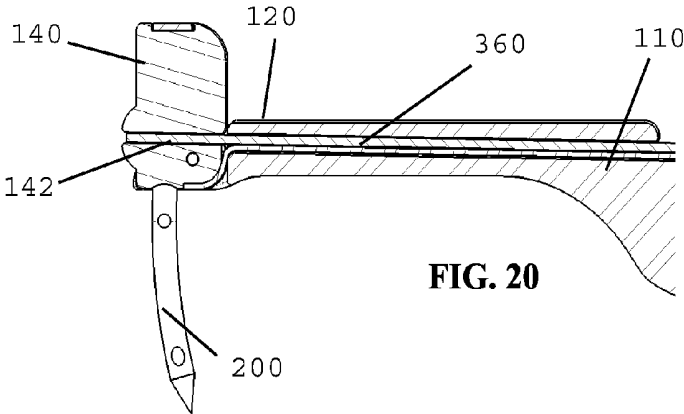


FIG. 20

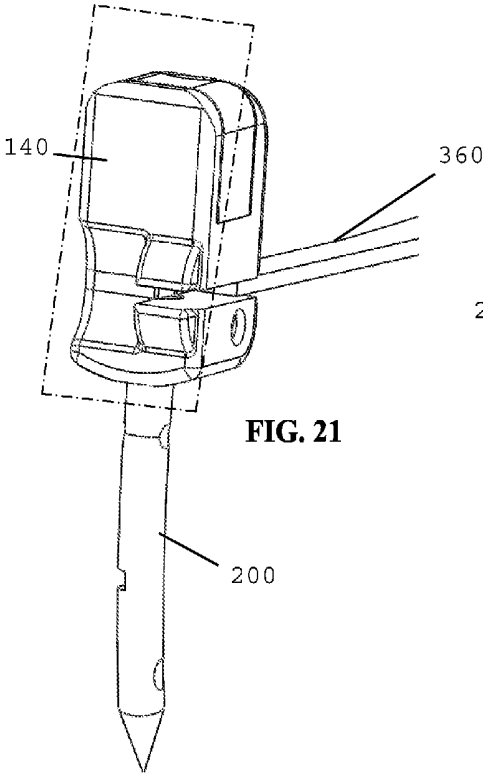


FIG. 21

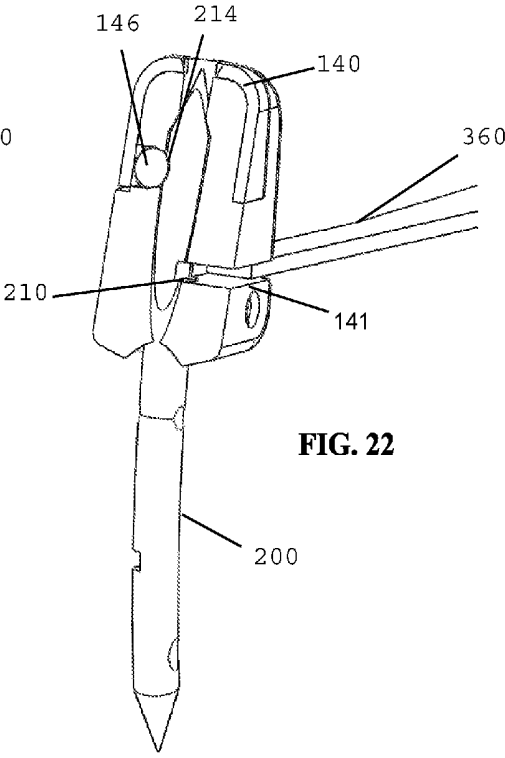


FIG. 22

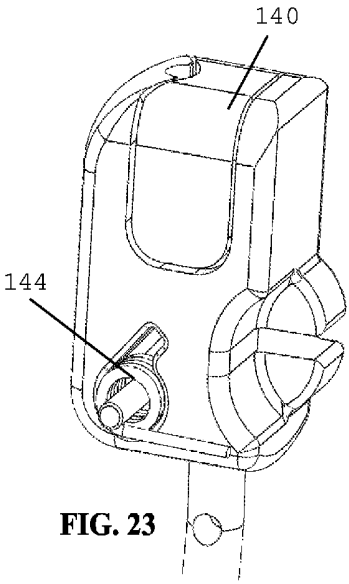


FIG. 23

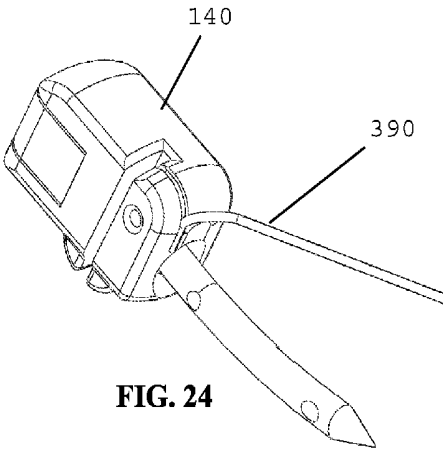


FIG. 24

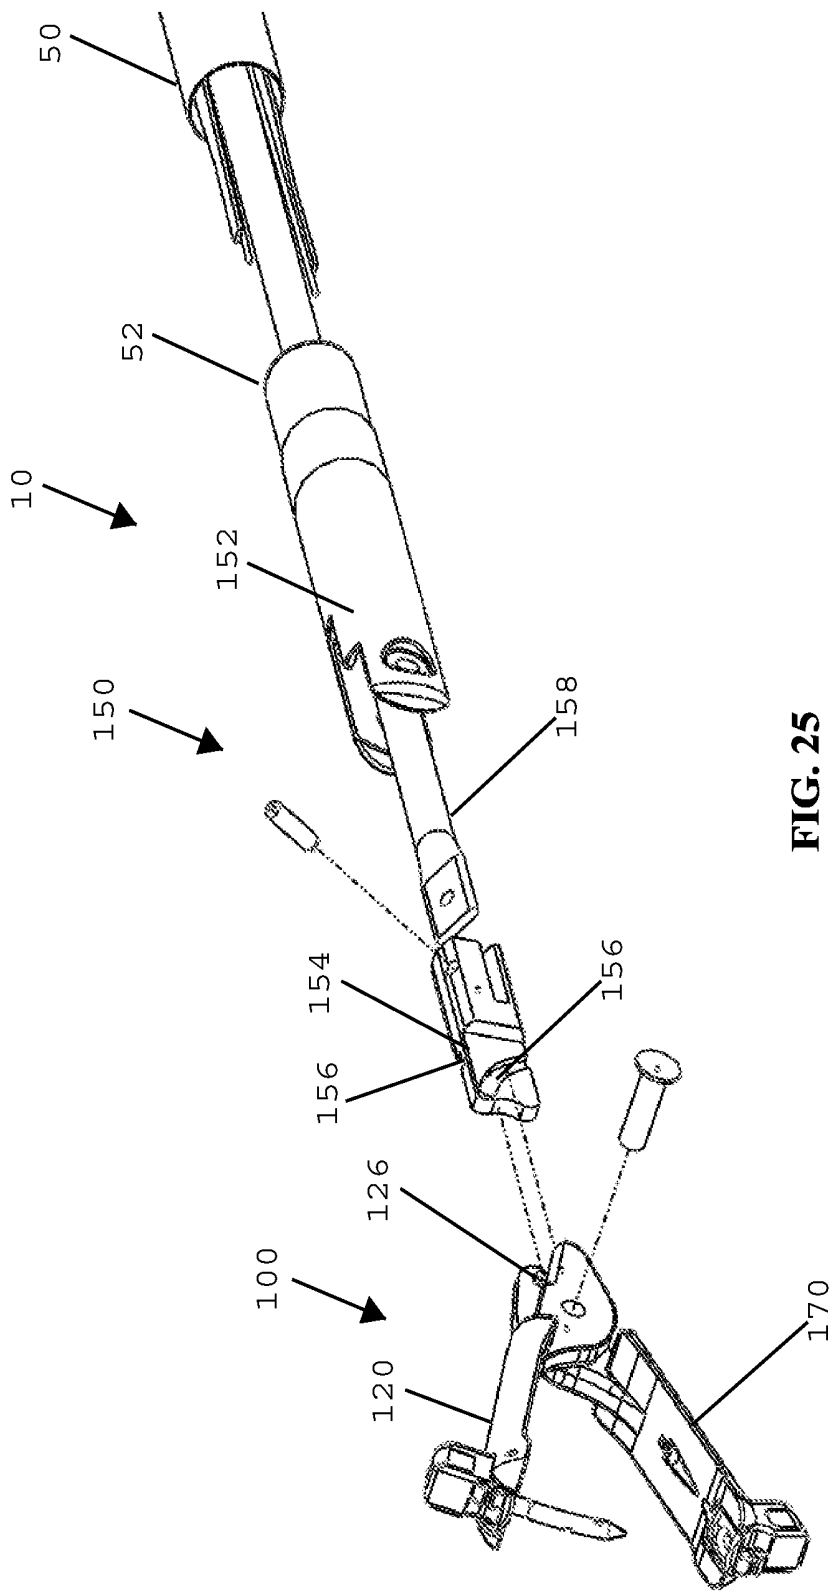


FIG. 25

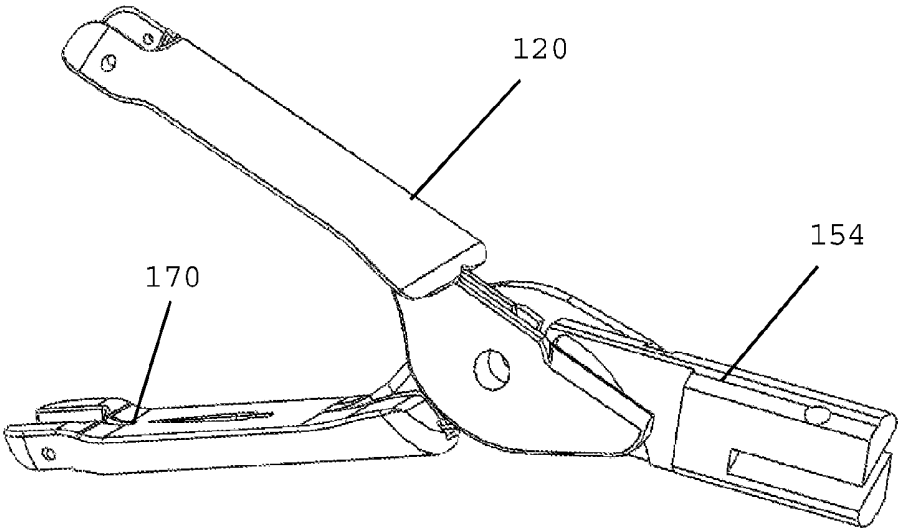


FIG. 26

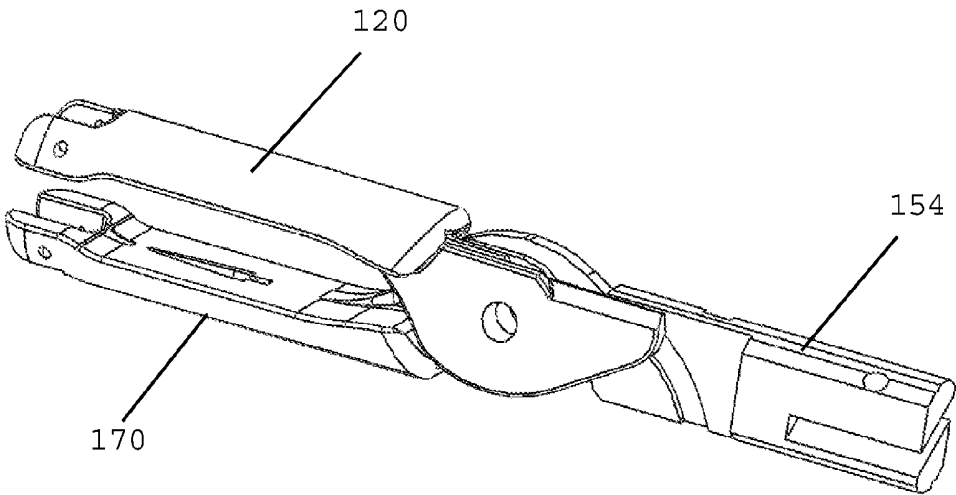


FIG. 27

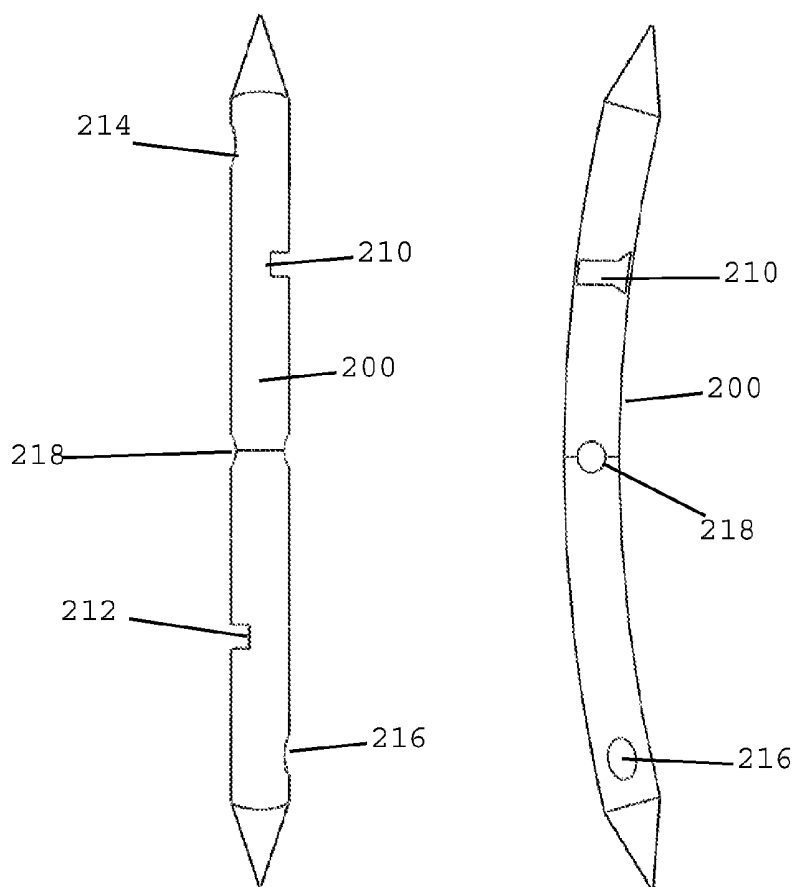


FIG. 28

FIG. 29

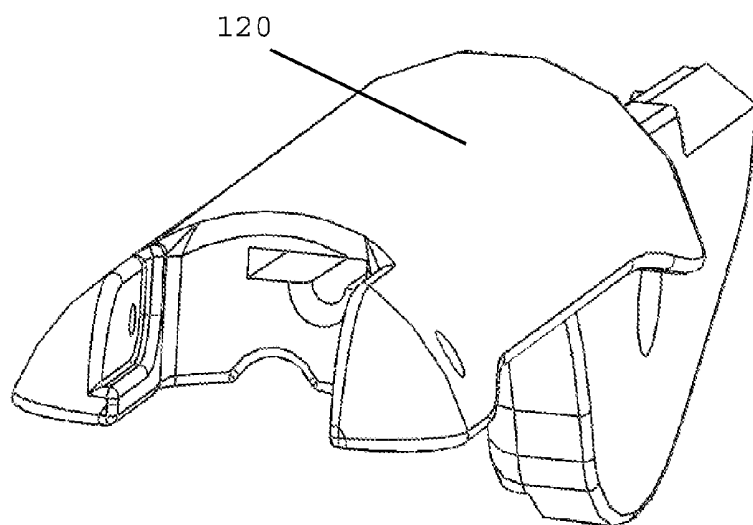


FIG. 30

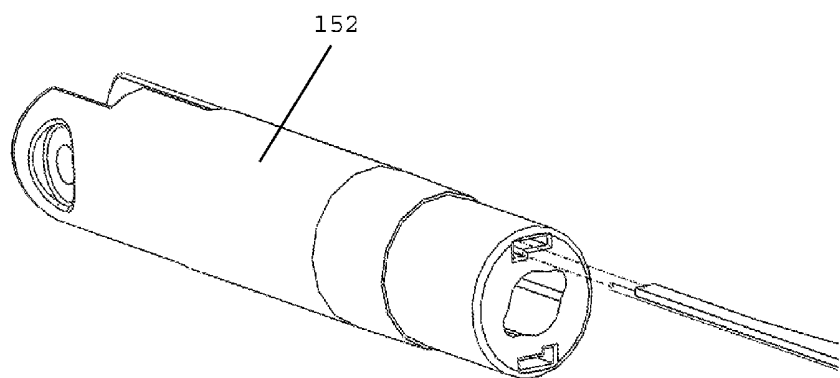


FIG. 31

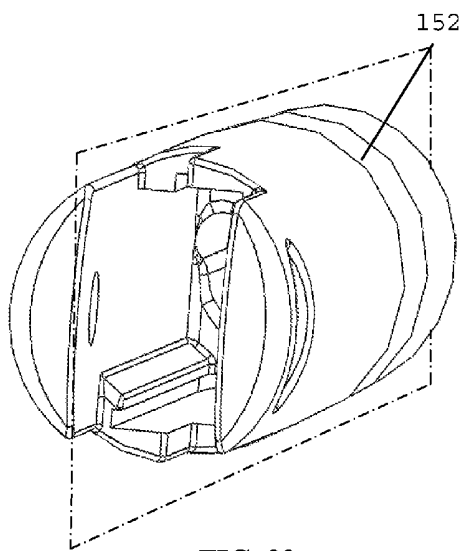


FIG. 32

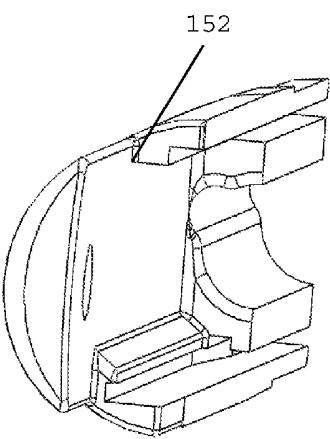


FIG. 33

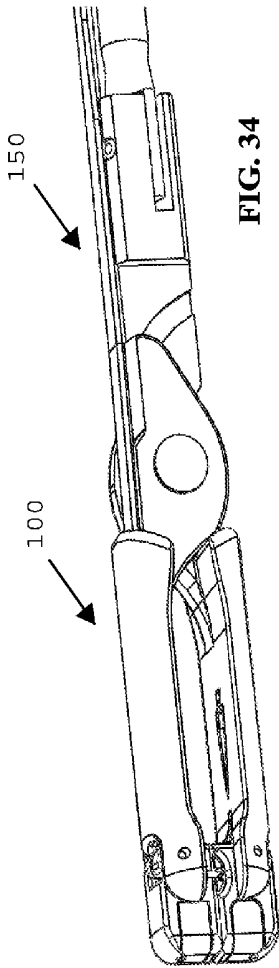


FIG. 34

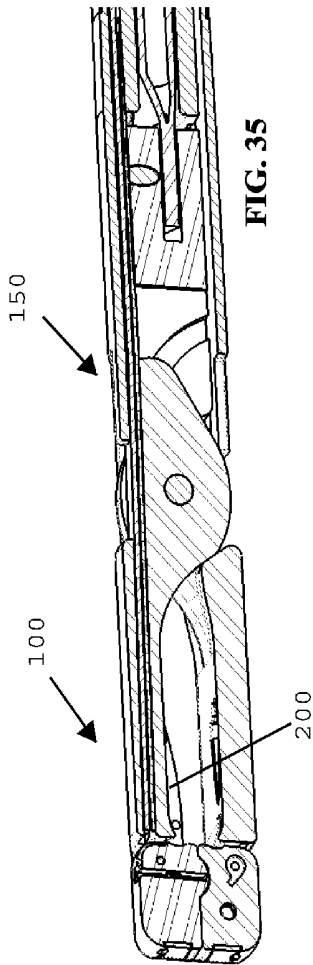


FIG. 35

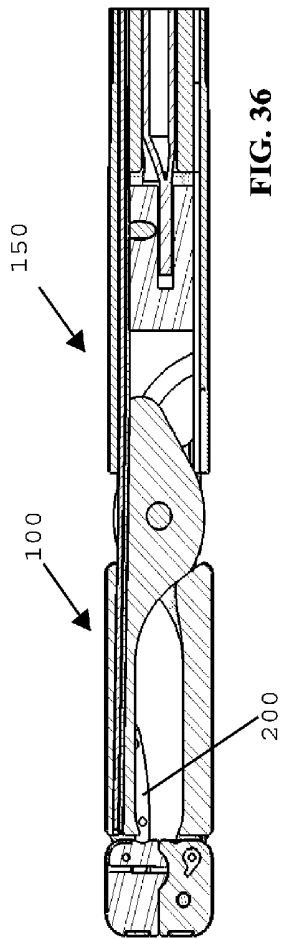
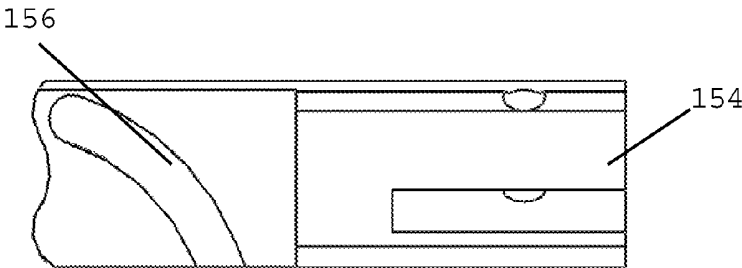
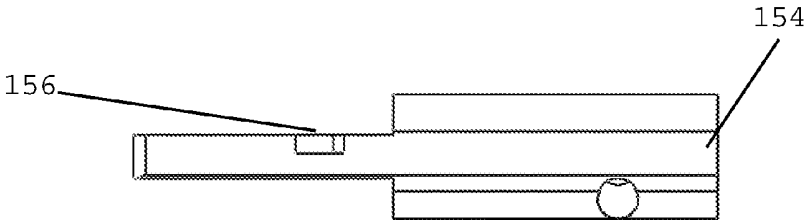
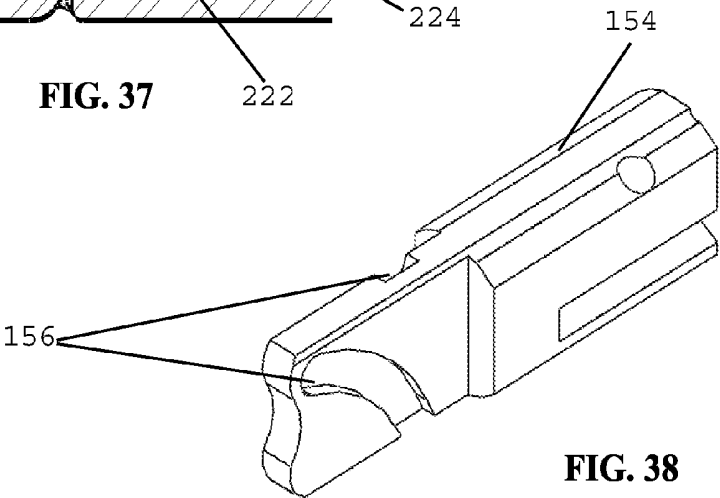
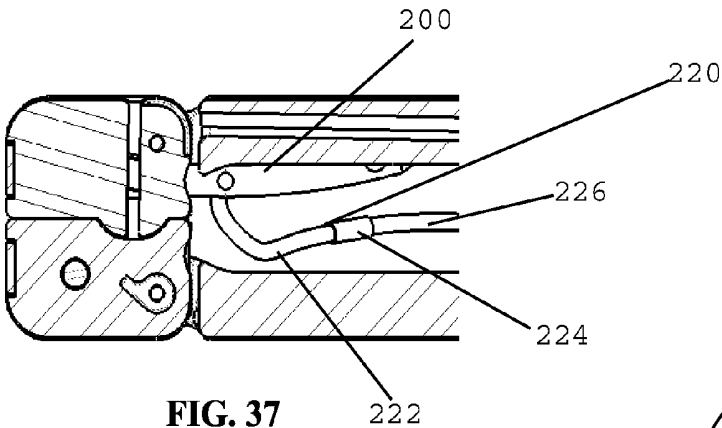


FIG. 36



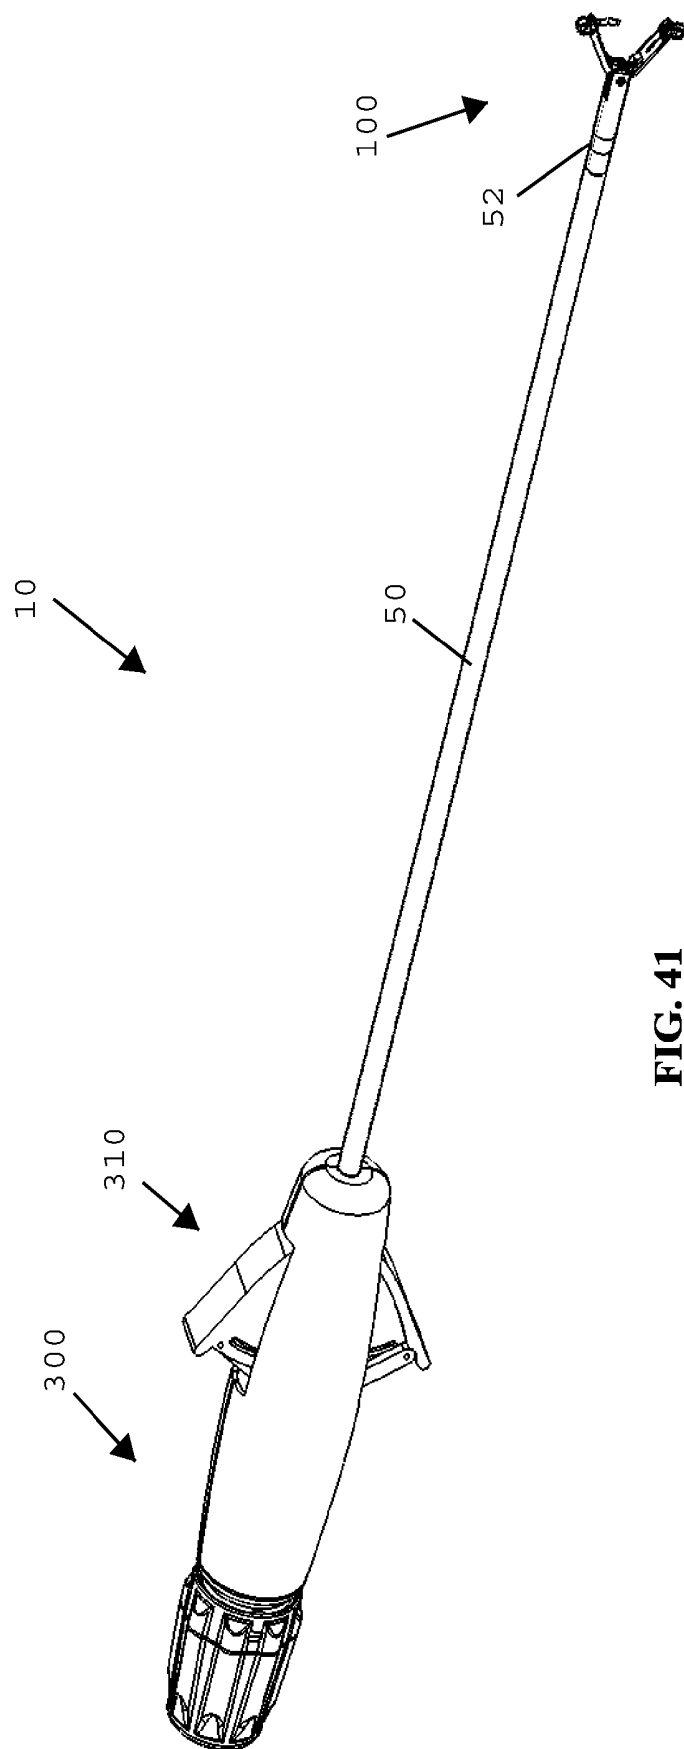


FIG. 41

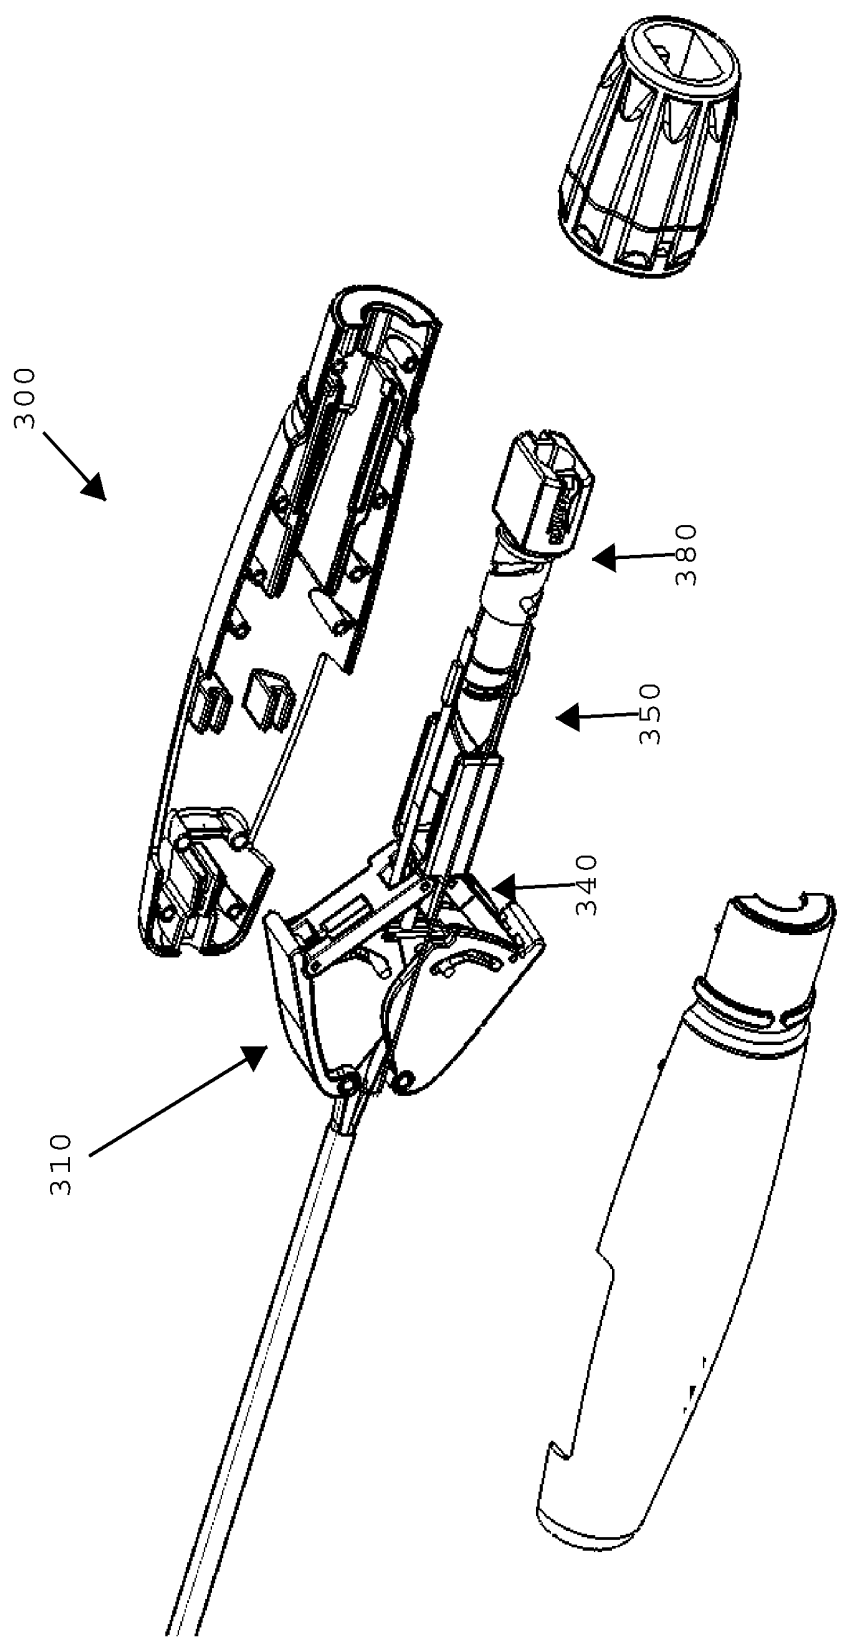


FIG. 42

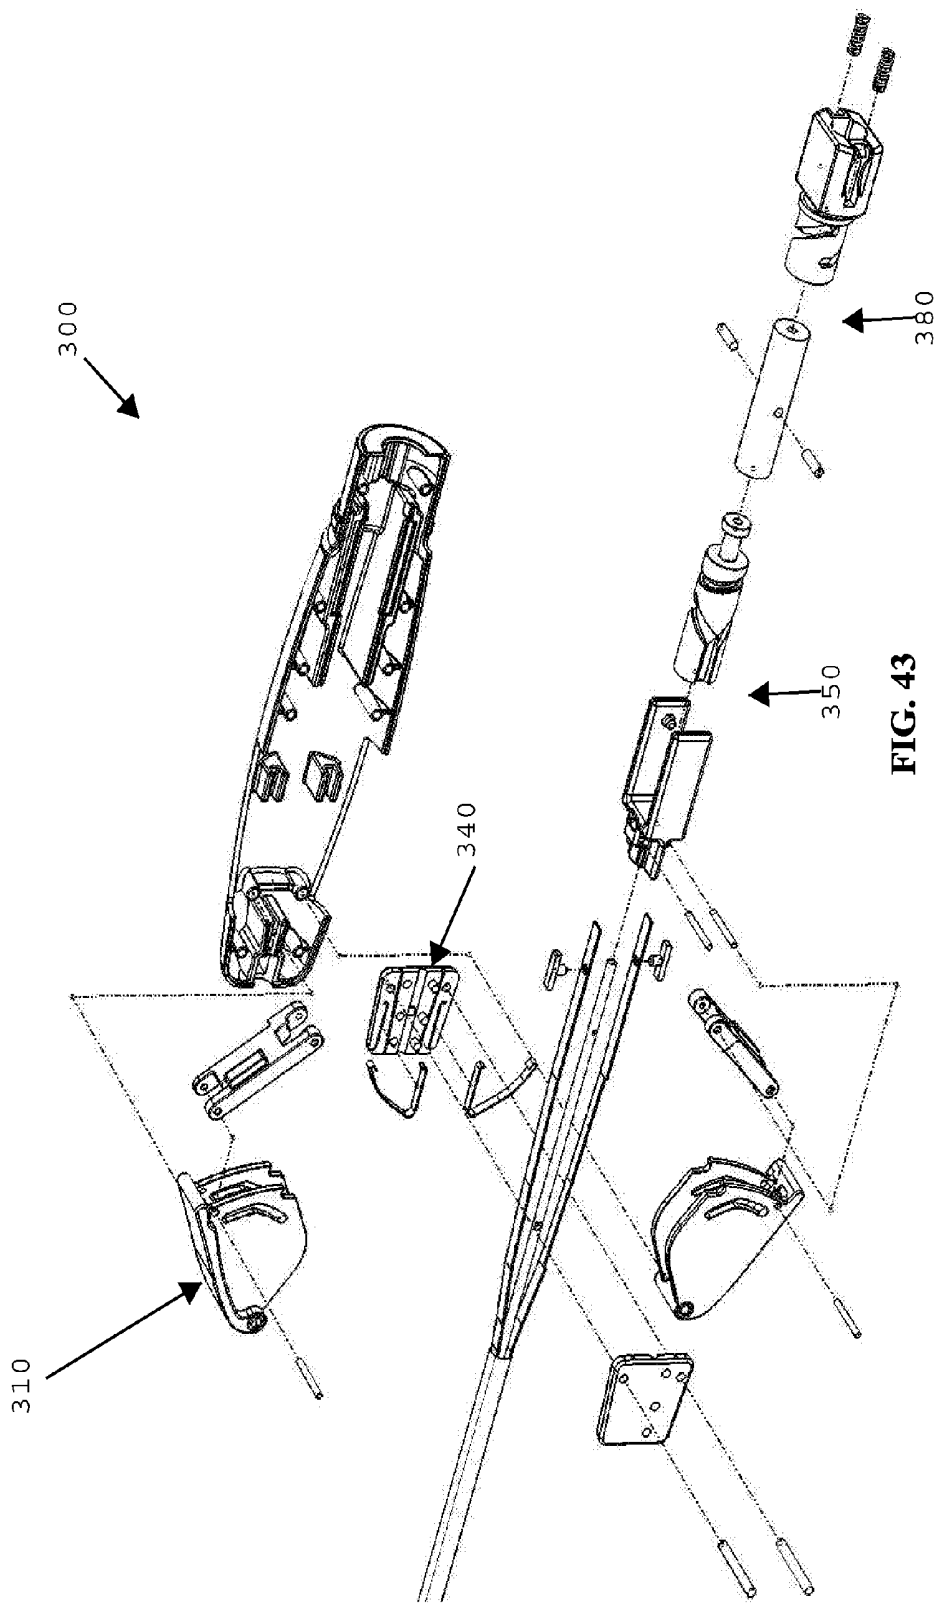


FIG. 43

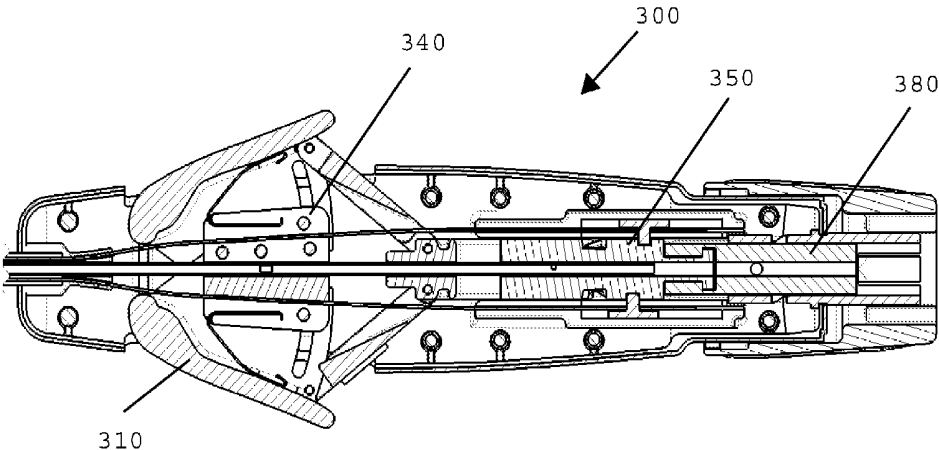


FIG. 44

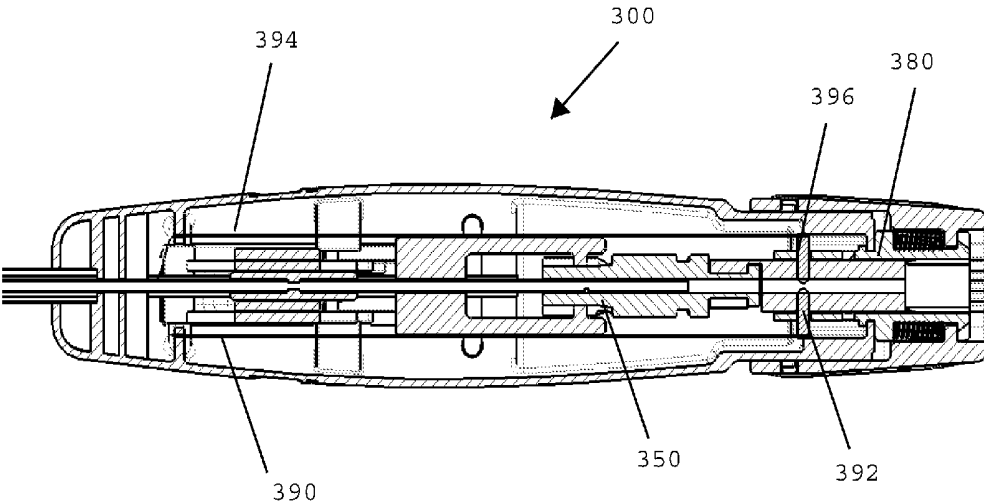


FIG. 45

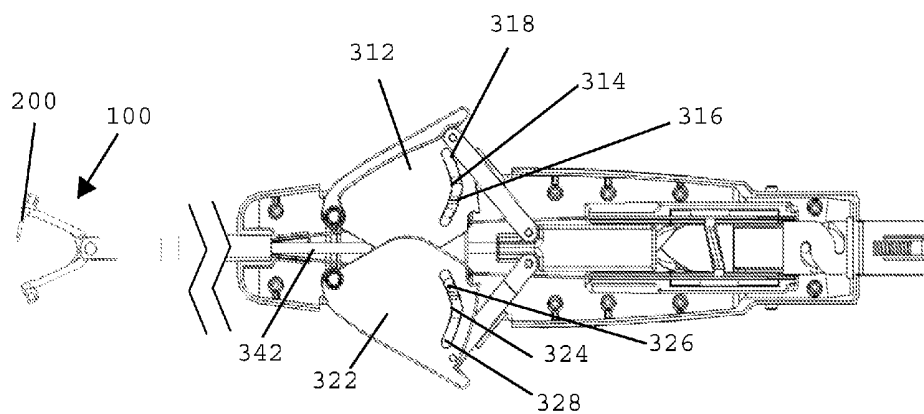


FIG. 46

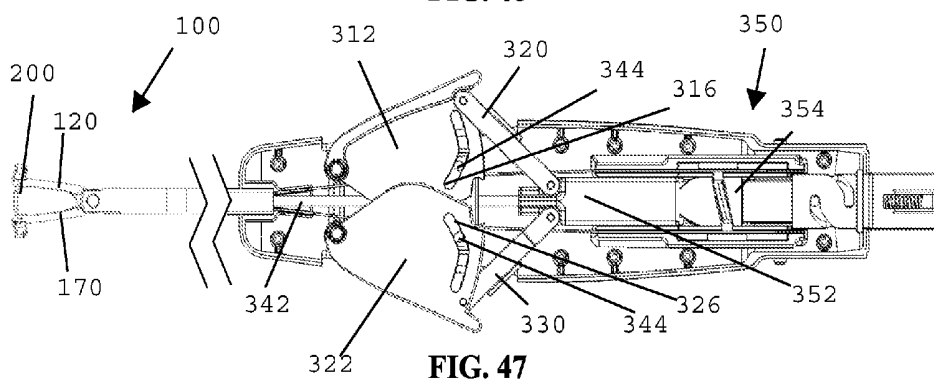


FIG. 47

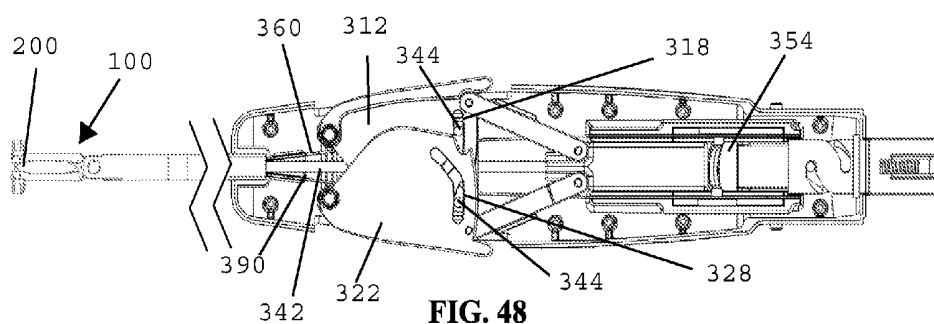
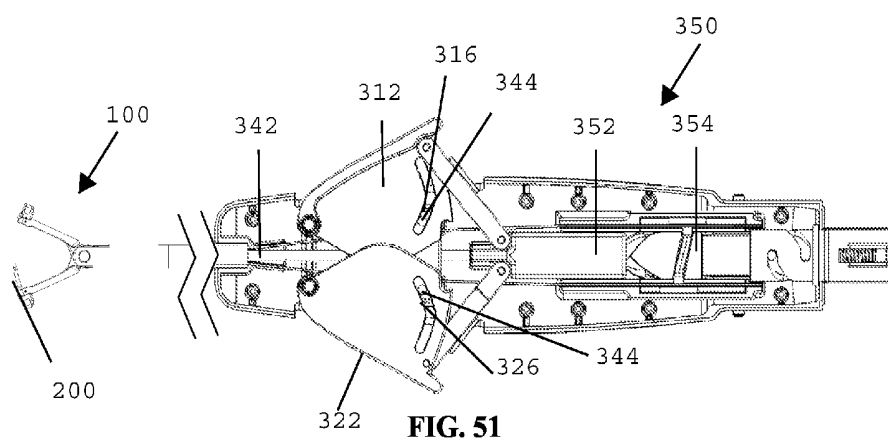
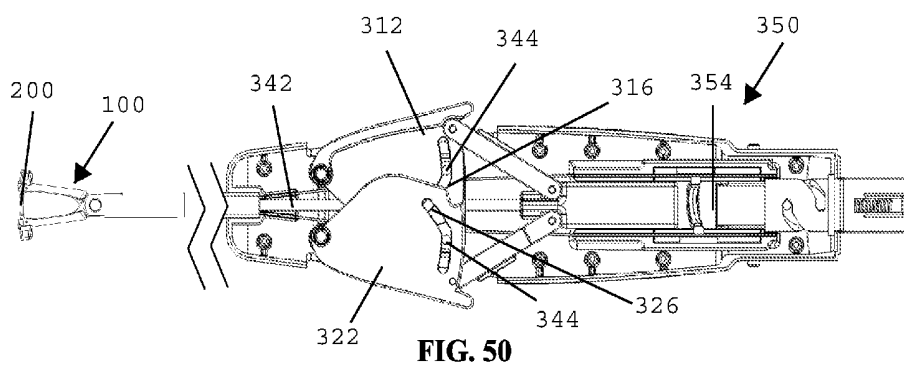
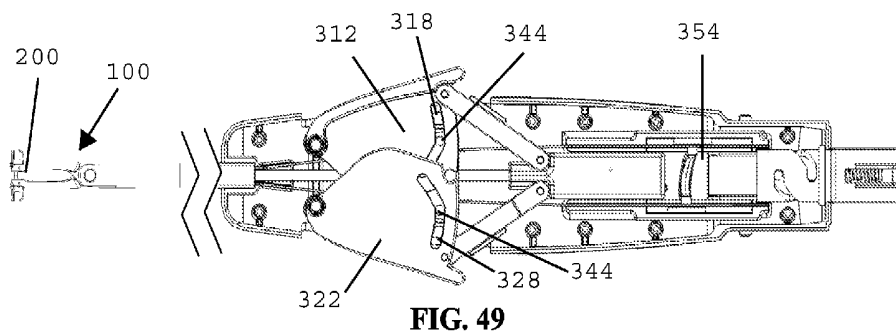


FIG. 48



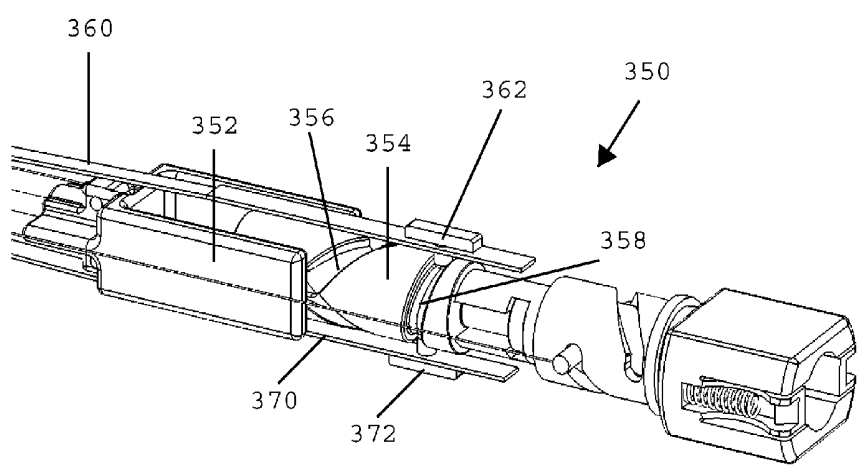


FIG. 52

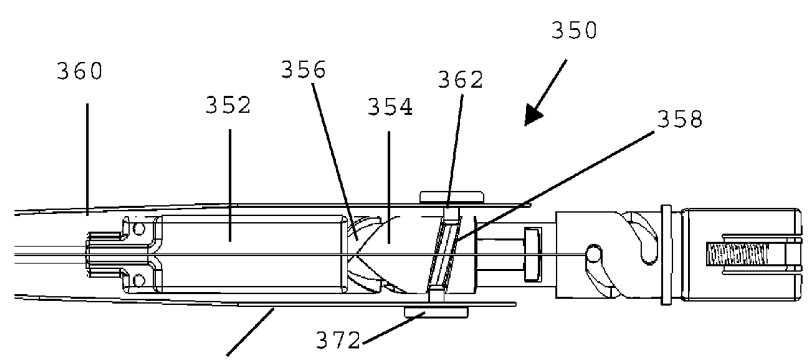


FIG. 53

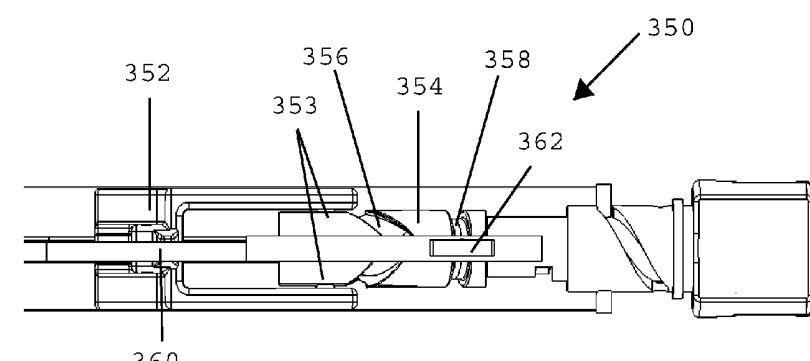
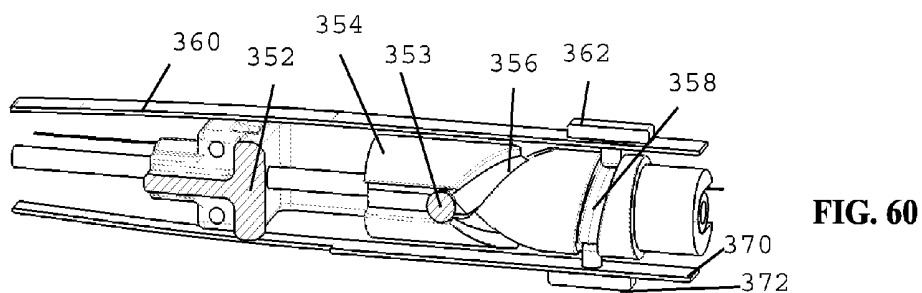
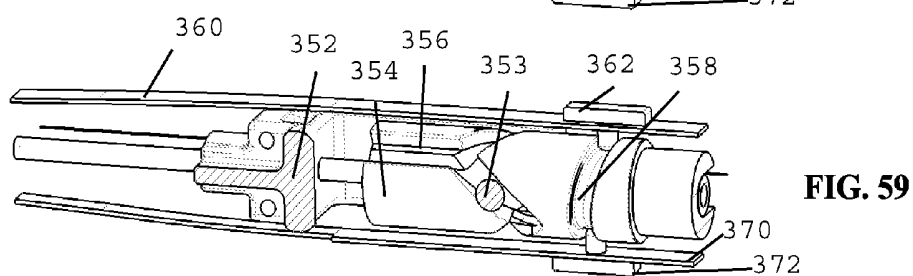
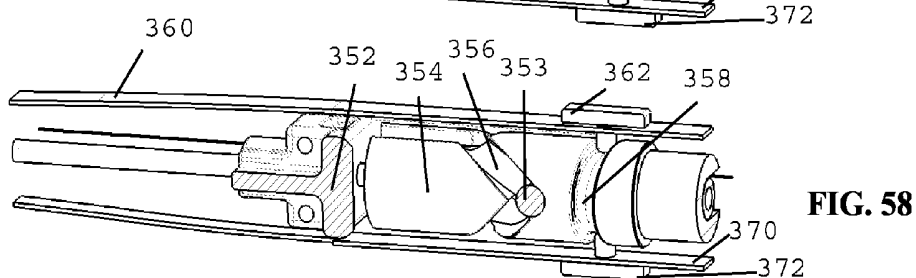
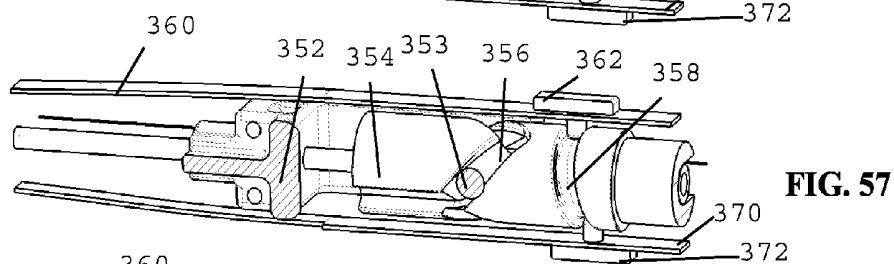
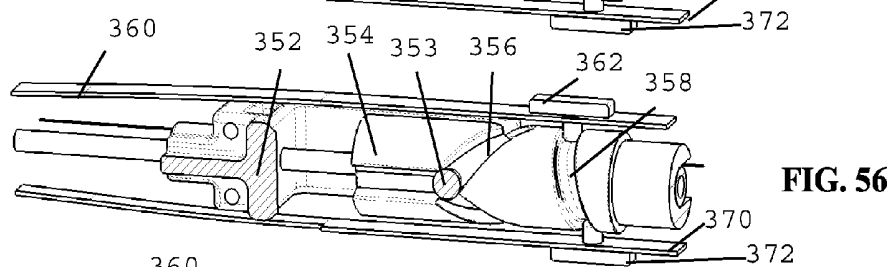
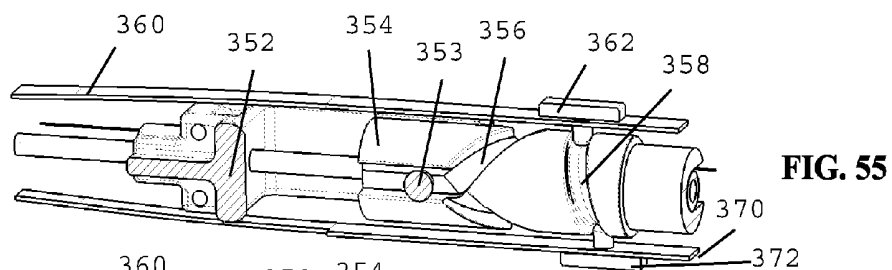


FIG. 54



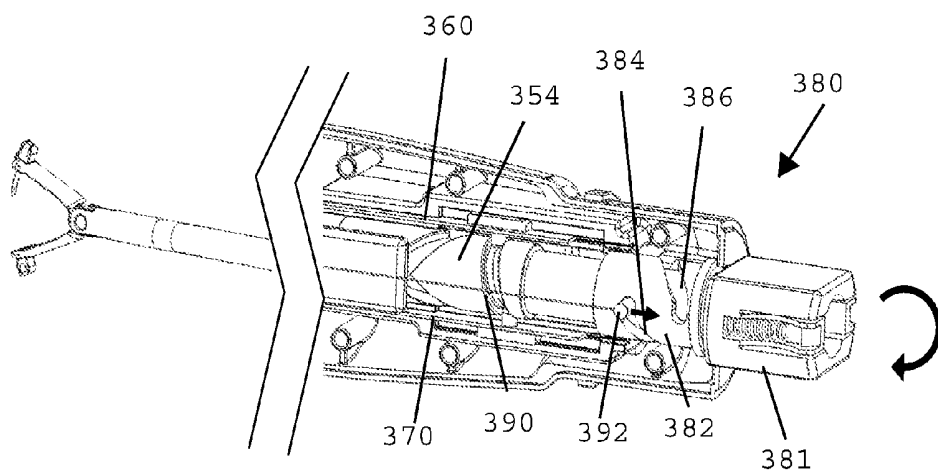


FIG. 61

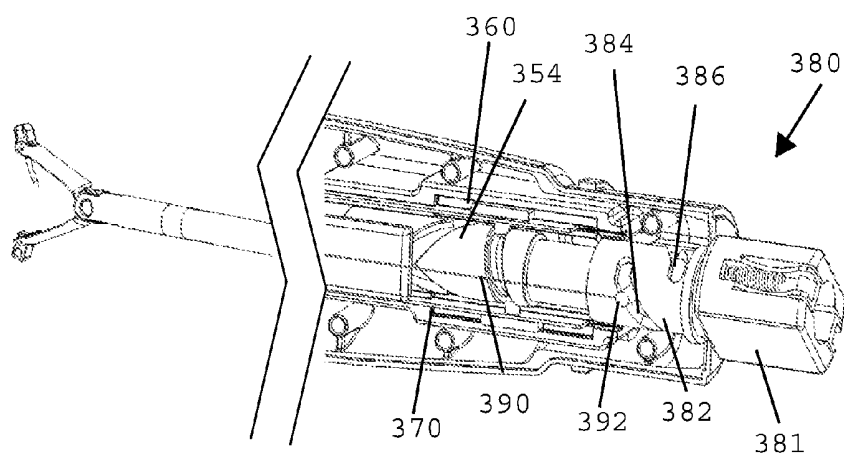


FIG. 62

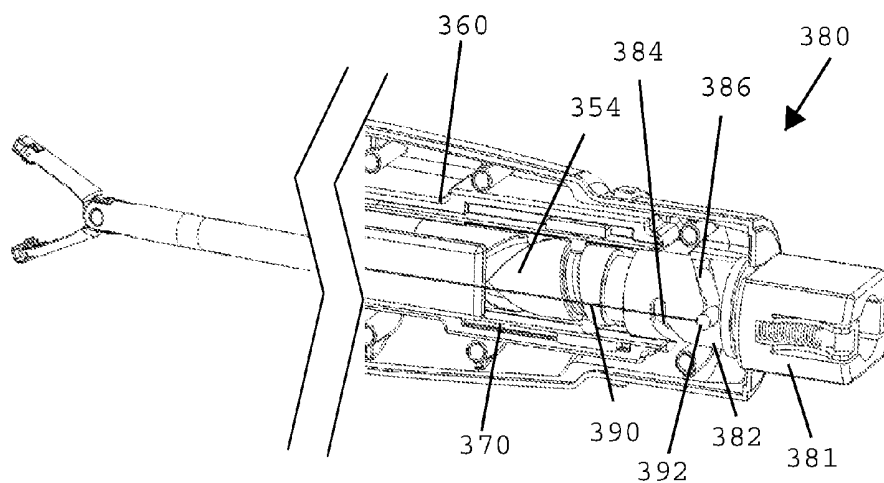


FIG. 63

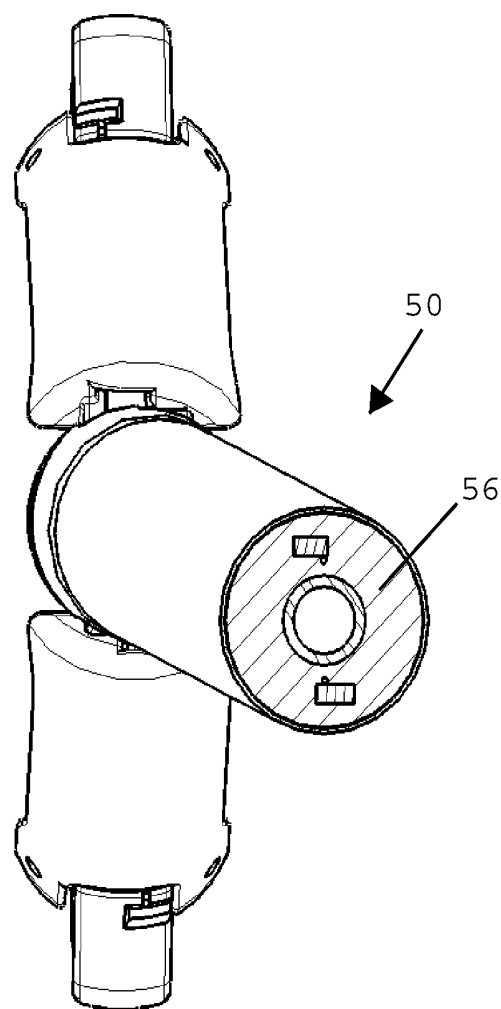


FIG. 64

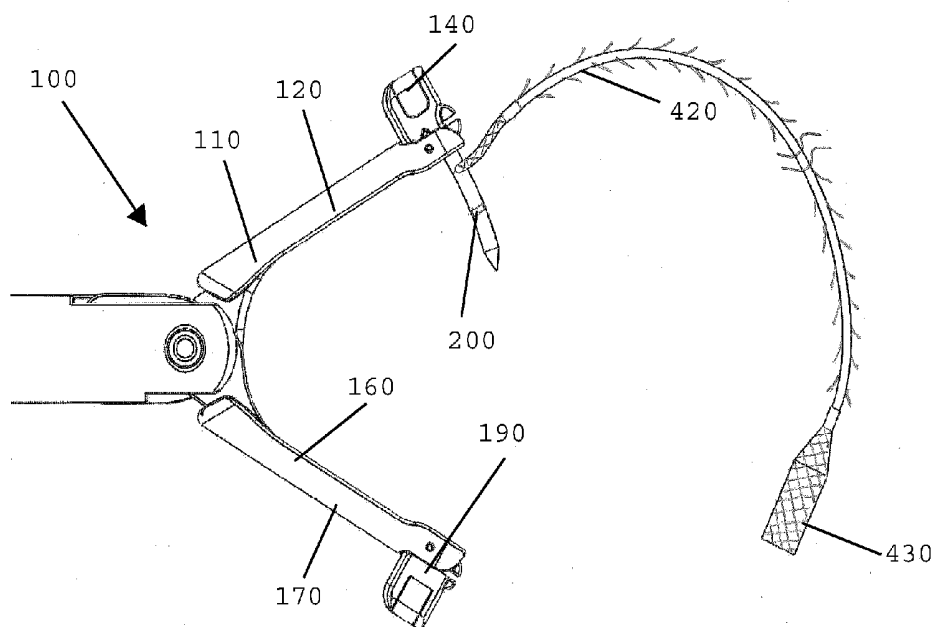


FIG. 65

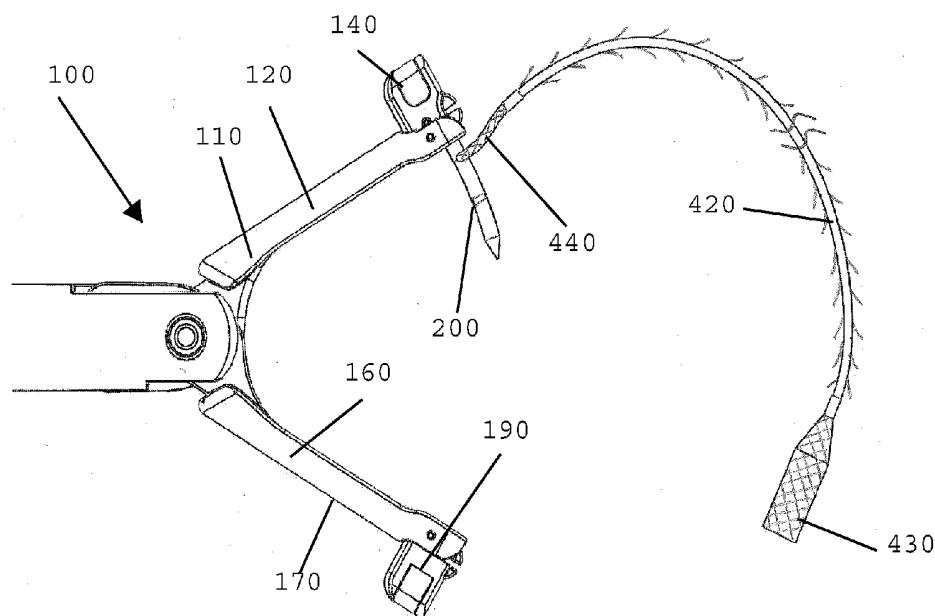


FIG. 66

LAPAROSCOPIC SUTURING SYSTEM

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of U.S. Provisional Patent Application Ser. No. 62/217,502, entitled, "LAPAROSCOPIC SUTURING SYSTEM," filed Sep. 11, 2015, currently pending. The above-referenced application is incorporated by reference herein in its entirety.

BACKGROUND OF THE INVENTION

[0002] Field of the Invention

[0003] The present application relates to surgical instruments and more particularly to laparoscopic surgical devices for suturing tissue.

[0004] Description of the Related Art

[0005] In surgical procedures, such as minimally invasive surgical procedures in which a surgical site is accessed through a port, it can be desirable to suture tissue with a suturing tool that can be advanced through a relatively low-diameter port to the surgical site. A suturing tool can be configured to advance a needle and attached suture through tissue in the surgical site such that an operator can create a running stitch to approximate tissue. Suturing devices have been made that pass a needle down the trocar with the needle's longitudinal axis perpendicular to the trocar's axis, which limits the length of the needle that may be used in the device to the inner diameter of the trocar. Moreover, current suturing devices typically include operation mechanisms that are complex and cumbersome to operate, requiring multiple operational steps to complete a single stitch. Desirably, an improved suturing device can include increased efficiency, simplicity and ease of use.

SUMMARY OF THE INVENTION

[0006] In certain embodiments, a laparoscopic suturing device is provided herein. The laparoscopic suturing device comprises a handle assembly, an elongate shaft, a jaw assembly, and a needle. The handle assembly has a proximal end and a distal end. The elongate shaft extends distally from the distal end of the handle assembly and defines a central longitudinal axis. The jaw assembly extends distally from the elongate shaft. The jaw assembly comprises a first jaw and a second jaw each having a proximal end pivotably coupled to the elongate shaft and a distal end. The jaw assembly and the needle are selectively positionable between a stowed configuration in which the needle is positioned in one of the first jaw and the second jaw and the first jaw, the second jaw, and the needle are generally aligned with the central longitudinal axis and an open configuration in which the first jaw, the second jaw, and the needle extend transversely to the central longitudinal axis.

[0007] In certain embodiments, a laparoscopic suturing device is provided herein. The laparoscopic suturing device comprises a handle assembly, an elongate shaft, a jaw assembly, and a needle. The handle assembly has a proximal end and a distal end. The handle assembly comprises a trigger mechanism, a closure mechanism, and a toggle mechanism. The elongate shaft extends distally from the distal end of the handle assembly and defines a central longitudinal axis. The jaw assembly extends distally from the elongate shaft. The jaw assembly comprises a first jaw and a second jaw each having a proximal end pivotably

coupled to the elongate shaft and a distal end. The trigger mechanism is operably coupled to the closure mechanism and the toggle mechanism such that an actuation cycle of the trigger mechanism sequentially actuates the closure mechanism to close the first jaw and the second jaw of the jaw assembly, actuates the toggle mechanism to transfer the needle from one of the first jaw and the second jaw to the other of the first jaw and the second jaw, and actuates the closure mechanism to open the first jaw and the second jaw.

[0008] In certain embodiments, a laparoscopic suturing system is provided herein. The laparoscopic suturing system comprises a laparoscopic suturing device and a suturing needle. The laparoscopic suturing device comprises a handle assembly, an elongate shaft, and a jaw assembly. The elongate shaft has a proximal end coupled to the handle assembly and a distal end. The elongate shaft defines a central longitudinal axis extending between the proximal end and the distal end. The jaw assembly is coupled to the distal end of the elongate shaft. The jaw assembly comprises a first jaw and a second jaw each pivotably coupled to the elongate shaft and pivotable between an open configuration and a closed configuration. The suturing needle is positionable in the jaw assembly. The suturing needle comprises a needle and a suture coupled to the needle. The needle has a generally curved profile and extends from a first penetrating tip to a second penetrating tip. The needle comprises a first shim notch adjacent the first penetrating tip, a second shim notch adjacent the second penetrating tip, a first recess adjacent the first penetrating tip, and a second recess adjacent the second penetrating tip.

[0009] In certain embodiments, a laparoscopic suturing device is provided herein. The laparoscopic suturing device comprises: a handle assembly, an elongate shaft, and a jaw assembly. The handle assembly has a proximal end and a distal end. The elongate shaft extends distally from the distal end of the handle assembly and defines a central longitudinal axis. The jaw assembly extends distally from the elongate shaft. The jaw assembly has a proximal end pivotably coupled to the elongate shaft and a distal end. The jaw assembly comprises a first jaw and a second jaw. The first jaw comprises a first base jaw at the proximal end of the jaw assembly; and a first flip jaw at the distal end of the jaw assembly. The first flip jaw is pivotably coupled to the first base jaw. The first flip jaw has a first needle channel. The first flip jaw is pivotable between a stowed position in which the first needle channel is oriented generally longitudinally with respect to the first base jaw and a suturing position in which the first needle channel is oriented transversely to the first base jaw. The second jaw comprises a second base jaw at the proximal end of the jaw assembly and a second flip jaw at the distal end of the jaw assembly. The second base jaw is pivotably coupled to the first base jaw and the elongate shaft. The second flip jaw is pivotably coupled to the second base jaw. The second flip jaw has a second needle channel. The second flip jaw is pivotable between a stowed position in which the second needle channel is oriented generally longitudinally with respect to the second base jaw and a suturing position in which the second needle channel is oriented transversely to the second base jaw.

[0010] In certain embodiments, a laparoscopic suturing device is provided herein. The laparoscopic suturing device comprises a handle assembly, an elongate shaft, and a jaw assembly. The handle assembly has a proximal end and a distal end. The handle assembly comprises a handle body, a

trigger, and a toggle mechanism. The trigger is pivotably coupled to the handle body. The toggle mechanism is actuatable by pivotal movement of the trigger with respect to the handle body. The toggle mechanism comprises a toggle tube, a first shim, and a second shim. The toggle tube is rotatable within the handle body responsive to pivotal movement of the trigger. The toggle tube comprises a shim guide. The first shim has a proximal end with a first follower positioned in the shim guide. The first shim is longitudinally movable by rotation of the toggle tube. The second shim has a proximal end with a second follower positioned in the shim guide. The second shim is longitudinally movable by rotation of the toggle tube. The elongate shaft extends distally from the distal end of the handle assembly and defines a central longitudinal axis. The jaw assembly extends distally from the elongate shaft. The jaw assembly has a proximal end pivotably coupled to the elongate shaft and a distal end. The jaw assembly comprises a first jaw and a second jaw. The first jaw has a proximal end pivotably coupled to the elongate shaft and a distal end having a first needle retention slot therein. The second jaw has a proximal end pivotably coupled to the elongate shaft and a distal end having a second needle retention slot therein. The first shim extends distally to a distal end positioned in the first jaw and the second shim extends distally to a distal end positioned in the second jaw. The toggle mechanism is operable in a toggle cycle to alternately longitudinally advance the distal end of the first shim adjacent the first needle retention slot and advance the distal end of the second shim adjacent the second needle slot.

[0011] In certain embodiments, a laparoscopic suturing device is provided herein. The laparoscopic suturing device comprises a handle assembly, an elongate shaft, and a jaw assembly. The handle assembly has a proximal end and a distal end. The handle assembly comprises a latch mechanism having a latched configuration and an unlatched configuration. The elongate shaft extends distally from the distal end of the handle assembly and defines a central longitudinal axis. The jaw assembly extends distally from the elongate shaft. The jaw assembly has a proximal end pivotably coupled to the elongate shaft and a distal end. The jaw assembly comprises a first jaw and a second jaw. The first jaw comprises a first base jaw and a first flip jaw. The first base jaw is at the proximal end of the jaw assembly. The first flip jaw is at the distal end of the jaw assembly and pivotably coupled to the first base jaw. The first flip jaw is pivotable between a stowed position defining a low diametric profile of the jaw assembly and a suturing position. The second jaw comprises a second base jaw and a second flip jaw. The second base jaw is at the proximal end of the jaw assembly pivotably coupled to the first base jaw and the elongate shaft. The second flip jaw is at the distal end of the jaw assembly and pivotably coupled to the second base jaw. The second flip jaw is pivotable between a stowed position defining a low diametric profile to the jaw assembly and a suturing position. The latch mechanism is operably coupled to the first flip jaw and the second flip jaw such that with the latch mechanism in the latched position, the first flip jaw and the second flip jaw are maintained in the stowed position and with the latch mechanism in the unlatched position, the first flip jaw and the second flip jaw are pivotable to the suturing position.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is an isometric view of an embodiment of jaw assembly for a laparoscopic suturing device in a stowed configuration;

[0013] FIG. 2 is a side view of the jaw assembly of FIG. 1;

[0014] FIG. 3 is a top plan view of the jaw assembly of FIG. 1;

[0015] FIG. 4 is a side view of the jaw assembly of FIG. 1 with the base jaws in an open state and flip jaws in the stowed configuration;

[0016] FIG. 5 is a side view of the jaw assembly of FIG. 1 with the base jaws in an open state and flip jaws partially rotated to a suturing configuration;

[0017] FIG. 6 is a side view of the jaw assembly of FIG. 1 with the base jaws in an open state and flip jaws rotated to a suturing configuration;

[0018] FIG. 7 is a side view of one jaw of the jaw assembly of FIG. 1 with a suturing needle disposed therein;

[0019] FIG. 8 is a top view of the jaw of FIG. 7;

[0020] FIG. 9 is an isometric view of the jaw of FIG. 7 with the suturing needle disposed therein;

[0021] FIG. 10 is a cross-sectional view of a flip jaw and suturing needle of the jaw of FIG. 7;

[0022] FIG. 11 is a lower plan view of a flip jaw for the jaw of FIG. 7;

[0023] FIG. 12 is an exploded view of the jaw of FIG. 7;

[0024] FIG. 13 is a top plan view of the jaw of FIG. 7 with a section line thereon;

[0025] FIG. 14 is a cross sectional view about the section line of the jaw of FIG. 7 in a suturing configuration;

[0026] FIG. 15 is a cross sectional view about the section line of the jaw of FIG. 7 partially rotated to a stowed configuration;

[0027] FIG. 16 is a cross sectional view about the section line of the jaw of FIG. 7 partially rotated to a stowed configuration;

[0028] FIG. 17 is a cross sectional view about the section line of the jaw of FIG. 7 rotated to the stowed configuration;

[0029] FIG. 18 is a cross sectional view about the section line of the jaw of FIG. 7 in a suturing configuration;

[0030] FIG. 19 is a cross sectional view about the section line of the jaw of FIG. 7 in a suturing configuration with a shim partially advanced to lock the flip jaw;

[0031] FIG. 20 is a cross sectional view about the section line of the jaw of FIG. 7 in a suturing configuration with a shim advanced to latch the flip jaw and retain the suturing needle;

[0032] FIG. 21 is a perspective view of the flip jaw and needle of the jaw of FIG. 7 with a section plane illustrated in broken lines;

[0033] FIG. 22 is a cross sectional view of the flip jaw and needle of FIG. 21 about the section plane;

[0034] FIG. 23 is a side view of the flip jaw and needle of FIG. 21;

[0035] FIG. 24 is a perspective view of the flip jaw and needle of FIG. 21 with an actuation cable attached thereto;

[0036] FIG. 25 is an exploded view of an embodiment of jaw assembly and an actuation assembly for a laparoscopic suturing device;

[0037] FIG. 26 is a perspective view of base jaws of the jaw assembly of FIG. 25 in an open configuration;

[0038] FIG. 27 is a perspective view of base jaws of the jaw assembly of FIG. 25 in a closed configuration;

[0039] FIG. 28 is an end view of an embodiment of suturing needle for use in a laparoscopic suturing device;
 [0040] FIG. 29 is a side view of the suturing needle of FIG. 28;

[0041] FIG. 30 is an isometric view of a base jaw of the jaw of FIG. 7;

[0042] FIG. 31 is a perspective view of a clevis of the actuation assembly of FIG. 25;

[0043] FIG. 32 is a perspective view of the clevis of FIG. 31 with a section plane illustrated in broken lines;

[0044] FIG. 33 is a cross sectional view of the clevis of FIG. 31 about the section plane;

[0045] FIG. 34 is a perspective view of the jaw assembly and actuation assembly of FIG. 25 with the clevis removed;

[0046] FIG. 35 is a perspective cross sectional view of the jaw assembly and actuation assembly of FIG. 34;

[0047] FIG. 36 is a cross sectional side view of the jaw assembly and actuation assembly of FIG. 34;

[0048] FIG. 37 is a cross sectional side view of the distal end of the jaw assembly of FIG. 1 in the stowed configuration;

[0049] FIG. 38 is an isometric view of an embodiment of a slotted actuator of the actuation assembly of FIG. 25;

[0050] FIG. 39 is a top view of the slotted actuator of FIG. 38;

[0051] FIG. 40 is a side view of the slotted actuator of FIG. 38;

[0052] FIG. 41 is an isometric view of an embodiment of suturing device having the jaw assembly of FIG. 1;

[0053] FIG. 42 is a partially exploded view of an embodiment of handle assembly of the suturing device of FIG. 41;

[0054] FIG. 43 is an exploded view of the handle assembly of FIG. 42;

[0055] FIG. 44 is a cross sectional top view of the handle assembly of FIG. 42;

[0056] FIG. 45 is a cross sectional side view of the handle assembly of FIG. 42;

[0057] FIG. 46 is a partial cross sectional view of the suturing device of FIG. 41 in an open configuration with a top cross sectional view of the handle assembly;

[0058] FIG. 47 is a partial cross sectional view of the suturing device of FIG. 41 in a partially-closed configuration with a top cross sectional view of the handle assembly;

[0059] FIG. 48 is a partial cross sectional view of the suturing device of FIG. 41 in a closed configuration with a top cross sectional view of the handle assembly;

[0060] FIG. 49 is a partial cross sectional view of the suturing device of FIG. 41 in a closed configuration with a top cross sectional view of the handle assembly;

[0061] FIG. 50 is a partial cross sectional view of the suturing device of FIG. 41 in a partially closed configuration with a top cross sectional view of the handle assembly;

[0062] FIG. 51 is a partial cross sectional view of the suturing device of FIG. 41 in an open configuration with a top cross sectional view of the handle assembly;

[0063] FIG. 52 is an isometric view of embodiments of toggling and latch mechanisms of the handle assembly of FIG. 41

[0064] FIG. 53 is a side view of the toggling and latch mechanisms of FIG. 52;

[0065] FIG. 54 is a top view of the toggling and latch mechanisms of FIG. 52;

[0066] FIG. 55 is a section view of the toggling mechanism of FIG. 52 with a follower in a first position during a toggle cycle;

[0067] FIG. 56 is a section view of the toggling mechanism of FIG. 52 with a follower in a second position during a toggle cycle;

[0068] FIG. 57 is a section view of the toggling mechanism of FIG. 52 with a follower in a third position during a toggle cycle;

[0069] FIG. 58 is a section view of the toggling mechanism of FIG. 52 with a follower in a fourth position during a toggle cycle;

[0070] FIG. 59 is a section view of the toggling mechanism of FIG. 52 with a follower in a fifth position during a toggle cycle;

[0071] FIG. 60 is a section view of the toggling mechanism of FIG. 52 with a follower in a first position after a completed toggle cycle;

[0072] FIG. 61 is a partial cross sectional view of the suturing device of FIG. 41 in an open configuration with a side cross sectional view of the handle assembly;

[0073] FIG. 62 is a partial cross sectional view of the suturing device of FIG. 41 with flip jaws rotated by the latch mechanism to a partially stowed configuration with a side cross sectional view of the handle assembly;

[0074] FIG. 63 is a partial cross sectional view of the suturing device of FIG. 41 with flip jaws rotated by the latch mechanism to a stowed configuration with a side cross sectional view of the handle assembly;

[0075] FIG. 64 is a cross sectional view of an embodiment of elongate shaft of the suturing device of FIG. 41;

[0076] FIG. 65 is a side view of an embodiment of the jaw assembly of a suturing device having a needle with a barbed suture and a braided anchor; and

[0077] FIG. 66 is a side view of an embodiment of the jaw assembly of a suturing device having a needle with a barbed suture, a braided leader, and a braided anchor.

DETAILED DESCRIPTION OF THE INVENTION

[0078] In various embodiments, a suturing system is disclosed herein that can increase a surgeon's efficiency at applying sutures to tissue inside a patient during minimally invasive surgeries such as laparoscopic surgeries. The suturing device passes a needle with an attached suture back and forth through tissue between alternate jaws of a jaw assembly by driving the needle through tissue and using a receiving jaw to grip the needle while a driving jaw releases the needle.

[0079] During clinical use, an access device such as a trocar is first placed through a body wall and into a body cavity, leaving the trocar cannula disposed within the body cavity and across the body wall. The suturing devices discussed herein can utilize a suture that is attached to the center of a needle with sharp points on both ends so it may be passed back and forth through tissue. In order to fit the device down a relatively low diameter trocar such as a 5 mm trocar, the needle can be stowed away during insertion and removal through the trocar in order to lower the diametric profile of the device. When the needle is stowed away the device is considered to be in the deactivated or stowed state. When inside the body cavity or during needle loading outside the body, the device can be deployed into its activated or suturing state. While in its activated state, the

device is able to drive a suturing needle through tissue and pass the needle and attached suture from a driving jaw to the receiving jaw.

[0080] Advantageously, the stowed needle configuration of the devices herein can allow the use of a needle with a length that otherwise would not fit down a 5 mm trocar. Allowing the surgeon to use a smaller trocar has considerable advantages, such as reducing post-operative healing time and scarring of the patient. Larger common size of trocars such as 10 mm, 12 mm and 15 mm would require a significantly larger incision than a 5 mm trocar. The stowed configuration of the devices herein obviates needle-length limitations of conventional suturing devices. The devices described herein can therefore stitch using a longer needle than the conventional 10 mm trocar diameter suturing devices while being able to traverse through a 5 mm trocar. This use of a longer needle can advantageously allow more tissue or thicker tissue to be penetrated, allowing the surgeon to suture more than 10 mm devices allow.

[0081] With reference to FIGS. 1-6, various aspects of an embodiment of a distal end of a laparoscopic suturing device 10 including an elongate shaft 50 and a jaw assembly 100 are illustrated. FIGS. 1-3 illustrate isometric, side, and top views of the jaw assembly 100 in a stowed configuration retaining a needle 200 and suture 220. In the stowed configuration, the jaw assembly 100 has a relatively small outer diameter for insertion through a laparoscopic surgical port such as a trocar cannula. As illustrated, with the jaw assembly in the stowed configuration, the needle 200 is retained by one of the jaws 110, 160 and the suture 220 extends proximally from the needle along the elongate shaft 50.

[0082] In certain embodiments, the jaw assembly 100 can be sized for insertion through one of a number of trocar cannula sizes, such as a trocar cannula for receiving 5 mm instruments, 10 mm instruments, 12 mm instruments, or 15 mm instruments. Advantageously, the suturing device herein having a low profile stowed jaw assembly configuration can allow a relatively large needle to be deployed through an instrument sized for a relatively small trocar.

[0083] With continued reference to FIGS. 1-3, in the illustrated embodiment, the jaw assembly 100 comprises a first jaw 110 and a second jaw 160 each having a proximal end pivotably coupled to one another and to a distal end 52 of the elongate shaft 50. The first jaw 110 can comprise a first base jaw 120 having a proximal end pivotably coupled to the elongate shaft 50 and a distal end. The first jaw 110 can further comprise a first flip jaw 140 pivotably coupled to the distal end of the first base jaw 120. In the illustrated embodiment, similarly, the second jaw 160 can comprise a second base jaw 170 having a proximal end pivotably coupled to the elongate shaft 50 and a distal end with a second flip jaw 190 pivotably coupled thereto.

[0084] With reference to FIGS. 4-6, further aspects of an embodiment of jaw assembly 100 of the laparoscopic suturing device 10 are illustrated. In FIGS. 4-6, side views of a sequence of operation of the jaw assembly from the stowed configuration to a suturing configuration are illustrated. FIG. 4 illustrates the jaw assembly 100 with the jaws 110, 160 having their base jaws 120, 170 in an open position pivoted such that their distal ends are spaced apart from one another and their flip jaws 140, 190 pivoted to a stowed configuration. As further discussed herein with reference to FIGS. 61-63, a latch mechanism can be actuated by a user to pivot

the flip jaws 140, 190 from the stowed configuration (FIG. 4) through a partially-rotated position (FIG. 5) to a suturing configuration (FIG. 6).

[0085] With reference to FIGS. 7-12, various aspects of a first jaw 110 of an embodiment of jaw assembly 100 and a needle 200 are illustrated. FIGS. 7-9 illustrate side, top and isometric views of the first jaw 110 with the first flip jaw 140 in the suturing configuration with the needle 200 positioned therein. A proximal end of the first base jaw 120 can comprise a pivot 124 such as an aperture therethrough to receive a rivet or pinned connection with the second jaw 160 and the distal end 52 of the elongate shaft 50. The proximal end of the first base jaw 120 can further comprise an actuation post 126 such that the first base jaw 120 can be pivoted about the pivot 124 by actuation of the post 126 by a jaw actuation mechanism. The first base jaw has a jaw body extending distally from the pivot 124 to a distal end. The first flip jaw 140 is pivotably coupled to the distal end of the first base jaw 120.

[0086] With reference to FIG. 10, a cross sectional view of the distal end of the first jaw 110 is illustrated. The first flip jaw 140 can have a needle receiving channel 142 formed therein. With the first flip jaw 140 pivoted to the suturing position, the needle receiving channel 142 is positioned generally transverse to a longitudinal axis of the first base jaw 120 to align with a curvature of the needle. Additionally, with reference to FIG. 11, the needle receiving channel 142 can have an oblong or eccentric cross sectional profile to maintain a rotational orientation of the needle 200 with respect to the needle receiving channel 142.

[0087] With continued reference to FIG. 10, in some embodiments, to increase manufacturability, the flip jaw's needle receiving channel can be a straight hole to allow the use of a non-rotating core pin during injection molding. The straight hole can be angled to be tangent to a circle drawn about the base jaw pivot centerline. The core pin can be inserted at an angle to account for a curvature of the needle. The core pin hole can be elliptical or an elongated oval to minimize the ability of the curved needle to rotate while seated in the hole. The major axis of the elliptical cross section can be oriented in the direction of the needle bend to account for the curvature of the needle. In a section view going through the needle hole of the flip jaw in the direction of the needle curvature, the needle can have three contact points to prevent motion. The width of the minor axis of the cross sectional ellipse would be the needle diameter plus clearance to prevent the needle from twisting around its longitudinal axis while seated in the hole.

[0088] With reference to FIG. 12, an exploded view of an embodiment of the first jaw 110 is illustrated. In the illustrated embodiment, the first flip jaw 140 is pivotably coupled to the first base jaw 120 with a pinned connection. In some embodiments, the first flip jaw 140 can be biased to the suturing position by a biasing member such as a torsion spring 144 positioned about a rotational axis of the flip jaw 140 between the flip jaw 140 and the base jaw 120. A first cable 390 and a first shim 360 can extend through a slot in the first base jaw 120 to the first flip jaw 140 to be selectively actuated by a user in an operation sequence through operation of a latching mechanism and toggle mechanism as further described below.

[0089] With reference to FIGS. 14-17, cross sectional views of an embodiment of first jaw 110 about a section line illustrated in FIG. 13 are illustrated. FIGS. 14-17 illustrate

an operating sequence of the first flip jaw **140** during operation of the latching mechanism such that the first flip jaw is pivoted from the suturing configuration (FIG. **14**) through partially-stowed configurations (FIGS. **15-16**) to the stowed configuration (FIG. **17**). Operation of the latch mechanism can increase tension on the first cable **390** extending through a slot or channel formed longitudinally in the first base jaw **120** to pivot the first flip jaw **140** relative to the first base jaw. While the first torsion spring **144** (FIG. **12**) can be used to bias the first flip jaw **140** to a suturing configuration once the suturing device has been introduced to a surgical field, it is contemplated that following use of the suturing device, a tensioned cable can advantageously provide reliable, robust rotation of the flip jaw **140** to the stowed position even where accumulation of fluid or tissue may otherwise resist or prevent rotation of the flip jaw. In other embodiments, the torsion spring **144** can be replaced with an additional cable such that the latching mechanism utilizes a first cable to pivot the flip jaw to a suturing configuration in an unlatching operation and the illustrated cable to pivot the flip jaw to the stowed configuration in the latching operation.

[0090] FIGS. **18-20** illustrate cross-sectional views of the first jaw **110** in an operating sequence of the toggle mechanism to advance a distal end of the first shim **360** distally through a slot or shim channel **141** in the first flip jaw **140**. Distal advancement of the first shim **360** through the shim channel **141** extending through the first flip jaw **140** (FIG. **19**) locks the first flip jaw **140** in the suturing configuration. The shim channel **141** can traverse the needle receiving channel. With the needle **200** positioned in the needle receiving channel **142**, a shim notch **210** of the needle is generally aligned with the shim channel **141** of the first flip jaw **140**. Accordingly, further advancement of the first shim **360** extends the shim distally to engage an interference feature such as a first slot or shim notch **210** (FIGS. **28-29**) in the needle **200** to latch the needle **200** into the first flip jaw (FIG. **20**). The shim channel **141** in the first flip jaw **140** can extend distally beyond the needle receiving channel **142** such that the first shim can engage the first flip jaw **140** proximal and distal of the needle receiving channel **142** and be recessed from tissue. In some embodiments, a distal surface of the first flip jaw **140** can include a protrusion formed thereon having the slot therein to allow additional distal movement of the first shim **360**. While the illustrated embodiment includes a single shim to lock both the flip jaw and needle, in other embodiments, it is contemplated that locking of the needle and flip jaw can be accomplished using two separate mechanisms. In these embodiments, a shim can be used to lock the needle, and the flip jaw may be locked by another mechanism such as a second shim, sliding bolt, or pin.

[0091] With reference to FIGS. **21-24**, various views of the first flip jaw **140**, needle **200** and first shim **360** (FIGS. **21-22**) are illustrated. FIG. **22** illustrates a sectional view of the first flip jaw about the sectional plane indicated in broken lines in FIG. **21** with the shim **360** partially advanced into the shim channel **141** in the first flip jaw **140**. The first flip jaw can include a retention feature such as a generally spherical detent **146** positioned therein to engage a corresponding mating recess **214** in the needle **200**. This detent engagement can advantageously maintain the position of the needle **200** within the flip jaw when the first flip jaw **140** is in the stowed configuration and before the toggle mechanism has completely advanced the first shim **360** to engage

the first shim notch **210** of the needle. In some embodiments, the detent can have a leaf spring wrapped around the flip jaw that applies force to a ball. The ball can reside inside a cylindrical channel that intersects with the needle hole in the flip jaw. The channel narrows near the needle hole to prevent the ball from falling out when no needle is present. When a needle is in the flip jaw, the ball is pressed into a corresponding recess in the needle to retain it while the shims are not locking the needle in place. In other embodiments, instead of the ball of the illustrated embodiment, the needle detent of the flip jaw can be an elastomeric protrusion, a shaped leaf spring tab, or a magnet.

[0092] FIG. **23** illustrates the first torsion spring **144** positioned about the pivot axis of the first flip jaw **140**. The illustrated embodiment of first flip jaw **140** also includes the distal protrusion beyond the needle retention channel. As illustrated, one portion of the distal surface of the first flip jaw **140** protrudes from an otherwise generally planar face and includes the shim slot therethrough. An adjacent portion of the distal surface of the first flip jaw is recessed such that the first flip jaw **140** can be nested with the second flip jaw in a low profile configuration having a relatively small outer diameter with the jaw assembly in the stowed configuration.

[0093] FIG. **24** illustrates the first cable **390** of the latch mechanism coupled to the first flip jaw. The first cable **390** is coupled to the first flip jaw at a location offset from the pivot axis such that tension in the cable tends to pivot the first flip jaw towards the stowed configuration. The first flip jaw **140** can include a cable slot in an outer surface thereof to receive the first cable **390** when the first flip jaw **140** has been pivoted to the suturing configuration.

[0094] With reference to FIG. **25**, an exploded view of a distal end of laparoscopic suturing device **10** is illustrated. As illustrated, the distal end includes the jaw assembly **100**, a jaw actuation mechanism **150**, and a distal end **52** of an elongate shaft **50**. In the illustrated embodiment, the jaw assembly includes first and second jaws **110**, **160** that are pivotably coupled to one another and are substantially similar. It is contemplated that in other embodiments of jaw assembly for use in the suturing device herein, a suturing device can include jaws having different configurations. For example, a jaw assembly can include a single pivotable jaw and a single stationary jaw or only one jaw having a pivotable flip jaw. Thus, in some embodiments, a jaw assembly can include a first jaw comprising a first base jaw and a first flip jaw pivotably coupled to the first base jaw in which the needle can be positioned in a stowed configuration, and a second jaw pivotably coupled to the distal end of the elongate shaft, but having a needle recess therein with no corresponding second flip jaw. In other embodiments, the second jaw can extend longitudinally distally from the elongate shaft and be pivotably fixed relative to the elongate shaft.

[0095] With continued reference to FIG. **25**, the jaw actuation mechanism **150** can include a clevis **152** and an actuator **154**. The clevis **152** can contain guiding slots for the shims and cables to prevent buckling. A slotted head of the actuator **154** can support the shims and cables from underneath to prevent buckling inside the clevis. The clevis can be formed at or positioned on the distal end **52** of the elongate shaft **50**. The first and second jaws can be pivotably coupled to the clevis **152**. The slotted head of the actuator **154** can include actuation slots **156** formed therein. In the illustrated embodiment, a drive rod **158** is slideable within the elongate

shaft **50** and is coupled to the actuator **154** to advance the actuator **154** proximally and distally relative to the elongate shaft **50**. Actuation posts **126** of the first and second base jaws **120**, **170** can be positioned within the actuation slots **156** such that longitudinal translation of the actuator **154** opens and closes the base jaws **120**, **170**.

[0096] FIGS. 26-27 illustrate the actuator **154**, first base jaw **120**, and second base jaw **170**. As illustrated, the actuator **154** can be translated longitudinally to pivot the base jaws **120**, **170** relative to one another such that the base jaws **120**, **170** can be selectively positioned in an open (FIG. 26) or closed (FIG. 27) configuration.

[0097] With reference to FIGS. 28-29, an embodiment of suturing needle is illustrated. As illustrated, the needle **200** includes a first shim notch **210** adjacent a first penetrating tip, a second shim notch **212** adjacent a second penetrating tip, a first recess **214** adjacent the first penetrating tip, and a second recess **216** adjacent the second penetrating tip. By alternating which shim is locking the needle, the needle may be passed between the two jaws of the device. Advantageously, the needle also has detent features provided by the first and second recesses **214**, **216** that allow the jaws to grip the needle while there are no shims locking the needle in place (i.e. in the stowed configuration). The needle can also include an aperture **218** for receiving a suture therethrough. It is contemplated that in some embodiments, the suture can include a leader segment such as a braided metallic or polymeric segment coupled to the needle **200** at the aperture **218** and a suturing segment coupled to the leader such as at a crimp joint. In various embodiments, the leader segment can be knotted, adhered with adhesive, heat forming, or tied about the needle. In various embodiments, the leader segment and suturing segment can be fixed by knotting the suture and leader, heat forming the suture and leader inside, or adhered with adhesive. The suturing segment can be a monofilament polymeric suture.

[0098] Desirably, this suture construction with a braided leader and monofilament suturing segment can be resilient and enhance usability. Driving the needle through tissue can cause repeated bending of the leader at the needle/leader interface. Having a more flexible material can reduce the likelihood of breakage due to repeated bending of the material at this interface. This flexibility also decreases the amount of force to drive the needle through tissue since the material bends easier and therefore reduces the profile. In some embodiments, the leader can be inserted into the needle aperture, and then crimped in the aperture. The leader can be connected to the suture by a stainless steel crimped tube. The suture may also be braided to increase flexibility. In some embodiments, the leader can be braided stainless steel to desirably provide enhanced strength and allow welding to the needle.

[0099] In some embodiments, the suturing segment can comprise a monofilament or braided suture that is unidirectionally barbed to prevent it from retracting through the tissue and causing wound dehiscence. This retention feature would eliminate the need for the surgeon to tie knots after every stitch, which improves the efficiency and ease of the surgery. An end of the suture opposite the needle can have an anchor to prevent further migration into the tissue and wound dehiscence. In some embodiments, the anchor can comprise a fixed or variable diameter loop that the suture is threaded through after the first pass through tissue, resulting in a knotless anchored end. The suturing is then continued

without the need to tie any knots. In other embodiments, the anchor of the suture can comprise a T-shaped anchor. Desirably, a T-shaped anchor can eliminate the need for threading the suture through an anchor loop after the first pass through tissue.

[0100] With continued reference to FIG. 29, in the illustrated embodiment, the needle can comprise a double headed configuration with penetrating tips disposed at opposite ends thereof. A central body of the needle can be generally curved. In some embodiments, the needle is curved to have a bend radius that is equal to the distance from the needle to the base jaw's pivot centerline. This bend radius can help guide the needle through tissue and can minimize the amount of torque that could bend the needle during the piercing of tissue. In other embodiments, the needle can comprise a single headed configuration with a single penetrating tip disposed at one end thereof.

[0101] With reference to FIGS. 30-33, an embodiment of first base jaw **120** (FIG. 30) and an embodiment of clevis **152** are illustrated. As illustrated, both the base jaws **120**, **170** and clevis **152** can include passages such as longitudinal slots or channels to facilitate operation of the shims and cables.

[0102] With reference to FIGS. 34-37, the jaw assembly **100** and jaw actuation mechanism **150** are illustrated with the jaw assembly in a stowed configuration with a needle **200** in one of the jaws. FIG. 37 illustrates the needle **200** with a suture **220** having a leader **222**, crimp **224**, and suturing segment **226** attached thereto.

[0103] With reference to FIGS. 38-40, an embodiment of actuator **154** for the jaw actuation mechanism is illustrated. As illustrated, the actuator comprises a slotted actuation member having actuation slots **156** on opposing surfaces thereof. The slotted portion of the actuation member can be positioned between the first base jaw and the second base jaw proximal of the pivot such that actuation posts of the base jaws are each received in an actuation slot **156**.

[0104] With reference to FIG. 41, an embodiment of laparoscopic suturing device **10** is illustrated. The suturing device **10** can include a handle assembly **300**, an elongate shaft **50**, and a jaw assembly **100**. The handle assembly can extend generally longitudinally from a proximal end to a distal end. The handle assembly **300** can include a trigger mechanism **310** including pivotable levers protruding from the handle assembly. In other embodiments, it is contemplated that other handle and trigger configurations can be used with various aspects of jaw assembly mechanism described herein. The elongate shaft **50** extends distally from the distal end of the handle assembly and defines a central longitudinal axis of the suturing device **10**. The jaw assembly **100** can include a pair of opposing jaws pivotably coupled to one another and to the distal end **52** of the elongate shaft **50**.

[0105] With reference to FIGS. 42-43, an embodiment of handle assembly is illustrated in partially exploded and fully exploded view. In FIG. 42, a handle housing has been removed to illustrate a trigger mechanism **310**, closure mechanism **340**, toggle mechanism **350**, and latch mechanism **380** therein. In FIG. 43, the trigger mechanism **310**, closure mechanism **340**, toggle mechanism **350**, and latch mechanism **380** are illustrated in an exploded arrangement.

[0106] With reference to FIGS. 44-45, cross sectional views of an embodiment of handle assembly are illustrated.

FIG. 44 illustrates a top cross sectional view. FIG. 45 illustrates a side cross sectional view.

[0107] With reference to FIGS. 46-51, partial cross-sectional views of the handle assembly are illustrated along with corresponding positions of the jaw assembly 100 and needle 200. FIG. 46 illustrates the handle assembly in an initial position with the needle 200 positioned in first jaw 110. FIGS. 47-48 illustrate an operational sequence as first and second levers 312, 322 of the trigger mechanism are squeezed towards the handle body of handle assembly 300. FIGS. 49-51 illustrate an operational sequence as first and second levers 312, 322 of the trigger mechanism 310 are released from the handle body of handle assembly 300.

[0108] With reference to FIGS. 46-48, the trigger mechanism can include a pair of opposed levers 312, 322 each pivotable with respect to the handle body. As illustrated, the levers can be pivotably coupled to the handle body adjacent a distal end of the handle assembly. Each of the levers 312, 322 can comprise a drive slot 314, 324 formed therein. As illustrated, the drive slots 314, 324 can include profiles configured to initially close the jaws as the levers are squeezed, then maintain closure upon further movement of the levers 312, 322 while the toggle mechanism is actuated. For example, the drive slots 314, 324 can include a driving segment 316, 326 and a dwell segment 318, 328. A closure mechanism 340 can include posts guided by the drive slots 314, 324 and coupled to a proximal end of the drive rod 342, which extends distally through elongate shaft 50 to the jaw actuation mechanism 150. Accordingly, upon initial movement of the levers 312, 322 toward handle body, (FIGS. 46-47), posts 344 are guided through driving segments 316, 326 of drive slots 314, 324 to longitudinally translate drive rod 342 and close base jaws 120, 170 (FIG. 47).

[0109] With reference to FIGS. 47-48, further compression of the levers 312, 322 towards handle body results in posts 344 of the closure mechanism moving in dwell segments 318, 328 of drive slots 314, 324, resulting in minimal further displacement of drive rod 342. However, the levers 312, 322 of trigger mechanism are each pivotally coupled to first ends of actuation links 320, 330 extending generally proximally within the handle assembly. Second ends of the actuation links 320, 330 opposite the first ends are coupled to a drive pusher 352 that is longitudinally translatable within the handle body. Longitudinal translation of the drive pusher 352 within the handle body can actuate the toggle mechanism 350 to selectively rotate a toggle tube 354 within the handle body as further described with reference to FIGS. 52-60.

[0110] With reference to FIGS. 46-48, an initial compression of the levers 312, 322 of trigger mechanism (FIGS. 46-47) actuates actuation links 320, 330 to translate the drive pusher 352 proximally along the toggle tube 354 of the toggle mechanism 350. Further compression of the levers 312, 322 of the trigger mechanism actuates actuation links 320, 330 to translate drive pusher proximally along the toggle tube 354 and rotate the toggle tube about a longitudinal axis of the handle body. As further described herein with reference to FIGS. 52-60, rotation of the toggle tube 354 alternately longitudinally advances one of the first shim 360 and the second shim 370 to retain the needle 200 alternately in one of the first and second jaws. Thus, when a user squeezes the levers 312, 322 of the trigger mechanism, the jaws of the jaw assembly are closed, and the needle 200 is passed from one jaw to another.

[0111] With reference to FIGS. 49-51, releasing the levers 312, 322 guides the posts 344 of the closure mechanism 340 along the dwell segments 318, 328 of the slots 314, 324 (FIGS. 49-50). During this initial opening movement, the toggle tube 354 continues to rotate, completing the advancement of one of the shims. As the levers continue to spread, the posts 344 of the closure mechanism 340 ride along the driving segments 316, 326 of the slots 314, 324 (FIGS. 50-51) such that the drive rod 342 is longitudinally translated to return the jaw assembly to an open configuration. This further movement translates the drive pusher 352 distally along toggle tube 354 of toggle mechanism 350.

[0112] With reference to FIGS. 52-54, various aspects of the toggle mechanism are illustrated in isometric, top, and side views. As illustrated, the toggle mechanism 350 comprises a drive pusher 352 longitudinally slideable within the handle body by actuation of the trigger mechanism 310. The drive pusher 352 can include a forked proximal end having a follower 353 such as a post protruding from each fork of the drive pusher 352. While the drive pusher 352 is illustrated as a monolithically formed component, in other embodiments, fork arms of the pusher could be discrete parts that function in a similar fashion. In some embodiments, the arms of the pusher can be rigid with a translating pin and spring element keeping the pin in contact with the toggle tube. The toggle mechanism 350 can also include a toggle tube 354 rotatable within the handle body. As illustrated, the toggle tube 354 comprises a cam drive slot 356 and a shim guide 358. The followers 353 of the drive pusher can be positioned in the cam drive slot 356. The cam drive slot 356 can include a pair of generally longitudinally extending lead segments and a rotation segment extending at an angle transverse to a longitudinal axis of the handle body between the lead segments.

[0113] With continued reference to FIGS. 52-54, the toggle mechanism 350 can further comprise a first shim 360 having a first follower 362 at a proximal end thereof and a second shim 370 having a second follower 372 at a proximal end thereof. The followers 362, 372 can comprise protruding posts extending radially inwardly from the shims 360, 370. Each of the followers 362, 372 can be positioned in the shim guide 358 of the toggle tube 354. In other embodiments, the shims can include radially inwardly extending flanges positioned in the shim guide to move the shims without followers. The shim guide 358 can have a shim advancement profile such that rotation of the toggle tube 354 within the handle body alternately longitudinally advances or retracts the followers 362, 372 of the shims 360, 370. Thus, rotation of the toggle tube 354 in a toggle cycle can alternately advance and retract the shims 360, 370 to alternately retain the needle within one or the other of the flip jaws as described with reference to FIGS. 18-20.

[0114] With reference to FIGS. 55-60, an operational sequence of the toggle mechanism is illustrated in sectional views. In FIG. 55, the follower 353 of the drive pusher 352 is positioned in the longitudinal lead segment of the cam drive slot 356, the first shim 360 is in a distally advanced position, and second shim 370 is in a retracted position. During an initial squeezing operation of the trigger mechanism, corresponding to closing the jaw assembly as described above with reference to FIGS. 46-47, the follower 353 is advanced longitudinally proximally along the lead segment of the cam drive slot 356, as illustrated in FIGS.

55-56. The toggle tube **354** is not rotated during this operation, and the first and second shims **360**, **370** remain in their initial positions.

[0115] With reference to FIGS. **56-58**, during the operational sequence of the toggle mechanism **350**, once the trigger mechanism is squeezed beyond jaw closure (FIGS. **47-48**), the follower **353** of the drive pusher **352** reaches the rotation segment of the cam drive slot **356**. The rotation segment can be configured to rotate the toggle tube **354** a predetermined direction upon actuation by the drive pusher **352**. For example, the rotation segment can have a variable depth profile at an intersection of the rotation segment with the lead segment such that as the follower **353** is advanced into rotation segment, it tends to follow a desired segment of the rotation segment to rotate the toggle tube a predetermined direction. The rotation segment extends along the toggle tube **354** transverse to a longitudinal axis of the handle body such that further proximal advancement of the drive pusher **352** and follower **353** relative to the toggle tube rotates the toggle tube **354** within the handle body (FIGS. **56-58**). This rotation of the toggle tube **354** likewise rotates the shim guide **358** such that the first shim follower **362** and first shim **360** are withdrawn proximally while second shim follower **372** and second shim **370** are advanced distally. Thus, during a continued squeezing operation of the trigger mechanism, corresponding to closing the jaw assembly as described above with reference to FIGS. **47-48**, the follower **353** is advanced along the rotation segment of the cam drive slot **356**, as illustrated in FIGS. **56-58**. The toggle tube **354** is rotated during this operation, and the first and second shims **360**, **370** are longitudinally moved.

[0116] With reference to FIGS. **58-60**, during the operational sequence of the toggle mechanism **350**, once the trigger mechanism is released from a fully squeezed orientation (FIGS. **49-51**), the follower **353** of the drive pusher **352** reaches a proximal-most peak of the rotation segment of the cam drive slot **356** (FIG. **58**). The rotation segment can be configured to continue rotating the toggle tube **354** a predetermined direction upon release of the trigger mechanism and distal movement of the drive pusher **352**. For example, the rotation segment can have a variable depth profile at the proximal-most peak of the rotation segment such that as the follower **353** is advanced along the rotation segment, it tends to follow a desired segment of the rotation segment to rotate the toggle tube a predetermined direction. Furthermore, the follower **353** can be disposed at an end of a flexible arm on the drive pusher, which acts as a leaf spring allowing the follower **353** to advance over a depth step. The rotation segment extends along the toggle tube **354** transverse to a longitudinal axis of the handle body such that initial distal withdrawal of the drive pusher **352** and follower **353** relative to the toggle tube continues to rotate the toggle tube **354** within the handle body (FIGS. **58-59**). Advantageously, this continued rotation is provided by a “double action” stroke of the toggle tube (i.e. rotation during both squeezing and releasing the trigger mechanism). This double action stroke desirably halves the stroke length of the trigger mechanism that would otherwise be required to rotate the toggle tube and allows for a lower pressure angle of the follower **353** and cam drive slot **356** system. This rotation of the toggle tube **354** likewise rotates the shim guide **358** such that the first shim follower **362** and first shim **360** are withdrawn proximally while second shim follower **372** and second shim **370** are advanced distally. Thus, during an

initial release operation of the trigger mechanism, corresponding to the initial dwell portion as described above with reference to FIGS. **49-50**, the follower **353** is advanced along the rotation segment of the cam drive slot **356**, as illustrated in FIGS. **58-59**. The toggle tube **354** is rotated during this operation, and the first and second shims **360**, **370** continue to move longitudinally until the second shim **370** reaches a distally advanced position and the first shim reaches a proximally withdrawn position.

[0117] With reference to FIG. **60**, during the operational sequence of the toggle mechanism **350**, as the trigger mechanism continues to travel to a fully released position (FIGS. **50-51**), the follower **353** of the drive pusher **352** reaches the longitudinal lead segment of the cam drive slot **356** (FIG. **60**). The rotation segment can have a variable depth profile at the intersection of the rotation segment with the lead segment such that as the follower **353** is withdrawn proximally, it tends to enter the lead segment. Thus continued distal withdrawal of the drive pusher **352** and follower **353** relative to the toggle tube along the longitudinally extending lead segment maintains the rotational orientation of the toggle tube **354** within the handle body (FIG. **60**). Thus, during a fully released operation of the trigger mechanism, corresponding to the jaw opening portion as described above with reference to FIGS. **50-51**, the follower **353** is advanced along the lead segment of the cam drive slot **356**, as illustrated in FIG. **60**. During this operation, the second shim **370** remains in the distally advanced position and the first shim **360** remains in the proximally withdrawn position.

[0118] Accordingly, in the illustrated embodiment, one compress and release cycle of the trigger mechanism cycles the toggle mechanism **350** to rotate the toggle tube **354** 180 degrees. This rotation of the toggle tube **354** 180 degrees repositions one shim **360** from a distally advanced position to a proximally withdrawn position and repositions the other shim **370** from a proximally withdrawn position to a distally advanced position. Thus, advantageously, the illustrated toggle mechanism can allow a single trigger mechanism to actuate both a jaw open/close/open cycle and alternately advance a shim to retain a needle in one of the jaws. In other embodiments, other toggle mechanisms can be used to alternately advance and withdraw shims responsive to a cycle of a trigger mechanism.

[0119] As discussed above, the flip jaws utilize a torsion spring and cable mechanism for rotation between the stowed and suturing configurations. The flip jaws rotate about a dowel pin that is held on either end of the flip jaw by the base jaw. In some embodiments, a distal end of the cable is welded to the bottom of a corresponding flip jaw and is controlled by a latch mechanism in the handle. In other embodiments, the cables can be attached to corresponding flip jaws by crimping each cable into a slot in the corresponding flip jaw, or having a fitting on the end of each cable that attaches to the corresponding flip jaw. In other embodiments, the flip jaw cable can also be fixed to the flip jaw by solder or brazing. The torsion spring is on the flip jaw's rotation axis, between the flip jaw and base jaw. The spring is biased to rotate the flip jaw into the activated, suturing configuration. To rotate the flip jaws to the activated state, the tension in the cable is released to allow the torsion springs to flip the jaws. To rotate the flip jaws into the deactivated state, the cable is tensioned.

[0120] With reference to FIG. **61-63**, an operational sequence of the latch mechanism **380** is illustrated. FIG. **61**

illustrates the latch mechanism in an unlatched configuration corresponding to a suturing configuration of the flip jaws. The latch mechanism 380 can comprise a latch knob 381 at a proximal end of the handle assembly. In the illustrated embodiment, the latch knob 381 is coupled to a latch tube 382 having first and second guide slots 384, 386 formed therein. The latch mechanism further comprises first and second cables 390, 394 extending distally through the handle assembly and elongate shaft and coupled to the flip jaws of the jaw assembly as described above with respect to FIGS. 14-17. Proximal ends of the cables 390, 394 are coupled to posts 392, 396 positioned within the guide slots 384, 386 of the latch tube 382. The posts 392, 396 can be dowel pins protruding from a bearing tube that is coupled to the toggle tube 354 of the toggle mechanism such that proximal movement of the posts 392, 296 withdraws the toggle tube and shims 360, 370 proximally.

[0121] With continued reference to FIGS. 61-63, upon rotation of the latch knob 381, latch tube 382 correspondingly rotates. Thus, posts 392, 396 are withdrawn proximally by interaction with guide slots 384, 386 of guide tube. This proximal movement of posts 392, 396 applies tension to cables 390, 394 to pivot flip jaws from the suturing configuration (FIG. 61) to the stowed configuration (FIG. 63). This proximal movement of posts 392, 396 also withdraws toggle tube 354 and shims 360, 370 proximally. With the latch mechanism 380 partially rotated, the shims 360, 370 can be withdrawn from both jaws such that the jaw assembly can be reloaded with a new needle, if desired. Further rotation of the latch knob 381 positions the posts 392, 396 at an end of the guide slots 384, 386 that can be configured, such as with a flat segment or detent, to maintain the latch mechanism 380 in a latched configuration having the flip jaws in the stowed configuration.

[0122] When it is desired to unlatch the device to position the flip jaws in the suturing configuration, the sequence of FIGS. 61-63 can be performed in reverse. In the unlatching sequence, the latch mechanism in the handle both releases the cable tension and also slides the needle locking shims forward in one motion. After the cable tension is released and the springs finish rotating the flip jaws to the activated state, the shims then slide forward into the flip jaws to prevent them from rotating back into the deactivated state. One shim will slide further in order to lock the needle in that jaw. In some embodiments, the latch mechanism can further comprise a tensioning spring to maintain tension in the cables in both the latched and unlatched configurations of the suturing device.

[0123] While a torsion spring biased unlatching and cable driven latching operation of the latching mechanism is illustrated, it is contemplated that in other embodiments, other latching mechanisms can be used with suturing devices as described herein. For example, in some embodiments, each jaw can include a first cable to pivot the flip jaw to a suturing configuration and a second cable to pivot the flip jaw to a stowed configuration. In other embodiments, the flip jaws can be rotated or pushed into the suturing or stowed configurations using a more rigid cable or rod that can both push and pull the flip jaw, eliminating the need for a torsion spring or two counteracting cables. In still other embodiments, the flip jaws can be pivoted relative to the base jaws by a worm gear and sector, Nitinol actuators, or a lead screw and nut device.

[0124] With reference to FIG. 64, a cross section of the elongate shaft adjacent the distal end is illustrated. In the illustrated embodiment, the elongate shaft 50 can include a cover tube and a spacer member 56 through which the drive rod, cables, and shims extend. In some embodiments, the spacer member can be an extruded member. The spacer member can prevent buckling of the shims, cables, and drive rod inside the cover tube. When the user squeezes the levers of the trigger mechanism, the levers transmit the force to the drive rod down the length of the device's shaft.

[0125] With reference to FIGS. 65 and 66, in some embodiments, the needle 200 and suture 420 can include a braided polymeric tube anchor 430. The braided polymer tube 430 can be disposed at an end of the suture opposite the needle for use as an anchor for the suture. The braided polymer tube 430 anchor can be attached to the end of the suture via welding, adhesive, or another joining method. Advantageously, the braided polymer tube 430, with multiple insertion areas provided by voids between adjacent areas of overlapping polymer strands, can provide for a relatively easy target for a surgeon to thread the needle through.

[0126] With reference to FIG. 66, in certain embodiments, the needle 200 and suture 420 can include a leader segment 440 comprising a braided polymer tube between the needle 200 and the suture 420. The braided polymeric tube can allow for enhanced flexibility of the suture at the needle interface.

[0127] With reference to FIGS. 65 and 66, in certain embodiments, the needle and suture 420 can include a unidirectional barbed suture to facilitate retention of tissue by the suture. In other embodiments, a smooth monofilament suture can be used with a braided polymer tube anchor and/or braided polymer tube leader.

[0128] Suturing devices described herein can incorporate various materials and combinations of materials in their construction. For example, in some embodiments, the flip jaws, base jaws, clevis, slotted head, drive rod, cables, torsion springs, shims, dowel pins, needle, detent spring, detent ball, cover tube, suture crimp, toggle tube, and rivet can be made of metals such as stainless steel, aluminum, titanium, tungsten, brass, bronze, or alloys of such. In some embodiments, the shims and/or cables can be made out of Nickel-Titanium (Nitinol) to allow greater flexibility and fatigue life. In some embodiments, the monofilament or braided suture and flexible multifilament leader can be made of non-bioabsorbable polymers such as polypropylene, nylon, polyester, or silk, or from bioabsorbable polymers such as polydioxanone, polylactic acid, polyglycolide, polylactic-co-glycolic acid, polycaprolactone, or catgut. In some embodiments some or all of the trigger levers, linkages, latch, knob, shim followers, and drive rod adapters can be made of plastics such as polycarbonate, ABS, polyethylene, polypropylene, PEEK, polyurethane, PVC, acrylic, nylon, polystyrene, acetal, carbon fiber, polyimide, or polyester.

[0129] While the illustrated embodiments of suturing device include a latching mechanism to configure jaws to a stowed, low diametric profile configuration for insertion of a relatively large needle through a relatively low diameter surgical port, it is contemplated that in other embodiments of suturing device, other configurations can achieve a low diametric profile for insertion. For example, in some embodiments, a suturing device can include a telescopically compressible needle. A compression element such as a

spring can be contained in the needle and enable two halves of the needle to concentrically compress when subjected to forces greater than tissue puncturing. The closure of the jaws can be selectively controlled by the handle with one setting for passage of the needle from jaw to jaw and another setting to enable further closure of the jaws to compress the needle to the low profile state to enable withdrawal through a 5 mm trocar.

[0130] In the illustrated embodiment, the suture is positioned along the elongate shaft with the jaw assembly in a low-profile stowed configuration for insertion through a surgical port. It is contemplated that in other embodiments, the profile of the suturing device can be further reduced for insertion. For example, in some embodiments, the clevis and outer tube of the elongate shaft can have an axial groove formed therein for the suture to align in during insertion through a trocar, reducing the cross sectional profile of the device. In other embodiments, suture can be coiled or folded within the two base jaws during insertion through the trocar in order to reduce the cross sectional profile of the device. The base jaws can be closed around the coiled or folded suture with the jaw assembly in the stowed state. The base jaws can then be opened while inside the body cavity to release the suture. In other embodiments, the suturing device can further comprise an introducing tube in which the suture may be coiled or folded for insertion through the trocar. This introducing tube can desirably reduce the cross sectional profile of the device during insertion through a trocar and allow the use of larger profile suture anchors. The introducing tube can cover the base jaws while they are fully closed in the stowed configuration. Once inserted into the body cavity, another instrument such as a surgical grasper can pull the introducing tube off the jaws, releasing the suture inside the body cavity. The introducing tube can then be immediately removed from the body cavity through the other instrument's trocar.

[0131] Although this application discloses certain preferred embodiments and examples, it will be understood by those skilled in the art that the present inventions extend beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the invention and obvious modifications and equivalents thereof. Further, the various features of these inventions can be used alone, or in combination with other features of these inventions other than as expressly described above. Thus, it is intended that the scope of the present inventions herein disclosed should not be limited by the particular disclosed embodiments described above, but should be determined only by a fair reading of claims which follow.

What is claimed is:

1. A laparoscopic suturing device comprising:

a handle assembly having a proximal end and a distal end; an elongate shaft extending distally from the distal end of the handle assembly and defining a central longitudinal axis;

a jaw assembly extending distally from the elongate shaft, the jaw assembly comprising a first jaw and a second jaw each having a proximal end pivotably coupled to the elongate shaft and a distal end; and

a needle; and

wherein the jaw assembly and the needle are selectively positionable between a stowed configuration in which the needle is positioned in one of the first jaw and the second jaw and the first jaw, the second jaw, and the

needle are generally aligned with the central longitudinal axis and an open configuration in which the first jaw, the second jaw, and the needle extend transversely to the central longitudinal axis.

2. The laparoscopic suturing device of claim 1, wherein the handle assembly comprises a latch mechanism operably coupled to the jaw assembly to selectively position the first jaw and the second jaw in the stowed configuration.

3. The laparoscopic suturing device of claim 1, wherein the first jaw comprises:

a first base jaw at the proximal end of the first jaw; and a first flip jaw at the distal end of the first jaw and pivotably coupled to the first base jaw, and the first flip jaw pivotable relative to the first base jaw between a stowed position when the jaw assembly is in the stowed configuration and a suturing position.

4. The laparoscopic suturing device of claim 3, wherein the first flip jaw comprises a needle receiving channel formed therein, the needle receiving channel positioned generally transverse to an axis extending from the proximal end of the first jaw to the distal end of the first jaw.

5. The laparoscopic suturing device of claim 4, wherein the first flip jaw comprises a detent positioned therein to engage the needle when a portion of the needle is positioned in the needle receiving channel.

6. The laparoscopic suturing device of claim 4, wherein the first flip jaw comprises a shim channel extending there-through, the shim channel traversing the needle receiving channel.

7. The laparoscopic suturing device of claim 6, further comprising a shim extendable partially into the shim channel to lock the first flip jaw in the suturing configuration and further extendable into the needle receiving channel to engage the needle when the needle is positioned in the needle receiving channel.

8. The laparoscopic suturing device of claim 7, wherein the needle comprises a shim notch alignable with the shim channel of the first flip jaw when the needle is positioned in the needle receiving channel of the first flip jaw.

9. The laparoscopic suturing device of claim 3, wherein the second jaw comprises:

a second base jaw at the proximal end of the second jaw; and

a second flip jaw at the distal end of the second jaw and pivotably coupled to the second base jaw, and the second flip jaw pivotable relative to the first base jaw between a stowed position when the jaw assembly is in the stowed configuration and a suturing position.

10. The laparoscopic suturing device of claim 1, wherein the needle comprises a first penetrating tip and a second penetrating tip opposite the first penetrating tip.

11. A laparoscopic suturing device comprising:

a handle assembly having a proximal end and a distal end, the handle assembly comprising a trigger mechanism, a closure mechanism, and a toggle mechanism;

an elongate shaft extending distally from the distal end of the handle assembly and defining a central longitudinal axis;

a jaw assembly extending distally from the elongate shaft, the jaw assembly comprising a first jaw and a second jaw each having a proximal end pivotably coupled to the elongate shaft and a distal end; and

a needle;

wherein the trigger mechanism is operably coupled to the closure mechanism and the toggle mechanism such that an actuation cycle of the trigger mechanism sequentially actuates the closure mechanism to close the first jaw and the second jaw of the jaw assembly, actuates the toggle mechanism to transfer the needle from one of the first jaw and the second jaw to the other of the first jaw and the second jaw, and actuates the closure mechanism to open the first jaw and the second jaw.

12. The laparoscopic suturing device of claim **11**, wherein the closure mechanism comprises a drive rod extending longitudinally through the elongate shaft, the drive rod having a proximal end coupled to the trigger mechanism.

13. The laparoscopic suturing device of claim **12**, wherein the trigger mechanism comprises a drive slot formed therein and the drive rod comprises a post positioned in the drive slot coupling the closure mechanism to the trigger mechanism.

14. The laparoscopic suturing device of claim **12**, wherein the drive slot comprises a profile having a driving segment arranged to translate the drive rod upon actuation of the trigger mechanism and a dwell segment arranged to maintain position of the drive rod upon further actuation of the trigger mechanism.

15. The laparoscopic suturing device of claim **11**, wherein the trigger mechanism comprises an actuation link having an end coupled to a drive pusher longitudinally translatable within the handle assembly.

16. The laparoscopic suturing device of claim **15**, wherein the toggle mechanism comprises a toggle tube rotatable with respect to the handle assembly about the central longitudinal axis, the toggle tube comprising a cam drive slot and a shim guide formed therein.

17. The laparoscopic suturing device of claim **16**, wherein the drive pusher is coupled to the cam drive slot such that translation of the drive pusher within the handle assembly rotates the toggle tube with respect to the handle assembly.

18. The laparoscopic suturing device of claim **16**, wherein the toggle mechanism further comprises a first shim and a second shim each coupled to the shim guide of the toggle

tube such that rotation of the toggle tube alternately longitudinally advances and retracts the first shim and the second shim relative to the handle assembly.

19. A laparoscopic suturing system comprising:

a laparoscopic suturing device comprising:

a handle assembly;

an elongate shaft having a proximal end coupled to the handle assembly and a distal end, and defining a central longitudinal axis extending between the proximal end and the distal end; and

a jaw assembly coupled to the distal end of the elongate shaft, the jaw assembly comprising a first jaw and a second jaw each pivotably coupled to the elongate shaft and pivotable between an open configuration and a closed configuration; and

a suturing needle positionable in the jaw assembly, the suturing needle comprising:

a needle having a generally curved profile and extending from a first penetrating tip to a second penetrating tip, the needle comprising:

a first shim notch adjacent the first penetrating tip;

a second shim notch adjacent the second penetrating tip;

a first recess adjacent the first penetrating tip; and

a second recess adjacent the second penetrating tip; and

a suture coupled to the needle.

20. The laparoscopic suturing system of claim **19**, further comprising a leader segment coupling the suture to the needle.

21. The laparoscopic suturing system of claim **19**, further comprising an anchor segment coupled to the suture.

22. The laparoscopic suturing system of claim **19**, wherein the anchor segment comprises a polymeric braided mesh.

23. The laparoscopic suturing system of claim **19**, wherein the suture comprises a barbed monofilament suture.

* * * * *

专利名称(译)	腹腔镜缝合系统		
公开(公告)号	US20170071597A1	公开(公告)日	2017-03-16
申请号	US15/261422	申请日	2016-09-09
[标]申请(专利权)人(译)	应用医疗资源		
申请(专利权)人(译)	应用医疗资源CORPORATION		
当前申请(专利权)人(译)	应用医疗资源CORPORATION		
[标]发明人	GORSKI STEVEN TAYLOR SCOTT V MCGINLEY KIMBALL B		
发明人	GORSKI, STEVEN TAYLOR, SCOTT V. MCGINLEY, KIMBALL B.		
IPC分类号	A61B17/04 A61B17/06		
CPC分类号	A61B17/0469 A61B2017/06176 A61B17/06166 A61B17/0482 A61B17/0625 A61B2017/0417 A61B2017/06019 A61B2017/06033 A61B2017/06038 A61B2017/06047 A61B2017/0609 A61B17/0485 A61B2017/06009		
优先权	62/217502 2015-09-11 US		
其他公开文献	US10405851		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种腹腔镜缝合装置。缝合装置可以使缝合针在钳口组件的钳口之间来回通过，以在微创手术中在手术部位处缝合组织。钳夹组件可以在每个钳夹中具有可枢转的钳夹构件，以将钳夹组件和针定位在低轮廓的收纳构型中，用于插入通过低直径手术口。钳夹组件可以由手柄组件致动，该手柄组件提供同时的针从驱动钳口到接收钳口的通行并且在单个触发循环中将针锁定在接收钳口内。

