



US 20050148823A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0148823 A1**

Vaugh et al.

(43) **Pub. Date: Jul. 7, 2005**

(54) **SURGICAL SEALING DEVICE**

Publication Classification

(76) Inventors: **Trevor Vaughn**, Garbally (IE); **John Butler**, Deansgrange (IE); **Frank Bonadio**, Bray (IE)

(51) **Int. Cl.⁷** **F16K 15/00**

(52) **U.S. Cl.** **600/206**

Correspondence Address:
**FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER
LLP
901 NEW YORK AVENUE, NW
WASHINGTON, DC 20001-4413 (US)**

(57) **ABSTRACT**


A surgical sealing device, suitable for use during a surgical procedure such as a laparoscopic procedure or a hand-assisted laparoscopic procedure, comprises a first sealing member and a second sealing member. In one case, the first sealing member and the second sealing member are integrally formed of a gelatinous elastomeric material. A thin slit is defined between the sealing members. The first sealing member overlaps the distal end opening of a passageway through the second sealing member in a closed configuration to prevent leakage of insufflation gases out of an abdomen. In an open configuration, the first sealing member is retracted to reveal the distal end opening of the passageway and thus facilitate passage of an object, such as a surgeon's hand or forearm, into the abdomen.

(21) Appl. No.: **10/965,217**

(22) Filed: **Oct. 15, 2004**

Related U.S. Application Data

(60) Provisional application No. 60/511,135, filed on Oct. 15, 2003. Provisional application No. 60/511,075, filed on Oct. 15, 2003. Provisional application No. 60/517,075, filed on Nov. 5, 2003. Provisional application No. 60/582,801, filed on Jun. 28, 2004.

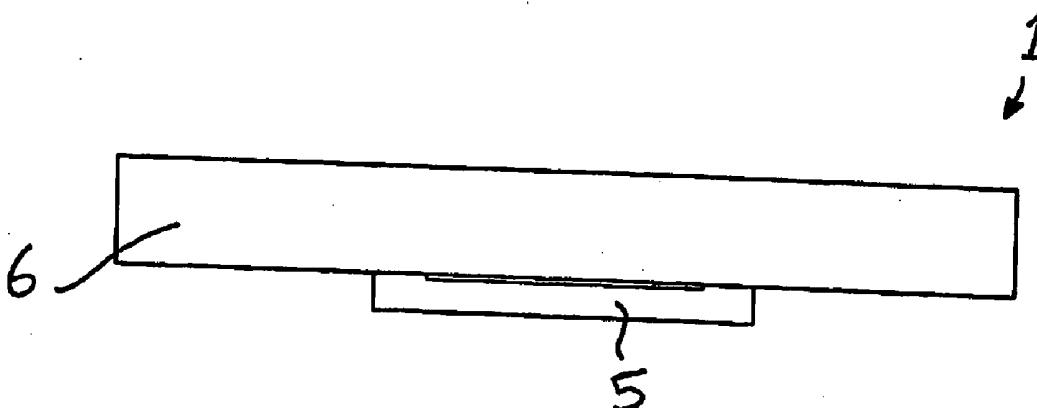

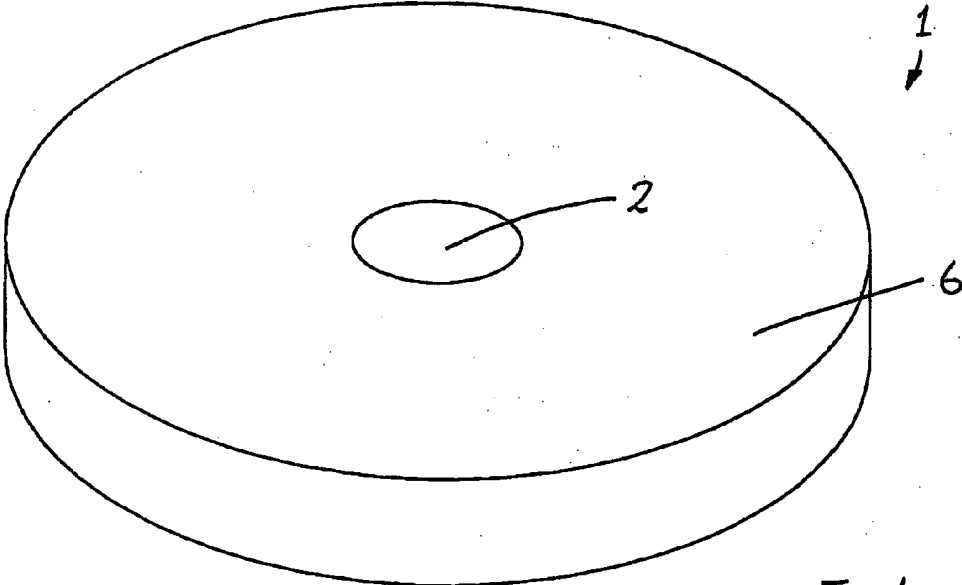


Fig. 1

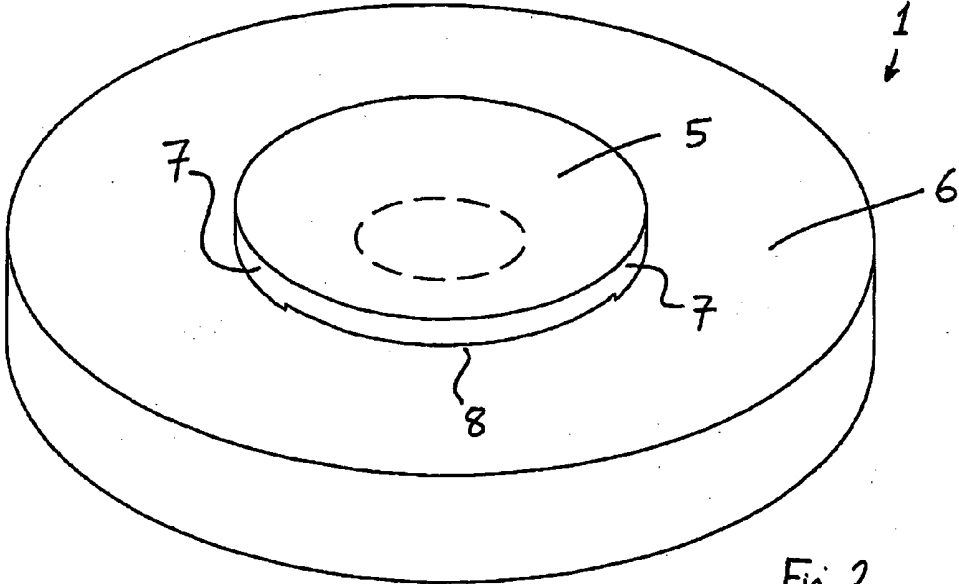
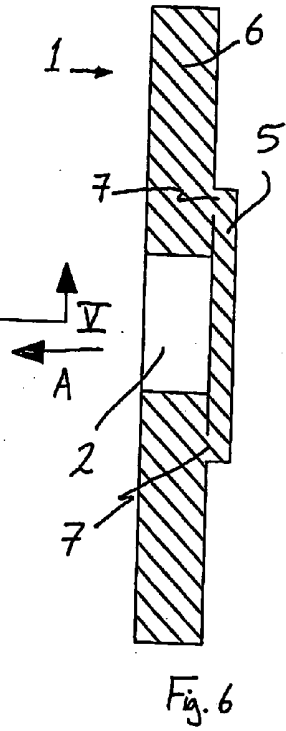
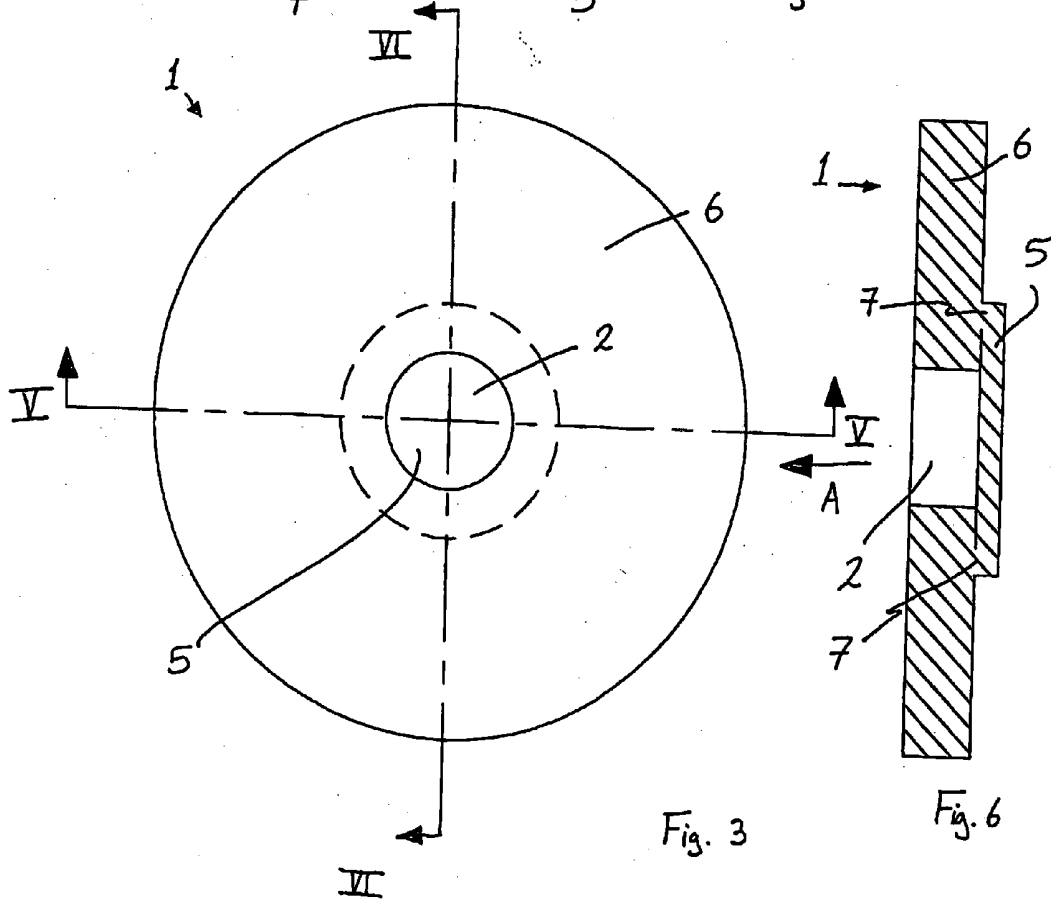
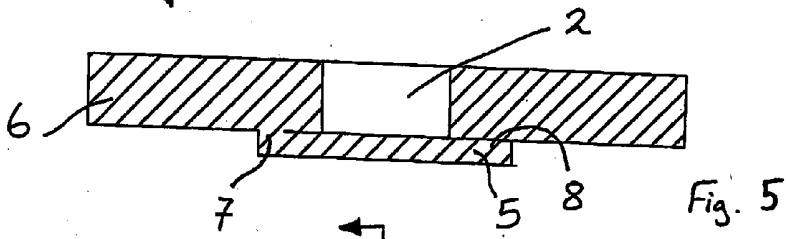
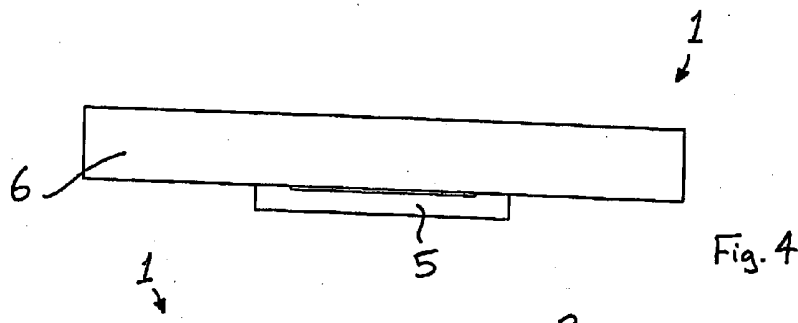


Fig. 2



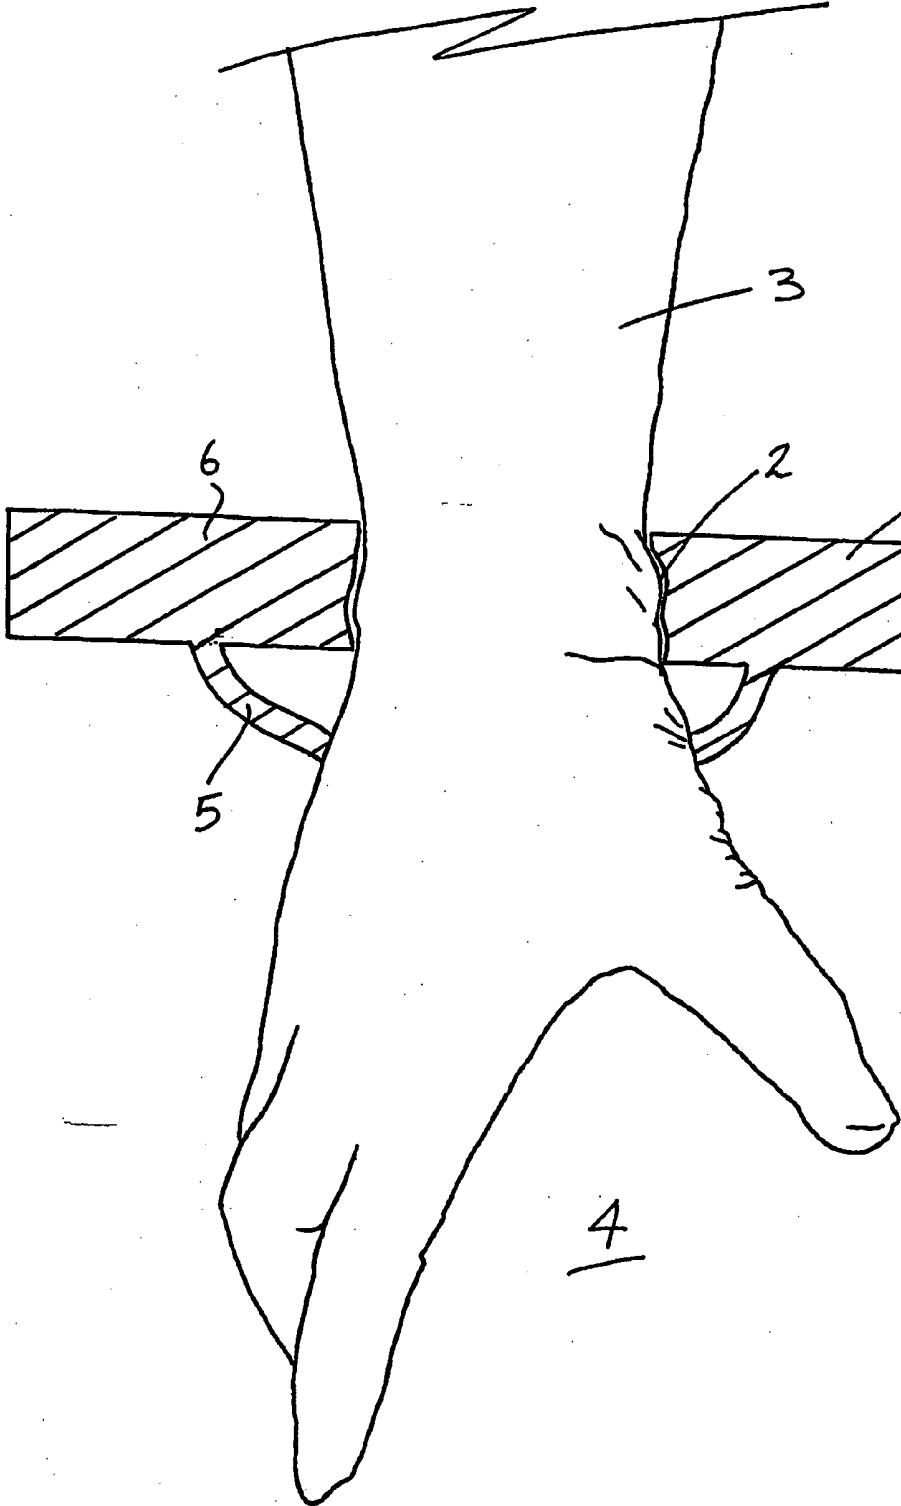
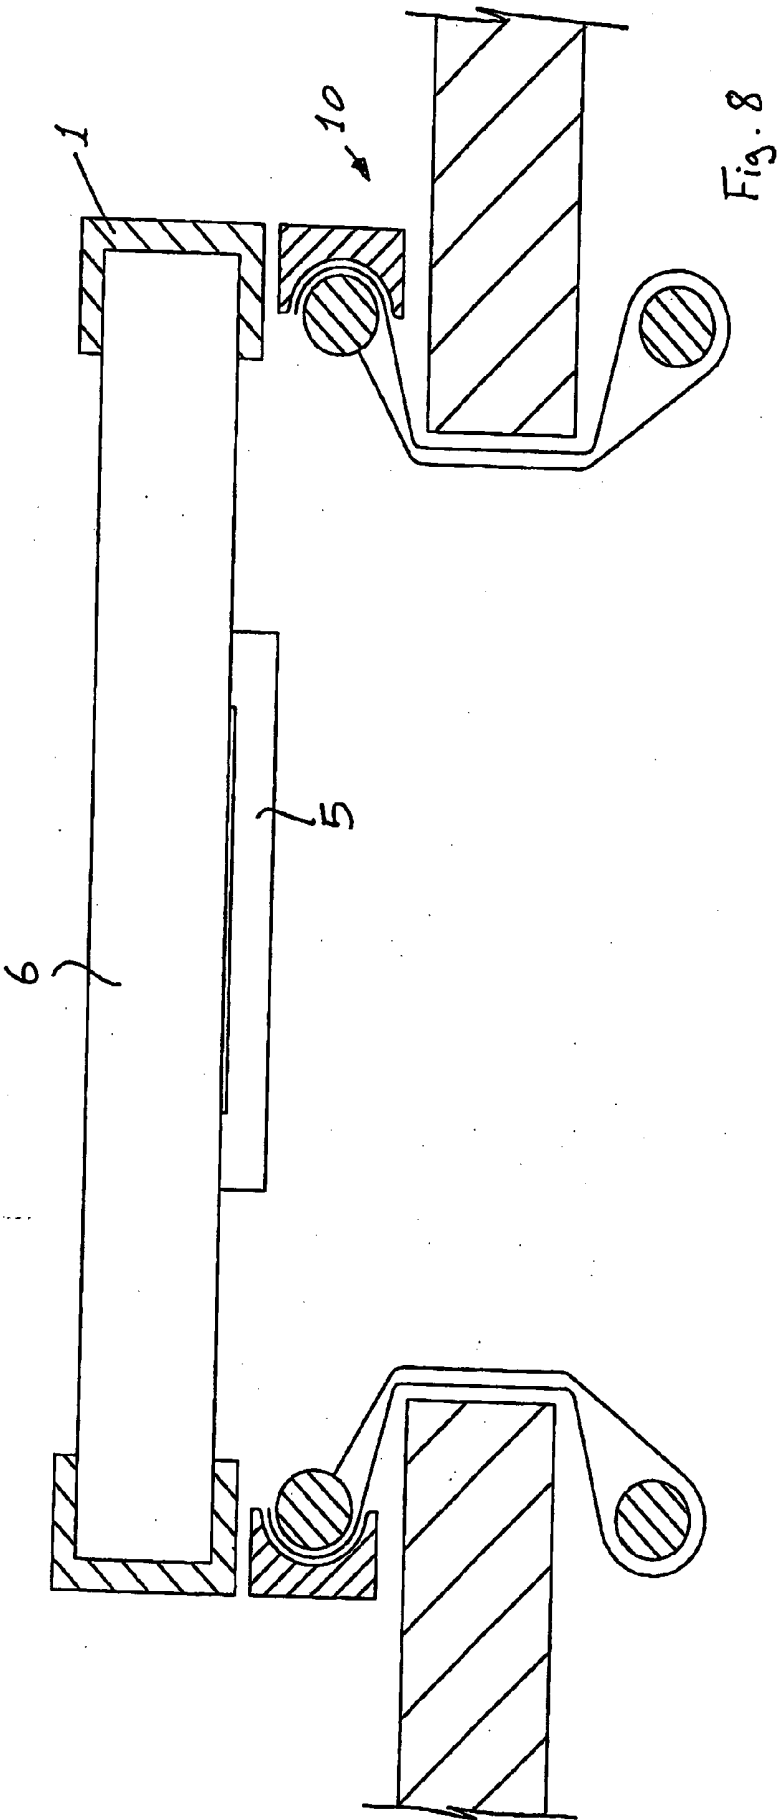


Fig. 7



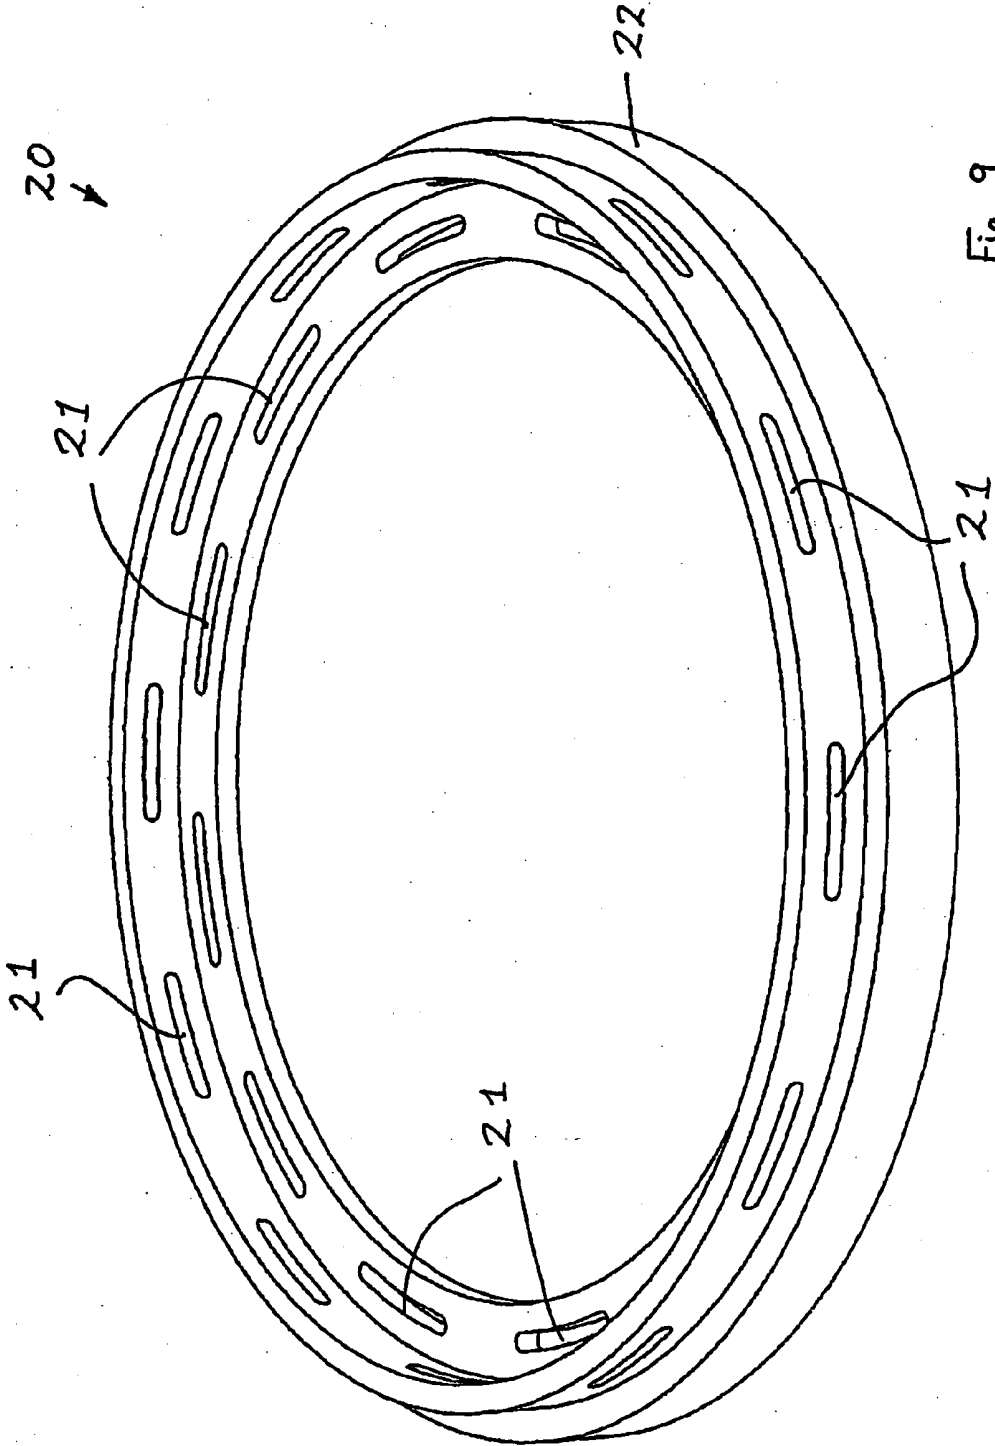


Fig. 9

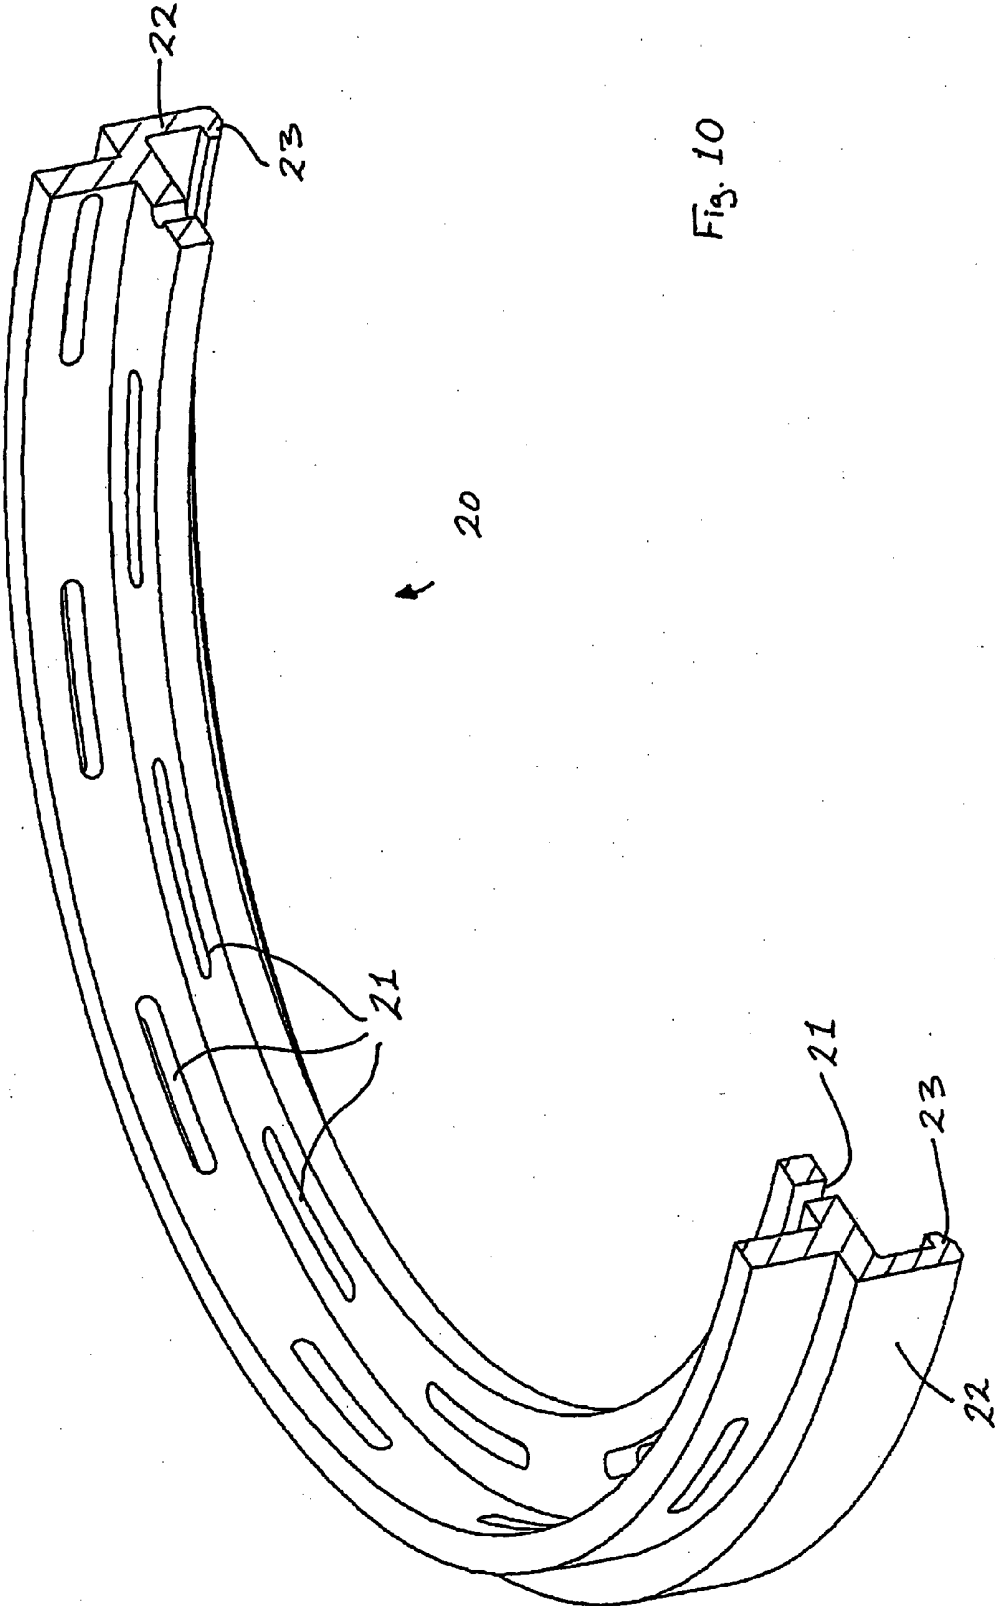


Fig. 10

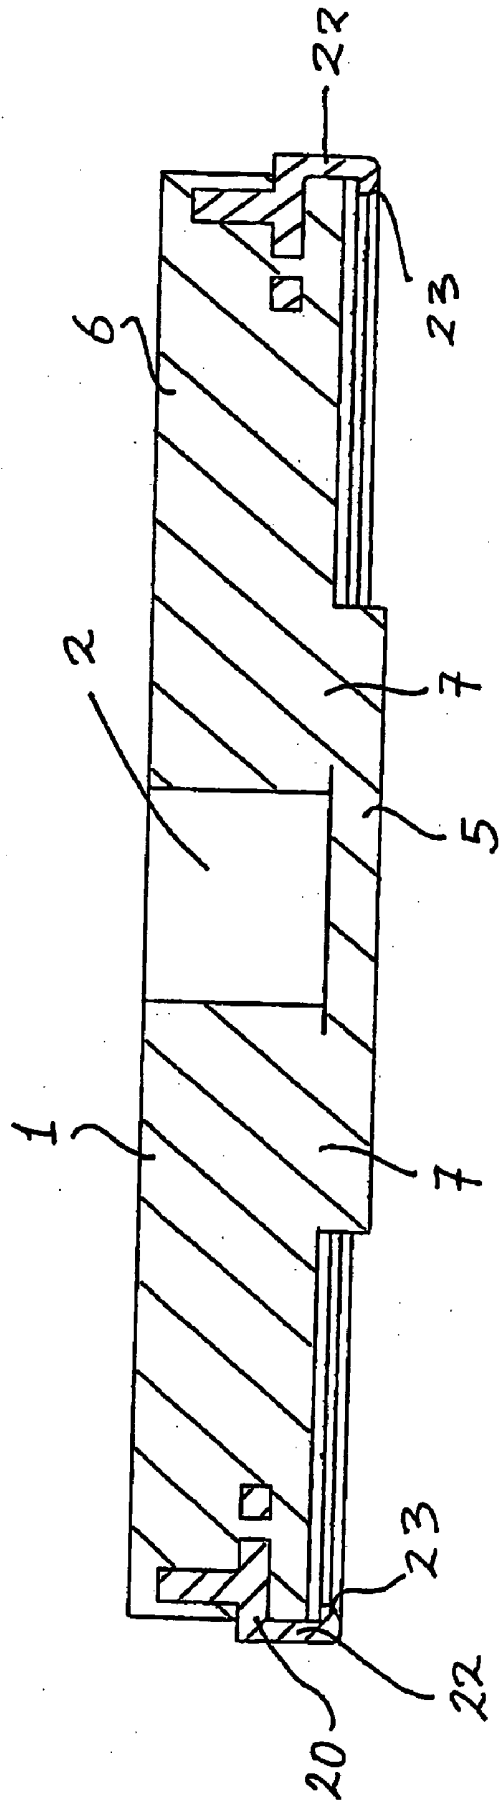


Fig. 11

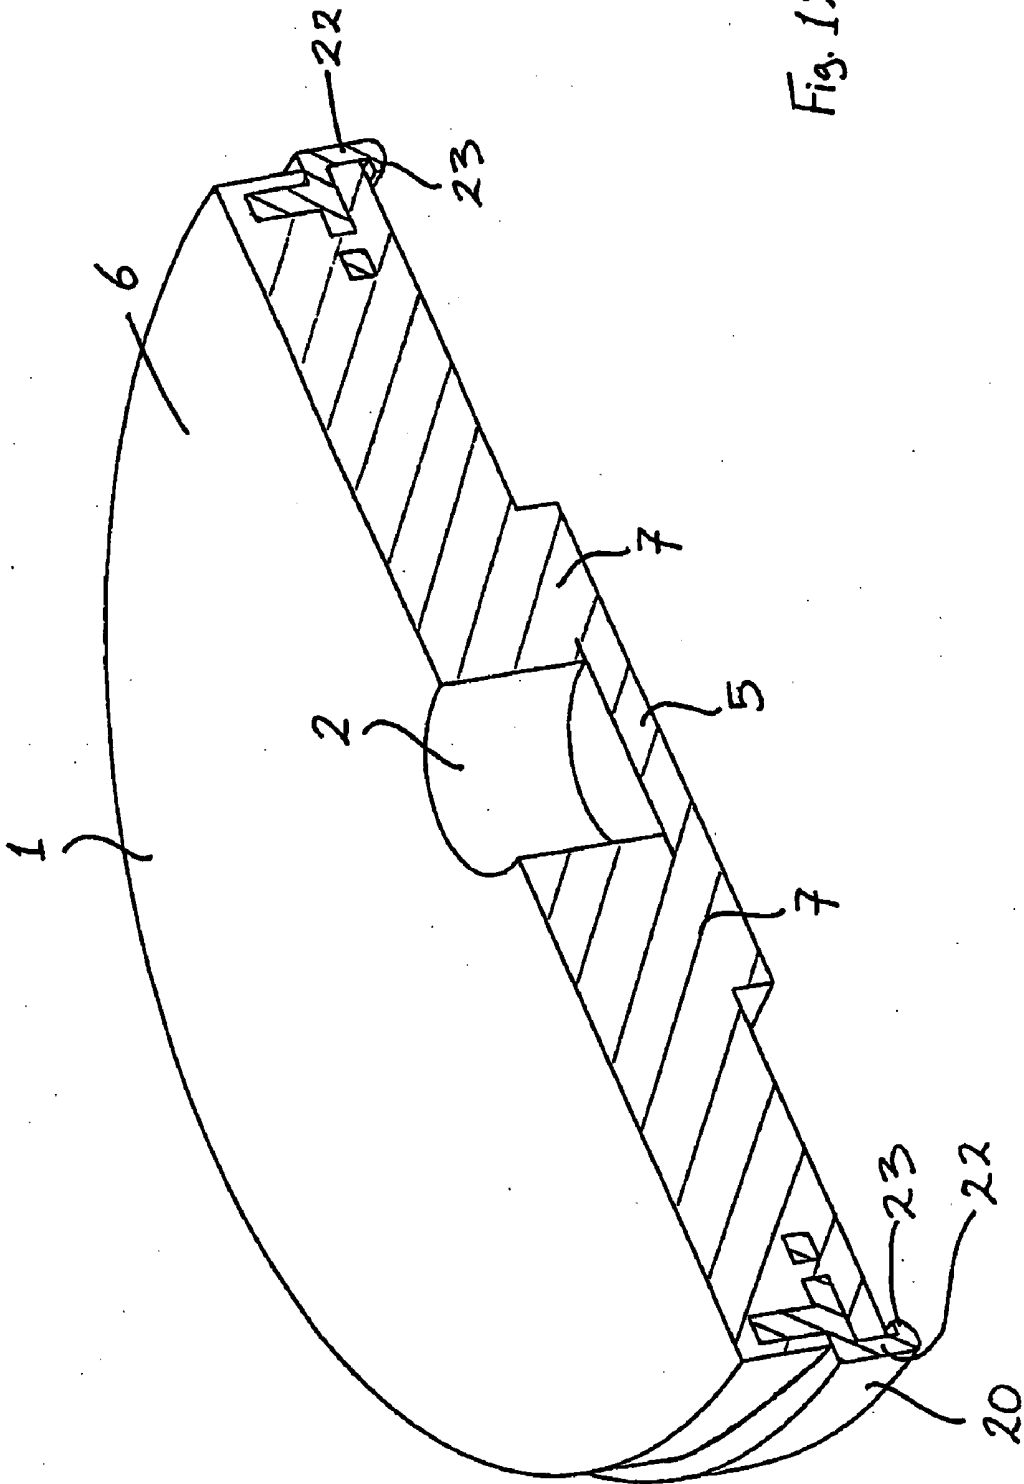


Fig. 12

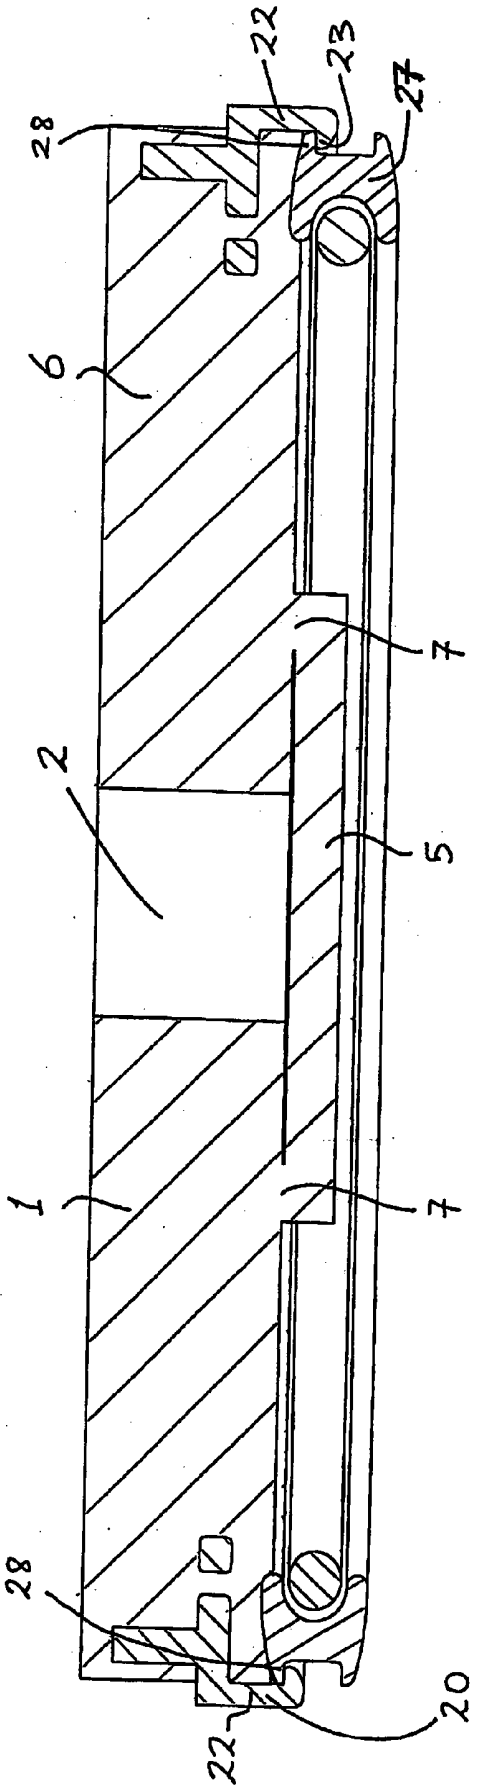


Fig. 13

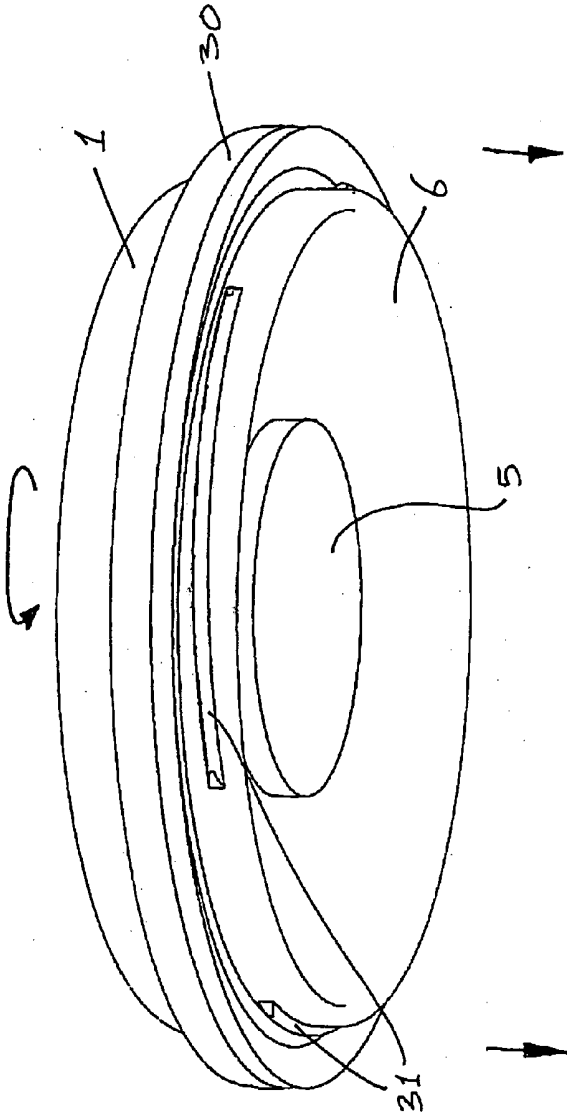
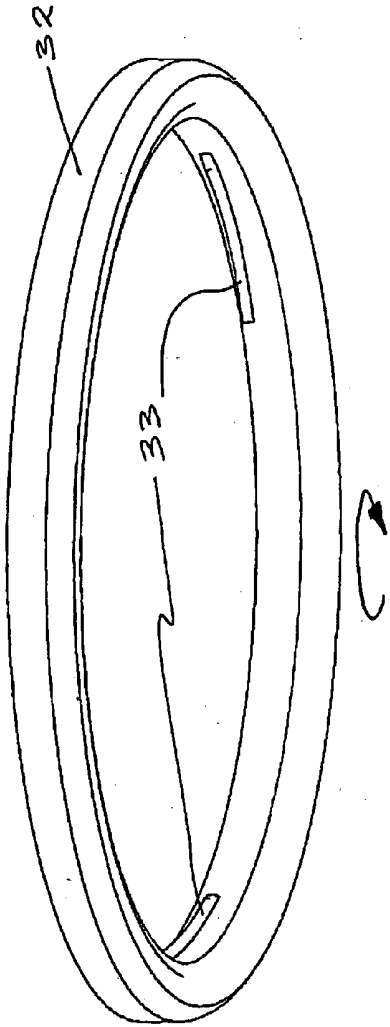


Fig. 14



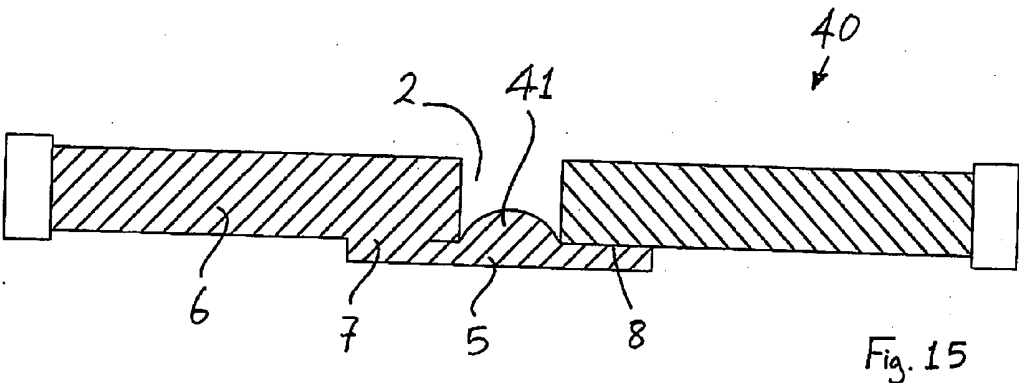


Fig. 15

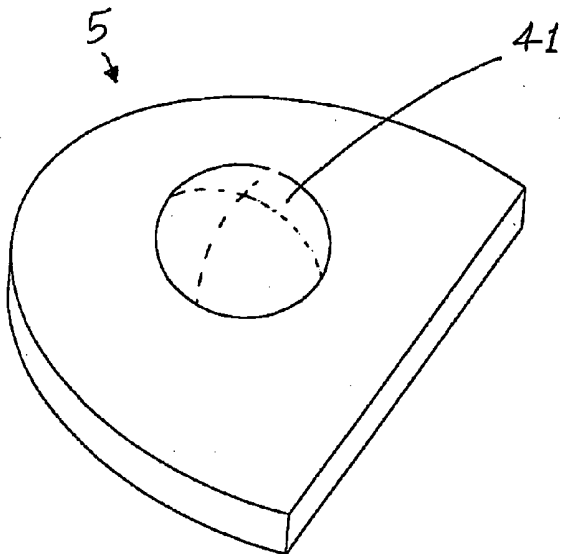


Fig. 16

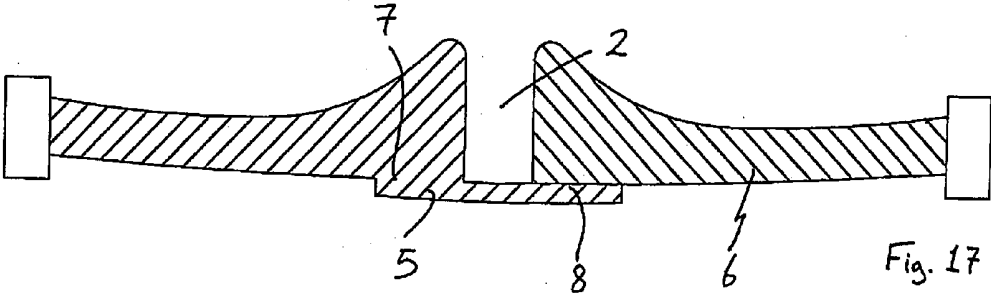


Fig. 17

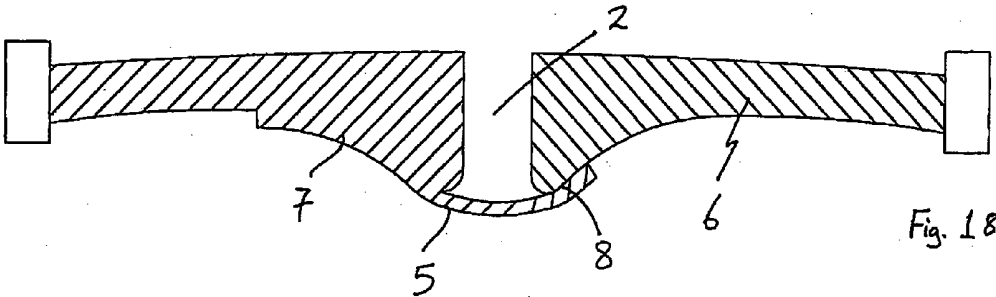


Fig. 18

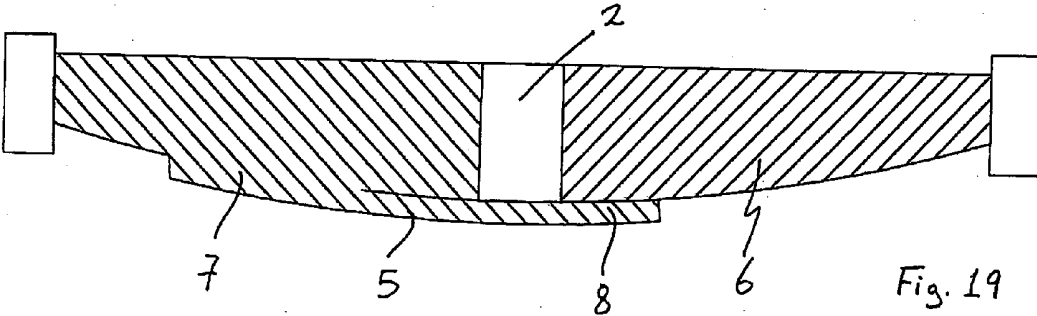
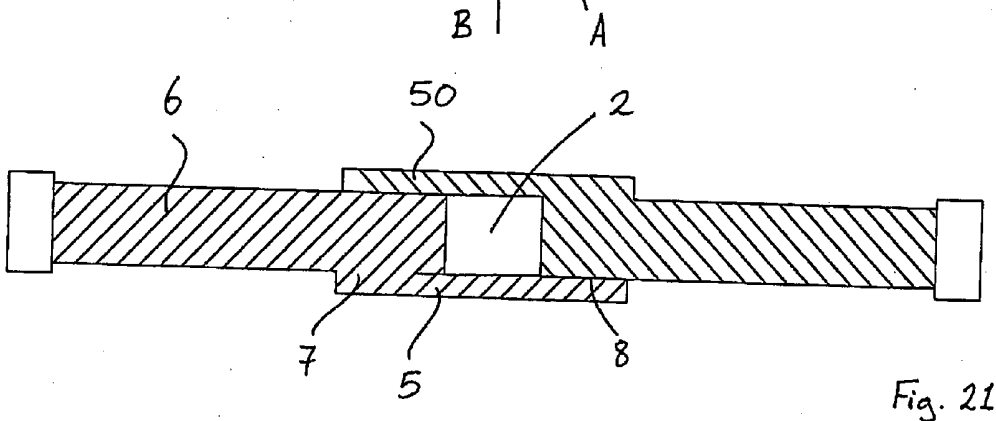
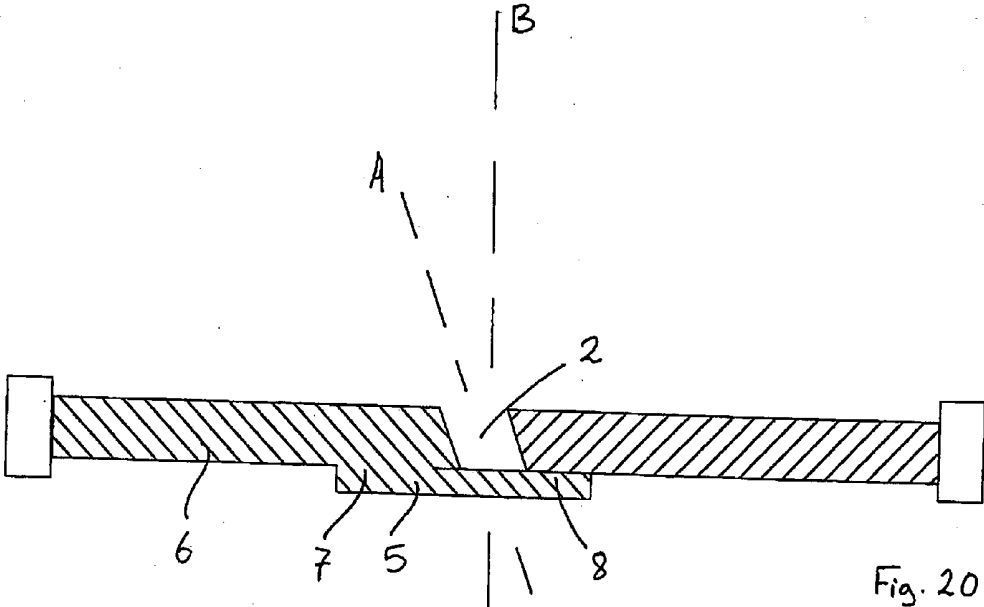


Fig. 19



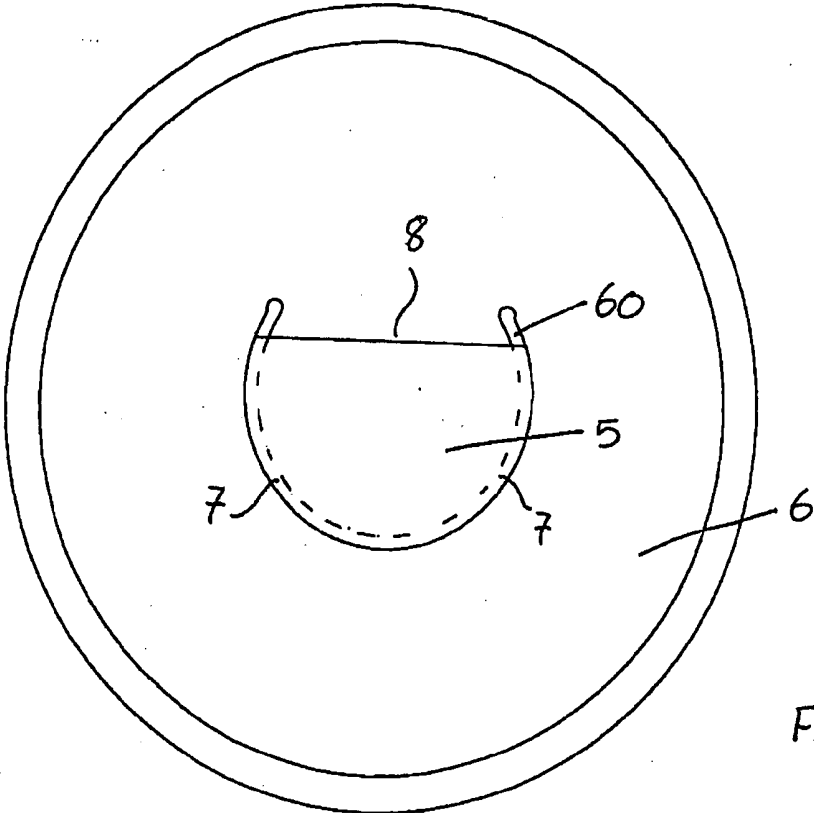


Fig. 22

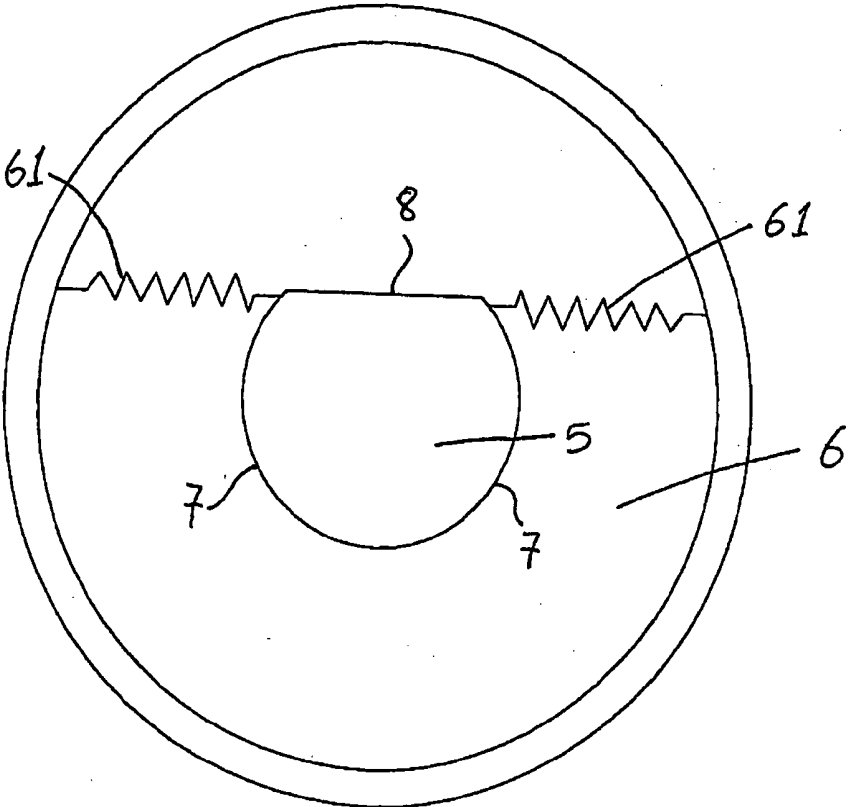


Fig. 23

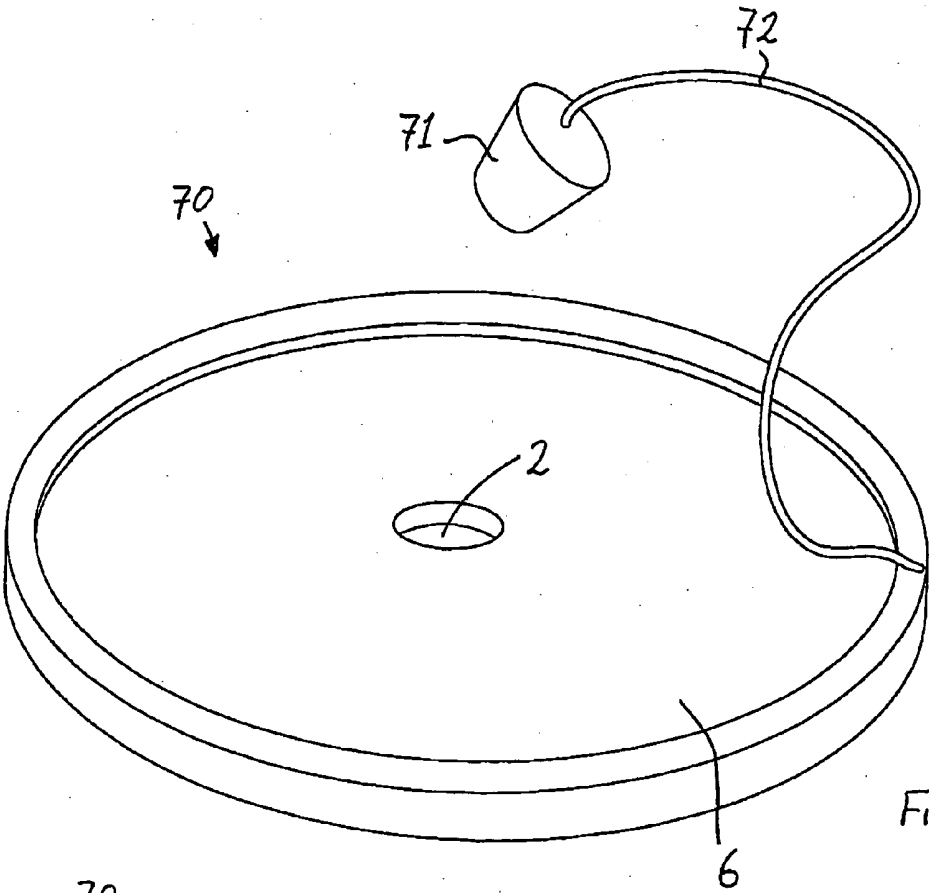


Fig. 24

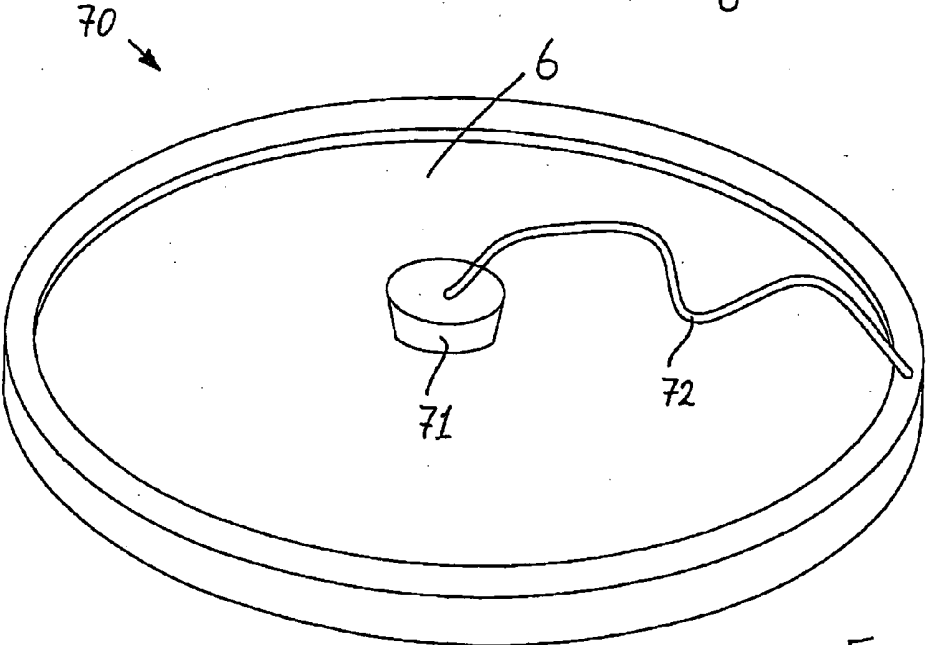


Fig. 25

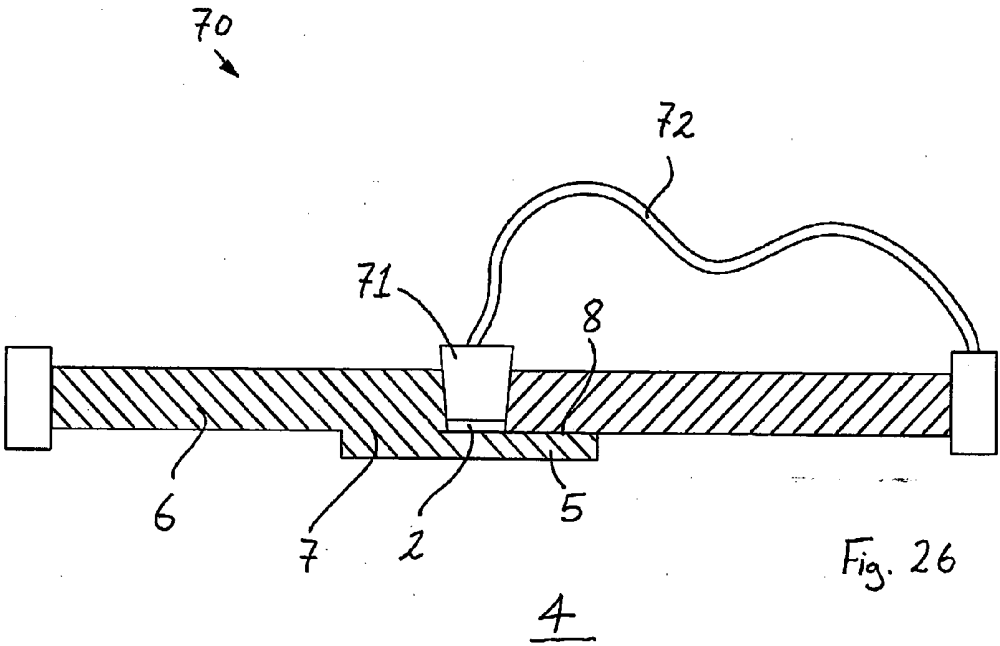


Fig. 26

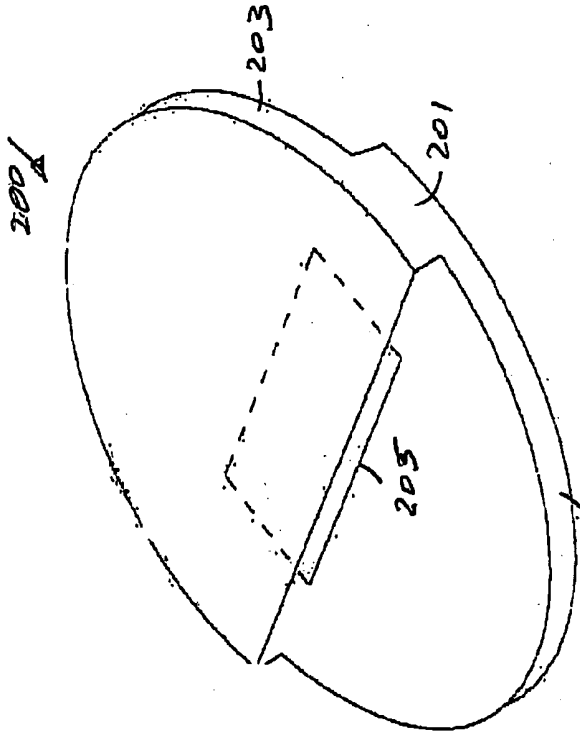


Fig. 27

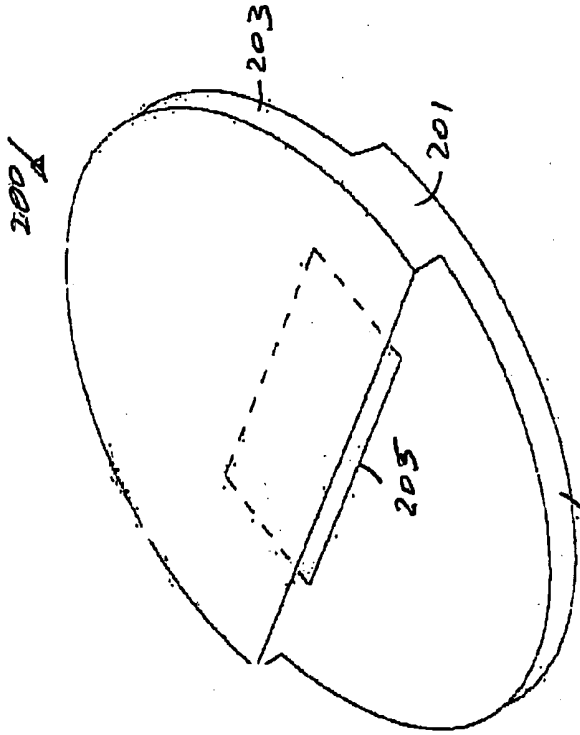


Fig. 28

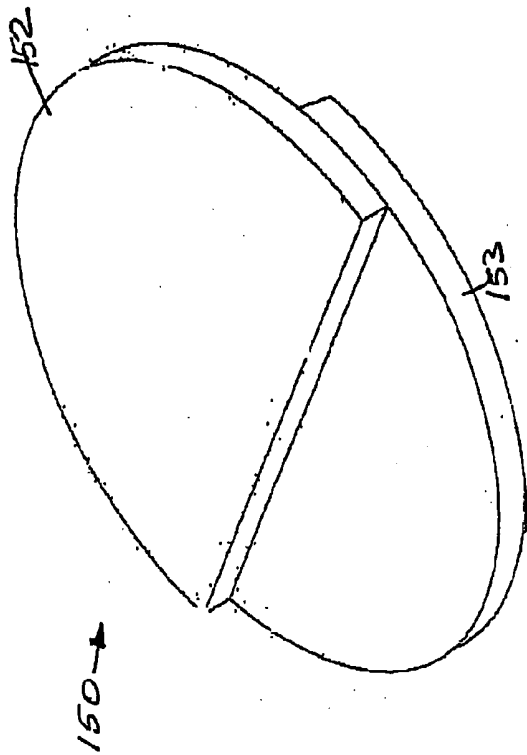


Fig. 29

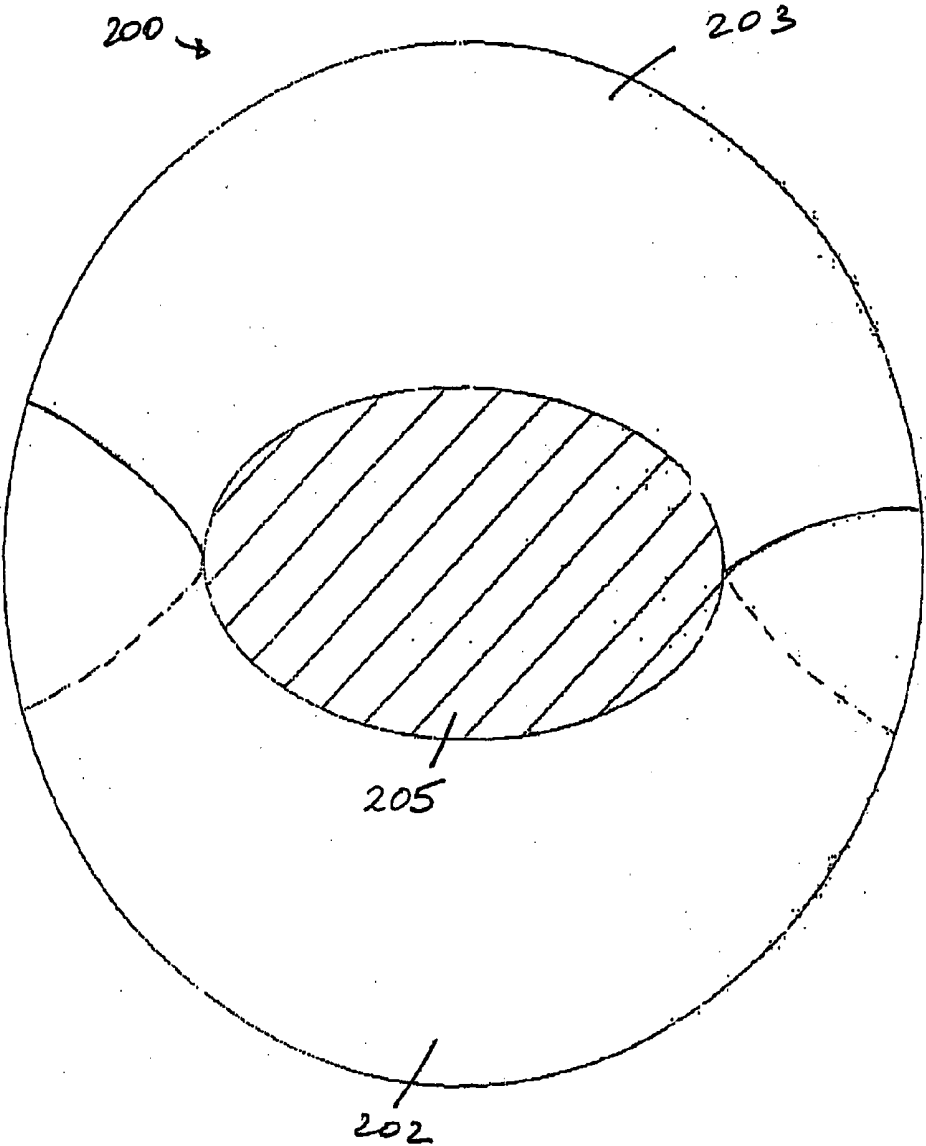
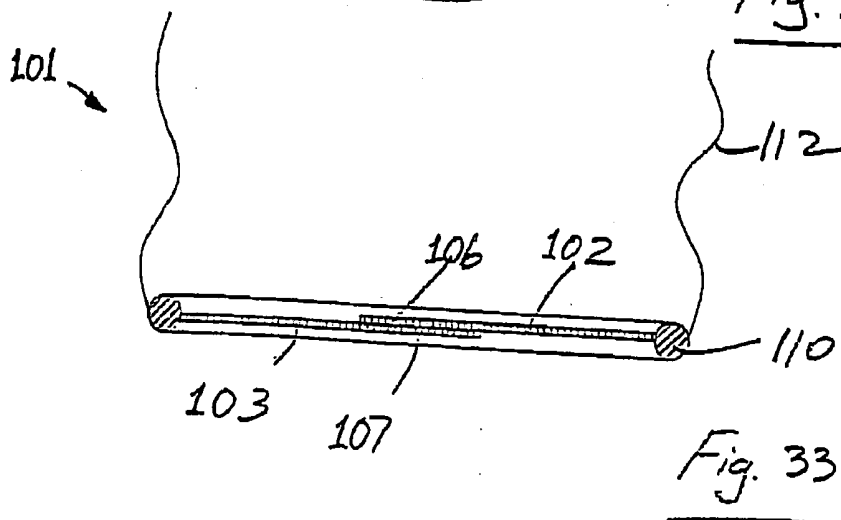
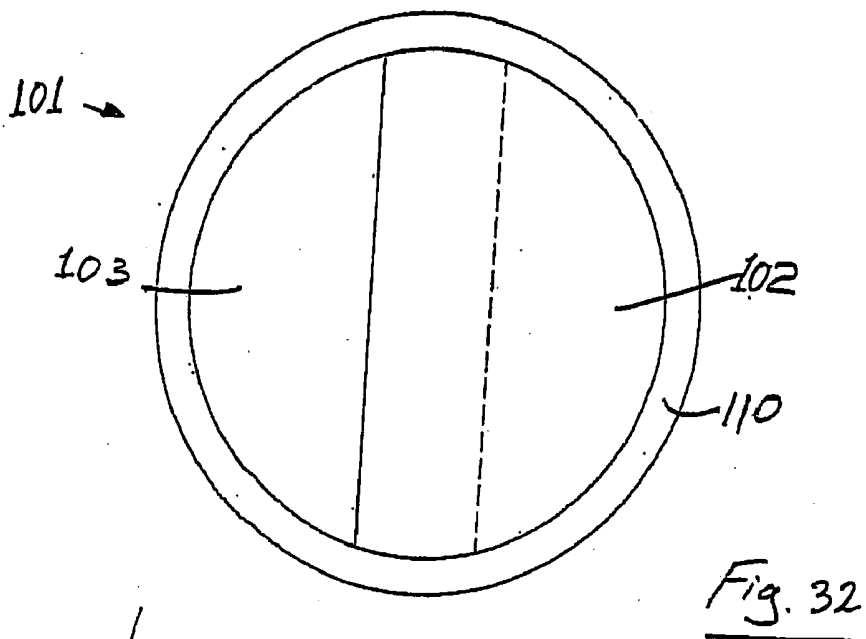
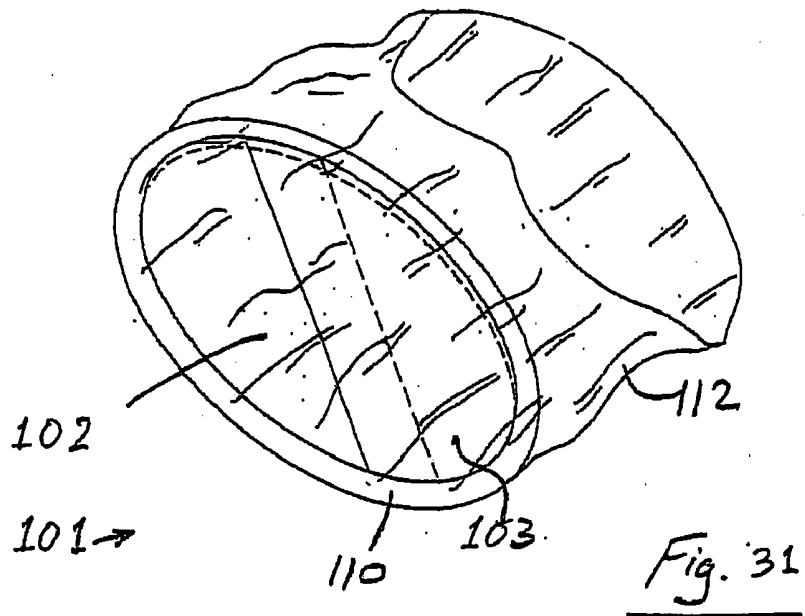


Fig. 30



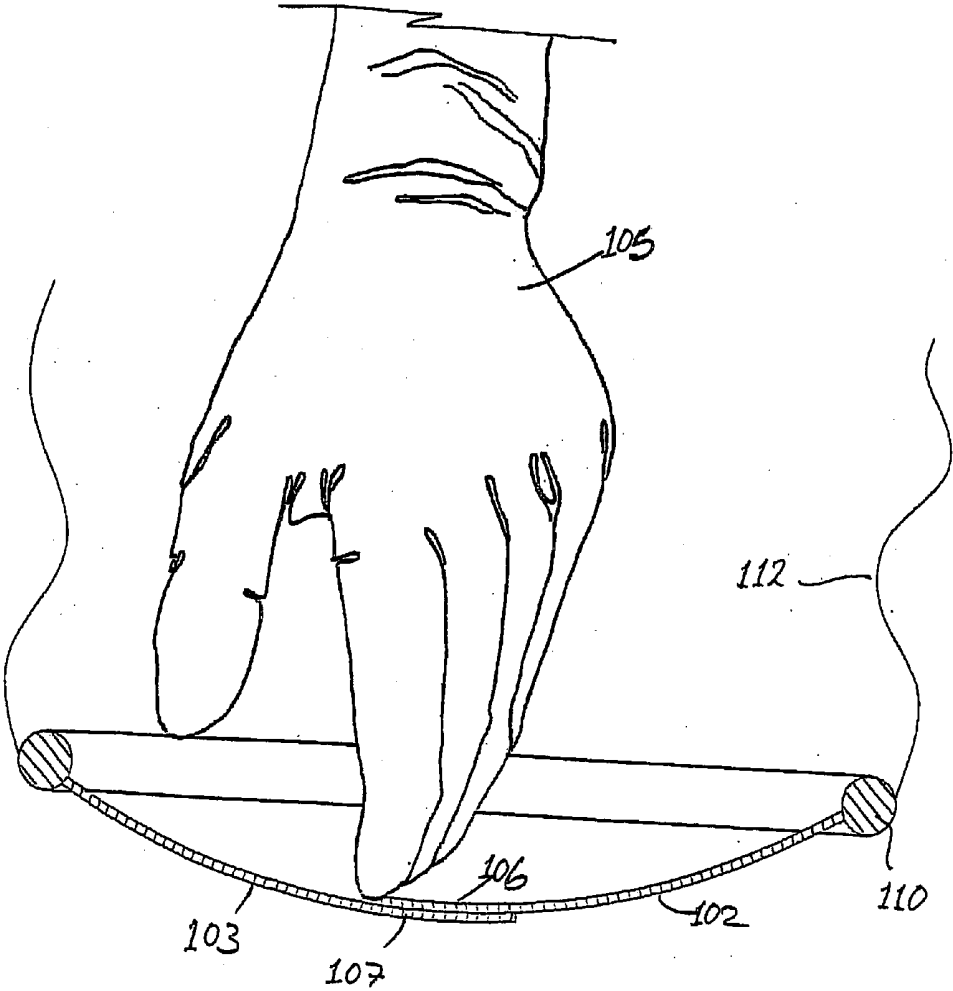


Fig. 34

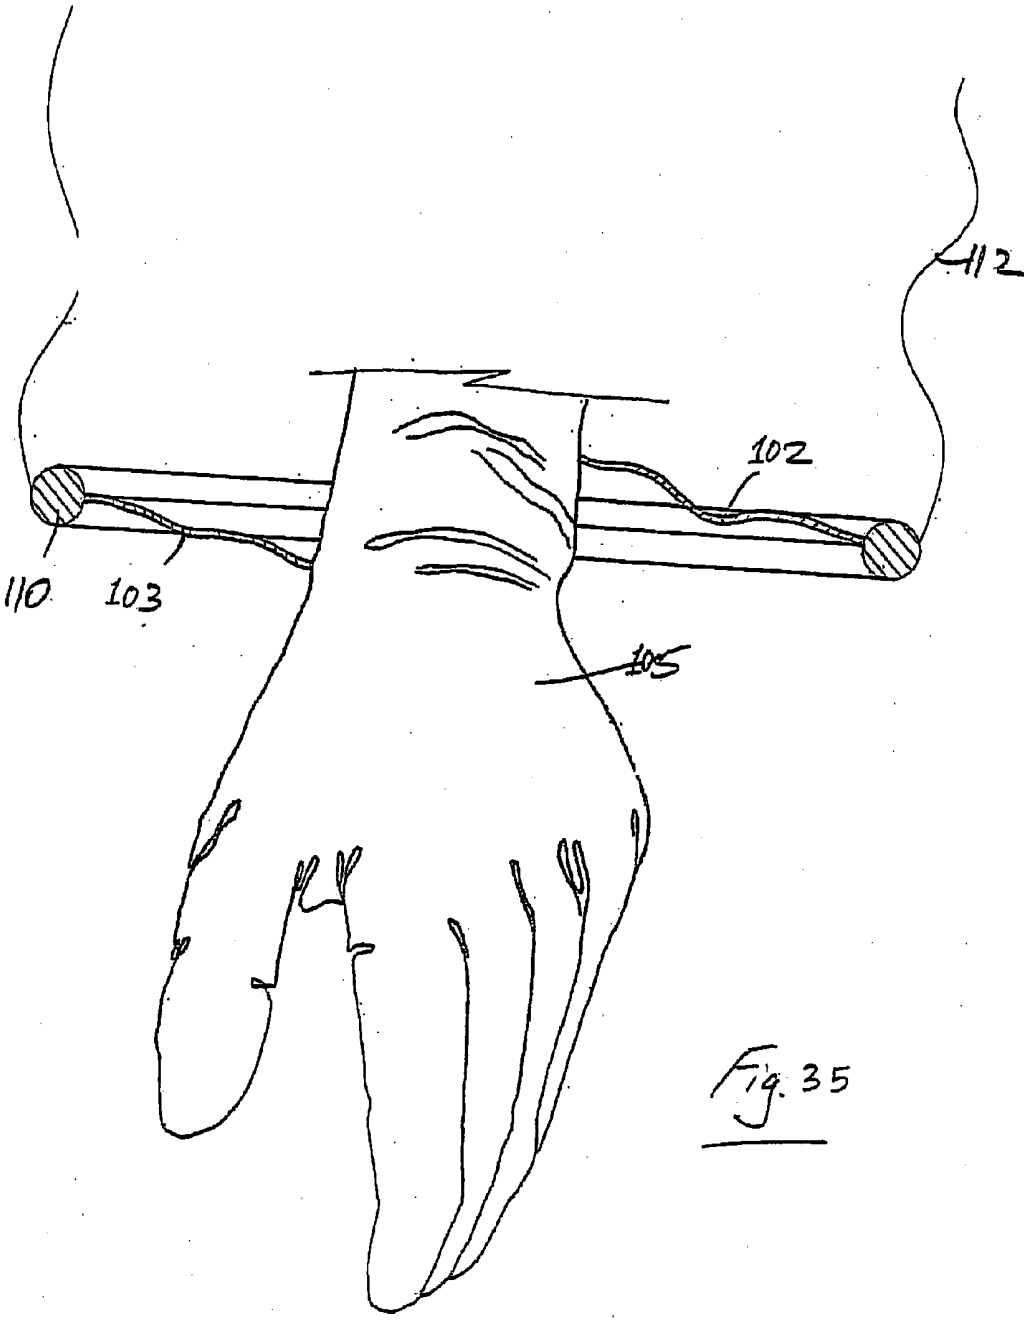


Fig. 35

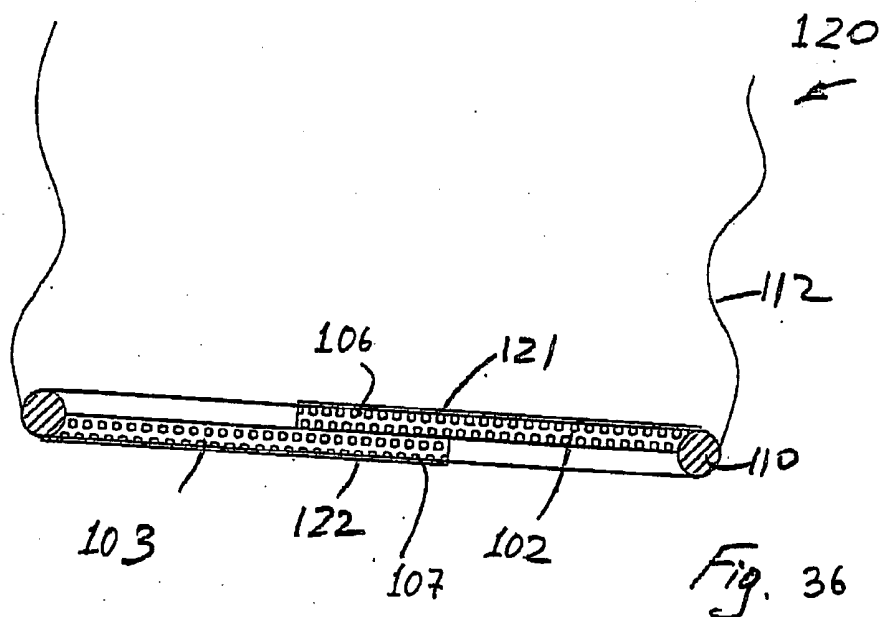


Fig. 36

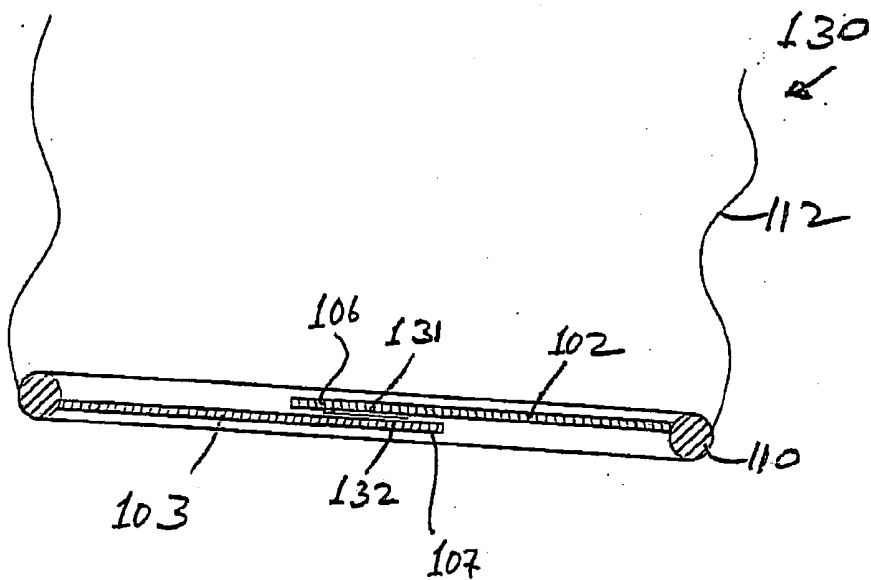


Fig. 37

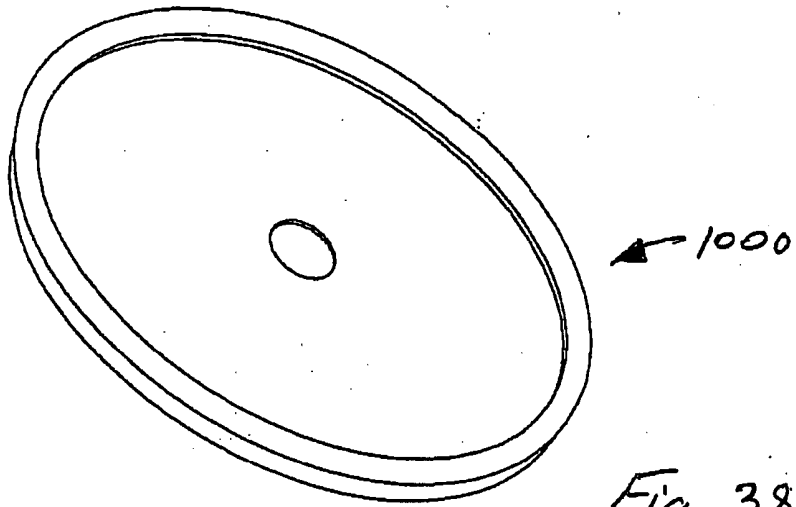


Fig. 38

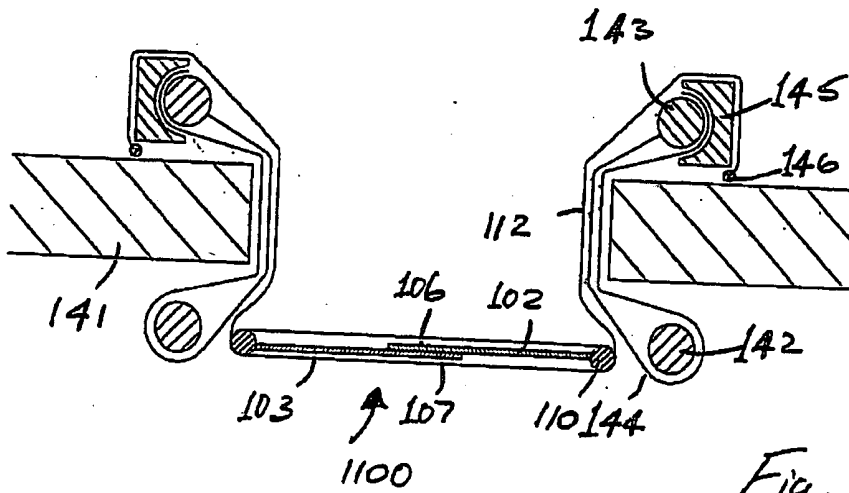



Fig. 39

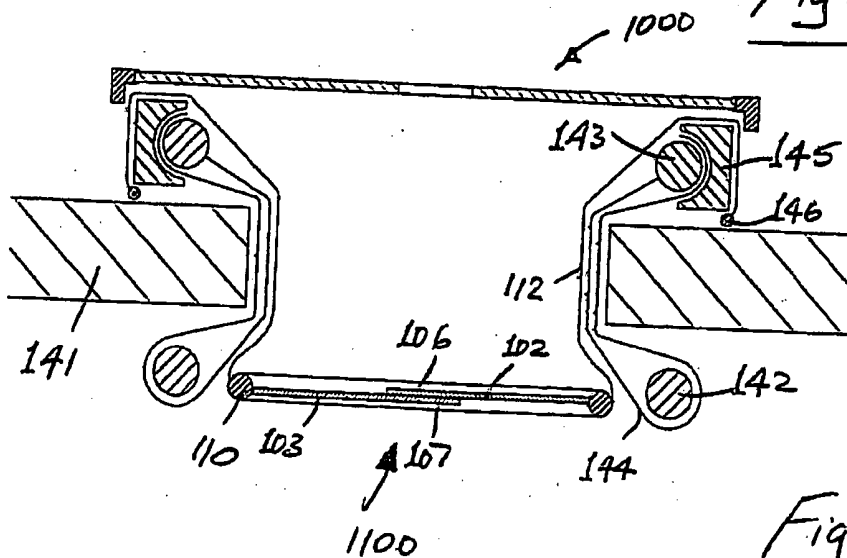


Fig. 40

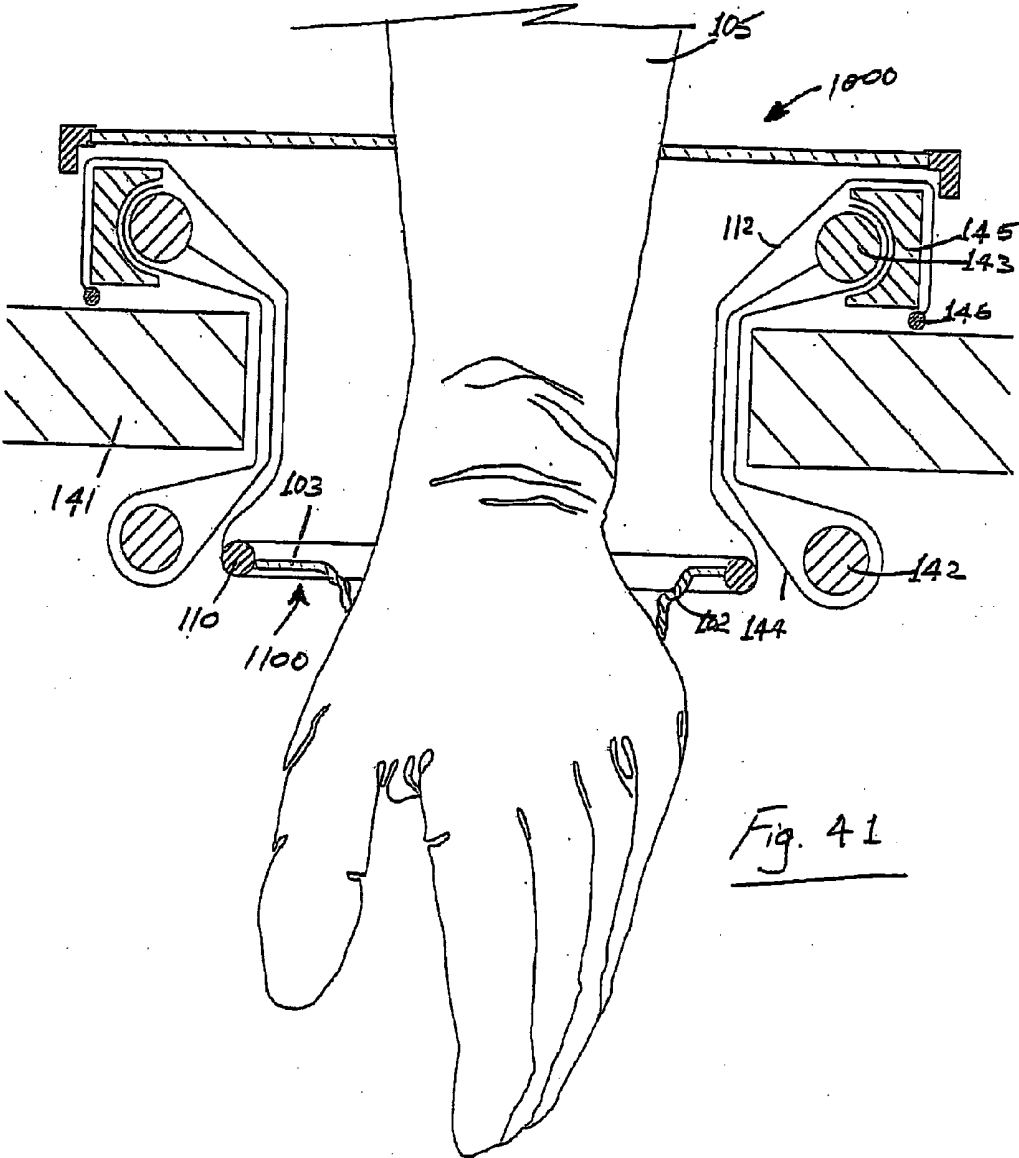


Fig. 41

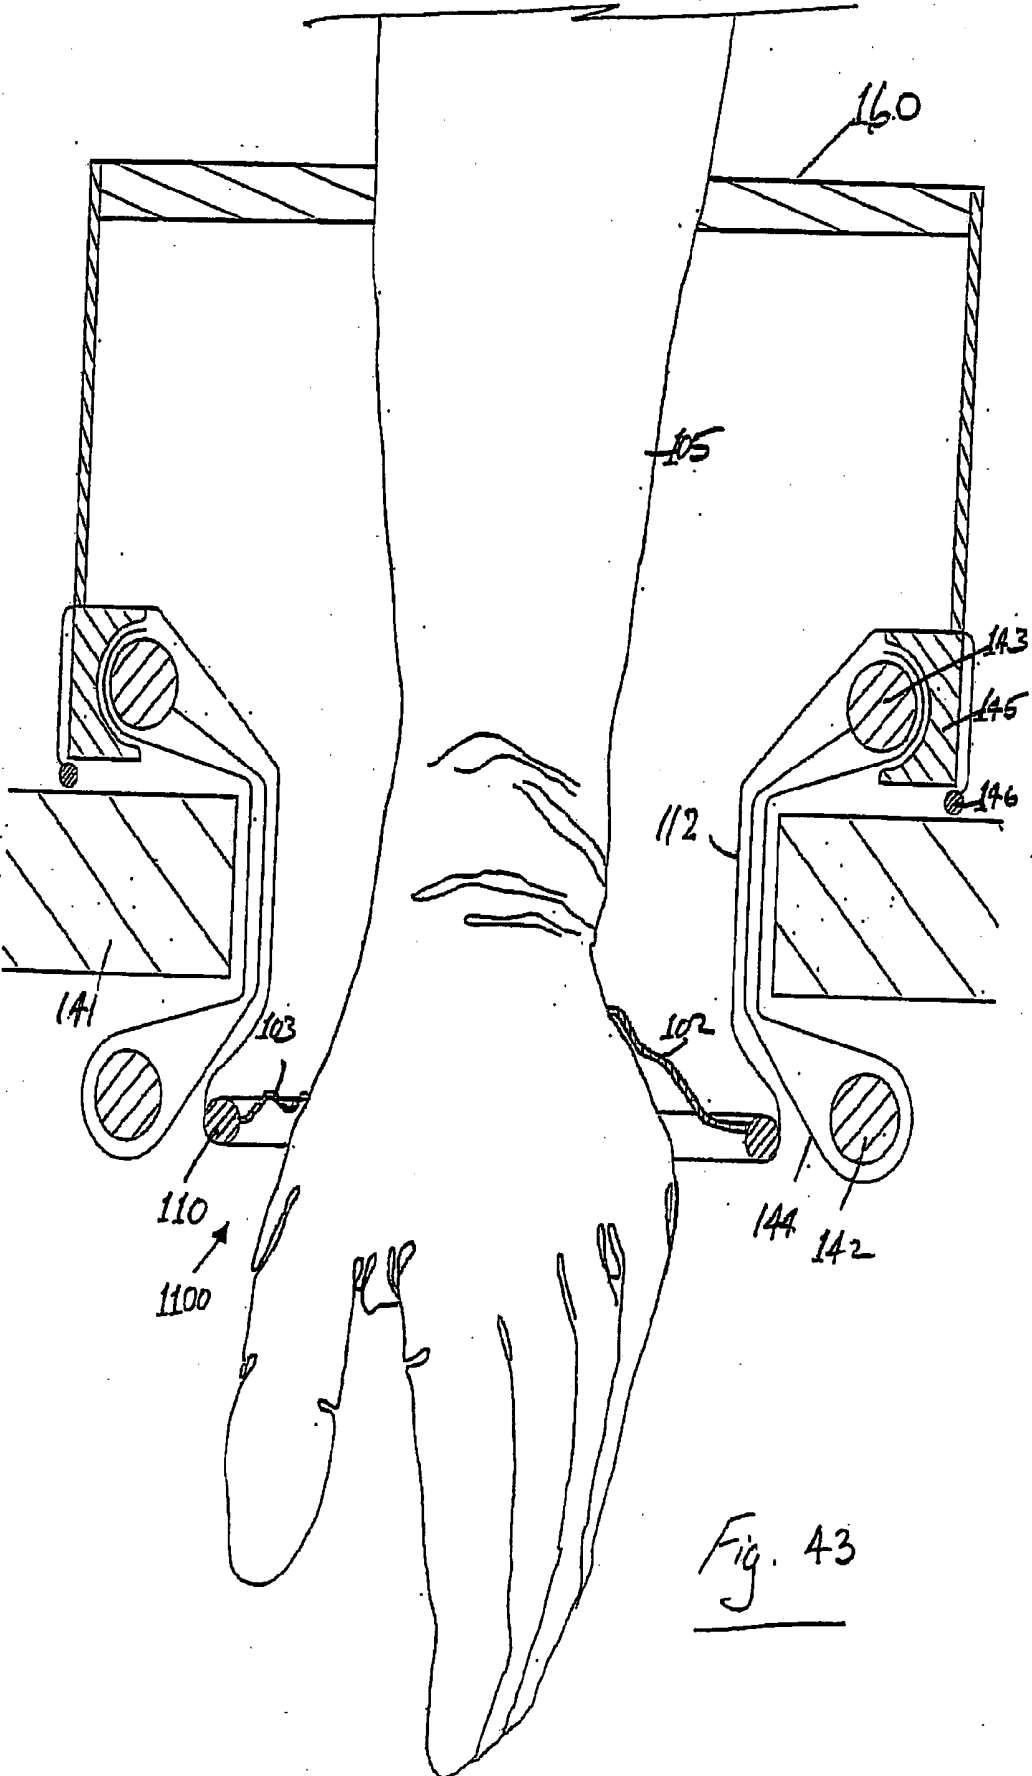


Fig. 43

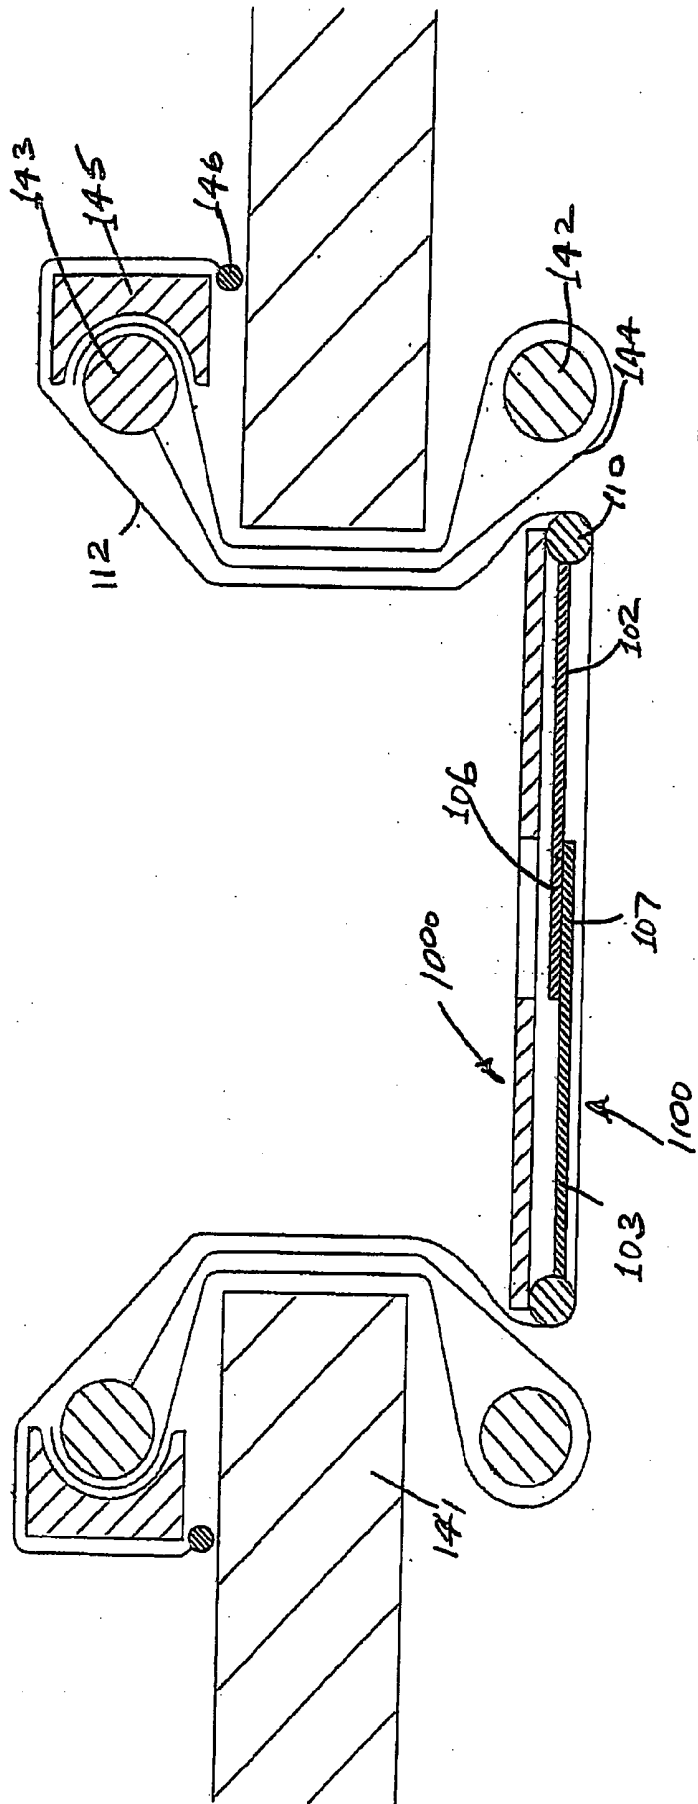
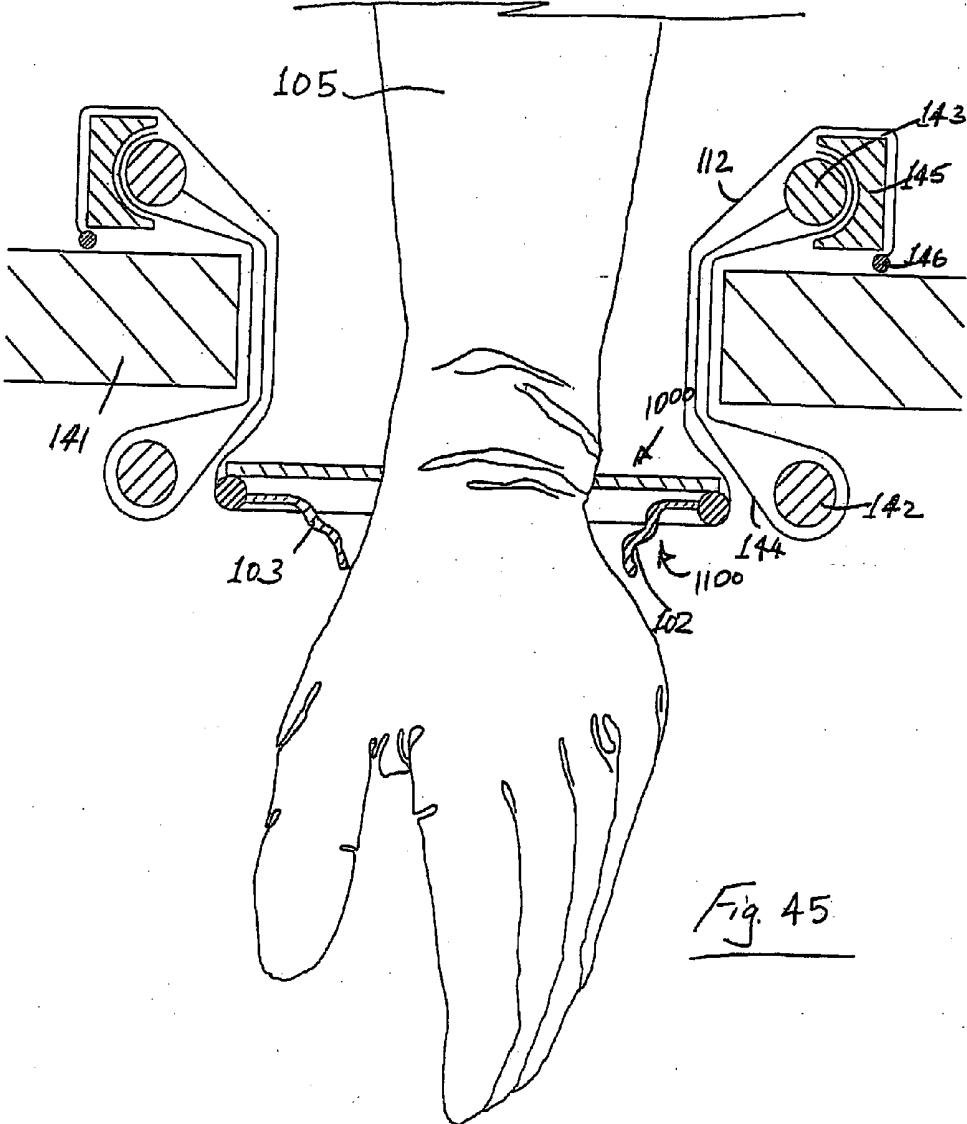


Fig. 44



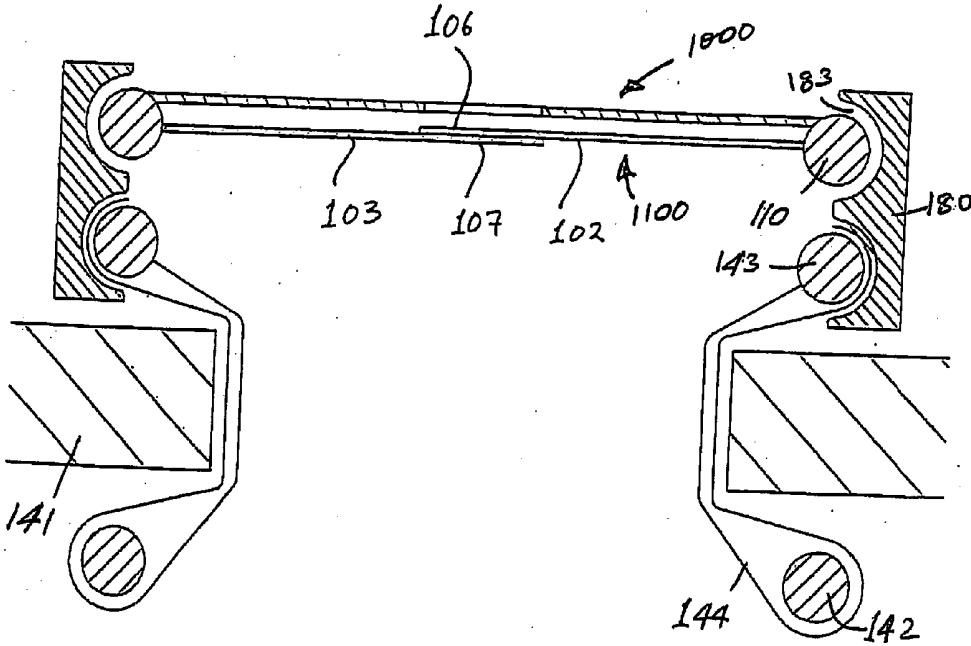


Fig. 46

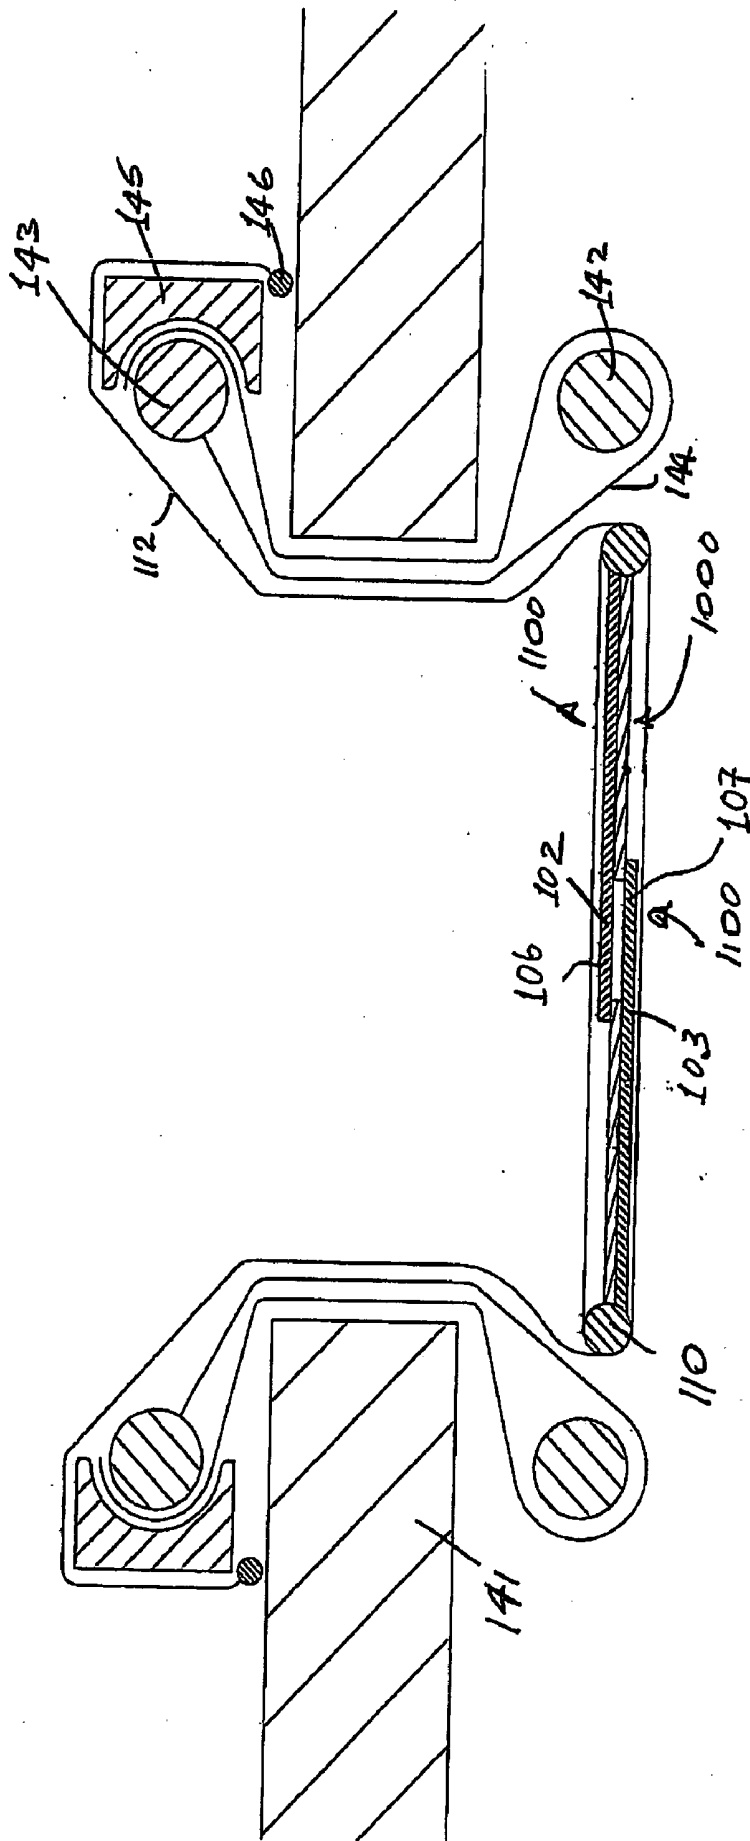


Fig. 47

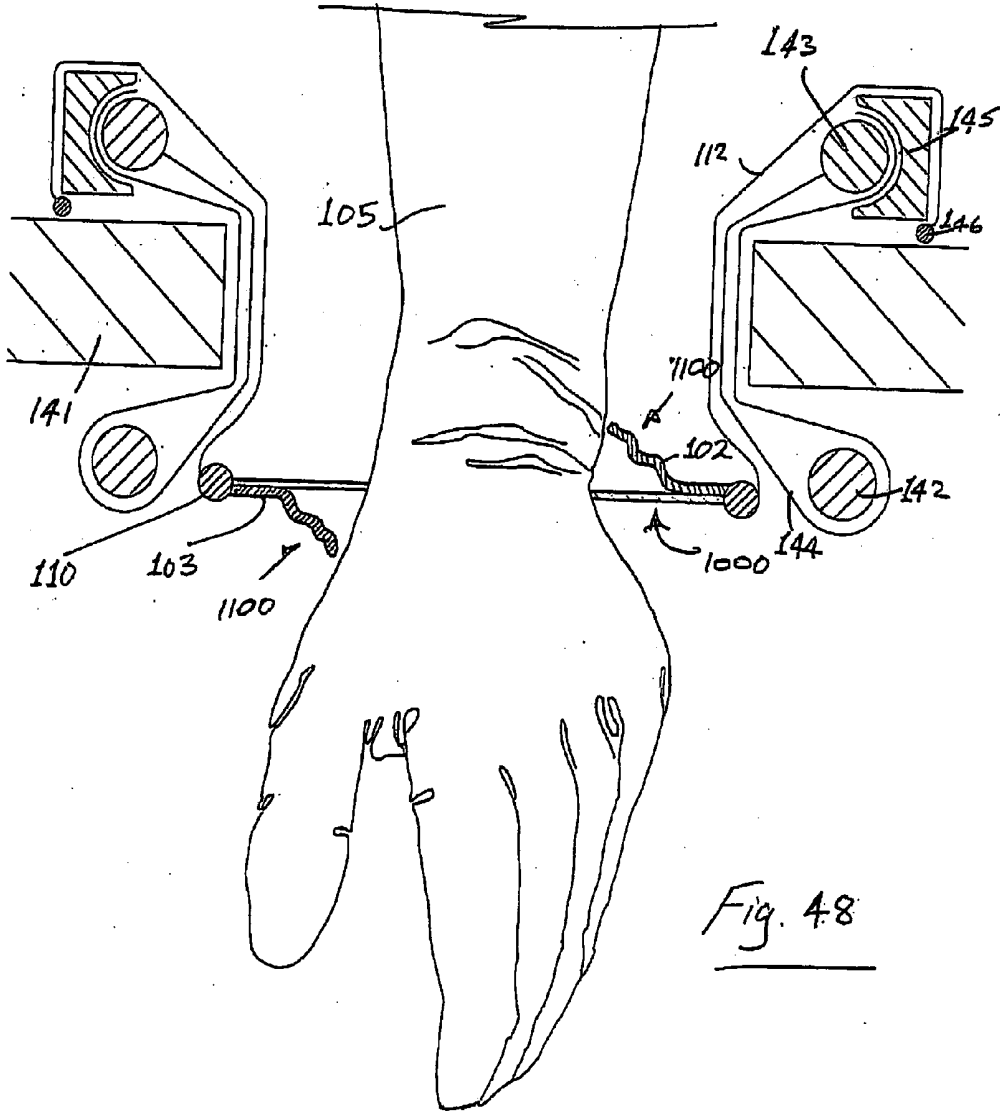


Fig. 48

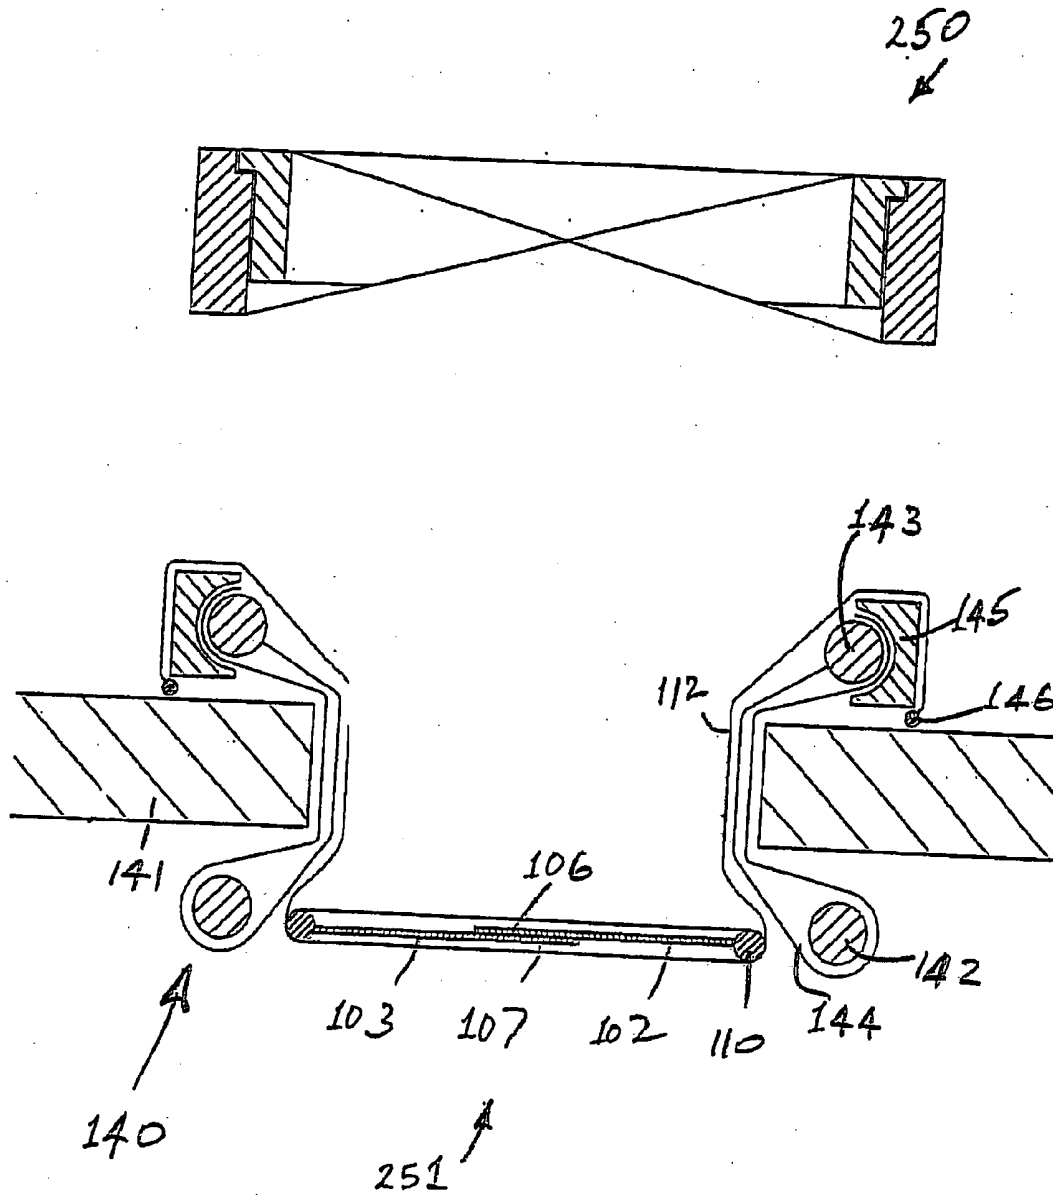


Fig. 49

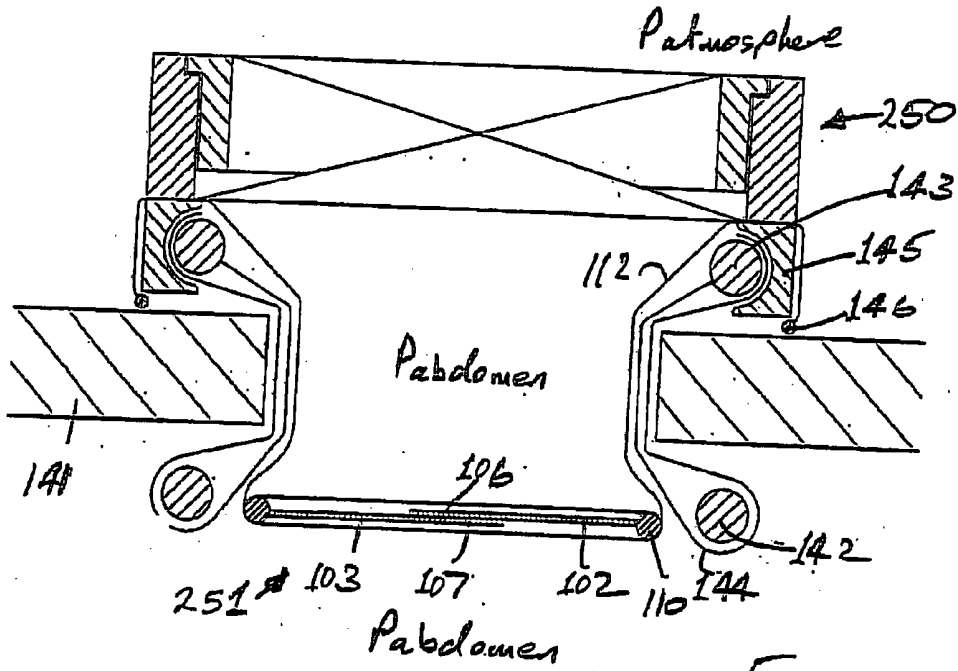


Fig. 50

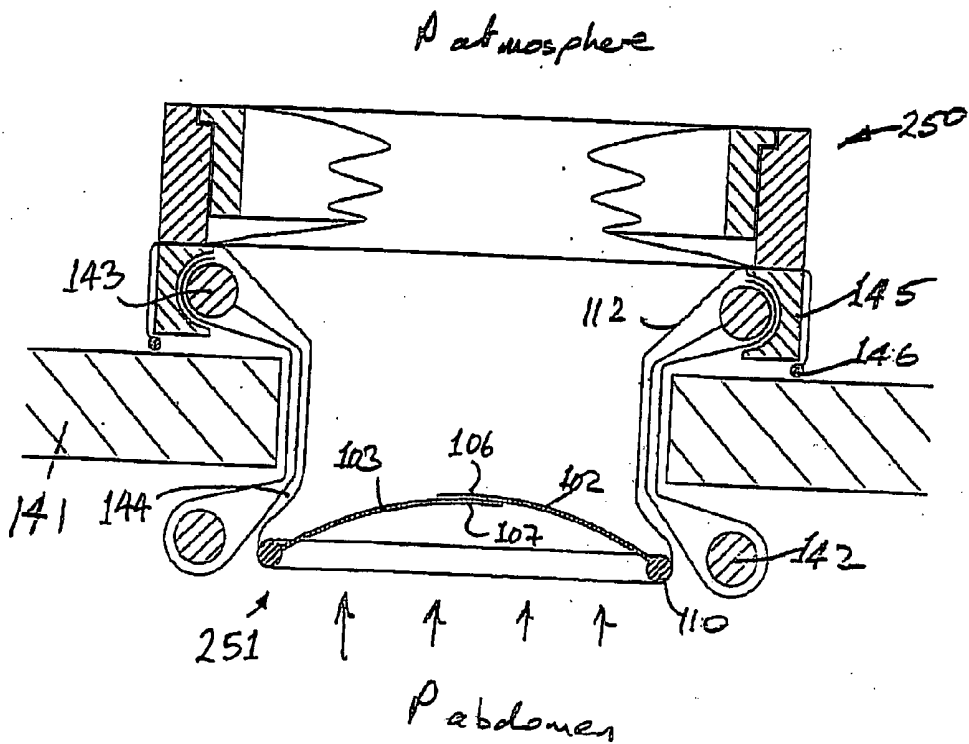


Fig. 51

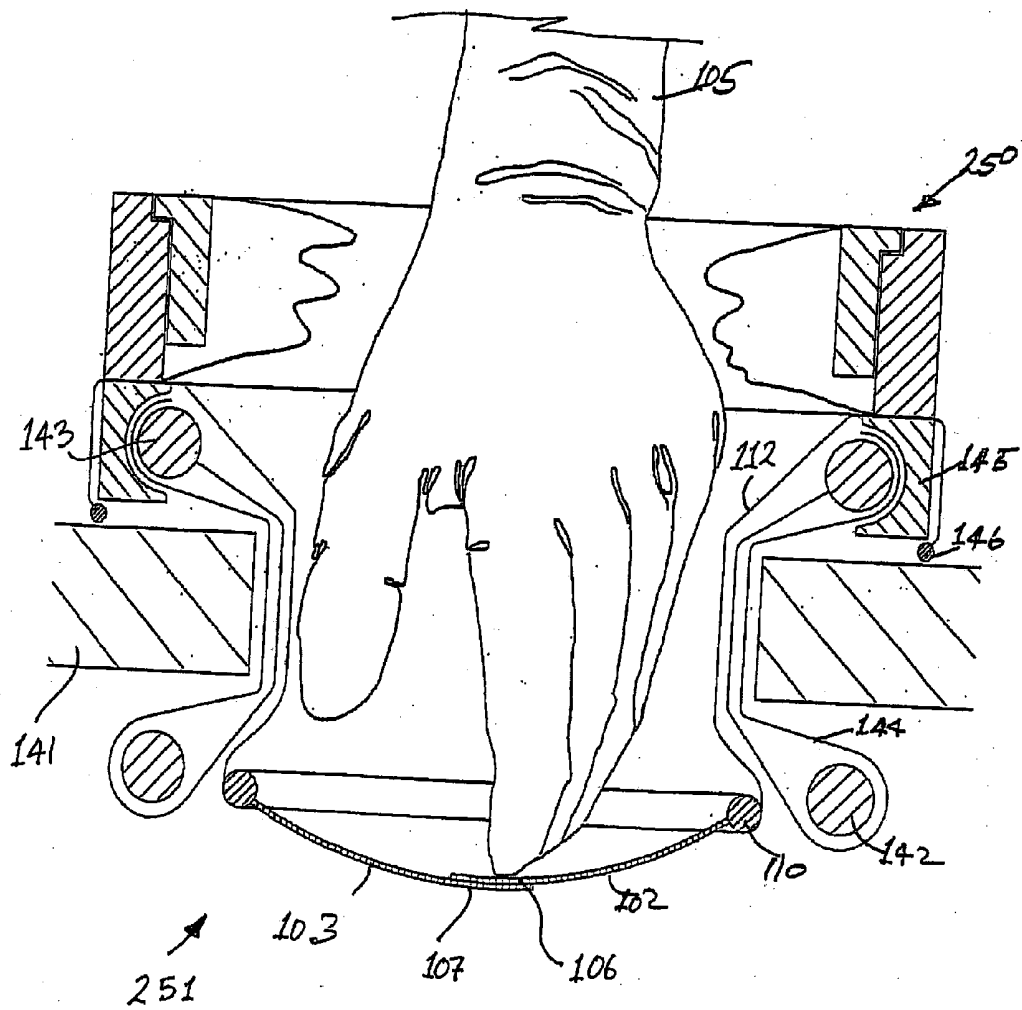
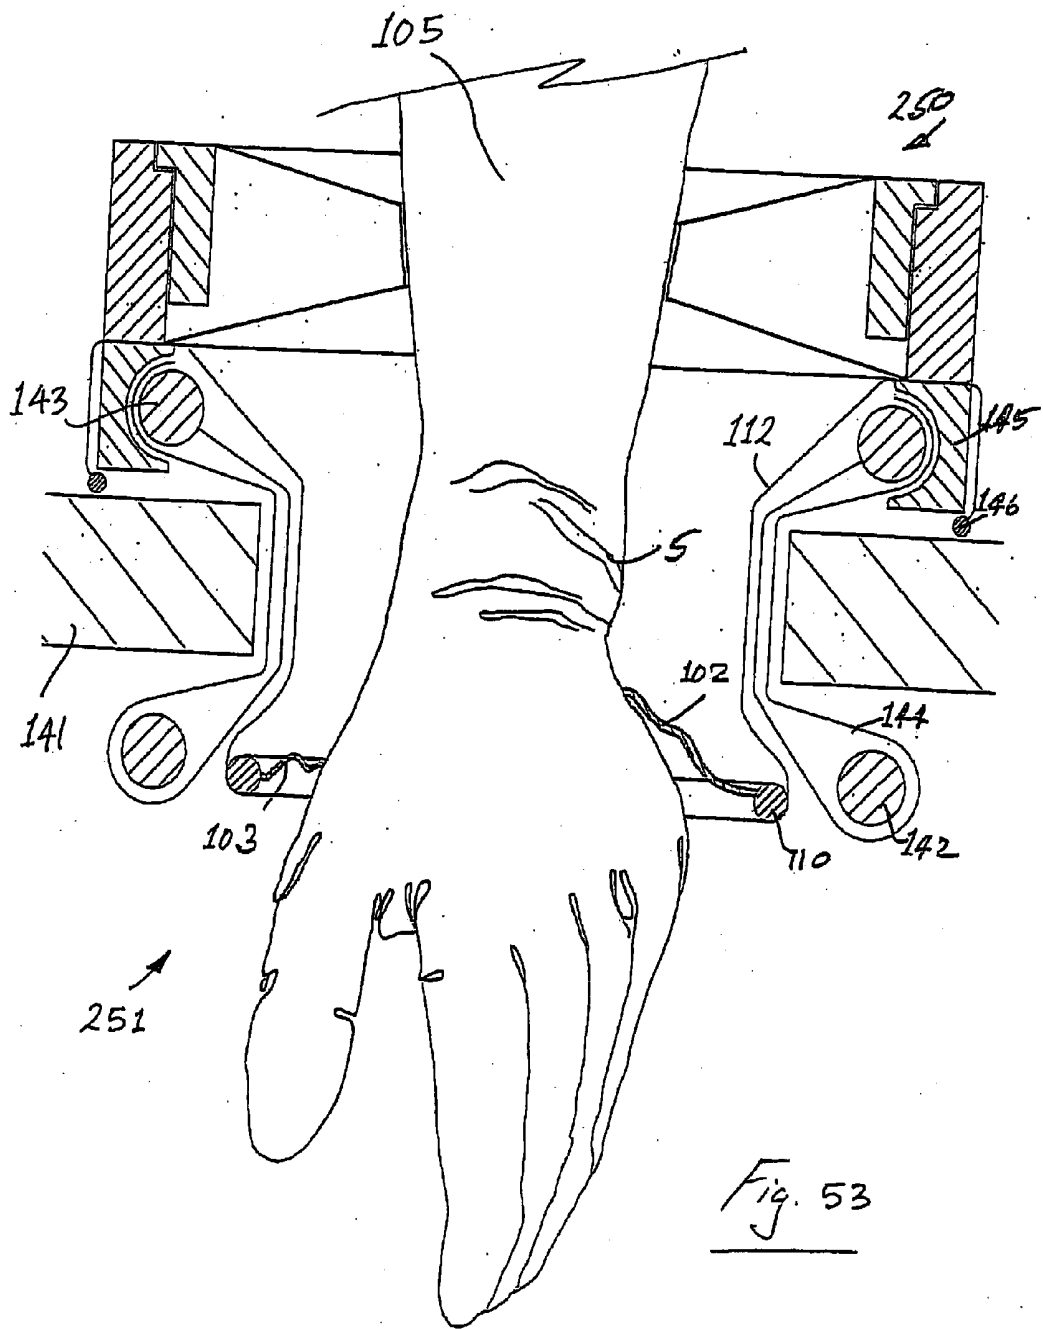


Fig. 52



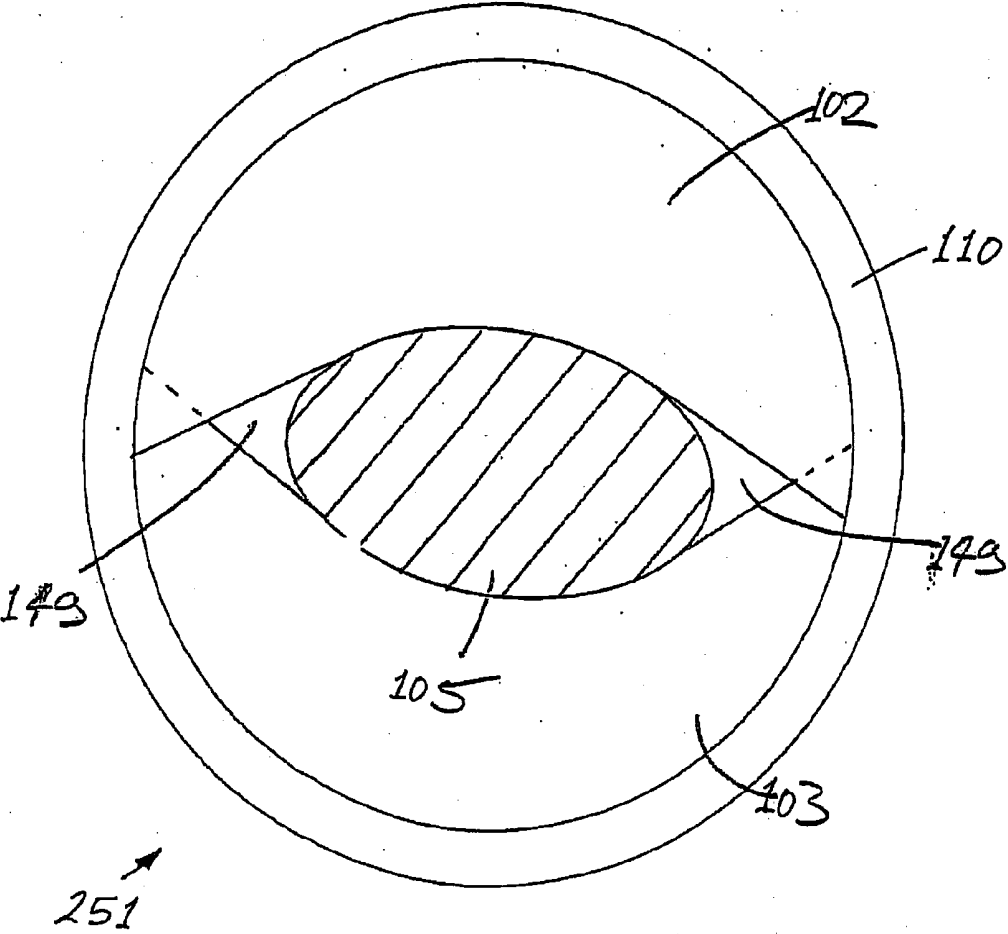


Fig. 54

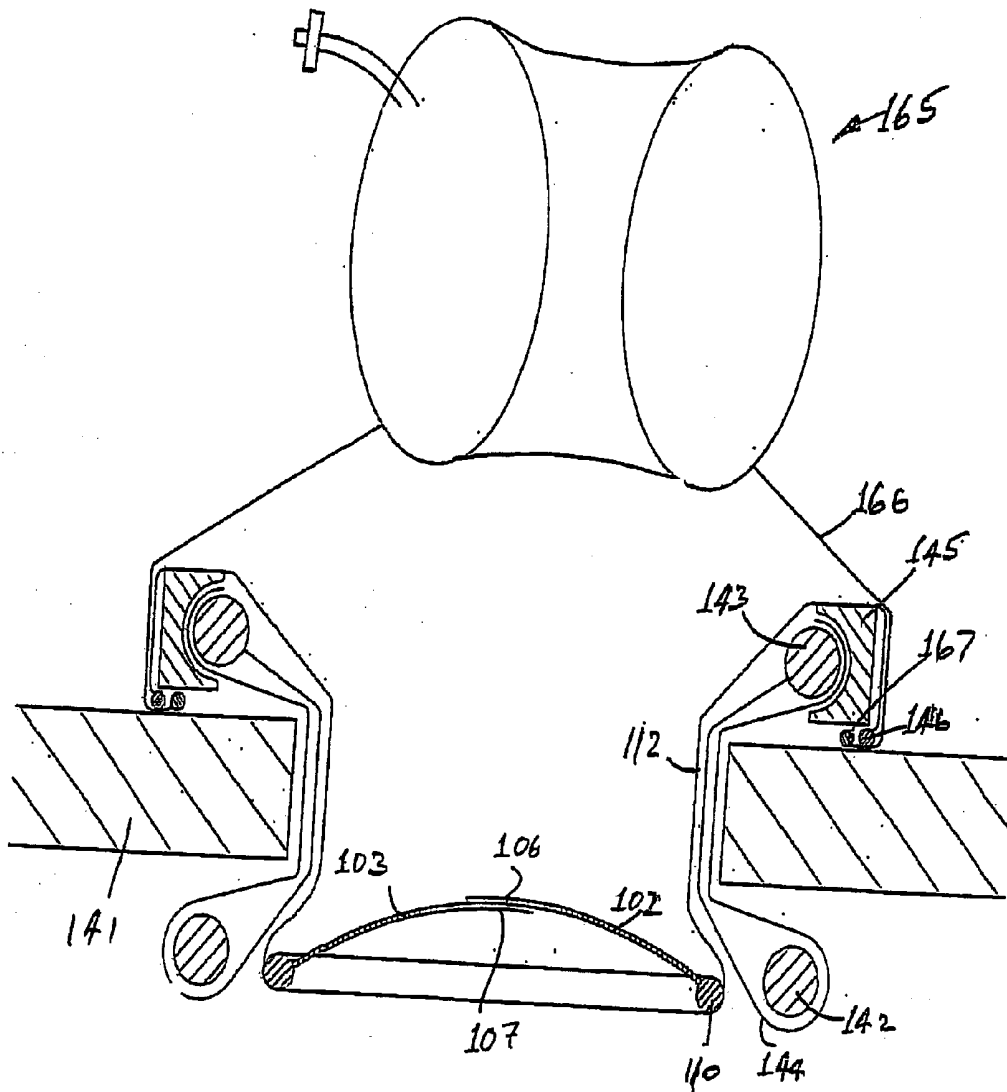


Fig. 55

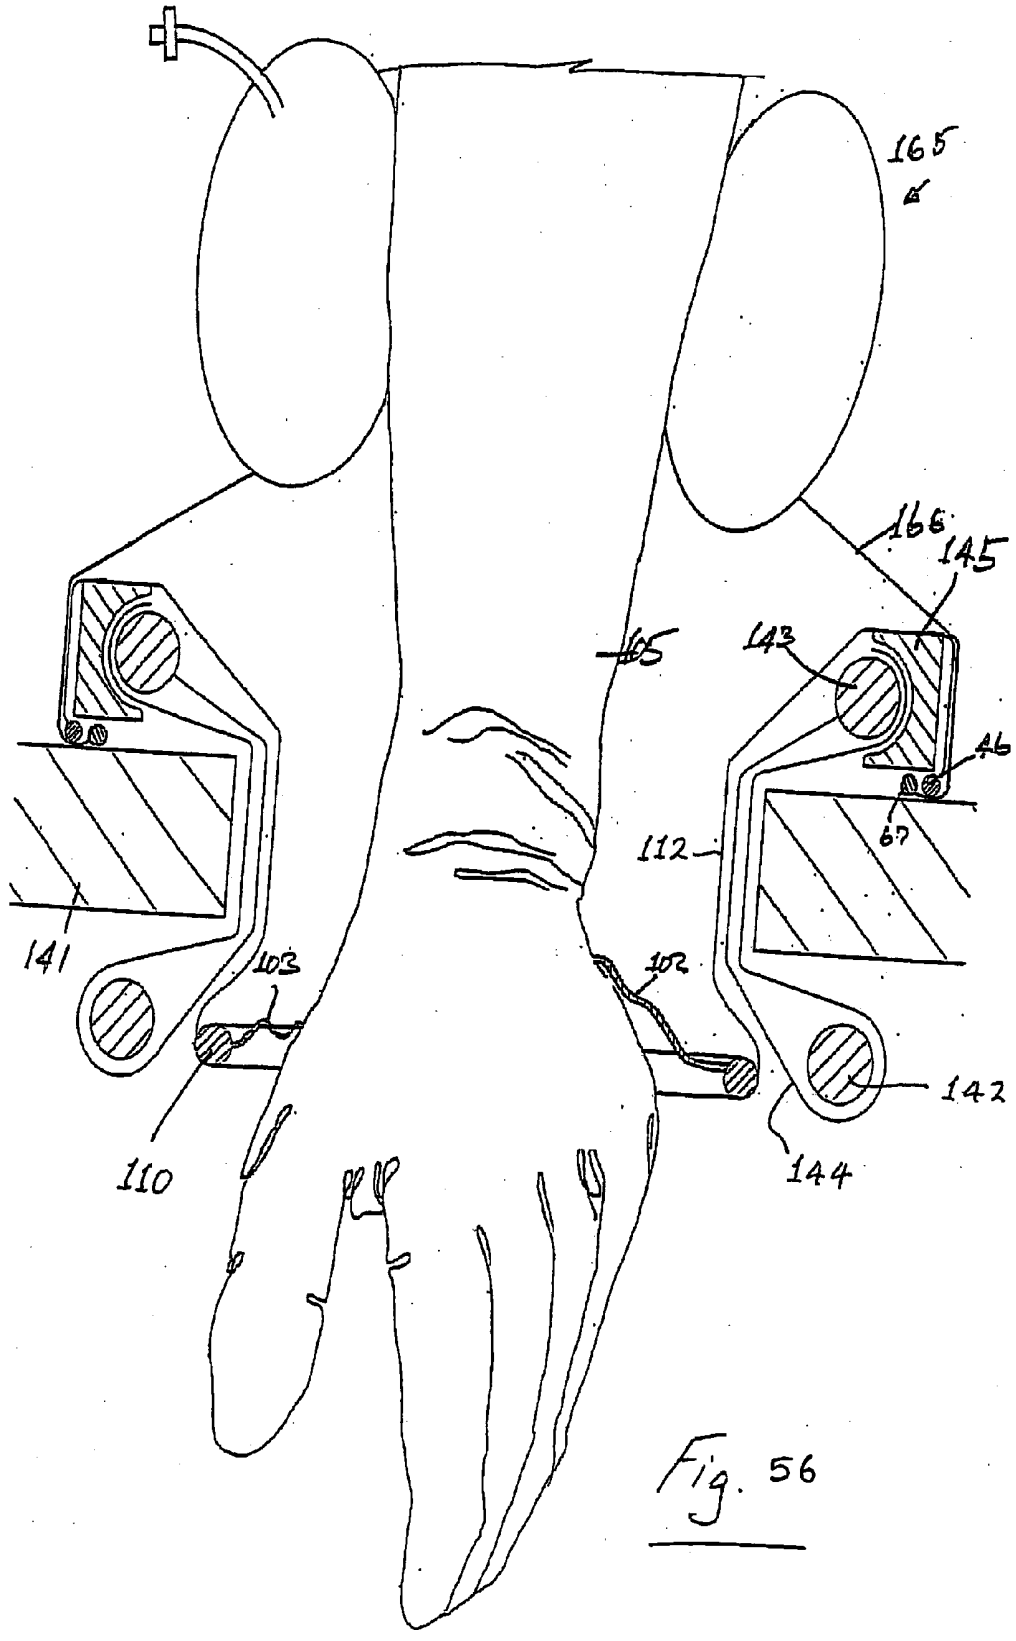


Fig. 56

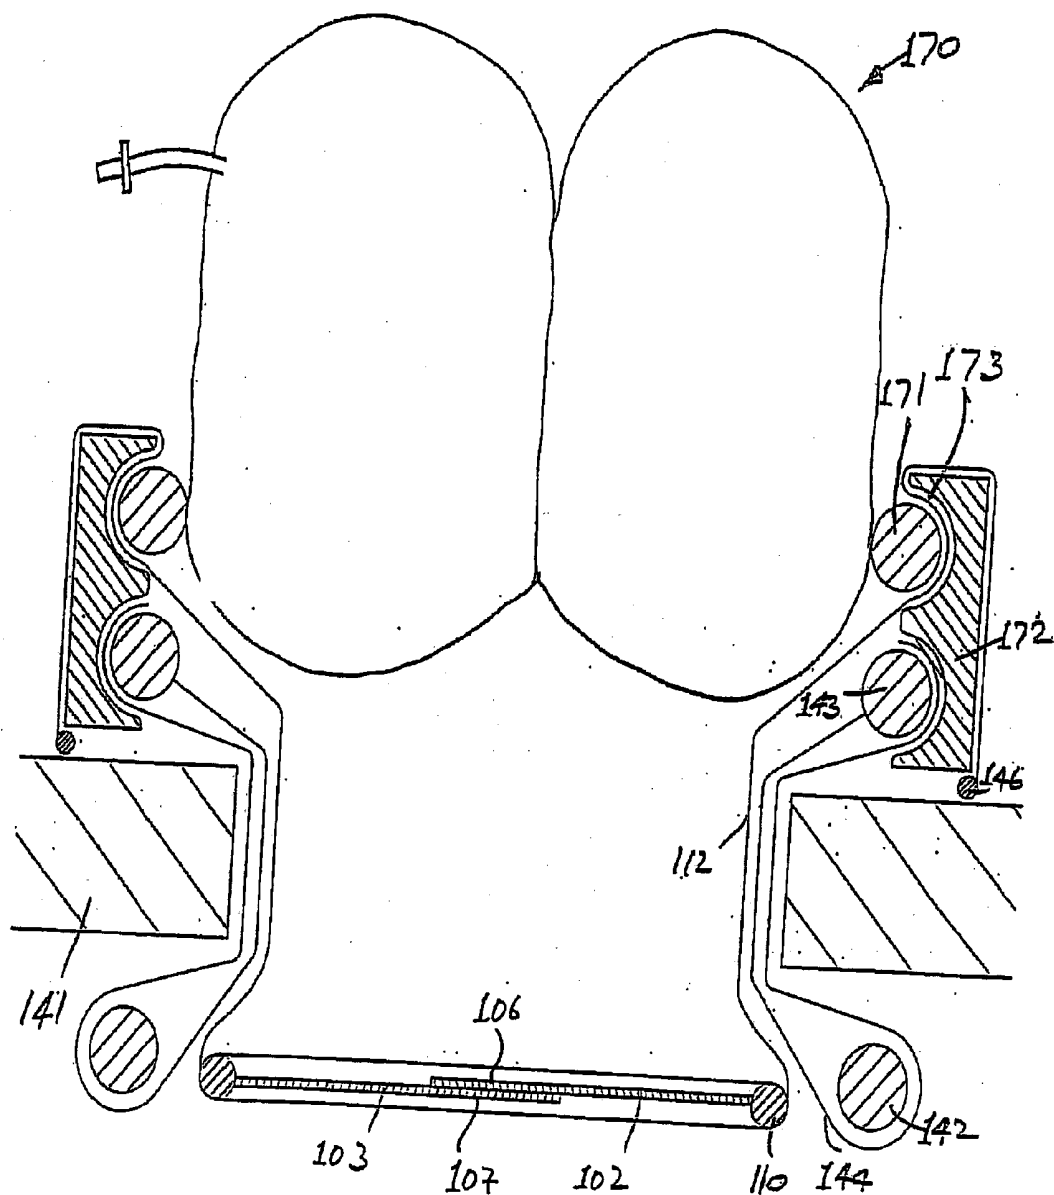


Fig. 57

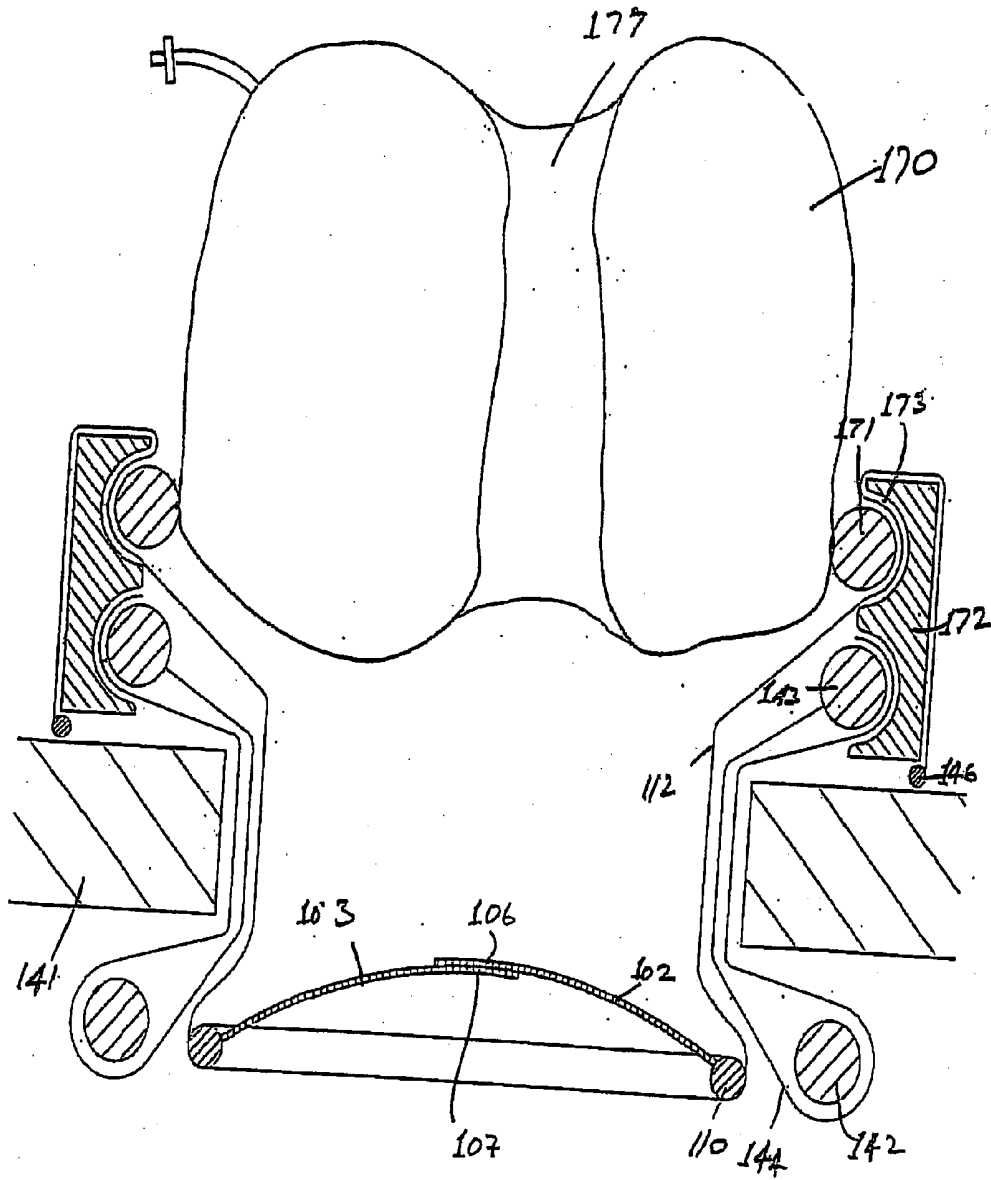


Fig. 58

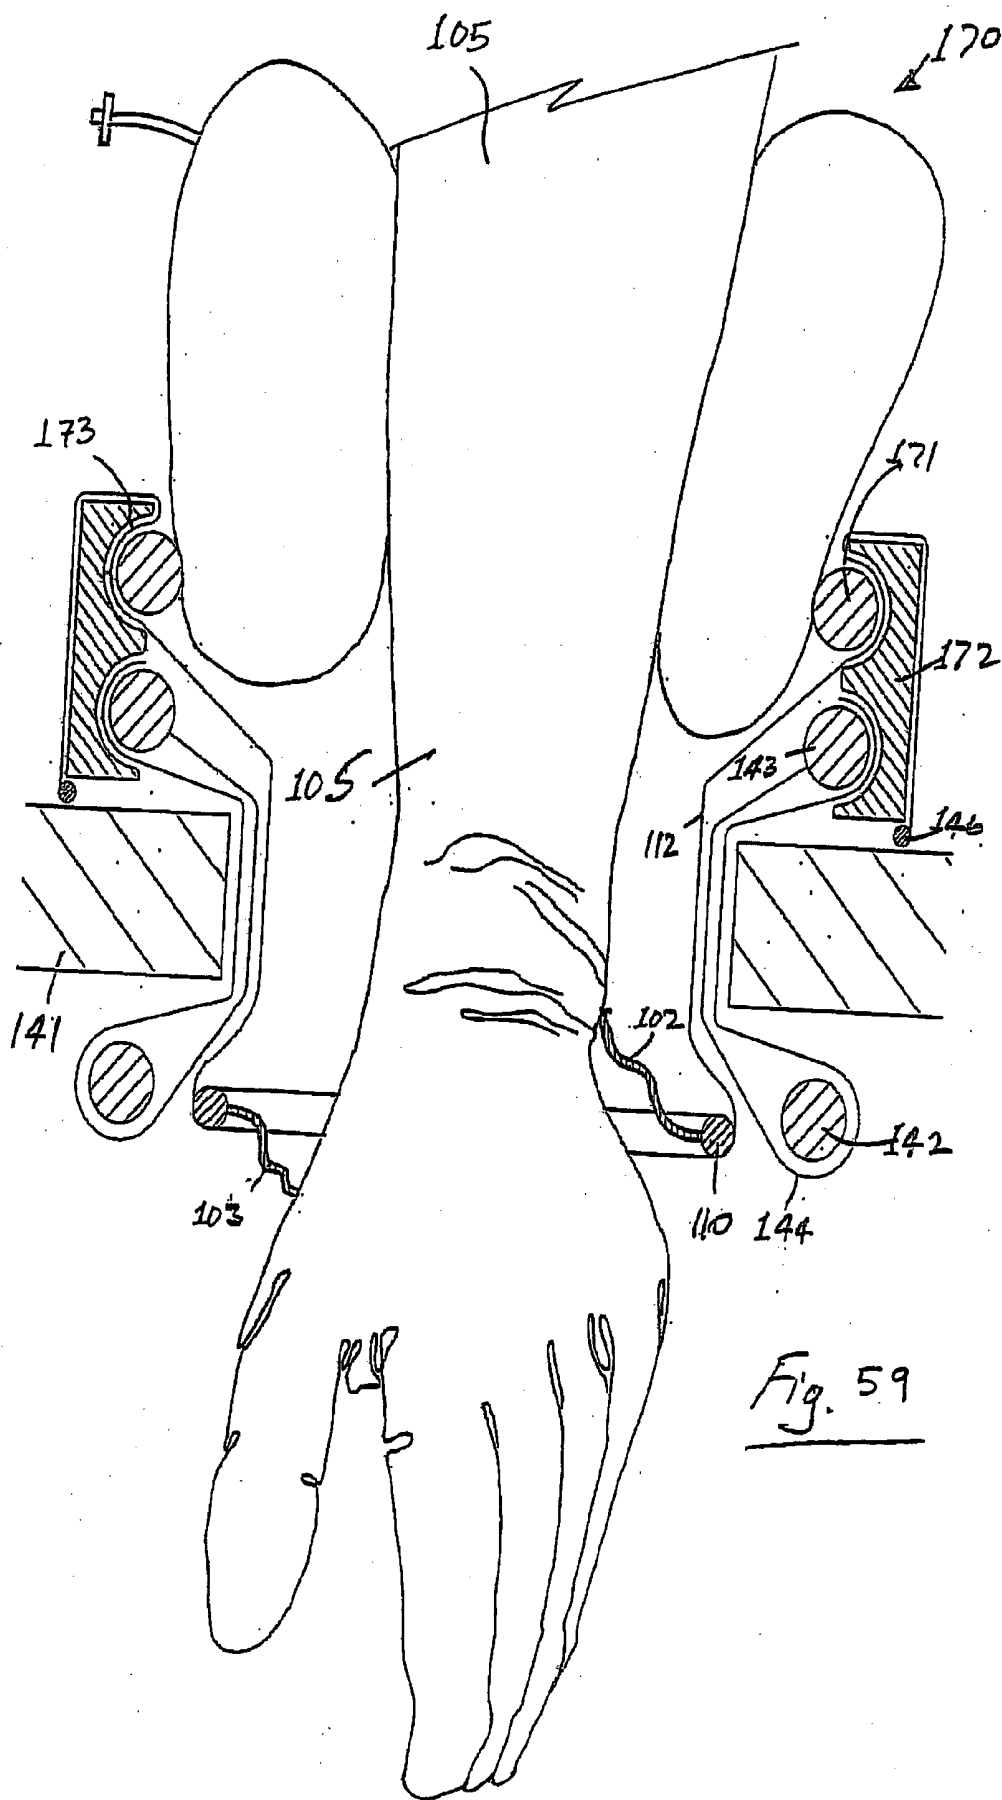


Fig. 59

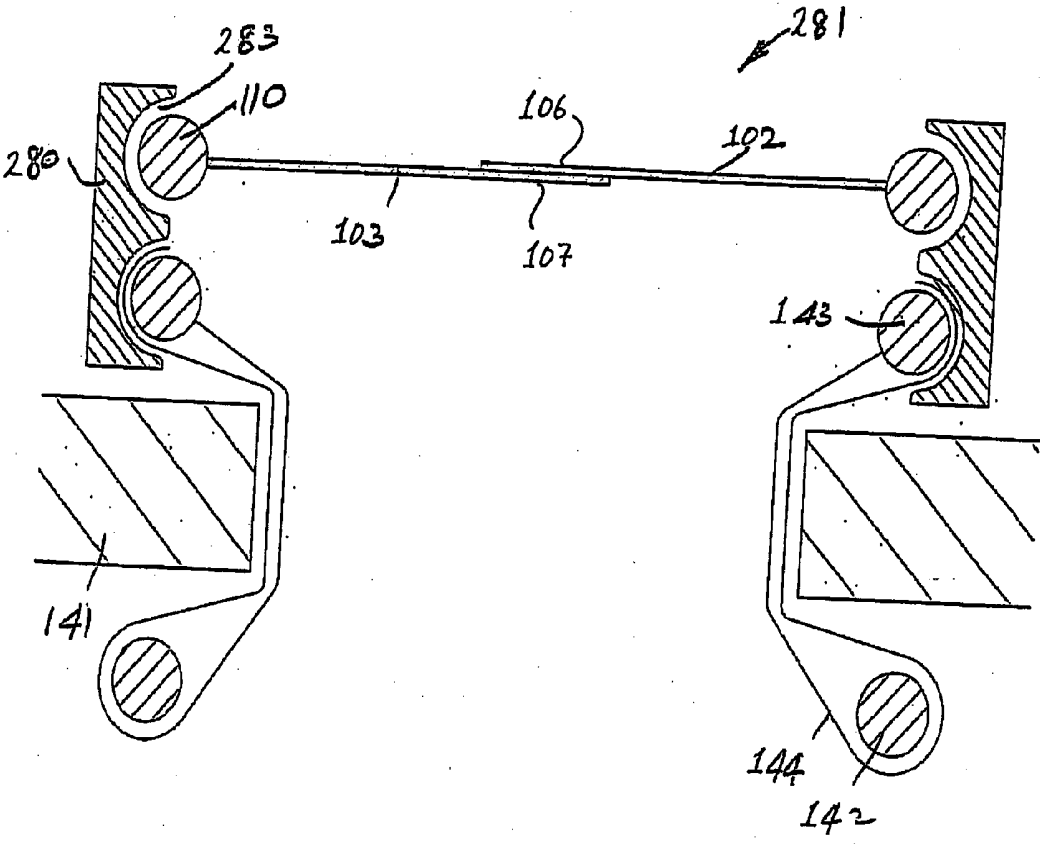


Fig. 60

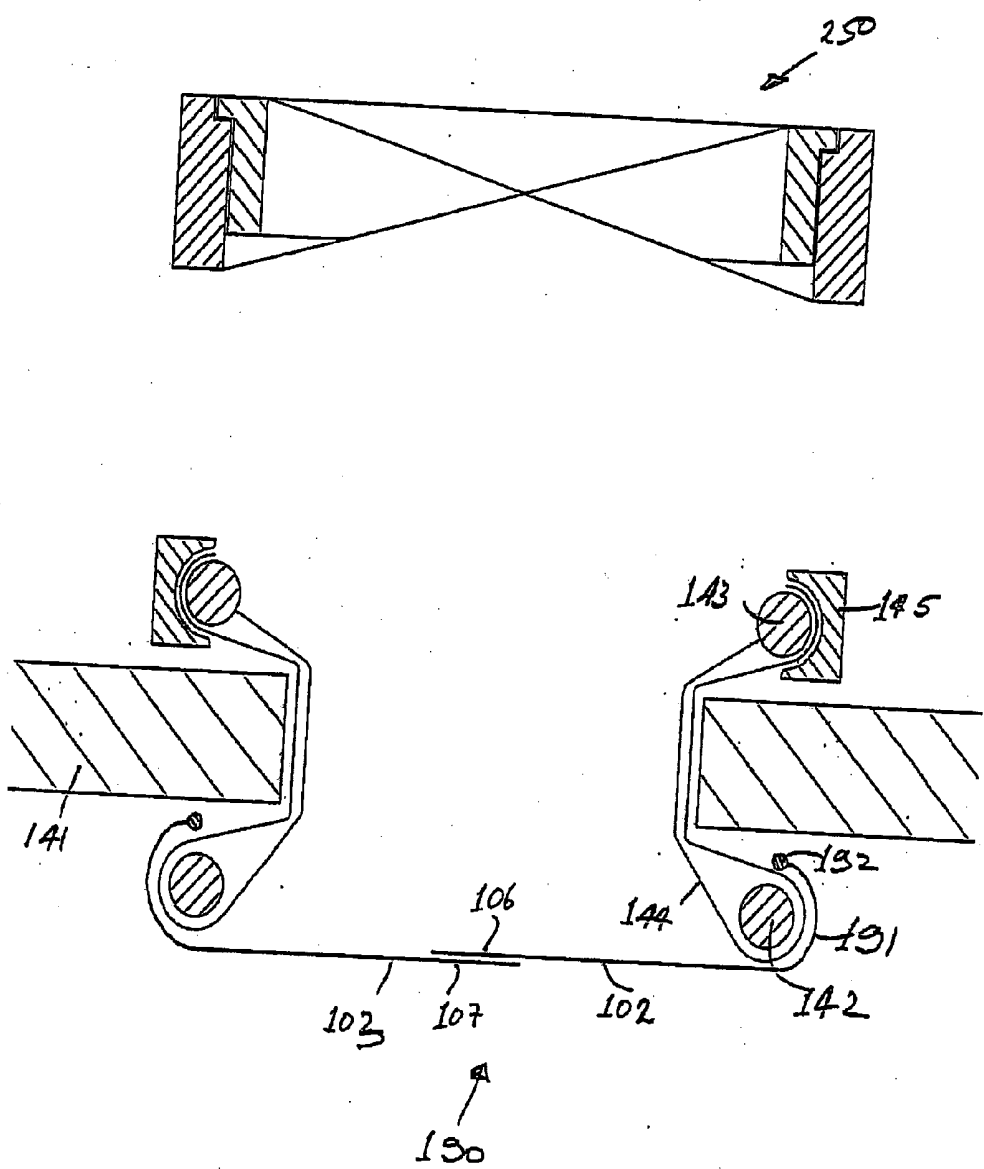


Fig. 61

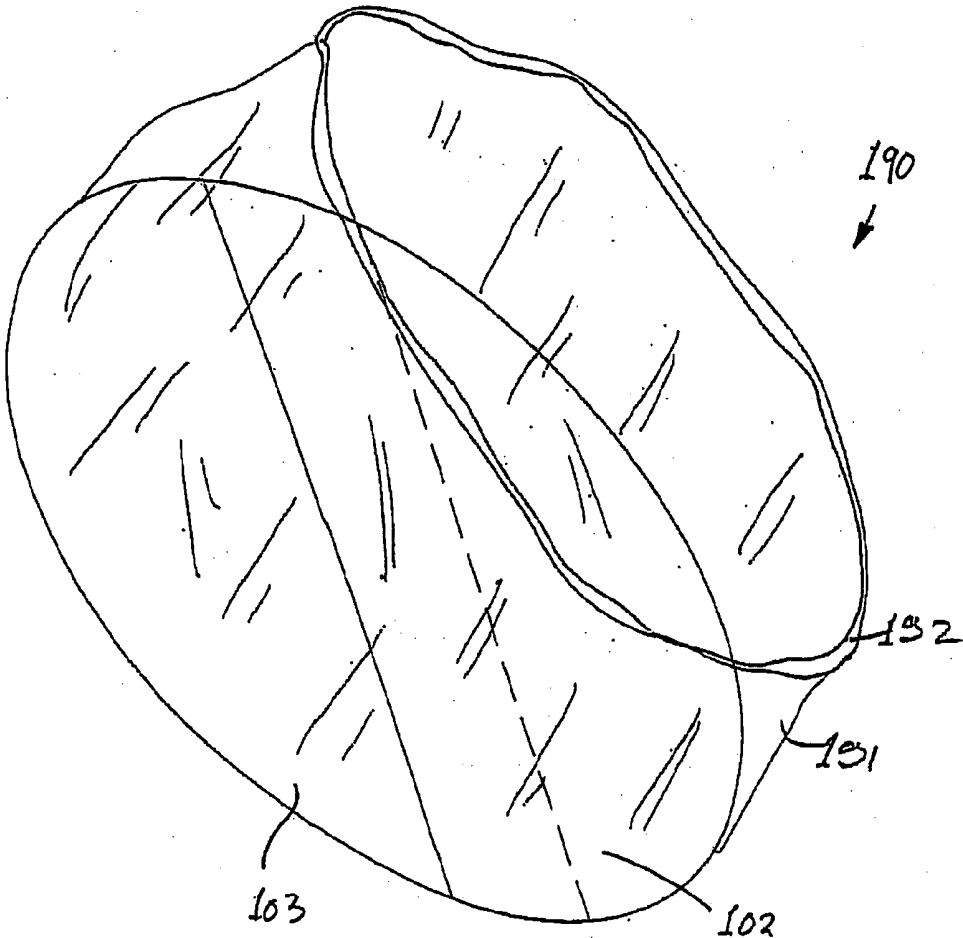
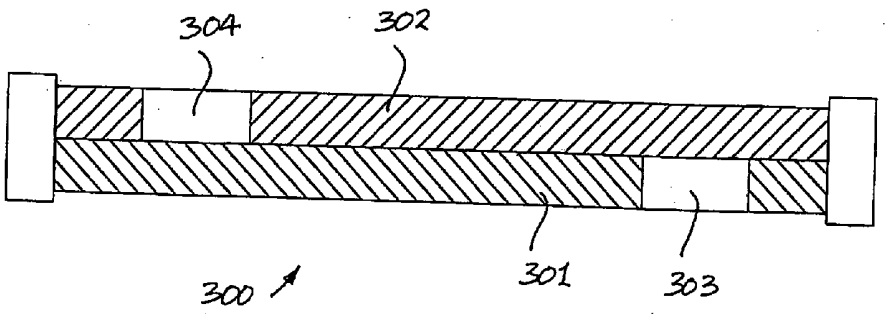
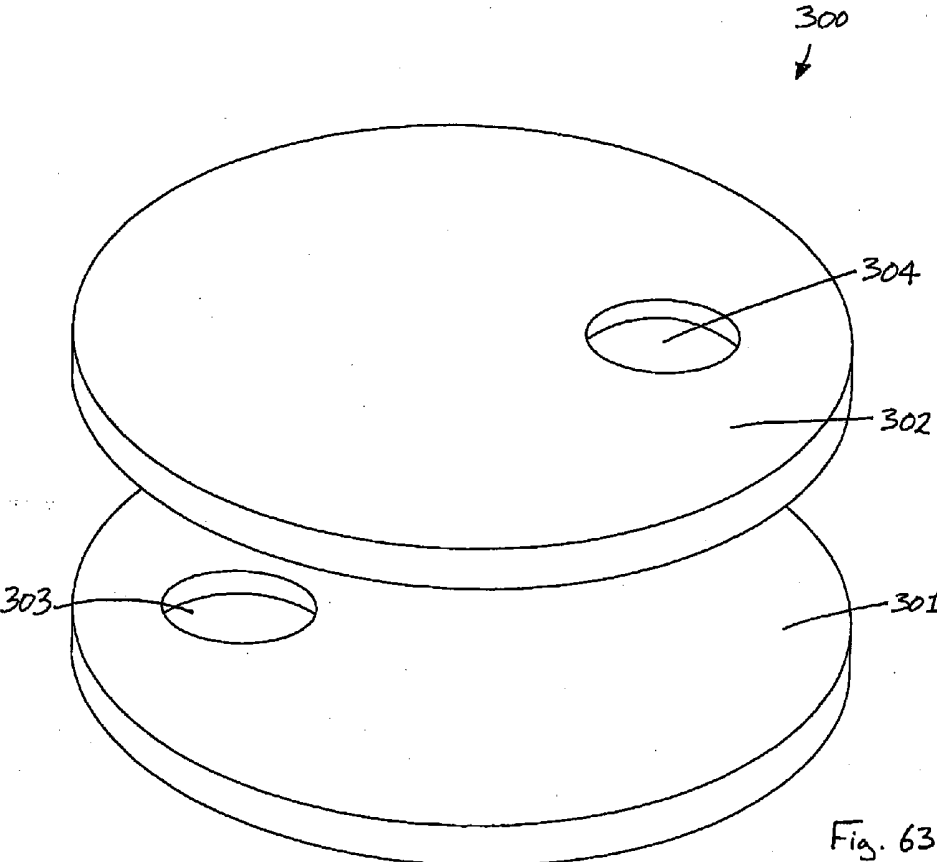


Fig. 62



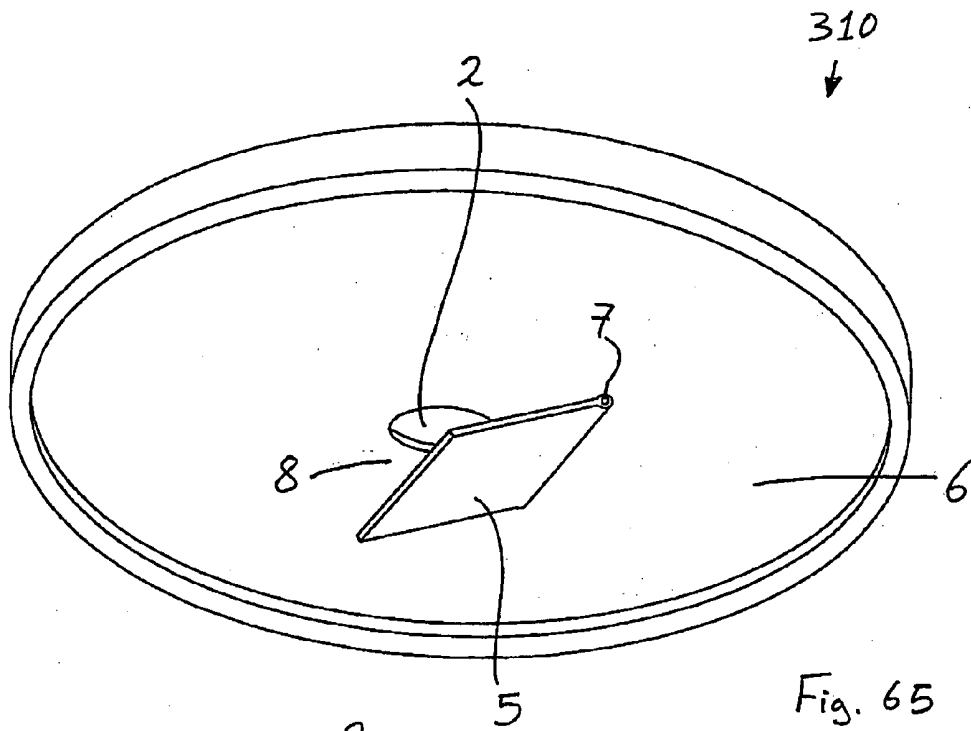


Fig. 65

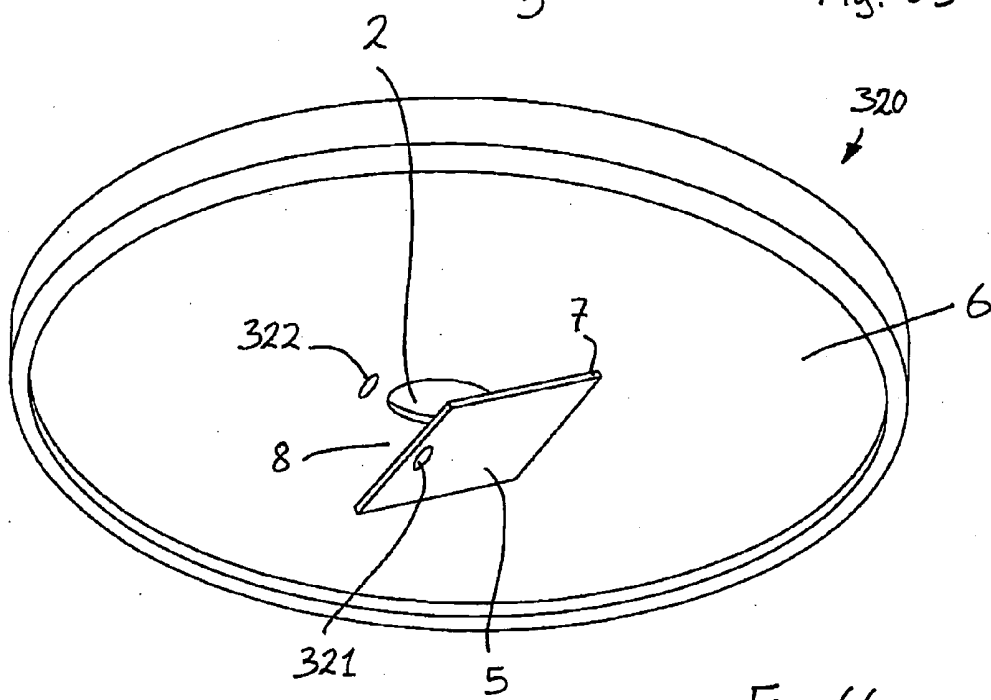


Fig. 66

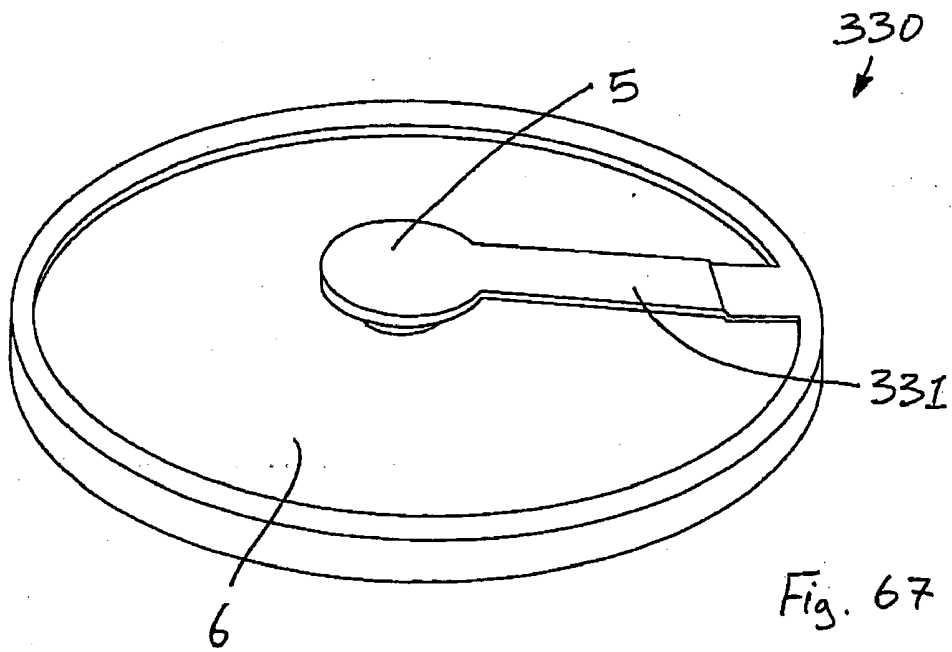


Fig. 67

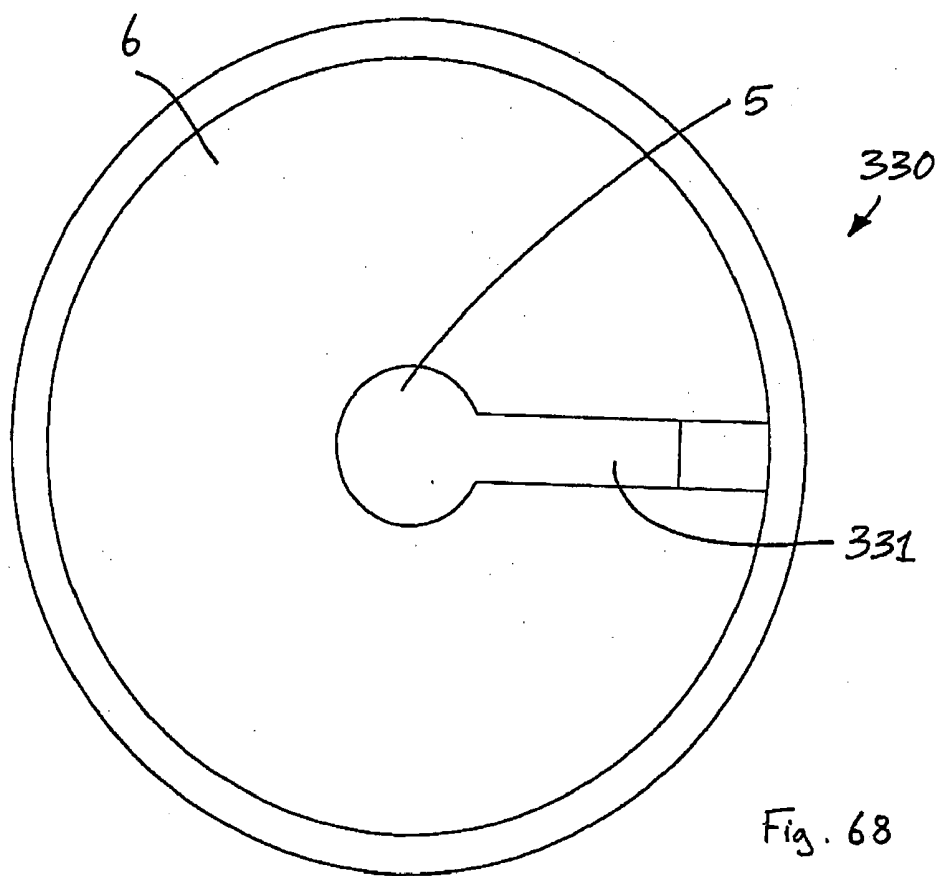


Fig. 68

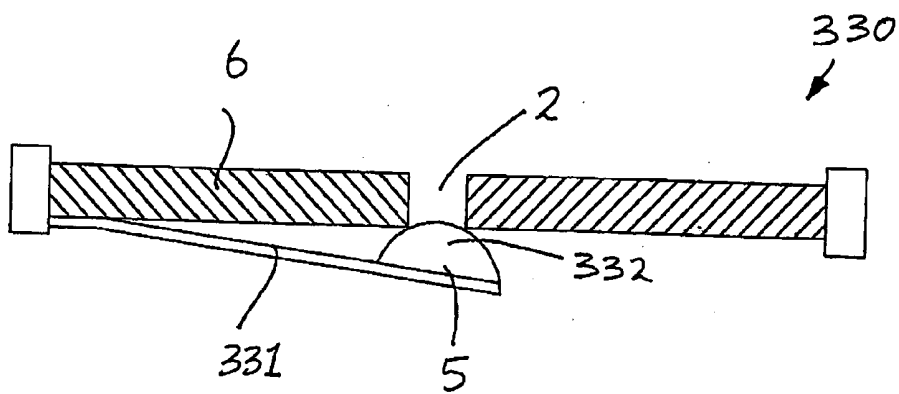


Fig. 69

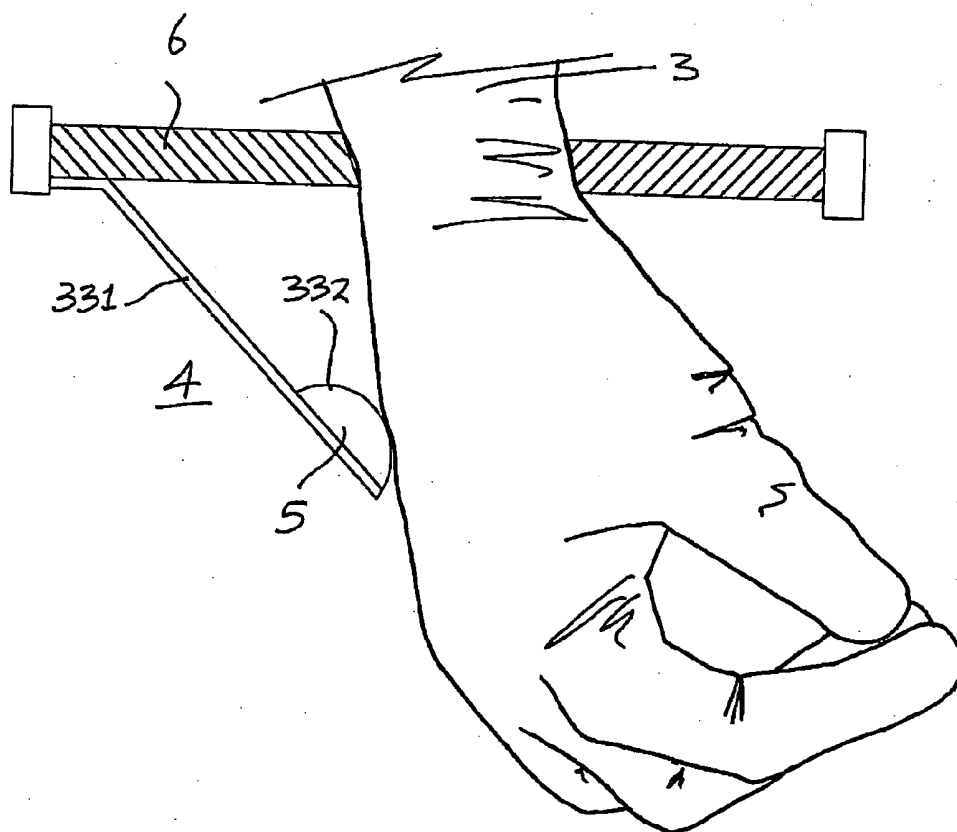
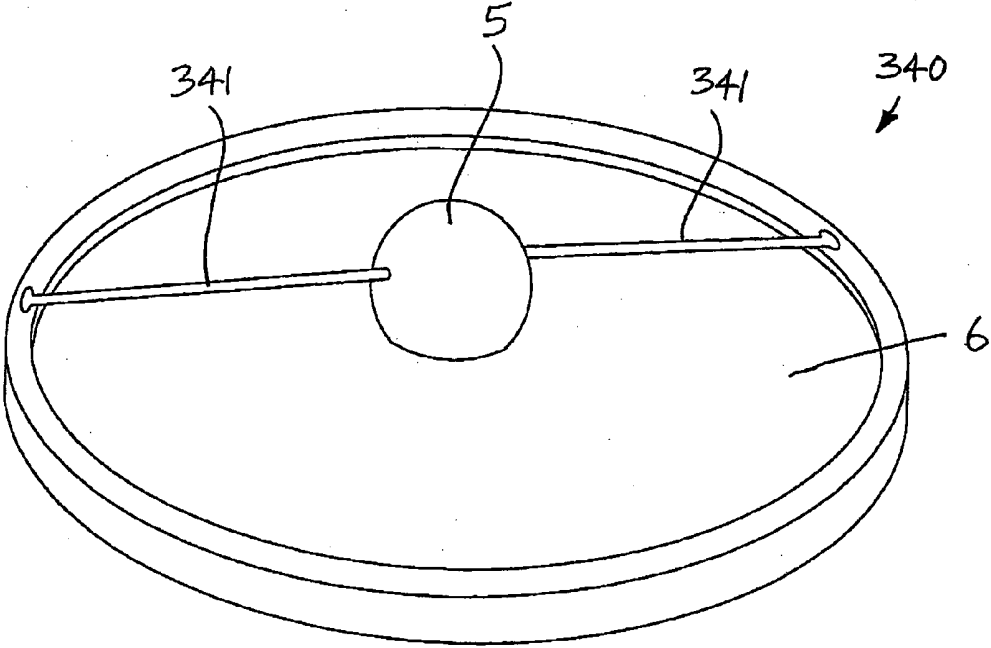
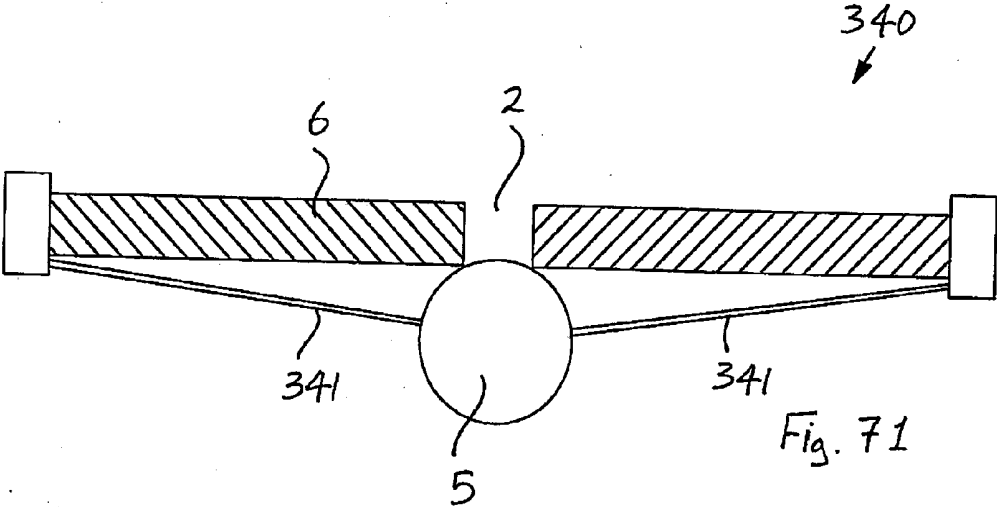


Fig. 70



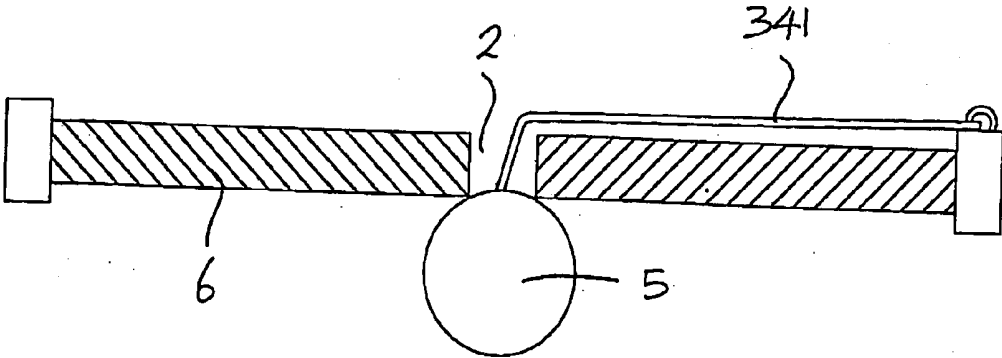


Fig. 73

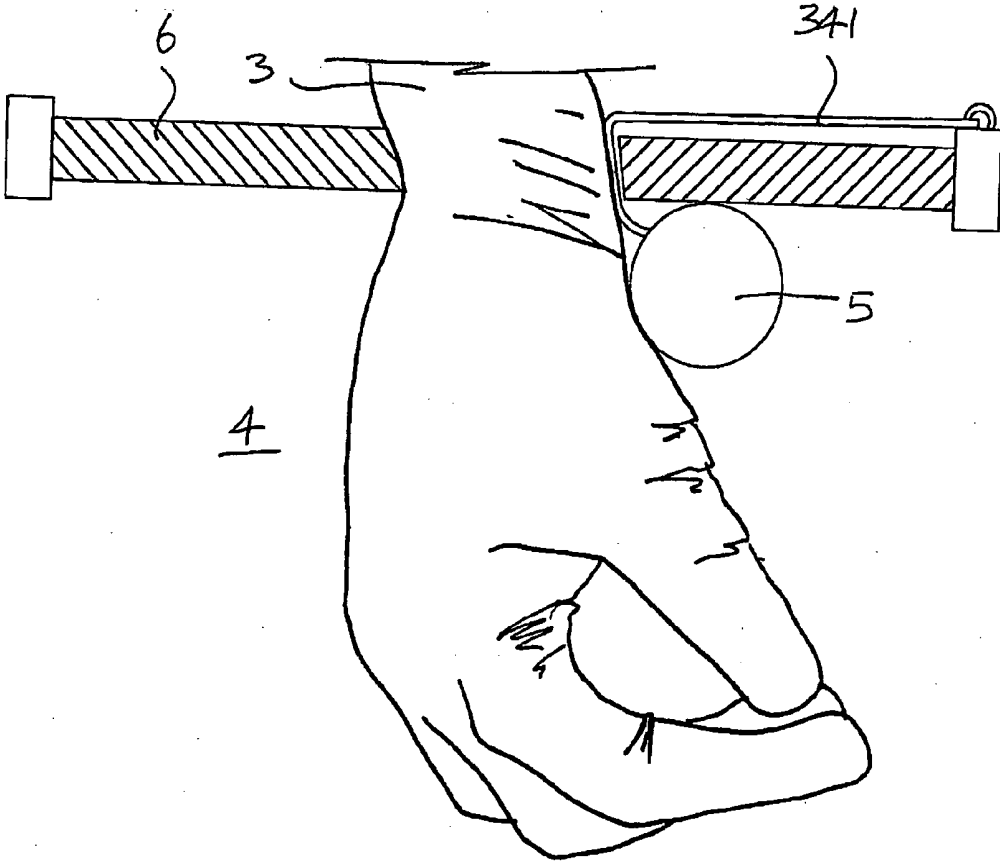


Fig. 74

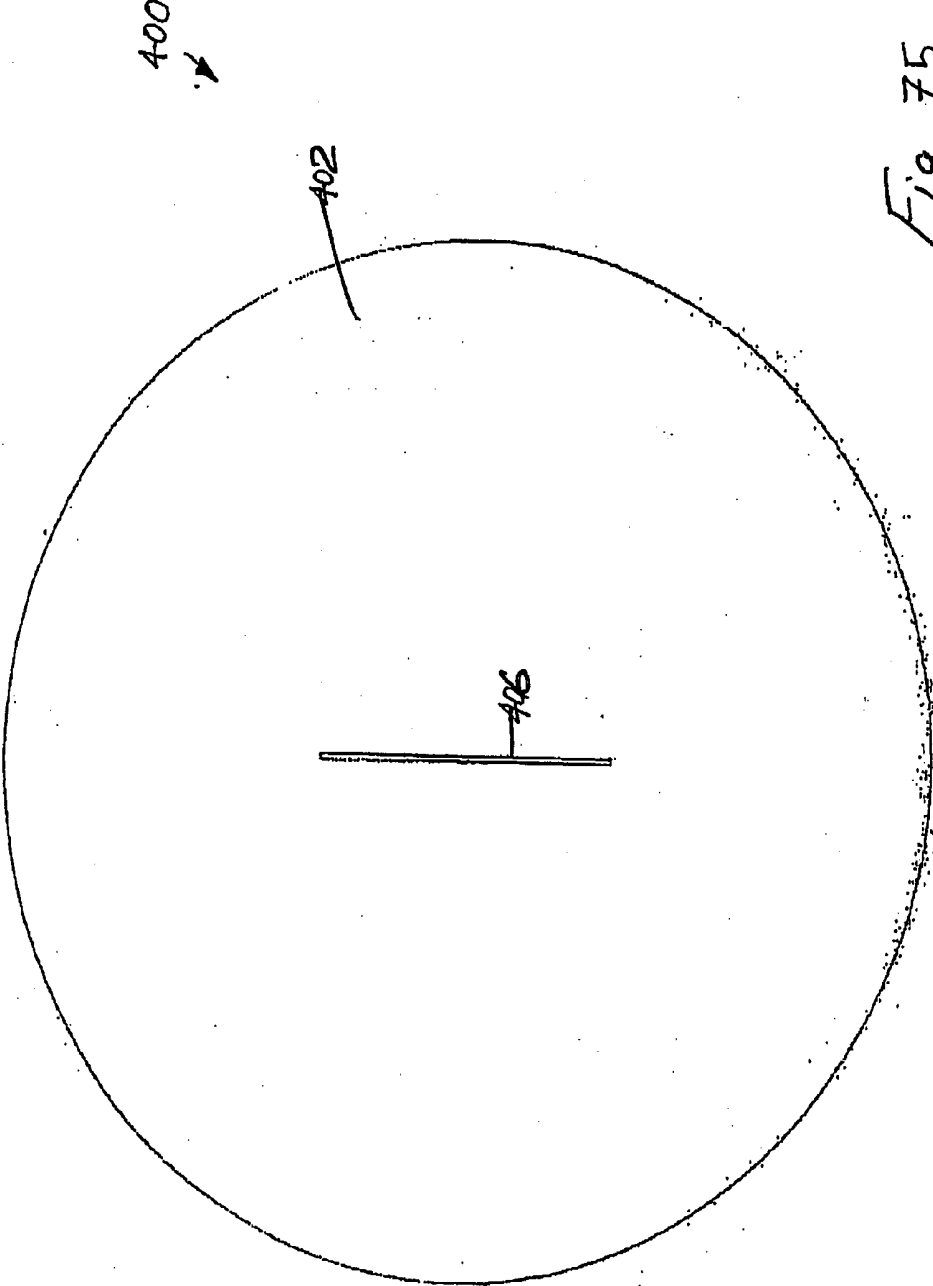


Fig. 75

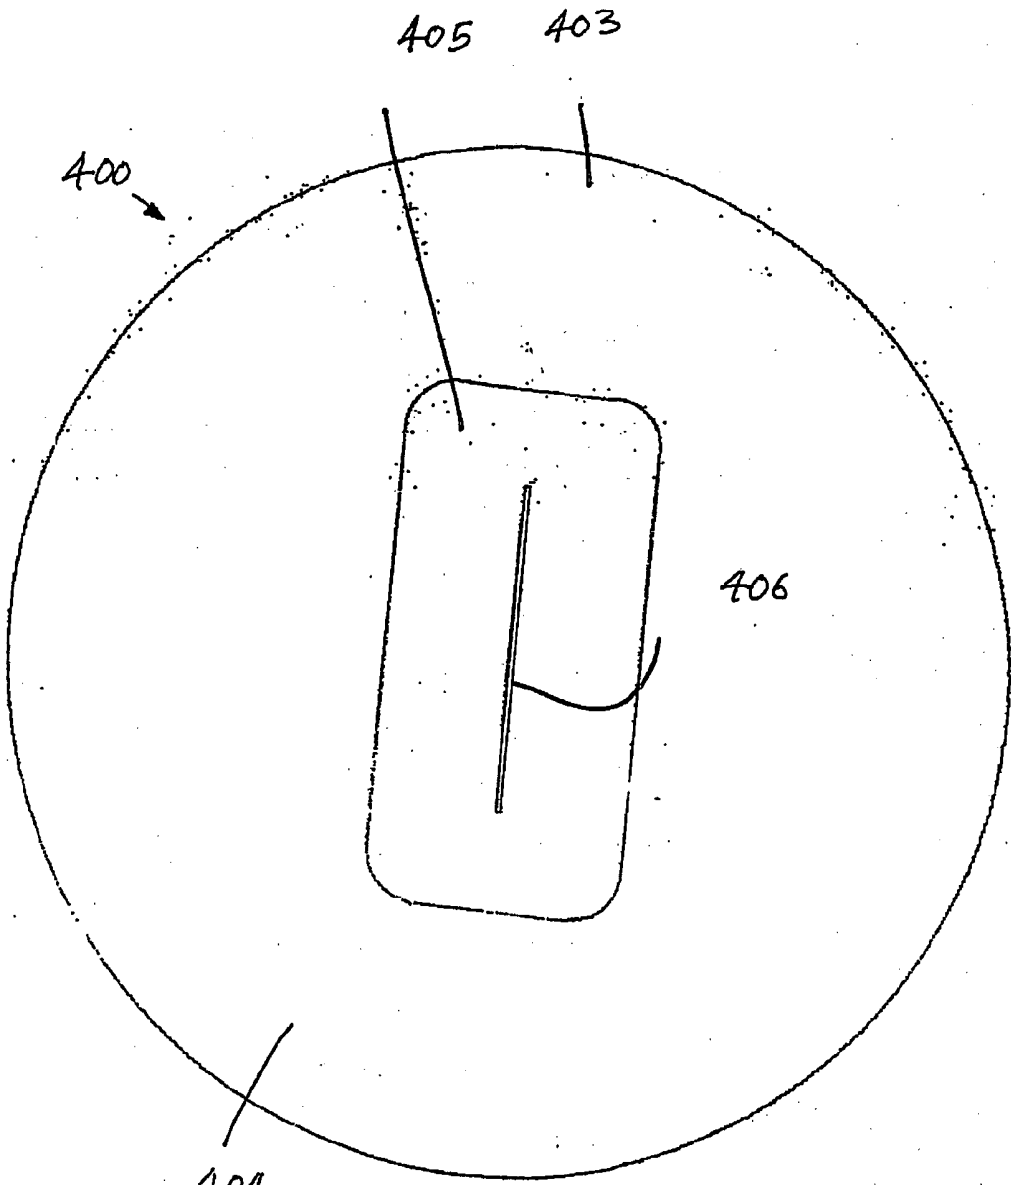
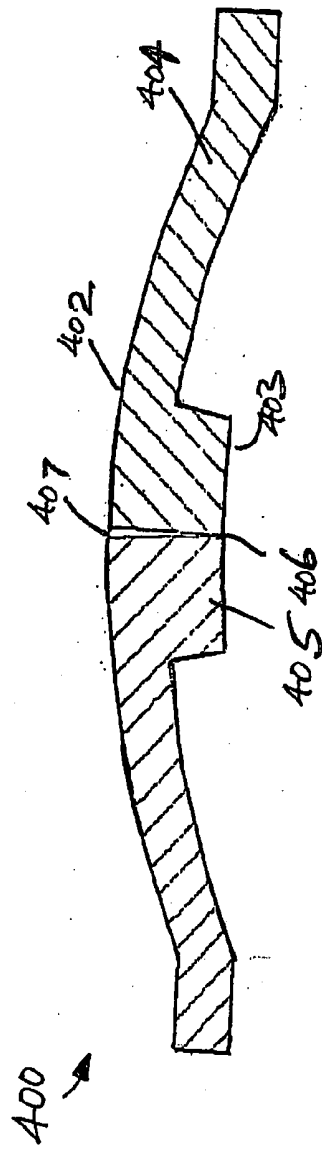
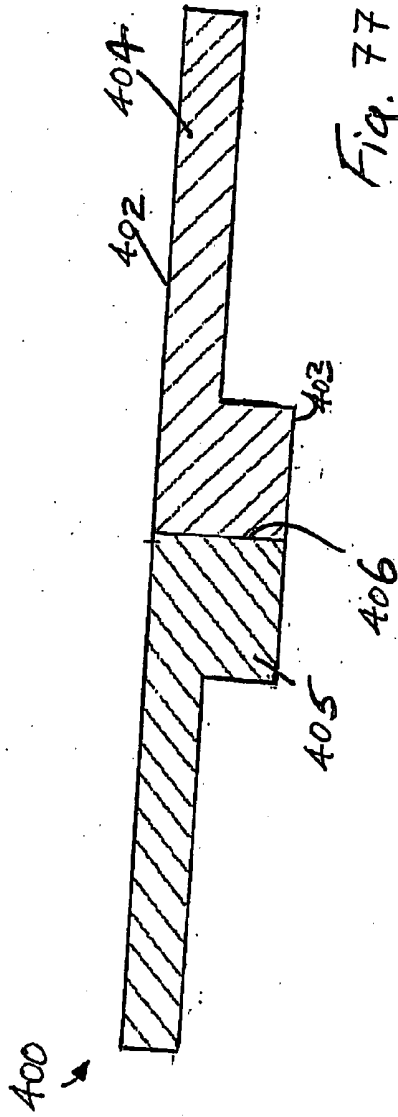


Fig. 76



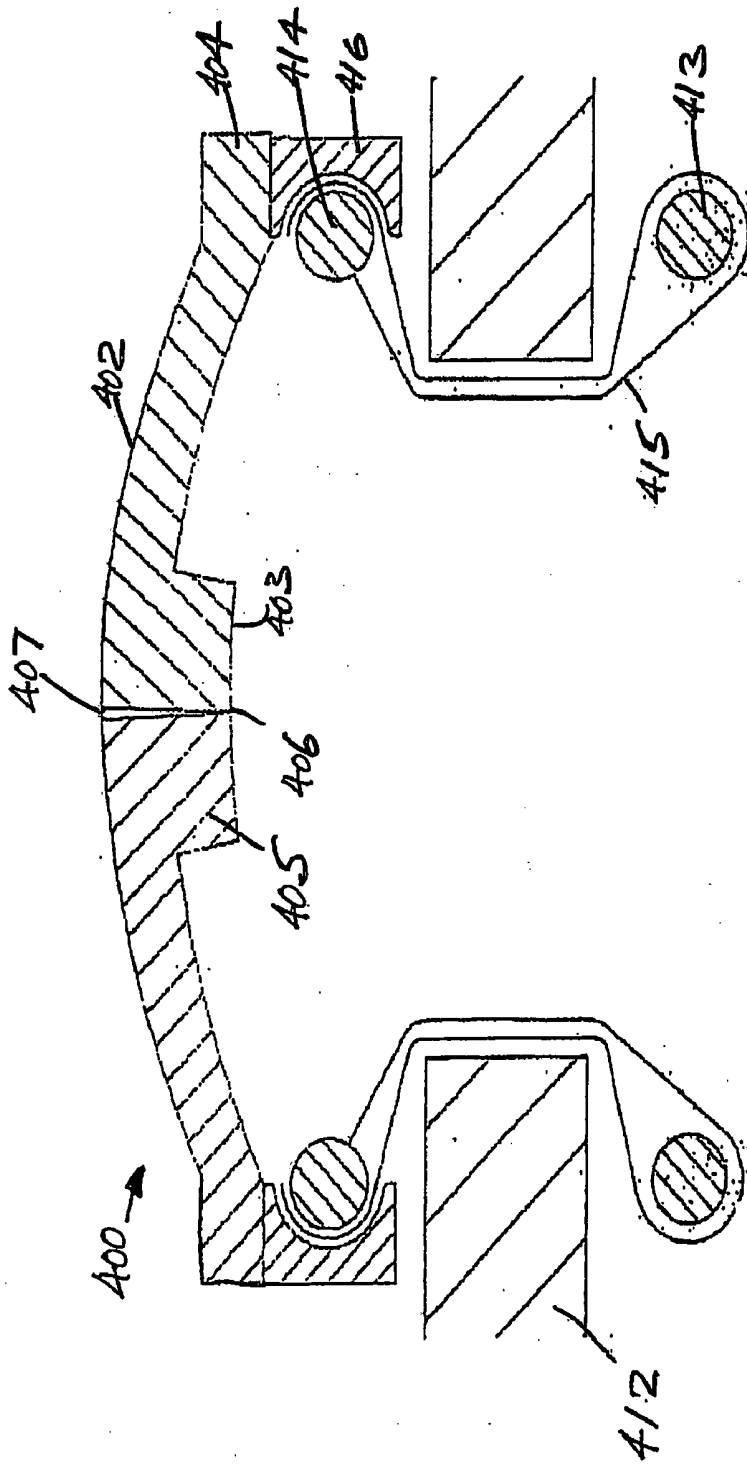


Fig. 80

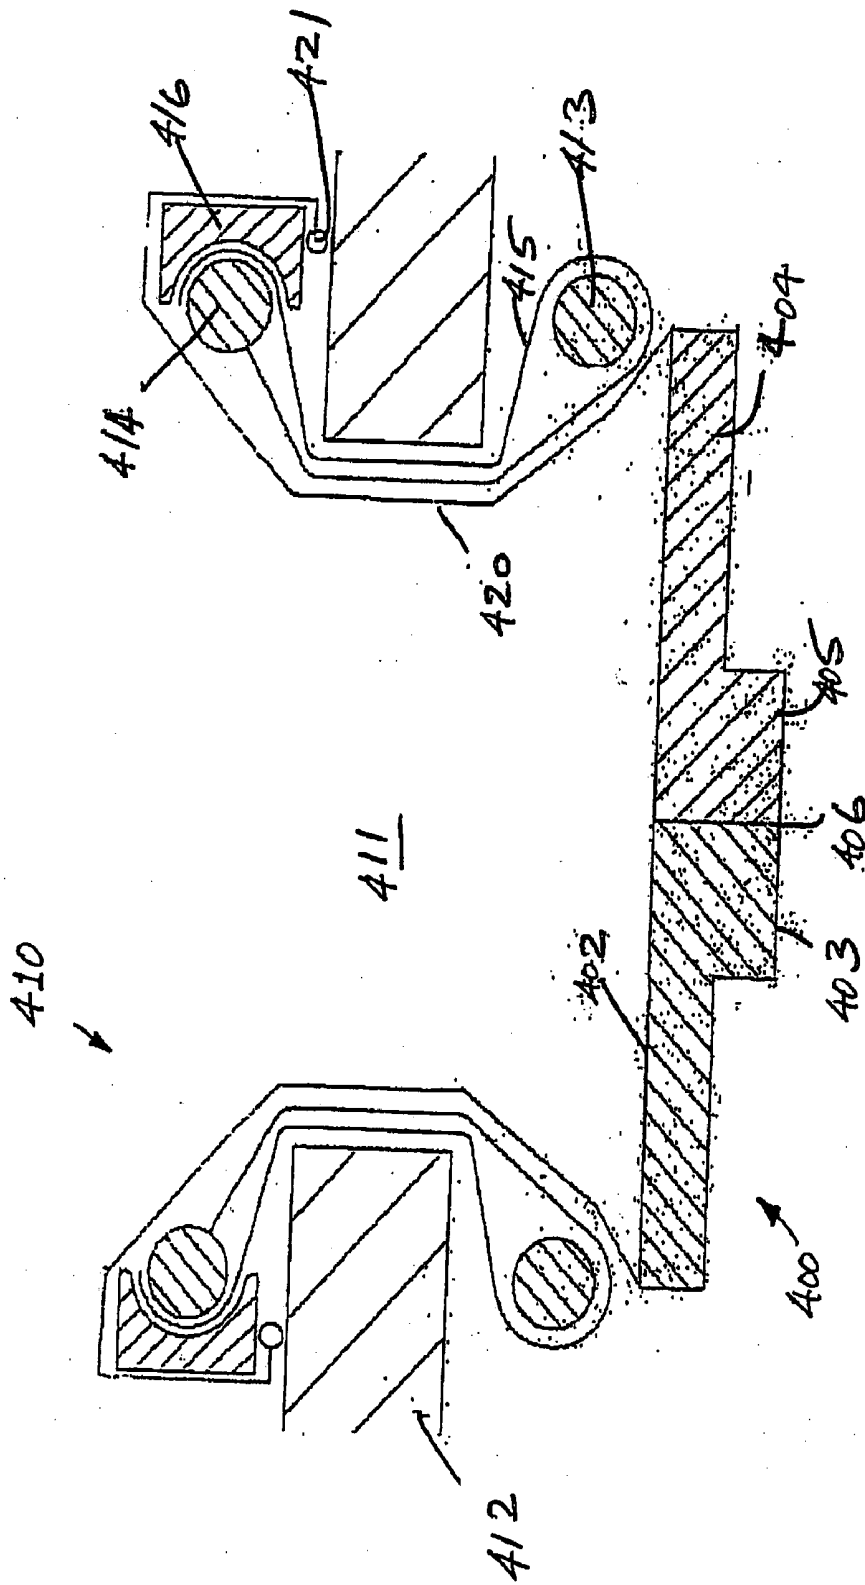


Fig. 81

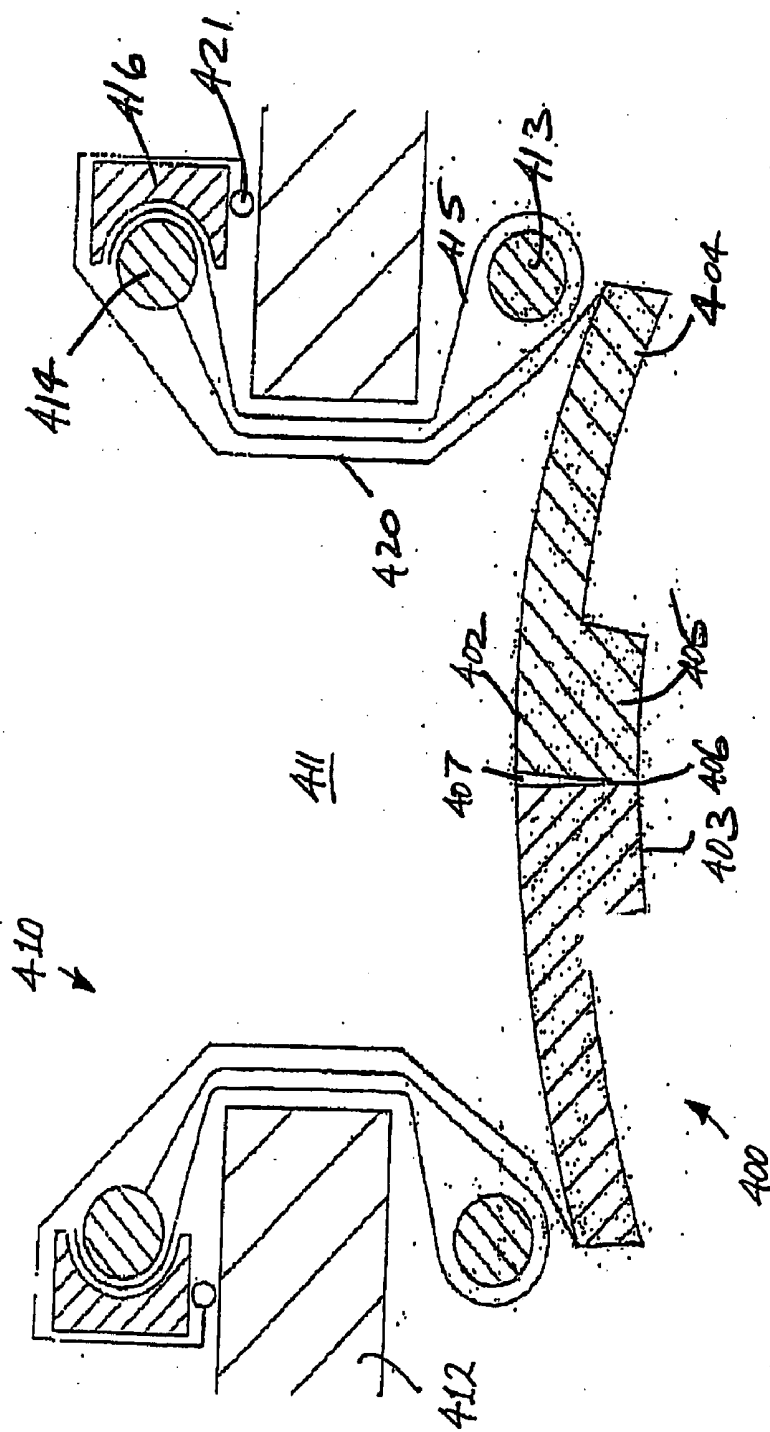


Fig. 82

SURGICAL SEALING DEVICE

[0001] This invention relates to a surgical sealing device suitable for use during a surgical procedure, especially suitable for use during laparoscopic surgery or during hand assisted laparoscopic surgery.

[0002] In carrying out a surgical procedure in the region of the abdomen, it is known to form an incision and then retract the incision to provide an access opening. The opening may be sealed with a valve in an effort to prevent insufflation gases from escaping and to maintain pneumoperitoneum. It is however difficult to provide an effective gas seal while providing access for an instrument or for a surgeon's hand.

[0003] This invention is directed towards providing a surgical sealing device, which will address these problems.

STATEMENTS OF INVENTION

[0004] According to the invention there is provided a surgical sealing device comprising:

[0005] a first sealing valve for sealing across an opening to an internal cavity;

[0006] the first sealing valve comprising a first sealing member and a second sealing member;

[0007] the sealing members being movable relative to one another between a closed configuration, in which the sealing members at least partially overlap one another, for sealing across the opening, and an open configuration for facilitating passage of an object through the first sealing valve to access the internal cavity.

[0008] In one embodiment of the invention at least one of the sealing members is at least partially of a gelatinous elastomeric material. In one case both sealing members are at least partially of a gelatinous elastomeric material. In another case the material comprises a plasticiser. The plasticiser may be selected from the group consisting of naturally derived oils, synthetic oils and liquid oligomers.

[0009] In one case the first sealing valve is biased towards the closed configuration. In one case at least one of the sealing members is of a resilient material to bias the first sealing valve towards the closed configuration.

[0010] The first sealing member and the second sealing member may define overlapping portions, which overlap with each other in the closed configuration. In one case at least the overlapping portions of the sealing members are generally planar. In another case the planes of the overlapping portions are slightly offset. In another case the overlapping portions engage with each other in the closed configuration. The engagement force is in one case overcome on insertion of an object, such as a surgeon's hand.

[0011] In another embodiment a thin slit is defined between the overlap of the first sealing member over the second sealing member.

[0012] The first sealing member may be fixedly attached to the second sealing member. In one case the first sealing member is formed integrally with the second sealing member. In another case the first sealing member is moulded integrally with the second sealing member. In one case the first sealing member comprises an overlap region, which

overlaps the second sealing member in the closed configuration, the overlap region comprising a first region attached to the second sealing member and a second region detached from the second sealing member. In one case a thin slit is defined between the second region of the first sealing member and the second sealing member. In another case the slit extends circumferentially through approximately 90°. The ratio of the radial dimension of the slit to the overall radial dimension of the entire first sealing member may be approximately 1:4, in one case approximately 1:8.

[0013] In a preferred case in the closed configuration, the second region of the first sealing member engages the second sealing member. In another case the second region of the first sealing member is biased towards engagement with the second sealing member.

[0014] The first sealing valve may be configured to be located externally of an internal cavity proximally of an opening to the internal cavity. The first sealing valve may be configured to be located within an internal cavity distally of an opening to the internal cavity.

[0015] The first sealing member is in one case substantially planar. The second sealing member is in one case substantially planar.

[0016] In a preferred embodiment the device comprises a second sealing valve for sealing around an object passed through an opening to an internal cavity.

[0017] The first sealing member may be located distally of the second sealing valve. The first sealing valve may be located proximally of the second sealing valve.

[0018] In one case the first sealing valve is longitudinally spaced apart from the second sealing valve. One sealing valve may be configured to be located externally of an internal cavity proximally of an opening to the internal cavity, and the other sealing valve may be configured to be located within the internal cavity distally of the opening.

[0019] In another case the first sealing valve is located adjacent and in close proximity to the second sealing valve. Both the first sealing valve and the second sealing valve may be located externally of an internal cavity proximally of an opening to the internal cavity. Both the first sealing valve and the second sealing valve may be located within an internal cavity distally of an opening to the internal cavity.

[0020] In one case the second sealing member provides the second sealing valve. In another case the second sealing member has a passageway extending therethrough, through which an object may be inserted to access an internal cavity. The second sealing member may be configured to effect a seal between a sidewall of the passageway and an object inserted through the passageway.

[0021] In one case, in the closed configuration, the first sealing member extends across an end of the passageway and overlaps the second sealing member around the entire periphery of the end of the passageway. In one case in the open configuration the first sealing member is retracted to reveal at least part of the end of the passageway.

[0022] The second sealing valve may comprise a lip seal valve.

[0023] In a further embodiment the device is mountable to a retractor device. In one case the device comprises a

mounting element for mounting the device to a retractor device. In another case the mounting element is fixedly attached to the sealing valve. In another case a part of the sealing valve is overmoulded around a part of the mounting element. The mounting element may comprise one or more overmould openings therein. In one case the mounting element comprises an engagement formation for snap-fit mounting of the device to a retractor device.

[0024] The mounting element may comprise a ring element.

[0025] In one case the device is configured to effect a seal between the device and a retractor device upon mounting of the device to the retractor device. In another case at least one of the sealing members is configured to engage a retractor device upon mounting.

[0026] In another embodiment the first sealing valve comprises a biasing member to bias the first sealing valve towards the closed configuration. In one case the biasing member comprises a resilient element extending between the first sealing member and the second sealing member. The resilient element may comprise a spring.

[0027] The biasing member may comprise a magnetic element on the first sealing member and a co-operating magnetic element on the second sealing member.

[0028] In another case the first sealing valve comprises a biasing member to bias the second region of the first sealing member towards engagement with the second sealing member. In one case the biasing member comprises a resilient element for tensioning the second region of the first sealing member. In another case the resilient element extends between the second region of the first sealing member and the second sealing member.

[0029] In one case the first sealing member is hingeably movable relative to the second sealing member between the closed configuration and the open configuration.

[0030] The first sealing member may be at least partially curved.

[0031] The first sealing member may be at least partially substantially spherical. The second sealing member may be substantially curved.

[0032] In the closed configuration, the first sealing member may extend at least partially into the passageway.

[0033] In another embodiment the thickness of the second sealing member varies across the width of the second sealing member. In one case the thickness of the second sealing member is at a maximum adjacent the passageway.

[0034] The passageway may define a longitudinal axis, and the passageway longitudinal axis may be configured to subtend an acute angle with a longitudinal axis defined by an opening to an internal cavity. In one case the longitudinal axis of the passageway is angled towards the second region of the first sealing member.

[0035] In another case the device comprises a closure member for closing the passageway. In one case the closure member comprises a plug.

[0036] In one embodiment the second sealing valve comprises a third sealing member having a passageway extending therethrough, through which an object may be inserted

to access an internal cavity. In one case the third sealing member is configured to effect a seal between a wall of the passageway and an object inserted through the passageway. In another case the third sealing member is at least partially of a gelatinous elastomeric material.

[0037] The second sealing valve may be at least partially inflatable. The second sealing valve may comprise an iris valve.

[0038] In a further case the device comprises a third sealing valve for sealing across an opening to an internal cavity. In one case the third sealing valve comprises a fourth sealing member, the second sealing member and the fourth sealing member being movable relative to one another between the closed configuration, in which the second sealing member and the fourth sealing member at least partially overlap one another, and the open configuration. In another case the fourth sealing member is at least partially of a gelatinous elastomeric material.

[0039] The mounting element may comprise a screw-thread formation for screw-thread mounting of the device to a retractor device.

[0040] In one case the mounting element comprises a sleeve extending proximally of the sealing valve. In one case the sleeve is hookable around a part of a retractor device to mount the device to the retractor device. The sleeve may comprise a mounting ring for hooking around a part of a retractor device.

[0041] In another aspect of the invention, there is provided a surgical sealing device comprising:

[0042] a first sealing valve for sealing across an opening to an internal cavity;

[0043] the first sealing valve having a closed configuration for sealing across the opening, and an open configuration for facilitating passage of an object through the first sealing valve to access the internal cavity; and

[0044] a second sealing valve for sealing around the object passed through the opening to the internal cavity;

[0045] at least one of the sealing valves being at least partially of a gelatinous elastomeric material.

[0046] The invention also provides in a further aspect a surgical sealing device comprising:

[0047] a first sealing valve for sealing across an opening to an internal cavity;

[0048] the first sealing valve comprising a main portion, and an access portion for facilitating passage of an object through the first sealing valve to access the internal cavity;

[0049] at least one of the portions being at least partially of a gelatinous elastomeric material.

[0050] In one embodiment the dimensions of the main portion differ from the dimensions of the access portion. In one case the thickness of the access portion is greater than the thickness of the main portion. In another case the access

portion is of substantially uniform thickness. In another case the main portion and the access portion are of the same material.

[0051] In another embodiment the material properties of the main portion differ from the material properties of the access portion. In one case the main portion and the access portion are of the same dimensions.

[0052] The access portion may comprise an accessway extending therethrough, through which an object may be inserted to access an internal cavity. In one case the accessway is defined by a slit in the access portion. In another case the accessway is biased towards a closed configuration. The accessway may be openable upon insertion of an object into the accessway. In another case the accessway is configured to effect a seal between a sidewall of the accessway and an object inserted through the accessway.

[0053] According to another aspect, the invention provides a surgical assembly comprising:

[0054] a retractor device for retracting the sides of an opening to an internal cavity; and

[0055] a surgical sealing device of the invention.

[0056] In one case the surgical sealing device is mounted to the retractor device.

[0057] The retractor device may have a distal end and a proximal end, and the surgical sealing device may be located adjacent to the distal end of the retractor device. The retractor device may have a distal end and a proximal end, and the surgical sealing device may be located adjacent to the proximal end of the retractor device.

[0058] The invention provides in another aspect a method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

[0059] providing a first sealing valve comprising a first sealing member and a second sealing member;

[0060] the sealing members having a closed configuration, in which the sealing members at least partially overlap one another, and an open configuration;

[0061] arranging the first sealing valve, with the sealing members in the closed configuration, to seal across the opening;

[0062] passing an object through the first sealing valve to cause the sealing members to move from the closed configuration to the open configuration; and

[0063] passing the object through the opening to access the internal cavity.

[0064] In one embodiment of the invention the method comprises the step of biasing the first sealing valve towards the closed configuration.

[0065] The first sealing valve may be arranged within the opening. In one case the first sealing valve is arranged externally of the internal cavity proximally of the opening. In another case the first sealing valve is arranged within the internal cavity distally of the opening.

[0066] In a preferred case the method comprises the steps of:

[0067] providing a second sealing valve; and

[0068] arranging the second sealing valve to seal around the object passing through the opening.

[0069] The second sealing valve may be arranged proximally of the first sealing valve.

[0070] The second sealing valve may be arranged within the opening. The second sealing valve may be arranged externally of the internal cavity proximally of the opening. The second sealing valve may be arranged within the internal cavity distally of the opening.

[0071] In another case the second sealing valve has a passageway extending therethrough, and the method comprises the step of inserting the object through the passageway to access the internal cavity. In one case the method comprises the step of effecting a seal between a sidewall of the passageway and the object.

[0072] The method may comprise the step of retracting the sides of the opening to the internal cavity. In one case the method comprises the step of mounting the sealing valve to a retractor device. In another case the method comprises the step of effecting a seal between the sealing valve and the retractor device. The object passed through the opening may comprise a surgeon's hand and/or forearm. The object passed through the opening may comprise a surgical instrument.

[0073] In one case the second sealing valve is arranged distally of the first sealing valve.

[0074] The method may comprise the step of closing the passageway.

[0075] In another embodiment the method comprises the step of at least partially inflating the second sealing valve to seal around the object. In a further embodiment the method comprises the step of twisting the second sealing valve to seal around the object.

[0076] The invention also provides in another aspect a method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

[0077] providing a first sealing valve having a closed configuration and an open configuration, and a second sealing valve;

[0078] at least one of the sealing valves being at least partially of a gelatinous elastomeric material;

[0079] arranging the first sealing valve in the closed configuration to seal across the opening;

[0080] passing an object through the first sealing valve to cause the first sealing valve to move from the closed configuration to the open configuration;

[0081] passing the object through the opening to access the internal cavity; and

[0082] arranging the second sealing valve to seal around the object passing through the opening.

[0083] In a further aspect of the invention there is provided a method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

- [0084] providing a sealing valve comprising a continuous sealing member;
- [0085] arranging the sealing valve to seal across the opening;
- [0086] creating a passageway through the continuous sealing member in-situ by passing an object through the sealing member; and
- [0087] passing the object further through the sealing member to access the internal cavity.
- [0088] In one embodiment the sealing member is at least partially of a gelatinous elastomeric material.
- [0089] In one case the object comprises a laparoscopic instrument.
- [0090] The object may comprise a sharp distal tip for piercing the sealing member.
- [0091] In one case the passageway created through the sealing member comprises a pinhole through the sealing member.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0092] The invention will be more clearly understood from the following description of some embodiments thereof, given by way of example only, with reference to the accompanying drawings, in which:—
- [0093] FIG. 1 is a perspective view from above of a surgical sealing device according to the invention;
- [0094] FIG. 2 is a perspective view from below of the device of FIG. 1;
- [0095] FIG. 3 is a plan view from above of the device of FIG. 1;
- [0096] FIG. 4 is a side view in the direction of arrow A in FIG. 3;
- [0097] FIG. 5 is a view along line V-V in FIG. 3;
- [0098] FIG. 6 is a view along line VI-VI in FIG. 3;
- [0099] FIG. 7 is a partially cross sectional, side view of the device of FIG. 1, in use;
- [0100] FIG. 8 is a partially cross-sectional, side view of the device of FIG. 1 mounted to a retractor device;
- [0101] FIG. 9 is a perspective view of a mounting element for the device of FIG. 1;
- [0102] FIG. 10 is a cut-away, perspective view of the mounting element of FIG. 9;
- [0103] FIG. 11 is a cross-sectional, side view of the device of FIG. 1 and the mounting element of FIG. 9;
- [0104] FIG. 12 is a cut-away, perspective view of the device of FIG. 1 and the mounting element of FIG. 9;
- [0105] FIG. 13 is a cross-sectional, side view of the device of FIG. 1 and the mounting element of FIG. 9 mounted to a retractor device;
- [0106] FIG. 14 is a perspective view illustrating mounting of the device of FIG. 1 and another mounting element to another retractor device;
- [0107] FIG. 15 is a cross-sectional, side view of another surgical sealing device according to the invention;
- [0108] FIG. 16 is a perspective view of a part of the device of FIG. 15;
- [0109] FIGS. 17 to 21 are cross-sectional, side views of other surgical sealing devices according to the invention;
- [0110] FIGS. 22 and 23 are plan views from above of further surgical sealing devices according to the invention;
- [0111] FIGS. 24 and 25 are perspective views of another surgical sealing device according to the invention;
- [0112] FIG. 26 is a cross-sectional, side view of the device of FIG. 25;
- [0113] FIG. 27 is a perspective view of another surgical sealing device according to the invention;
- [0114] FIG. 28 is a perspective view of a further surgical sealing device according to the invention;
- [0115] FIG. 29 is a side view of the device of FIG. 28;
- [0116] FIG. 30 is a plan view of the device of FIGS. 28 and 29 with an object, such as a surgeon's arm, in position;
- [0117] FIG. 31 is a perspective view of a surgical sealing device according to the invention;
- [0118] FIG. 32 is plan view of the device of FIG. 31;
- [0119] FIG. 33 is a cross sectional, side view of the device of FIG. 31;
- [0120] FIGS. 34 and 35 are partially cross sectional, side views illustrating the device of FIGS. 31 to 33, in use;
- [0121] FIGS. 36 and 37 are cross sectional, side views of other surgical sealing devices according to the invention;
- [0122] FIG. 38 is a perspective view of a lip seal used in some aspects of the invention;
- [0123] FIGS. 39 and 40 are cross sectional, side views of another surgical sealing device according to the invention incorporating a distal overlap valve and a proximal lip seal;
- [0124] FIG. 41 is a partially cross sectional, side view of the device of FIGS. 39 and 40, in use;
- [0125] FIG. 42 is a cross sectional, side view of another surgical sealing device according to the invention mounted to a retractor device;
- [0126] FIG. 43 is a partially cross sectional, side view of the device of FIG. 42, in use;
- [0127] FIG. 44 is a cross sectional, side view of another surgical sealing device according to the invention with a distal overlap valve and a lip seal located proximally adjacent to the overlap valve;
- [0128] FIG. 45 is a partially cross sectional, side view of the device of FIG. 44, in use;
- [0129] FIG. 46 is a cross sectional, side view of another surgical sealing device according to the invention with a lip seal and an overlap valve located proximally of a retractor device;
- [0130] FIG. 47 is a cross sectional, side view of another surgical sealing device according to the invention with an overlap valve incorporating a lip seal;

[0131] FIG. 48 is a partially cross sectional, side view of the device of FIG. 47, in use;

[0132] FIG. 49 is a cross sectional, side view of a further surgical sealing device according to the invention incorporating a secondary valve;

[0133] FIGS. 50 to 53 are partially cross sectional, side views of the device of FIG. 49, in use;

[0134] FIG. 54 is a plan view of the secondary valve of the device in the configuration of FIG. 53;

[0135] FIG. 55 is a cross sectional, side view of another surgical sealing device according to the invention mounted to a retractor device;

[0136] FIG. 56 is a partially cross sectional, side view of the device of FIG. 55, in use;

[0137] FIG. 57 is a cross sectional, side view of another surgical sealing device according to the invention in one configuration of use;

[0138] FIG. 58 is a cross sectional, side view of the device of FIG. 57 in another configuration of use;

[0139] FIG. 59 is a partially cross sectional, side view of the device of FIGS. 57 and 58 with a hand inserted;

[0140] FIG. 60 is a cross sectional, side view of another surgical sealing device according to the invention mounted to a retractor device;

[0141] FIG. 61 is a cross sectional, side view of another surgical sealing device according to the invention mounted to a retractor device;

[0142] FIG. 62 is a perspective view of a secondary valve of the device of FIG. 61;

[0143] FIG. 63 is an exploded, perspective view of another surgical sealing device according to the invention;

[0144] FIG. 64 is a cross-sectional, side view of the device of FIG. 63;

[0145] FIGS. 65 to 67 are perspective views from below of further surgical sealing devices according to the invention;

[0146] FIG. 68 is a plan view from below of the device of FIG. 67;

[0147] FIG. 69 is a cross-sectional, side view of another surgical sealing device according to the invention;

[0148] FIG. 70 is a partially cross-sectional, side view of the device of FIG. 69, in use;

[0149] FIG. 71 is a partially cross-sectional, side view of a further surgical sealing device according to the invention;

[0150] FIG. 72 is a perspective view from below of the device of FIG. 71;

[0151] FIG. 73 is a partially cross-sectional, side view of another surgical sealing device according to the invention;

[0152] FIG. 74 is a partially cross-sectional, side view of the device of FIG. 73, in use;

[0153] FIG. 75 is a plan view from above of a further surgical sealing device according to the invention;

[0154] FIG. 76 is a plan view from below of the device of FIG. 75;

[0155] FIG. 77 is a cross sectional, side view of the device of FIGS. 75 and 76 in one configuration of use;

[0156] FIG. 78 is a cross-sectional, side view of the device of FIGS. 75 and 76 in another configuration of use;

[0157] FIGS. 79 and 80 are cross sectional, side views illustrating the device of FIGS. 75 to 78 in use; and

[0158] FIGS. 81 and 82 are cross sectional, side views illustrating another use of the device of FIGS. 75 to 78.

DETAILED DESCRIPTION

[0159] Referring to the drawings and initially to FIGS. 1 to 8 thereof, there is illustrated a surgical sealing device 1 according to the invention, which is suitable for use during a surgical procedure, such as a laparoscopic procedure or a hand-assisted laparoscopic procedure.

[0160] The device 1 may in the case of a laparoscopic procedure be employed to effect a seal around a laparoscopic instrument inserted through the device 1 into an abdomen to maintain insufflation gas pressure within the abdomen. In the case of a hand-assisted laparoscopic procedure, the device 1 may be employed to effect a seal around a surgeon's hand or forearm inserted through the device 1 into the abdomen to maintain insufflation gas pressure within the abdomen.

[0161] The device 1 comprises a planar first sealing member 5 and a planar second sealing member 6. The second sealing member 6 has a passageway 2 extending there-through through which an object, such as a laparoscopic instrument or a surgeon's hand/forearm 3, may be inserted to access an interior space, such as an insufflated abdomen 4. The planar first sealing member 5 may be employed to seal the passageway 2.

[0162] In this case, the first sealing member 5 is provided in the form of a flap member of an elastic material. The flap member 5 is movable relative to the second sealing member 6 between a closed configuration sealing the passageway 2 (FIG. 5), and an open configuration to facilitate insertion of an object, such as the surgeon's forearm 3 through the passageway 2 to access the abdomen 4 (FIG. 7). In the closed configuration, the flap member 5 extends across the distal end of the passageway 2 and overlaps the entire periphery of the distal end of the passageway 2 to prevent leakage of the insufflation gas out of the abdomen 4. The insufflation gas pressure within the abdomen 4 forces the flap member 5 into engagement with the second sealing member 6 in the closed configuration. In the open configuration, the flap member 5 is retracted to reveal the distal end of the passageway 2 to enable an object, such as the surgeon's hand/forearm 3 to pass through the sealing device 1 and into the abdomen 4. In this manner the flap member 5 defines an overlap seal. Insertion of the object, such as the hand/forearm 3 through the passageway 2 pushes against the flap member 5 to cause retraction of the flap member 5.

[0163] In this case the first sealing member 5 and the second sealing member 6 are formed integrally, in this case moulded integrally. In the closed configuration, the first sealing member 5 overlaps the second sealing member 6 around the entire periphery of the distal end opening of the passageway 2. In this region of overlap, the first sealing

member 5 is fixedly attached to the second sealing member 6 at an attachment region 7, and is detached from the second sealing member 6 at a detachment region 8. As illustrated in FIGS. 2 to 6, the detachment region 8 is in the form of a very thin slit or gap. The slit/gap 8 extends circumferentially through approximately 90°, and has a radial dimension approximately ¼ of the radial width of the first sealing member 5, and approximately ⅓ of the radial width of the second sealing member 6. In the closed configuration, the insufflation gas pressure within the abdomen 4 forces the detachment region 8 to engage against the second sealing member 6 around the distal end of the passageway 2. This results in the thin slit/gap being closed down to prevent leakage of insufflation gas out of the abdomen 4.

[0164] Because the region 8 is detached from the second sealing member 6, this arrangement enables the region 8 to be retracted when an object is inserted through the passageway 2, which results in the slit/gap becoming large enough for the object to exit the passageway 2 and access the abdomen 4. As the object passes through the passageway 2, the object engages the region 8 and forces the region 8 aside. In this manner, the region 8 is retracted.

[0165] Because the first sealing member 5 and the second sealing member 6 overlap in the closed configuration, a seal is created across the wound opening which prevents loss of insufflation gases from the abdomen 4. The overlapping first and second sealing members 5, 6 thus provide a first sealing valve for sealing across the wound opening.

[0166] The elastic biasing nature of the flap member 5 biases the flap member 5 towards the closed configuration to prevent leakage of insufflation gas out of the abdomen 4, when the surgeon withdraws the object, such as the hand/forearm 3 out of the abdomen 4. In particular the resilience of the material of the flap member 5 biases the flap member 5 towards the closed configuration. In addition, the gas pressure within the abdomen 4 acts on the flap member 5 to force the flap member 5 towards the closed configuration.

[0167] The sidewall of the passageway 2 is of an elastic material, and the passageway 2 typically has a smaller diameter than an object to be inserted therethrough. The material defining the passageway 2 thus creates a seal between the sidewall of the passageway 2 and the object, defining an interference fit between the sidewall and the object (FIG. 7). In this manner, the passageway 2 through the second sealing member 6 acts as a second sealing valve to seal around the object while the object is inserted through the passageway 2 and into the abdomen 4. In particular the passageway 2 acts as a lip seal. Thus leakage of insufflation gas out of the abdomen 4 while the object is inserted through the passageway 2 and into the abdomen 4 is prevented.

[0168] In the case of laparoscopic surgery, the passageway 2 is sized to seal around a laparoscopic instrument inserted therethrough. The passageway 2 may therefore be sized as a pinhole through the second sealing member 6. In certain cases, the second sealing member 6 may be formed with no hole therethrough, and the passageway 2 may be created in-situ by the surgeon piercing the second sealing member 6 with the instrument and forcing the instrument through the second sealing member 6.

[0169] In the case of hand-assisted laparoscopic surgery, the passageway 2 is sized to seal around a hand or forearm of the surgeon.

[0170] As illustrated in FIG. 7, the first sealing overlap valve provided by the flap member 5 is located longitudinally distally of the second sealing lip seal valve provided by the passageway 2.

[0171] However it will be appreciated that the first sealing valve may alternatively be provided proximally of the second sealing valve.

[0172] The sealing device 1 may be mounted to a wound retractor device 10, as illustrated in FIG. 8. The mounting may be in any convenient manner such as a releasable mounting using a bayonet type mounting or the like as will be described in more detail below. The gas pressure within the abdomen 4, after insufflation, pushes up on the first sealing member 5, causing the first sealing member 5 to engage against the second sealing member 6 to maintain pneumoperitoneum.

[0173] The device 1 is in this case a combined overlap/lipseal valve for hand assisted laparoscopy (HALS).

[0174] The device 1 may be a single piece moulded gel component. The first and second sealing members 5, 6 are both formed of a gel material. The gel material may include an elastomer, such as silicone or latex. The gel material may also include an oil, and/or a foam.

[0175] In one embodiment the device 1 is of a gelatinous elastomeric material. An extensive review of gelatinous elastomeric materials is included in U.S. Pat. No. 5,994,450 (Pierce), the entire contents of which are incorporated herein by reference. One such group of gelatinous elastomers may comprise a triblock copolymer A-B-A wherein A is selected from the group consisting of monoalkenylarene polymers and B is a hydrogenated polymer including a plurality of isoprene monomers and a plurality of butadiene monomers. The material includes a plasticiser which may be selected from the group consisting of naturally derived oils, synthetic oils and liquid oligomers. For the device of this embodiment of the invention the gelatinous elastomeric material is formulated to have high tear strength and high flexibility.

[0176] The materials required to form a suitable gel material are available, for example, from the company Edizone L.C. of Utah, USA. The gel material preferably has the properties of high tear strength to resist tearing of the attachment of the first sealing member 5 to the second sealing member 6, and high flexibility to enable the first sealing member 5 to be retracted for passage of an object through the passageway 2 into the abdomen 4.

[0177] During moulding, a thin plate is located between the first sealing member 5 and the second sealing member 6. This thin plate prevents the first sealing member 5 being fully moulded to the second sealing member 6. As a result the first sealing member 5 is moulded to the second sealing member 6 at a first region which is the attachment region 7, and remains un-moulded to the second sealing member 6 at a second region which is the detachment region 8. This thin plate defines the thin slit/gap 8 between the sealing members 5, 6.

[0178] In certain applications the device may alternatively be formed as a single piece moulded rubber or elastomeric component.

[0179] There is a lipseal hole 2 through which an object, such as hand can pass, due to the highly elastic nature of the

material. An overlap flap 5 is integrally moulded underneath, and covering, the lipseal hole 2. The overlap flap 5 is essentially joined to/integral with the main body of the lipseal apart from a slit which in this case extends radially. Because of the elastic nature of the material, the object, such as the hand can displace the overlap flap 5 and push through the slit. In use, the slit is closed by the gas pressure acting upwardly on the flap 5. On insertion of an object the slit can be opened just sufficiently to allow the object to pass therethrough with no substantial loss of gas pressure. The lipseal 2 now seals to the object, such as the surgeon's wrist, maintaining pneumoperitoneum. When the object, such as the hand/forearm 3 is removed, the overlap flap 5 returns to its original position blocking the lipseal hole 2.

[0180] In the case where the surgical sealing device of the invention is employed during laparoscopic surgery, the second sealing member 6 may alternatively be formed as a continuous single block of gel with no passageway extending therethrough. When the device is mounted across a wound opening sealing the opening, the surgeon may pierce the second sealing member 6, for example with a laparoscopic instrument having a sharp distal tip to create the passageway through the second sealing member 6 in situ by pushing the instrument through the second sealing member 6.

[0181] FIGS. 9 and 10 illustrate a mounting ring 20 suitable for use when mounting the device 1 of FIGS. 1 to 8 to a wound retractor device. A wound retractor device is typically employed to retract the sides of a wound opening to the abdomen 4. The ring 20 is sufficiently rigid to enable the device 1 to be mounted to the retractor device in a stable manner.

[0182] The ring 20 includes a series of oblong openings or slots 21 therein, in both the vertical and horizontal planes. The slots 21 assist in obtaining a secure attachment of the device 1 to the ring 20 (FIGS. 11 and 12).

[0183] One method of attaching the device 1 to the ring 20 is by overmoulding a part of the second sealing member 6 around parts of the ring 20. The slots 21 thus provide pathways for the second sealing member 6 to mould around parts of the ring 20 to fixedly attach the device 1 to the ring 20.

[0184] Because the first and second sealing members 5, 6 are moulded integrally, the process of moulding the device 1 and attaching the device 1 to the ring 20 may be performed in a single moulding step.

[0185] It will be appreciated that the device 1 may be fixedly attached to the mounting ring 20 in a variety of possible alternative ways. For example, the device 1 may be securely attached to the ring 20 using an adhesive or any other suitable fixing means.

[0186] The ring 20 includes a downwardly extending rim 22 having an inwardly protruding engagement lip 23. The lip 23 is particularly suitable for mounting the ring 20 and the overmoulded device 1 to a retractor device in a snap-fit manner. For example, in the case of the wound retractor device 27 of FIG. 13, the retractor device 27 has a co-operating outwardly extending ledge 28 for snap-fit mounting of the ring 20 and overmoulded device 1 to the wound retractor device 27.

[0187] As illustrated in FIG. 13, the second sealing member 6 protrudes distally to engage the wound retractor device 27, when the ring 20 and overmoulded device 1 are mounted to the retractor device 27. This arrangement creates a gas-tight seal between the device 1 and the wound retractor device 27, and thus acts as a further means of preventing loss of insufflation gases.

[0188] The mounting ring may be mounted to a wound retractor device in any suitable manner. For example, screw-thread formations 31 may be provided on the ring 30, and co-operating screw-thread formations 33 may be provided on the wound protector device 32, as illustrated in FIG. 14, for screw-thread mounting of the ring 30 and overmoulded device 1 to the retractor device 32.

[0189] In FIGS. 15 and 16, there is illustrated another surgical sealing device 40 according to the invention, which is similar to the device 1 of FIGS. 1 to 8, and similar elements in FIGS. 15 and 16 are assigned the same reference numerals.

[0190] In this case, the first sealing member 5 includes a hemispherical portion 41. In the closed configuration, the hemispherical portion 41 extends partially into the passageway 2 to achieve a particularly effective seal.

[0191] To ensure that the first sealing member 5 engages the second sealing member 6 around the entire periphery of the distal end of the passageway 2 in the closed configuration, the thickness of the second sealing member 6 may vary across the width of the second sealing member 6. A variety of possible configurations for the second sealing member 6 are illustrated in FIGS. 17 to 19. By arranging for the thickness of the second sealing member 6 to be at a maximum adjacent the passageway 2, the sealing effect may be enhanced.

[0192] By arranging for the proximal side of the second sealing member 6 to curve proximally away from the distal end of the passageway 2 (FIGS. 18 and 19), it has been found to result in a better sealing arrangement in certain clinical applications. The first sealing member 5 is also curved in these cases to mate with the curved second sealing member 6 in the closed configuration (FIGS. 18 and 19).

[0193] In the embodiments of FIGS. 17 and 18, the raised material of the second sealing member 6 puts weight on the overlapping first sealing member 5 to maintain an effective seal. The curved/domed surfaces of the first sealing member 5 and the second sealing member 6 improve the sealing in FIG. 19.

[0194] The passageway 2 may be arranged so that the passageway longitudinal axis A-A subtends an acute angle with the longitudinal axis B-B of the wound opening, and the passageway 2 is angled towards the detachment region 8, as illustrated in FIG. 20.

[0195] In this manner, the passageway 2 effectively guides the instrument or surgeon's hand in the direction of the detachment region 8 of the first sealing member 5. This assists in a faster and smoother insertion through the passageway 2 and retraction of the first sealing member 5.

[0196] An additional sealing member 50 may be provided integrally moulded with the second sealing member 6, as illustrated in FIG. 21. This fourth sealing member 50 is similar to the first sealing member 5, and is also provided in

the form of an overlapping flap. In the closed configuration, the fourth sealing member **50** overlaps the entire periphery of the proximal opening of the passageway **2**. In this manner, the overlap of the fourth sealing member **50** over the second sealing member **6** creates a third sealing valve to achieve a gas-tight seal across the wound opening. The fourth sealing member **50** is movable relative to the second sealing member **5** from the closed configuration to the open configuration to facilitate insertion of an instrument or a surgeon's hand into the passageway **2**.

[0197] In this case, the fourth sealing member **50** is of the same gelatinous elastomeric material as the first and second sealing members **5**, **6**, and may be integrally formed.

[0198] A biasing member may be provided to bias the first sealing member **5** towards the closed configuration. For example, FIG. 22 illustrates a "U"-shaped resilient leaf-spring member **60** for tensioning the detachment region **8** of the first sealing member **5** in the plane of the first sealing member **5**. By tensioning in this plane, the leaf-spring **60** biases the detachment region **8** of the first sealing member **5** into engagement with the second sealing member **6**. In this manner, an effective seal may be achieved.

[0199] FIG. 23 illustrates an alternative resilient biasing member. In this case two springs **61**, **62** are provided extending between the detachment region **8** of the first sealing member **5** and the second sealing member **6** to tension the first sealing member **5** in the plane of the first sealing member **5**.

[0200] FIGS. 24 to 26 illustrate another surgical sealing device **70** according to the invention, which is similar to the device **1** of FIGS. 1 to 8, and similar elements in FIGS. 24 to 26 are assigned the same reference numerals.

[0201] In this case, the device **70** comprises a plug **71** for insertion into the passageway **2** to close the passageway **2**. By closing the passageway **2** with the plug **71**, this acts as a further seal to prevent loss of insufflation gases, for example during initial insufflation of the abdomen **4**.

[0202] The plug **71** is attached by means of a cord to the second sealing member **6**.

[0203] Referring now to FIG. 27 there is illustrated another surgical sealing device **150** according to the invention. In this case the device **150** has an overlap valve defined by a first sealing member **153** partially overlapping a second sealing member **152**. The properties of the elastomeric material of the device **150**, such as the sealing members **152**, **153**, is such as to closely surround an inserted object. Thus, there is substantially no leakage path between the inserted object and the valve body. Consequently, the device **150** may be used without the necessity for another valve, there being sufficient sealing engagement between the sealing members **152**, **153** and the inserted object to substantially prevent insufflation gas leakage.

[0204] Referring to FIGS. 28 to 30, there is illustrated another surgical sealing device **200** according to the invention. The device **200** is formed from a highly elastomeric material, such as a silicone based gel. The first sealing member **202** and the second sealing member **203** have relatively thin outer portions. At the attachment region **201**, the sealing members **202**, **203** have a relatively thick central portion. The central portion has a detachment region slit **205**

therein which extends obliquely with respect to the axis of an incision to provide enhanced sealing between the marginal edge of the accessway defined by the slit **205** and an object passing therethrough, as illustrated in FIG. 30. The valve in this case has high elasticity to comply with an object passing therethrough, and a secondary valve may therefore not be required.

[0205] Referring to FIGS. 31 to 35, there is illustrated a surgical sealing device **101** according to the invention for use in a surgical procedure, such as laparoscopic surgery or hand assisted laparoscopic surgery. The device **101** comprises a first sealing member **102** and a second sealing member **103** which have a normally closed configuration (FIGS. 33 and 34) and an open configuration (FIG. 35). The sealing members **102**, **103** extend across an opening, such as a retracted incision, and partially overlap each other in the closed configuration (FIG. 34). The sealing members **102**, **103** are movable on insertion of an object, such as a surgeon's hand/forearm **105**, to facilitate access between the sealing members **102**, **103** (FIG. 35).

[0206] The sealing members **102**, **103** have respective overlapping portions **106**, **107** which overlap with each other in the closed configuration. The sealing members **102**, **103** are generally planar, with the planes of the overlapping portions **106**, **107** being slightly offset. The overlapping portions **106**, **107** are at least partially engaged with one another in the closed configuration. In this case, the sealing members **102**, **103** are of a resilient and elastomeric sheet material such as rubber, silicone or latex. The engagement force between the overlapping portions **106**, **107** is overcome by the insertion of an object, such as a surgeon's hand.

[0207] In this case the sealing members **102**, **103** are each mounted to a mounting ring in the form of an O-ring **110**. A sleeve **112** extends proximally from the mounting O-ring **110**.

[0208] Referring to FIG. 36 there is illustrated another surgical sealing device **120**, in which parts similar to the device **101** of FIGS. 31 to 35 are identified by the same reference numerals.

[0209] The sealing members **102**, **103** are, in this case, of an elastic material such as a gel, neoprene, rubber or silicone which may optionally have facings **121**, **122** on the non-engaged side. Indeed, there may be a facing on the engaged side to enhance the engagement. In this case, the facings may have some adhesive or tackiness properties.

[0210] Referring to FIG. 37, in this case, a surgical sealing device **130** has magnets **131**, **132** situated in the overlap portions **106**, **107** respectively to enhance engagement between the sealing members **102**, **103** to maintain the seal in the closed configuration. The co-operating magnetic elements **131**, **132** act as biasing members to bias the device **130** towards the closed configuration.

[0211] Referring to FIG. 38 there is illustrated a third sealing member **1000**, in this case in the form of a lip seal type valve **1000** which may be used as a second sealing valve. The lip seal **1000** has a passageway extending therethrough, through which an object may be inserted. The passageway effects a seal between the sidewall of the passageway and the object inserted therethrough. The lip seal valve **1000** may be located distal to or within the first sealing valve, such as an overlap valve **1100**. The overlap

valve **1100** may be of any of the types described above, and like parts are assigned the same reference numerals.

[0212] Referring to FIGS. **39** to **41**, the overlap valve **1100** is located just inside an incision. The valve **1100** is coupled to a retractor located in the incision at a surgical site, such as in an abdominal wall **141**.

[0213] The retractor may be of any suitable construction such as the retractors described in our US patent application published under No. 2001/0037053A, and/or U.S. Pat. No. 6,582,364, and/or U.S. patent application Ser. No. 10/678,653, the whole contents of which are incorporated herein by reference.

[0214] In this case, the retractor has a distal ring **142** and a proximal ring **143** with a retracting sleeve **144** extending therebetween, as illustrated. The retractor also has a proximal guide or mounting ring **145**. In this case, the proximal ring **143** is located in a recess in the guide-mounting ring **145**, however various other constructions are possible. The valve sleeve **112** is mounted to the retractor, in this case to the mounting ring **145**. The distal end of the valve sleeve **112** has a reinforcing mounting ring **146** to facilitate coupling, as shown. In particular the reinforcing ring **146** may be hooked around the mounting ring **145** to mount the device **1100** to the retractor.

[0215] The lip seal **1000** is attached to the mounting ring **45** of the retractor.

[0216] Referring to FIGS. **42** and **43**, there is illustrated another surgical assembly similar to that of FIGS. **39** to **41**, and like parts are identified by the same reference numerals. In this case, the second sealing valve is provided by a lip seal valve **160**. The lip seal **160** may be of any suitable material such as silicone, gel or rubber.

[0217] The first sealing overlap valve **1100** is located within the abdomen distally of the wound opening, and the second sealing lip seal valve **160** is located externally of the abdomen proximally of the wound opening. As illustrated, the first sealing valve **1100** is longitudinally spaced apart from the second sealing valve **160**.

[0218] Referring to FIGS. **44** and **45**, there is illustrated another surgical assembly according to the invention, which is similar to the assembly of FIGS. **39** to **41**, and similar elements in FIGS. **44** and **45** are assigned the same reference numerals.

[0219] In this case, the second sealing valve lip seal **1000** is located just proximal of, adjacent and in close proximity to the first sealing overlap valve **1100**. The lip seal **1000** may be attached to the mounting ring **110** of the overlap valve **1100**. One advantage of this arrangement is the very low profile of the device. Both the first sealing valve **1100** and the second sealing valve **1000** are located, in use, within the abdomen distally of the wound opening, and adjacent to the distal end of the wound retractor device.

[0220] Referring to FIG. **46**, in this case the retractor has an outer mounting ring **180** of the type described above with reference to FIGS. **39** to **41**. The second sealing lip seal valve **1000** is attached to the mounting ring **110** of the first sealing overlap valve **1100** which in turn is located in an outer recess **183** of the mounting ring **180**.

[0221] The first sealing valve **1100** is located adjacent and in close proximity to the second sealing valve **1000**. Both the

first sealing valve **1100** and the second sealing valve **1000** are located, in use, externally of the abdomen proximally of the wound opening, and adjacent to the proximal end of the wound retractor device.

[0222] As an alternative, one or both of the sealing valves may be located within the wound opening.

[0223] In FIGS. **47** and **48**, the second sealing valve lip seal **1000** is located within the first sealing overlap valve **1100**. The body of the lip seal **1000** is located between the flaps **102**, **103** of the overlap valve **1100**. This device has a particularly low profile.

[0224] Referring to FIG. **49** to **54**, there is illustrated another surgical sealing device **251** comprising a first sealing overlap valve of the type described above.

[0225] The mounting ring **145** provides a platform for mounting a second sealing valve **250**, such as an iris-type valve to the retractor **140**. In this case, the valve **250** may be regarded as a primary valve and the overlap valve as a secondary valve.

[0226] In use, the space beneath the abdominal wall **141** is insufflated. The primary valve **250** is normally closed and is opened for insertion of an object, such as a laparoscopic instrument or a surgeon's hand/forearm **105**. On opening of the valve **250** the secondary overlap valve holds back the pressure of the gas inside the abdomen (FIG. **52**). When the valve **250** has engaged around the surgeon's forearm **105** (FIG. **53**), the primary valve **250** provides a seal preventing gas leakage between the surgeon's forearm **105** and the valve **250**. The surgeon can then readily open the secondary seal of the overlap valve whilst maintaining pneumoperitoneum. Thus, sealed access is provided without substantial gas leakage from the abdominal cavity. It will be noted, especially from FIG. **54** that the secondary overlap valve, in this case, does not tightly seal around the surgeon's arm **105** but rather there are leak paths **149** between the arm **105** and the sealing members **102**, **103**. Gas leakage is held back by the sealed primary valve **250**.

[0227] The valve system of the invention is easy to use by a surgeon and yet avoids substantial gas leakage. Because the valve **250** is sealed to a surgeon's arm, the secondary overlap valve can be readily and safely opened to allow access into the abdominal cavity. The secondary overlap valve provides an effective seal against gas leakage while a surgeon seals his arm to the primary valve **250**. Upon opening of the secondary overlap valve, the primary valve **250** then provides the primary seal against gas leakage.

[0228] In this case, the sealing members **102**, **103** are of a gel material. However it will be appreciated that the sealing members **102**, **103** may alternatively be provided in the form of any suitable elastic material, for example neoprene.

[0229] Referring to FIGS. **55** and **56**, there is illustrated another surgical assembly similar to that of FIGS. **49** to **54**. In this case the second sealing valve is an inflatable valve **165**, which may be of the type described in our U.S. Pat. No. 6,578,577, the whole contents of which are incorporated herein by reference. The valve **165** is in this case mounted to the retractor base by a mounting sleeve **166** having a reinforcing ring **167** which may be hooked over the mounting ring **145**. Other mounting arrangements are possible. This type of inflatable valve/seal provides for easy and rapid hand insertion and withdrawal.

[0230] Referring to FIGS. **57** to **59**, there is illustrated another surgical assembly which is similar to that of FIGS.

55 and 56. In this case the second sealing valve **170** is inflatable. The valve **170** has an attachment ring **171** for attachment to a mounting ring **172** of the retractor. In this case the attachment ring **172** has a recess **173** to accommodate the attachment ring **171** of the valve **170**. In **FIG. 57**, an access channel **177** through the valve **170** is illustrated in a closed sealing configuration. In **FIGS. 58 and 59**, the access channel **177** has been opened to sealingly engage a surgeon's arm **105** extending therethrough.

[0231] In some of the described embodiments above the first sealing overlap valve is located adjacent to a distal end of the incision. It is also possible to provide the first sealing overlap valve externally of the abdomen proximally of the wound opening. For example, as illustrated in **FIG. 60**, a retractor may have a mounting ring **280**, and the mounting ring **110** of the first sealing overlap valve **281** may be mounted to the mounting ring **280**, for example by engagement in a recess **283** in the mounting ring **280**, as illustrated. In this case, a valve sleeve is not necessary.

[0232] Various other mounting arrangements are possible. For example, as illustrated in **FIGS. 61 and 62**, the first sealing overlap valve **190** may be mounted by hooking over the distal ring **142** of the retractor. In this case, the valve **190** has a cuff **191** with a reinforcing ring **192** to facilitate ease of mounting to the retractor.

[0233] Referring to **FIGS. 63 and 64**, there is illustrated a further surgical sealing device **300** according to the invention. The device **300** comprises a first sealing member **301** and a second sealing member **302**. Each sealing member **301, 302** has a passageway **303, 304** extending therethrough. The passageways **303, 304** are arranged out of alignment with respect to one another. In this manner, the first sealing member **301** overlaps the entire periphery of the distal end opening of the passageway **304**, and the second sealing member **302** overlaps the entire periphery of the proximal end opening of the passageway **303**. Thus in the closed configuration illustrated in **FIG. 64**, the device **300** maintains an effective seal across a wound opening.

[0234] The sealing members **303, 304** are of an elastomeric gel material. The sealing members **303, 304** may therefore be manipulated to align the two passageways **303, 304**, and thereby facilitate passage of an object, such as a laparoscopic instrument or a surgeon's hand/forearm, through the device **300** to access the abdomen.

[0235] Each passageway **303, 304** is in the form of a lip-seal, and is capable of effecting a gas-tight seal between the wall of the passageway **303, 304** and the object inserted therethrough. Thus insufflation gas is prevented from escaping from the abdomen while the object is inserted through the passageways **303, 304**.

[0236] In **FIG. 65**, there is illustrated another surgical sealing device **310** according to the invention, which is similar to the device **1** of **FIGS. 1 to 8**, and similar elements in **FIG. 65** are assigned the same reference numerals.

[0237] In this case, the first sealing member **5** is attached to the second sealing member **6** at the attachment region **7** by means of a hinge arrangement. The first sealing member **5** is thus movable in a hinging motion relative to the second sealing member **6** between the open and closed configurations.

[0238] For enhanced sealing in the closed configuration, a biasing member may be provided to bias the detachment region **8** of the first sealing member **5** towards engagement

with the second sealing member **6**, and thus bias the device **320** towards the closed configuration. A suitable biasing member is a magnetic element **321** on the first sealing member **5** and a co-operating magnetic element **322** on the second sealing member **6**, as illustrated in **FIG. 66**.

[0239] Alternative biasing members include velcro strips, or a latch.

[0240] **FIGS. 67 to 70** illustrate another surgical sealing device **330** according to the invention, which is similar to the device **1** of **FIGS. 1 to 8**, and similar elements in **FIGS. 67 to 70** are assigned the same reference numerals.

[0241] In this case, the first sealing member **5** is attached to the second sealing member **6** by means of a resilient cantilever arm **331**. The arm **331** acts as a leaf-spring to bias the first sealing member **5** towards engagement with the distal end opening of the passageway **2**, and thus bias the device **330** towards the closed configuration.

[0242] The first sealing member **5** has a partially spherical, curved portion **332** which partially extends into the passageway **2** in the closed configuration.

[0243] Referring to **FIGS. 71 and 72**, there is illustrated another surgical sealing device **340** according to the invention, which is similar to the device **1** of **FIGS. 1 to 8**, and similar elements in **FIGS. 71 and 72** are assigned the same reference numerals.

[0244] In this case the first sealing member **5** is provided in the form of a substantially spherical ball. In the closed configuration, the sphere **5** engages the distal end opening of the passageway **2** to effect a gas-tight seal. Part of the sphere **5** extends into the passageway **2** in the closed configuration.

[0245] The sphere **5** is attached to the distal side of the second sealing member **6** by means of two resilient cords **341**. The cords **341** act as spring members to bias the sphere **5** towards engagement with the distal end opening of the passageway **2**, and thus bias the device **340** towards the closed configuration.

[0246] It will be appreciated that the first sealing member **5** may be attached to the second sealing member **6** in a variety of possible arrangements. For example, a single resilient cord **341** may extend from the sphere **5** through the passageway **2** and be attached to the proximal side of the second sealing member **6**, as illustrated in **FIGS. 73 and 74**.

[0247] Referring to **FIGS. 75 to 82**, there is illustrated another surgical sealing device **400** according to the invention for use in a surgical procedure such as a laparoscopic procedure or a hand assisted laparoscopic surgery. The device **400** comprises a sealing valve body having a proximal side **402** and a distal side **403**. The sealing valve body also has a main portion **404** and an access portion **405**, which in this case is approximately central of the sealing body. The access portion **405** has an accessway for passage of an object, such as a surgeon's hand/forearm or an instrument therethrough to access an internal surgical cavity. In this case the accessway is defined by a slit **406** in the sealing body, the slit **406** in this case extending from the proximal side **402** to the distal side **403** of the sealing body. The accessway **406** is biased towards a normally closed configuration as illustrated in **FIG. 77**, in which the walls of the sealing body in the region of the slit **406** are interengaged. The slit **406** is opened up on passage of an object therethrough whilst maintaining sealing engagement between the object and the sealing body.

[0248] The access portion **405** has different dimensions and/or properties to those of the main portion **404**. In this case, for ease of manufacture the sealing body is all of the same material and the differences are in the thickness of the sealing body.

[0249] In this case, the access portion **405** of the sealing body is substantially thicker than the main portion **404** of the sealing body. Thus, the use of material is optimised and the weight of the sealing body is optimised without any sacrifice in the sealing properties. The access portion **405** has substantially uniform thickness across its width.

[0250] In use, when the sealing body is deployed over a retracted incision and the body cavity insufflated, the sealing body bows upwardly as illustrated in FIG. 78. The seal across the wound opening is maintained by the sealing valve body, whilst the slit **406** is opened slightly on the proximal side **402** to provide a guide or lead-in **407** for insertion of an object through the slit **406**.

[0251] The sealing body may be of any suitable material such as an elastomeric material. It may comprise silicone, latex, rubber, neoprene or like and may be in the form of a gel.

[0252] Referring to FIGS. 79 and 80 there is illustrated a surgical assembly comprising the device **400** of the type described above which in this case is coupled to a wound retractor device **410** located in an incision **411** at a surgical site such as in an abdominal wall **412**. The retractor **410** may be of any suitable construction such as the retractors described in our US patent application published under No. 2001/0037053A, and/or U.S. Pat. No. 6,582,364, and/or U.S. patent application Ser. No. 10/678,653, the whole contents of which are incorporated herein by reference.

[0253] In this case, the retractor **410** has a distal ring **413** and a proximal ring **414** with a retracting sleeve **415** extending therebetween, as illustrated. The retractor **410** also has a proximal guide or mounting ring **416**. In this case, the proximal ring **414** is located in a recess in the guide/mounting ring **416**, however various other constructions are possible. In FIGS. 79 and 80, the device **400** is illustrated mounted adjacent to a proximal end of the retractor **410**, in this case to the mounting ring **416**.

[0254] Referring to FIGS. 81 and 82, the device **400** is illustrated mounted adjacent to a distal end of the retractor **410**. In this case the device **400** may be mounted to the retractor **410** using a coupling sleeve **420** with a reinforcing ring **421** which is hooked over the mounting ring **416**.

[0255] The device **400** of the invention provides sealed access without risk of gas leakage from the abdominal cavity.

[0256] It will be appreciated that in an alternative embodiment, the main portion and the access portion may be of the same dimensions, with different material properties between the access portion and the main portion. For example to achieve a greater sealing effect at the access portion than at the main portion.

[0257] The invention is not limited to the embodiments hereinbefore described, with reference to the accompanying drawings, which may be varied in construction and detail.

1. A surgical sealing device comprising:

a first sealing valve for sealing across an opening to an internal cavity;

the first sealing valve comprising a first sealing member and a second sealing member;

the sealing members being movable relative to one another between a closed configuration, in which the sealing members at least partially overlap one another, for sealing across the opening, and an open configuration for facilitating passage of an object through the first sealing valve to access the internal cavity.

2. A device as claimed in claim 1 wherein at least one of the sealing members is at least partially of a gelatinous elastomeric material.

3. A device as claimed in claim 2 wherein both sealing members are at least partially of a gelatinous elastomeric material.

4. A device as claimed in claim 2 wherein the material comprises a plasticiser.

5. A device as claimed in claim 4 wherein the plasticiser is selected from the group consisting of naturally derived oils, synthetic oils and liquid oligomers.

6. A device as claimed in claim 1 wherein the first sealing valve is biased towards the closed configuration.

7. A device as claimed in claim 6 wherein at least one of the sealing members is of a resilient material to bias the first sealing valve towards the closed configuration.

8. A device as claimed in claim 1 wherein the first sealing member and the second sealing member define overlapping portions, which overlap with each other in the closed configuration.

9. A device as claimed in claim 8 wherein at least the overlapping portions of the sealing members are generally planar.

10. A device as claimed in claim 9 wherein the planes of the overlapping portions are slightly offset.

11. A device as claimed in claim 8 wherein the overlapping portions engage with each other in the closed configuration.

12. A device as claimed in claim 11 wherein the engagement force is overcome on insertion of an object, such as a surgeon's hand.

13. A device as claimed in claim 1 wherein a thin slit is defined between the overlap of the first sealing member over the second sealing member.

14. A device as claimed in claim 1 wherein the first sealing member is fixedly attached to the second sealing member.

15. A device as claimed in claim 14 wherein the first sealing member is formed integrally with the second sealing member.

16. A device as claimed in claim 15 wherein the first sealing member is moulded integrally with the second sealing member.

17. A device as claimed in claim 14 wherein the first sealing member comprises an overlap region, which overlaps the second sealing member in the closed configuration, the overlap region comprising a first region attached to the second sealing member and a second region detached from the second sealing member.

18. A device as claimed in claim 17 wherein a thin slit is defined between the second region of the first sealing member and the second sealing member.

19. A device as claimed in claim 18 wherein the slit extends circumferentially through approximately 90°.

20. A device as claimed in claim 18 wherein the ratio of the radial dimension of the slit to the overall radial dimension of the entire first sealing member is approximately 1:4.

21. A device as claimed in claim 18 wherein the ratio of the radial dimension of the slit to the overall radial dimension of the entire second sealing member is approximately 1:8.

22. A device as claimed in claim 17 wherein in the closed configuration, the second region of the first sealing member engages the second sealing member.

23. A device as claimed in claim 22 wherein the second region of the first sealing member is biased towards engagement with the second sealing member.

24. A device as claimed in claim 1 wherein the first sealing valve is configured to be located externally of an internal cavity proximally of an opening to the internal cavity.

25. A device as claimed in claim 1 wherein the first sealing valve is configured to be located within an internal cavity distally of an opening to the internal cavity.

26. A device as claimed in claim 1 wherein the first sealing member is substantially planar.

27. A device as claimed in claim 1 wherein the second sealing member is substantially planar.

28. A device as claimed in claim 1 wherein the device comprises a second sealing valve for sealing around an object passed through an opening to an internal cavity.

29. A device as claimed in claim 28 wherein the first sealing member is located distally of the second sealing valve.

30. A device as claimed in claim 28 wherein the first sealing valve is located proximally of the second sealing valve.

31. A device as claimed in claim 28 wherein the first sealing valve is longitudinally spaced apart from the second sealing valve.

32. A device as claimed in claim 31 wherein one sealing valve is configured to be located externally of an internal cavity proximally of an opening to the internal cavity, and the other sealing valve is configured to be located within the internal cavity distally of the opening.

33. A device as claimed in claim 28 wherein the first sealing valve is located adjacent and in close proximity to the second sealing valve.

34. A device as claimed in claim 33 wherein both the first sealing valve and the second sealing valve are located externally of an internal cavity proximally of an opening to the internal cavity.

35. A device as claimed in claim 33 wherein both the first sealing valve and the second sealing valve are located within an internal cavity distally of an opening to the internal cavity.

36. A device as claimed in claim 28 wherein the second sealing member provides the second sealing valve.

37. A device as claimed in claim 36 wherein the second sealing member has a passageway extending therethrough, through which an object may be inserted to access an internal cavity.

38. A device as claimed in claim 37 wherein the second sealing member is configured to effect a seal between a sidewall of the passageway and an object inserted through the passageway.

39. A device as claimed in claim 37 wherein, in the closed configuration, the first sealing member extends across an end of the passageway and overlaps the second sealing member around the entire periphery of the end of the passageway.

40. A device as claimed in claim 39 wherein in the open configuration the first sealing member is retracted to reveal at least part of the end of the passageway.

41. A device as claimed in claim 28 wherein the second sealing valve comprises a lip seal valve.

42. A device as claimed in claim 1 wherein the device is mountable to a retractor device.

43. A device as claimed in claim 42 wherein the device comprises a mounting element for mounting the device to a retractor device.

44. A device as claimed in claim 43 wherein the mounting element is fixedly attached to the sealing valve.

45. A device as claimed in claim 44 wherein a part of the sealing valve is overmoulded around a part of the mounting element.

46. A device as claimed in claim 45 wherein the mounting element comprises one or more overmould openings therein.

47. A device as claimed in claim 43 wherein the mounting element comprises an engagement formation for snap-fit mounting of the device to a retractor device.

48. A device as claimed in claim 43 wherein the mounting element comprises a ring element.

49. A device as claimed in claim 42 wherein the device is configured to effect a seal between the device and a retractor device upon mounting of the device to the retractor device.

50. A device as claimed in claim 49 wherein at least one of the sealing members is configured to engage a retractor device upon mounting.

51. A device as claimed in claim 6 wherein the first sealing valve comprises a biasing member to bias the first sealing valve towards the closed configuration.

52. A device as claimed in claim 51 wherein the biasing member comprises a resilient element extending between the first sealing member and the second sealing member.

53. A device as claimed in claim 52 wherein the resilient element comprises a spring.

54. A device as claimed in claim 51 wherein the biasing member comprises a magnetic element on the first sealing member and a co-operating magnetic element on the second sealing member.

55. A device as claimed in claim 23 wherein the first sealing valve comprises a biasing member to bias the second region of the first sealing member towards engagement with the second sealing member.

56. A device as claimed in claim 55 wherein the biasing member comprises a resilient element for tensioning the second region of the first sealing member.

57. A device as claimed in claim 56 wherein the resilient element extends between the second region of the first sealing member and the second sealing member.

58. A device as claimed in claim 1 wherein the first sealing member is hingeably movable relative to the second sealing member between the closed configuration and the open configuration.

59. A device as claimed in claim 1 wherein the first sealing member is at least partially curved.

60. A device as claimed in claim 59 wherein the first sealing member is at least partially substantially spherical.

61. A device as claimed in claim 1 wherein the second sealing member is substantially curved.

62. A device as claimed in claim 37 wherein in the closed configuration, the first sealing member extends at least partially into the passageway.

63. A device as claimed in claim 37 wherein the thickness of the second sealing member varies across the width of the second sealing member.

64. A device as claimed in claim 63 wherein the thickness of the second sealing member is at a maximum adjacent the passageway.

65. A device as claimed in claim 37 wherein the passageway defines a longitudinal axis, and the passageway longitudinal axis is configured to subtend an acute angle with a longitudinal axis defined by an opening to an internal cavity.

66. A device as claimed in claim 65 wherein the longitudinal axis of the passageway is angled towards the second region of the first sealing member.

67. A device as claimed in claim 37 wherein the device comprises a closure member for closing the passageway.

68. A device as claimed in claim 67 wherein the closure member comprises a plug.

69. A device as claimed in claim 28 wherein the second sealing valve comprises a third sealing member having a passageway extending therethrough, through which an object may be inserted to access an internal cavity.

70. A device as claimed in claim 69 wherein the third sealing member is configured to effect a seal between a wall of the passageway and an object inserted through the passageway.

71. A device as claimed in claim 69 wherein the third sealing member is at least partially of a gelatinous elastomeric material.

72. A device as claimed in claim 28 wherein the second sealing valve is at least partially inflatable.

73. A device as claimed in claim 28 wherein the second sealing valve comprises an iris valve.

74. A device as claimed in claim 1 wherein the device comprises a third sealing valve for sealing across an opening to an internal cavity.

75. A device as claimed in claim 74 wherein the third sealing valve comprises a fourth sealing member, the second sealing member and the fourth sealing member being movable relative to one another between the closed configuration, in which the second sealing member and the fourth sealing member at least partially overlap one another, and the open configuration.

76. A device as claimed in claim 75 wherein the fourth sealing member is at least partially of a gelatinous elastomeric material.

77. A device as claimed in claim 43 wherein the mounting element comprises a screw-thread formation for screw-thread mounting of the device to a retractor device.

78. A device as claimed in claim 43 wherein the mounting element comprises a sleeve extending proximally of the sealing valve.

79. A device as claimed in claim 78 wherein the sleeve is hookable around a part of a retractor device to mount the device to the retractor device.

80. A device as claimed in claim 79 wherein the sleeve comprises a mounting ring for hooking around a part of a retractor device.

81. A surgical sealing device comprising:

a first sealing valve for sealing across an opening to an internal cavity;

the first sealing valve having a closed configuration for sealing across the opening, and an open configuration

for facilitating passage of an object through the first sealing valve to access the internal cavity; and

a second sealing valve for sealing around the object passed through the opening to the internal cavity;

at least one of the sealing valves being at least partially of a gelatinous elastomeric material.

82. A surgical sealing device comprising:

a first sealing valve for sealing across an opening to an internal cavity;

the first sealing valve comprising a main portion, and an access portion for facilitating passage of an object through the first sealing valve to access the internal cavity,

at least one of the portions being at least partially of a gelatinous elastomeric material.

83. A device as claimed in claim 82 wherein the dimensions of the main portion differ from the dimensions of the access portion.

84. A device as claimed in claim 83 wherein the thickness of the access portion is greater than the thickness of the main portion.

85. A device as claimed in claim 83 wherein the access portion is of substantially uniform thickness.

86. A device as claimed in claim 83 wherein the main portion and the access portion are of the same material.

87. A device as claimed in claim 82 wherein the material properties of the main portion differ from the material properties of the access portion.

88. A device as claimed in claim 87 wherein the main portion and the access portion are of the same dimensions.

89. A device as claimed in claim 82 wherein the access portion comprises an accessway extending therethrough, through which an object may be inserted to access an internal cavity.

90. A device as claimed in claim 89 wherein the accessway is defined by a slit in the access portion.

91. A device as claimed in claim 89 wherein the accessway is biased towards a closed configuration.

92. A device as claimed in claim 89 wherein the accessway is openable upon insertion of an object into the accessway.

93. A device as claimed in claim 89 wherein the accessway is configured to effect a seal between a sidewall of the accessway and an object inserted through the accessway.

94. A surgical assembly comprising:

a retractor device for retracting the sides of an opening to an internal cavity; and

a surgical sealing device as claimed in any of claims 1 to 93claim 1.

95. An assembly as claimed in claim 94 wherein the surgical sealing device is mounted to the retractor device.

96. An assembly as claimed in claim 95 herein the retractor device has a distal end and a proximal end, and the surgical sealing device is located adjacent to the distal end of the retractor device.

97. An assembly as claimed in claim 95 herein the retractor device has a distal end and a proximal end, and the surgical sealing device is located adjacent to the proximal end of the retractor device.

98. A method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

providing a first sealing valve comprising a first sealing member and a second sealing member;

the sealing members having a closed configuration, in which the sealing members at least partially overlap one another, and an open configuration;

arranging the first sealing valve, with the sealing members in the closed configuration, to seal across the opening;

passing an object through the first sealing valve to cause the sealing members to move from the closed configuration to the open configuration; and

passing the object through the opening to access the internal cavity.

99. A method as claimed in claim 98 wherein the method comprises the step of biasing the first sealing valve towards the closed configuration.

100. A method as claimed in claim 98 wherein the first sealing valve is arranged within the opening.

101. A method as claimed in claim 98 wherein the first sealing valve is arranged externally of the internal cavity proximally of the opening.

102. A method as claimed in claim 98 wherein the first sealing valve is arranged within the internal cavity distally of the opening.

103. A method as claimed in claim 98 wherein the method comprises the steps of:

providing a second sealing valve; and

arranging the second sealing valve to seal around the object passing through the opening.

104. A method as claimed in claim 103 wherein the second sealing valve is arranged proximally of the first sealing valve.

105. A method as claimed in claim 103 wherein the second sealing valve is arranged within the opening.

106. A method as claimed in claim 103 wherein the second sealing valve is arranged externally of the internal cavity proximally of the opening.

107. A method as claimed in claim 103 wherein the second sealing valve is arranged within the internal cavity distally of the opening.

108. A method as claimed in claim 103 wherein the second sealing valve has a passageway extending there-through, and the method comprises the step of inserting the object through the passageway to access the internal cavity.

109. A method as claimed in claim 108 wherein the method comprises the step of effecting a seal between a sidewall of the passageway and the object.

110. A method as claimed in claim 98 wherein the method comprises the step of retracting the sides of the opening to the internal cavity.

111. A method as claimed in claim 98 wherein the method comprises the step of mounting the sealing valve to a retractor device.

112. A method as claimed in claim 111 wherein the method comprises the step of effecting a seal between the sealing valve and the retractor device.

113. A method as claimed in claim 98 wherein the object passed through the opening comprises a surgeon's hand and/or forearm.

114. A method as claimed in claim 98 wherein the object passed through the opening comprises a surgical instrument.

115. A method as claimed in claim 103 wherein the second sealing valve is arranged distally of the first sealing valve.

116. A method as claimed in claim 108 wherein the method comprises the step of closing the passageway.

117. A method as claimed in claim 103 wherein the method comprises the step of at least partially inflating the second sealing valve to seal around the object.

118. A method as claimed in claim 103 wherein the method comprises the step of twisting the second sealing valve to seal around the object.

119. A method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

providing a first sealing valve having a closed configuration and an open configuration, and a second sealing valve;

at least one of the sealing valves being at least partially of a gelatinous elastomeric material;

arranging the first sealing valve in the closed configuration to seal across the opening;

passing an object through the first sealing valve to cause the first sealing valve to move from the closed configuration to the open configuration;

passing the object through the opening to access the internal cavity; and

arranging the second sealing valve to seal around the object passing through the opening.

120. A method of accessing an internal cavity through an opening to the internal cavity, the method comprising the steps of:—

providing a sealing valve comprising a continuous sealing member;

arranging the sealing valve to seal across the opening;

creating a passageway through the continuous sealing member in-situ by passing an object through the sealing member; and

passing the object further through the sealing member to access the internal cavity.

121. A method as claimed in claim 120 wherein the sealing member is at least partially of a gelatinous elastomeric material.

122. A method as claimed in claim 120 wherein the object comprises a laparoscopic instrument.

123. A method as claimed in claim 120 wherein the object comprises a sharp distal tip for piercing the sealing member.

124. A method as claimed in claim 120 wherein the passageway created through the sealing member comprises a pinhole through the sealing member.

* * * * *

专利名称(译)	手术密封装置		
公开(公告)号	US20050148823A1	公开(公告)日	2005-07-07
申请号	US10/965217	申请日	2004-10-15
[标]申请(专利权)人(译)	VAUGH TREVOR 约翰·巴特勒 BONADIO FR		
申请(专利权)人(译)	VAUGH TREVOR 约翰·巴特勒 BONADIO FRANK		
当前申请(专利权)人(译)	VAUGH TREVOR 约翰·巴特勒 BONADIO FRANK		
[标]发明人	VAUGH TREVOR BUTLER JOHN BONADIO FRANK		
发明人	VAUGH, TREVOR BUTLER, JOHN BONADIO, FRANK		
IPC分类号	A61B17/00 A61B17/02 A61B17/34 A61M39/06 F16K15/00		
CPC分类号	A61B17/0293 A61B17/3423 A61B17/3462 A61B17/3498 A61B2017/00265 A61M2039/0686 A61M39/0606 A61M39/0613 A61M2039/0633 A61M2039/064 A61M2039/0666 A61M39/06		
优先权	60/511135 2003-10-15 US 60/511075 2003-10-15 US 60/517075 2003-11-05 US 60/582801 2004-06-28 US		
外部链接	Espacenet USPTO		

摘要(译)

适于在诸如腹腔镜手术或手助腹腔镜手术的外科手术期间使用的手术密封装置包括第一密封构件和第二密封构件。在一种情况下，第一密封构件和第二密封构件由凝胶状弹性体材料整体形成。在密封构件之间限定细缝。第一密封构件以闭合构型与通过第二密封构件的通道的远端开口重叠，以防止吹入气体从腹部泄漏。在打开配置中，第一密封构件缩回以露出通道的远端开口，从而便于物体（例如外科医生的手或前臂）进入腹部。

