



US 20150342608A1

(19) **United States**(12) **Patent Application Publication**
HERNANDEZ(10) **Pub. No.: US 2015/0342608 A1**(43) **Pub. Date: Dec. 3, 2015**(54) **APPLICATIONS FOR MODULAR MAGNETIC
ANASTOMOSIS DEVICE****Publication Classification**(71) Applicant: **IRCAD**, Strasbourg (FR)(72) Inventor: **Juan HERNANDEZ**, Strasbourg (FR)(21) Appl. No.: **14/654,643**(22) PCT Filed: **Dec. 20, 2013**(86) PCT No.: **PCT/IB2013/003246**

§ 371 (c)(1),

(2) Date: **Jun. 22, 2015****Related U.S. Application Data**

(60) Provisional application No. 61/740,865, filed on Dec. 21, 2012, provisional application No. 61/794,782, filed on Mar. 15, 2013.

(51) **Int. Cl.****A61B 17/11** (2006.01)**A61B 17/34** (2006.01)(52) **U.S. Cl.**CPC **A61B 17/1114** (2013.01); **A61B 17/3421**
(2013.01); **A61B 17/3468** (2013.01); **A61B**
2017/00876 (2013.01)

(57)

ABSTRACT

The present disclosure provides description of applicators to implement modular magnetic anastomosis device. In one embodiment the delivery device is a laparoscopic instrument for MISS surgery, in another embodiment the delivery device is endoscopy or colonoscopy instrument for NOTES surgery.

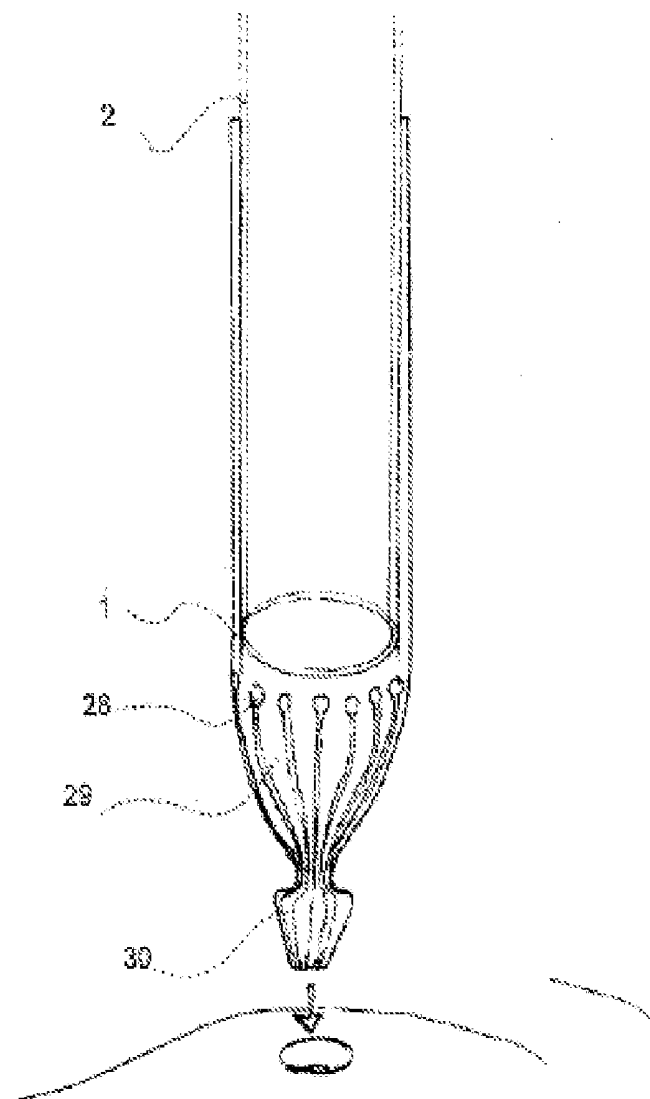


Figure 1

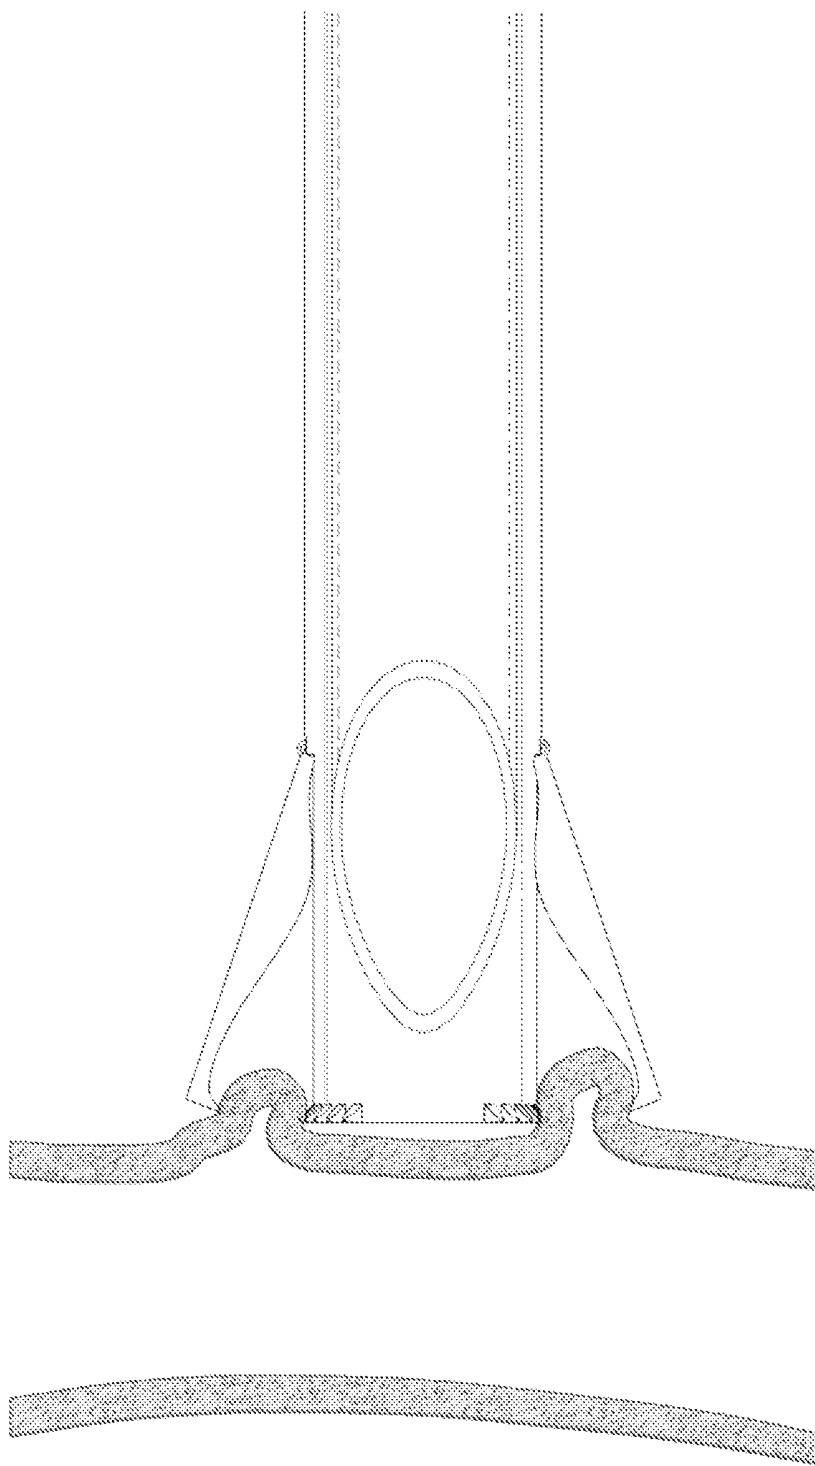


Figure 2

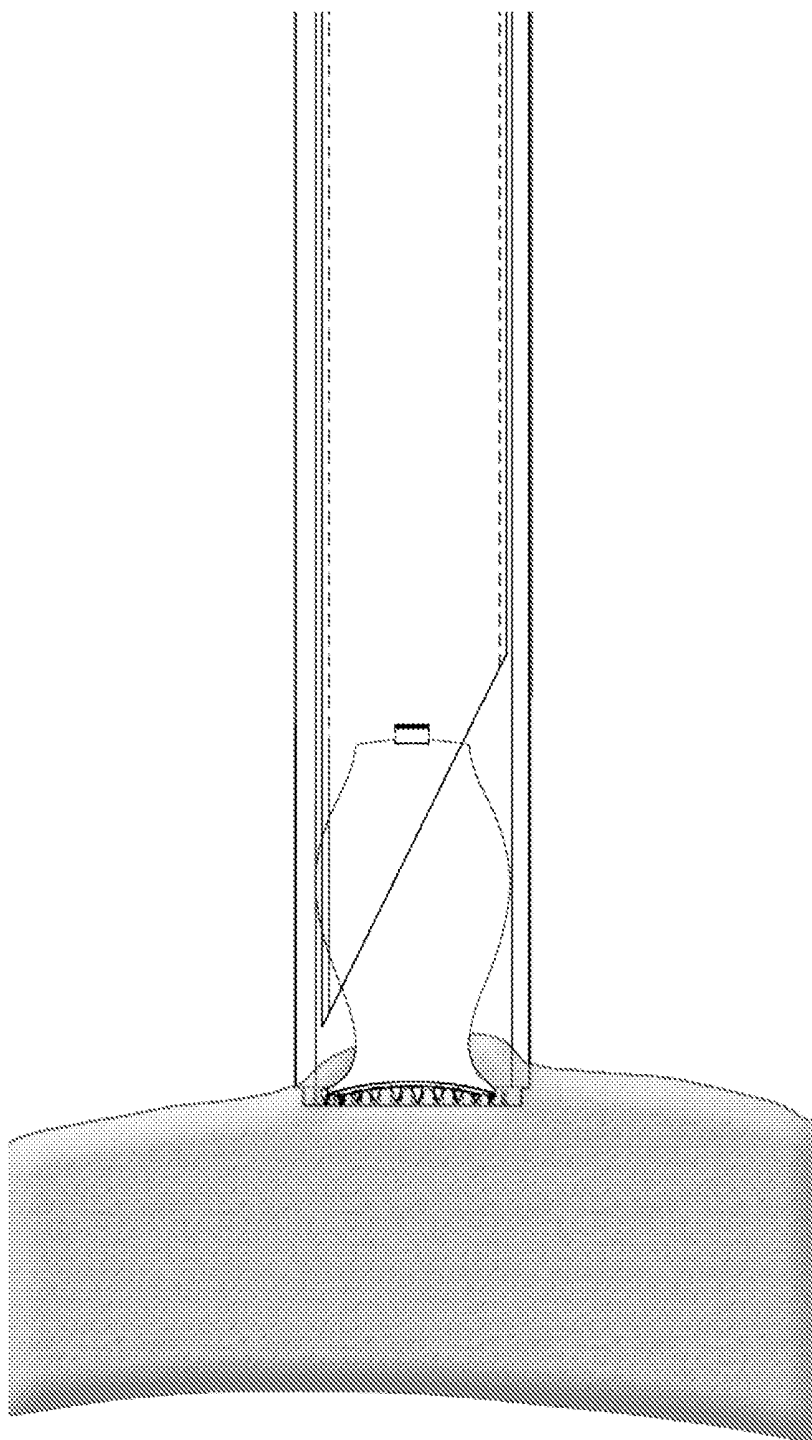


Figure 3

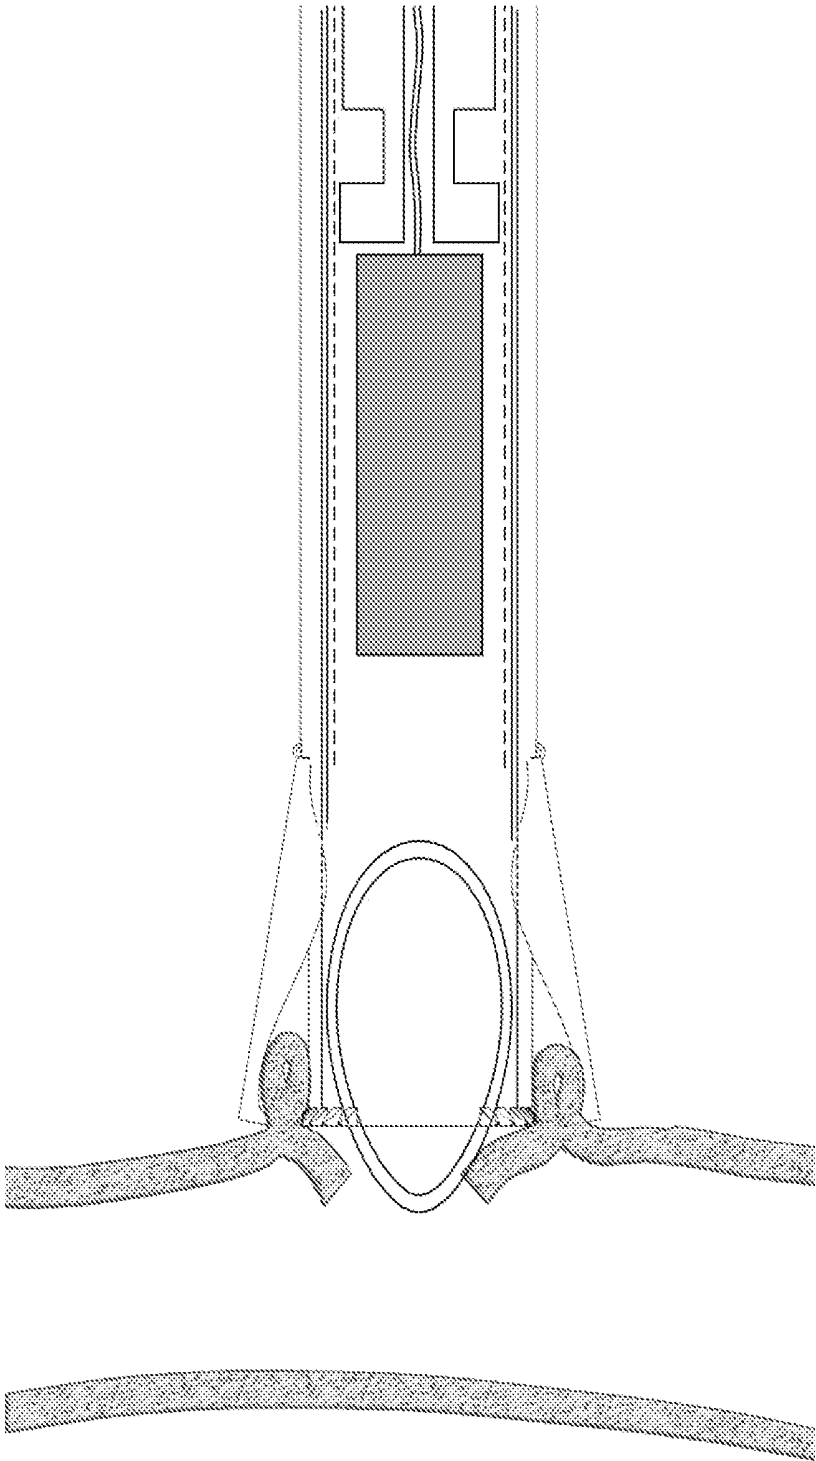


Figure 4

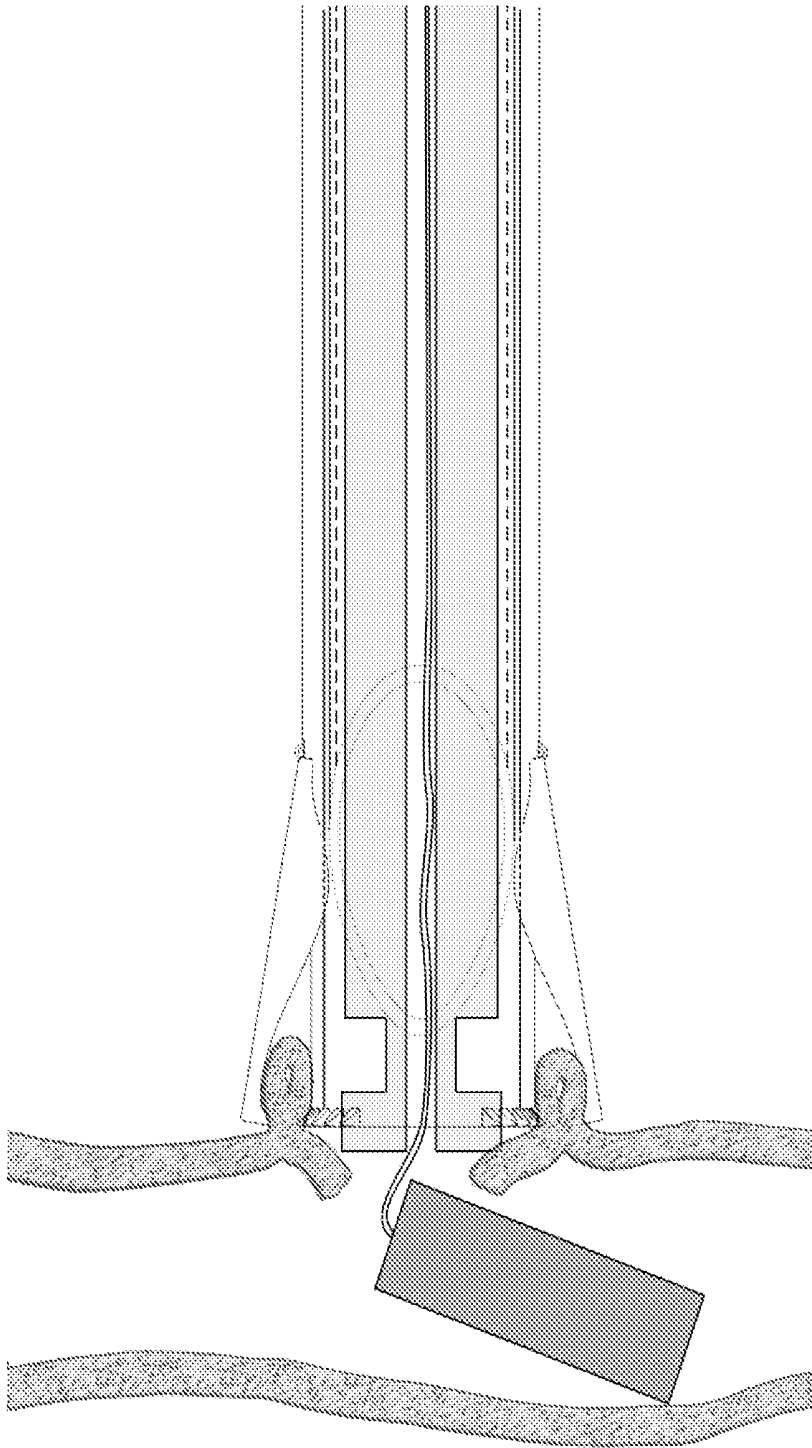


Figure 5

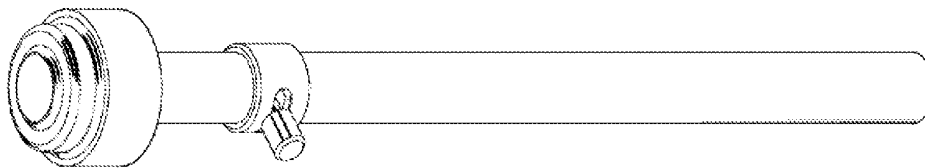


Figure 6

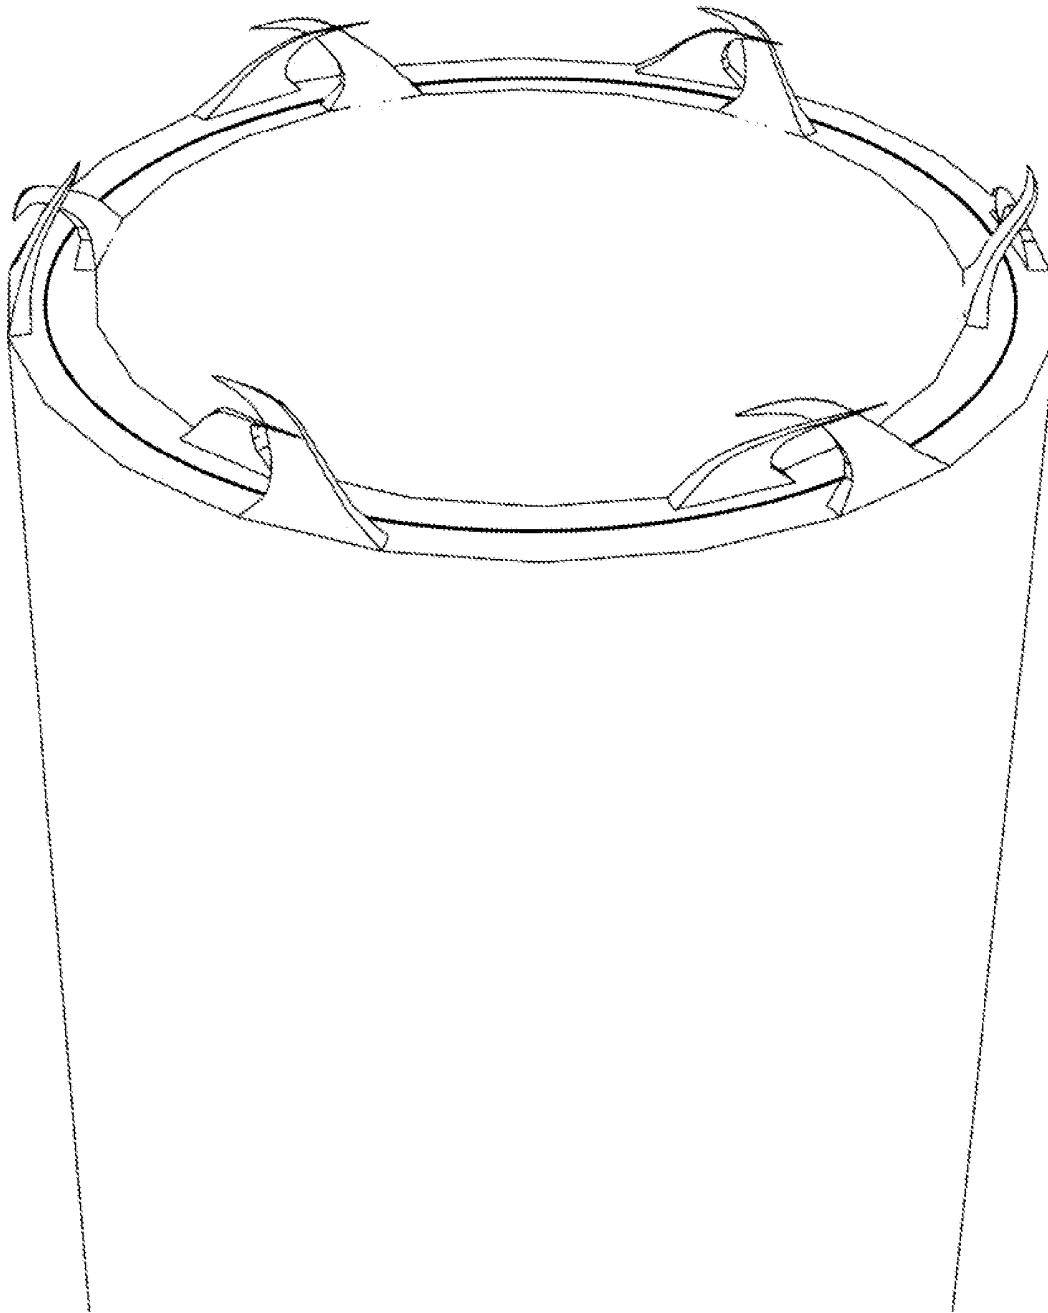


Figure 7

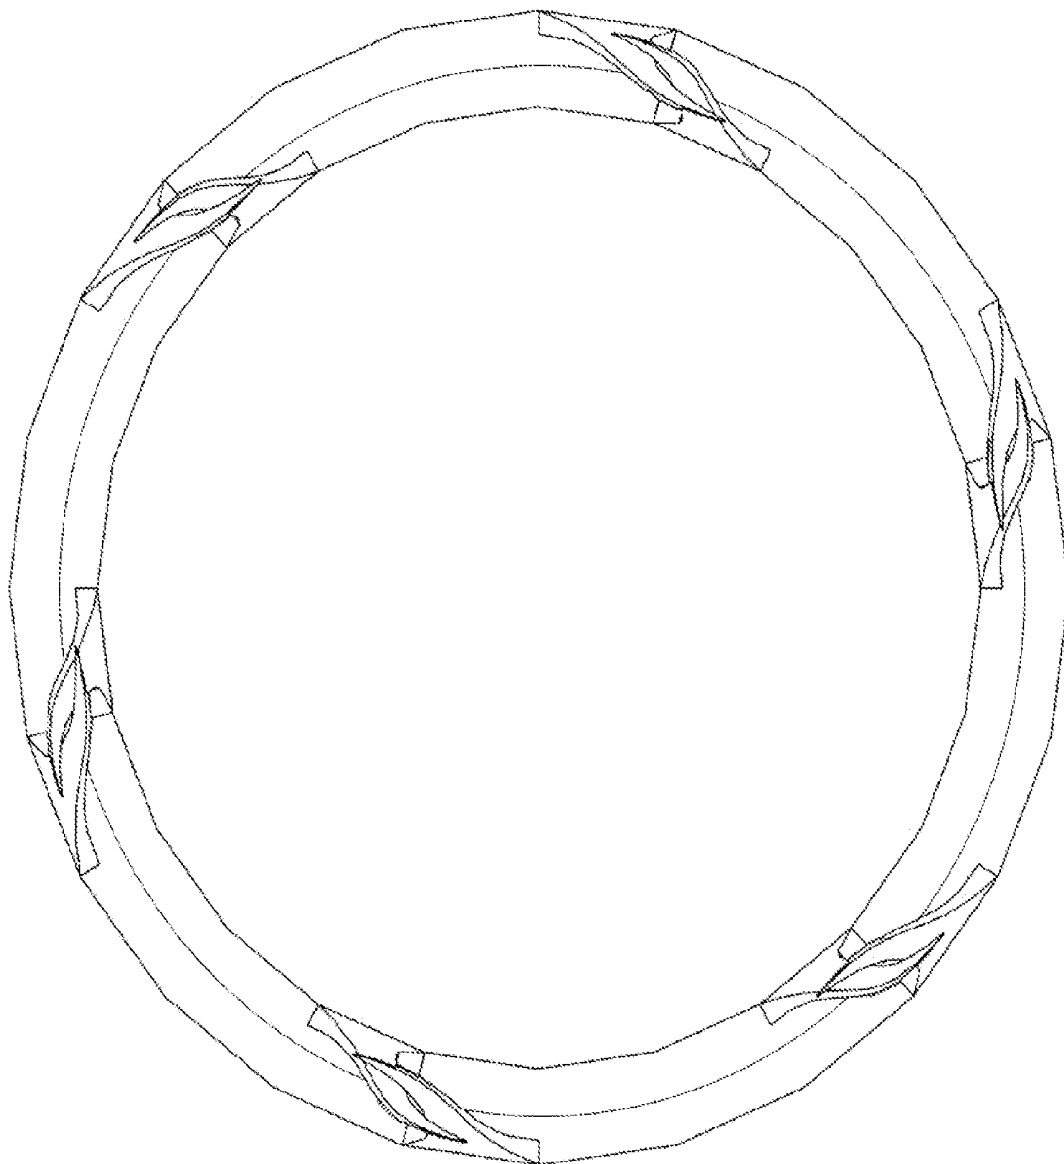


Figure 8A

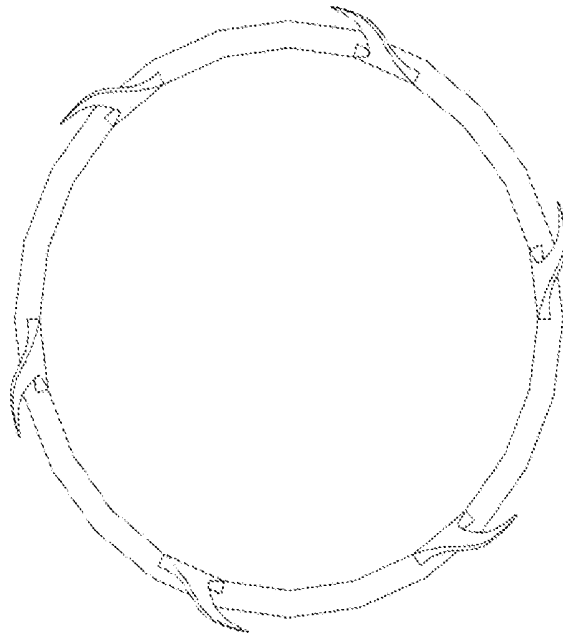
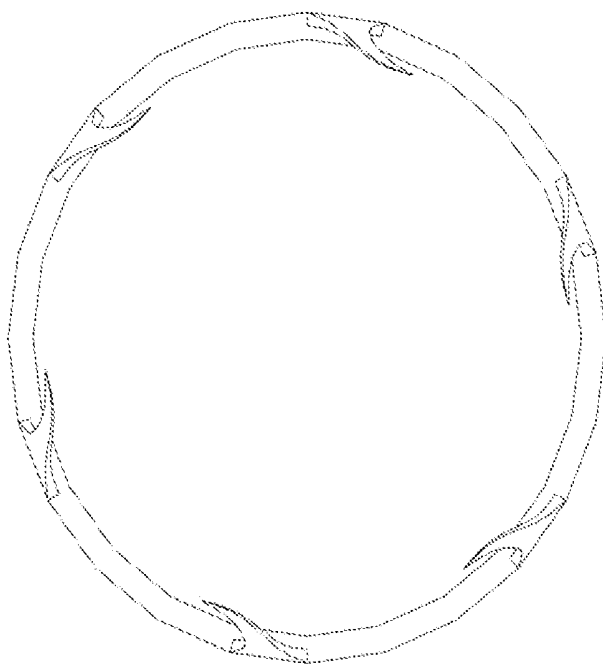
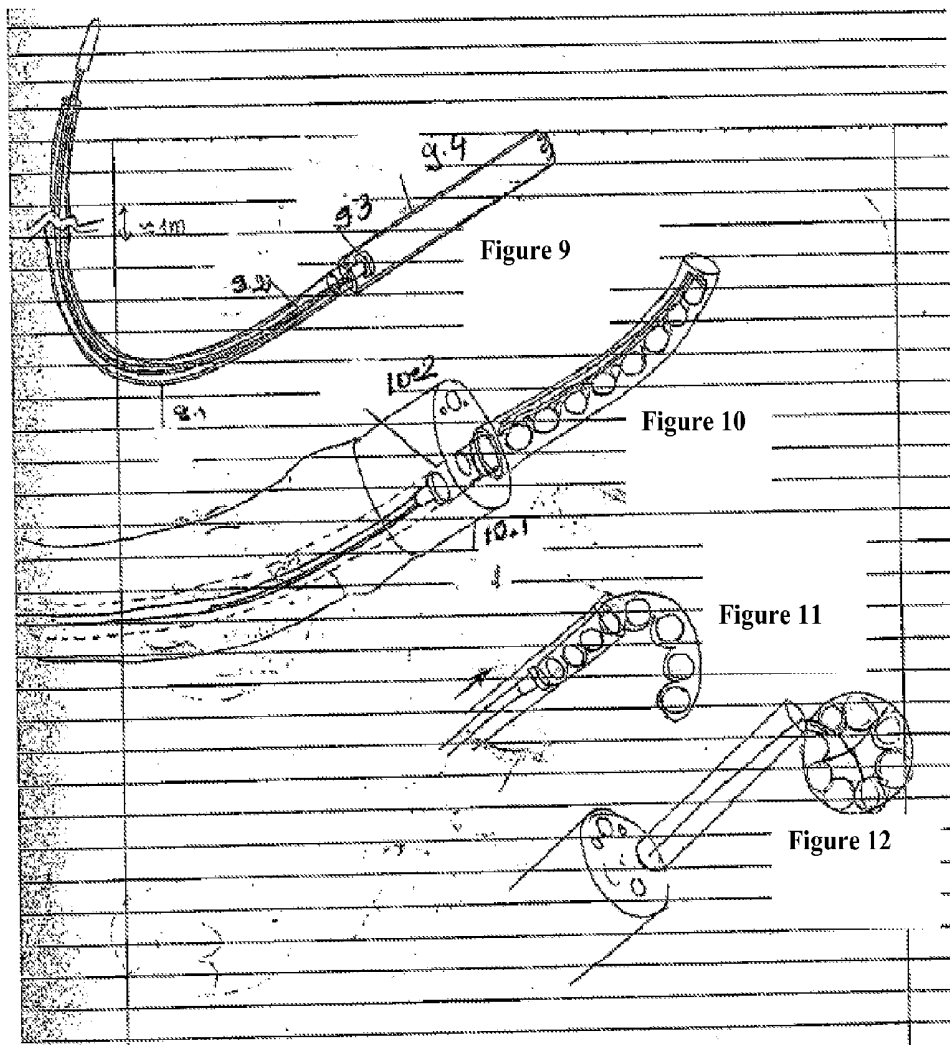


Figure 8B





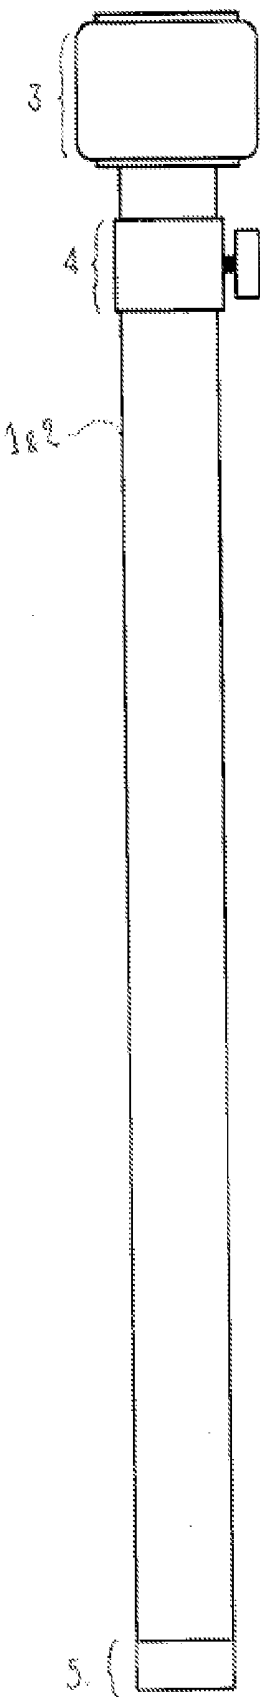


Figure 13

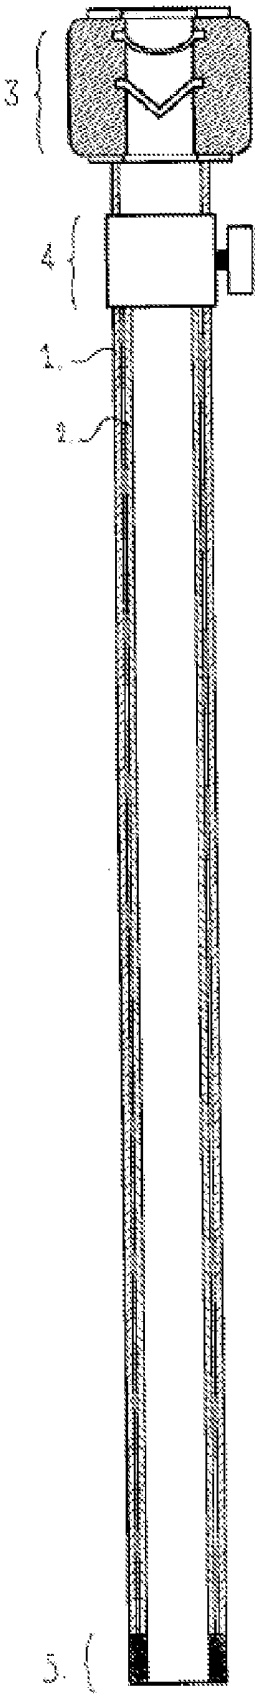


Figure 14

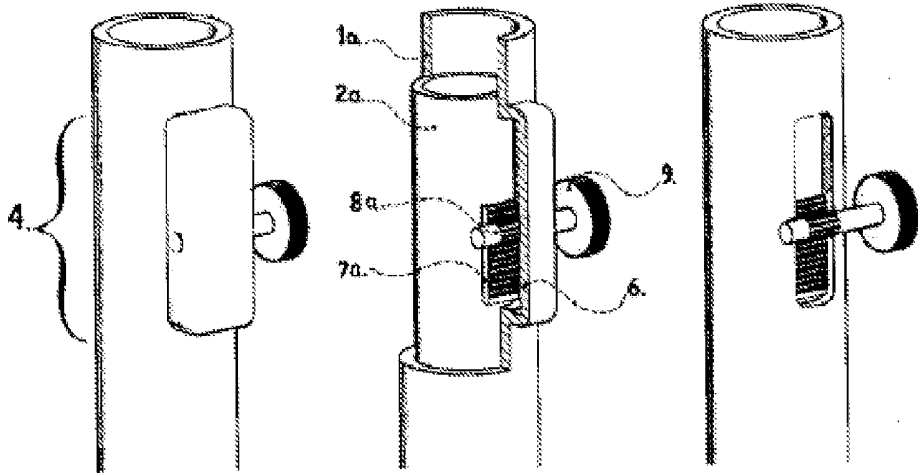


Figure 15

Figure 16

Figure 17

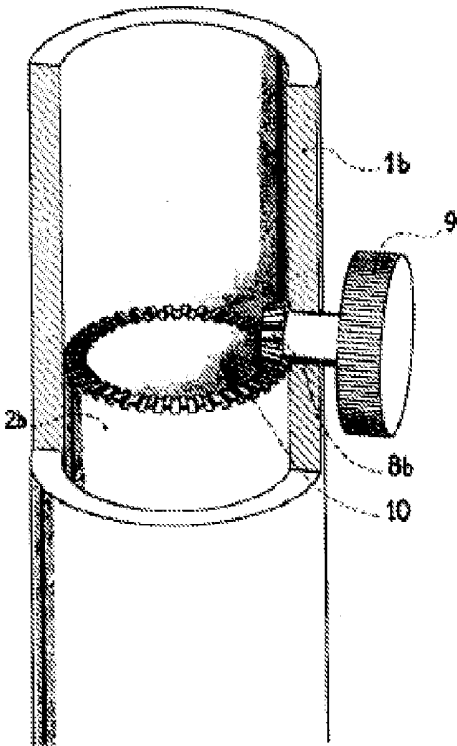


Figure 18

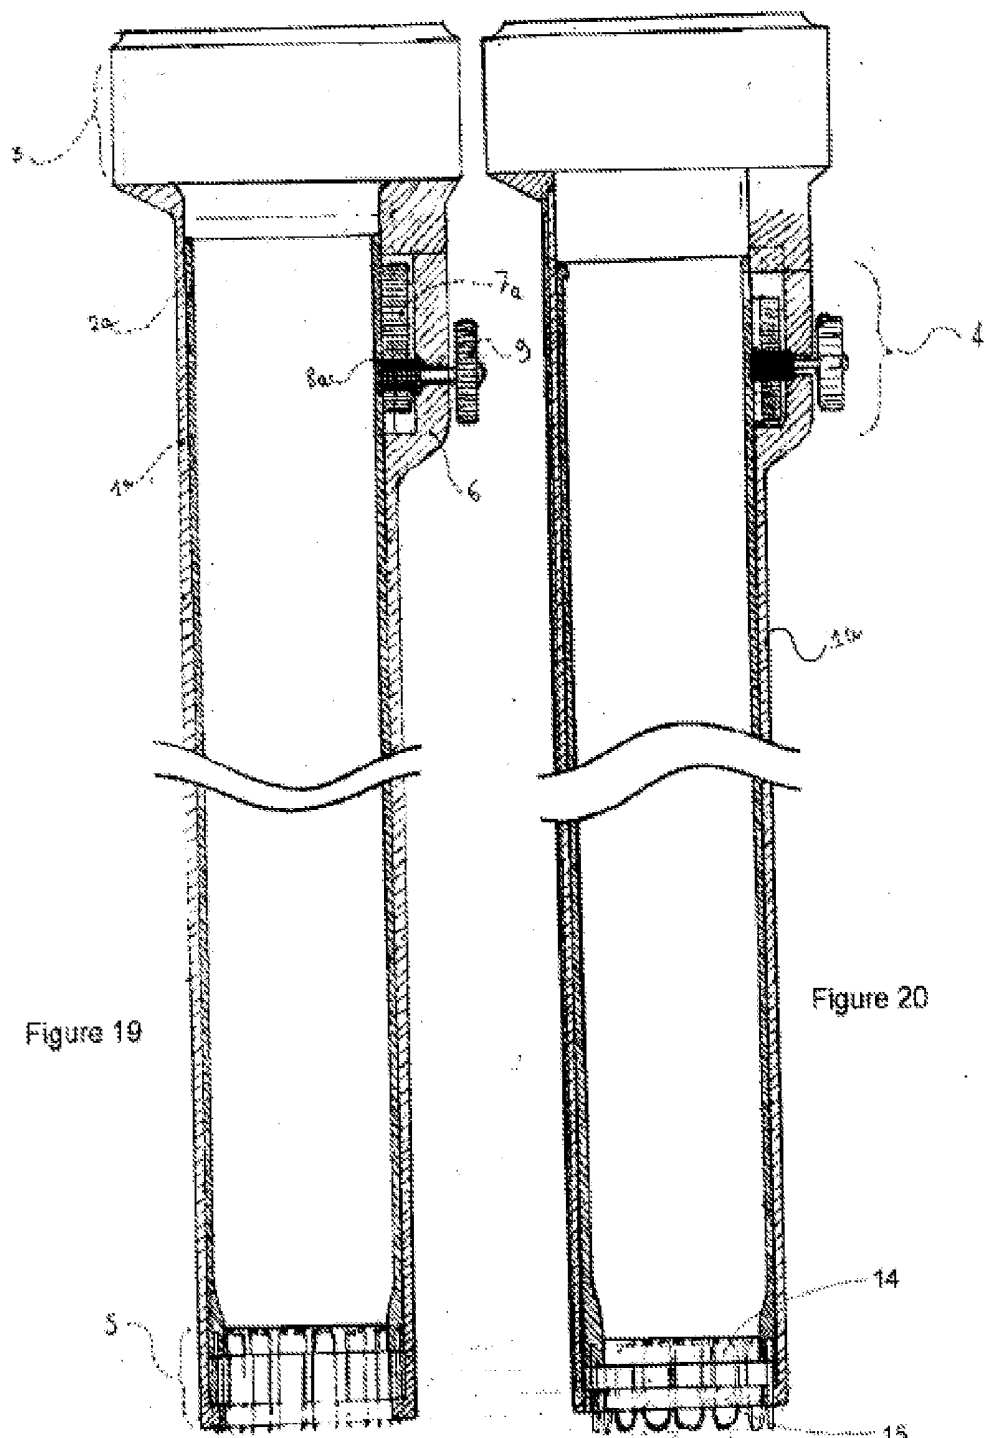


Figure 19

Figure 20










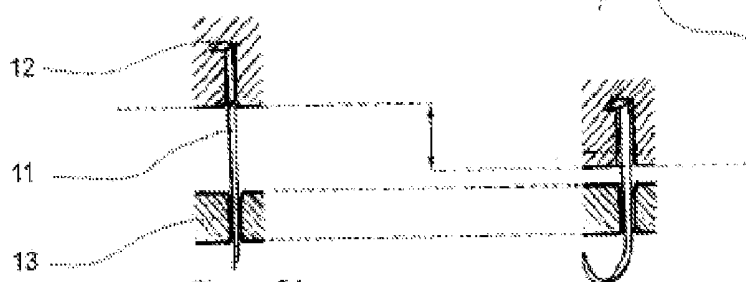


Figure 21

Figure 22

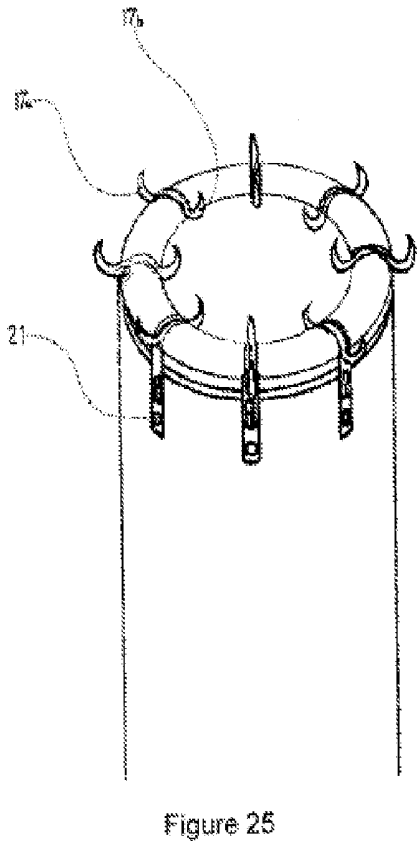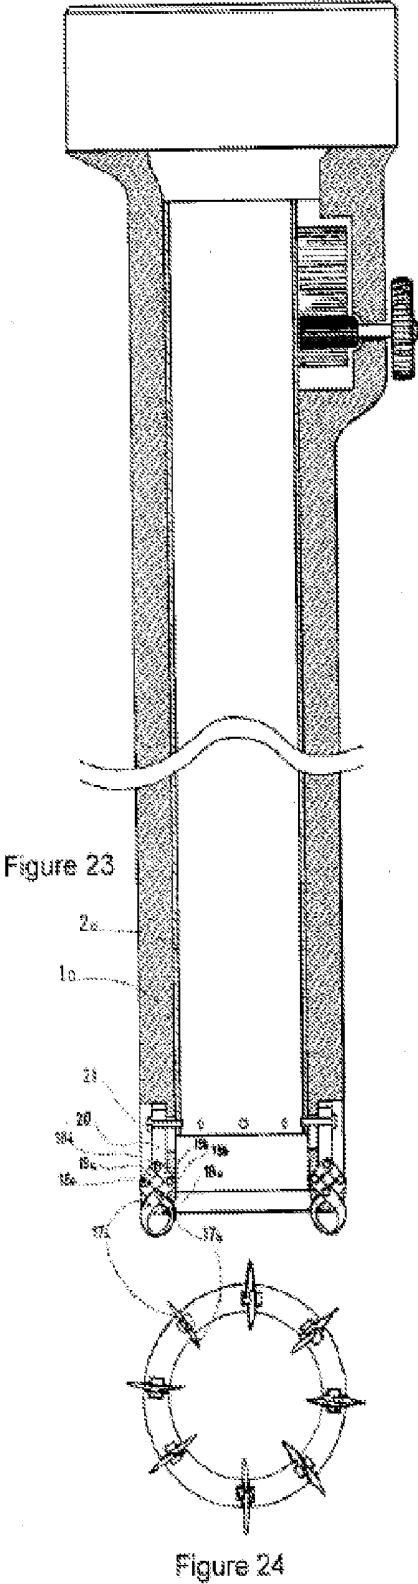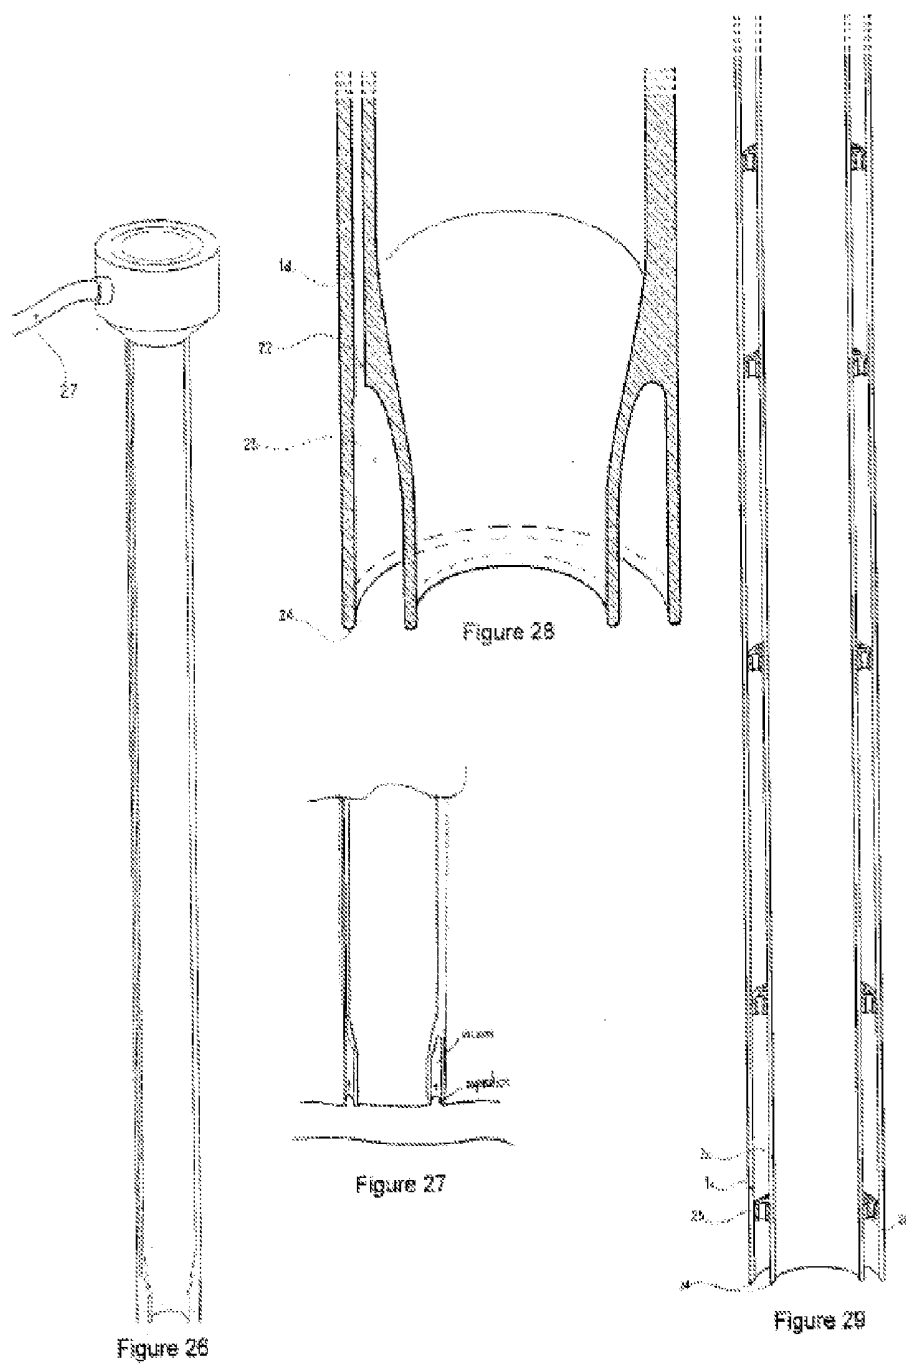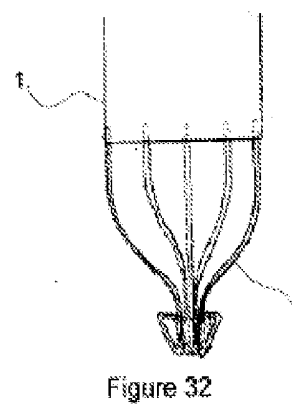

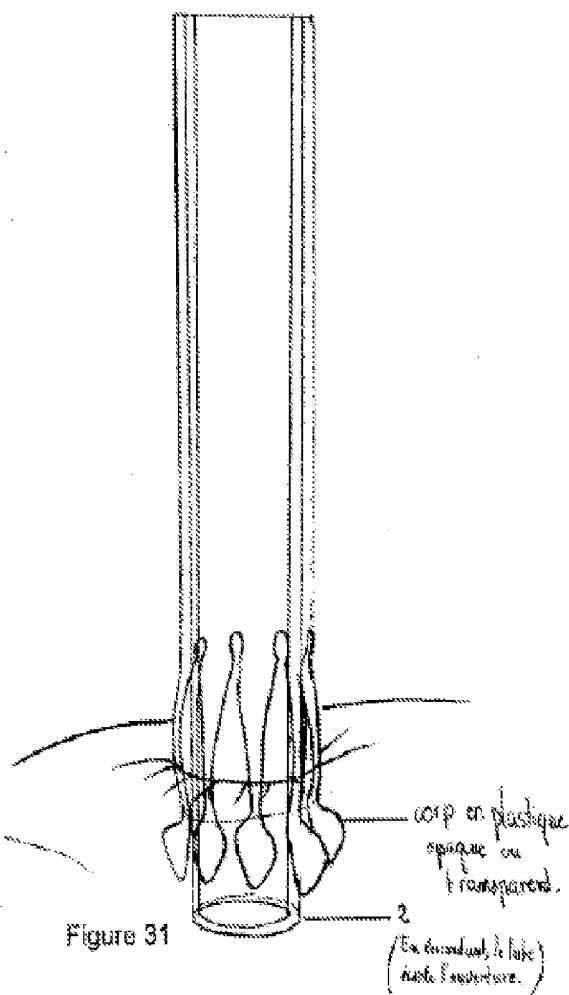

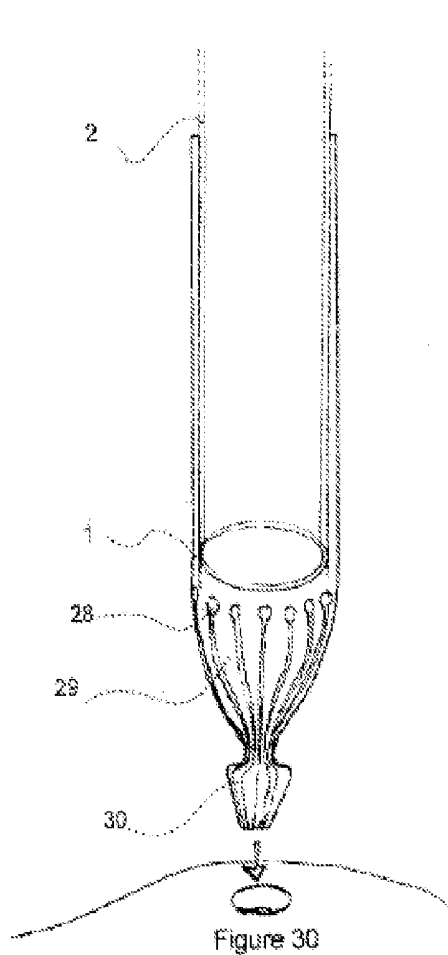

31. (Option avec fibres en métal non ferro-magnétique)

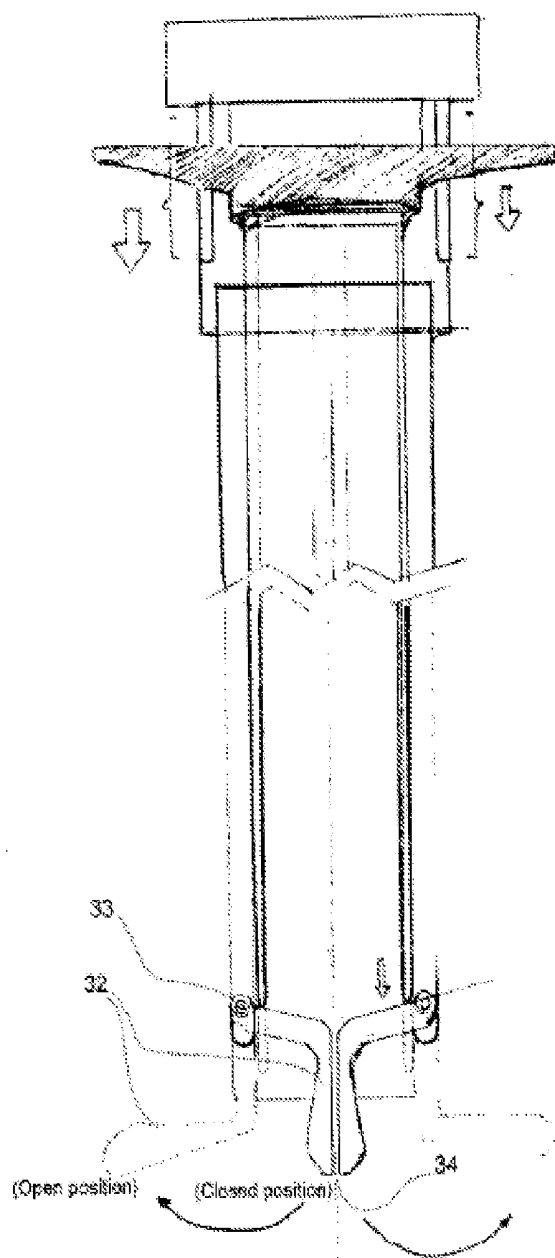


Figure 36

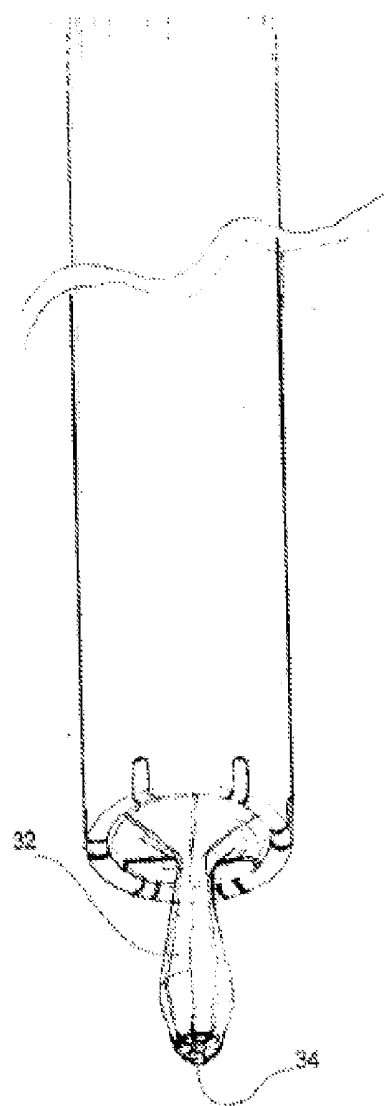


Figure 37

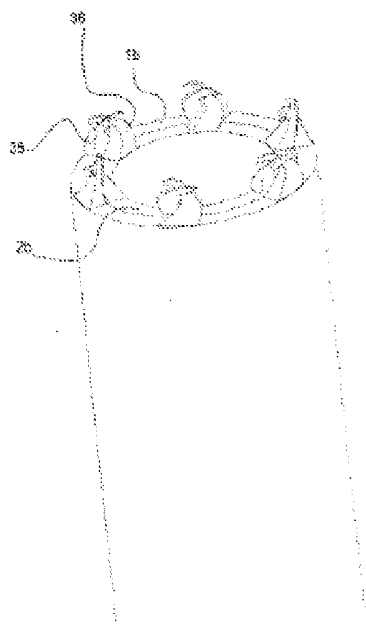


Figure 38

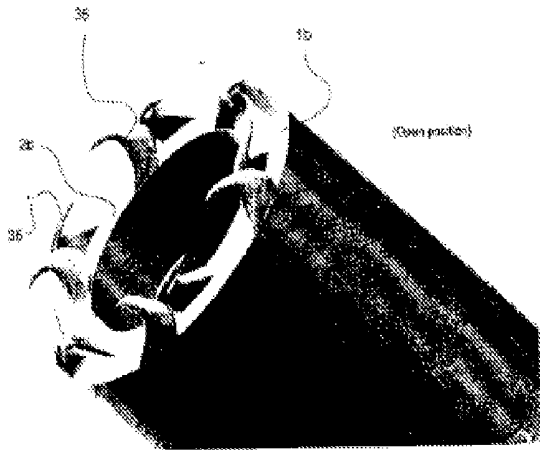


Figure 39

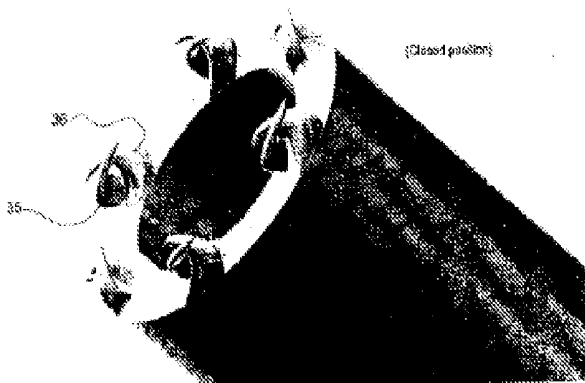


Figure 40

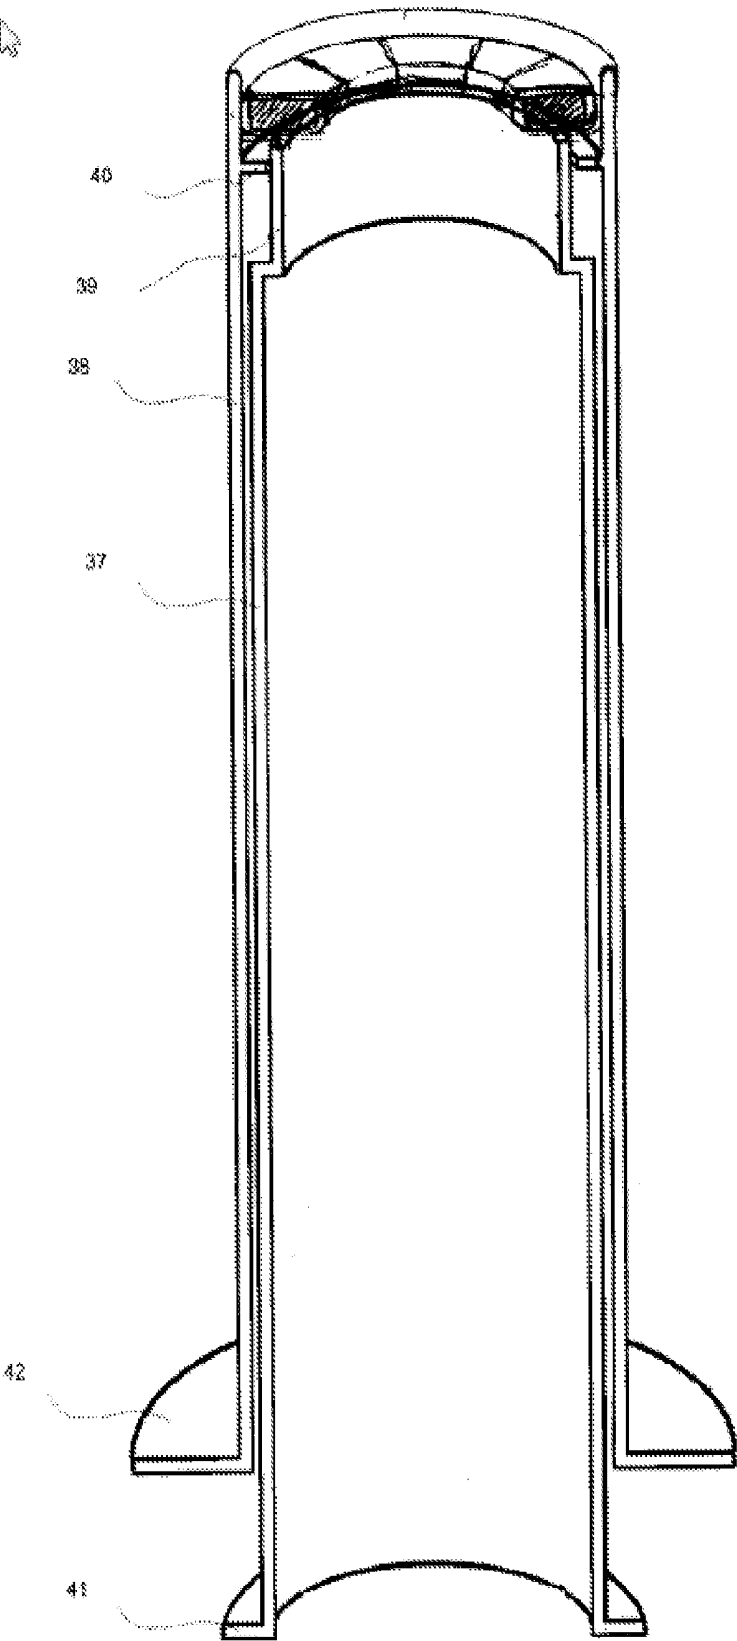


Figure 41

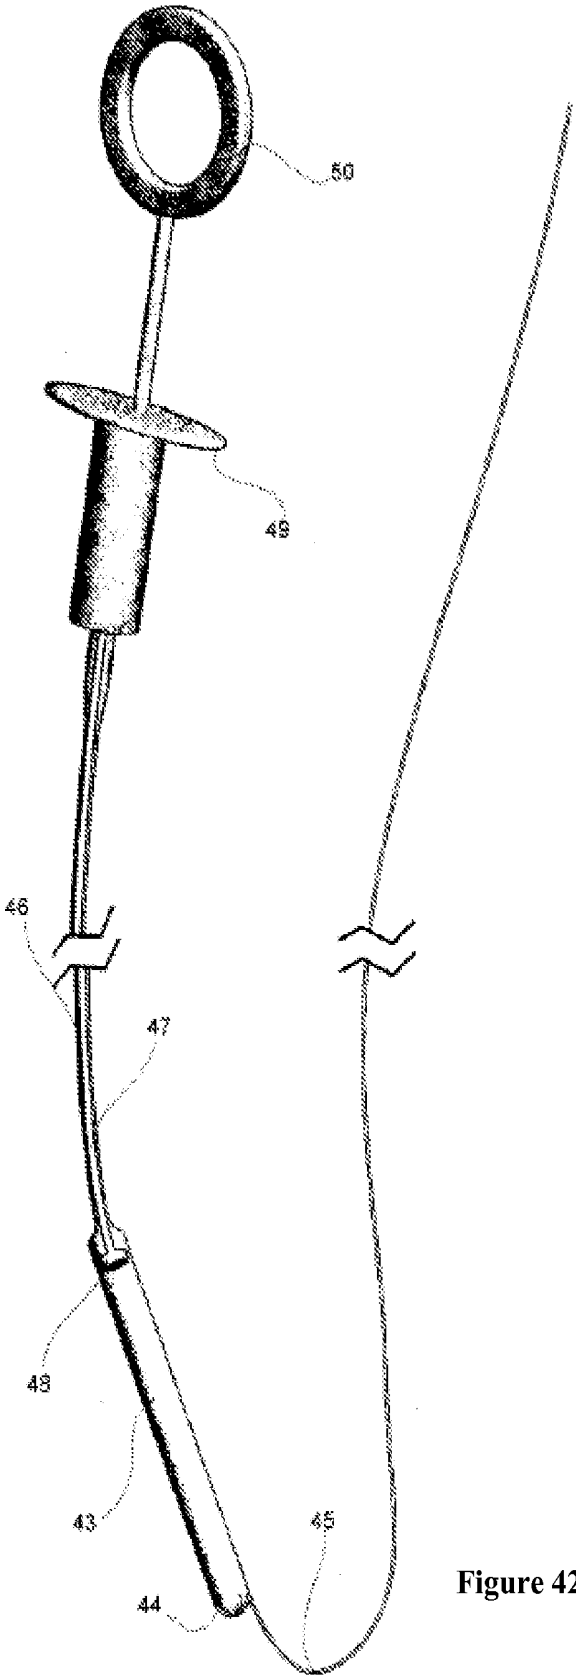


Figure 42

APPLICATIONS FOR MODULAR MAGNETIC ANASTOMOSIS DEVICE

CROSS-REFERENCE

[0001] This application claims benefit of U.S. Application Ser. No. 61/740,865, filed Dec. 21, 2012; and U.S. Application Ser. No. 61/794,782, filed Mar. 15, 2013; each of which is incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to an applicator and methods particularly useful for the delivery of injection medical devices by minimally invasive single site surgery (MISS), natural orifice transluminal endoscopic surgery or colonoscopic surgery (NOTES™).

[0003] In one embodiment, the injection device is a modular magnetic anastomosis device.

[0004] In one embodiment, the applicator is a laparoscopic instrument.

[0005] In an additional embodiment the laparoscopic instrument has is comprised of:

[0006] a) an exterior tube, b) an interior tube, c) a sealing system, d) an actuation system, e) a stowing system.

[0007] In one embodiment, an aperture to the organ is performed prior to stowing the applicator.

[0008] In another embodiment, an aperture to the organ is performed after fastening the applicator.

[0009] In one embodiment, the actuation is performed by a button.

[0010] In another embodiment, the actuation is performed by a serrated roller.

[0011] In one embodiment, the actuation is ordered by a radial toothed rack.

[0012] In another embodiment, the actuation is ordered by handle with a longitudinal toothed rack.

[0013] In one embodiment, the actuation is the sliding of an internal tube into an external tube.

[0014] In one embodiment, the fastening to the pneumoperitoneum is performed with a set of valves.

[0015] In another embodiment, the fastening to the pneumoperitoneum is performed with aspiration.

[0016] In one embodiment, the fastening to the pneumoperitoneum is performed with pliers with chuck jaws in either side of the elongated tube with sharp spikes.

[0017] In another embodiment, the fastening to the pneumoperitoneum is performed with teeth being curved radially and in an opposite direction at the extremities of internal and external tubes as to grasp the external wall of the digestive tract by simple rotation of these two tubes.

[0018] In an alternate embodiment, the fastening to the pneumoperitoneum is performed through a small tooth-needle fixed in the periphery of opposite sites two by two of the internal tubes. A thrust at a right angle slides during the actuation making contact of the internal tube with the external tube, teeth leave their housing, take the deployed form.

[0019] In another embodiment, the fastening to the pneumoperitoneum is performed by actuation of the internal tube relative to the external tube which opens and closes a circular network of small grips; the internal tube possesses a regular network of holes by which pass rivets; each rivet communicates between the tubes a the driveshaft articulating two arms interdependent of the external tube where the actuation of the internal tube actuates the network of claws.

[0020] In one embodiment, the internal tube and external tube are connected except for the hollow zone linked to an external aspiration device creating under aspiration a circumferential zone stowed to the organ.

[0021] In another embodiment, the internal tube and external tube are kept together by a network of rings which allows the aspiration under vacuum to fasten the laparoscopic instrument.

[0022] In one embodiment, the extremity of the external tube is divided into flexible arms with final pin with small release in the base.

[0023] In one embodiment, by sliding the internal tube inside the external tube deformed elastic arms are pushed radially outwards.

[0024] In another embodiment, elastic arms are fixed in the periphery of the external tube as stems of cylindrical section.

[0025] In another embodiment, rigid elbows with bent jaws are placed in the periphery of the external tube.

[0026] In one embodiment, the anatomical structure is imprisoned between the hooks after rotation of the external and internal tubes.

[0027] In one embodiment, the injection medical device is used through colonoscopy.

[0028] In another embodiment, the applicator is formed by an internal tube and an external tube with a flange shape base and both act as a syringe dislodging the device.

[0029] In one embodiment, an injection medical device is used as an endoscopy instrument.

[0030] In one embodiment, the injection device is enclosed in a flexible cartridge at the extremity of a guide tube.

[0031] In another embodiment, the injection device is enclosed in a hollow cylindrical cartridge with a convex flexible extremity.

[0032] In one embodiment, the device is fixed to the end of sheath in the extremity of the cartridge.

[0033] In another embodiment, a push rod actuates the cable of sheath.

[0034] In an additional embodiment, the cable slides the inside piston ejecting the device.

[0035] In one embodiment, the device is ejected with a piston.

[0036] In another embodiment, the piston is rigid.

[0037] In yet another embodiment, the piston is flexible.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] FIG. 1; illustrates an applicator for a modular magnetic anastomosis device using a laparoscopic technique with tightness valves for maintaining the pneumoperitoneum.

[0039] FIG. 2; is a side view of the laparoscopic applicator of the modular magnetic anastomosis device.

[0040] FIG. 3; describes a cross longitudinal perspective of the main body of the applicator, with the second beveled and sharpened tube and the arrangement of modular magnetic anastomosis device inside of the second glide tube.

[0041] FIG. 4; illustrates the ejection of the anastomosis device with the wire guide from the laparoscopic applicator in the non-deployed configuration.

[0042] FIG. 5; describes a variant of the laparoscopic applicator where the main body of the applicator and the internal tube are fitted together with a tightness valve and an external button for opening and closing the applicator.

[0043] FIG. 6; shows a cross section of the main body of the applicator fitted with the internal secondary tube with teeth being curved radially and in opposite direction.

[0044] FIG. 7; is a presentation of the interaction between the teeth of the main body and the second internal tube of the applicator.

[0045] FIG. 8A-B; shows separately inner and outer tubes with general orientation of teeth.

[0046] FIG. 9; shows the modular magnetic anastomosis device applicator used in endoscopy with the flexible cartridge enclosing the device.

[0047] FIG. 10; illustrates the presence of the applicator used in an endoscope.

[0048] FIG. 11; shows the plunger pushing and thus ejecting the modular magnetic anastomosis device out of the flexible cartridge of the endoscopic applicator.

[0049] FIG. 12; presents the anastomosis device in its deployed configuration using the wire guide to close the device.

[0050] FIG. 13; illustrates general structure of a laparoscopic applicator for a modular magnetic anastomosis comprises:

[0051] (1) exterior tube

[0052] (2) interior tube

[0053] (3) sealing system

[0054] (4) actuation system

[0055] (5) stowing system

[0056] FIG. 14; is the cross longitudinal perspective of the main body of the applicator.

[0057] FIG. 15; illustrates external view of actuation system.

[0058] FIGS. 16; describes a cross longitudinal view of the actuation system with different components that operate the mechanical movement and rotation of serrated roller.

[0059] FIG. 17; illustrates different components that operate the mechanical movement and rotation of the serrated roller.

[0060] FIG. 18; illustrates an alternative form of serrated roller.

[0061] FIGS. 19 and 20; describe a laparoscopic applicator that the stowing system comprises a network of small tooth-needles.

[0062] FIGS. 21 and 22; illustrate introduction of tooth-needle and deployed form of the tooth-needle after the laparoscopic applicator is fixed to desired anatomic surface.

[0063] FIGS. 23, 24 and 25; present a laparoscopic applicator where the mechanical movement after stowing the application to desired organ opens and form a circular network of small grips.

[0064] FIGS. 26, 27 and 28; describe a laparoscopic applicator which is applied against the surface to be deployed by aspiration.

[0065] FIG. 29; illustrates an applicator with exterior and interior tubes in contact with series of rings.

[0066] FIGS. 30 and 31; illustrate an applicator with an extremity divided in several resilient flexible or non ferromagnetic metal arms with final spur.

[0067] FIG. 32; illustrates the applicator that possessing stems of cylindrical sections allowing the fixation of the laparoscopic applicator after entry.

[0068] FIGS. 33, 34 and 35; illustrate the deployed form of laparoscopic applicator describe in FIGS. 30 and 31 and 32.

[0069] FIGS. 36 and 37; illustrate an applicator with rigid articulate hooks.

[0070] FIGS. 38, 39 and 40; represent laparoscopic applicator that external and interior tubes of the applicator are fitted together with teeth being curved radially and in opposite direction.

[0071] FIG. 41; describes a colonoscopy applicator for modular magnetic anastomosis.

[0072] FIG. 42; shows a variant of modular magnetic anastomosis device applicator used in endoscopy with the flexible cartridge enclosing the device.

DETAILED DESCRIPTION OF THE INVENTION

[0073] Minimally invasive single site surgery (MISS) or natural orifice transluminal endoscopic surgery (NOTES™) are terminologies to explain the novel concept of scarless surgery which are increasingly making their way into clinical practice. Laparoscopic and endoscopic surgeries are well-established alternatives to open surgery for anastomosis. In general, the benefits of laparoscopy and endoscopy on post-operative pain, cosmetic benefits, hospital stay and convalescence are widely recognized. Central to the performance of MISS or NOTES surgery is the ability to achieve efficient and effective access to the surgical area of interest via a single port of entry using an endoscopic, percutaneous or laparoscopic applicator.

[0074] The MISS surgery approach has the potential to advance the field of percutaneous intra- and transluminal surgery. By direct percutaneous entry into hollow organs such as the urinary bladder, stomach and colon, newer intra- and transluminal procedures could be developed. The potential advantages of this approach would include operating within a localized pneumoviscerum environment (e.g., pneumovesiculus, pneumogastrum or pneumocolum) in contrast to a generalized pneumoperitoneum, thereby potentially allowing certain major abdominal procedures to be performed under regional rather than general anesthesia.

[0075] The development priorities to meet future needs of MISS surgery are evenly divided across four categories: ports, instruments, optics and robotics. Of late, there has been a new entry to MISS surgery platforms: Single-Port Instrument Delivery Extended Research (SPIDER™ developed by TransEnterix Inc., Research Triangle Park, N.C., USA). It has been proposed that by instrument manipulation past the level of the skin and fascia, the local wound inflammation would be minimized compared with standard laparoscopy. Surgeons from IRCAD, Strasbourg, performed the first transvaginal NOTES™ cholecystectomy in humans in 2007. Since then, many NOTES™ procedures have been performed for varied indications using one or two instruments for dissection and retraction introduced through the transumbilical rigid trocars. They are primarily labeled as “Hybrid-NOTES.” It is a win-win situation for both of these surgical access techniques (MISS and NOTES™) as they compensate for the disadvantages of each other and still adhere to the concept of “scarless” surgery.

[0076] The use of laparoscopic tools can not only help avoid trauma by decreasing removal and reinsertion but can also reduce the number of incision required to perform a procedure. They also reduce the additional time that is not directly spent in helping the patient in the operating room (OR) and thus reduce the patient risk and costs. Jamshidi et al. demonstrated the safety and efficacy of magnetic compression anastomosis (magnamosis) devices for suturless, full-thickness intestinal anastomosis with serosal apposition and without leaks in a pig model. They further comment that

gradient compression is superior to uniform compression. Mechanical integrity of magnetic anastomosis was similar to, if not better than staple or suture counterparts. Endoscopically placed tick internal magnets with external magnetic guidance is a feasible and novel approach to creating gastroenteral anastomosis without abdominal incisions or sutures.

[0077] The IRCAD institute has developed a modular magnetic anastomosis device; the installation of the device requires a limited access compared to its useful surface after deployment. It can be placed accurately and in a minimally invasive fashion in any segment of the digestive tract; it allows realizing bypasses between all hollow viscera; it is also available in all useful sizes by the simple addition of magnetic elements according to the anatomical structure on which it has to be implemented. In its non-deployed shape, the system can be placed inside a small sized channel. It can be placed on a guide-tread and inserted into an access device such as a catheter.

[0078] The present invention relates to an applicator and methods particularly useful for delivery of injection medical device in a minimally invasive single site surgery (MISS), natural orifice transluminal endoscopic surgery or colonoscopy surgery (NOTES™).

[0079] The laparoscopic instruments are functioning as a hopper. In contact with the surface to be deployed, the hopper preserves the pressure on the pneumoperitoneum; using standard instruments before or after stowing according to the alternatives aperture is created; and the device is introduced to the internal organ by a flexible or rigid piston according to the alternatives. The upper parts of these laparoscopic instruments are formed in a similar fashion and a set of valves ensures the sealing and the conservation of the pneumoperitoneum; except for the alternatives presented in FIGS. 26 to 29, where the fixation is assured using aspiration. The principal structure of the alternatives are two tubes: one internal tube enveloped by an external tube with radial or longitudinal relative movement; wherein the relative movement is ordered by a button, a serrated roller or a handle actuating a radial or longitudinal toothed rack; or simply by manual sliding motion of the two tubes as represented in FIGS. 30 to 35. The sliding motion of the external and interior tubes actuates various mechanism of fixation located at the end of the device.

[0080] FIG. 1 to FIG. 4 present one variant of an applicator for the modular anastomosis device; where the delivery instrument is a laparoscopic applicator with an extremity possessing tightness valves maintaining the pneumoperitoneum for inserting or retrieving the various parts of the anastomosis device or tools for the procedure. The main body of the applicator 1.4 is an elongated tube; pliers with chuck jaws are placed on either side of the elongated tube, presented in FIGS. 1.2 and 2.2. The extremity of this elongated tube possesses sharp spikes acting as intermediary chuck jaws for the pliers 1.1 and 3.1. A second beveled and sharpened tube is presented in 1.3, 2.3 and 3.3; this second tube glides inside the first one and is used to cut the wall. The modular anastomosis device is logged into the second tube illustrated in 3.6 and is ejected to the organ to be deployed using a plunger presented in 3.5. FIG. 4 illustrates the modular magnetic anastomosis device with the wire guide ejected from the laparoscopic applicator.

[0081] In a different variant, the laparoscopic applicator possesses a main body with a second internal tube fitted together. FIG. 5 illustrates this form of the device; 5.1 pre-

sents the basis with tightness valves allowing to maintain the pneumoperitoneum for insertion or retrieving the various parts of the modular anastomosis device or tools used to carry out the procedure. FIG. 6 shows the main body of the applicator 6.1, and the internal tube is shown in FIG. 6.2. Extremities of both of these tubes are teeth 6.3 being curved radially and in an opposite direction as to grasp the external wall of the digestive tract by simply rotating both tubes represented in FIG. 7. The teeth are maintained in a closed position with a blocking mechanism using springs or tension ribbons resisting to the opening of the applicator jaws shown in 8.1 and 8.2. The open and closed positions of the applicator are maneuvered by a button or a handle on the external part of the applicator, as illustrated in 5.2.

[0082] The non-deployed modular magnetic anastomosis device requires limited access compared to its useful surface after deployment, and it can be placed inside a small sized channel and be used by being inserted into an operating channel of the endoscope. FIG. 9 illustrates the various parts of such an applicator, composed of a guide tube 9.1 which is placed inside the operating channel of the endoscope to which is fitted a flexible cartridge 9.4 which encloses the modular magnetic anastomosis device. The device is deployed in the transplant organ by injecting it out from the flexible cartridge via a plunger 9.3 that is moved using a cable 9.2. FIG. 10 describes an endoscope 10.1 and the channel 10.2 with the cartridge ejected. FIGS. 11 and 12 illustrate the ejection of the anastomosis device from the cartridge and the final deployed circular modular magnetic anastomosis device.

[0083] A general structure of a laparoscopic applicator is described in FIG. 13 formed by an exterior tube (1), interior tube (2), sealing system (3), actuation system (4), stowing system (5); FIG. 14 is a cross longitudinal view of the applicator.

[0084] A structure of one of the actuation systems is described in FIGS. 15, 16 and 17, wherein the different components that operate the actuation system (4) make a translational movement between (1a) and (2a) by the rotation of serrated roller (9). In an alternative structure of the actuation system, presented in FIG. 18, the rotational movement between (1b) and (2b) by the rotation of the serrated roller (9) and a truncated end (8b) on the toothed circular section (10) is illustrated.

[0085] One variant of a stowing system (5) is described in FIGS. 19 and 20, where the attachment system is through a network of small tooth-needles (11) fixed in the periphery of opposite sites two by two (14) of the internal tube (2a) a thrust at an right angle (12) slides during the actuation of the serrated roller (9) in small release (13) forming the end (15) of the external tube (1a). The contact of the extremities of the internal tube (14) with the external tube (15); teeth (11) leave their housing (13), take the deployed form presented in FIGS. 21 and 22 and for two by two the interior loops clutched to the organ to be fastened.

[0086] The change in stowing part (5) in another variant is presented in FIGS. 23, 24 and 25, wherein the actuation of the internal tube (2a) compared to the external tube (1a) opens and closes a circular network of small grips. The extremity of the internal tube (2a) possess a regular network of holes by which rivets pass (21); each rivet communicates between the internal tube (2a) and the driveshaft (20). The arm (20) articulates two intermediate arms (19a) and (19b) on the axis (18d); these two grip (17a) and (17b) are constrained in the axis of rotation (18a), which is interdependent of the external tube

(1a); in addition they are connected to the arms (19a) and (19b) by rivets (18b) and (18c); displacement of the internal tube (2a) jointly moves the grips (17a) and (17b) and actuates the network of claws.

[0087] In a variant of a laparoscopic device the attachment to the organ is assured by a mechanism of aspiration under vacuum. FIGS. 26, 27, 28, and 29 illustrate such an applicator; the figures describe a unique tubular structure (1d) that replaces the internal and external tubes; a hollow zone (23) linked to a nozzle (22) linked to an external aspiration tube connected to an external device; the extremity of the device (24) under aspiration on a circumferential zone is fixed to the surface to be stowed. FIG. 29 shows the variant with external and internal tubes (1c) and (2c) that are maintained in position by a network of rings (25), which are bored with holes (26) allowing the aspiration under vacuum.

[0088] In another variant of a laparoscopic applicator the aperture for the surgery is carried out in the anatomical organ before fastening the applicator. FIGS. 30 to 35 describe such an applicator; the extremity (1) is divided into several flexible arms (29) with a final pin (30); the small release (28) in the base of (29) guarantees the flexibility of the spacing and the distal pin (30) is inserted in the opening. The actuation process is the sliding of tube (2) into the external tube (1); the arms (29) become deformed elastically and are pushed back radially by tube (2) in order to fasten this applicator to the anatomical structure. An alternative is presented in FIG. 32, where the elastic arms (31) are stems of cylindrical sections, fixed (1) by any means useful and performed to achieve the same function. FIGS. 33, 34 and 35 describe the operational mode.

[0089] A variant of the previous applicator wherein the elastic strains are replaced with rigid elbows is described in FIGS. 36 and 37. In this alternative mode, several bent jaws (32) are fixed to the external tube (1). By a combination of rotation (33) and sliding of the internal tube (2), tube (1) pushes back (32) radially toward the outside and is fastening the instrument to the desired organ.

[0090] The geometry of the two tubes (32) induces a closed position and a central nozzle (34) allows the sliding of a wire-guide.

[0091] A variant of an laparoscopic applicator wherein said applicator is attached to the surface before opening an aperture, is depicted in FIGS. 38, 39 and 40; the external tube (1b) and internal tube (2b) with a rotational move as illustrated in FIG. 38; extremities of the tubes (1b) and (2b) possess a circular network with an equal number of small hooks, respectively (35) and (36) bent one towards the other in such a way that actuation in rotation (2b) relative to (1b) seizes and imprisons the anatomical structure to which the applicator is fastened.

[0092] FIG. 41 presents an alternative applicator for use as a magnetic anastomosis device such as described in WO2013/009886 A1 using a natural orifice, such as the colon. This applicator is formed by an internal tube (37) and an external tube (38); their bases in the shape of a flange (41) and (42) to allow the sliding of (37) in (38) such as in a syringe and dislodging the anastomosis device; a boring (40) in the interior of (38) retains the anastomosis device in a functional position; the push of (41) towards (42) resulting in the ejection of the anastomosis device and tightening (39) at the end of the internal tube.

[0093] FIG. 42 presents an endoscopic variant of the applicator, which consists of a hollow cylindrical cartridge (43)

with a convex extremity enclosing the device to be released; a flexible and extensible opening (44) is at the extremity of the cartridge (43) which is fixed to the ending (49) of a sheath (46), in this sheath circulates a cable (47) by actuating a push rod (40); the cable (47) slides the piston (48) inside of (43) ejecting the device contained in (43).

What is claimed is:

1. An applicator for delivery of an injection medical device during minimal invasive surgery.

2. The applicator of claim 1, wherein the injection device is a modular magnetic anastomosis device.

3. The applicator of claim 1, wherein the applicator is a laparoscopic instrument.

4. The applicator of claim 3, wherein the device comprises: a) an exterior tube, b) an interior tube, c) a sealing system, d) an actuation system, e) a stowing system.

5. The applicator of claim 4, wherein an aperture to the organ is performed prior to stowing the applicator.

6. The applicator of claim 4, wherein an aperture to the organ is performed after fastening the applicator.

7. The applicator of claim 4, wherein the actuation movement is ordered by a button.

8. The applicator of claim 4, wherein the actuation movement is performed by a serrated roller.

9. The applicator of claim 4, wherein the actuation movement is performed by a handle actuating a radial toothed rack.

10. The applicator of claim 4, wherein the actuation movement is performed by a handle actuating a longitudinal toothed rack.

11. The applicator of claim 4, wherein the actuation movement consists of a sliding motion of an internal tube into an external tube.

12. The applicator of claim 4, wherein the fastening to the pneumoperitoneum is performed with a set of valves.

13. The applicator of claim 4, wherein the fastening to the pneumoperitoneum is performed with aspiration.

14. The applicator of claim 12, wherein the fastening to the pneumoperitoneum is performed with pliers with chuck jaws at either side of the elongated tube with sharp spikes.

15. The applicator of claim 12, wherein the fastening to the pneumoperitoneum is performed with teeth being curved radially and in an opposite direction at the extremities of internal and external tubes as to grasp the external wall of the digestive tract by simple rotation of these two tubes.

16. The applicator of claim 12, wherein the fastening to the pneumoperitoneum is performed through small toothed needles fixed in the periphery of opposite sites two by two of the internal tube, a thrust at an right angle slides during the actuation and contact of internal tube with the external tube, teeth leave their housing, take the deployed form.

17. The applicator of claim 12, wherein the fastening to the pneumoperitoneum is performed by actuation of the internal tube relative to the external tube, opens and closes a circular network of small grips, the internal tube possess a regular network of holes by which rivets pass; each rivet communicates between the tubes a the driveshaft articulating two arms interdependent of the external tube with the actuation of the internal tube activating the network of claws.

18. The applicator of claim 13, wherein the internal tube and external tube are connected except the hollow zone linked to an external aspiration device creating a circumferential zone under aspiration stowed to the organ.

19. The applicator of claim 13, wherein the internal tube and external tube are maintained together by a network of rings which allows the aspiration under vacuum to fasten the laparoscopic instrument.

20. The applicator of claim 6, wherein the extremity of the external tube is divided into flexible arms with a final pin with small release in the base.

21. The applicator of claim 20, wherein sliding the internal tube inside the external tube causes deformed elastic arms to be pushed radially outward by the internal tube.

22. The applicator of claim 6, wherein elastic arms are fixed in the periphery of the external tube as stems of a cylindrical section.

23. The applicator of claim 6, wherein rigid elbows with bent jaws are placed in the periphery of external tube.

24. The applicator of claim 23, wherein the anatomical structure is imprisoned between the hooks after rotation of the external and internal tubes.

25. The applicator of claim 1, wherein the injection medical device is used through a natural orifice, such as the colon.

26. The applicator of claim 25, wherein the applicator is formed by an internal tube, an external tube with a flange shape base and both act as a syringe dislodging the device.

27. The applicator of claim 1, wherein an injection medical device is used as an endoscopic instrument.

28. The applicator of claim 27, wherein the injection device is enclosed in a flexible cartridge at the extremity of a guide tube.

29. The applicator of claim 27, wherein the injection device is enclosed in a hollow cylindrical cartridge with a convex flexible extremity.

30. The applicator of claim 29, wherein the device is fixed to the end of sheath in the extremity of the cartridge.

31. The applicator of claim 30, wherein a push rod actuates the cable of a sheath.

32. The applicator of claim 31, wherein the cable slides the inside piston ejecting the device.

33. The applicator of claim 1, wherein the device is ejected with a piston.

34. The applicator of claim 33, wherein the piston is rigid.

35. The applicator of claim 33, wherein the piston is flexible.

* * * * *

专利名称(译)	模块化磁性吻合装置的应用		
公开(公告)号	US20150342608A1	公开(公告)日	2015-12-03
申请号	US14/654643	申请日	2013-12-20
[标]申请(专利权)人(译)	IRCAD		
申请(专利权)人(译)	IRCAD		
当前申请(专利权)人(译)	IRCAD		
[标]发明人	HERNANDEZ JUAN		
发明人	HERNANDEZ, JUAN		
IPC分类号	A61B17/11 A61B17/34		
CPC分类号	A61B17/1114 A61B17/3421 A61B17/3468 A61B2017/00876 A61B2017/3488 A61B2017/1139 A61B2017/306 A61B2017/3484 A61B2017/1117		
优先权	61/740865 2012-12-21 US 61/794782 2013-03-15 US		
其他公开文献	US10682143		
外部链接	Espacenet USPTO		

摘要(译)

本公开提供了用于实施模块化磁性吻合装置的施加器的描述。在一个实施例中，输送装置是用于MISS手术的腹腔镜器械，在另一个实施例中，输送装置是用于NOTES手术的内窥镜检查或结肠镜检查器械。

