



US009681890B2

(12) **United States Patent**
Ahn

(10) **Patent No.:** **US 9,681,890 B2**
(45) **Date of Patent:** **Jun. 20, 2017**

(54) **VAGINAL ENDOSCOPIC PORT UNIT
MODULE**

(71) Applicant: **KOREA UNIVERSITY RESEARCH
AND BUSINESS FOUNDATION,**
Seoul (KR)

(72) Inventor: **Ki Hoon Ahn,** Seoul (KR)

(73) Assignee: **KOREA UNIVERSITY RESEARCH
AND BUSINESS FOUNDATION,**
Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 97 days.

(21) Appl. No.: **14/411,366**

(22) PCT Filed: **Jun. 28, 2013**

(86) PCT No.: **PCT/KR2013/005784**

§ 371 (c)(1),

(2) Date: **Dec. 24, 2014**

(87) PCT Pub. No.: **WO2014/003496**

PCT Pub. Date: **Jan. 3, 2014**

(65) **Prior Publication Data**

US 2015/0209073 A1 Jul. 30, 2015

(30) **Foreign Application Priority Data**

Jun. 28, 2012 (KR) 10-2012-0069954

(51) **Int. Cl.**

A61B 1/00 (2006.01)

A61B 17/34 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **A61B 17/3423** (2013.01); **A61B 1/00154**
(2013.01); **A61B 1/303** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC ... A61B 1/00154; A61B 1/303; A61B 1/3132;
A61B 17/3423; A61B 17/0218; A61B
17/42; A61B 2017/345; A61B 2017/3449
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,187,178 B2 5/2012 Bonadio et al.
2003/0085373 A1 5/2003 Dehdashtian
(Continued)

FOREIGN PATENT DOCUMENTS

CN 103405251 A 11/2013
EP 1345648 9/2003

(Continued)

OTHER PUBLICATIONS

European Search Report completed on Dec. 23, 2015.


Primary Examiner — Timothy J Neal

(74) *Attorney, Agent, or Firm* — Rabin & Berdo, P.C.

(57) **ABSTRACT**

The present invention relates to a laparoscopic port unit module in which one end thereof and the other end are placed inside and outside the human body, respectively, through the vaginal inlet, and provides a vaginal endoscopic port unit module comprising: an outer unit of which the end is exposed to the outside of the vaginal inlet and which comprises one or more outer ports allowing the entry of a surgical instrument including an endoscope; an inner unit formed at the inner wall of the vaginal canal so as to be placed at an incision region connected to the abdominal cavity and allowing the surgical instrument entering through the outer port to come in and out of the abdominal cavity; and a runner unit for connecting the outer unit and the inner unit.

14 Claims, 10 Drawing Sheets

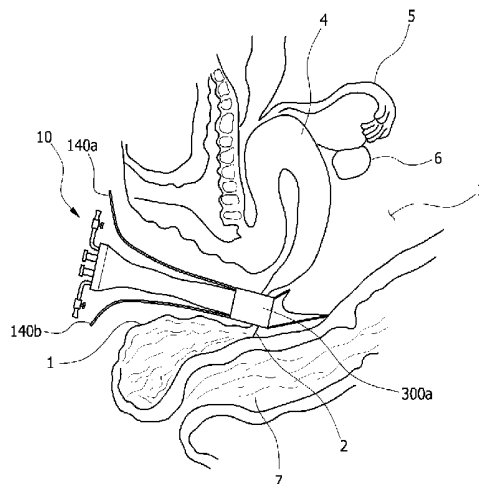

(51) **Int. Cl.**

A61B 1/303 (2006.01)
A61B 1/313 (2006.01)
A61B 17/42 (2006.01)
A61B 17/02 (2006.01)
A61B 1/32 (2006.01)
A61B 17/00 (2006.01)
A61M 39/06 (2006.01)
A61B 90/40 (2016.01)

(52) **U.S. Cl.**

CPC *A61B 1/3132* (2013.01); *A61B 17/0218*
 (2013.01); *A61B 17/42* (2013.01); *A61B*
17/3431 (2013.01); *A61B 17/3462* (2013.01);
A61B 17/3498 (2013.01); *A61B 90/40*
 (2016.02); *A61B 2017/00278* (2013.01); *A61B*
2017/00473 (2013.01); *A61B 2017/00477*
 (2013.01); *A61B 2017/00862* (2013.01); *A61B*
2017/00867 (2013.01); *A61B 2017/345*
 (2013.01); *A61B 2017/347* (2013.01); *A61B*
2017/3425 (2013.01); *A61B 2017/3441*
 (2013.01); *A61B 2017/3443* (2013.01); *A61B*
2017/3449 (2013.01); *A61B 2017/3466*
 (2013.01); *A61B 2017/3488* (2013.01); *A61B*
2017/4216 (2013.01); *A61B 2017/4233*
 (2013.01); *A61B 2217/007* (2013.01); *A61M*
2039/0646 (2013.01)

(58) **Field of Classification Search**

USPC 600/104, 114, 208
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2008/0287740	A1	11/2008	Weitzner et al.	
2009/0036745	A1	2/2009	Bonadio et al.	
2009/0112062	A1	4/2009	Bakos	
2010/0204548	A1	8/2010	Bonadio et al.	
2010/0217087	A1	8/2010	Bonadio et al.	
2010/0249694	A1	9/2010	Choi et al.	
2010/0292541	A1	11/2010	Hashiba et al.	
2011/0009704	A1	1/2011	Marczyk et al.	
2011/0071359	A1	3/2011	Bonadio et al.	
2011/0105850	A1*	5/2011	Voegelé	A61B 1/303 600/207
2012/0083661	A1*	4/2012	Rockrohr	A61B 17/3421 600/208
2013/0060093	A1	3/2013	Bonadio et al.	

FOREIGN PATENT DOCUMENTS

KR	10-0936926	B1	1/2010
KR	10-2011-0111648	A	10/2011
KR	10-2011-0138696	A	12/2011
WO	WO-2010/009070	A1	1/2010
WO	WO-2011/162491	A2	12/2011

* cited by examiner

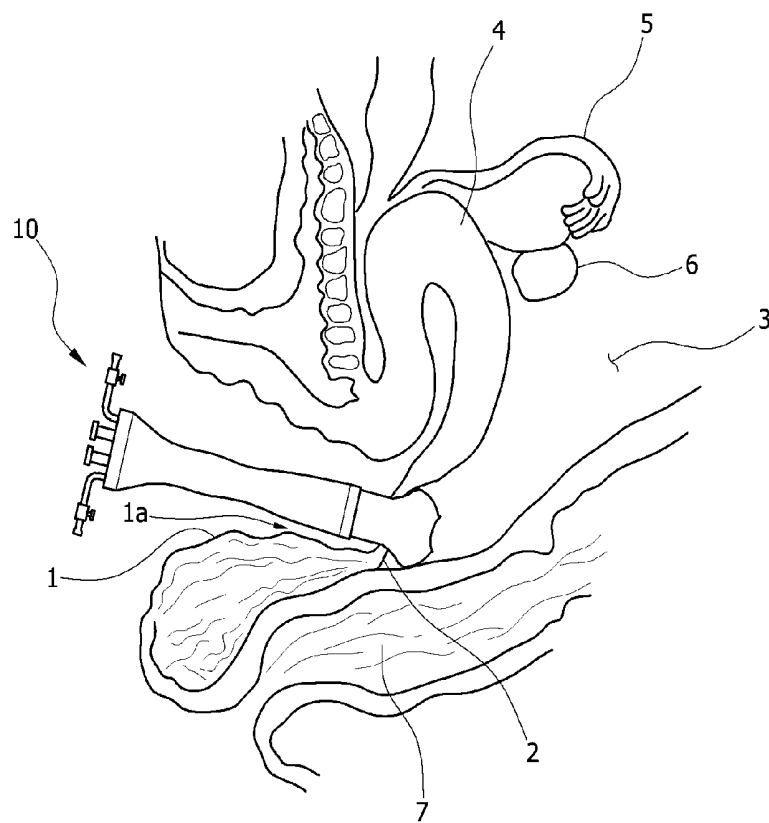


FIG. 1

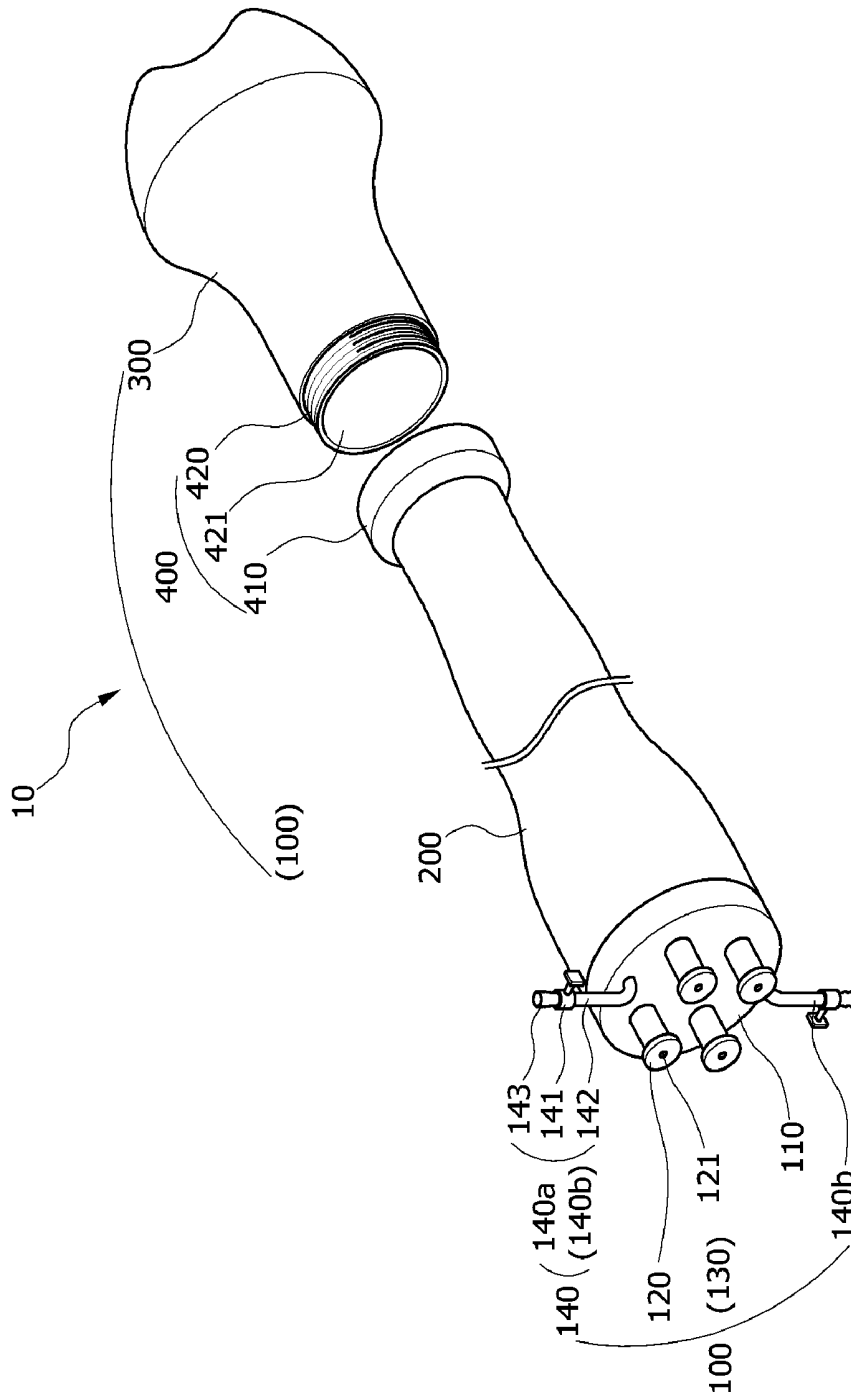


FIG. 2

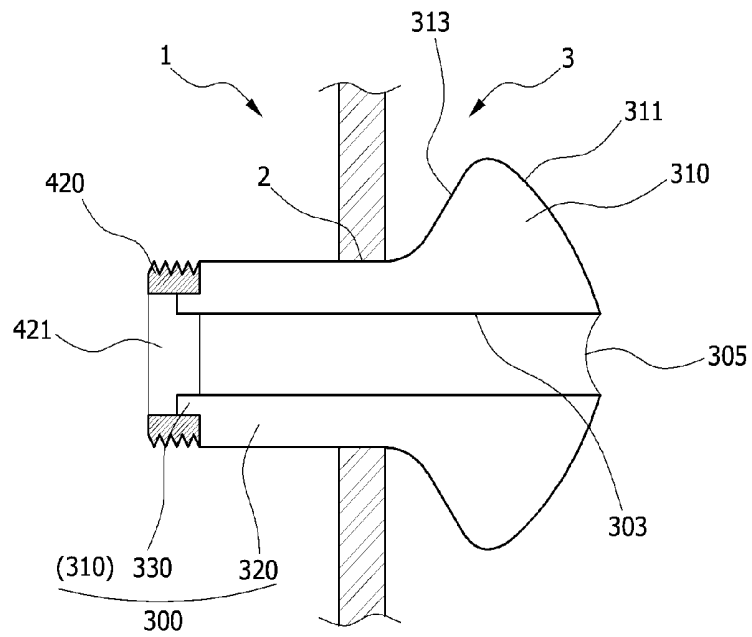


FIG. 3

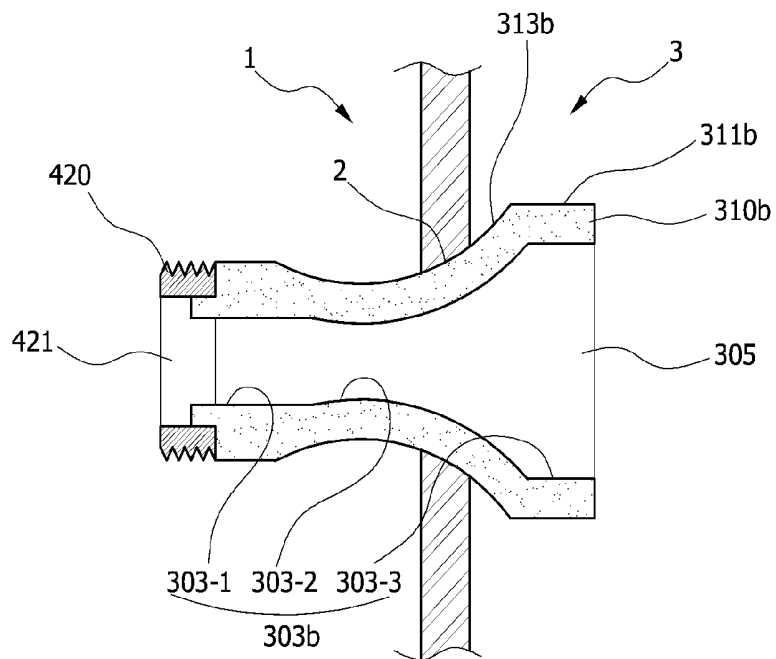


FIG. 4

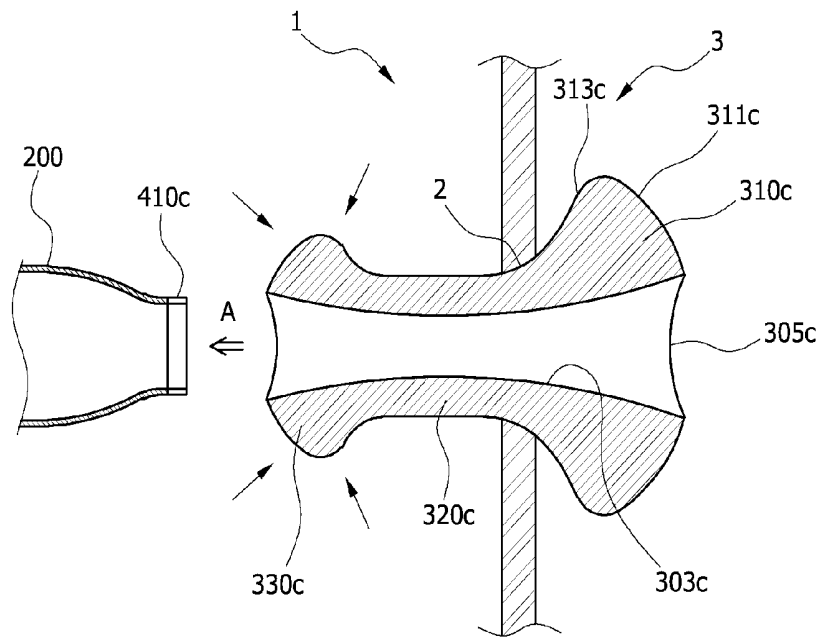


FIG. 5

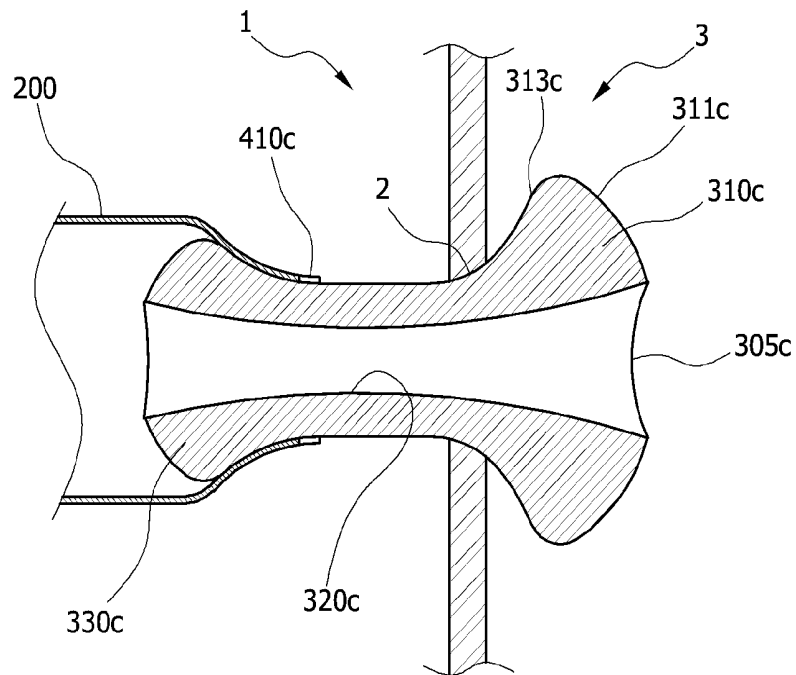


FIG. 6

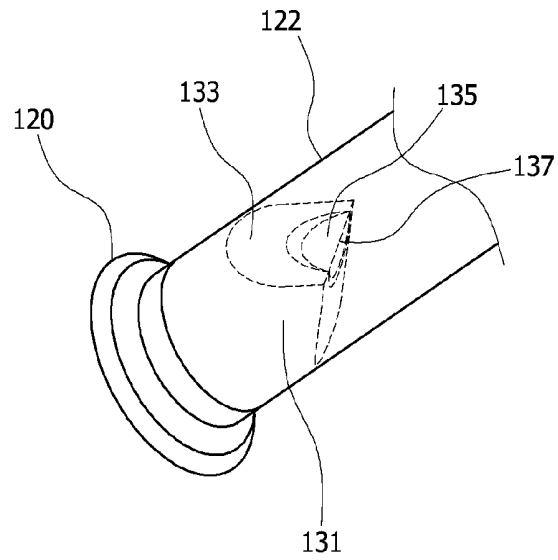


FIG. 7

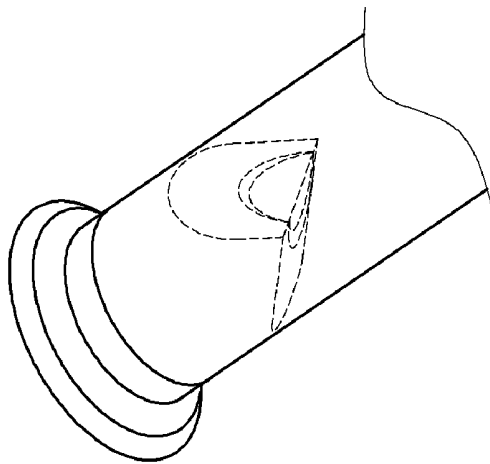


FIG. 8

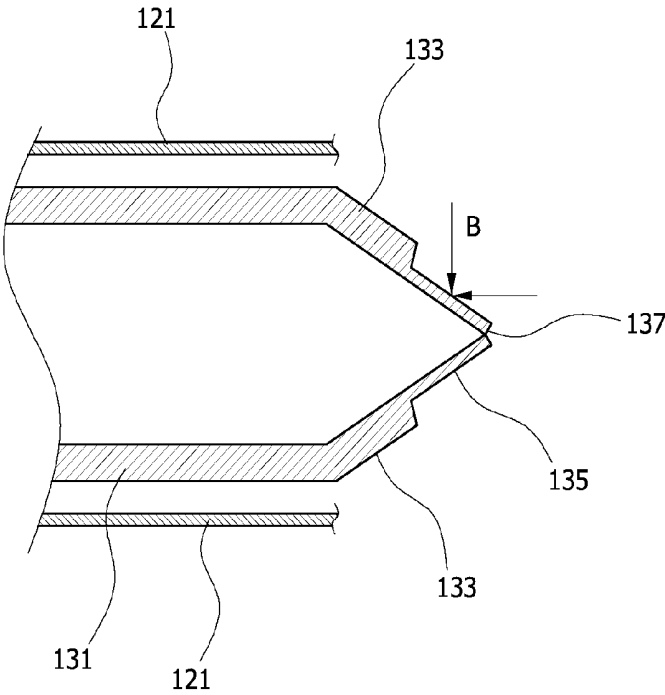


FIG. 9

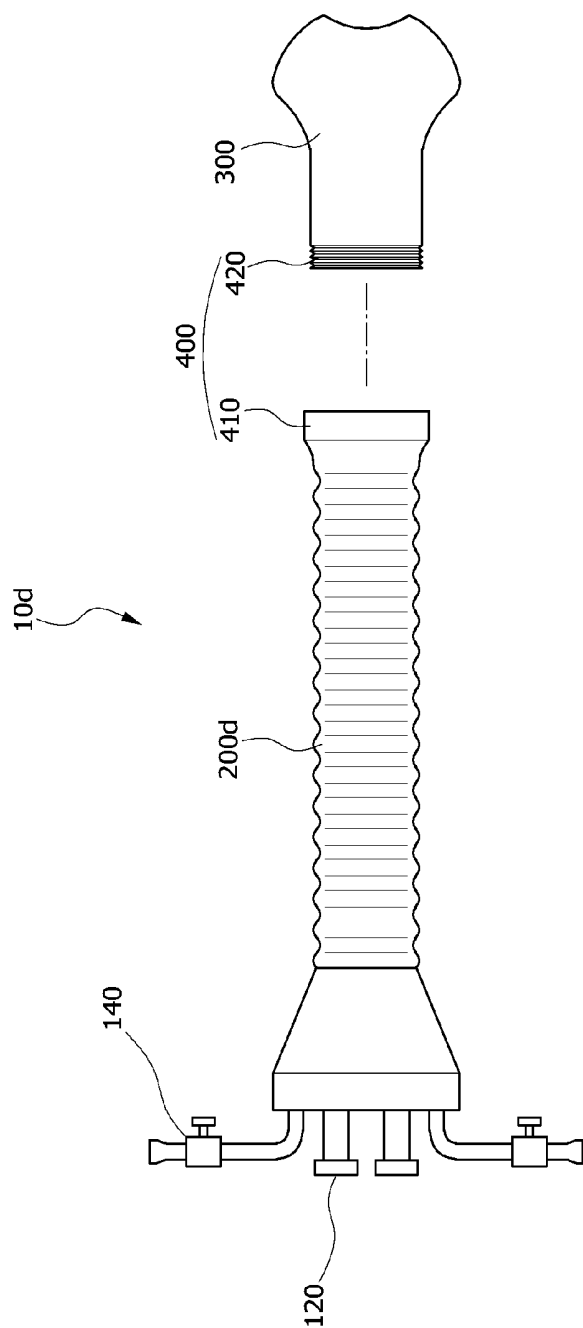


FIG. 10

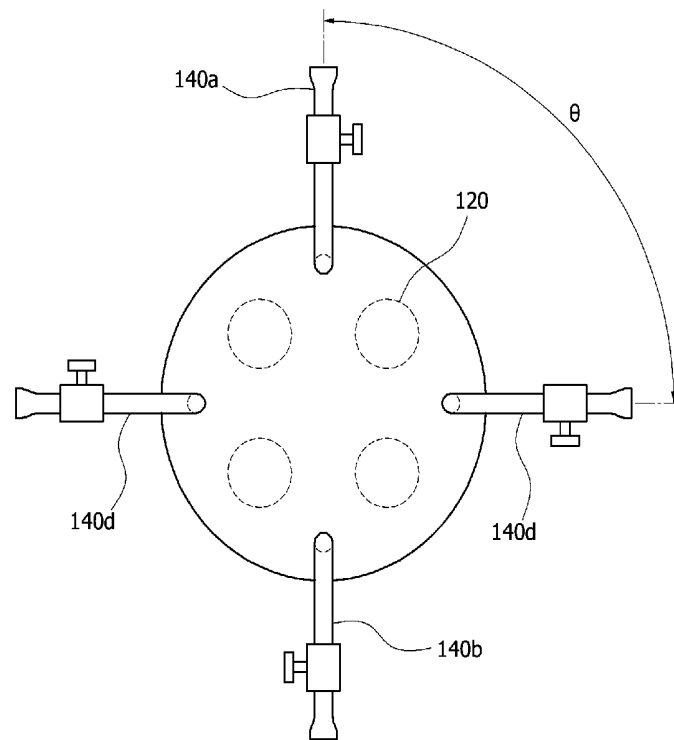


FIG. 11

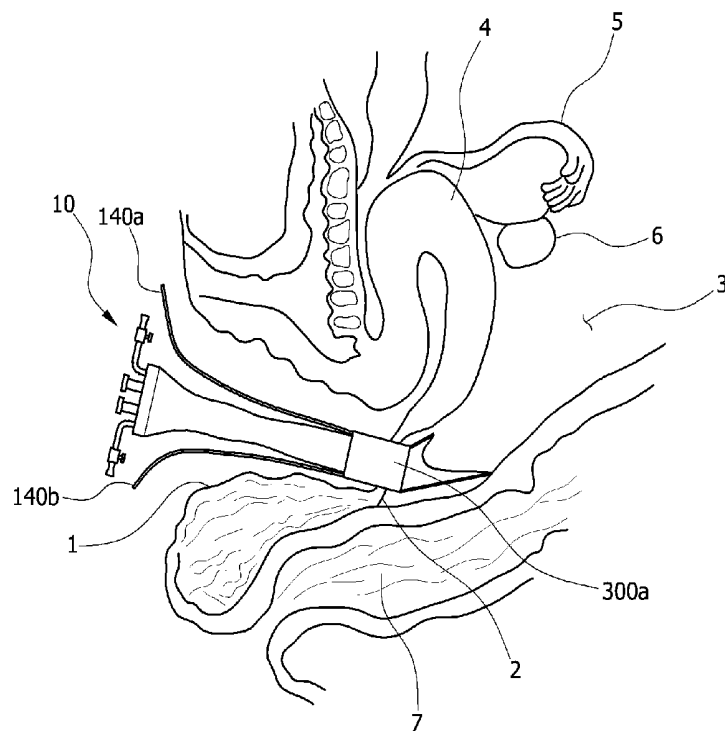


FIG. 12

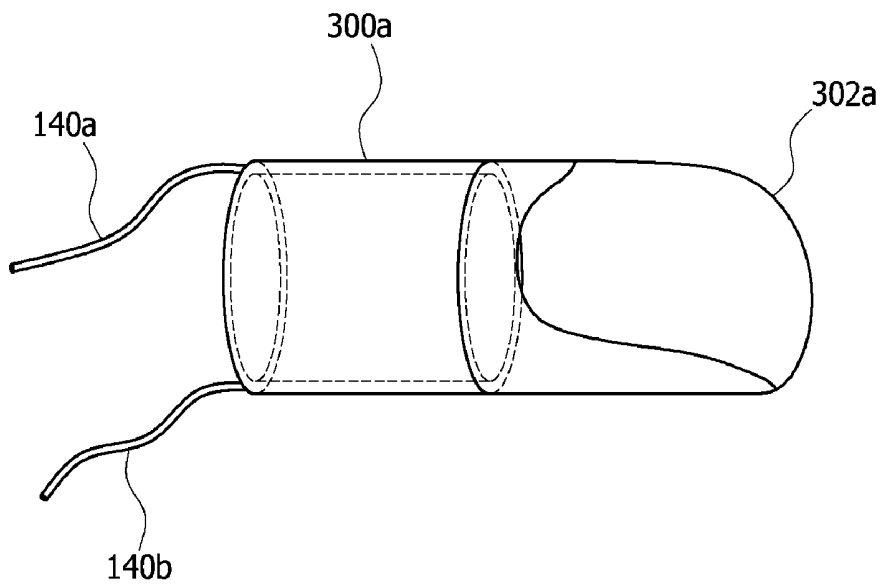


FIG. 13

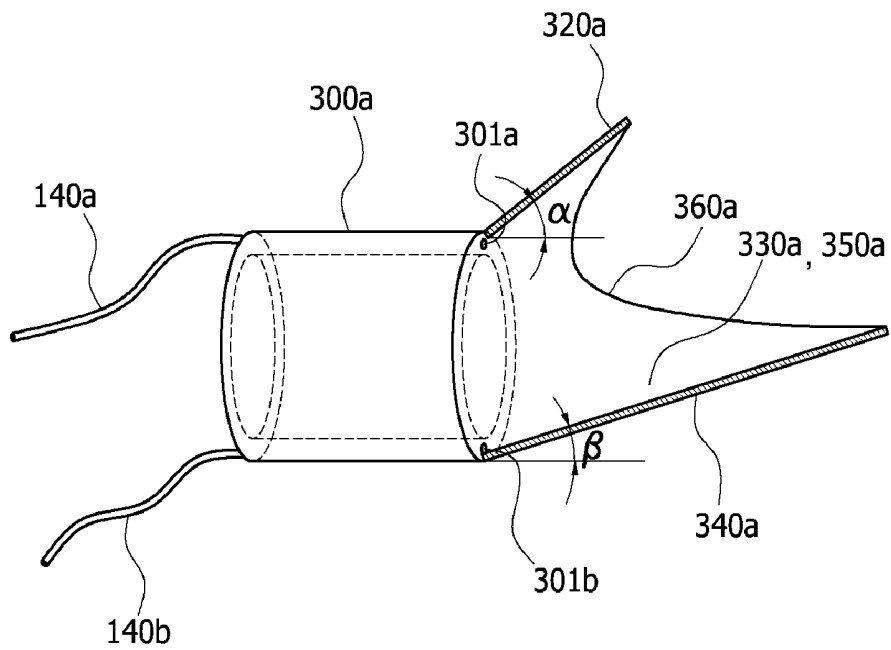


FIG. 14

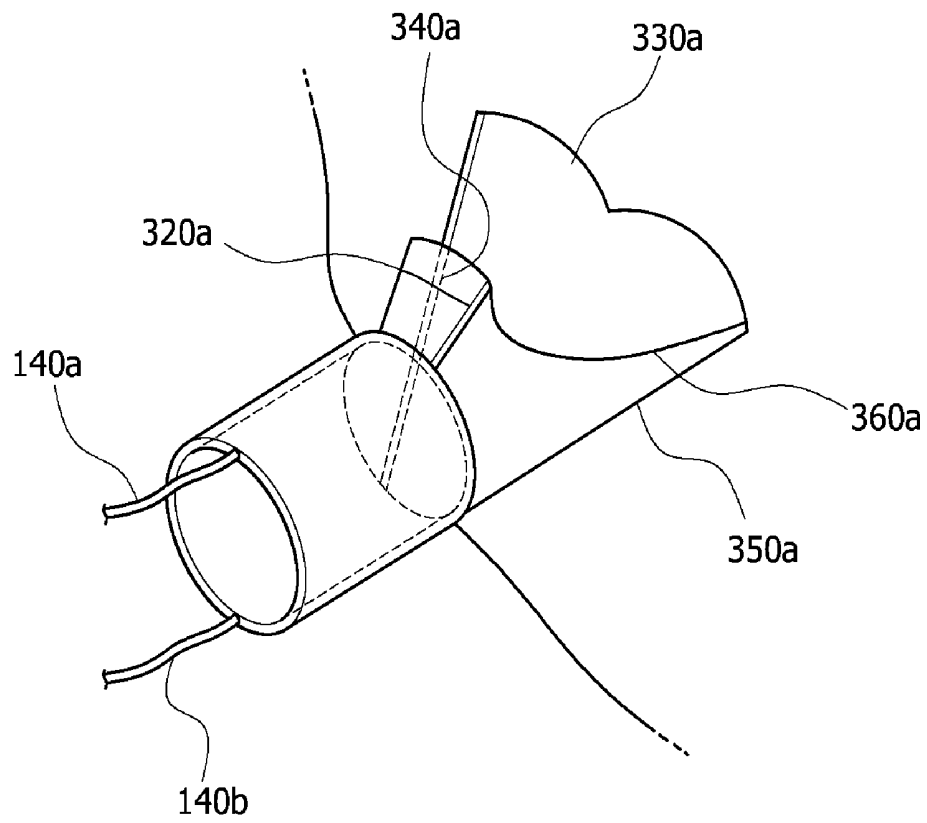


FIG. 15

1

VAGINAL ENDOSCOPIC PORT UNIT MODULE

TECHNICAL FIELD

The present invention relates to a vaginal endoscopic port unit module, and more particularly, to a medical instrument including a port that induces the entry of a surgical instrument such as an endoscope for performing a minimally invasive surgery.

BACKGROUND ART

Along with the development of medical technology and equipment, a variety of surgical methods have been proposed. In particular, many advancements are being made in the research and equipment of a minimally invasive surgery technique using an endoscope in the field of a laparoscopic or pelviscopic surgery.

When a lesion occurs in any organ inside an abdominal cavity, the frequency of a laparotomy performed for the treatment of the lesion is remarkably reduced by virtue of the advancement of the minimally invasive surgery technique. A typical laparoscopic surgery requires that one or more openings should be created into the abdomen. This laparoscopic surgery is advantageous in that the magnitude and intensity of pain felt by a patient is reduced and any vestige of a wound is also reduced as compared to the laparotomy.

However, the conventional laparoscopic surgery entails a problem in that an artificial scar remains on the surface of the skin of the patient along with any pain. As a part of the minimally invasive surgery technique to minimize the vestige and the pain, a single-port laparoscopic surgery is actively performed in which the surgeon operates through the patient's umbilicus as a single access point. Nevertheless, the single-port laparoscopic surgery still involves a problem in that pain and scar may remain due to an increase in the size of a wound. Thus, it can be contemplated that the most minimally invasive surgery technique is a surgery performed using a body region or organ such as vagina, anus, urethra, mouth, or nose, which is innately formed when human infant are born.

However, in case of the innately formed body region or organ such as vagina, anus, urethra, mouth, or nose, in order for a patient to undergo an operation for an organ inside the abdominal cavity, his or her intestine or urinary bladder must be perforated, which involves a risk that the contents of the intestine or urine will be exposed to the inside of the abdominal cavity.

DISCLOSURE OF INVENTION

Technical Problem

Accordingly, the present invention has been made to solve the above-mentioned problems occurring in the prior art, and it is an object of the present invention to provide a vaginal endoscopic port unit module for laparoscopic surgery, which can gain access into the abdominal cavity via a patient's vagina to minimize her pain and scar in performing a minimally invasive surgery on an organ lesion inside the abdominal cavity.

Technical Solution

To achieve the above object, in one aspect, the present invention provides a vaginal endoscopic port unit module

2

for laparoscopic surgery, which is positioned at one end thereof inside the human body and at the other end thereof outside the human body through a vaginal orifice, the module including: an outer unit whose end is disposed so as to be exposed to the outside of the vaginal orifice and which includes one or more outer ports configured to permit entry of a surgical instrument including an endoscope; an inner unit disposed at an incision site formed on the inner wall of the vaginal canal so as to fluidically communicate with the abdominal cavity, and configured to include an inner port permitting introduction and withdrawal of the surgical instrument introduced thereto through the outer port into and from the abdominal cavity; and a runner unit configured to connect the outer unit and the inner unit with each other.

In the vaginal endoscopic port unit module, the inner unit may be implemented as an elastic structure so as to be inserted into the incision site formed on the inner wall of the vaginal canal.

In the vaginal endoscopic port unit module, the inner unit may include: an inner unit header configured to pass through the incision site **2** formed on the inner wall of the vaginal canal and then to be introduced into the abdominal cavity; an inner unit body connected at one end thereof to the inner unit header **310** and configured such that the outer periphery thereof can be maintained in a contact state with the incision site formed on the inner wall of the vaginal canal; and an inner unit tail connected to the other end of the inner unit body **320** and configured such that it can be disposed at the vaginal canal.

In the vaginal endoscopic port unit module, a maximum effective radius of the inner unit header may be larger than that of the inner unit body when viewed from a plane perpendicular to a longitudinal direction passing through the inner unit body and the inner unit header.

In the vaginal endoscopic port unit module, the inner unit header may further include a header stopper formed at an end thereof, which is oriented toward the inner unit tail, so as to be in close contact with the inner surface of the incision site formed on the inner wall of the vaginal canal if the inner unit header is stretched toward the outer unit.

In the vaginal endoscopic port unit module, one end of the inner unit header, which is opposite to the header stopper, may have a conical structure for allowing the inner unit header to be easily introduced through the incision site formed on the inner wall of the vaginal canal.

In the vaginal endoscopic port unit module, one end of the inner unit header, which is opposite to the header stopper, may have a diffuser structure that is widened after the insertion thereof into the incision site formed on the inner wall of the vaginal canal.

In the vaginal endoscopic port unit module, the module may further include a connector unit interposed between the runner unit and the inner unit so as to connect the runner unit and the inner unit with each other.

In the vaginal endoscopic port unit module, the connector unit may have a threaded ring structure, and may include a runner connector disposed at the runner unit and an inner connector disposed at the inner unit so that the inner connector can be engagedly fastened to the runner connector.

In the vaginal endoscopic port unit module, the module may further include a connector unit of a ring structure disposed at an end of the runner unit in such a manner as to be interposed between the runner unit and the inner unit so as to connect the runner unit and the inner unit with each other, and the inner unit tail of the inner unit can be inserted into the runner unit through the ring structure.

3

In the vaginal endoscopic port unit module, the outer port may include an outer port flap configured to permit inflow of fluid to the runner unit while preventing outflow of the fluid from the runner unit, the outer port flap having an inclined portion formed at an end thereof so as to be sharply pointed toward the runner unit, the inclined portion having a pair of sloping grooves formed on the outer surface thereof to increase the surface area of the inclined portion.

In another aspect, the present invention provides a vaginal endoscopic port unit module for laparoscopic surgery, which is positioned at one end thereof inside the human body and at the other end thereof outside the human body through a vaginal orifice, the module including: an outer unit whose end is disposed so as to be exposed to the outside of the vaginal orifice and which includes one or more outer ports configured to permit entry of a surgical instrument including an endoscope; an inner unit disposed at an incision site formed on the inner wall of the vaginal canal so as to fluidically communicate with the abdominal cavity, and configured to permit introduction and withdrawal of the surgical instrument introduced thereto through the outer port into and from the abdominal cavity; and a runner unit configured to connect the outer unit and the inner unit with each other, wherein the inner unit includes an excised tissue guide part for guiding an excised tissue inside the abdominal cavity.

Advantageous Effects

The vaginal endoscopic port unit module according to the embodiments of the present invention as constructed above have the following advantageous effects.

First, the vaginal endoscopic port unit module according to an embodiment of the present invention enables a laparoscopic surgery using the minimally invasive surgery technique to be performed on a body organ innately formed inside the abdominal cavity, thereby minimizing a patient's pain through the minimization of the incision site.

Second, the vaginal endoscopic port unit module according to an embodiment of the present invention enables the minimally invasive surgery technique to be applied to an innately formed body organ so that scar is excluded on the patient's skin even after a surgical operation due to absence of a wound on the surface of the incision site during the surgery procedure, thereby providing an excellent aesthetic effect.

Third, the vaginal endoscopic port unit module according to an embodiment of the present invention enables the minimally invasive surgery technique to be applied to an innately formed body organ so that a patient's admission period can be minimized after a laparoscopic surgery.

Fourth, the vaginal endoscopic port unit module according to an embodiment of the present invention enables the minimally invasive surgery technique to be applied to an innately formed body organ so that a patient's admission period and pain can be minimized, and a separate aesthetic treatment is excluded after a laparoscopic surgery, thereby minimizing the treatment cost of the patient.

Fifth, the vaginal endoscopic port unit module according to an embodiment of the present invention enables smooth withdrawal of excised tissue through the excised tissue guide part during a surgical procedure.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will be apparent from the following

4

detailed description of the preferred embodiments of the invention in conjunction with the accompanying drawings, in which:

FIG. 1 is a diagrammatic view illustrating a state in which a vaginal endoscopic port unit module according to an embodiment of the present invention is introduced into a human body;

FIG. 2 is a schematic perspective view illustrating a vaginal endoscopic port unit module according to an embodiment of the present invention is introduced into a human body;

FIG. 3 is a schematic partial cross-sectional view illustrating an inner unit of a vaginal endoscopic port unit module according to an embodiment of the present invention is introduced into a human body;

FIG. 4 is a schematic partial cross-sectional view illustrating another example of an inner unit of a vaginal endoscopic port unit module according to an embodiment of the present invention is introduced into a human body;

FIGS. 5 and 6 are schematic partial cross-sectional views illustrating another modification of an inner unit and a connector unit of a vaginal endoscopic port unit module according to an embodiment of the present invention is introduced into a human body before and after the connection of the inner unit to a runner unit;

FIGS. 7 to 9 are a schematic state view and a partial cross-sectional view illustrating before and after the operation of an outer port flap inside an outer port of an outer unit of a vaginal endoscopic port unit module according to an embodiment of the present invention;

FIG. 10 is a schematic side view illustrating another modification of a runner unit of a vaginal endoscopic port unit module according to an embodiment of the present invention;

FIG. 11 is a front view illustrating another modification of a outer inflow/outflow line part of an outer unit of a vaginal endoscopic port unit module according to an embodiment of the present invention;

FIGS. 12 to 15 illustrate a schematic state view, and a partial perspective view of a vaginal endoscopic port unit module according to another embodiment of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Now, preferred embodiments of a vaginal endoscopic port unit module according to the present invention will be described hereinafter in detail with reference to the accompanying drawings. However, the present invention is not limited to embodiments disclosed below, but may be implemented in various different forms. Embodiments are provided only for illustrative purposes and for full understanding of the scope of the present invention by those skilled in the art.

A vaginal endoscopic port unit module 10 for laparoscopic surgery according to an embodiment of the present invention is introduced into a human body through a vaginal orifice and then is disposed at an incision site formed on the inner wall of the vaginal canal to allow the vaginal canal to fluidically communicate with the abdominal cavity so that a surgical instrument including an endoscope can enter the abdominal cavity via the vaginal canal.

The vaginal endoscopic port unit module 10 according to an embodiment of the present invention includes an outer unit 100, a runner unit 200, and an inner unit 300. The vaginal endoscopic port unit module 10 can be introduced

into the vaginal canal **1a** via the vaginal orifice **1**. An incision site **2** is formed on the inner wall of the vaginal canal **1a** so that the inner unit **300** is disposed at the incision site **2**. A surgical instrument such as an endoscope can be inserted into the vaginal canal **1a** through the outer unit **100** positioned at the outside of the vaginal canal **1a**, and can be introduced into the abdominal cavity **3** via the runner unit **200** and the inner unit **300**. A surgery can be performed on an organ such as uterus **4**, uterine tube/fallopian tube **5**, or ovary **6** by means of the surgical instrument introduced into the abdominal cavity **3**. Although female gynecological organs have been illustrated and described in this embodiment, the present invention can be applied to various body organs, which enable easy access to the abdominal cavity by achieving the introduction of the surgical instrument into the abdominal cavity via the inner wall of the vaginal canal. In view of this fact, the laparoscope minimally invasive surgery can be performed on various body organs including intraperitoneal and retroperitoneal organs such as gastrointestinal tract including appendix, gallbladder, and kidneys, besides the female gynecological organs.

The outer unit **100** is disposed at an end thereof at the outside of a vaginal orifice and includes one or more outer ports **120** that allow for entry of a surgical instrument including an endoscope (not shown). The outer unit **100** includes an outer housing **110** and one or more outer ports **120**.

The outer housing **110** is connected to an end of the runner unit **200** so that the internal space of the runner unit **200** which will be described later can be separated from the external space of the runner unit **200**. One or more outer ports **120** are formed on one surface of the outer housing **110**.

The outer ports **120** allow for entry of surgical instruments such as an endoscope (not shown) and the like so that the surgical instruments can be introduced into the abdominal cavity via the runner unit **200** and the inner unit **300**. Each of the outer ports **120** has a through-hole **121** formed at the center thereof so that a surgical instrument such as an endoscope (not shown) can be inserted and mounted in the module through the through-hole **121**.

The outer port **120** is protrudingly formed on one surface of the outer housing **110** and includes an outer port line **122** formed extending from the outer housing **110** in a tightly sealed state. An outer port flap **130** is disposed in the outer port line **122**. The outer port flap **130** (see FIG. 7) permits the introduction of a surgical instrument such as an endoscope (not shown) introduced into the outer port **120** through the through-hole **121** of the outer port **120** into the runner unit **200** while preventing the outflow of blood, infusion solution, body fluid, some tissues, and the like from the abdominal cavity, and the outflow of gas injected for delivery of light to the inside of the abdominal cavity, or acquisition of image information or performance of surgery in the abdominal cavity through the outer port **120**.

The outer port flap **130** which is disposed in the outer port line **122** includes a flap body **131** and an opening portion **137**. The flap body **131** has a structure in which an inner portion of the flap body **131** is connected to an end thereof where the through-hole **121** is formed inside the outer port line **122** of the outer port **120**. The opening portion **137** has a structure in which it is maintained in a closed state at normal times but is widened to a given degree of opening by an external force. In other words, as shown in FIGS. 7 and 8, the opening portion **137** is maintained in a closed state at normal times whereas if a certain surgical instrument is introduced into the outer port **120** through the through-hole

121 and a pressure is formed at the through-hole **121** side of the flap body **131**, the flap body **131** is deformed to take a structure in which the opening portion **137** is naturally opened.

As such, the flap body **131** is disposed inside the outer port **120** so as to function to prevent leakage of body fluid or gas as mentioned above by dividing a space.

The outer port flap **130** has an inclined portion **133** formed at an end thereof, which is opposite to the through-hole **121**, so as to be sharply pointed toward the runner unit **200**. By virtue of this configuration of the inclined portion **133**, the opening portion **137** of the outer port flap **130** is prevented from being widened by being pressed by a pressure of body fluid or gas from the runner unit **200** and is maintained in a closed state. In addition, the inclined portion **133** has a pair of sloping grooves **135** formed on the outer surface thereof so as to be oriented toward the runner unit **200**. As shown in FIGS. 7 to 9, the sloping grooves **135** are formed on the outer surface of the inclined portion **133** so as to take a structure of increasing the pressurized area of the sloping grooves **135**, which is indicated by an arrow B, by the pressure of body fluid or gas from the runner unit **200**, thereby promoting the maintenance of a state in which the opening portion **137** is automatically closed. Further, a region where the sloping groove **135** is formed may have a thickness smaller than that of the inclined portion **133** except the sloping groove, if necessary, so that the region where the sloping groove **135** is formed has a greater possibility of being deformed than the remaining region of the inclined portion **133** other than the sloping groove even after the introduction of the surgical instrument into the outer port **120**. Thus, the degree of opening of the opening portion **137** can be minimized by body fluid or gas from the runner unit **200**, thereby preventing or minimizing leakage of the body fluid or gas through the outer port **120**.

The outer unit **100** can include an outer inflow/outflow line part **140**; **140a**, **140b**. The outer inflow/outflow line part **140**; **140a**, **140b** preferably has a structure in which at least two outer inflow/outflow line parts are arranged so as to be opposed to each other. In other words, the outer inflow/outflow line part **140** includes a line body **142**, a line port **143**, and a line valve **141**. The line body **142** is connected at one end thereof to the outer housing **110** and has the line port **143** formed at the other end thereof. The line valve **141** is disposed on a line of the line body **142** so that the fluidic communication between the internal space of the outer unit **100** and the outside through the line port **143** can be controlled. The line port **143** of the outer inflow/outflow line part **140** is connected to a gas supply unit (not shown) so that gas can be supplied into the abdominal cavity through the outer unit **100**, the runner unit **200**, and the inner unit **300**, or body fluid flowed out of the body region such as the abdominal cavity and then flowed into the runner unit **200** can be discharged to the outside. In the case where the outer inflow/outflow line part **140** is provided in plural numbers, if necessary, smooth inflow and outflow of gas and liquid can be achieved simultaneously through an opposed arrangement of the plural outer inflow/outflow line parts **140**. In addition, the outer inflow/outflow line part can be provided in plural numbers, if necessary, in which case, the plural inflow/outflow line parts **140a**, **140b**, **140c**, and **140d** form an equiangularly divided arrangement structure so that outflow of body fluid and inflow of gas can be selectively performed in an easier manner in response to a change in the engagement state of a connector unit.

The runner unit **200** is connected at one end thereof to the outer housing **110** of the outer unit **100**, and is made of a

flexible material so that smooth introduction of the runner unit **200** into the vaginal canal **1a** can be ensured and damage of the inner wall of the vaginal canal can be prevented. The runner unit **200** is connected at the other end thereof to the inner unit **200** side. Although having not definitely been described in this embodiment, the runner unit may have a structure in which it is fixedly mounted to the outer unit so that the runner unit and the outer unit are formed integrally with each other. The runner unit may be constructed in various manners, such as taking a structure in which the runner unit is connected to the outer unit by means of a separate connector unit, if necessary.

The inner unit **300** has a structure in which it can be inserted into the incision site **2** formed on the inner wall of the vaginal canal **1a**. In the case where the inner unit **300** is disposed at the incision site **2**, one end thereof is positioned at the abdominal cavity side and the other end thereof is positioned inside the vaginal canal **1**. The inner unit **300** includes an inner port **305**. The inner port **305** permits introduction and withdrawal of a surgical instrument such as an endoscope introduced thereto through the outer unit **100** into and from the abdominal cavity **3**.

The inner unit **300** is preferably made of a certain elastic material so as to prevent the inner unit **300** from undesirably escaping from the incision site **2** formed on the inner wall of the vaginal canal while accomplishing the insertion of the inner unit **300** into the incision site **2**. In other words, in the case where the inner unit **300** is disposed at the incision site **2**, a structure can be easily implemented in which a front end of the inner unit **300** is inserted into the incision site **2** in an elastically deformed state and is introduced into the abdominal cavity **3**, and the other end of the inner unit **300** is disposed at the vaginal canal **1a**.

As shown in FIG. 3, the inner unit **300** according to an embodiment of the present invention includes an inner unit header **310**, an inner unit body **320**, and an inner unit tail **330**. The inner port **305** of the inner unit **300** is formed in the inner unit **300** in such a manner as to penetrate through the inner unit header **310**, the inner unit body **320**, and the inner unit tail **330**. The inner unit header **310** passes through the incision site **2** formed on the inner wall of the vaginal canal and then is introduced into the abdominal cavity **3**. The inner unit body **320** is connected at one end thereof to the inner unit header **310**, and is configured such that the outer periphery thereof can be maintained in a contact state with the incision site **2** formed on the inner wall of the vaginal canal. The inner unit tail **330** is connected to the other end of the inner unit body **320**, and has a structure in which it can be disposed at the vaginal canal. The inner unit tail **330** may have a structure in which it has an outer diameter smaller than that of the inner unit body **320** so as to be connected with an inner connector **420** of a connector unit **400**, which will be described later.

Meanwhile, the inner unit **300** according to an embodiment of the present invention may further include a configuration for preventing the inner unit **300** undesirably inserted into the incision site **2** during the surgery procedure from escaping from the incision site **2**. In other words, the inner unit **300** has a structure in which a maximum effective radius of the inner unit header **310** is larger than that of the inner unit body **320** when viewed from a plane perpendicular to a longitudinal direction passing through the inner unit body **320** and the inner unit header **310**. As shown in FIG. 3, when it is assumed that the length of the incision site is $a1$, the maximum effective radius of the inner unit header **310** is $a2$, and the maximum effective radius of the inner unit body **320** is $a3$, the following relationship is satisfied:

$a2 > a3 \approx a1$ so that the inner header **310** is inserted through the incision site **2** in a folded state or to a minimized size, and then returns to an original shape by an elastic restoring force thereof to have a predetermined size, thereby preventing the inner header **310** from undesirably escaping from the incision site **2** after the insertion thereof into the incision site **2**.

Moreover, in this case, the inner unit **300** may further include a structure formed in a predetermined shape. In other words, as shown in FIG. 3, the inner unit header **310** may further include a header stopper **313** formed at an end thereof, which is oriented toward the inner unit tail **330**, so as to be in close contact with the inner surface of the incision site **2** formed on the inner wall of the vaginal canal when the inner unit header **310** is stretched toward the outer unit **100**. The header stopper **313** may be in close contact with the inner surface of the incision site **2** at the abdominal cavity side so as to prevent the inner unit from undesirably escaping from the incision site **2**. In addition, the inner unit header **310** may have a structure in which it has a conical front end **311** so that the inner unit header **310** is easily introduced through the incision site **2** formed on the inner wall of the vaginal canal.

Also, the inner unit **300** is not limited to the above-mentioned conical structure, but may be modified in various manners depending on the type of surgery. For example, as shown in FIG. 4, an inner unit header **310b** may have a diffuser structure. In this case, the inner shape of an inner port **305b** may also have a structure of an inner port line **303b**; **303-1**, **303-2**, and **303-3** corresponding to the outer shape of the inner unit **300b**, but not a simple rectilinear penetration structure. The inner unit header **310b** may have a front end **311b** forming a cylindrical shape which is widened after the insertion thereof into the incision site **2**, and a header stopper **313b** connected with the front end **311b** may have a diffuser type curved structure.

In the meantime, the runner unit **200** and the inner unit **300** may be connected to each other by a given fastening structure. In other words, a surgery must be performed in which the inner unit **300** is inserted through the incision site **2** formed on the inner wall of the vaginal canal. In the case where the runner unit and the inner unit are integrally connected with each other, if necessary, smooth mounting of the runner unit and the inner unit may be difficult due to a spatial restriction of the internal space of the vaginal canal. Thus, the runner unit and the inner unit may have a structure in which the inner unit is inserted through the incision site **2** and then is fastened to the runner unit. In this case, the vaginal endoscopic port unit module **10** may further include a connector unit **400** interposed between the runner unit **200** and the inner unit **300**. As shown in FIG. 2, the connector unit **400** may have a threaded ring structure. In other words, the connector unit **400** may include a runner connector **410** and an inner connector **420**. The runner connector **410** and the inner connector **420** may have a structure in which each of them has a screw thread formed on the inner peripheral surface or outer peripheral surface thereof so that they are engagedly fastened to each other through a common structure such as a common hole **421** formed in the inner connector **420**. In the case where air-tightness is preferably formed between the screw threads of the runner connector **410** and the inner connector **420**, the formation of the screw thread can be selected in various manners depending on the surgery conditions, such as taking a round screw structure. In addition, the runner connector **410** and the inner connector **420** may be selectively formed of various materials such as a synthetic resin, a metal material and the like depending on design specifications. Although the connector unit having

the threaded ring structure has been illustrated in this embodiment, various modifications can be made within a range of implementing a connector having a predetermined insertion type engagement structure.

In the meantime, although it has been described in the above-mentioned embodiment that the connector unit is separately mounted on the runner unit and the inner unit, various modifications can be made within a range of implementing a connecting structure of the runner unit and the inner unit. For example, as shown in FIGS. 5 and 6, the connector unit 400c includes a runner connector 410c of a ring structure, and may be implemented as a structure in which the inner unit tail as an end of the inner unit 300 is inserted through the runner connector 410c which in turn performs a given stopping function. In other words, the runner connector 410c of the connector unit 400c of a ring structure can be mounted in the runner unit 200. The runner connector 410c preferably has a diameter smaller than that of the runner unit 200. The inner unit tail 330c preferably has an outer diameter or an effective outer diameter larger than an inner diameter of the runner connector 410c. Although it has been illustrated in this embodiment that the inner unit tail 330c has a conical structure corresponding to that of the inner unit header 310, the present invention is not limited thereto. The inner unit tail 330c can be inserted through the inner periphery of the runner connector 410c after being compressed by a given applied pressure P. Thereafter, the applied pressure P is removed so that the inner unit tail 330c returns to its original shape by an elastic restoring force thereof. Thus, the inner unit tail 330c can be prevented from undesirably escaping from the runner connector 410c having a diameter smaller than that of the inner unit tail 330c. Of course, in this case, the diameter of the inner unit body 320c, the diameter of the inner port 305c, and the inner diameter of the runner connector 410c are preferably formed to establish a predetermined size relationship therebetween in order to prevent the inhibition of the behavior of a surgical instrument such as an endoscope through an inner port 305c.

In addition, although it has been described in the above-mentioned embodiments that the runner unit 200 is formed of a flexible polymeric material, it may be formed as a structure having a predetermined characteristics. In other words, as shown in FIG. 10, a runner unit 200d of the vaginal endoscopic port unit module 10d may be formed as a bellows type structure. That is, the runner unit 200d of the bellows type structure is connected at one end thereof to the outer unit 100 and is connected at the other end thereof to the inner unit 300 through the connector unit 400. The bellows type runner unit 200d takes a structure in which it is stably arranged inside the vaginal canal 1a through the smooth movement and deformation of the runner unit 200d, but may take a structure which permits the smooth guide and introduction of a surgical instrument such as an endoscope introduced through the outer port 120.

In addition, although it has been described in the above-mentioned embodiments that the constituent elements including the outer unit, the runner unit, the inner unit, and connector unit are constructed independently, various modifications can be made within a range of providing a vaginal endoscopic port unit structure, such as taking a structure in which the elements are wholly or partially formed integrally with each other.

In addition, the inner unit is preferably formed of a deformable material such as silicon or a special rubber material. The outer unit is preferably formed of a soft flexible material. The surface of the vaginal endoscopic port unit module is preferably coated so that the surgical instru-

ment such as the endoscope can be smoothly introduced into or withdrawn from the incision site formed on the inner wall of the vaginal canal, and can be prevented from being damaged.

Meanwhile, in the above embodiments, the inner unit is disposed at the incision site formed on the inner wall of the vaginal canal so as to fluidically communicate with the abdominal cavity, and permits the introduction and withdrawal of the surgical instrument introduced through the outer port into and from the abdominal cavity. The inner unit may further include an excised tissue guide part 360a for guiding an excised tissue inside the abdominal cavity. In FIGS. 12 to 15, there are shown schematic views of a vaginal endoscopic port unit module 10a according to another embodiment of the present invention. In this embodiment, the same configuration as that in the above embodiments is replaced with the above-mentioned configuration and thus a detailed description thereof will be omitted to avoid redundancy.

An inner unit 300a of the vaginal endoscopic port unit module 10a includes an excised tissue guide part 360a. The excised tissue guide part 360a includes deployment frames 320a and 340a, and deployment screens 330a and 350a mounted on the deployment frames 320a and 340a. The excised tissue guide part 360a is surrounded with a guide wrap 302a that can be easily shredded when it is introduced into the incision site formed on the inner wall of the vaginal canal (see FIG. 13). When the inner unit 300a is disposed at the incision site fluidically communicating with the abdominal cavity, the deployment frames 320a and 340a of the excised tissue guide part 360a positioned at a front end of the inner unit 300a contains a shape memory alloy so that they are deployed by the temperature environment in the human body and return to an original shape thereof. The deployment frames 320a and 340a forms a pair, respectively, and are disposed at the upper and lower circumferential end edge of a front end of the inner unit, respectively. When the deployment frames 320a and 340a are deployed, the guide wrap 302a is shredded. The guide wrap 302a may be formed of a material that can be dissolved by its contact with body fluid, if necessary. The deployment frames 320a and 340a includes an upper deployment frame 320a and a lower deployment frame 340a. In this case, two deployment frames 320a are provided at the upper circumferential end edge of the inner unit and two deployment frames 340a are provided at the lower circumferential end edge of the inner unit, but the number of the deployment frames 320a and 340a are not limited thereto. Various modifications of the deployment frames 320a and 340a can be made within a range of stably supporting and protecting some organs which will be described later.

The pairs of the deployment frames 320a and 340a are connected with the deployment screens 350a and 330a so that they perform a supporting or protecting function during the deployment of when the deployment frames 320a and 340a. In FIG. 15, there is shown a state in which the deployment frame is partially hidden by the deployment screen. The deployment frames 320a and 340a can be restricted in rotation by the line of the excised tissue guide part 360a to prevent the upper and lower ends of the deployment frames 320a and 340a from being excessively rotated relative to each other. The deployment frames 320a and 340a form an angle of α and β with respect to a horizontal line segment. The deployment frames 320a and 340a can perform a restriction function against individual tissues with an angular difference occurring during the restoration of the deployment frames 320a and 340a. In

11

other words, as shown in FIG. 12, the upper deployment screen 350a serves to support uterus and the lower deployment screen 330a functions as membranes that protect the small and large intestines inside the abdominal cavity so that when ovary tumor 6 connected to excised suspensory ligament 6a of ovary is excised, the excised tissue is not withdrawn to the outside but can be induced so to be externally withdrawn stably.

In addition, a gas inflow line 140a and a foreign substance outflow line 140b are respectively connected to line through-holes 301a and 301b formed a front end of the inner unit 300a so that a surgeon's visual field can be secured during the surgery procedure through inflow of gas to the abdominal cavity and foreign substances can be smoothly discharged to the outside.

The embodiments as described above are merely illustrative and the invention is not limited to these embodiments. It will be appreciated by a person having an ordinary skill in the art that various equivalent modifications and variations of the embodiments can be made without departing from the spirit and scope of the present invention. Therefore, the true technical scope of the present invention should be defined by the technical spirit of the appended claims.

INDUSTRIAL APPLICABILITY

The vaginal endoscopic port unit module according to the present invention can be variously utilized as a medical instrument within a range of enabling to gain access into the abdominal cavity via a patient's vagina to minimize her pain and scar in performing a minimally invasive surgery on an organ lesion inside the abdominal cavity.

The invention claimed is:

1. A vaginal endoscopic port unit module for laparoscopic surgery, which is positioned at one end thereof inside the human body and at the other end thereof outside the human body through a vaginal orifice, the module comprising:

an outer unit comprising a proximal end, the proximal end being disposed so as to be exposed to the outside of the vaginal orifice and which includes at least one outer port configured to permit entry of a surgical instrument including an endoscope;

an inner unit configured to be disposed at an incision site formed on the inner wall of the vaginal canal so as to fluidically communicate with the abdominal cavity, and configured to include an inner port permitting introduction and withdrawal of the surgical instrument introduced thereto through the outer port into and from the abdominal cavity; and

a runner unit configured to connect the outer unit and the inner unit with each other, and

wherein an inner shape of the inner port has a diffuser structure at a portion of the inner unit that is introduced into the abdominal cavity,

wherein the inner unit includes an excised tissue guide part configured to guide an excised tissue inside the abdominal cavity to the inner unit, and

wherein the excised tissue guide part includes deployment frames positioned at a front end of the inner unit and deployment screens mounted on the deployment frames, the deployment screens being membranes configured to induce and guide the excised tissue to the inner unit.

2. The vaginal endoscopic port unit module according to claim 1, wherein the inner unit is implemented as an elastic structure so as to be inserted into the incision site formed on the inner wall of the vaginal canal.

12

3. The vaginal endoscopic port unit module according to claim 2, wherein the inner unit comprises: an inner unit header configured to pass through the incision site formed on the inner wall of the vaginal canal and then to be introduced into the abdominal cavity; an inner unit body connected at one end thereof to the inner unit header and configured such that the outer periphery thereof can be maintained in a contact state with the incision site formed on the inner wall of the vaginal canal; and an inner unit tail connected to the other end of the inner unit body and configured such that it can be disposed at the vaginal canal.

4. The vaginal endoscopic port unit module according to claim 3, wherein a maximum effective radius of the inner unit header is larger than that of the inner unit body when viewed from a plane perpendicular to a longitudinal direction passing through the inner unit body and the inner unit header.

5. The vaginal endoscopic port unit module according to claim 4, wherein the inner unit header may further comprise a header stopper formed at an end thereof, which is oriented toward the inner unit tail, so as to be in close contact with the inner surface of the incision site formed on the inner wall of the vaginal canal if the inner unit header is stretched toward the outer unit.

6. The vaginal endoscopic port unit module according to claim 5, wherein one end of the inner unit header, which is opposite to the header stopper, has a conical structure for allowing the inner unit header to be easily introduced through the incision site formed on the inner wall of the vaginal canal.

7. The vaginal endoscopic port unit module according to claim 5, wherein one end of the inner unit header, which is opposite to the header stopper, has a diffuser structure that is widened after the insertion thereof into the incision site formed on the inner wall of the vaginal canal.

8. The vaginal endoscopic port unit module according to claim 3, further comprising a connector unit interposed between the runner unit and the inner unit so as to connect the runner unit and the inner unit with each other.

9. The vaginal endoscopic port unit module according to claim 8, wherein the connector unit has a threaded ring structure, and comprises a runner connector disposed at the runner unit and an inner connector disposed at the inner unit so that the inner connector can be engagedly fastened to the runner connector.

10. The vaginal endoscopic port unit module according to claim 3, further comprising a connector unit of a ring structure disposed at an end of the runner unit in such a manner as to be interposed between the runner unit and the inner unit so as to connect the runner unit and the inner unit with each other, and the inner unit tail of the inner unit can be inserted into the runner unit through the ring structure.

11. The vaginal endoscopic port unit module according to claim 1, wherein the outer port comprises an outer port flap configured to permit inflow of fluid to the runner unit while preventing outflow of the fluid from the runner unit, the outer port flap having two opposing inclined portions formed at either side of the outer port flap so as to be sharply pointed toward the runner unit, the inclined portions having a pair of sloping grooves formed on the outer surface thereof.

12. The vaginal endoscopic port unit module according to claim 1, wherein the excised tissue guide part is surrounded with a guide wrap which is configured to be shredded when the excised tissue guide part is introduced into the incision site formed on the inner wall of the vaginal canal.

13

13. The vaginal endoscopic port unit module according to claim 1, wherein the deployment frames are restricted in rotation by a line of the excised tissue guide part to prevent upper and lower ends of the deployment frames from being excessively rotated relative to each other.

5

14. The vaginal endoscopic port unit module according to claim 13, wherein each of the deployment frames forms an angle with respect to a horizontal line segment.

* * * * *

14

专利名称(译)	阴道内窥镜端口单元模块		
公开(公告)号	US9681890	公开(公告)日	2017-06-20
申请号	US14/411366	申请日	2013-06-28
[标]申请(专利权)人(译)	高丽大学校产学协力团		
申请(专利权)人(译)	高丽大学研究和商业基金会		
当前申请(专利权)人(译)	高丽大学研究和商业基金会		
[标]发明人	AHN KI HOON		
发明人	AHN, KI HOON		
IPC分类号	A61B1/00 A61B1/303 A61B1/313 A61B17/34 A61B17/42 A61B17/02 A61B17/00 A61B1/32 A61M39/06 A61B90/40		
CPC分类号	A61B17/3423 A61B1/00154 A61B1/303 A61B1/3132 A61B17/0218 A61B17/42 A61B2017/345 A61B2017/347 A61B2017/3425 A61B2017/3441 A61B2017/3443 A61B2017/3449 A61B2017/3466 A61B2017/3488 A61B2017/4216 A61B2017/4233 A61B2217/007 A61M2039/0646 A61B17/3431 A61B17/3462 A61B17/3498 A61B90/40 A61B2017/00278 A61B2017/00473 A61B2017/00477 A61B2017/00862 A61B2017/00867 A61B17/34 A61B2017/3445		
优先权	1020120069954 2012-06-28 KR		
其他公开文献	US20150209073A1		
外部链接	Espacenet USPTO		

摘要(译)

腹腔镜端口单元模块技术领域本发明涉及一种腹腔镜端口单元模块，其中，其一端和另一端分别通过阴道入口放置在人体内部和外部，并且提供阴道内窥镜端口单元模块，包括：外部单元，其外部单元端部暴露于阴道入口的外部，并且包括一个或多个外部端口，允许包括内窥镜的手术器械进入；内部单元形成在阴道腔的内壁上，以便放置在连接到腹腔的切口区域，并允许手术器械通过外口进入和离开腹腔；以及用于连接外部单元和内部单元的流道单元。

