



US 20170273687A1

(19) **United States**(12) **Patent Application Publication**
MCGUCKIN, JR. et al.(10) **Pub. No.: US 2017/0273687 A1**(43) **Pub. Date: Sep. 28, 2017**(54) **APPARATUS AND METHOD FOR
RESECTIONING GASTRO-ESOPHAGEAL
TISSUE**(71) Applicant: **REX MEDICAL, L.P.**, Radnor, PA
(US)(72) Inventors: **James F. MCGUCKIN, JR.**, Radnor,
PA (US); **Peter W.J. HINCHLIFFE**,
Downington, PA (US)(73) Assignee: **REX MEDICAL, L.P.**, Radnor, PA
(US)(21) Appl. No.: **15/617,835**(22) Filed: **Jun. 8, 2017****Related U.S. Application Data**

(63) Continuation of application No. 15/475,438, filed on Mar. 31, 2017, which is a continuation of application No. 15/241,659, filed on Aug. 19, 2016, now abandoned, which is a continuation of application No. 15/018,000, filed on Feb. 8, 2016, now Pat. No. 9,439,650, which is a continuation of application No. 13/856,819, filed on Apr. 4, 2013, now Pat. No. 9,271,727, which is a continuation of application No. 11/471,126, filed on Jun. 20, 2006, now Pat. No. 8,424,741, which is a continuation of application No. 10/855,908, filed on May 27, 2004, now Pat. No. 7,090,684, which is a continuation of application No. 10/062,760, filed on Jan. 31, 2002, now Pat. No. 6,835,199.


(60) Provisional application No. 60/265,469, filed on Jan. 31, 2001.

Publication Classification(51) **Int. Cl.***A61B 17/10* (2006.01)*A61B 17/068* (2006.01)*A61B 17/072* (2006.01)*A61B 17/3205* (2006.01)*A61B 1/273* (2006.01)*A61B 17/00* (2006.01)*A61B 17/29* (2006.01)(52) **U.S. Cl.**CPC *A61B 17/105* (2013.01); *A61B 17/07207*
(2013.01); *A61B 17/3205* (2013.01); *A61B*
17/068 (2013.01); *A61B 17/072* (2013.01);
A61B 2017/00827 (2013.01); *A61B*
2017/07221 (2013.01); *A61B 2017/2905*
(2013.01); *A61B 2017/2923* (2013.01); *A61B*
1/2736 (2013.01); *A61B 2017/00278*
(2013.01); *A61B 2017/07214* (2013.01); *A61B*
17/00234 (2013.01)

(57)

ABSTRACT

A system for stapling tissue comprises a flexible endoscope and an operative head including a pair of opposed, curved tissue clamping jaws sized to pass through an esophagus, the jaws being moveable with respect to one another between an open tissue receiving configuration and a closed tissue clamping configuration, a first one of the curved jaws including a stapling mechanism and a second one of the jaws including a staple forming anvil surface, the stapling mechanism including staple slots through which staples are fired arranged in a row extending from a proximal end of the first jaw to a distal end thereof in combination with a control handle which, when the operative head is in an operative position within one of a patient's stomach and esophagus, remains outside the patient, the control handle including a first actuator for moving the jaws relative to one another and a second actuator for operating the stapling mechanism.

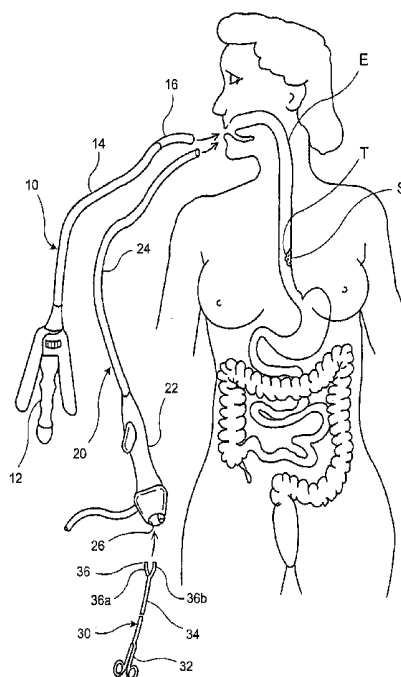

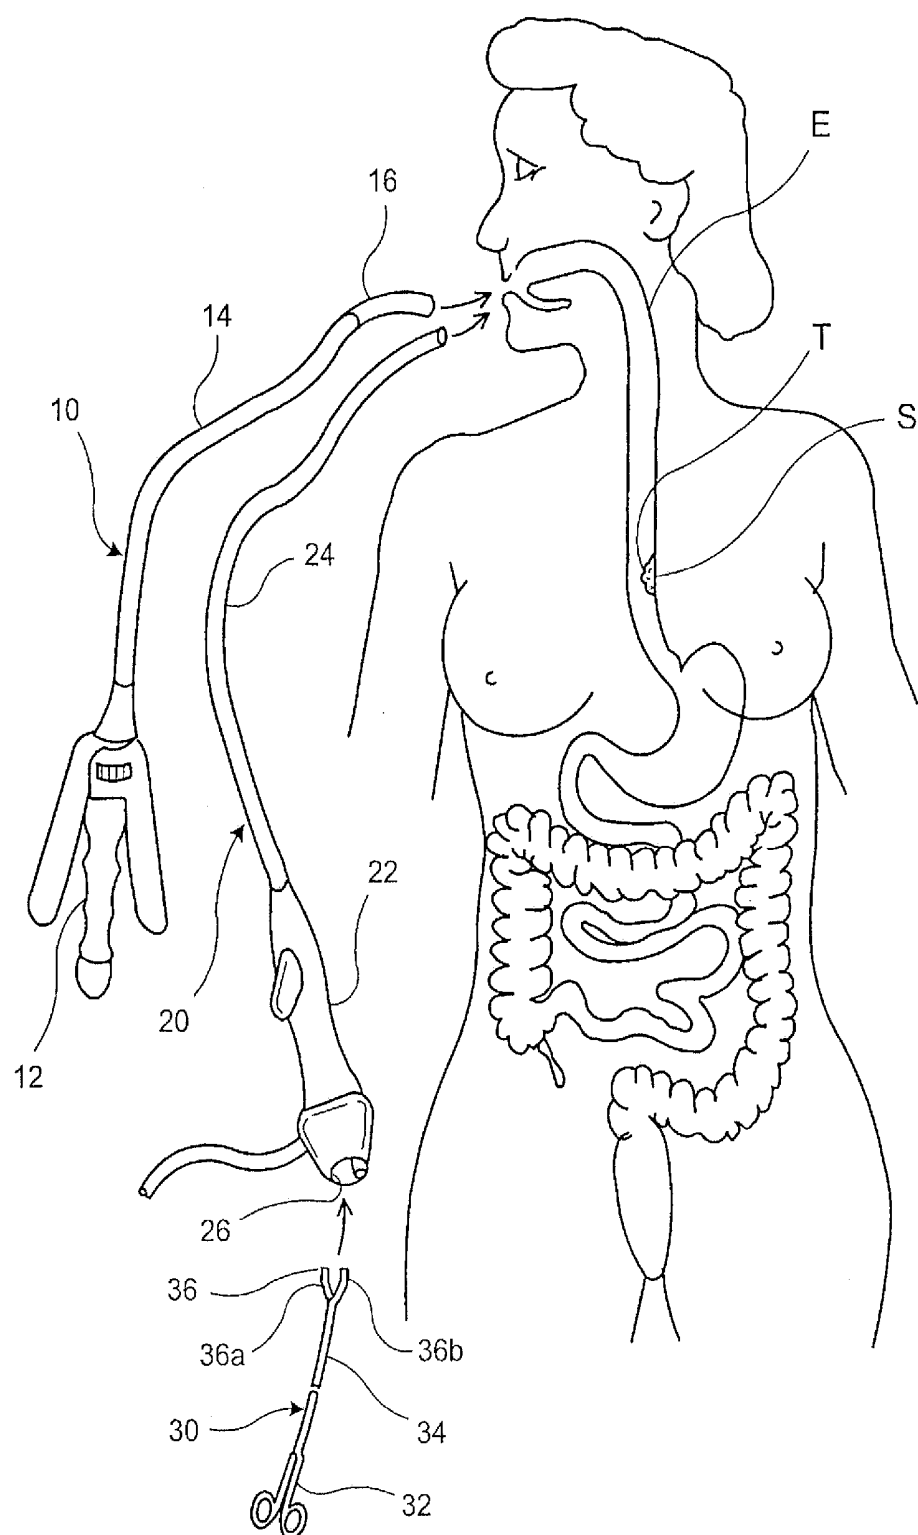


FIG. 1

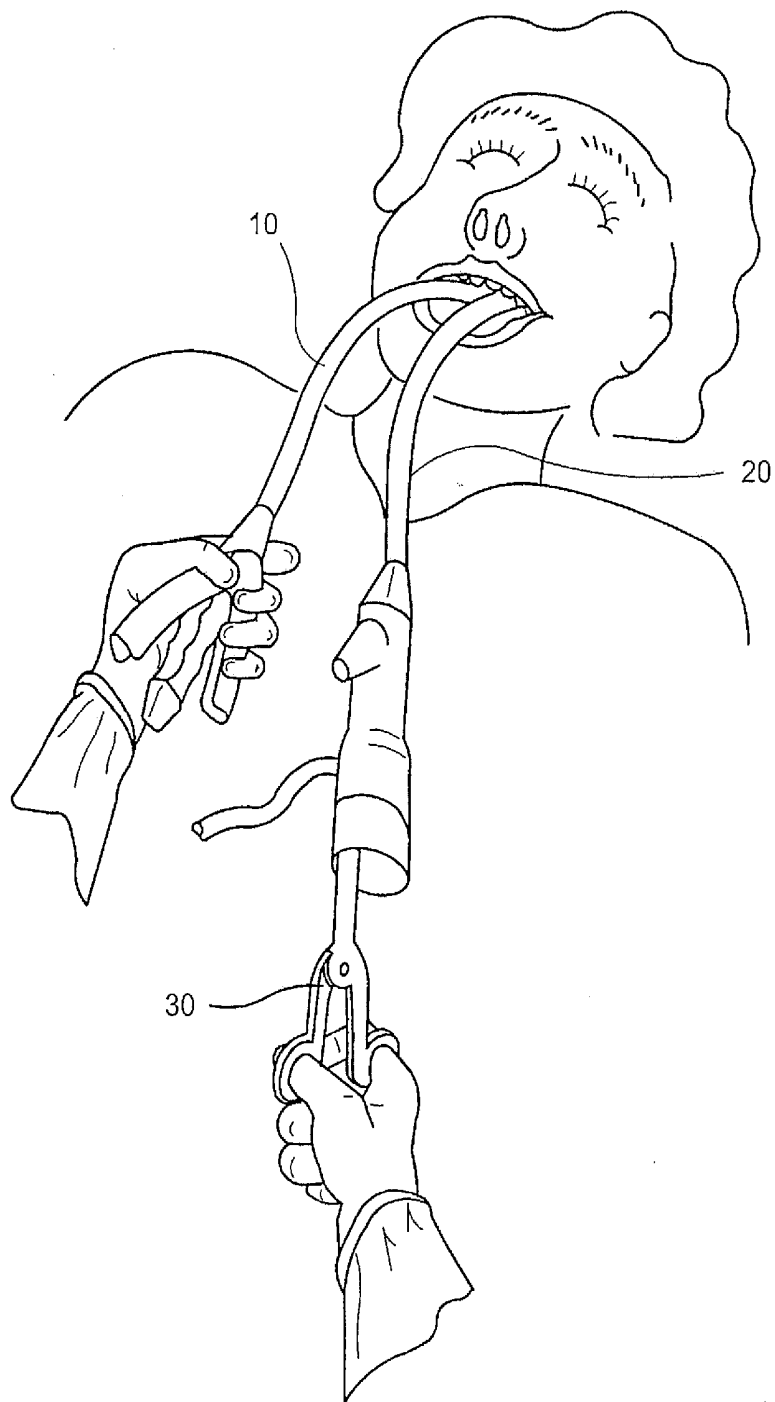


FIG. 2a

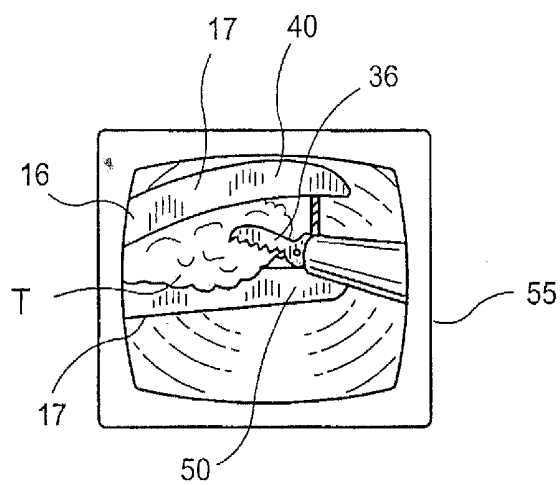


FIG. 2b

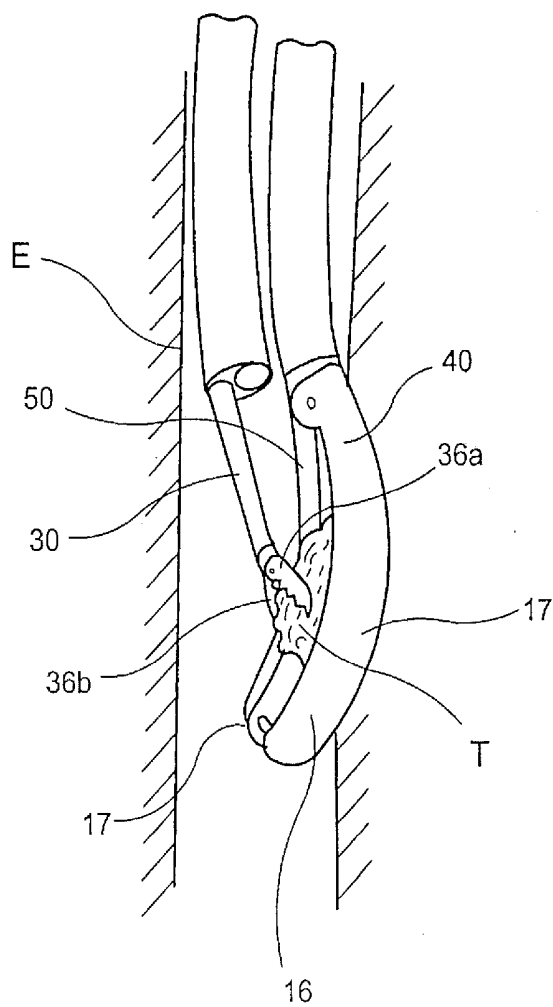


FIG. 2c

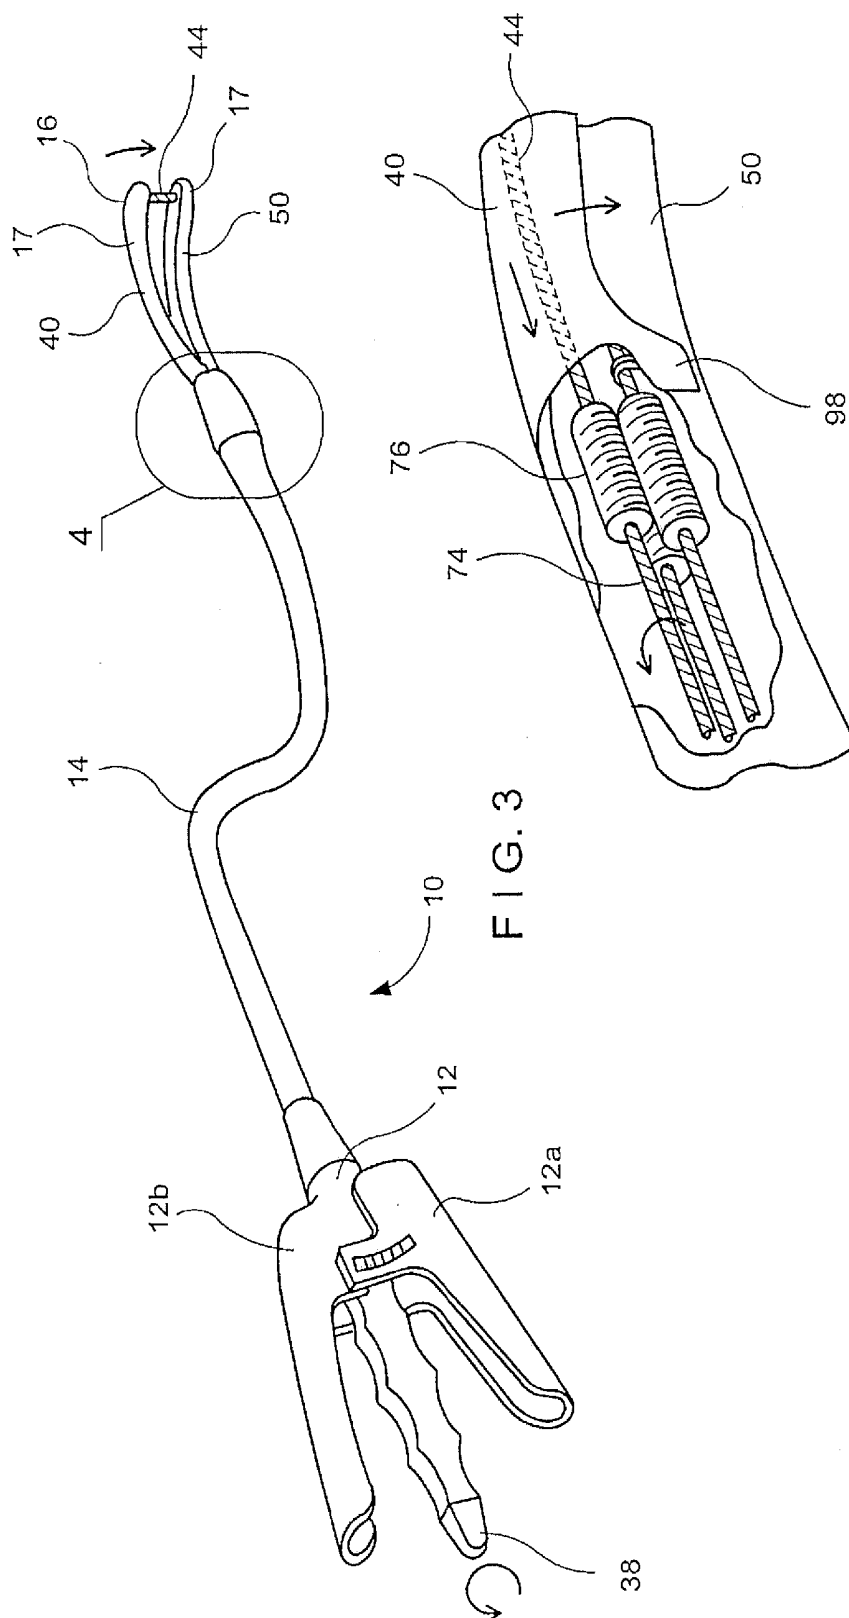


FIG. 4

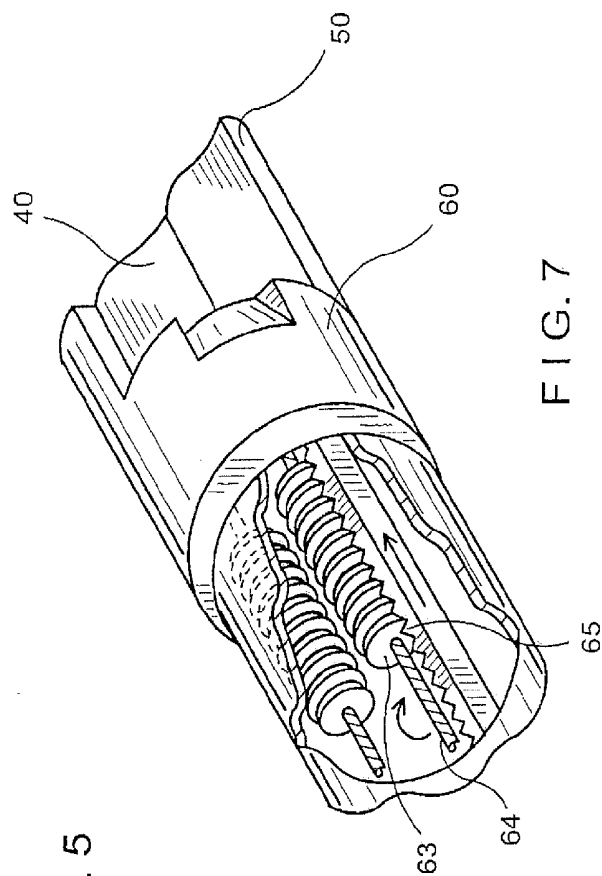
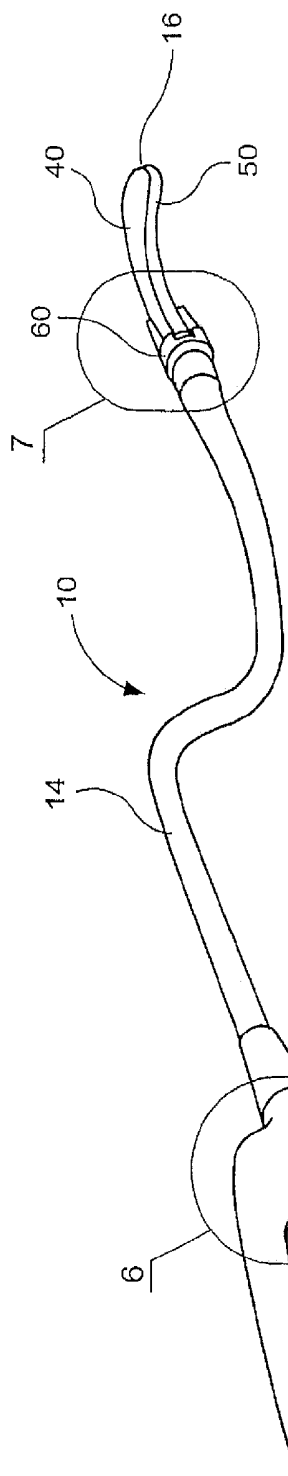


FIG. 5

FIG. 7

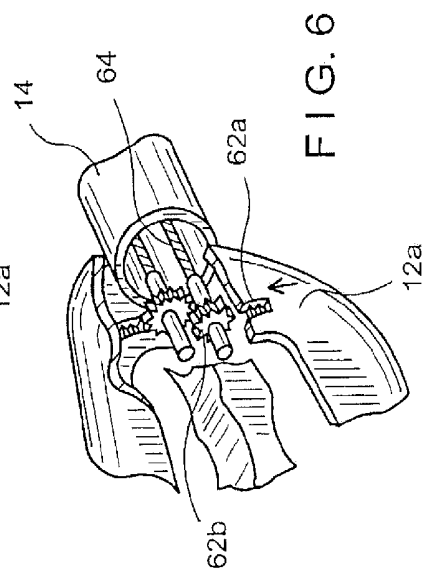


FIG. 6

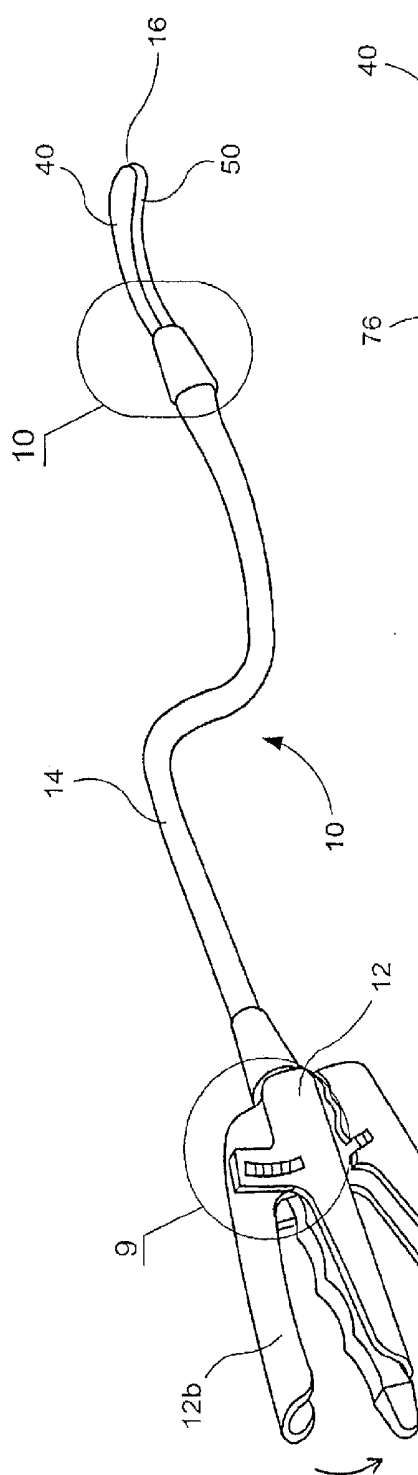


FIG. 8

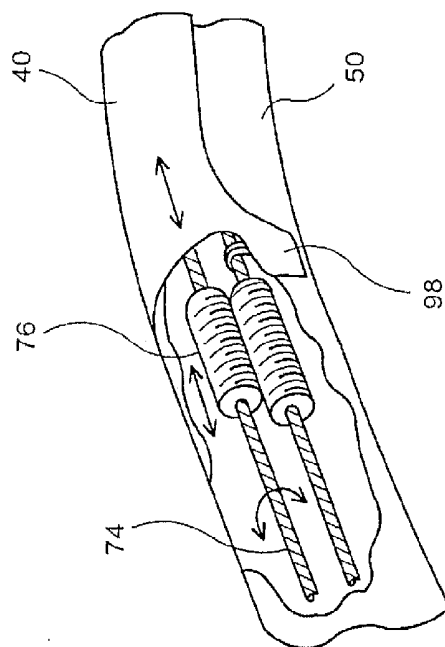


FIG. 10

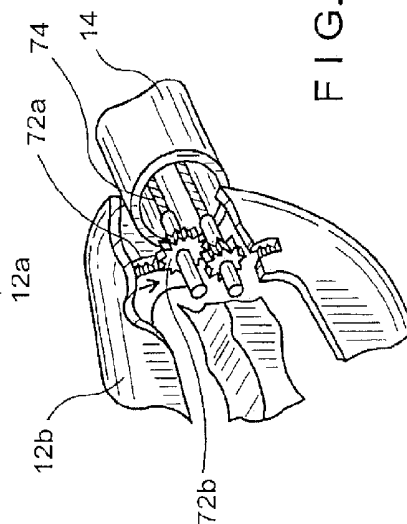


FIG. 9

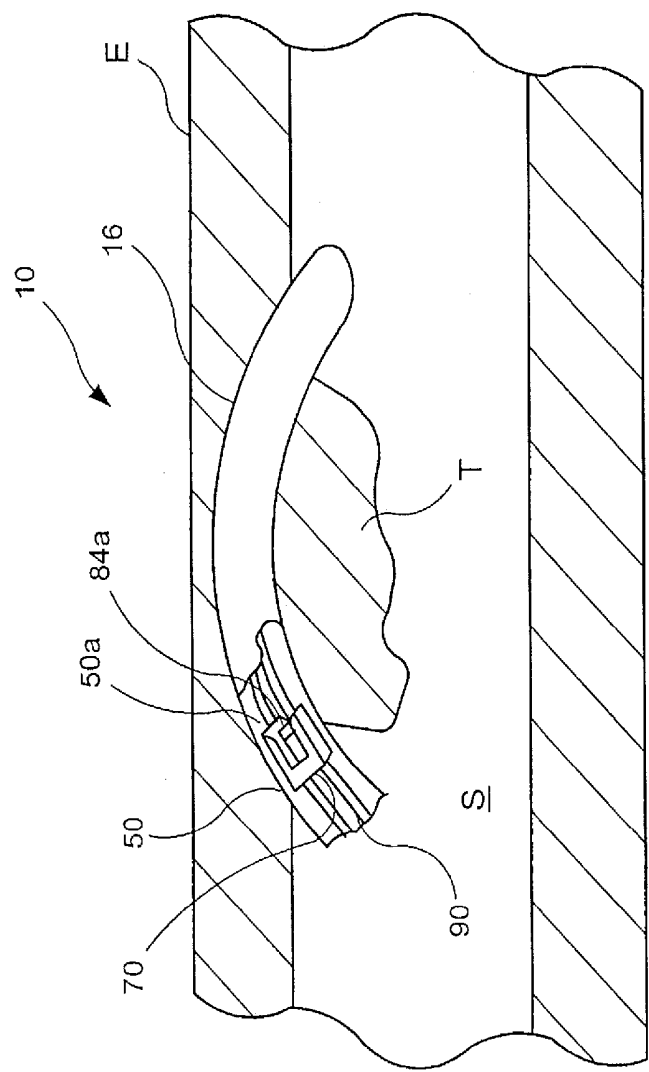


FIG. 11

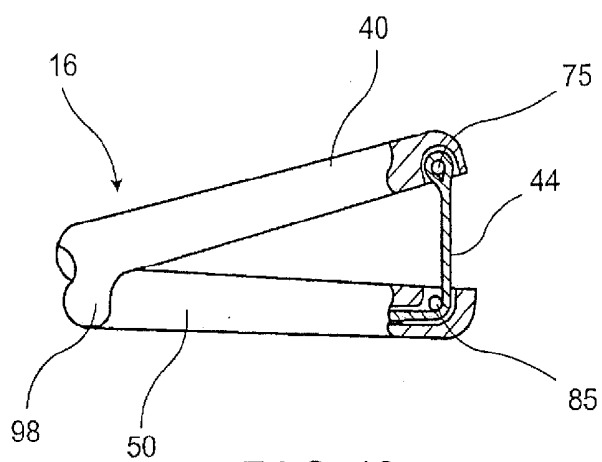


FIG. 12

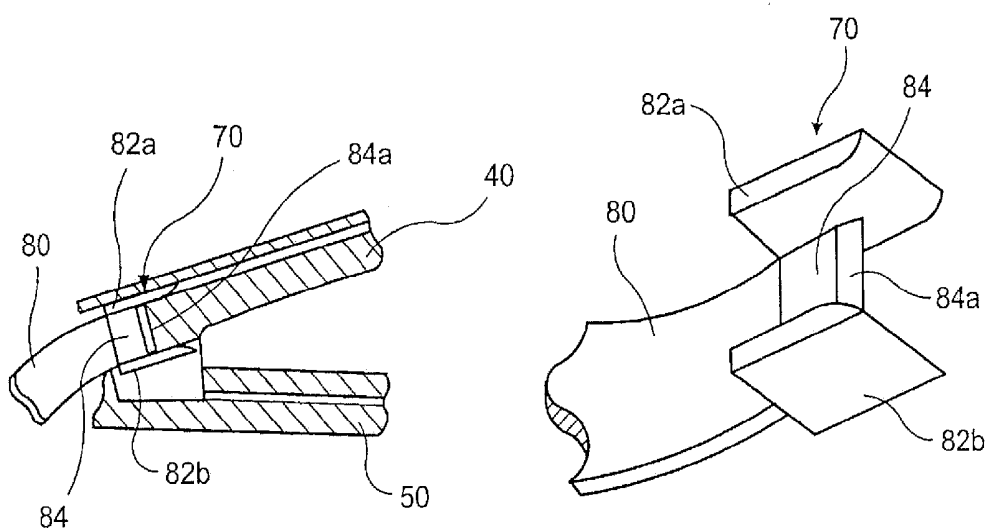


FIG. 13

FIG. 14

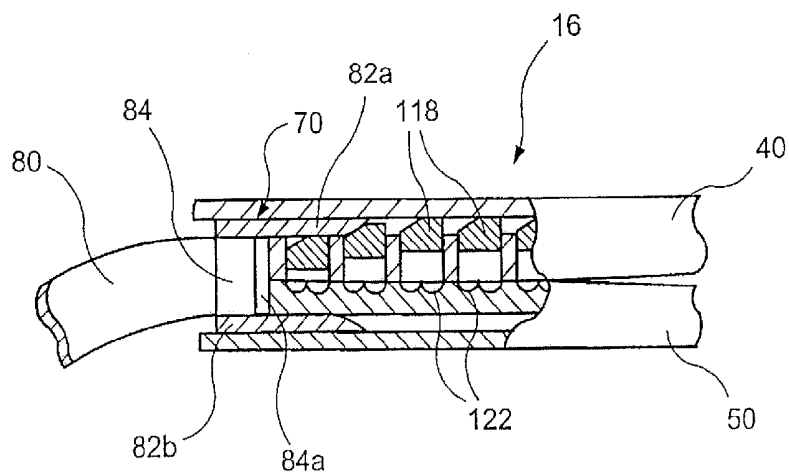
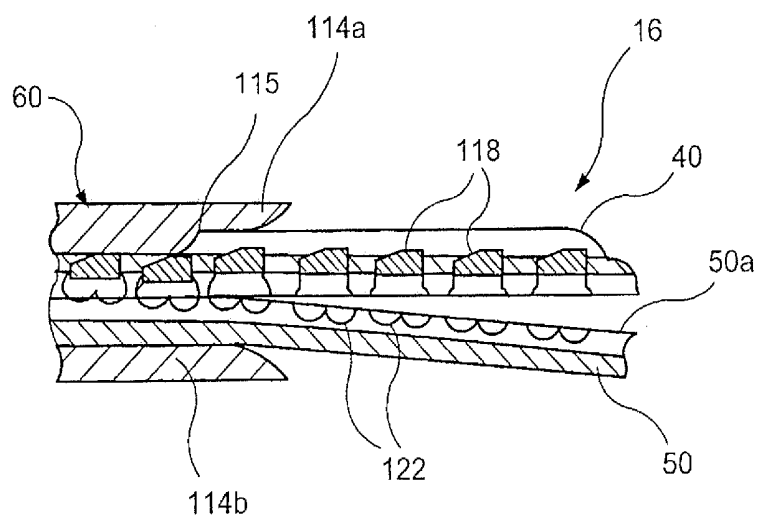
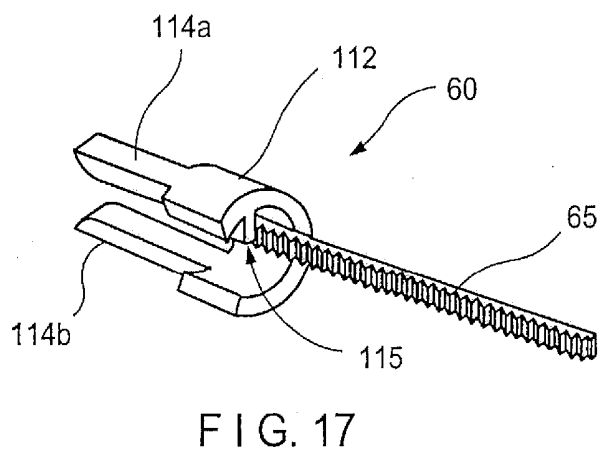
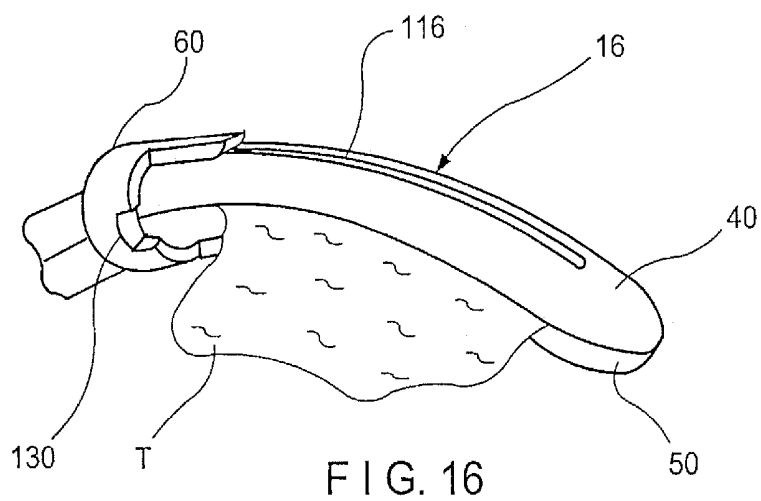


FIG. 15



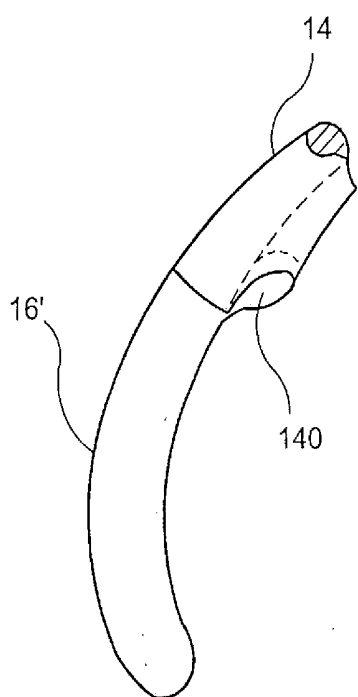


FIG. 19



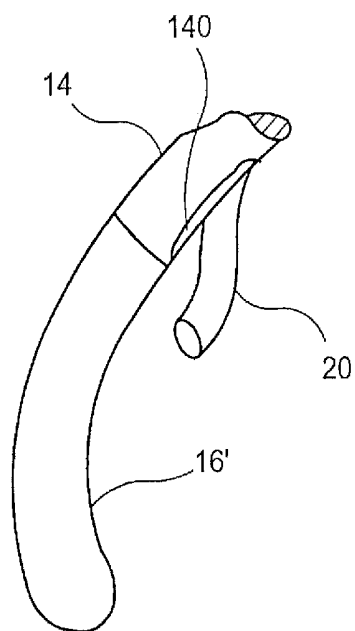


FIG. 20

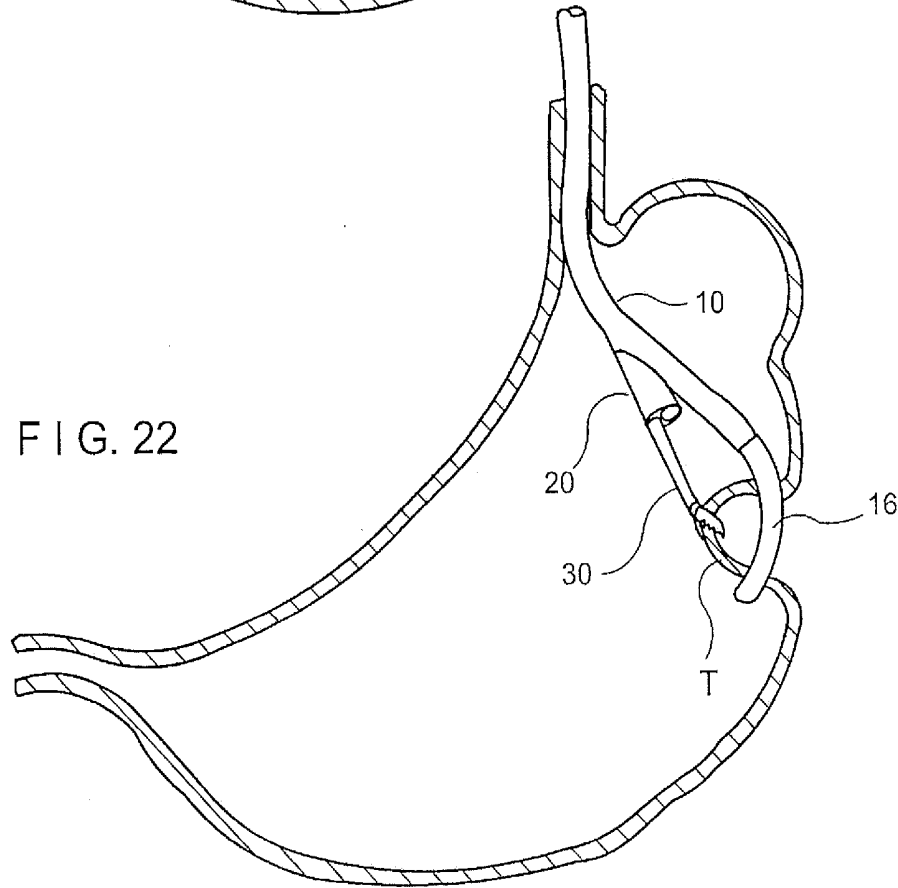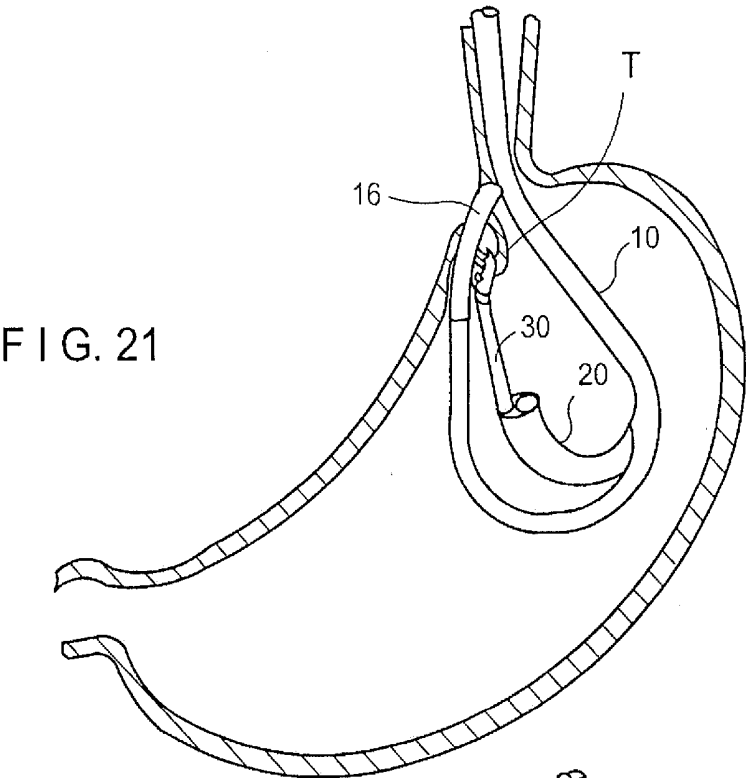

APPARATUS AND METHOD FOR RESECTIONING GASTRO-ESOPHAGEAL TISSUE

FIELD OF THE INVENTION

[0001] The present invention relates to endoscopic devices for performing localized resections of gastro-esophageal lesions.

BACKGROUND OF THE INVENTION

[0002] Endoscopic surgical stapling apparatus are known in the art and are utilized to provide a variety of surgical procedures. For example, U.S. Pat. No. 5,040,715 to Green, et al. discloses an endoscopic stapling device configured to be inserted through a small entrance wound in the abdominal cavity to place rows of staples in body tissue. This device has a limited range of motion in that the stapling assembly at the distal end of the instrument can only be rotated about the central axis of the instrument.

[0003] An endoscopic stapling apparatus purporting to have a greater range of motion is disclosed in U.S. Pat. No. 5,326,013 to Green et al. This device has an articulating stapling assembly mounted for pivotal movement about an axis extending transverse to the central axis of the instrument. An endoscopic stapling device designed to be inserted through a small incision in a body wall and purporting to have an increased range of motion is described in U.S. Pat. No. 5,389,098 to Tsuruta et al. A stapling assembly of this device curves away from a central axis of the instrument to a 90.degree. angle so that it can more easily reach tissue spaced from the central axis. This device incises tissue clamped within the stapling assembly and places staggered lines of staples on both sides of the incision.

SUMMARY OF THE INVENTION

[0004] The present invention is directed to a system for stapling tissue comprising a flexible endoscope and an operative head including a pair of opposed, curved tissue clamping jaws sized to pass through an esophagus, the jaws being moveable with respect to one another between an open tissue receiving configuration and a closed tissue clamping configuration, a first one of the curved jaws including a stapling mechanism and a second one of the jaws including a staple forming anvil surface, the stapling mechanism including staple slots through which staples are fired arranged in a row extending from a proximal end of the first jaw to a distal end thereof in combination with a control handle which, when the operative head is in an operative position within one of a patient's stomach and esophagus, remains outside the patient, the control handle including a first actuator for moving the jaws relative to one another and a second actuator for operating the stapling mechanism.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 shows a perspective view of a system according to an illustrative embodiment of the present invention along with a partially cross-sectional view of a patient showing a target portion of tissue to be resected;

[0006] FIG. 2a shows the system of FIG. 1 inserted into the patient's body via the mouth;

[0007] FIG. 2b shows a display of the image of a stapling apparatus of the system of FIG. 1 provided to a user;

[0008] FIG. 2c shows a cross-sectional view of the patient's esophagus with the stapling apparatus of FIG. 3 in position adjacent to the target portion of tissue;

[0009] FIG. 3 shows a perspective view of the system of FIG. 1 with jaws of the stapling apparatus open;

[0010] FIG. 4 shows a partially cross-sectional view of a proximal end of the stapling apparatus of FIG. 3 showing control cables for operating the jaws configured as when the jaws are open;

[0011] FIG. 5 shows a perspective view of the system of FIG. 1 with jaws of the stapling apparatus closed with a lower actuator lever on a control handle being actuated;

[0012] FIG. 6 shows a partially cross-sectional view of the control handle of the system of FIG. 5 showing a coupling between control cables for operating the jaws and the lower actuator lever on the control handle;

[0013] FIG. 7 shows a partially cross-sectional view of a proximal end of the stapling apparatus of FIG. 5 showing control cables for operating a stapling pusher of the stapling apparatus configured as when the lower actuator lever is actuated;

[0014] FIG. 8 shows a perspective view of the system of FIG. 1 with jaws of the stapling apparatus closed with an upper actuator lever on the control handle being actuated;

[0015] FIG. 9 shows a partially cross-sectional view of a portion of the control handle of the system of FIG. 8 showing a coupling between control cables for operating the jaws and the upper actuator lever on the control handle;

[0016] FIG. 10 shows a partially cross-sectional view of a proximal end of the stapling apparatus of FIG. 5 showing control cables for operating a stapling pusher of the stapling apparatus configured as when the upper actuator lever is actuated;

[0017] FIG. 11 shows a partially cross-sectional view of a stapling assembly of the system of FIG. 1 grasping esophageal tissue;

[0018] FIG. 12 shows a partially cross-sectional view of the stapling assembly of the system of FIG. 1 illustrating a mechanism for grossly approximating the jaws of the stapling assembly;

[0019] FIG. 13 shows a partially cross-sectional view of the stapling assembly illustrating a mechanism for finely approximating the jaws in an initial position;

[0020] FIG. 14 shows a perspective view of an I-beam member of the fine approximation mechanism of FIG. 13;

[0021] FIG. 15 shows a partially cross-sectional view of the stapling assembly with the fine approximation mechanism in a partially advanced position;

[0022] FIG. 16 shows a perspective view of the stapling assembly with a C-shaped clamp member thereof in an initial position;

[0023] FIG. 17 shows a perspective view of the C-shaped clamp member of FIG. 16 rotated 180.degree. removed from the jaws;

[0024] FIG. 18 shows a cross-sectional view of the stapling assembly with the C-shaped clamp member in a partially advanced position;

[0025] FIG. 19 shows an alternate embodiment of the system according to the present invention with a lateral endoscope receiving lumen;

[0026] FIG. 20 shows the system of FIG. 19 with an endoscope received therein;

[0027] FIG. 21 shows a system in accord with the present invention positioned within the stomach to perform a procedure for the treatment of reflux; and

[0028] FIG. 22 shows a system in accord with the present invention positioned within the stomach to perform a stomach reduction procedure.

DETAILED DESCRIPTION

[0029] A detailed description of illustrative embodiments of the present invention is provided in conjunction with the attached drawings. In the descriptions of the various embodiments and the corresponding drawings, like reference numerals refer to like elements.

[0030] A method and apparatus for resectioning anastomized luminal tissue is disclosed in U.S. Pat. No. 5,868,760 to McGuckin et al., the disclosure of which is hereby incorporated by reference in its entirety. The disclosed apparatus includes a flexible tubular body and a distal operating capsule that may be inserted through either a naturally occurring body orifice or a surgical incision and guided to an operative site endoscopically or using radiologic imaging guidance. In use the target tissue is stapled, cut and captured within the operating capsule for removal from the body. The healthy tissue is thereby anastomized by surgical staples.

[0031] FIG. 1 shows a system for resecting esophageal tissue according to an illustrative embodiment of the present invention. A surgical stapling apparatus, designated generally by the reference numeral 10, is utilized in conjunction with an endoscope 20 for providing remote vision of an operative area and to assist in guiding the stapling apparatus 10 to the operative area. An endoscopic grasping device 30 extends through a lumen in the endoscope 20 for use at the surgical site as would be understood by those of skill in the art. Those skilled in the art will further understand that, while the illustrative embodiments are described in conjunction with visual observation of the operative site via the endoscope 20, these procedures may also be visualized through the use of Magnetic Resonance Imaging (MRI). In this case, components of the system and the instruments utilized therewith, such as the grasping device 30, would be constructed from non-ferrous material such as titanium, as would be understood by those of skill in the art.

[0032] As shown in FIG. 1, the stapling apparatus 10 includes a proximal handle portion 12, an elongated flexible body portion 14 extending from the handle portion 12 and a generally C-shaped stapling assembly 16 operatively associated with a distal end of the flexible body portion 14. The flexible body portion 14 and the stapling assembly 16 are preferably dimensioned and configured to traverse the natural curvature of the esophagus. As shown in FIGS. 2b and 2c and described in detail below, the stapling assembly 16 includes a pair of opposable jaws 17 defined by a staple carrying portion 40 and a staple forming portion 50. Those skilled in the art will understand that, although the jaws 17 are described herein as rotating relative to one another between the open and closed positions, that these jaws 17 may be coupled by a mechanism which allows them to move linearly with respect to one another or in any other manner so long as they move between a first position in which the jaws 17 are separated from one another to receive tissue and a second position in which the jaws 17 are clamped together to hold tissue tightly therebetween for stapling.

[0033] Furthermore, those skilled in the art will understand that the system may operate with any of a variety of commercially available medical endoscopes which may include, for example, a proximal handle portion 22, an elongated flexible body portion 24 through which one or more interior lumina extend for accommodating, for example, a fiber optic bundle or other image transmission structure, a working channel for the grasping device 30, etc. Those skilled in the art will understand that the fiber optic bundle (or other image transmitting structure) allows a user to remotely visually monitor a field of view at the distal end of the endoscope (e.g., an operative site S within the esophagus E). As would be further understood by those of skill in the art, the tissue grasping device 30 may include a handle portion 32, an elongated flexible body portion 34 and a pair of opposable jaws 36a and 36b.

[0034] In use as shown in FIGS. 2a-2c, the surgical stapling apparatus 10 and the flexible endoscope 20 are introduced into a patient's mouth and advanced into the esophagus to the operative site S under visual guidance from the endoscope 20. Once at the site S, the operator maneuvers the stapling assembly 16 into a desired position relative to the tissue to be resected. Those skilled in the art will understand that the stapling assembly 16 may be coupled to the handle portion 22 by a cable steering system (not shown) substantially as included in commercially available endoscopes to allow the remote maneuvering and positioning of the stapling assembly 16. The jaws 17 of the stapling assembly 16 are then opened to a tissue receiving position as shown in FIG. 3 and the grasping device 30 is advanced from the distal end of the endoscope 20. The jaws 36a and 36b are rotated away from one another by manipulation of the grasper handle portion 32 and the tissue T to be resected is grasped by closing the jaws 36a, 36b. The grasping device 30 is then withdrawn into the working channel of the endoscope 20 to pull the tissue T into position between the jaws 17 of the stapling assembly 16 and the jaws 17 are closed to clamp the tissue T in place between the staple carrying portion 40 and the staple forming portion 50. Those skilled in the art will understand that the tissue T is preferably drawn between the jaws 17 so that a margin of healthy tissue is positioned between the staple carrying portion 40 and the staple forming portion 50 to ensure that all of the diseased or damaged tissue T is removed. Those skilled in the art will understand that this may be visually confirmed through the use of the vision system of the endoscope as shown in FIG. 2b.

[0035] As shown in FIG. 2c, once the tissue T has been properly positioned between the jaws 17, the jaws 17 are grossly approximated and are then finely approximated using a translating clamping member 60, illustrated in detail in FIGS. 16-18. As shown in FIGS. 3, 4 and 12, an illustrative embodiment of the system according to the present invention includes an actuation cable 44 to facilitate gross approximation of the jaws 17 via actuation of an actuator knob 38. The actuation cable 44 may be secured to the one of the jaws 17 including, for example, the staple carrying portion 40 and is operatively coupled to the other jaw 17 including the staple forming portion 50 by a member 85 which may, for example, be a spindle, capstan or other member around which the cable 44 passes to change direction to generate the clamping force to draw the jaws 17 together. Furthermore, an overhanging flange 98 at a proxi-

mal end of the staple carrying portion 40 acts as a tissue shield preventing the target tissue T from entering into the joint between the jaws 17.

[0036] As shown in FIGS. 3-7, to actuate the clamping member 60 to finely approximate the jaws 17, the lower clamping handle 12a is actuated in the direction of the arrow in FIG. 5 to cause the integral gear rack 62a to turn pinion gear 62b which rotates elongated drive cable 64. As shown in FIG. 7, the drive cable 64 is coupled to a drive screw 63 so that rotation of the drive cable 64 rotates the drive screw 63 moving the clamping member 60 distally as shown in FIG. 18. This finely approximates the jaws 17 of the stapling assembly 16 whereby a tissue contacting surface of the staple carrying portion 40 and a tissue contacting surface of the staple forming portion 50 are brought into cooperative alignment, tightly clamping the tissue therebetween. Those skilled in the art will understand that alternative sources of power (e.g., electrical, hydraulic, pneumatic, etc.) may be applied to drive the jaws 17 and to drive all other mechanisms of the stapling assembly 16.

[0037] As shown in FIG. 8, once the jaws 17 have been brought into cooperative alignment with one another, the stapling assembly 16 may be actuated to fire staples through the, clamped tissue while simultaneously cutting away the tissue T from the stapled and anastomized tissue. The user actuates the stapling assembly 16 to drive staples through the margin of healthy tissue in one or more arcuate bands located radially outward of a line of tissue cutting. Alternatively, those skilled in the art will understand that the stapling operation may be separated from the tissue cutting operation so that no tissue is cut until the entire stapling operation has been successfully concluded.

[0038] Specifically, as shown in FIGS. 8-10, the operator drives an I-beam member 70 through the stapling assembly 16 by operating the clamping handle 12b in the direction of the arrow in FIG. 8, causing gear rack 72a to rotate pinion gear 72b which rotates a staple driving drive cable 74 as shown in FIG. 9. The drive cable extends through the flexible body portion 14 to a linear drive screw 76 which drives a flexible pusher 80 coupled to the I-beam member 70 as shown in FIG. 10.

[0039] As shown in FIGS. 11, 13, 14 and 15, the I-beam member 70 includes upper and lower beam portions 82a, 82b, respectively, connected by a central web portion 84. A leading edge 84a of the central web portion 84 may preferably define a cutting blade for incising tissue as the I-beam member 70 is moved distally as described below. As shown in FIG. 11, an arcuate channel 90 within which the central web portion 84 travels, is defined in the opposing jaws 17 radially inward of the arcuate lines of staple carrying slots (not shown). Those skilled in the art will understand that the staple slots may be arranged in any number of rows, for example, from one to five such rows may be included and the slots of these rows may be staggered so that to ensure that the opening created by the resection is completely sealed.

[0040] As described above, actuation of the lower handle 12a causes the C-shaped clamp member 60 to move along an arc the length of the curved stapling assembly 16 to finely approximate the jaws 17 toward one another. As shown in FIGS. 13, 14 and 15, the clamp member 60 includes a body portion 112 from which depend upper and lower clamping beams 114a and 114b, respectively, for urging the jaws 17 toward one another.

[0041] In addition, as shown in FIGS. 16 and 17, in one embodiment of the invention, the body 112 includes a radially depending driving stem 115 having a sloped leading edge configured to extend through an arcuate slot 116 formed in the staple carrying portion 40 for sequentially contacting each of a plurality of staple pushers 118. The staple pushers 118 are positioned so that, when contacted by the driving stem 115, each staple pusher 118 is driven through a corresponding one of the staple slots to drive a staple housed therein from the slot out of the staple carrying portion 40, through both thicknesses of the folded portion of tissue clamped between the jaws 17 and against the staple forming surface 50a of the staple forming portion 50 to couple the two thicknesses of tissue to one another. In this embodiment, the clamping member 60 further includes an integral cutting blade 130 for forming an arcuate incision substantially concentric with and radially within an inner one of the arcs of staple slots. Furthermore, the cutting blade 130 is preferably positioned so that it trails the leading edge 115 so that tissue is stapled before it is cut.

[0042] As shown in FIG. 15, according to a further embodiment of the invention, actuation of the upper actuation handle 12b causes the I-beam member 70 to move through the stapling assembly 16 to sequentially fire arcuate rows of staples while simultaneously cutting tissue away from the esophagus radially within the rows of staples. When the I-beam member 70 is driven by the pusher 80, the sloped leading edge of the upper beam portion 82a contacts sequentially each of a plurality of staple pushers 118 to drive them through their respective staple slots to drive the staples housed therein from each slot out of the staple carrying portion 40, through both thicknesses of the folded portion of tissue clamped between the jaws 17 and into the staple forming pockets 122 formed in the staple forming surface 50a of the staple forming portion 50 to couple the two thicknesses of tissue to one another. As the leading edge 84a of the central web portion 84 is proximal to the sloped leading edge, the incision trails the stapling action so that only tissue within the arc that has previously been stapled is severed.

[0043] As shown in FIGS. 19 and 20, according to a further embodiment of the invention, a stapling assembly 16' according to the present invention may include an endoscope receiving lumen 140 through which the endoscope 20 may be slidably inserted. This allows an operator to use to steering and vision capability of the endoscope 20 to locate the operative site S. Once the distal end of the endoscope 20 is positioned adjacent to the site S, the stapling assembly 16' may be slid along the endoscope 20 to the operative site S and the steering capability of the distal end of the endoscope 20 may be employed to achieve a desired position and orientation of the stapling assembly 16' relative to the tissue T. Other than the endoscope receiving lumen 140, the construction of the rest of the system of FIGS. 19 and 20 may be substantially in accord with that of any of the previously described embodiments.

[0044] Furthermore, as shown in FIGS. 21 and 22, the system according to the present invention may also be used to perform resections within the stomach. For example, the stapling apparatus 10 may be used to correct gastro-esophageal reflux ("GERD") or to perform a stomach reduction procedure. Specifically, as shown in FIG. 21, a system according to the invention may be inserted through the esophagus into a patient's stomach and the operator may

position the jaws **17** under visual control via the endoscope **20** adjacent to a junction between the esophagus and the stomach. The operator then uses the steering capability of the endoscope **20**, received within the endoscope lumen **140** to direct the jaws **17** toward a portion of stomach tissue to be fastened to the esophagus. Specifically, the operator grasps a portion of the stomach using the grasping device **30** and urges the tissue **T** toward the esophagus to create a fold of tissue with an outside surface of the stomach tissue adjacent to or in contact with an outer surface of the esophagus. This fold is then clamped by the jaws **17** and stapled together to reduce the diameter of the opening from the esophagus to the stomach. The tissue radially within the stapled tissue is then resected.

[0045] Similarly as shown in FIG. **22**, to perform a stomach reduction, an operator inserts a system according to the present invention into the stomach via the esophagus as described above in regard to FIG. **21** and locates a portion of tissue to be folded over on itself to reduce the size of the stomach. This tissue **T** is grasped by the grasping device **30** and drawn between the jaws **17** which clamp the tissue **T** together folded onto itself and staples the fold together. Those skilled in the art will understand that, for a stomach reduction procedure, the folded tissue radially within the staples may, if desired, be left in place without resection so that the operation may be reversed at a later date. Thus, for such a stomach reduction procedure where the folded, stapled tissue will be left in place within the stomach, the stapling apparatus **10** need not include a tissue cutting mechanism. Rather, the stapling apparatus **10** need only include structure for approximating the jaws **17** and for driving staples through the gripped fold of tissue. In this case, the C-shaped clamp member **60** would be constructed without the cutting blade **130**.

[0046] The above described embodiments are for purposes of illustration only and the various modifications of these embodiments which will be apparent are considered to be within the scope of the teachings of this invention which is to be limited only by the claims appended hereto.

1-20. (canceled)

21. An apparatus, comprising:

- a head having a first jaw and a second jaw, at least one of the first jaw and the second jaw being movable with respect to the other of the first jaw and the second jaw from a first configuration in which the first jaw and the second jaw are spaced apart at a first distance and a second configuration in which the first jaw and the second jaw are spaced apart at a second distance, a stapling assembly of the first jaw having slots through which staples are configured to be passed in one or more rows extending from a proximal end of the first jaw to a distal end of the first jaw, and an anvil surface of the second jaw being configured to form a staple;
- a first adjustment assembly configured for gross movement of the first jaw or the second jaw;
- a second adjustment assembly including a beam configured for fine adjustment of the first jaw and the second jaw, wherein the beam is coupled to a pushing bar and includes a central web portion connecting an upper beam portion and a lower beam portion, a leading edge of the central web portion mostly being more distal than a trailing edge of the upper beam portion and a trailing edge of the lower beam portion and including a cutting blade, and a portion of the beam contained

within the first jaw being configured to cause a staple pusher to move for firing a staple as the beam moves in a proximal to distal direction;

- a handle having one or more actuators configured to move at least one of the first jaw and the second jaw from the first configuration to the second configuration, and to actuate the stapling assembly; and

- a shaft coupling the handle to the head.

22. The apparatus of claim **21**, wherein one of the first jaw and the second jaw includes an overhanging flange at a proximal end that extends past a surface of the other of the first jaw and the second jaw when the first jaw and second jaw are in the first configuration and the second configuration.

23. The apparatus of claim **21**, wherein the pushing bar is substantially longer than the beam when measured in a proximal to distal direction, and the central web portion has a width approximately in a range of 50% to 100% of the greater of the upper beam portion's width and the lower beam portion's width when measured in a proximal to distal direction.

24. The apparatus of claim **21**, further comprising a gear or a cable for controlling the gross movement or the fine adjustment.

25. An apparatus for stapling tissue, comprising:

- a first jaw and a second jaw, at least one of the first jaw and the second jaw being movable with respect to the other of the first jaw and the second jaw from a first configuration in which the first jaw and the second jaw are separated from each other at a first distance to receive tissue to a second configuration in which the first jaw and the second jaw are clamped together at a second distance to hold tissue therebetween for stapling, a staple carrying portion of the first jaw defining slots through which staples are configured to pass, and an anvil surface defined on the second jaw opposing the first jaw;

at least one of a gear and a cable operatively coupled to at least one of the first jaw and the second jaw and configured to move at least one of the first jaw and the second jaw from the first configuration to the second configuration such that the first jaw and the second jaw are in alignment; and

- a staple pusher configured to cause a staple to move from a first position at least partially within the staple carrying portion to a second position entirely outside the staple carrying portion;

the second distance and the alignment being maintained by a beam configured to engage at least one of the first jaw and the second jaw at least partially from there-within and to cause the staple pusher to move as the beam moves from a proximal location to a distal location, the beam being coupled to a pushing bar which is substantially longer than the beam when measured in a proximal to distal direction.

26. The apparatus of claim **25**, wherein at least a portion of the beam is configured to engage the first jaw or the second jaw entirely from therewithin to maintain the second distance and the alignment.

27. The apparatus of claim **25**, wherein the beam includes an upper beam portion, a lower beam portion, and a central web portion connecting the upper beam portion and the lower beam portion, and a leading edge of the central web portion includes a cutting blade and is generally more distal

than a trailing edge of the upper beam portion and a trailing edge of the lower beam portion.

28. The apparatus of claim **25**, wherein the beam includes an upper beam portion, a lower beam portion, and a central web portion connecting the upper beam portion and the lower beam portion, and the central web portion has a minimum width approximately in a range of 50% to 100% of the greater of the upper beam portion's width and the lower beam portion's width when measured in a proximal to distal direction.

29. The apparatus of claim **25**, further comprising a control handle configured to actuate receiving, clamping and stapling of tissue, and a shaft coupling the control handle to the first jaw and the second jaw, wherein the first jaw and the second jaw are collectively sized to pass through an esophagus.

30. The apparatus of claim **25**, wherein the first jaw and the second jaw are pivotably coupled at a pivot point, one of the first jaw and the second jaw includes an overhanging flange at a proximal end that extends past a surface of the other of the first jaw and the second jaw when the first jaw and the second jaw are in the first configuration and the second configuration.

31. The apparatus of claim **25**, further comprising one or more actuators including at least one of an actuator handle, a lever, a trigger, a knob or a cable.

32. The apparatus of claim **25**, wherein at least a portion of the apparatus is powered.

33. The apparatus of claim **25**, wherein at least a portion of the first jaw and the second jaw is curved.

34. An apparatus, comprising:

a head portion having a first jaw and a second jaw configured to move between a first configuration for receiving tissue and a second configuration for sealing tissue;

a beam having an upper portion and a lower portion connected by a central web portion, wherein the upper portion and the lower portion are configured to clamp and align the first jaw and the second jaw at least partially from therewithin when in the second configuration as the central web portion moves distally along a channel defined in a tissue contacting surface of each of the first jaw and the second jaw;

a control handle configured to actuate receiving, clamping and sealing of tissue; and

a shaft coupling the control handle to the head portion.

35. The apparatus of claim **34**, wherein the central web portion is configured as a cutting blade, and the upper portion and the lower portion are configured to clamp and align the first jaw and the second jaw entirely from therewithin.

36. The apparatus of claim **34**, wherein the first jaw defines a cavity configured to receive a plurality of staples and a plurality of slots configured to pass said staples therethrough;

the second jaw has a staple-forming surface; and

at least a portion of the beam positioned within the first jaw is configured to cause a staple pusher to move for firing a staple as the beam moves distally.

37. The apparatus of claim **36**, wherein the central web portion has a leading edge generally more distal than a trailing edge of the upper portion and a trailing edge of the lower portion and has a width approximately in a range of

50% to 100% of the greater of the upper portion's width and the lower portion's width when measured in a proximal to distal direction.

38. The apparatus of claim **34**, wherein the head portion is movably coupled to the shaft.

39. The apparatus of claim **34**, wherein the head portion is sized for laparoscopic surgery.

40. The apparatus of claim **34**, wherein the control handle includes at least one of an actuation handle, a lever, a trigger, a knob and a cable.

41. The apparatus of claim **34**, wherein the apparatus is powered.

42. The apparatus of claim **41**, wherein the apparatus is powered electrically, hydraulically or pneumatically.

43. The apparatus of claim **34**, wherein one of the first jaw and the second jaw includes an overhanging flange at a proximal end that extends past a surface of the other of the first jaw and the second jaw when the first jaw and second jaw are in the first configuration and the second configuration.

44. The apparatus of claim **34**, wherein at least a portion of the first jaw and the second jaw is curved.

45. An apparatus for stapling tissue, comprising:

a stapling head including a first jaw and a second jaw, at least one of the first jaw and the second jaw being movable to approximate with respect to the other of the first jaw and the second jaw, the first jaw including a staple carrying portion and defining slots configured to pass staples therethrough and the second jaw including a staple forming portion; and

a beam having an upper portion and a lower portion connected by a central web portion, the upper portion and the lower portion being configured to engage the first jaw and the second jaw at least partially from therewithin, respectively, for clamping and alignment, the central web portion being configured to travel along a channel defined in a tissue contacting surface of each of the first jaw and the second jaw to clamp tissue therebetween for stapling, and a portion of the beam within the first jaw being configured to push a staple pusher for firing a staple as the beam travels distally.

46. The apparatus of claim **45**, further comprising:

a control handle configured to actuate driving of staples through the slots and to approximate the first jaw and the second jaw; and

a shaft coupling the control handle to the stapling head.

47. The apparatus of claim **45**, wherein the central web portion is configured as a cutting blade and is configured to engage the first jaw and the second jaw entirely from therewithin.

48. The apparatus of claim **45**, wherein the beam is an I-beam, and the central web portion is configured as a cutting blade, a leading edge of the cutting blade being generally more distal than a trailing edge of the upper portion and a trailing edge of the lower portion, and the central web portion having a width approximately in a range of 50% to 100% of the greater of the upper portion's width and the lower portion's width when measured in a proximal to distal direction.

49. The apparatus of claim **45**, wherein one of the first jaw and the second jaw includes an overhanging flange at a proximal end that extends past a surface of the other of the

first jaw and the second jaw when the first jaw and second jaw are in the first configuration and the second configuration.

50. The apparatus of claim **45**, further comprises a pushing bar coupled to the beam and configured to push the beam distally, the pushing bar being substantially longer than the beam when measured in a proximal to distal direction.

* * * * *

专利名称(译)	用于切除胃食管组织的装置和方法		
公开(公告)号	US20170273687A1	公开(公告)日	2017-09-28
申请号	US15/617835	申请日	2017-06-08
申请(专利权)人(译)	REX医疗, L.P.		
当前申请(专利权)人(译)	REX医疗, L.P.		
[标]发明人	MCGUCKIN JR JAMES F HINCHLIFFE PETER W J		
发明人	MCGUCKIN, JR., JAMES F. HINCHLIFFE, PETER W.J.		
IPC分类号	A61B17/10 A61B17/068 A61B17/072 A61B17/3205 A61B1/273 A61B17/00 A61B17/28 A61B17/29		
CPC分类号	A61B1/2736 A61B17/00234 A61B17/07207 A61B2017/00278 A61B2017/00827 A61B2017/07214 A61B2017/07221 A61B2017/2905 A61B2017/2923 A61B17/068 A61B17/072 A61B17/105 A61B17/3205		
优先权	60/265469 2001-01-31 US		
其他公开文献	US10136892		
外部链接	Espacenet USPTO		

摘要(译)

用于缝合组织的系统包括柔性内窥镜和操作头，操作头包括一对相对的，弯曲的组织夹钳，其尺寸设计成穿过食道，钳口可在开放的组织接收构造和闭合的组织夹紧之间相对于彼此移动。构造，包括钉合机构的第一弯曲钳口和包括形成砧座表面的钉的钳口中的第二个，该钉合机构包括钉槽，钉通过该钉槽布置成从第一端部延伸的一排当操作头处于患者的胃和食道之一内的操作位置时，控制手柄保持在患者体外，控制手柄包括用于相对于患者移动颌的第一致动器。彼此和第二致动器用于操作缝合机构。

