



US010039627B2

(12) **United States Patent**
Chu

(10) **Patent No.:** **US 10,039,627 B2**
(45) **Date of Patent:** **Aug. 7, 2018**

(54) **MEDICAL DEVICE AND METHOD OF
DELIVERING THE MEDICAL DEVICE**

(71) Applicant: **Boston Scientific Scimed, Inc.**, Maple
Grove, MN (US)

(72) Inventor: **Michael S. H. Chu**, Brookline, MA
(US)

(73) Assignee: **Boston Scientific Scimed, Inc.**, Maple
Grove, MN (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 444 days.

(21) Appl. No.: **14/199,643**

(22) Filed: **Mar. 6, 2014**

(65) **Prior Publication Data**

US 2014/0257028 A1 Sep. 11, 2014

Related U.S. Application Data

(60) Provisional application No. 61/776,411, filed on Mar.
11, 2013.

(51) **Int. Cl.**

A61F 2/00 (2006.01)

A61B 17/06 (2006.01)

A61B 17/42 (2006.01)

(52) **U.S. Cl.**

CPC **A61F 2/0045** (2013.01); **A61B 17/06109**
(2013.01); **A61F 2/0063** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC **A61F 2/0045**; **A61F 2/0022**; **A61F 2/0063**;
A61F 2/0036; **A61B 2017/00805**; **A61B**
17/00234

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,575,897 B1 6/2003 Ory et al.
6,695,855 B1 2/2004 Gaston

(Continued)

FOREIGN PATENT DOCUMENTS

WO 2007106897 A2 9/2007
WO 2008048971 A2 4/2008
WO 2014164340 A1 10/2014

OTHER PUBLICATIONS

International Preliminary Report on Patentability for PCT Applica-
tion No. PCT/US14/21983, dated Sep. 24, 2015, 9 pages.

(Continued)

Primary Examiner — Christine H Matthews


(74) *Attorney, Agent, or Firm* — Brake Hughes
Bellermann LLP

(57)

ABSTRACT

In an embodiment, the invention discloses an implant that includes a first elongate member and a second elongate member formed monolithically with the first elongate member out of a single material and planar strip of material. The first elongate member includes a distal end portion and a proximal end portion. The second elongate member includes a first portion and a second portion. Further, each of the first portion of the second elongate member and the second portion of the second elongate member includes a proximal end portion and a distal end portion. The first portion and the second portion extend from the first elongate member. The distal end portion of the first elongate member is configured to be attached to or proximate a sacrum.

14 Claims, 9 Drawing Sheets

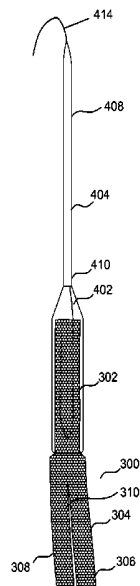

- (52) **U.S. Cl.**
CPC *A61B 17/42* (2013.01); *A61B 2017/06052*
(2013.01); *A61F 2230/006* (2013.01); *A61F*
2250/0071 (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,985,173	B2	7/2011	Jacquetin
7,985,174	B2	7/2011	Nicita
7,998,055	B2	8/2011	Siegel et al.
8,057,382	B2	11/2011	Thierfelder et al.
8,109,867	B2	2/2012	Rosenblatt
8,262,557	B2	9/2012	Chapman et al.
8,460,171	B2	6/2013	Von Pechmann et al.
9,414,902	B2	8/2016	Miller
2002/0028980	A1	3/2002	Thierfelder et al.
2002/0095181	A1	7/2002	Beyar
2002/0183588	A1	12/2002	Fierro
2004/0087970	A1	5/2004	Chu et al.
2005/0101834	A1	5/2005	Merade
2007/0173864	A1	7/2007	Chu
2007/0270890	A1	11/2007	Miller
2007/0293717	A1	12/2007	Kaleta et al.
2008/0045894	A1	2/2008	Perchik et al.

2008/0119863	A1	5/2008	Mellier
2008/0146886	A1	6/2008	Lucas
2009/0171140	A1	7/2009	Chu
2009/0171142	A1	7/2009	Chu
2009/0171143	A1	7/2009	Chu et al.
2009/0216075	A1	8/2009	Bell et al.
2009/0326573	A1	12/2009	Miller
2010/0145140	A1	6/2010	Chu
2010/0191038	A1	7/2010	Kubalak et al.
2010/0280627	A1 *	11/2010	Hanes, II A61B 17/0218 623/23.72
2011/0105836	A1	5/2011	Miller
2011/0301407	A1 *	12/2011	Deitch A61B 17/0401 600/30
2012/0083807	A1	4/2012	Mathisen et al.
2012/0108894	A1	5/2012	Young et al.
2013/0006050	A1	1/2013	Rane et al.
2016/0331503	A1	11/2016	Miller

OTHER PUBLICATIONS

International Search Report and Written Opinion for PCT Application No. PCT/US14/21983, dated Jul. 3, 2014, 14 pages.

* cited by examiner

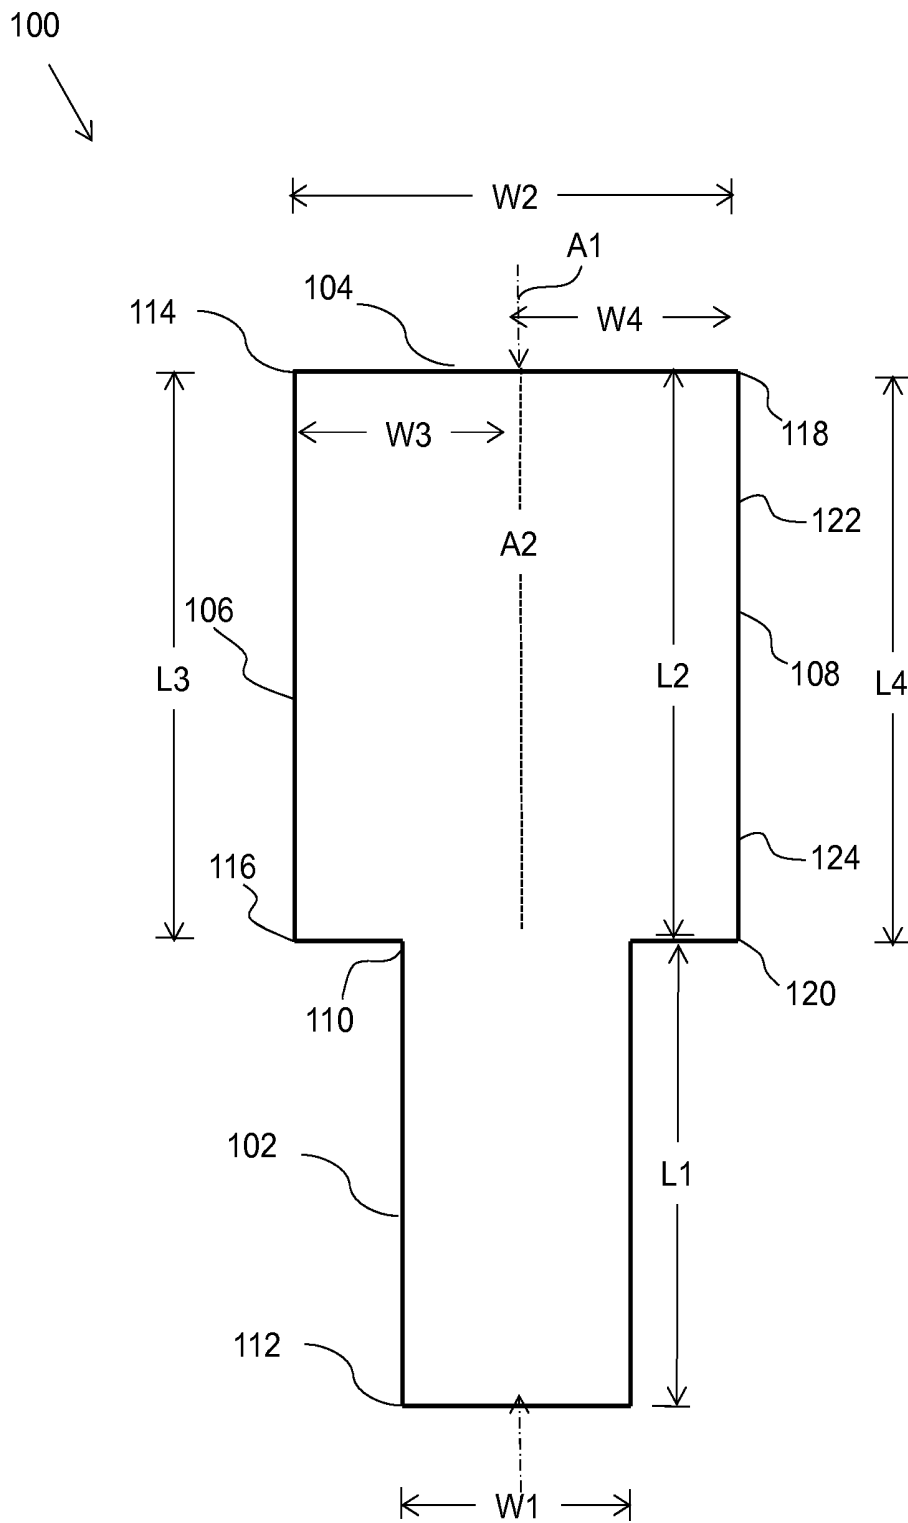


FIG. 1

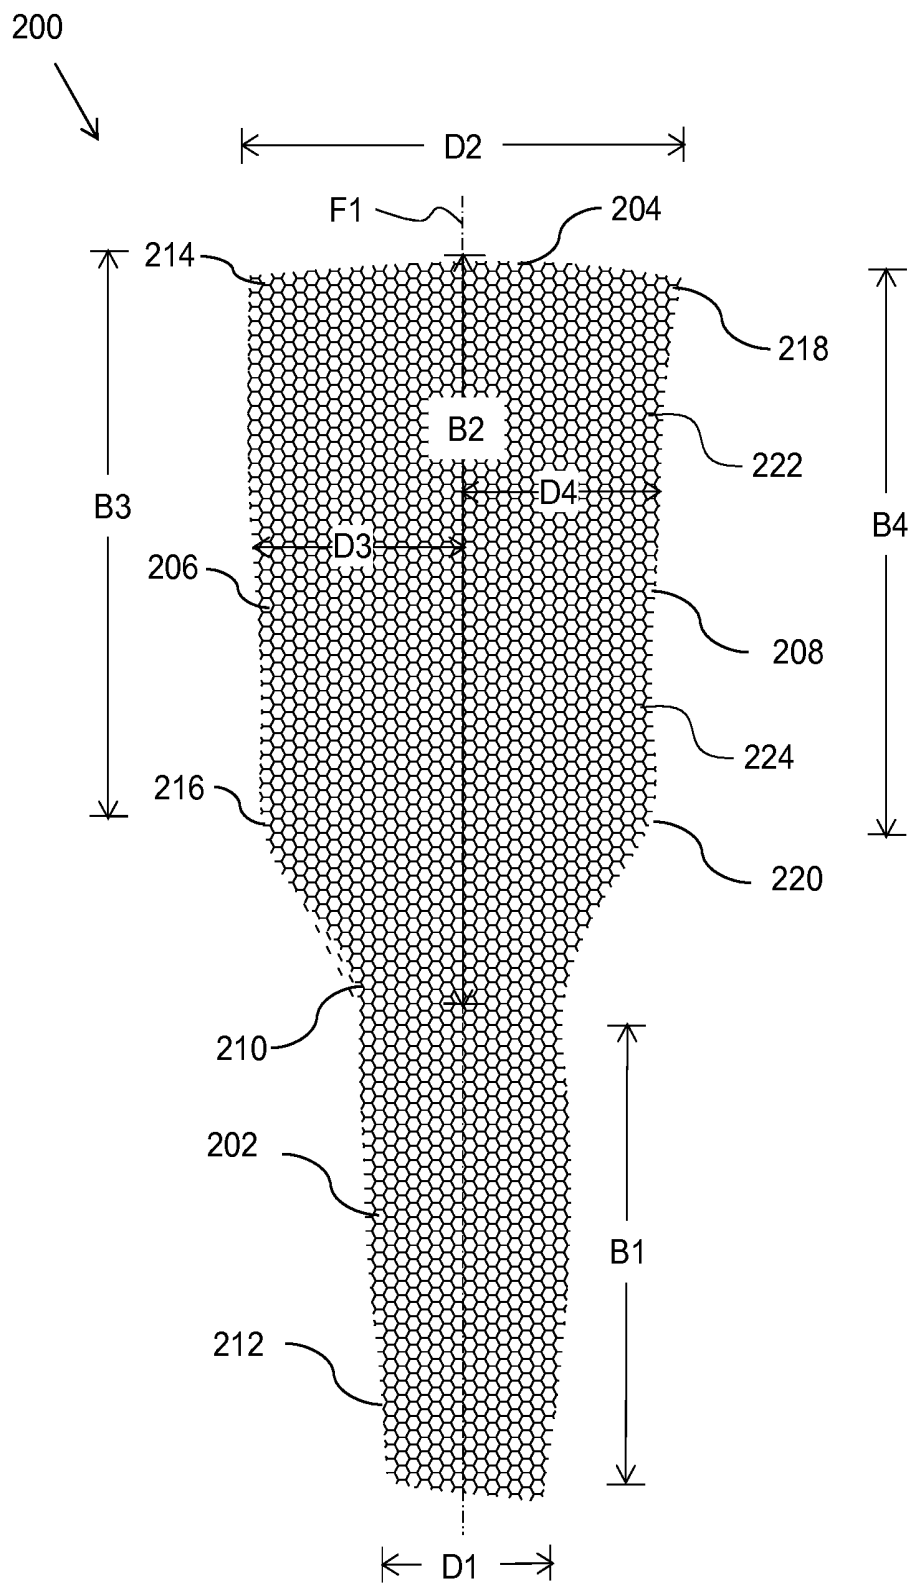


FIG. 2

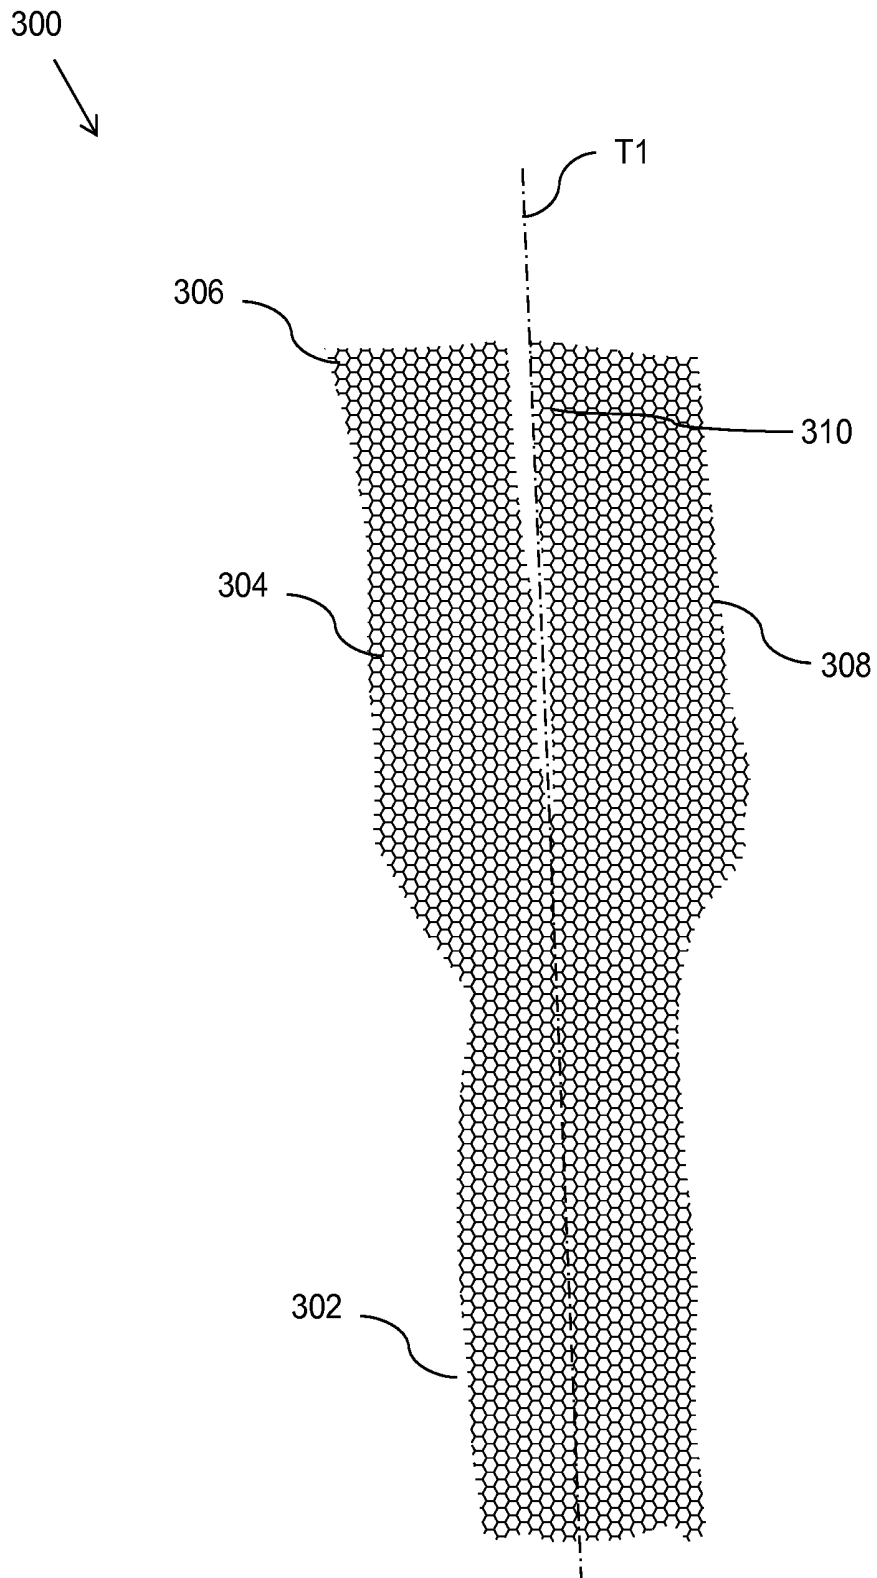


FIG. 3

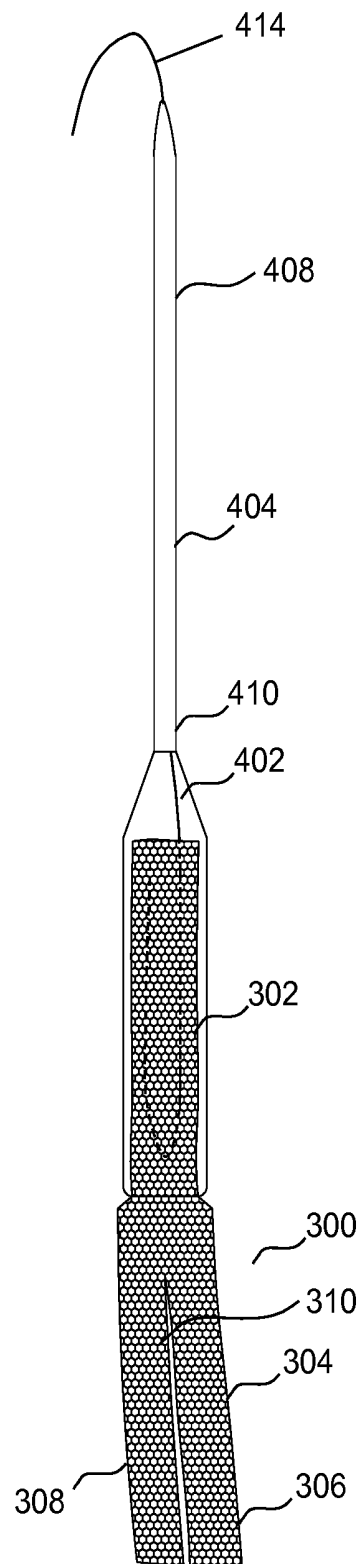


FIG. 4A

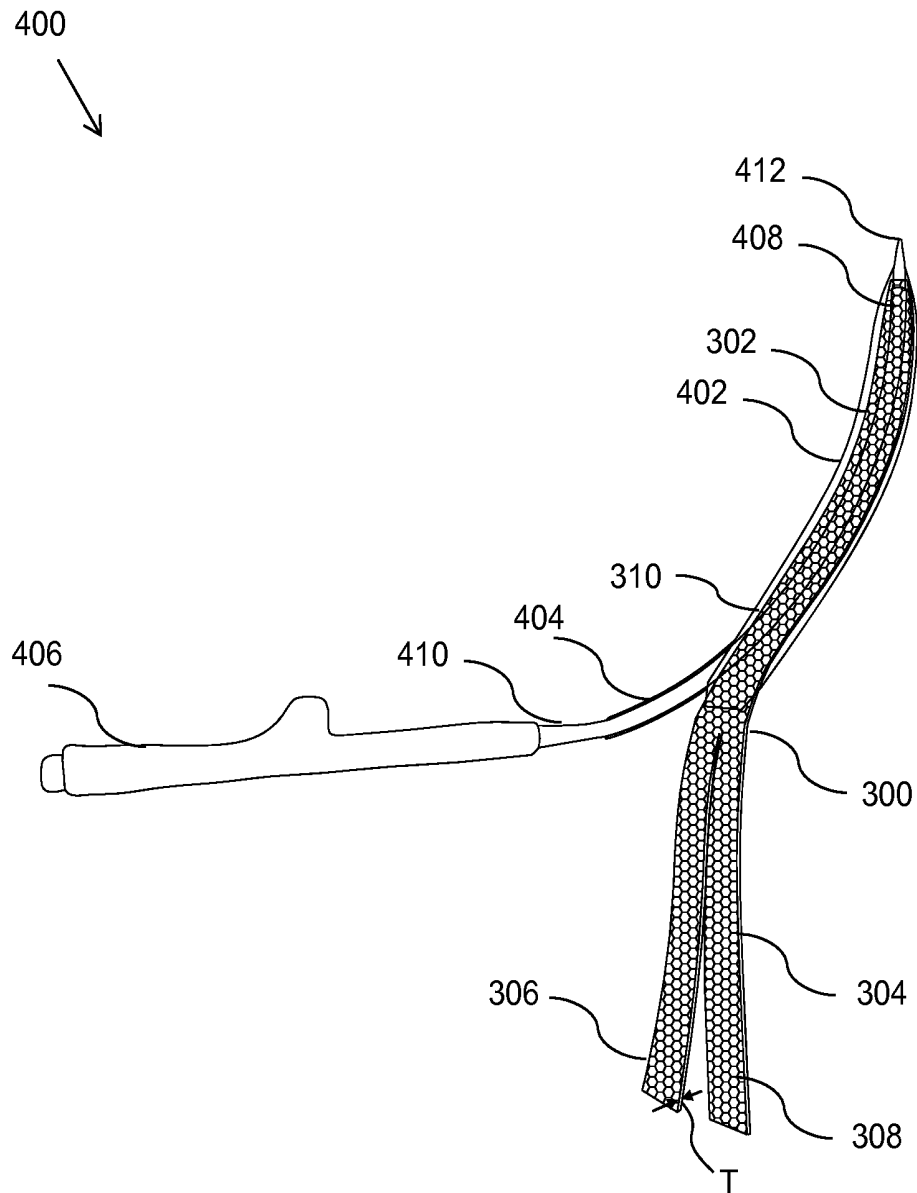


FIG. 4B

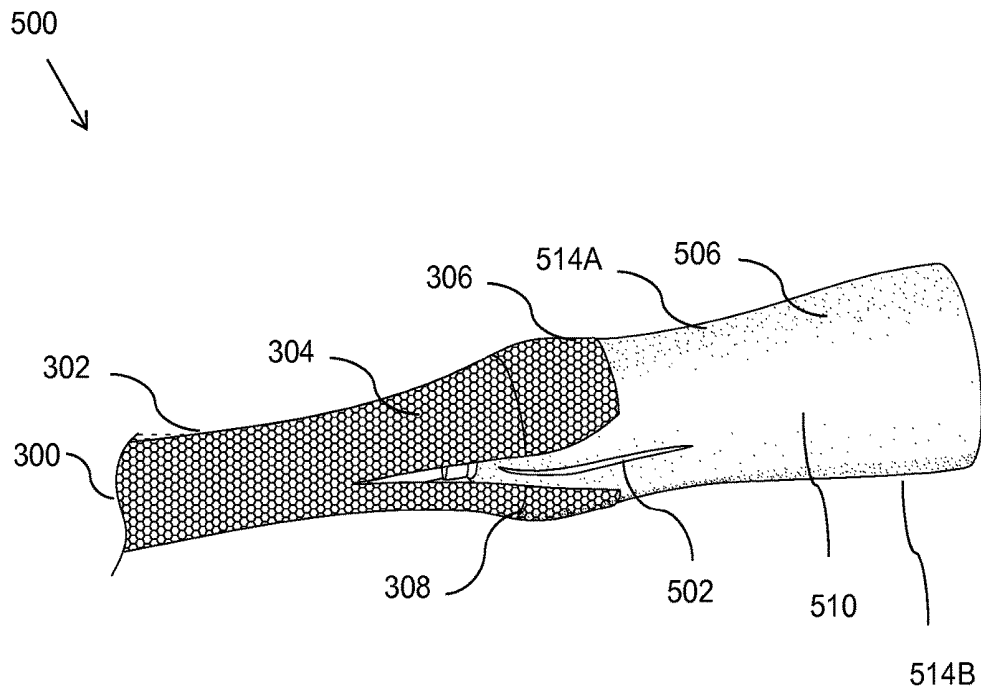


FIG. 5A

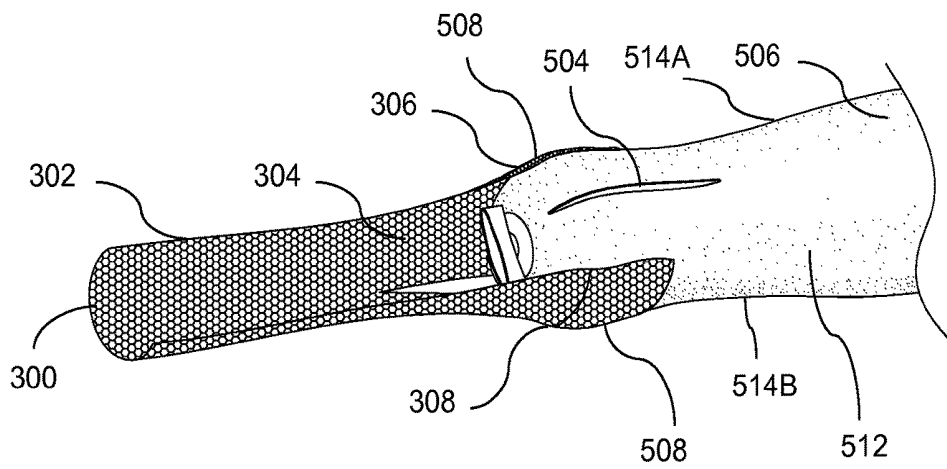


FIG. 5B

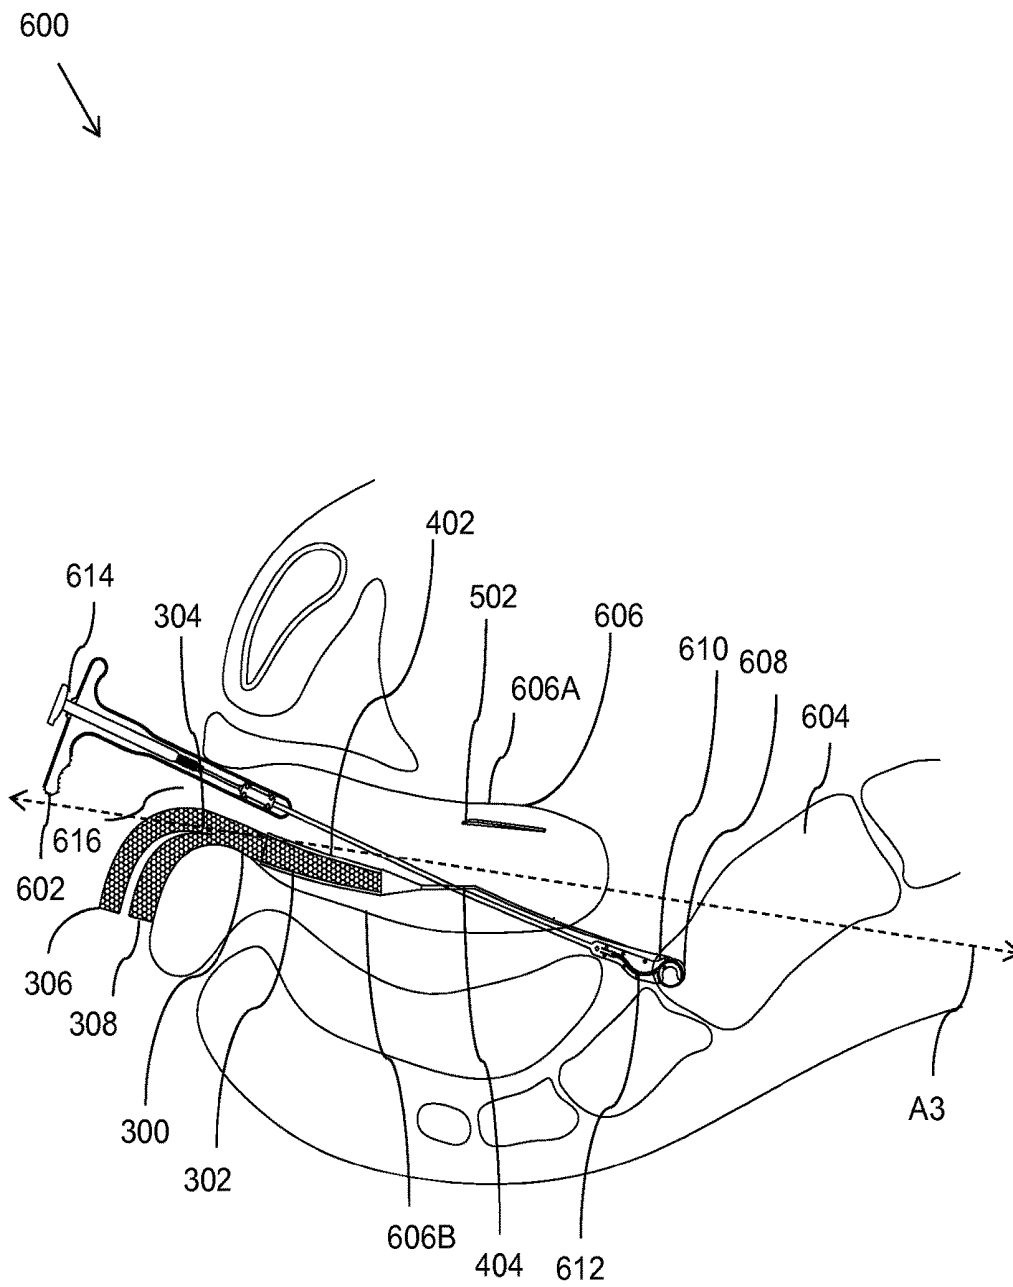


FIG. 6A

600
↓

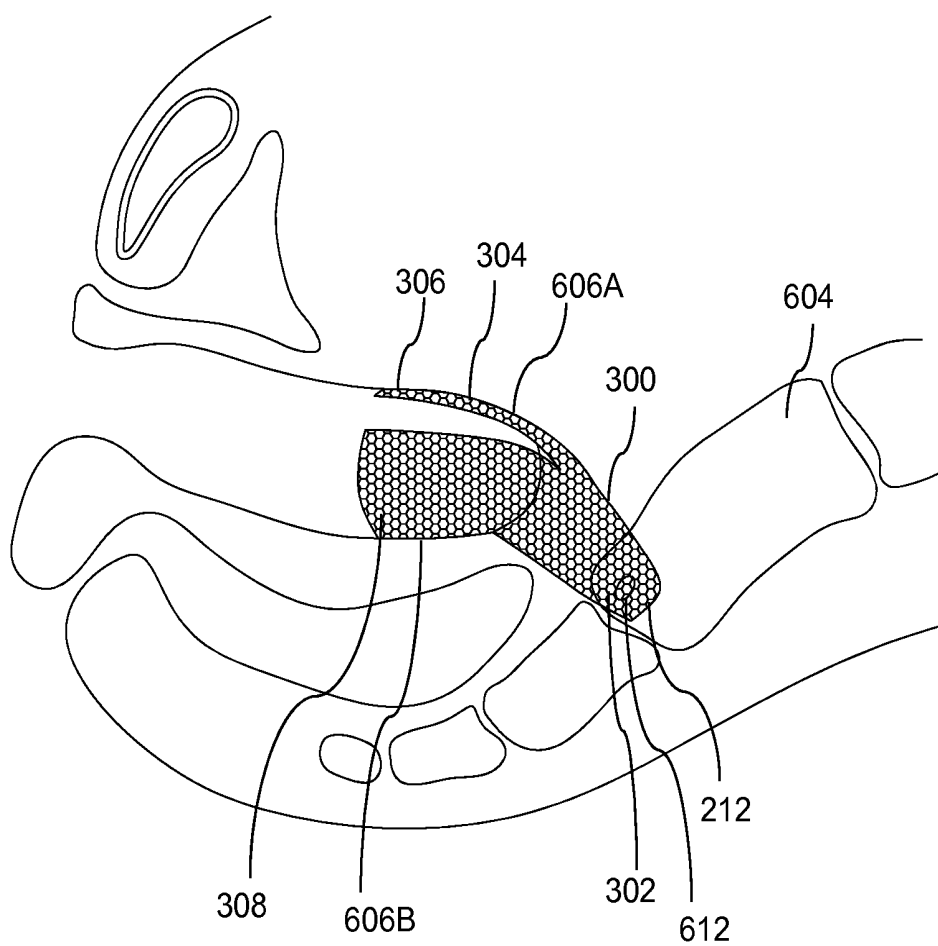


FIG. 6B

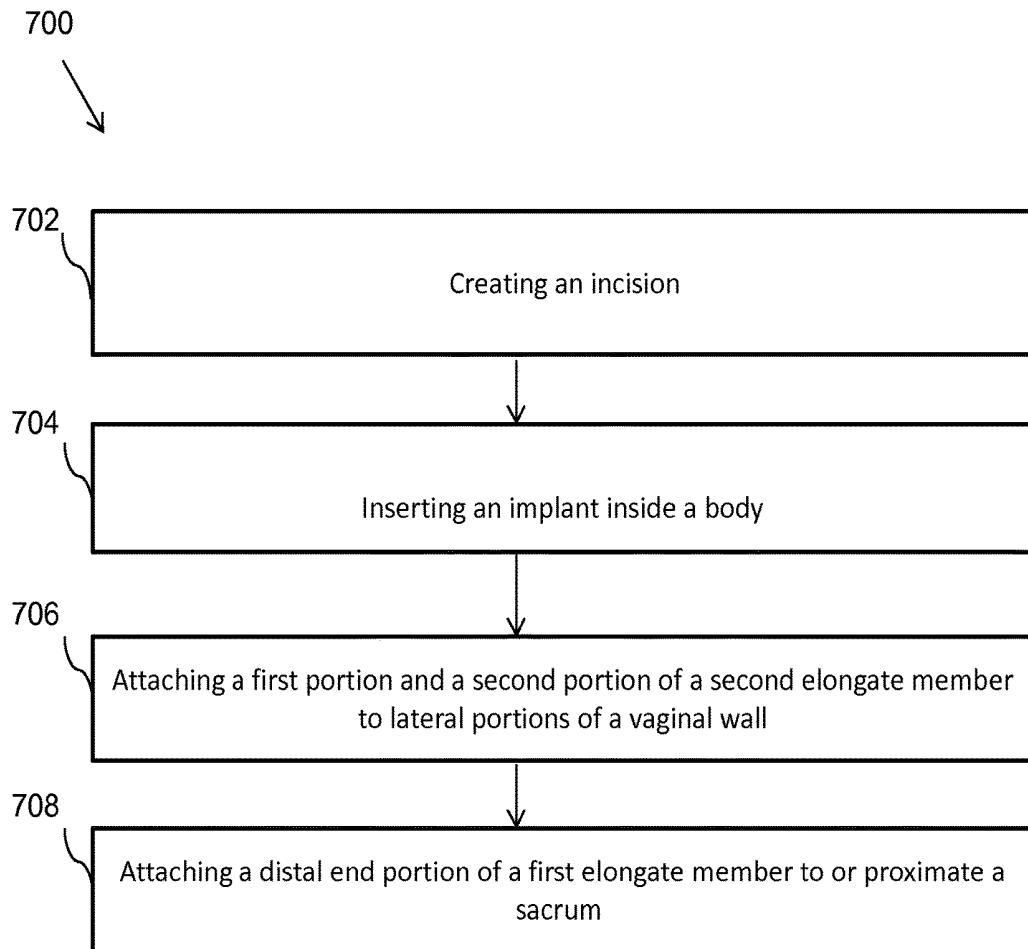


FIG. 7

1

**MEDICAL DEVICE AND METHOD OF
DELIVERING THE MEDICAL DEVICE****CROSS REFERENCE TO RELATED
APPLICATION**

This application is a Nonprovisional of, and claims priority to, U.S. Patent Application No. 61/776,411, filed on Mar. 11, 2013, entitled "MEDICAL DEVICE AND METHOD OF DELIVERING THE MEDICAL DEVICE", which is incorporated by reference herein in its entirety.

FIELD

The present invention generally relates to medical devices and procedures, and particularly, devices and methods configured to be delivered and placed in a patient's body for the treatment of pelvic organ prolapse.

DESCRIPTION OF THE RELATED ART

Pelvic organ prolapse is an abnormal descent or herniation of the pelvic organs. A prolapse may occur when muscles and tissues in the pelvic region become weak and can no longer hold the pelvic organs in place correctly.

Treatment for symptoms of the pelvic organ prolapse can include changes in diet, weight control, and lifestyle. Treatment may also include surgery, medication, and use of grafts to support the pelvic organs.

Sacrocolpopexy is one such surgical technique that may be used to repair pelvic organ prolapse. This can be performed using an open abdominal technique or with the use of minimally invasive surgery, such as laparoscopy or robotic-assisted surgery. The technique includes suspension of the apical portion of vagina (or sometimes the vaginal cuff after hysterectomy) using an implant such that the technique recreates the natural anatomic support.

In some cases, a Y-shaped implant may be used to treat vaginal vault prolapse during the sacrocolpopexy procedure. The Y-shaped implant aids vaginal cuff suspension to the sacrum and provides long-term support. The procedure can be minimally invasive (laparoscopic sacral colpopexy) or traditional (open sacral colpopexy). The existing Y-shaped implants may be made by joining two pieces of materials. This results in the formation of a junction or a seam between the two piece materials. Stress development along junctions can lead to failure, seam irritation or stiffness, and other similar problems in such implants. The process used for joining the two pieces also increases the manufacturing time and cost.

Thus, in light of the above, there is a need for an improved Y-shaped implant.

SUMMARY

In an embodiment, the invention discloses an implant that includes a first elongate member and a second elongate member formed monolithically with the first elongate member out of a single material and planar strip of material. The first elongate member includes a distal end portion and a proximal end portion. The second elongate member includes a first portion and a second portion. Further, each of the first portion of the second elongate member and the second portion of the second elongate member includes a proximal end portion and a distal end portion. The first portion and the second portion extend from the first elongate member. The distal end portion of the first elongate member is configured

2

to be attached to or proximate a sacrum. The first portion and the second portion are configured to cover at least partially and be attached to a portion of the lateral walls of a vagina such that the first portion and the second portion extend longitudinally along the lateral walls of the vagina.

In an embodiment, the invention discloses a medical device. The medical device includes a Y-shaped implant, a sleeve covering at least a portion of the implant, and a dilator. The Y-shaped implant includes a first elongate member and a second elongate member. The first elongate member includes a distal end portion and a proximal end portion. The second elongate member is formed monolithically with the first elongate member out of a single and planar strip of material. The second elongate member includes a first portion and a second portion. Further, each of the first portion and the second portion includes a proximal end portion and a distal end portion, such that the first and second portions extend from the first elongate member. The dilator includes a proximal end portion and a distal end portion, such that the proximal end portion of the dilator is configured to be coupled to the implant.

In an embodiment, the invention discloses a method of implanting a medical device in a patient's body. The method comprises creating one of an anterior incision and a posterior incision at one of the anterior and posterior vaginal walls, respectively. The method includes inserting a Y-shaped implant inside the body trans-vaginally. The implant includes a first elongate member having a distal end portion and a proximal end portion and a second elongate member including a first portion and a second portion such that the second elongate member extend monolithically from the first elongate member. The method further includes attaching the first portion and the second portion to lateral portions of a vaginal wall such that the first portion and the second portion extend longitudinally down the lateral portions of the vaginal wall. The method further includes attaching a distal end portion of the first elongate member to or proximate to a sacrum.

BRIEF DESCRIPTION OF THE FIGURES

The invention and the following detailed description of certain embodiments thereof may be understood with reference to the following figures:

FIG. 1 illustrates a schematic diagram of an implant configured to be implanted within a patient's body, in accordance with an embodiment of the present invention.

FIG. 2 illustrates a top view of an implant configured to be placed within a patient's body, in accordance with an embodiment of the present invention.

FIG. 3 illustrates a top view of an implant configured to be placed within a patient's body, in accordance with an embodiment of the present invention.

FIG. 4A illustrates a top view of an implant coupled to a dilator and a sleeve, in accordance with an embodiment of the present invention.

FIG. 4B illustrates a perspective view of an implant coupled to a dilator and an insertion tool for delivery and placement of the implant within a patient's body, in accordance with an embodiment of the present invention.

FIG. 5A illustrates a schematic view of placement of an implant within a patient's body through an anterior incision, in accordance with an embodiment of the present invention.

FIG. 5B illustrates a schematic view of the placement of the implant of FIG. 5A within a patient's body through a posterior incision, in accordance with an embodiment of the present invention.

FIG. 6A illustrates placement of an implant within a patient's body with a suturing device, in accordance with an embodiment of the present invention.

FIG. 6B illustrates the implant from FIG. 6A placed and sutured within a patient's body, in accordance with an embodiment of the present invention.

FIG. 7 is a flowchart illustrating a method of placing an implant in a patient's body, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

Detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the invention, which may be embodied in various forms. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the present invention in virtually any appropriately detailed structure. Further, the terms and phrases used herein are not intended to be limiting, but to provide an understandable description of the invention.

The terms "a" or "an," as used herein, are defined as one or more than one. The term "another," as used herein, is defined as at least a second or more. The terms "including" and/or "having", as used herein, are defined as comprising (i.e., open transition).

In general, the invention is directed to systems, methods, and devices for treating vaginal prolapse. However, the invention may be equally employed for other treatment purposes such as pelvic organ prolapse or other pelvic disorders. As described below in various illustrative embodiments, the invention provides systems, methods, and devices employing a medical device including an implant such that the implant is configured to be placed within a patient's body to support pelvic organs for the treatment of pelvic prolapse.

The term patient may be used hereafter for a person who benefits from the medical device or the methods disclosed in the present invention. For example, the patient may be a person whose body receives the medical device disclosed by the present invention in a surgical treatment. For example, in some embodiments, the patient may be a human female, human male or any other mammal.

The terms proximal and distal described in relation to various devices, apparatuses, and components as discussed in the subsequent text of the present invention are referred to with a point of reference. The point of reference, as used in this description, is a perspective of an operator. The operator may be a surgeon, a physician, a nurse, a doctor, a technician, and the like who may perform the procedure of delivery and placement of the bodily implants into the patient's body as described in the present invention. The term proximal refers to an area that is closest to the operator. The term distal refers to an area that is farthest from the operator.

FIG. 1 is a schematic diagram of an implant 100 configured to be placed within a patient's body. In some embodiments, the implant 100 is configured to support bodily tissues for the treatment of pelvic floor prolapse. The implant 100 includes a first elongate member 102 and a second elongate member 104 formed monolithically with the first elongate member 102 out of a single and planar strip or piece of material. The second elongate member 104 includes a first portion 106 and a second portion 108 such

that both the first portion 106 and the second portion 108 extend from the first elongate member 102.

The first elongate member 102 includes a proximal end portion 110 and a distal end portion 112 with a length L1 extending between the proximal end portion 110 and the distal end portion 112. The first elongate member 102 includes a width W1. In accordance with some embodiments, the width W1 of the first elongate member 102 is uniform from the proximal end portion 110 to the distal end portion 112. In some other embodiments, the width W1 of the first elongate member 102 varies from the proximal end portion 110 to the distal end portion 112. In some embodiments, the first elongate member 102 is a strip with the length L1 substantially more than its width W1. In certain embodiments, the first elongate member 102 is rectangular in shape. In some other embodiments, the first elongate member 102 may have other shapes and sizes. For example, the first elongate member 102 may have a triangular shape, a bell shape, or any other shape.

The second elongate member 104 extends monolithically from the first elongate member 102. The second elongate member 104 includes a proximal end portion 122 and a distal end portion 124 with a length L2 extending between the proximal end portion 122 and the distal end portion 124. In some embodiments, the length L2 of the second elongate member 104 is lesser than the length L1 of the first elongate member 102. In some embodiments, the length L2 of the second elongate member 104 is half of the length L1 of the first elongate member 102. In some other embodiments, the length L1 of the first elongate member 102 and the length L2 of the second elongate member 104 can be the same. The second elongate member 104 includes a width W2. In accordance with some embodiments, the width W2 of the second elongate member 104 is uniform from the proximal end portion 122 to the distal end portion 124. In some other embodiments, the width W2 of the second elongate member 104 varies from the proximal end portion 122 to the distal end portion 124. In some embodiments, the second elongate member 104 has the width W2 equal to the width W1 of the first elongate member 102. In some embodiments, the second elongate member 104 has the width W2 lesser than the width W1 of the first elongate member 102. Further, in some other embodiments, the second elongate member 104 has the width W2 greater than the width W1 of the first elongate member 102. In some embodiments, the second elongate member 104 is a strip extended from the first elongate member 102 with its width W2 substantially less than its length L2. In certain embodiments, the second elongate member 104 is rectangular in shape. In some other embodiments, the second elongate member 104 may have other shapes. For example, the second elongate member 104 may have a triangular shape, a bell shape, or any other shape.

The second elongate member 104 includes the first portion 106 and the second portion 108 (as denoted by a dotted line A2 in FIG. 1) that extend from the first elongate member 102. In some embodiments, the first portion 106 and the second portion 108 can form an integral part of the second elongate member 104 that can extend monolithically from the first elongate member 102, thereby forming the implant 100 including the first and the second elongate members 102 and 104 made of a single material.

The first portion 106 includes a proximal end portion 114 and a distal end portion 116 with a length L3 extending between the proximal end portion 114 and the distal end portion 116. The second portion 108 includes a proximal end portion 118 and a distal end portion 120 with a length L4 extending between the proximal end portion 118 and the

distal end portion **120**. In some embodiments, the length **L3** of the first portion **106** and length **L4** of the second portion **108** can be the same. In some other embodiments, the lengths **L3** and **L4** can be different. The first portion **106** defines a width **W3** and the second portion **108** defines a width **W4**. In some embodiments, the width **W3** is equal to the width **W4**. In some embodiments, the width **W3** is lesser than the width **W4**. Further, in some embodiments, the width **W3** is greater to the width **W4**.

In some embodiments, the first portion **106** and the second portion **108** of the second elongate member **104** may be separated by a division or a partition or cut or slot provided longitudinally along a longitudinal axis **A1**. The division or cut can divide the implant **100** into three separately moveable arms defined by the first elongate member **102**, the first portion **106**, and the second portion **108**. The three arms can be movable with respect to one another to conform to the shape of the target anatomical location of attachment inside the body. The three arms can take a shape such as linear/planar, curvilinear, curved, or any other shape and can conform to the target anatomical location of the patient where the first portion **106** and the second portion **108**, and the first elongate member **102** are attached. Upon placement, the first portion **106** of the second elongate member **104**, the second portion **108** of the second elongate member **104**, and the distal end portion **112** of the first elongate member **102** act as three different arms that can be configured to support the pelvic organs by attaching the implant **100** at three distinct bodily locations.

In some embodiments, the implant **100** can be prefabricated such that the cut separates the first portion **106** and the second portion **108** along one of their edges. In some embodiments, the implant **100** can be prefabricated such that the first portion **106** and the second portion **108** of the second elongate member **104** are not separated by the cut. In such cases, an operator may have the liberty to provide the cut before performing the operating procedure as per the requirements and thus, the width **W3** and the width **W4** can be varied by the operator prior to placement of the implant **100** based on the anatomical location of the patient where the first portion **106** and the second portion **108** are to be attached. Also, in such embodiments, the operator or surgeon may alter the length **L1** of the first elongate member **102** at his discretion by varying the length of the cut along the second elongate member **104** longitudinally. Thus, in some embodiments, the operator may vary the length **L1** and **L2**, and widths **W3** and **W4** at his discretion. In some embodiments, the lengths **L1** and **L2** can be 5 inches. In other embodiments, the lengths **L1** and **L2** can vary based on the requirement. In some embodiments, the widths **W1**, **W2**, and **W3** can be 1.5 inches. In other embodiments, the widths **W1**, **W2**, and **W3** can vary based on the requirement. Thus, in some embodiments, there are possibilities of defining the lengths and widths of various portions of the implant **100** as per the requirements by providing the cut. The implant **100** includes a thickness **T** (shown in FIG. 4). In some embodiments, the thickness **T** can be substantially smaller than the widths **W1**, **W2** and **W3**. For example, in some embodiments, the thickness **T** can vary from 0.0078-0.0196 inches, whereas at least one of the widths **W1**, **W2** and **W3** can be 1.5 inches, though other values are also possible in some other embodiments. In such embodiments, as the thickness **T** is very small as compared to the widths **W1**, **W2** and **W3**, therefore the implant **100** defines a planar-Y shape when viewed as a top view. In some embodiments, the thickness of the first portion **106**, second portion **108**, and the first elongate member **102** can be same or different.

In some embodiments, the cut can be defined or provided by removal of a piece of material between the first portion **106** and the second portion **108**. In such cases, the cut can have a width (described later by FIG. 3 in a specific embodiment) such that there is a noticeable space between the first portion **106** and the second portion **108** due to removal of some portion of the material.

The first portion **106** and the second portion **108** of the second elongate member **104** are configured to cover at least partially and be attached to a portion of the lateral walls of a patient's vagina such that the first portion **106** and the second portion **108** extend longitudinally down the lateral walls of the vagina. In accordance with these embodiments, the first portion **106** of the second elongate member **104** is, for example, attached to a first lateral wall of the vagina and the second portion **108** of the second elongate member **104** is attached to a second lateral wall of the vagina.

In some embodiments, the procedure of the implant **100** within the body can be performed after performing hysterectomy and removal of uterus from the body. In such cases, where a uterus of the patient is removed, the first portion **106** and the second portion **108** are attached to the vaginal cuff of the patient or a location proximate the vaginal cuff of the patient. In some embodiments, the first portion **106** and the second portion **108** are attached to the vaginal cuff at 3 o'clock and 9 o'clock positions when viewed in a front view along the vaginal opening. In some other embodiments where the uterus is intact, the first portion **106** and the second portion **108** are attached to the vaginal apex of the patient or a location proximate the vaginal apex of the patient. The distal end portion **112** of the first elongate member **102** is configured to be attached to or proximate to a sacrum of the patient.

The first elongate member **102**, the first portion **106**, and the second portion **108** of the second elongate member **104** can be attached inside the patient's body through various attachment elements or means. In some embodiments, the attachment elements include, without limitations, sutures, adhesives, bonding agents, mechanical fasteners (e.g. a medical grade plastic clip), staples, and the like. In some embodiments, the implant can be sutured to bodily tissues with the use of a suturing device such as a Capiro™ (as sold and distributed by Boston Scientific Corporation) and the like.

In some embodiments, the implant **100** can be delivered inside a patient's body using any suitable insertion tool such as a needle or any other device. In some embodiments, a dilator may be attached to the implant **100** and used to deliver the implant **100** inside the patient's body.

In various embodiments, as discussed above, the implant **100** is made of a single piece of material. In some embodiments, the material is synthetic. In some embodiments, the implant includes a polymeric mesh body. Exemplary polymeric materials are polypropylene, polyester, polyethylene, nylon, PVC, polystyrene, and the like. In some other embodiments, the implant includes a polymeric planar body without mesh cells. In some embodiments, the implant is made of a mesh body made of a non-woven polymeric material. An example of the mesh, out of which the single piece implant is formed, can be Polyform® Synthetic Mesh developed by the Boston Scientific Corporation. The Polyform® Synthetic Mesh is made from uncoated monofilament macro-porous polypropylene. In some embodiments, the mesh weight of the implant can be approximately between 15 g/cm² to 35 g/cm² (e.g., 20 g/cm², 25 g/cm², 30 g/cm²). In other embodiments, the mesh weight of the implant is greater than 35 g/cm². Typically, the surface of the

implant **100** is made smooth to avoid/reduce irritation on adjacent body tissues during medical interactions. Additionally, the implant is stretchable and flexible to adapt movements along the anatomy of the human body and reduce suture pullout. Furthermore, softness, lightness, conformity, and strength are certain other attributes that can be provided in the implant for efficient tissue repair and implantation. In some embodiments, as discussed additionally below, the implant **100** can be made of natural materials such as biologic material or a cadaveric tissue and the like. Exemplary biologic materials are bovine dermis, porcine dermis, porcine intestinal sub mucosa, bovine pericardium, a cellulose based product, cadaveric dermis, and the like.

In some embodiments, the implant **100** may be formed of a sheet type material. The sheet may include pore or may be substantially solid. In some embodiments, the sheet type material may be porous or non-porous. In some embodiments, at least a portion of the implant **100** can be made of a biologic material such as an Allograft and/or a Xenograft. In some implementations, the biologic material can include cadaveric tissue, bovine dermis, porcine dermis, porcine intestinal sub mucosa, bovine pericardium, a cellulose based product, cadaveric dermis, and/or so forth. In some implementations, the Allograft materials can include Tutoplast®, Repliform®, DuraDerm®, Urogen®, and/or so forth. In some implementations, the Xenograft materials can include Xenofarm® (e.g., Xenofarm Matrix), Stratisis®, Dermatrix® and/or so forth. In some implementations, the implant **100** can be made of a biologic material because the biologic material can be relatively robust against tissue erosion.

FIG. 2 is a perspective view of an implant **200** configured to be placed into a patient's body, in accordance with an embodiment of the present invention. The implant **200** includes a first elongate member **202** and a second elongate member **204** formed monolithically with the first elongate member **202** out of a single and planar strip or piece of material. The second elongate member **204** includes a first portion **206** and a second portion **208** such that both the first portion **206** and the second portion **208** extend monolithically from the first elongate member **202**, thereby forming the implant **200** including the first and the second elongate members **202** and **204** made of a single material.

The first elongate member **202** includes a proximal end portion **210** and a distal end portion **212** with a length B1 extending between the proximal end portion **210** and the distal end portion **212**. The first elongate member **202** includes a width D1. In accordance with the illustrated embodiments, the width D1 of the first elongate member **202** is uniform from the proximal end portion **210** to the distal end portion **212**. In some other embodiments, the width D1 of the first elongate member **202** can vary as discussed in FIG. 1. In some embodiments, as illustrated, the first elongate member **202** is a strip with the length B1 substantially more than its width D1. As illustrated, the first elongate member **202** is rectangular in shape. In other embodiments, the first elongate member **202** may have other shapes.

The second elongate member **204** extends monolithically from the first elongate member **202** as the first elongate member **202** and the second elongate member **204** are formed of a single piece of material. The second elongate member **204** includes a proximal end portion **222** and a distal end portion **224** with a length B2 extending between the proximal end portion **222** and the distal end portion **224**. In the illustrated embodiment, the length B2 of the second elongate member **204** is more than the length B1 of the first elongate member **202**. In some embodiments, however, the length B2 can vary as discussed in some other embodiments

in FIG. 1. The second elongate member **204** includes a width D2. In accordance with some embodiments as illustrated, the width D2 of the second elongate member **204** is uniform from the proximal end portion **222** to almost the distal end portion **224** with a taper at the distal end portion **224** that extends to the first elongate member **202**. The taper can be defined by a smooth curved profile in some embodiments. In some embodiments, the second elongate member **204** has the width D2 greater than the width D1 of the first elongate member **202**.

The second elongate member **204** includes the first portion **206** and the second portion **208** that extend from the first elongate member **202** such that the distal end portion **224** of the second elongate member **204** is proximate to the proximal end portion **210** of the first elongate member **202**.

The first portion **206** includes a proximal end portion **214** and a distal end portion **216** with a length B3 extending between the proximal end portion **214** and the distal end portion **216**. The second portion **208** includes a proximal end portion **218** and a distal end portion **220** with a length B4 extending between the proximal end portion **218** and the distal end portion **220**. In some embodiments, the length B3 of the first portion **206** and the length B4 of the second portion **208** can be almost the same (as shown), but other embodiments are also possible as discussed in FIG. 1. The first portion **206** defines a width D3 and the second portion **208** defines a width D4 at their distal portions.

A portion of the implant **200** shown in FIG. 2 can be linearly or in any other shape cut by making a division or cut such as longitudinally or in any other pattern along the length B2 of the second elongate member **204** to separate the first portion **206** from the second portion **208** before performing the procedure. This can then convert the implant **200** into a three arm-based implant such that each arm can be positioned at one distinct location inside the body. In some embodiments, the operator or surgeon may define lengths and widths of the first and second portions **206** and **208** by providing a cut in the implant **200** before the procedure. In these embodiments, the first portion **206** can be folded over to the second portion **208** along a longitudinal axis F1 such that the first portion **206** has the freedom or reach to be attached to a vaginal cuff on a posterior side and the second portion **208** can be attached to an anterior side of the vaginal cuff or a location proximate the vaginal cuff of the patient. Thus the first portion **206** and the second portion **208** can be attached to the vaginal cuff or a location proximate the vaginal cuff of the patient distributed at several locations so as to reduce implant load in the vagina. The first elongate member **202** and the second elongate member **204** collectively define a planar Y-shape as illustrated in FIG. 2. Upon placement, the first portion **206** of the second elongate member **204**, the second portion **208** of the second elongate member **204** (that may be separated right before the implantation), and the distal end portion **212** of the first elongate member **202** act as three different arms of the implant and are configured to support the pelvic organs at three distinct bodily locations. In accordance with these embodiments, the first portion **206** forms a first arm, the second portion **208** forms a second arm, and the distal end portion **212** of the first elongate member **202** forms a third arm of the implant.

The first portion **206** and the second portion **208** of the second elongate member **204** are configured to cover at least partially and be attached to a portion of lateral walls of a vagina such that the first portion **206** and the second portion **208** extend longitudinally down the portion of lateral walls of the vagina. For example, in accordance with these

embodiments, the first portion **206** of the second elongate member **204** is attached to a first lateral wall of the vagina and the second portion **208** of the second elongate member **204** is attached to a second lateral wall of the vagina.

In some embodiments, the procedure of attachment of the implant **200** within the body can be performed after performing hysterectomy and removal of uterus from the body. In such cases, where the patient's uterus is removed, the first portion **206** and the second portion **208** are attached to the vaginal cuff of the patient or a location proximate the vaginal cuff of the patient. In some other embodiments, where the uterus is intact, the first portion **206** and the second portion **208** are attached to the vaginal apex of the patient or a location proximate the vaginal apex of the patient. The distal end portion **212** of the first elongate member **202** is configured to be attached to or proximate to the patient's sacrum.

In some embodiments, the implant **200** can be made of materials such as discussed in conjunction with FIG. 1, without limitations.

The shape of the first elongated member **202** and the second elongate member **204** described in conjunction with FIG. 2 is merely exemplary and various other shapes and designs are also possible, in accordance with various embodiments of the present invention.

FIG. 3 is a perspective view of an implant **300**, in accordance with an embodiment of the present invention. The implant **300** includes a first elongate member **302** and a second elongate member **304** formed monolithically with the first elongate member **302** and made of a single piece of material. The second elongate member **304** includes a first portion **306** and a second portion **308**. The first portion **306** and the second portion **308** extend from the first elongate member **302**. The first elongate member **302** is similar to those described in conjunction with FIG. 2 above.

As is evident, the implant **300** is similar to the implant **200** of FIG. 2 except that the implant **300** is prefabricated with a cut or division **310** separating the first portion **306** from the second portion **308** along one of their edges. In some embodiments, the cut **310** is provided longitudinally along a longitudinal axis **T1** and extending along the edges of the first portion **306** and the second portion **308**. The cut divides the second elongate member **304** into two arms that can take a define shape. In some embodiments, the cut **310** can be made in a direction other than along the longitudinal axis such as in a zigzag pattern or oriented away from the longitudinal axis.

The cut **310** divides the entire implant **300** into three arms so that the three arms can be attached to three distinct locations. In the illustrated embodiment, the implant **300** is fabricated as an integral Y-shaped mesh out of a single and planar strip of material without any junction or coupling of multiple pieces of material. As is evident from the top view of the implant **300**, depicted in FIG. 3, the three arms of the Y-shaped implant defines planar surfaces so as to form a planar Y-shaped implant **300** as viewed in the top view. In accordance with some other embodiments, the implant **300** can be fabricated even with the use of multiple pieces of material and coupled together at a junction. However, in such cases, the three arms of the implant **300** defines planar surfaces forming a planar Y-shape as opposed to a non-planar shape (with three arms merely defining almost three lines) when the implant is viewed in the top view similar to the view of the implant **300** of FIG. 3. In an embodiment, the width of the implant **300** can be substantially more than the thickness. In such embodiments, the implant **300** defines a planar-Y shape when viewed as a top view.

In the illustrated embodiment, the cut **310** is defined by removal of a piece of material between a first portion **306** and a second portion **308** in a defined shape. In some embodiments, the defined shape can be a U shape or V shape. However, other possible shapes such as rectangular, triangular or any other shape may also be possible in some other embodiments.

FIG. 4A illustrates a top view of the Y-shaped planar implant **300** coupled to a dilator **404**, and a sleeve **402**. FIG. 4B illustrates a perspective view of a medical device **400**, in accordance with an embodiment of the present invention. The medical device **400** includes the Y-shaped implant **300**, the sleeve **402**, the dilator **404**, and an insertion tool **406**. The implant **300** is referred to for the purpose of description hereafter; however, any other implant (as discussed above) can be used in some embodiments. Referring now to FIGS. 4A and 4B, the implant **300** and the medical device **400** are described.

The sleeve **402** may be a protective sheath or covering that is placed over the implant **300** and coupled to the implant **300** with the use of such as a suture **414** extending along a portion of the sleeve **402** and through the dilator **404**. In the illustrated embodiments, the sleeve **402** is placed over the first elongate member **302** as illustrated in FIG. 4A. The sleeve **402** may be designed to minimize risk of contamination and reduce abrasive sliding of the implant **300** through a tissue. The sleeve **402** may be particularly desirable when the implant **300** is elastic as the sleeve **402** assists in introducing the implant **300** within the tissue and avoids damage to the material of the implant **300**. After the implant **300** is delivered and placed, the sleeve **402** is removed and discarded, in some embodiments.

The dilator **404** can be used to facilitate delivery of the implant **300** into the patient's body. The dilator **404** includes a proximal end portion **408** and a distal end portion **410** such that the distal end portion **408** of the dilator **404** is configured to be coupled to the implant **300** and the proximal end portion **410** of the dilator can be manipulated by the operator. In some embodiments, the dilator **404** is removably coupled to the implant **300**. In other embodiments, the dilator **404** is fixedly coupled to the implant **300**. In some embodiments, the dilator **404** has a tapered shape at its tip such that it is configured to dilate or expand an opening or a passage within a bodily tissue. In some other embodiments, the dilator **404** can be a thin shaped tubular member without a taper but configured to dilate the tissue because of its thin and sharp nature. The dilator **404** is configured to be attached to a delivery device such as the insertion tool **406**. The insertion tool **406** includes a needle **412** that is configured to be coupled to the dilator **404** and deliver the implant **300** within the patient's body through such as a trans-vaginal procedure. In an embodiment, the dilator **404** and the sleeve **402** are coupled to the same arm of the implant such as the first elongate member **302** defining the first arm.

In some embodiments, the delivery device can be any conventionally used delivery device such as a surgical needle or a suturing type device discussed below. In some embodiments, the dilator **404** can be sized to accept a step needle delivery device such as the Solyx™ delivery device as sold by Boston Scientific Corporation, or the dilator **404** can be sized and lengthened to be fitted to an Advantage™ delivery device as sold by Boston Scientific Corporation. In certain embodiments, the dilator **404** can be sized or lengthened to be fitted to an Advantage™ delivery device.

FIGS. 5A-5B illustrate schematic views of a portion of the implant **300** as placed within a patient's body over a first lateral wall **514 A** of a vagina **508** and a second lateral wall

514B of a vagina 508, in accordance with an embodiment of the present invention. FIG. 5A illustrates a schematic view of the implant 300 placed within a patient's body through an anterior incision 502, in accordance with an embodiment of the present invention. FIG. 5B illustrates placement of the implant 300 within a patient's body through a posterior incision 504, in accordance with an embodiment of the present invention. FIGS. 5A and 5B illustrate a view in which the patient's uterus is removed. However, in some other embodiments, the procedure can be performed with the uterus in place within the body. The body portions of the patient such as the vagina 508, a vaginal cuff 506, an anterior portion of vagina 510, and a posterior portion of vagina 512 are illustrated in FIGS. 5A and 5B.

As shown, the first portion 306 and the second portion 308 of the second elongate member 304 are secured to the vaginal cuff 506 or a location proximate the vaginal cuff of the patient. The distal end portion of the first elongate member 302 is attached to or proximate to the sacrum (not shown in FIGS. 5A and 5B).

In some embodiments, the anterior incision 502 may be a single long incision as illustrated in FIG. 5A. In some embodiments, the posterior incision 504 may be a single long incision as illustrated in FIG. 5B. In such cases, the anterior incision 502 and/or the posterior incision 504 may allow access for lights or suction or scopes or other types of instruments such as the delivery device mentioned above and the like. In some embodiments, only one of the anterior and posterior incisions may be provided. In some other embodiments, both anterior and posterior incisions 502 and 504 may be provided. In still some other embodiments, only one long incision extending from the anterior to the posterior portions 510 and 512 may be provided.

FIG. 6A illustrates placement of the implant 300 within a patient's body using a suturing device 602. As illustrated, the suturing device 602 may be a delivery device for such as a blind suture engagement. The suturing device 602 may further include a suture 612 coupled to the implant 300, and the suturing device 602 may be configured to fix the implant 300 at a bodily location such as a sacrum 604 or locations proximate the sacrum 604.

In some embodiments, the suturing device can be a Capio™ delivery device (also referred to as Capio™ or Capio™ device) sold by Boston Scientific Corporation.

The different parts of the suturing device 602 such as a rotating head 608, a needle driver 610, and a needle driver button 614 are illustrated in FIG. 6A. In some embodiments, the first portion 306 and the second portion 308 of the second elongate member 304 may be attached to the lateral vaginal walls 606 with the use of such as a hand held needle or an insertion tool similar to the tool 400 (not illustrated in FIG. 6A) that can suture the implant 300 to the lateral vaginal walls 606. The first elongate member 302 may be configured to be attached to or proximate to the sacrum 604 with the use of the suturing device 602 such as through a blind suture engagement technique that the Capio™ is capable of. In embodiments, the suturing device 602 extends through the vaginal incision such as the posterior incision and up to the sacrum 604 or proximate the sacrum 604. The posterior incision lies at a location posteriorly to the vaginal opening 616 and is not visible in FIG. 6A.

FIG. 6B illustrates the implant 300 positioned and placed in the body after the completion of the procedure. As shown, the first portion 306 and the second portion 308 are secured to the vaginal walls 606A and 606B laterally and the first elongate member 302 is sutured to the sacrum 604 or locations proximate the sacrum 604 of the patient. The

suture 612 may fix the implant 300 at the sacrum 604 or proximate to the sacrum 604.

As shown, the first portion 306 of the second elongate member 304 covers at least partially and is attached to the first lateral wall 606A of the vagina and the second portion 308 of the second elongate member 304 is configured to cover at least partially and be attached to the second lateral wall 606B of the vagina, such that the first portion 306 and second portion 308 extend longitudinally down the first and second lateral walls 606A and 606B, respectively, in a direction parallel to a longitudinal axis A3 of vagina. The distal end portion 212 of the first elongate member 302 is configured to be attached to or proximate to the sacrum 604.

FIG. 7 is a flowchart illustrating a method 700 of implantation of an implant such as the implant 300, in accordance with an embodiment of the present invention.

Referring to FIG. 7 in conjunction with FIGS. 3, 4A, 4B, 6A, and 6B, the method of placement of the implant 300 is described in accordance with an embodiment of the present invention. The implant 300 is hereafter used to describe the placement in an exemplary embodiment. However, it must be appreciated that other implants discussed above may also be placed in a similar manner.

The method 700 includes creating an incision, such as a vaginal incision or other bodily incision, at step 702. A vaginal incision can be one of the anterior incision 502 and the posterior incision 504 at one of the anterior vaginal wall 510 and the posterior vaginal wall 512 of a patient for delivery of the implant 300. In accordance with various embodiments, an operator/a surgeon may make incisions laproscopically, laprotomically, or in any other manner to create access to the vagina. Further, in some embodiments, the implant 300 is coupled to the dilator 404 and the insertion tool 406 for delivery and placement of the implant as discussed above in FIG. 4.

Once the access to the vagina is created, the Y-shaped implant 300 is inserted into a body of a patient at step 704. In some embodiments, the implant 300 is inserted trans-vaginally into the patient's body. The second elongate member 304 is either already separated into two portions during the fabrication stage or can be separated by the operator before procedure by making a cut to configure the implant 300 as a Y-shape implant with three arms for attachment at three locations. Therefore, in some embodiments, the method may include cutting the second elongate member 304 such as to define two arms from the second elongate member 304 that are separated at their proximal end portions 220 and 214, and coupled together at their distal end portions 220 and 216.

Subsequently, the method includes attaching the first portion 306 and the second portion 308 of the second elongate member 304 to a portion of lateral walls 606A and 606B of the vagina trans-vaginally through one of the anterior incision 502 and the posterior incision 504 at step 706. In some embodiments, the first portion 306 covers at least partially and is attached to the first lateral wall 606A of the vagina, and the second portion 308 covers at least partially and is attached to the second lateral wall 606B of the vagina such that the first and second portions 306 and 308 extend longitudinally down the first and second lateral walls 606A and 606B.

The method then includes attaching the distal end portion 212 of the first elongate member 302 to or proximate to the sacrum 604 at step 708. In some embodiments, the distal end portion 212 of the first elongate member 302 may be attached to the sacrum 604 trans-vaginally through one of the anterior incision 502 and the posterior incision 504. In

some embodiments, the distal end portion **212** of the first elongate member **302** may be attached to the sacrum **604** laparoscopically through an abdominal incision. In some embodiments, the implant **300** may be associated to the delivery device or suturing device **602** and can be re-inserted through the anterior incision **502** to secure and tension the first elongate member **302** to the sacrum **604** or proximate to the sacrum **604**. After tensioning, the implant **300** can be trimmed and the delivery device **602** can be removed. The anterior and/or posterior incisions **502** and **504** are closed.

As discussed above, in some embodiments, the implant **300** can be delivered with the use of the insertion tool **406** coupled to the dilator **404**. In such cases, the method may further include removing the dilator **404** from the body after the delivery of the implant **300** within the body. Further, in some cases, the implant **300** or at least one of the arms of the implant **300** that is configured to be attached to the sacrum or proximate the sacrum **604** may be covered with the sleeve **402**. In such embodiments, the method may include removing the sleeve **402** from the body after placement of the implant **300**. Also, in some cases, the sleeve **402** may be made of biologic material capable of being dissolved in the body such that there may not be any need to remove the sleeve **402** from the body. Also, in some cases, the suturing device **602** may be used to such as to suture the first elongate member **302** of the implant **300** to the sacrum **604** or close to the sacrum **604** with the use of blind suture engagement technique. Though the suturing device **602** can be used to couple the first portion **306** and the second portion **308** to the vaginal walls **606**, the attachment of these portions on the vaginal walls **606** may not require a blind suturing technique and can simply be performed with the use of such as a simple handheld needle or any other tool.

In accordance with some embodiments, upon attachment of the implant **300** to target bodily locations, the method may further include trimming an unwanted portion of the implant **300**.

The attachment of the implant **300** to the target body locations with sutures **612** may provide a desired tension to the implant **300**. The tensioning of the implant **300** may appropriately be provided for the repair of pelvic floor disorder. Finally, the method includes removal of the insertion tool **406** and the suturing device **602** after delivery and placement of the implant **300** inside the body, and closing the anterior, posterior and laparoscopic incisions.

In some embodiments, the vagina **508** can be inverted to allow the first portion **306** and the second portion **308** of the implant **300** to be sutured or attached to the lateral areas of the vaginal cuff **506** or a location proximate the vaginal cuff of the patient. The first elongated member **302** of the implant **300** is then tucked or sutured into the anterior incision **502** before the incision is closed for later external access through the vagina **508**. The anterior incision **502** can be closed with the suture or other means and the vagina **508** can be re-inverted back into its initial anatomical position. The first elongate member **302** can be accessed from the vagina **508** and associated to the delivery device **400** or **602** for securing to or proximate the sacrum **604**. In some embodiments as illustrated in FIGS. **6A** and **6B**, the anterior incision **502** and posterior incision **504**, respectively, are illustrated as unobstructed by the implant **300** with the first elongate member **302** oriented in a substantially flat configuration.

In some embodiments, an implant includes a first elongate member including a distal end portion and a proximal end portion; and a second elongate member formed monolithically with the first elongate member out of a single planar strip of material. The second elongate member includes a

first portion and a second portion. Each of the first portion of the second elongate member and the second portion of the second elongate member includes a proximal end portion and a distal end portion. The first portion and the second portion extend from the first elongate member. The distal end portion of the first elongate member is configured to be attached to or proximate a sacrum. The first portion and the second portion are configured to cover at least partially and be attached to a portion of lateral walls of a vagina such that the first portion and the second portion extend longitudinally along the lateral walls of the vagina.

In some embodiments, the first elongate member and the second elongate member collectively define a planar Y-shape. In some embodiments, the implant is configured to be delivered inside a body of a patient through a vaginal incision. In some embodiments, the implant is configured to be delivered inside a body of a patient through a laparoscopic procedure. In some embodiments, the first portion is configured to cover at least partially and be attached to a first lateral wall of the vagina, and the second portion is configured to cover at least partially and be attached to a second lateral wall of the vagina such that the first and second portions extend longitudinally down the first and second lateral walls respectively.

In some embodiments, a medical device includes a Y-shaped implant having a first elongate member having a distal end portion and a proximal end portion; and a second elongate member formed monolithically with the first elongate member out of a single and planar strip of material. The second elongate member having a first portion and a second portion. Each of the first portion and the second portion of the second elongate member includes a proximal end portion and a distal end portion. The first portion and the second portion extend from the first elongate member. The device includes a sleeve covering at least a portion of the implant; and a dilator including a proximal end portion and a distal end portion. The proximal end portion of the dilator is configured to be coupled to the implant.

In some embodiments, the first elongate member and the second elongate member collectively define a planar Y-shape. In some embodiments, the first portion of the implant is configured to cover at least partially and be attached to a first lateral wall of the vagina, and the second portion is configured to cover at least partially and be attached to a second lateral wall of the vagina such that the first and second portions extend longitudinally down the first and second lateral walls respectively in a direction parallel to a longitudinal axis of the vagina. In some embodiments, the distal end portion of the first elongate member is configured to be attached to or proximate a sacrum.

In some embodiments, the device includes a suture, and a suturing device configured to fix the implant at bodily locations with the use of the suture. In some embodiments, the device includes a slot between the first portion and the second portion, wherein the slot defines one of a U-shape, V-shape, and rectangular shape formed by removal of a piece of material between the first portion and the second portion of the second elongate member.

In some embodiments, a method for implanting a medical device in a patient's body includes creating a vaginal incision; inserting a Y-shaped implant inside the body transvaginally, the implant including a first elongate member having a distal end portion and a proximal end portion, and a second elongate member including a first portion and a second portion such that the second elongate member extend monolithically from the first elongate member; attaching the first portion and the second portion to lateral portions of a

vaginal wall such that the first portion and the second portion extend longitudinally down the lateral portions of the vaginal wall; and attaching a distal end portion of the first elongate member to or proximate a sacrum.

In some embodiments, the vaginal incision is an anterior incision at an anterior vaginal wall. In some embodiments, the incision is a posterior incision at a posterior vaginal wall. In some embodiments, the method includes making a cut in the second elongate member to configure it as the Y-shape implant and separate the first portion and the second portion configured to be attached at separate body locations. In some embodiments, the method includes creating an abdominal incision, and attaching the distal end portion of the first elongate member comprises attaching the distal end portion to the sacrum laparoscopically through the abdominal incision.

In some embodiments, attaching the distal end portion of the first elongate member includes attaching the distal end portion to the sacrum trans-vaginally through the vaginal incision. In some embodiments, the method includes suturing the implant at bodily locations with the use of a suturing device. In some embodiments, the method includes tensioning the implant appropriately for the repair of pelvic floor disorder. In some embodiments, the method includes trimming an unwanted portion of the implant after attaching the implant. In some embodiments, the implant is coupled to a dilator and an insertion tool for delivery and placement of the implant and the method includes removing the dilator from the body after delivery of the Y-shaped implant within the body; and removing the insertion tool after delivery and placement of the Y-shaped implant. In some embodiments, the method includes closing the vaginal incision.

While the invention has been disclosed in connection with the preferred embodiments shown and described in detail, various modifications and improvements thereon will become readily apparent to those skilled in the art. Accordingly, the spirit and scope of the present invention is not to be limited by the foregoing examples, but it is to be understood in the broadest sense allowable by law.

What is claimed is:

1. A medical device comprising:
 - a Y-shaped implant including:
 - a first elongate member having a distal end portion and a proximal end portion, the first elongate member having a longitudinal axis; and
 - a second elongate member formed monolithically with the first elongate member out of a single and planar strip of material, the second elongate member extending from the proximal end portion of the first elongate member in a direction substantially parallel to the longitudinal axis of the first elongate member, the second elongate member having a first portion and a second portion, each of the first portion and the second portion of the second elongate member including a proximal end portion and a distal end portion, the second elongate member defining a substantially linear slot between the first portion and the second portion;
 - a sleeve covering at least a portion of the first elongate member;
 - a suture coupling the sleeve to the first elongate member, the suture extending along a portion of the sleeve;
 - a dilator including a proximal end portion and a distal end portion, the proximal end portion of the dilator configured to be coupled to the first elongate member, the suture extending through the dilator; and
 - an insertion tool including a needle configured to be coupled to the dilator.

2. The medical device of claim 1, wherein the first portion of the implant is configured to cover at least partially and be attached to a first lateral wall of the vagina, and the second portion is configured to cover at least partially and be attached to a second lateral wall of the vagina such that the first and second portions extend longitudinally down the first and second lateral walls respectively in a direction parallel to a longitudinal axis of the vagina.

3. The medical device of claim 1, wherein the distal end portion of the first elongate member is configured to be attached to or proximate a sacrum.

4. The medical device of claim 1, further comprising: a suturing device configured to fix the implant at bodily locations with use of the suture.

5. The medical device of claim 1, wherein the substantially linear slot is formed by removal of a piece of material between the first portion and the second portion of the second elongate member.

6. The medical device of claim 1, wherein the sleeve covers an entire portion of the first elongate member.

7. A method for implanting a medical device in a patient's body, the method comprising:

making a cut into a first end of a first elongate member of an implant by a medical operator to form a first portion and a second portion, the first portion extending substantially parallel to the second portion, the implant having a second elongate member, the second elongate member having a proximal end portion and a distal end portion, the proximal end portion of the second elongate member extending monolithically from a second end of the first elongate member, wherein the first portion, the second portion, and the second elongate member, collectively, define a Y-shaped implant, wherein a sleeve covers at least a portion of the second elongate member, a suture couples the sleeve to the second elongate member, and a dilator is coupled to the second elongate member, the suture extending along a portion of the sleeve and through the dilator; coupling a needle of an insertion device to the dilator; creating a vaginal incision; inserting, using the insertion device, the Y-shaped implant inside the body trans-vaginally; attaching the first portion and the second portion to lateral portions of a vaginal wall such that the first portion and the second portion extend longitudinally down the lateral portions of the vaginal wall; attaching a distal end portion of the first elongate member to or proximate a sacrum; and removing the dilator and the sleeve from the patient's body.

8. The method of claim 7, wherein the vaginal incision is an anterior incision at an anterior vaginal wall.

9. The method of claim 7, wherein the incision is a posterior incision at a posterior vaginal wall.

10. The method of claim 7, further comprising creating an abdominal incision, and attaching the distal end portion of the first elongate member comprises attaching the distal end portion to the sacrum laparoscopically through the abdominal incision.

11. The method of claim 7, wherein attaching the distal end portion of the first elongate member includes attaching the distal end portion to the sacrum trans-vaginally through the vaginal incision.

12. The method of claim 7, further comprising suturing the implant at bodily locations via a suturing device.

17

13. The method of claim 7, further comprising tensioning the Y-shaped implant appropriately for repairing of a pelvic floor disorder.

14. The method of claim 7, further comprising trimming an unwanted portion of the Y-shaped implant after an attachment of the Y-shaped implant.

* * * * *

18

专利名称(译)	医疗设备和递送医疗设备的方法		
公开(公告)号	US10039627	公开(公告)日	2018-08-07
申请号	US14/199643	申请日	2014-03-06
[标]申请(专利权)人(译)	波士顿科学西美德公司		
申请(专利权)人(译)	BOSTON SCIENTIFIC SCIMED , INC.		
当前申请(专利权)人(译)	BOSTON SCIENTIFIC SCIMED , INC.		
[标]发明人	CHU MICHAEL S H		
发明人	CHU, MICHAEL S. H.		
IPC分类号	A61F2/00 A61B17/06 A61B17/42		
CPC分类号	A61F2/0045 A61B17/06109 A61F2/0063 A61F2250/0071 A61B2017/06052 A61F2230/006 A61B17/42		
优先权	61/776411 2013-03-11 US		
其他公开文献	US20140257028A1		
外部链接	Espacenet		

摘要(译)

在一个实施例中，本发明公开了一种植入物，其包括第一细长构件和第二细长构件，第二细长构件与第一细长构件整体形成，由单一材料和平面条带材料制成。第一细长构件包括远端部分和近端部分。第二细长构件包括第一部分和第二部分。此外，第二细长构件的第一部分和第二细长构件的第二部分中的每一个包括近端部分和远端部分。第一部分和第二部分从第一细长构件延伸。第一细长构件的远端部分构造成附接到骶骨或靠近骶骨。

