




US 20150230821A1

(19) **United States**(12) **Patent Application Publication**
Batchelor et al.(10) **Pub. No.: US 2015/0230821 A1**(43) **Pub. Date: Aug. 20, 2015**(54) **HEAT PIPE COOLED BURR INCLUDING
SURGICAL INSTRUMENTS EMBODYING
SAME**(52) **U.S. Cl.**CPC *A61B 17/320758* (2013.01); *A61B*
2017/320008 (2013.01)(71) Applicant: **GYRUS ACMI, INC. (D.B.A.
OLYMPUS SURGICAL
TECHNOLO**, Southborough, MA (US)(57) **ABSTRACT**(72) Inventors: **Kester J. Batchelor**, Mound, MN (US);
Jeffrey J. Nelson, Minneapolis, MN
(US)

Featured is a surgical instrument including a rotating cutting implement and a heat transfer mechanism configured to absorb heat energy during the use of such a rotating cutting implement. The heat transfer mechanism is configured so the absorbed heat energy is communicated to an external heat sink. Such a heat transfer mechanism includes a heat pipe, e.g., a scintered or wick type heat pipe. The heat energy is absorbed at one end of the heat pipe to minimize the potential for damage to the tissue and the like at and/or about the surgical site. Also featured are a surgical apparatus embodying such a surgical instrument and surgical or medical methods or procedures for manipulating, rotatably cutting, grinding, abrading or debriding tissue, bone or other structures or components of a mammalian body using such surgical instruments or surgical apparatus.

(21) Appl. No.: **14/624,070**(22) Filed: **Feb. 17, 2015****Related U.S. Application Data**

(60) Provisional application No. 61/942,192, filed on Feb. 20, 2014.

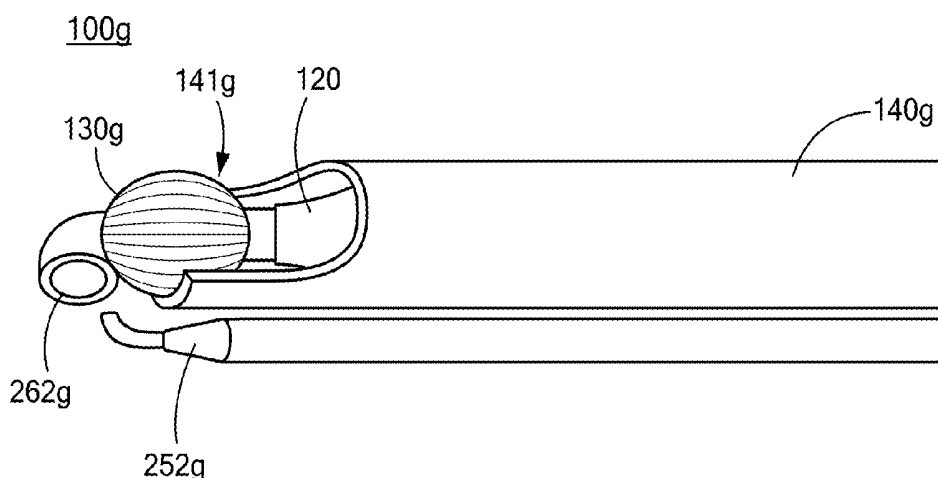Publication Classification(51) **Int. Cl.**
A61B 17/3207 (2006.01)

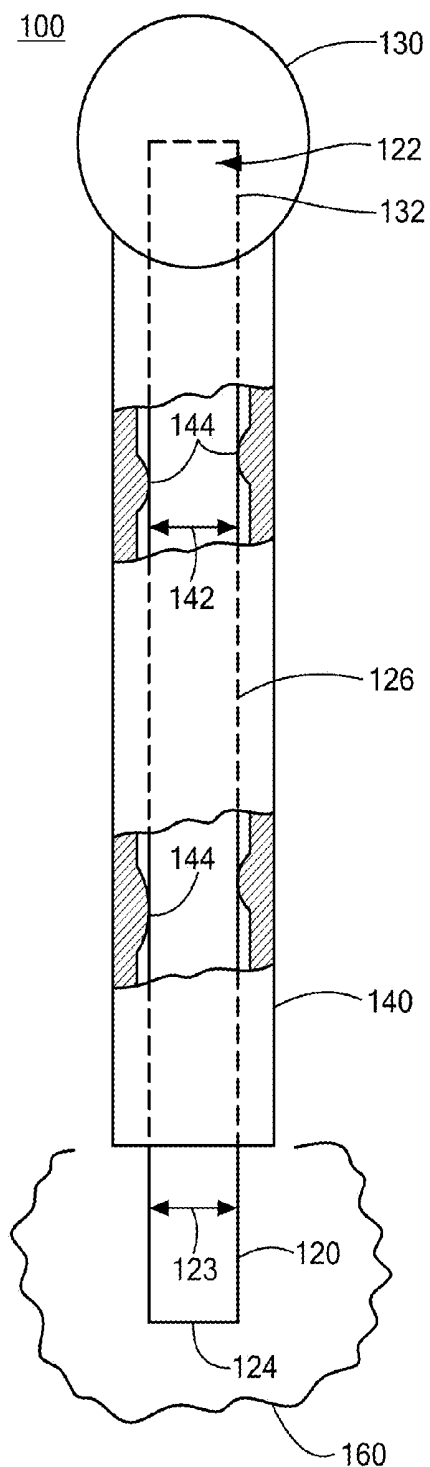


FIG. 1

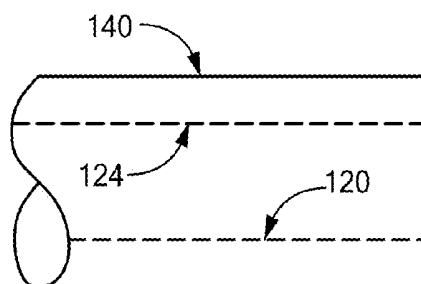


FIG. 1A

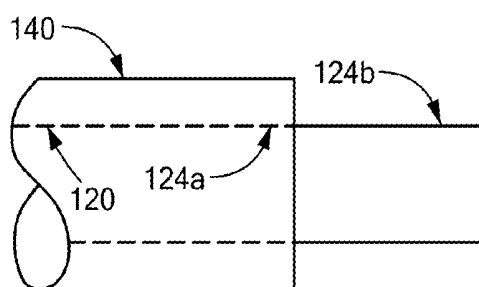


FIG. 1B

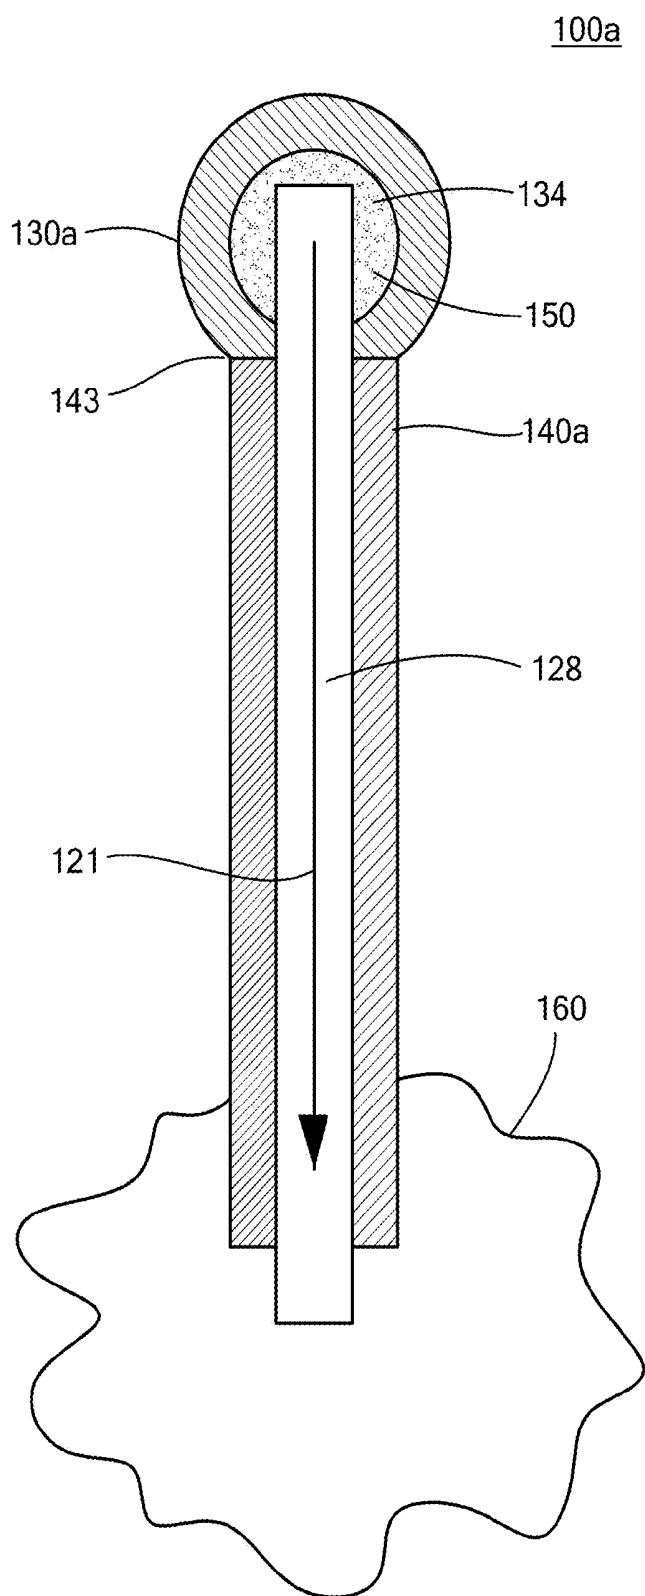


FIG. 2

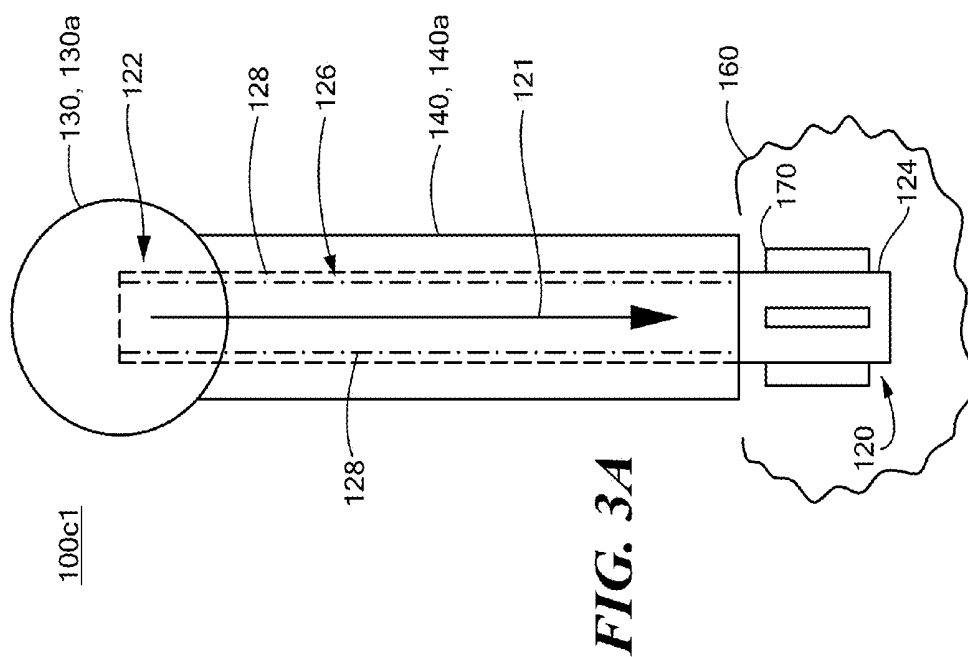


FIG. 3A

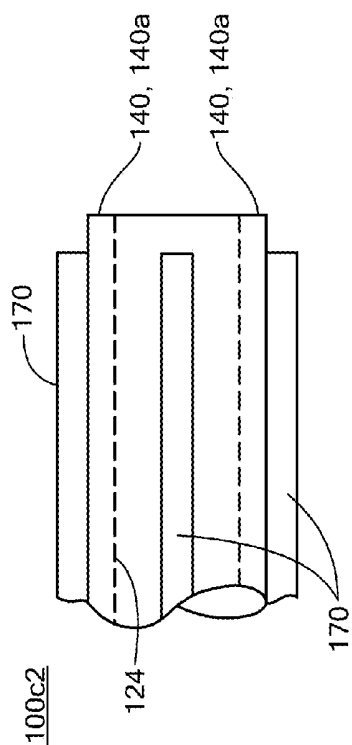


FIG. 3B

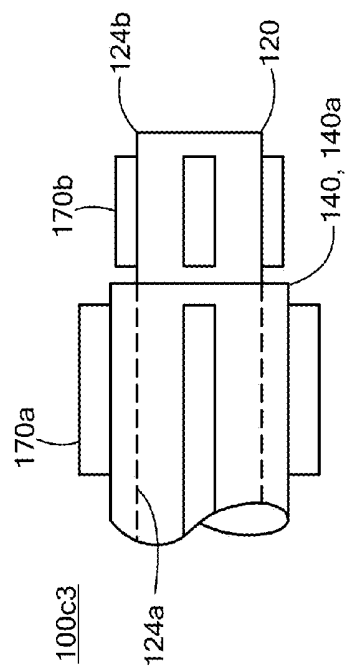


FIG. 3C

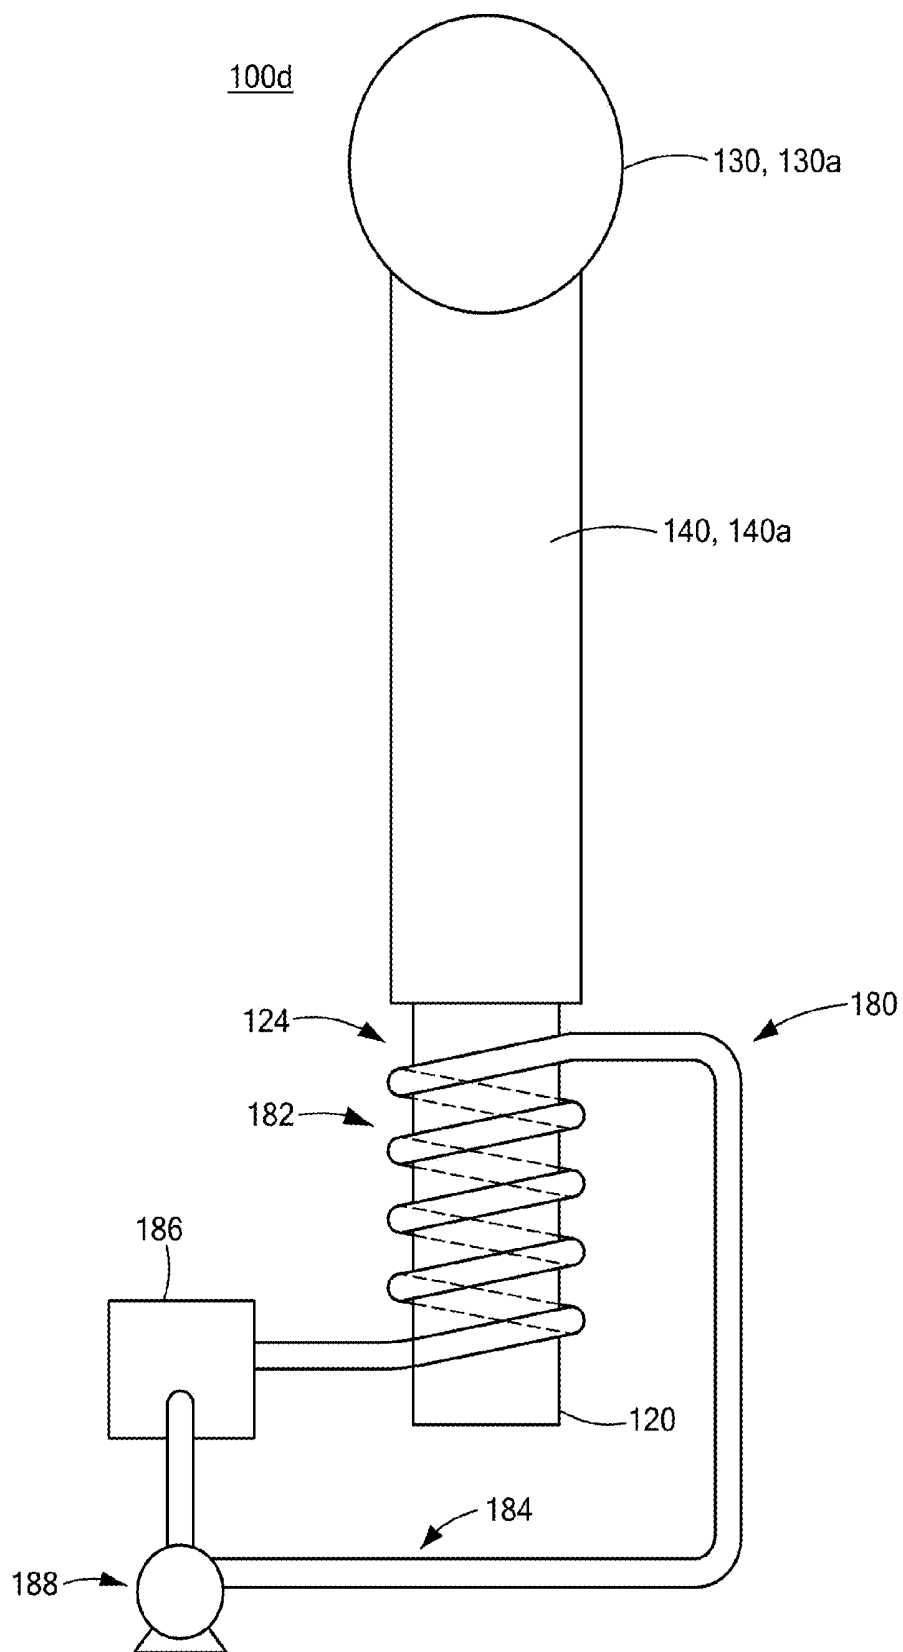


FIG. 4

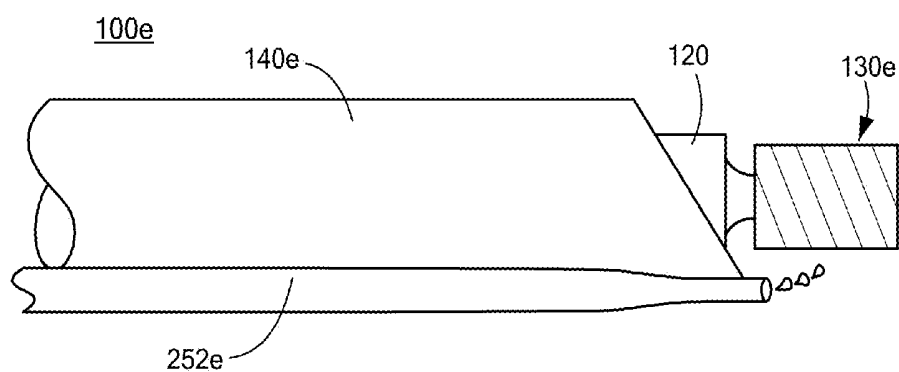


FIG. 5A

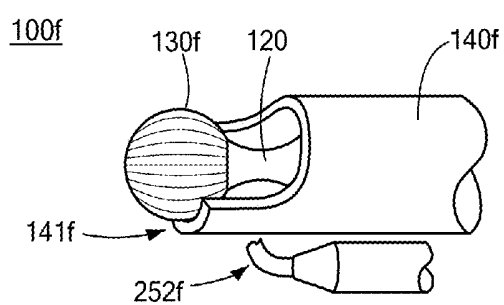


FIG. 5B

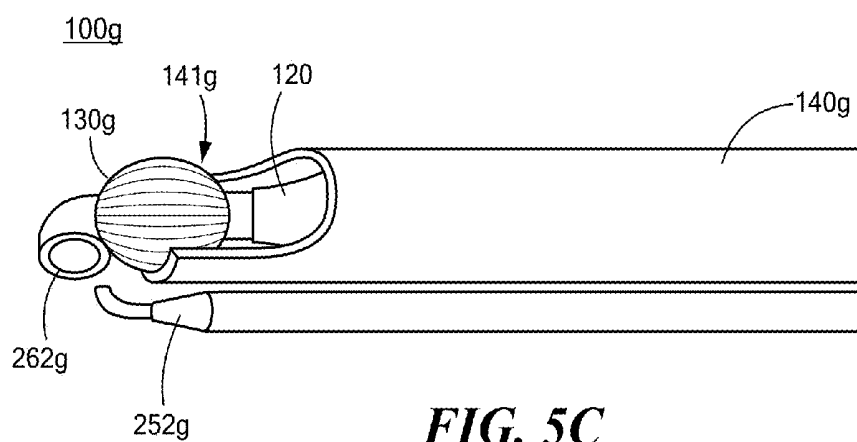


FIG. 5C

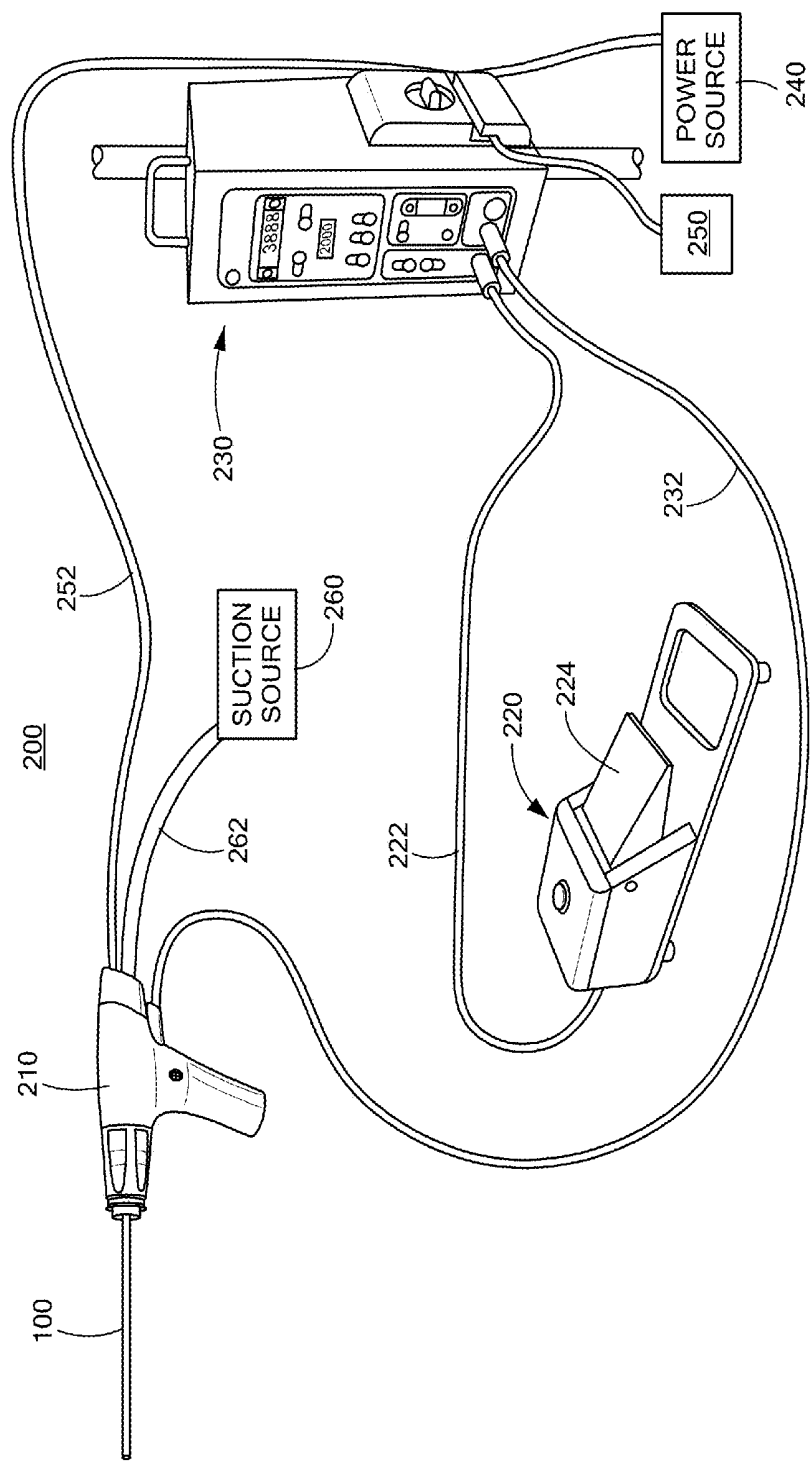


FIG. 6

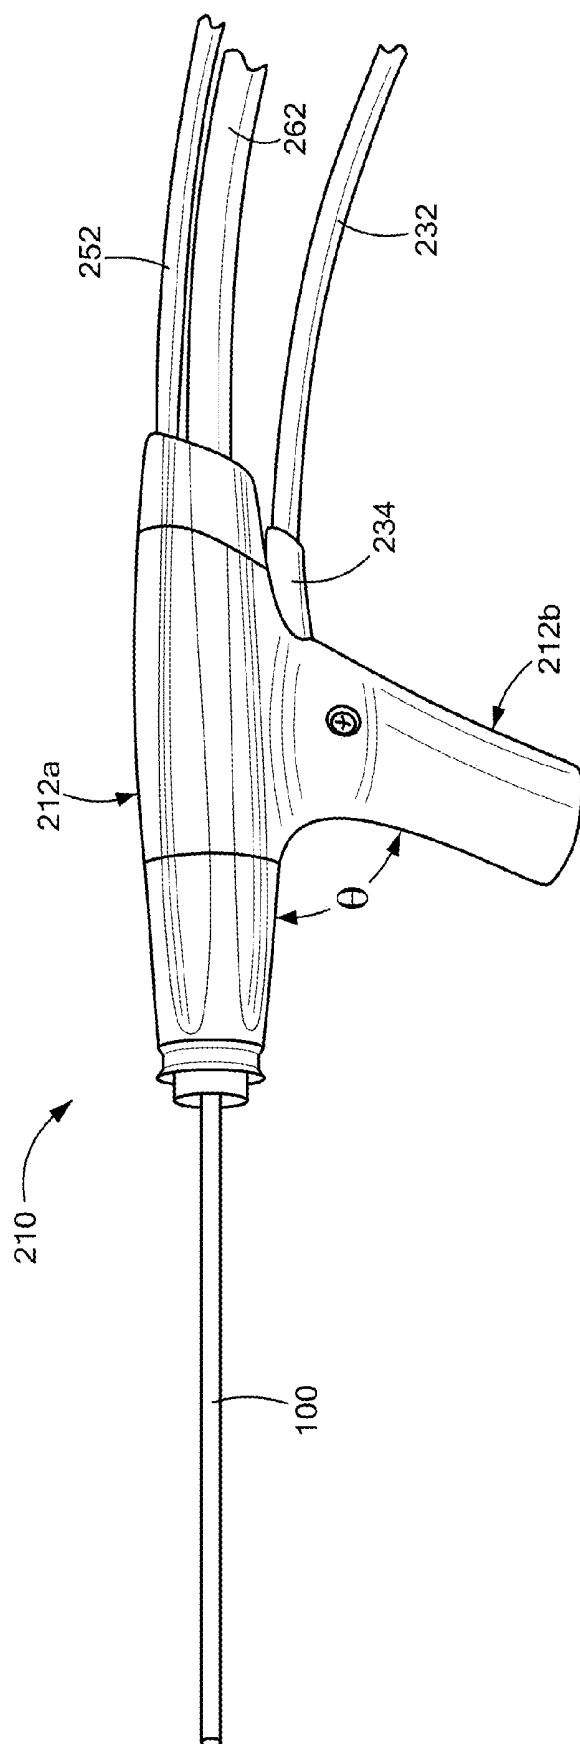


FIG. 7

HEAT PIPE COOLED BURR INCLUDING SURGICAL INSTRUMENTS EMBODYING SAME

[0001] This application claims the benefit of U.S. Provisional Application Serial No. 61/942,192 filed Feb. 20, 2014, the teachings of which are incorporated herein by reference in their entirety.

FIELD OF INVENTION

[0002] The present invention generally relates to surgical instruments, more particularly to powered surgical instruments that are configured to cut, abrade or the like tissue during a surgical procedure such as an ENT procedure, and even more particularly to powered surgical instruments that are configured to cut, abrade or the like tissue and also configured to minimize tissue damage (e.g., collateral tissue damage) from heating during such operation of the surgical instrument. The present invention also relates to surgical apparatus as well as methods that embody such surgical instruments or related techniques.

BACKGROUND OF THE INVENTION

[0003] There are surgical apparatus (e.g., powered surgical apparatus) that are configured so as to enhance shaving, cutting and/or removal of tissue, bone and/or other bodily material. Such surgical apparatus can include a shaving or cutting instrument, such as a rotating blade or a rotating burr for example. The rotating cutting implement also is connected to a hand piece which is held by an operator of the apparatus, such as a surgeon, for example. The surgeon, by holding the hand piece in their hand, can manipulate the rotating cutting implement to grind, shave or cut desired tissue, bone and/or other bodily material.

[0004] However, tissue abrading burrs used in connection with conventional surgical procedures can cause heating of the tissue being reduced or abraded. Such heating becomes an issue or concern when the heating begins to modify the tissue being reduced through the temperature rise attributable to the rotating burr or cutting element rather than through the intended mechanical abrasion. Such heating also can cause heating of the surrounding tissue thereby also leading to collateral tissue being damaged. For example, devices embodying such rotating burrs in connection with ear, nose and throat (ENT) surgical procedures can lead to collateral tissue damage as well as accidental tissue damage during extraction.

[0005] One conventional technique used to limit the effects of heating while using a rotating surgical cutting instrument (e.g., when grinding, reducing or modifying tissue, bone or teeth in a human body) involves irrigation of the surgical site with a fluid or liquid such as water or saline solution. In this technique the fluid (e.g., water or saline) solution is actively dispersed (e.g., pumped, sprayed) at the surgical site and suction is concurrently applied to remove the fluid as well as any debris (e.g., tissue, bone, etc.) that is contained in the fluid. In this way, the fluid being dispersed can absorb the heat energy and the thus heated fluid is removed by suction.

[0006] In further embodiments, the surgical instrument can be configured so it disperses or suctions the fluid and/or a separate device(s) can be provided to disperse and suction the fluid. Such techniques, however, may not be suitable for all surgical procedures or introduce added complexities because

the introduction of a fluid at a given site in a sufficient quantity to control temperature rise may not be optimal.

[0007] Referring now to U.S. Pat. No. 6,733,501 there is found an electrosurgical device having electrodes to cauterize, cut and/or coagulate tissues. In such a device, RF energy or the like is applied to the tissues using one or more electrodes to achieve the desired surgical effect. However, such cutting or cauterizing of the tissue also can cause less than optimal initial conditions for the procedure. The described electrosurgical device is configured with a heat pipe that conducts heat from the electrode where substantially all of the heat conducted from the electrode through the heat pipe is dissipated along the length of the heat pipe.

[0008] Such a heat pipe includes an internal cavity which is sealed at both ends. The cavity is partially evacuated and contains a heat transfer fluid such as water. The outer shell can be made of a conductive metallic material such as copper. The shell can be covered over most of its length by an electrically insulating cover or sheath. The exposed distal end of the heat pipe is coated with a conductive non-toxic material such as gold or nickel, for example, which forms an outer surface.

[0009] Referring now to U.S. Pat. No. 6,736,837 there is found a method for inducing hypothermia for treating neurological disorders, more particularly the invention relates generally to methods of treating cancer and other diseases by modulating body temperature. In this regard, body temperature may be directly modulated by a heat-exchange catheter positioned within a blood vessel of a patient. Such methods generally relate to methods of treating cancer by inducing hypothermia. In this technique, heat is directed to the hypothalamus, while optionally maintaining cancerous tissue at or near to normal body temperature, and optionally applying another cancer treatment. This other cancer treatment may be radiation therapy, chemotherapy, a combination of radiation and chemotherapy, or some other cancer treatment. The invention relates generally to methods of treating diseases including cancer, viral infections, and other diseases, comprising inducing hyperthermia by cooling the hypothalamus, and optionally applying another treatment, for example radiation, chemotherapy, antiviral therapy, or a combination of therapies.

[0010] Another such apparatus effective to cool a nasal passage or sinus comprises an electrical cooling device attached at an end of a flexible tube, rod or catheter capable of being introduced into the nasal passage or sinus. Such an electrical cooling device may be a Peltier device or other electrical cooling element. The Peltier device may be located at the tip of the cooling device or may be located distal to the tip and heat withdrawn from the tip by the cooling device via a heat pipe. The tip of the probe may be cooled via a heat pipe that connects the tip of the probe to a cooling element such as the Peltier device. It also is noted therein that heat pipes are described, for example, in U.S. Pat. No. 5,190,539 to Fletcher et al. and U.S. Pat. No. 5,417,686 to Peterson et al.

[0011] Referring now to U.S. Pat. No. 7,998,159 there is found an irrigated cutting device for use with a powered surgical tool. Such a device includes an elongated outer tube with an outer hub attached to the proximal end for releasably securing the cutting accessory/device within the powered tool. An elongated inner member is received within the outer tube and has an inner hub adapted to be driven by the surgical tool. The dimensions of the outer tube and inner member are such as to form an annular channel there between for the passage of irrigating fluid. The inner member carries a cutting

tool, such as a burr, at its distal end, the tool being accessible through an aperture in the outer tube. A bypass channel runs external to the outer tube to carry irrigating fluid to the cutting tool. An aperture through the outer tube connects the annular channel with the bypass channel.

[0012] The fluid passes through the aperture into the external bypass tube, and along the bypass tube before exiting adjacent the burr. In this way, the irrigating fluid is directed on to the burr, to provide the maximum cooling and irrigating effect. Excess fluid, as well as tissue and bone fragments cut by the burr, pass through the suction aperture into the interior of the hollow member, and travel back up the cutting blade under the action of the suction source.

[0013] Referring now to U.S. Pat. No. 8,491,585, there is found methods and systems for minimally invasive lateral decompression of one or more spinal nerves. Such a system for laterally decompressing includes an access sheath, a tool guide, and a bone removal tool. The bone removal tool is used to remove bone from the anterior surface. Optionally, after bone removal has been completed, the cutting tool may be advanced through the access sheath in order to partially cut the ligamentum flavum to further relieve compression of the spinal nerve(s). Usually, a cooling and/or flushing medium will be introduced to the rotating burr in order to remove heat and optionally permit aspiration of the removed bone material.

[0014] Referring now to U.S. Publication No. US2013/0172919 there is found a tissue removal kit or assembly that includes a cannula and a tissue removal probe axially slidable within the cannula. The tissue removal probe includes an elongated member having a distal end configured to curve when distally deployed from the cannula. The tissue removal probe further comprises a drive shaft and a rotatable tissue removal element (e.g., an abrasive burr) disposed on the drive shaft adjacent the member distal end. The curved member distal end may associate the tissue removal element, which has its own axis of rotation, with a radius of revolution about the longitudinal axis of the member. The member is laterally flexible and resilient, so that the radius of revolution can be adjusted. In this manner, the tissue removal element can remove tissue around an adjustable arc. An irrigation fluid is provided to help cool the drive shaft and/or the burr, while the burr is rotating at high speed and grinding against tissue. The media or fluid also washes away debris at the target site.

[0015] It thus would be desirable to provide a surgical instrument having a cutting or abrading cutting element such as a burr that embodies a mechanism for directly cooling the cutting element or burr to minimize temperature rise in surrounding tissue as well as methods related thereto. It would be particularly desirable to provide such a surgical instrument, surgical apparatus and method that would minimize temperature rise when using the surgical instrument in comparison to prior art devices, apparatus and methods.

SUMMARY OF THE INVENTION

[0016] The present invention features a surgical instrument and a surgical apparatus embodying such a surgical instrument. In its broadest aspects the present invention features a surgical instrument including a rotating cutting implement and a heat transfer mechanism configured to absorb heat energy being developed during use of such a rotating cutting implement. Such a heat transfer mechanism also is configured so that the absorbed heat energy is communicated to a heat sink that is remote from the surgical site. In this way, the

absorbed heat energy is removed so as to minimize the potential for damage to the tissue and the like at and/or about the surgical site. Also featured are surgical or medical methods or procedures for manipulating, rotatably cutting, grinding, abrading or debriding tissue, bone or other structures or components of a mammalian body using such surgical instruments or motorized/powerful surgical apparatus.

[0017] In more particular aspects the present invention features a surgical instrument that includes a rotating cutting implement for use in processing a part of a mammalian body and a heat pipe that is arranged so as to absorb heat energy at one end thereof and to dissipate the heat energy at least at a second end thereof. In addition, the rotating cutting implement and heat pipe are arranged so that the heat pipe first end is thermally coupled to the rotating cutting implement so that at least some heat energy being developed by the rotating cutting implement during use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end.

[0018] According to another aspect of the present invention there is featured a surgical instrument having a rotating cutting element, where the cutting element comprises a burr having a given shape. Such a surgical instrument also includes a heat pipe. In addition, the burr and heat pipe are arranged so that the heat pipe first end is thermally coupled to the burr such that at least some heat energy being developed by the burr implement when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end. Also included is a tubular member that is connected to the burr and extends outwardly from the burr such that a longitudinal extending portion of the heat pipe is disposed within the tubular member and wherein the burr includes a cavity that is configured and arranged to receive at least a portion of the heat pipe first end therein.

[0019] In embodiments of such surgical instruments, the heat pipe further includes a material disposed in the interior of the heat pipe to facilitate movement of a phase change medium along a length of the heat pipe. Such a material is sometimes referred to as a phase change material. In further embodiments, the phase change material is used alone or in combination with a wick type of material that facilitates movement of the phase change material (e.g., the liquid phase).

[0020] In yet further embodiments, the rotating cutting implement includes a cavity that is configured and arranged to receive at least a portion of the heat pipe first end. When so received, the heat pipe first end is at least thus thermally coupled to the rotating cutting element and preferably also is mechanically coupled to the rotating cutting element.

[0021] In further embodiments, such a surgical instrument further includes a thermally conductive medium, the thermally conductive medium being disposed in the rotating cutting implement cavity about the heat pipe first end so as to facilitate thermal coupling between the rotating cutting implement and the heat pipe first end. Such a thermal coupling medium also preferably mechanically couples the rotating cutting implement and the heat pipe.

[0022] In yet further embodiments, such a surgical instrument further includes a tubular member that is connected to the rotating cutting implement and extends outwardly from the rotating cutting implement such that a longitudinal extending portion of the heat pipe is disposed within the tubular member. Such a tubular member can further include one or more or a plurality of reduced diameter regions dis-

posed along a length of the tubular member, each of the reduced diameter regions being formed so as to at least reduce a gap between an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe.

[0023] In yet further embodiments, the tubular member for such a surgical instrument further includes one or more or a plurality of contact regions disposed along a length of the tubular member, each of the contact regions being formed so an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe are in slidable contact with each other.

[0024] In alternative embodiments, the tubular member extends outwardly from the rotating cutting implement such that a longitudinal extending portion of the heat pipe is disposed within the tubular member. In a more particular embodiment, the tubular member is arranged so as to be a fixed member in which is disposed the rotating longitudinally extending portion of the heat pipe. As indicated herein, the tubular member can further include one or more or a plurality of reduced diameter regions disposed along a length of the tubular member, each of the reduced diameter regions being formed so as to at least reduce a gap between an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe.

[0025] In yet more particular embodiments, the surgical instrument further includes a shield member that is disposed and arranged so as to form a barrier between the rotating cutting element and collateral tissue about the surgical site (i.e., tissue that is not to be processed by the cutting element). In this way, damage to collateral tissue can be minimized such as if the end having the burr jumped or inadvertently moved during use. In more particular embodiments, such a shield member is secured to the fixed tubular member or shaft (e.g., distal end of the tubular member) to provide a fixed barrier to minimize the potential for damage to collateral tissue proximal the surgical end.

[0026] In yet further embodiments, such reduced diameter regions or contact regions extend circumferential about the tubular member, partially about the circumference or form a dimpled structure that extends along the length and/or about the circumference of the tubular member.

[0027] In alternative embodiments, the outer surface of the heat pipe is configured with surface artifacts that are formed so as to at least reduce a gap between an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe or formed so an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe are in slidable contact with each other.

[0028] In yet further embodiments, the heat pipe second end is arranged so as to be exposed to a cooling medium, whereby heat energy communicated to the heat pipe second end is dissipated to the cooling medium. Additionally, an outer surface of the heat pipe second end can include surface artifacts to facilitate transfer of heat energy from the heat pipe to the cooling medium. In further embodiments, such artifacts can comprise cooling fins.

[0029] In yet further embodiments, such surgical instruments, further include an active fluid cooling system that absorbs and removes heat energy by circulating a fluid and a portion of the heat pipe such as the heat pipe second end is

thermally coupled to the active fluid cooling system to facilitate transfer of heat energy from the heat pipe to the circulating fluid.

[0030] In yet further embodiments, the tubular member is arranged so as to extend along the length of the heat pipe including the heat pipe second end and so as to be thermally coupled to the heat pipe second end whereby heat energy is dissipated from the heat pipe second end to the tubular member. In such embodiments, a tubular member portion proximal the heat pipe second end is arranged so as to be exposed to a cooling medium, whereby heat energy communicated to the heat pipe second end is dissipated by the tubular member to the cooling medium. Additionally, an outer surface of the tubular member can include surface artifacts (e.g., cooling fins) to facilitate transfer of heat energy from the tubular member to the cooling medium. In additional alternative embodiments, the tubular member portion can be thermally coupled to an active fluid cooling system to absorb and remove heat energy from the tubular member portion using a circulating fluid.

[0031] In yet further embodiments, the rotating cutting implement is a burr having a given shape. Also, such a burr can be utilized in connection with one of an ENT surgical procedure, an arthroscopy procedure and a laparoscopy procedure.

[0032] In yet further embodiments such a surgical instrument further includes one or both of a fluid delivery line and/or a suction line in proximity to the cutting implement so that the surgeon or user can introduce a fluid to the surgical site for clearing of debris resulting from the processing of the tissue using the surgical instrument. In addition, the introduction of a fluid also can be used as an additional means for cooling the tissue during use.

[0033] According to yet another aspect of the present invention, there is featured a motorized or powered surgical apparatus including a motor and a movable cutting assembly. In embodiments, the movable cutting assembly comprises any of the surgical instruments described herein including those instruments including embodiments described above. More particularly, such a movable cutting assembly includes a burr having a given shape and a heat pipe being arranged so as to absorb heat energy at one end thereof and dissipate the heat energy at least at a second end thereof. Also, the burr and heat pipe are arranged so that the heat pipe first end is thermally coupled to the burr so at least some heat energy being developed by the burr when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end. Also included is a tubular member that is connected to the burr and extends outwardly from the burr so that a longitudinal extending portion of the heat pipe is disposed within the tubular member. In addition, the tubular member is operably coupled to the motor such that when in use, the tubular member and the burr are rotated by the motor at a desired rotational speed.

[0034] In an alternative embodiment, the tubular member is a non-rotating fixed member in which is disposed the rotating longitudinally extending portion of the heat pipe. In this embodiment, the longitudinal extending portion of the heat pipe is operably coupled to the motor so the motor rotates the longitudinal extending portion of the heat pipe and the rotating cutting element (e.g., burr) that is connected thereto. Such a tubular member can further include one or more or a plurality of reduced diameter regions disposed along a length of the tubular member, each of the reduced diameter regions being formed so as to at least reduce a gap between an inner

surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe.

[0035] In yet further embodiments, the surgical instrument further includes a shield member that is disposed and arranged so as to form a barrier between the rotating cutting element and collateral tissue about the surgical site (i.e., tissue that is not to be processed by the cutting element). In this way, damage to the collateral tissue can be minimized such as if the end having the burr jumped or inadvertently moved during use. In more particular embodiments, such a shield member is secured to the fixed tubular member or shaft (e.g., distal end of the tubular member) to provide a fixed barrier to minimize the potential for damage to collateral tissue proximal the surgical end.

[0036] According to yet another aspect of the present invention, there are featured medical or surgical methods or procedures that employ the surgical instruments or apparatuses herein described. More particularly such methods include surgical or medical procedures for processing (e.g., cutting, grinding, abrading, debriding or the like) a feature (e.g., tissue, bone, ligaments and the like) of a mammalian body. More specifically, such methods or procedures which are intended for use for processing a feature of or associated with the ear, nose and/or throat (e.g., ENT procedure).

[0037] Such methods and procedures also include providing a surgical instrument or apparatus having a rotating cutting implement for use in processing a part of a mammalian body and a heat pipe that is arranged so as to absorb heat energy at one end thereof and to dissipate the heat energy at least at a second end thereof. In addition, the rotating cutting implement and heat pipe are arranged so that the heat pipe first end is thermally coupled to the rotating cutting implement so that at least some heat energy being developed by the rotating implement when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end.

[0038] Such methods and procedures of the present invention further include the step(s) of providing a surgical or medical instrument or a surgical or medical apparatus as herein described and processing a feature(s) of the mammalian body using such a surgical or medical instrument or a surgical or medical apparatus. In more particular embodiments such processing includes one of cutting, grinding, abrading, debriding or the like of the feature that includes for example, tissue, bone, ligaments and the like of a mammalian body. In further embodiments, such methods and procedures further include the step of absorbing heat energy from the cutting implement and dissipating the absorbed energy remote from the site where the body feature is being processed.

[0039] Other aspects and embodiments of the invention are discussed below.

DEFINITIONS

[0040] The instant invention is most clearly understood with reference to the following definitions:

[0041] As used herein the terms “cutting,” “cut,” “grinding” or “grind” when used in describing the methods, instruments or apparatus of the present invention shall be understood to be inclusive of any of a number of techniques or operations known in the art for surgically working or processing bone, cartilage or tissue such techniques include but are not limited to trimming, shaping, resecting, debriding, abrading or grinding of bone or tissue of a mammalian body.

[0042] The term tissue when used herein shall be understood to include other parts or structure of a human body including, but not limited to cartilage, muscle, bone, bony structures (e.g., vertebrae) and ligaments.

[0043] Endoscopy shall be understood to be generally referring to or describing a procedure which allows a doctor or surgeon to look inside a body (e.g., mammalian or human body) using an instrument called an endoscope for medical reasons. The doctor, surgeon or other medical personnel can use such a procedure for diagnostic purposes by examining or imaging the interior or exterior of an organ or cavity of the body and/or in combination with other surgical or diagnostic procedures (e.g., biopsy). For example, a cutting tool can be attached to the end of the endoscope or a tool can be provided for use in combination with the endoscope and the tool can then be used to perform surgery or biopsy. This type of surgery is generally called keyhole surgery as it usually leaves only a tiny external scar. Such endoscopic techniques have been developed and adapted for use in connection with specific parts or features of the human body and thus commonly have been given a specific name (e.g., colonoscopy).

[0044] Laparoscopic surgery is a surgical technique in which operations in the abdominal or pelvic cavities are performed through the use of small incisions and the use of a laparoscope in combination with a light source. The laparoscope is used to view the surgical site. The general term used to describe the process is laparoscopy.

[0045] Arthroscopy also referred to as arthroscopic surgery is another minimally invasive surgical procedure in which an examination and sometimes treatment of damage to the interior of a joint is performed using an arthroscope. An arthroscope is a type of endoscope that is inserted into the joint also through a small incision. Arthroscopic procedures are performed to evaluate and/or to treat many orthopedic conditions including floating cartilage, torn surface cartilage, ACL reconstruction and trimming of damaged cartilage.

[0046] ENT shall be understood to be generally referring to the ears, nose and throat of a mammalian body (e.g., human body) and ENT operations and procedures shall be understood to be describing and referring to operations and/or procedures involving the structure and features of such ears, nose and throat of the mammalian body.

[0047] Debridement, debriding or debride shall be understood to be describing the medical removal of dead, damaged or infected tissue to improve the healing potential of the remaining healthy tissue. Such removal is performed using any of a number of techniques known to those skilled in the art including surgical and mechanical. Surgical debridement is one of the fastest methods for debridement and is typically very selective as the surgeon or person performing the debridement has control over which tissue is being removed and which is being left behind.

[0048] USP shall be understood to mean U.S. Patent Number and U.S. Publication No. shall be understood to mean U.S. Published Patent Application Number.

BRIEF DESCRIPTION OF THE DRAWING

[0049] For a fuller understanding of the nature and desired objects of the present invention, reference is made to the following detailed description taken in conjunction with the accompanying drawing figures wherein like reference character denote corresponding parts throughout the several views and wherein:

[0050] FIG. 1 is a side view of a surgical instrument according to an aspect of the present invention.

[0051] FIG. 1A is a partial side view of a distal portion of the surgical instrument of FIG. 1, illustrating an embodiment thereof.

[0052] FIG. 1B is another partial side view of a distal portion of the surgical instrument of FIG. 1, illustrating another embodiment thereof.

[0053] FIG. 2 is a cross-sectional side view of a surgical instrument similar to FIG. 1 but according to another embodiment of the present invention.

[0054] FIG. 3A is a side view of a surgical instrument according to another aspect of the present invention including surface artifacts for cooling.

[0055] FIG. 3B is a partial side view of a distal portion of the surgical instrument of FIG. 3A, illustrating an embodiment thereof.

[0056] FIG. 3C is another partial side view of a distal portion of the surgical instrument of FIG. 3A, illustrating another embodiment thereof.

[0057] FIG. 4 is an illustrative view of a surgical instrument according to yet another aspect of the present invention in which the heat pipe is at least thermally coupled to an external cooling system.

[0058] FIG. 5A is an illustrative view of a distal portion of a surgical instrument according to another aspect of the present invention including a fluid line.

[0059] FIG. 5B is another illustrative view of a distal portion of a surgical instrument according to another aspect of the present invention including a shield or barrier and a fluid line.

[0060] FIG. 5C is another illustrative view of a distal portion of a surgical instrument according to another aspect of the present invention including a shield or barrier, a fluid line and suction line.

[0061] FIG. 6 is a schematic view of an exemplary powered surgical apparatus according to the present invention.

[0062] FIG. 7 is a perspective exterior view of the handle shown in FIG. 6.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0063] Referring now to the various figures of the drawing wherein like reference characters refer to like parts, there is shown in FIG. 1 a side view of a surgical instrument 100 according to an aspect of the present invention with partial cutaways. Referring also to FIG. 2, there is shown a cross-sectional side view of another surgical instrument 100a according to another embodiment of the present invention. The surgical instrument of FIG. 2 is similar to that of FIG. 1 and the like reference characters refer to like parts or common features. The differences there-between are discussed below.

[0064] The surgical instrument 100, 100a of either embodiment includes a heat pipe 120, and a cutting implement 130, 130a that is at least thermally coupled to the heat pipe and in more particular embodiments an end of the heat pipe and the cutting implement are mechanically coupled. In this regard the term distal as used herein in connection with the heat pipe and surgical instrument generally refers to a location that is in general proximity to the site in the body that is in contact with the cutting element and the term proximal is used to generally describe a location that is opposite the distal end and at an end opposite from proximity to this body site. As described further herein, the heat pipe 120 is rotated about its long axis

during use so that the cutting implement 130, 130a can perform its intended function (e.g., cutting, abrading, grinding, debriding, etc.).

[0065] In further embodiments, portions of the heat pipe 120 is/are generally surrounded by an outer sleeve or shaft 140, 140a that extends longitudinally about and along the length of the heat pipe. In illustrative exemplary embodiments, the shaft 140, 140a extends outwardly from the cutting implement 130, 130a to either a distal end of the heat pipe or to a point short of the distal end of the heat pipe as further described herein. In one embodiment, the shaft 140, 140a is secured to the cutting implement 130, 130a so that the shaft also is being rotated about the long axis of the heat pipe 120 during use. In an alternative embodiment and as illustrated and described in connection with FIGS. 5A-C, the shaft 140b-d is fixed with respect to the heat pipe 120 and the heat pipe rotates within the shaft. In more particular embodiments, the shaft 140, 140a is sized, configured and composed of a material that supports the heat pipe and more specifically provides compressive and flexural strength to the heat pipe. Such material includes a metal (e.g., steel) plastics or a composite material (e.g., graphite).

[0066] In further embodiments, an outer diameter 123 of the heat pipe 120 and an inner diameter 142 of the shaft 140, 140a are established so as to minimize the space there-between and also to provide radial support to the heat pipe during rotation. In yet further embodiments and as more specifically illustrated in FIG. 1, an inner surface of the shaft inner diameter 142 includes surface artifacts 144 that extend outwardly from the outer surface so as to further reduce the space between an inner surface corresponding the shaft inner diameter 142 and a heat pipe outer surface corresponding to the heat pipe outer diameter 123. In more particular embodiments, the surface artifacts extend outwardly so as to be in contact (e.g., sliding or movable radial contact) with the heat pipe outer diameter. In this way, the shaft 140 can be slid longitudinally onto the heat pipe for purposes of assembly but allow the artifact(s) to be in contact with the heat pipe outer diameter for radial support as well as thermal conduction. In the case where the shaft is fixed, the artifacts also are such as to provide a mechanism whereby the heat pipe 120 can rotate about the longitudinal axis of the shaft.

[0067] Although two radially extending artifacts 144 extending from the shaft 140 are illustrated in FIG. 1, this shall not be limiting. It also is within the scope of the present invention for 2 or more, a plurality of, or a multiplicity of such radially extending artifacts 144 be provided in the inner surface of the shaft 144.

[0068] Alternatively and with reference to FIG. 2, it is within the scope of the present invention for the shaft 140a to be configured so that the inner surface corresponding to the shaft inner diameter 142 is in sliding contact with the outer surface corresponding to heat pipe outer diameter 123 along the entire length of the shaft or portions thereof. In yet further embodiments, the shaft 140a is configurable so that the inner surface corresponding to the shaft inner diameter 142 is spaced from the outer surface corresponding to heat pipe outer diameter 123 along the entire length of the shaft or portions thereof.

[0069] In addition, such artifacts can be formed so as to be disposed circumferentially about and along the length of the shaft so that the shaft is in arcuate contact with the heat pipe at the locations corresponding to such artifacts. Alternatively, the artifacts can be formed and arranged so as to form discrete

regions along the length of the shaft that are in general point contact with the heat pipe (e.g., dimples). Also, the artifacts can be formed and arranged to create discrete, discontinuous arcuate regions (e.g., semicircular bands) about the shaft inner surface and along the length of the shaft. It also is within the scope of the present invention for these surface artifacts to be formed using any of a number of techniques known to those skilled in the art. For example, one or more or a plurality of regions of the shaft can be crimped radially so as to thereby form the radially extending artifacts.

[0070] Furthermore, while the artifacts are shown as extending from the shaft, this is not limiting as it also is within the scope of the present invention for the radially extending artifacts to be provided on the surface corresponding to the outer diameter of the heat pipe 120. For example, one or more bands of material (e.g., metals, plastics) can be secured to the surface of the heat pipe outer diameter such as with adhesives, brazing or welding (e.g., vibrational welding) to form the one or more surface artifacts.

[0071] The heat pipe 120 includes two ends, a distal end 122 and a proximal end 124 and a tubular member 126 interconnecting the two ends. As is known to those skilled in the art, the two ends 122, 124 and the tubular member 126 are connected or joined to each other so as to form a sealed structure. In either embodiment, the heat pipe distal end 122 is disposed within the cutting element 130, 130a (e.g., at the central core of the cutting element) to absorb heat energy and the proximal end 124 is where the absorbed heat energy is expected to be dissipated or dispersed.

[0072] As is known to those skilled in the art, a heat pipe is a phase change device that quickly equalizes thermal energy through phase change of liquids to vapor state within the heat pipe. In the present embodiment, the heat energy being absorbed at the distal end 122 changes the liquid phase to the vapor phase and the vapor phase is communicated to the proximal end 124 via the interconnecting tube 126 (i.e., direction of heat dissipation 121). The absorbed heat energy contained in the vapor phase is given up at the proximal end thereby causing the vapor phase to condense back into the liquid phase. The liquid phase is then communicated from the proximal end 124 to the distal end 122 via the interconnecting tube 126 so the above heat absorption and dissipation process can continuously repeat itself.

[0073] As is also known to those skilled in the art, the heat pipe 120 also is configurable with an internal wick structure 128, as more particularly illustrated in FIG. 2, such as a scintered metal or central wick structure. Such an internal wick structure 128 provides a mechanism by which the liquid phase can be communicated or transported more effectively to the proximal end, in particular when working against gravity. As is known to those skilled in the art, the distal and proximal ends 122, 124 and the interconnecting pipe 126 form a sealed structure and comprise any of a number of material known in the arts that are appropriate for the intended use. In an exemplary embodiment the distal and proximal ends 122, 124 and the interconnecting pipe 126 are composed of a copper material or alloy.

[0074] In either embodiment, the heat pipe distal end 122 is disposed within the cutting element 130, 130a and so as to be at least in thermal contact with the cutting element. In more particular embodiments, the distal end 122 is firmly seated or secured within the cutting element 130, 130a. Referring now to the embodiment shown in FIG. 1, an aperture 132 is formed in the cutting element 130 in which the distal end is received.

In more particular embodiments the outside surfaces of the distal end 122 becomes at least thermally engaged with the opposing surfaces of the aperture 132. In further embodiments, the outside surfaces of the distal end 122 become thermally and mechanically engaged with the opposing surfaces of the aperture 132 so as to secure the heat pipe distal end to the cutting element and so that the heat energy or thermal energy of friction is communicated to the distal end via the cutting element. In this way, the heat energy is absorbed by the liquid phase within the heat pipe 120 so as to thereby cause it to be converted to the vapor phase and then dissipated at the proximal end as described hereinabove.

[0075] Alternatively and as shown in FIG. 2, in the other embodiment the cutting element 130a is formed or processed (e.g., machined) so as to have an interior cavity 134 that receives the distal end 122 of the heat pipe 120. The distal end 122 is secured and/or thermally coupled to interior surfaces of the cutting element 130 by a potting material 150 as is known to those skilled in the art. In particular embodiments, the potting material 150 is a thermal paste such as the silver thermal paste utilized for thermal coupling of personal computer functionalities (e.g., coupling of the processor on the motherboard to a heat dissipation device) or the like.

[0076] In further embodiments, the cutting element 130, 130a also is configured so as to facilitate conduction of thermal energy from friction during use of the medical instrument to the distal end 122 of the heat pipe. In exemplary embodiments, the cutting element 130, 130a is configured and arranged so that exterior walls of the cutting element 130, 130a are made as thin as possible consistent with needs of the cutting element to maintain structural integrity during use.

[0077] In addition, the interior cavity 134 of the cutting element is configurable so as to minor or complement the overall shape of the cutting element. For example, if the cutting element 130, 130a forms an essentially spherical shape, then the interior cavity also can form a generally spherical interior cavity. While spherical shapes are illustrated, this is not limiting as the cutting element 130, 130a is configurable with any of a number of shapes known in the art including cylindrical, s-shaped and triangular and the interior cavity also is appropriately shaped including those shapes illustrated in FIGS. 5A-C. In addition, the heat pipe distal end 122 can be arranged so a portion thereof is in contact with a portion of the interior cavity 134 or can be spaced therefrom with the potting material interposed between the heat pipe and the walls of the interior cavity.

[0078] In yet further embodiments, the thermal conductivity capability of such a medical or surgical instrument is achievable using cutting elements that are particularly constructed to facilitate heat transfer alone as described herein, use of thermal potting materials such as a thermal paste to thermally couple the heat pipe and the cutting element alone and/or a combination of these two techniques.

[0079] In either surgical instrument embodiment, although more particularly illustrated in FIG. 2, the cutting element 130, 130a and the shaft 140, 140a (i.e., a support tube for the heat pipe) are configurable so that they are joined together using any of a number of mechanisms or techniques known to those skilled in the art (e.g., adhesives, welding, brazing and the like). For example, the heat pipe 120 and the cutting element 130, 130a, can be secured to each other as described herein using for example the thermal paste and then the shaft 140, 140a can be secured to the assembly of the heat pipe and cutting element by means of adhesives, welding and the like.

The specific technique for joining is selected so as to be appropriate for joining the materials comprising the cutting element and the shaft. Also, for example, the cutting element and the shaft are further configured so as to form a joint **143** (e.g., welding joint or brazing joint) there-between that is appropriate for joining the two features. As indicated hereinafter, it also is within the scope of the present invention for the shaft to be arranged in fixed relation to the heat pipe and for the heat pipe to be rotatably disposed within the shaft.

[0080] In yet further embodiments, the cutting element **130**, **130a** and the shaft **140**, **130a** are composed of different materials (e.g., dissimilar metals) that are appropriate for the intended use. For example, the cutting element is composed of a material or combination of materials that are appropriate for cutting, grinding, abrading, debriding and the like and the shaft is composed of material having the appropriate strength characteristics or properties for supporting the heat pipe when under operating (e.g., rotational) conditions. In an exemplary embodiment, the cutting element is a bun made of tungsten carbide or stainless steel embedded with diamonds, the heat pipe is composed of a copper material and the shaft is composed of a steel such as stainless steel. In such a case, the burr is joined to the shaft using any of a number of techniques appropriate for joining the dissimilar materials and appropriate for the expected operational conditions (e.g., joining using adhesives or welding). The heat pipe also may include a coating such as silver on the outer surface or portions thereof to facilitate heat transfer such as between the cutting element and the heat pipe.

[0081] As indicated above, the heat energy absorbed at the heat pipe distal end **122** is dissipated at least at the heat pipe proximal end **124**. As illustrated in FIGS. 1 and 2, according to an embodiment of the present invention, the heat pipe proximal end **124** extends outwardly from the shaft **140**, **140a** so that it is exposed to a heat sink **160** or cooling medium (e.g., atmosphere or a cooling source). In a particular embodiment, the heat pipe proximal end **124** extends fully beyond the shaft **140**, **140a** such that the heat energy communicated to the heat pipe proximal end is dissipated directly to the heat sink **160** or cooling medium.

[0082] Referring now to FIG. 1A, in another embodiment the shaft **140**, **140a** extends along the length of the heat pipe **120** such that the heat pipe proximal end **124** resides or is disposed within the shaft. In addition the shaft **140**, **140a** and the heat pipe proximal end **124** are configured and arranged so that they are thermally coupled to each other (e.g., by the artifacts **144** or the sliding contact). In this way, the heat energy is communicated to the shaft **140**, **140a** from the heat pipe proximal end **124** and thence from the shaft to the external heat sink **160** or cooling medium.

[0083] Referring now to FIG. 1B, in yet another embodiment, one part **124a** of the heat pipe proximal end **124** is disposed within the shaft **140**, **140a** and the remaining part **124b** of the distal end extends outwardly from the end of the shaft. In this way, heat energy can be dissipated through the shaft to the heat sink **160** and additionally, the heat energy can be dissipated from the exposed remaining portion **124b** of the heat pipe proximal end.

[0084] Referring now to FIGS. 3A-C, there is shown a side view of a surgical instrument **100c1** according to another aspect of the present invention including surface artifacts for cooling (FIG. 3A); a partial side view of a distal portion of an embodiment of the surgical instrument **100c2** according to the another aspect (FIG. 3B) and another partial side view of

a distal portion of another embodiment of a surgical instrument **100c3** according to the another aspect (FIG. 3C). In each of these embodiments, the surgical instrument **100c1-c3** is configured so the shaft **140**, **140a** and/or the heat pipe **120** is configured with surface artifacts **170**, **170a**, **b** that are thermally coupled to the respective shaft and/or heat pipe so that the heat energy absorbed at the heat pipe proximal end **124** is dissipated to the heat sink **160**. In a particular embodiment, each surface artifact **170** comprises an outwardly extending member as are known in the art, such as a blade, fin or pin like structure, from which heat can be dissipated to the heat sink **160**.

[0085] Referring now to FIG. 3A, the heat pipe proximal end **124** extends outwardly from the shaft **140**, **140a** so that it is exposed to the heat sink **160** or cooling medium (e.g., atmosphere or a cooling source). In a particular illustrative embodiment, the heat pipe proximal end **124** extends fully outwardly from the shaft **140**, **140a**.

[0086] In addition, one or more surface artifacts **170** are arranged on an outer surface of the heat pipe proximal end **124** and are thermally coupled to the outer surface of the proximal end. In particular embodiments one of a plurality of surface artifacts **170**, a multiplicity of surface artifacts, three or more surface artifacts, or four or more surface artifacts are thermally coupled to and arranged on and about the outer surface of the heat pipe proximal end **124**. In particular embodiments, each surface artifact **170** comprises an outwardly extending member as are known in the art, such as a blade, fin or pin like structure, from which heat can be dissipated. In this way, heat energy communicated to the heat pipe proximal end **124** is dissipated through the surface artifacts alone or in combination with the outer surface of the heat pipe proximal end to the heat sink **160** or cooling medium.

[0087] Referring now to FIG. 3B, in another embodiment the shaft **140**, **140a** extends along the length of the heat pipe **120** such that the heat pipe proximal end **124** resides or is disposed within the shaft. In addition the shaft **140**, **140a** and the heat pipe proximal end **124** are configured and arranged so that they are thermally coupled to each other (e.g., by the artifacts **144** or the sliding contact). In this way, the heat energy is communicated to the shaft **140**, **140a** from the heat pipe proximal end **124**.

[0088] In addition, one or more surface artifacts **170** are arranged on an outer surface of the shaft **140**, **140a** and are thermally coupled to the outer surface thereof. In particular embodiments one of a plurality of surface artifacts **170**, a multiplicity of surface artifacts, three or more surface artifacts, or four or more surface artifacts are thermally coupled to and arranged on and about the outer surface of the shaft **140**, **140a**. In particular embodiments, each surface artifact **170** comprises an outwardly extending member as are known in the art, such as a blade, fin or pin like structure, from which heat can be dissipated. In this way, the heat energy being communicated to the shaft **140**, **140a** is dissipated through the surface artifacts alone or in combination with the outer surface of the shaft to the heat sink **160** or cooling medium.

[0089] Referring now to FIG. 3C, in yet another embodiment, one part **124a** of the heat pipe proximal end **124** is disposed within the shaft **140**, **140a** and the remaining part **124b** of the proximal end extends outwardly from the end of the shaft. In this way, heat energy to be dissipated is communicated to the shaft **140**, **140a** and additionally, the heat energy is communicated to the exposed remaining portion **124b** of the heat pipe proximal end **124**.

[0090] In addition, one or more surface artifacts **170a** are arranged on an outer surface of the shaft **140**, **140a** and are thermally coupled to the outer surface thereof and one or more surface artifacts **170b** also are arranged on an outer surface of the heat pipe proximal end **124** and are thermally coupled to the outer surface of the proximal end. In particular embodiments one of a plurality of surface artifacts **170a**, **b**; a multiplicity of surface artifacts, three or more surface artifacts, or four or more surface artifacts are thermally coupled to and arranged on and about the outer surfaces of the heat pipe proximal end **124** and/or the shaft. In particular embodiments, each surface artifact **170** comprises an outwardly extending member as are known in the art, such as a blade, fin or pin like structure, from which heat can be dissipated. In this way, heat energy communicated to the heat pipe proximal end **124** is dissipated through the surface artifacts **170a**, **b** alone or in combination with the outer surface of the respective shaft and/or proximal end to the heat sink **160** or cooling medium.

[0091] Referring now to FIG. 4, there is shown an illustrative view of a surgical instrument **100d** according to yet another aspect of the present invention further comprising an external active cooling system **180** that is thermally coupled to the proximal end **124** of the heat pipe **120** so that heat energy being communicated to the proximal end is dissipated in the cooling system. It should be recognized that the present invention is not limited to the illustrated embodiment. It is within the scope of the present invention for such an external cooling system **180** to be configured and adapted so that it is thermally coupled to the shaft **140**, **140a** (e.g., outer surface thereof) by, for example, wrapping a cooling coil **182** about the shaft proximal the heat pipe proximal end. Alternatively, similar to that shown in FIG. 3C, one or more cooling coils are configurable so as to be thermally coupled to the outer surface of the shaft **140**, **140a** proximal one portion **124a** of the heat pipe proximal end and the outer surface of the remaining portion **124b** of the proximal end **124**.

[0092] In such an active fluid cooling system **180**, the heat energy absorbed by the heat pipe **120** is absorbed and removed by a fluid, more particularly a flowing fluid. In particular embodiments, such heat energy is absorbed by a fluid flowing through the cooling coil **182**. Also, this absorbed heat energy is then removed using any of a number of techniques known to those skilled in the art. In one exemplary embodiment, the system **180** is configurable so that an inlet of the cooling coil **182** is connected to a fluid source, such as the source of water used for irrigation and the outlet is connected to a suction source such as the suction source used for suctioning the irrigated water or to a fluid drain into which the heated cooling fluid can be dispersed. In this way, the system **180** utilizes functionalities that are generally available and which functionalities would be used in surgical procedures along with the surgical instruments of the present invention.

[0093] In another illustrative exemplary embodiment, the process is controlled so that the fluid makes one or more passes through the cooling coil **182** and then to a fluid receiving apparatus **186** in the form of, for example, a large tank or a heat exchange device. The fluid having the absorbed heat energy is dispersed in the large tank or cooled by the heat exchange device. The fluid from the tank or heat exchange device is returned to the cooling coil such as, for example, by a pumping mechanism **188** (e.g., any of a number of pumps known in the art and appropriate for the intended use) via a pipe **184** or conduit. In the case of the large tank, the volume of fluid in the tank is typically such that the mixing of the

heated fluid with the fluid in the tank does not significantly alter the temperature of the tank fluid during the use of the surgical instrument. As heat exchangers or heat exchange devices and the process for dissipating heat energy using such heat exchangers or heat exchange device are well known in the art, the related heat exchange process is not further described herein.

[0094] Referring now to FIGS. 5A-C there are shown surgical instruments **100e-g** according to yet another aspect of the present invention. In each of the illustrated embodiments, the tubular member **140e-g** or shaft is fixed and the heat pipe **120** is rotationally disposed and supported within the tubular member. In an exemplary embodiment, the tubular member **140e-g** is coupled to external structure such as the handle **210** (FIG. 6-7) of a powered surgical or medical apparatus **200**. In a further embodiment, the tubular member **140e-g** is removably coupled to such external structure using any of a number of techniques known to those skilled in the art.

[0095] As indicated, the heat pipe **120** is rotationally disposed and supported within the tubular member **140e-g**. In this regard, the artifacts **144** described hereinabove, can be further adapted so as to provide the appropriate rotational support for the heat pipe **120** while it is rotating during operation. Such rotational support artifacts can be provided on the heat pipe and/or the tubular member. In addition, such rotational support artifacts can comprise any of a number of structures (e.g., ball bearing based structures, Teflon coated surfaces) that are otherwise appropriate for the intended use.

[0096] Referring now to FIG. 5A, there is shown an illustrative view of a distal portion of a surgical instrument **100e** according to another aspect of the present invention including a fluid line **252e** being connected to a source **250** (FIG. 6) of fluid. In the illustrated embodiment, the fluid line **252e** is coupled to the tubular member **140e** and extends along the length of the tubular member at least in the area in proximity to the distal end of the tubular member. Also, the fluid flows outwardly from the open end of the fluid line so as to generally spray onto the cutting implement **130e** and onto the tissue being processed by the cutting implement and tissue proximal the surgical site (e.g., collateral tissue).

[0097] In that illustrated embodiment, at least the cutting implement **130e** extends from the distal end of the tubular member **140e**. In more particular embodiments, a portion of the distal end of the heat pipe **120** also extends from the tubular member distal end. As indicated herein, the cutting element **130e** can have any of a number of shapes known in the art, including the illustrated cylindrical shape and a spherical shape as more particularly shown in FIG. 5B.

[0098] Referring now to FIG. 5B there is shown an illustrative view of a distal portion of another embodiment of a surgical instrument **100f** according to the "another" aspect of the present invention. Such a surgical instrument includes, inter alia, a shield **141f** or barrier and a fluid line **252f** that is connected to a source **250** (FIG. 6) of fluid. A portion of the tubular member **140f** is arranged so it extends outwardly so as to form the shield **141f** or barrier (e.g., an arcuate shield or barrier) about a portion of the cutting implement **130f**. This shield or barrier preferably is arranged such that during use the shield is between the cutting implement and tissue adjacent to the surgical site. In this way, an inadvertent motion of the cutting implement should not contact and damage this adjacent tissue. In an alternative embodiment, the shield **141f** or barrier is a separate element that is secured to the distal end

of the tubular member such that it extends outwardly from the tubular member to shield the adjacent tissue from the cutting element.

[0099] In this embodiment, a portion of the cutting implement **130f** extends beyond the shield **141f** and extends outwardly from the open distal end of the tubular member **140f**. In more particular embodiments, a portion of the distal end of the heat pipe **120** also extends from the open end of the tubular member. As indicated herein, the cutting element **130f** can have any of a number of shapes known in the art, including the oval shape as more particularly shown in FIG. 5C.

[0100] In the illustrated embodiment, the fluid line **252f** is coupled to the tubular member **140f** and extends along the length of the tubular member at least in the area in proximity to the distal end of the tubular member. In more particular embodiments, the fluid line also embodies a constricting element (e.g., reducer) to increase flow velocity and a redirection element (e.g., elbow) so as to redirect the fluid flow to a given direction. In the illustrated embodiment, the fluid flow is re-directed so as to more particularly impinge on the cutting element **130f** and the shield **141f**. In addition, the fluid also flows so as to generally spray onto the tissue being processed by the cutting implement and the tissue proximal the surgical site (e.g., collateral tissue).

[0101] Referring now to FIG. 5C, there is shown another illustrative view of a distal portion of another embodiment of a surgical instrument **100g** according to the “another” aspect of the present invention. Such a surgical instrument includes, inter alia, a shield **141g** or barrier, a fluid line **252g** and suction line **262g**. The fluid line **252g** is connected to a source **250** (FIG. 6) of fluid and the suction line is connected to a suction source **260** (FIG. 6).

[0102] In the illustrated embodiment, a portion of the tubular member **140g** is arranged so it extends outwardly so as to form the shield **141g** or barrier (e.g., an arcuate shield or barrier) about a portion of the cutting implement **130g**. Reference shall be made to the discussion of FIG. 5B for the corresponding features as to further details of the fluid line **252g**, the shield **141g**, the tubular member **140g** and cutting element **130g** of this embodiment. As indicated herein, the shield can be a separate member that is coupled or attached to the distal end of the tubular member. As also indicated herein, the shield or barrier is preferably arranged so that during use the shield is positioned between the cutting implement and tissue adjacent to the surgical site. In this way, an inadvertent motion of the cutting implement should not contact and damage the adjacent tissue.

[0103] In the illustrated embodiment, the suction line **262g** is coupled to the tubular member **140g** and extends along the length of the tubular member at least in the area in proximity to the distal end of the tubular member. Preferably, the open end of the suction line **262g** also is positioned so as to be downstream of the cutting element **130g** and fluid line **252g** so the suction line removes or suctions fluid and/or debris from the processing of the tissue by the cutting element. This preferably also includes suctioning the fluid that was sprayed onto the tissue being processed by the cutting implement and tissue proximal the surgical site (e.g., collateral tissue).

[0104] Referring now to FIGS. 6-7 there is shown a schematic view of an exemplary powered surgical or medical apparatus **200** according to the present invention (FIG. 6) and a perspective exterior view of the handle **210** shown in FIG. 7. Such a surgical or medical apparatus **200** is easily adaptable for use with any of a number of surgical instruments as are

known to those skilled in the art as well as the above described surgical instruments of the present invention. Reference shall be made to USP **7,247,161** the teachings of which are incorporated herein by reference, for further details as to the powered surgical apparatus or powered medical apparatus not otherwise described herein. It shall be recognized, however, that the surgical instrument(s) of the present invention is/are adaptable for use in combination with any of a number of powered surgical apparatus as are known to those skilled in the art that include a cutting implement or device that is operably coupled to a power source to rotate the surgical instrument. In the discussion concerning FIGS. 6-7 the surgical or medical instrument is identified by reference numeral **100**, for simplifying the discussion. This, however, shall be not considered as limiting the described apparatus **200** to use with only this particular medical instrument as it is within the scope of the present invention for such an apparatus to be used with any of the herein described or illustrated surgical instruments.

[0105] Also, the medical or surgical instruments of the present invention are particularly advantageous as the heat pipe allows the removal of the heat of friction from the proximal end to the distal end without the need for an external source of fluid (e.g., water) for cooling and suction to remove the heated fluid directly from the surgical site. In addition, such a surgical instrument or cutting blade assembly of the present invention also advantageously provides a structure that does not require the source of irrigation fluid and/or the suction source to directly be connected to it, which enables the surgical instrument **100** to be changed out during a surgical or medical procedure without requiring that the source of irrigation fluid and/or the suction source to be disconnected from the handle **210** of the apparatus **200**.

[0106] The exemplary powered surgical or medical apparatus **200** includes a handle **210**, a footswitch **220** and a controller **230**. A general description of these elements as well as their interrelationship is provided below.

[0107] The surgical instrument **100** is removable and operably coupled to the handle **210** which includes a motor assembly for driving the surgical instrument for purposes of cutting, shaving, grinding, abrading or otherwise removing bodily material in accordance with a surgical, diagnostic or medical procedure or technique. Such removable and operable coupling shall include any of a number of techniques known to those skilled in the art that are appropriate for rotating the surgical instrument **100** that extends outwardly from the handle or other surgical apparatus to which the medical instrument is mounted to.

[0108] Such a handle **210** also is configurable so the proximal end **124** of the heat pipe **120** (FIG. 1) is appropriately thermally coupled to the external heat sink. In an illustrative embodiment, the handle **210** is thermally coupled to the shaft **140** or support member so that the heat energy being absorbed from the heat pipe distal end **122** is communicated to the handle **210** (e.g., directly or via the shaft **140**) and thence to the surrounding atmosphere.

[0109] In another embodiment, the handle **210** is configured so as to include one or more openings or ports that are arranged proximal the heat pipe proximal end **124** when the surgical instrument is operably disposed within the handle. In this way, the absorbed heat energy is dispersed from the heat pipe and/or the shaft **140** via these openings.

[0110] As indicated above in connection with the discussion regarding FIGS. 3A-C, the heat pipe and/or the shaft are

configurable so as to include one or more surface artifacts **170** to facilitate the transfer of the absorbed heat energy to the atmosphere. In such further embodiments, the handle and openings therein are further configured so as to provide a space between the structure of the handle and the rotating surface artifacts.

[0111] As indicated above in connection with the discussion regarding FIG. 4, an active cooling system **180** is provided that is thermally coupled to the heat pipe proximal end **124** directly and/or via the portion of the shaft **140** about the heat pipe proximal end. In such a system, a cooling fluid passes through a cooling coil **182**, which in turn absorbs the heat energy being dissipated from the heat pipe proximal end. In this embodiment, the handle **210** also is configured so as to receive the structure of the cooling coil and the associated inlet and outlet lines. In further embodiments, the handle **210** can further include fluid lines fluidly coupling these inlet and outlet lines respectively to the irrigation source **250** and the suction source **260**.

[0112] The medical instrument **100** or other cutting blade assembly as is known to those skilled in the art is arranged so as to extend from the distal end of the handle **210**. As described herein, the distal end of the medical instrument **100** or cutting blade assembly is usable to cut, shave, grind, abrade and/or remove bodily material during a surgical procedure or operation. The distal end of the medical instrument **100** or cutting blade assembly can perform the cutting, shaving and/or removal in any manner, such as by rotation, for example. In operation, a surgeon grasps the handle **210** as if grasping a pistol and brings the distal end of the surgical instrument or cutting blade assembly into contact with the bodily material to be shaved, cut and/or removed.

[0113] The footswitch **220** is operably connected to the controller **230**, for example, via a footswitch signal line **222**, such as an electric cable. The footswitch **220** is typically disposed on the floor of a surgical room within reach of the surgeon's foot. The footswitch **220** includes an actuator member, such as a foot pedal **224**, the actuation of which results in an input signal being transmitted to the controller **230** via the footswitch signal line **222**. In operation, the surgeon places his or her foot on the footswitch **222** and depresses the foot pedal **224** to provide an input signal to the controller for the purpose of controlling at least one operation of the apparatus, such as energizing/de-energizing rotation of the medical instrument **100** or cutting blade assembly, or speed of rotation of the medical instrument **100** or cutting blade assembly, for example. However, the footswitch signal line can be used for any other purpose, such as to transmit other types of signals to the controller **230**, to transmit signals from the controller **230** to the footswitch, or to supply power to the footswitch, for example.

[0114] Alternatively or additionally, the handle can include a trigger switch assembly as are known to those skilled in the art and used in lieu of, or in addition to, the footswitch **220**. The trigger switch assembly can be actuable such that, while the surgeon grasps the handle as if grasping a pistol, one or more of the surgeon's fingers can press a part of the trigger switch assembly toward the handle as if pulling the trigger of the pistol (e.g., depressing the trigger such as done with a conventional drill).

[0115] The controller **230** also is operably connected to the handle **210** via a handle signal line **232**. In this way, the controller **230** can output signals to the handle via the handle signal line, for example, control signals controlling on/off

status of the surgical instrument **100** or cutting blade assembly, and/or rotation speed of the medical instrument **100** or cutting blade assembly (e.g., based upon input signals received by the controller **230** from the footswitch). The handle signal line, however, is useable for any of a number of other purposes, such as to transmit other types of signals to the handle **210**, to transmit signals from the handle **210** to the controller **230**, or to supply power to the handle, for example. For example, the handle supply line also is useable to transmit signals to the controller **230** indicating the type of handle **210** that is currently connected to the controller.

[0116] In the illustrative embodiment, the controller **230** is also connected to a power source **240** via a power source supply line, such as a standard electric cable or hospital grade power cord, for example. The controller receives and utilizes a source of AC or DC electric voltage from the power source or it also can receive and utilize a source of DC electric voltage.

[0117] The handle **210** or hand piece can be connected to a source **250** of irrigation fluid by an irrigation fluid supply tube **252**. The irrigation fluid can be provided so as to pass through the handle **210** to the surgical site for the purpose of lubricating the blade or blades for enhanced cutting or shaving efficiency, for example. The irrigation fluid can be provided for any other purpose, such as flushing out the surgical site for enhanced removal of cut or shaven bodily material, for example.

[0118] As described herein, the medical instrument **100** according to an embodiment of the present invention is coupled to an active fluid cooling system **180** where the irrigation fluid source **250** is fluidly coupled to the cooling coil **182** of such a system. In this embodiment, a fluid branch can be provided to fluidly couple the cooling coil **182** to the irrigation line **252**. In such an active fluid cooling system embodiment, the heat energy absorbed by the heat pipe **120** is absorbed and removed by the irrigation fluid flowing through the cooling coil **182**. Additionally, this absorbed heat energy is then removed, for example, by fluidly coupling the outlet of the cooling coil **182** to a suction source such as the suction source **260** used for suctioning the irrigated water.

[0119] The irrigation fluid is supplied from the irrigation fluid source **250** to the handle **210** or surgical site using by any or a number of techniques and/or mechanisms known to those skilled in the art.

[0120] In the illustrative embodiment, the handle **210** is fluidly connected or coupled to a source of suction **260** by a suction supply tube **262**. The suction can be provided so as to extend through the handle and thence to the surgical site for the purpose of removing cut or shaven bodily material and/or irrigation fluid. However, as indicated above, the suction can be provided for any other purpose such as being fluidly coupled to the outlet of the cooling coil **182**.

[0121] The above overall system description of the apparatus **200** is provided for exemplary purposes only. The invention is not only intended to cover the above described overall system, but also various other aspects of the individual elements or combinations of the individual elements of the overall system. Thus, any of the other aspects of the individual elements of the invention can be utilized individually, with combinations of the above individual elements or in conjunction with systems that are quite different than the overall system discussed above and still be within the spirit and scope of the invention.

[0122] The handle **210** includes an upper portion **212a** and a lower portion **212b** that define a pistol grip. The operator, such as a surgeon, grasps the handle **210** as if gripping a pistol, a drill or the like. The specific manner of grasping the handle is determined by the operator's preference. In an exemplary method of grasping the handle, the surgeon's palm is pressed against a rear end of the lower portion **212b**, while one or more of the surgeon's fingers can wrap around a front end of the lower portion. One or more of the surgeon's fingers also can extend along the upper portion **212a**. Such a pistol grip can provide an ergonomic advantages, e.g., the operator may find the pistol grip easier to hold for long periods of time, easier to operate with one hand or easier to precisely manipulate the surgical instrument **100** or cutting blade assembly to its desired target area.

[0123] The handle signal line **232** is connected to the handle via a cable assembly **234**, which is then electrically connected to a motor assembly. The controller **230** can thereby send control signals to the motor assembly via the handle signal line and cable assembly to actuate the motor on and off and to regulate the speed of the motor. However, the controller **230** can send and/or receive any other signals to or from the motor assembly via the handle signal line **232** and cable assembly **234**.

[0124] In yet further aspects, the present invention features surgical, diagnostic and medical methods that embody such medical instruments **100** and/or apparatus **200**. In the within discussion, the surgical or medical instrument is identified by reference numeral **100**, and the apparatus is identified by reference numeral **200** for simplifying the discussion. This, however, shall not be considered as limiting the methods of the present invention to the identified apparatus or surgical instrument. It is within the scope of the present invention for such methods to use any of the herein described or illustrated apparatus or surgical instruments.

[0125] Although a preferred embodiment of the invention has been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

INCORPORATION BY REFERENCE

[0126] All patents, published patent applications and other references disclosed herein are hereby expressly incorporated by reference in their entireties by reference.

Equivalents

[0127] Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, many equivalents of the specific embodiments of the invention described herein. Such equivalents are intended to be encompassed by the following claims.

What is claimed is:

1. A surgical instrument comprising:

a rotating cutting implement for use in processing a part of a mammalian body;

a heat pipe being arranged so as to absorb heat energy at one end thereof and dissipate the heat energy at least at a second end thereof; and

wherein the rotating cutting implement and heat pipe are arranged so that the heat pipe first end is thermally coupled to the rotating cutting implement so that at least some heat energy being developed by the rotating cut-

ting implement when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end.

2. The surgical instrument of claim 1, wherein the heat pipe further includes a material disposed in the interior of the heat pipe to facilitate movement of a phase change medium along a length of the heat pipe.

3. The surgical instrument of claim 1, wherein the rotating cutting implement includes a cavity that is configured and arranged to receive at least a portion of the heat pipe first end.

4. The surgical instrument of claim 3, further comprising a thermally conductive medium, the thermally conductive medium being disposed in the rotating cutting implement cavity about the heat pipe first end so as to facilitate thermal coupling between the rotating cutting implement and the heat pipe first end.

5. The surgical instrument of claim 1 further comprising a tubular member that is connected to the rotating cutting implement and extends outwardly from the rotating cutting implement such that a longitudinal extending portion of the heat pipe is disposed within the tubular member.

6. The surgical instrument of claim 5, wherein the tubular member further includes a plurality of reduced diameter regions disposed along a length of the tubular member, each of the plurality of reduced diameter regions being formed so as to at least reduce a gap between an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe.

7. The surgical instrument of claim 5, wherein the tubular member further includes a plurality of contact regions disposed along a length of the tubular member, each of the plurality of contact regions being formed so an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe are in slidable contact with each other.

8. The surgical instrument of claim 1, wherein the heat pipe second end is arranged so as to be exposed to a cooling medium, whereby heat energy communicated to the heat pipe second end is dissipated to the cooling medium.

9. The surgical instrument of claim 8, wherein an outer surface of the heat pipe second end includes surface artifacts to facilitate transfer of heat energy from the heat pipe to the cooling medium.

10. The surgical instrument of claim 9, wherein the artifacts comprise cooling fins.

11. The surgical instrument of claim 8, further including an active fluid cooling system that absorbs and removes heat energy by circulating a fluid and wherein the heat pipe second end is thermally coupled to the active fluid cooling system to facilitate transfer of heat energy from the heat pipe to the circulating fluid.

12. The surgical instrument of claim 1, wherein the rotating cutting implement is a bun provided with a shield member and a fluid line for providing fluid at a distal end of the surgical instrument during operation of the rotating cutting implement.

13. The surgical instrument of claim 12, wherein the bun is utilized in connection with one of an ENT surgical procedure, an arthroscopy procedure and a laparoscopy procedure.

14. A surgical instrument comprising:

a burr having a given shape;

a heat pipe being arranged so as to absorb heat energy at one end thereof and dissipate the heat energy at least at a second end thereof;

wherein the burr and heat pipe are arranged so that the heat pipe first end is thermally coupled to the burr such that at least some heat energy being developed by the burr implement when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end;

a tubular member that is connected to the burr and extends outwardly from the burr such that a longitudinal extending portion of the heat pipe is disposed within the tubular member; and

wherein the burr includes a cavity that is configured and arranged to receive at least a portion of the heat pipe first end therein.

15. The surgical instrument of claim **14**, wherein the heat pipe further includes a material disposed in the interior of the heat pipe to facilitate movement of a phase change medium along a length of the heat pipe.

16. The surgical instrument of claim **14**, further comprising a thermally conductive medium, the thermally conductive medium being disposed in the cavity of the burr about the heat pipe first end so as to facilitate thermal coupling between the burr and the heat pipe first end.

17. The surgical instrument of claim **14**, wherein the tubular member further includes a plurality of regions disposed along a length of the tubular members, each of the plurality of regions being formed so as to at least reduce a gap between an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe.

18. The surgical instrument of claim **14**, wherein the tubular member further includes a plurality of regions disposed along a length of the tubular members, each of the plurality of

regions being formed so an inner surface of the tubular member and an outer surface of the longitudinally extending portion of the heat pipe are in moveable contact with each other.

19. The surgical instrument of claim **14**, wherein the heat pipe second end is arranged so as to be exposed to a cooling medium, whereby heat energy communicated to the heat pipe second end is dissipated to the cooling medium.

20. A motorized surgical apparatus comprising:

a motor; and

a movable cutting assembly, the movable cutting assembly including:

a burr having a given shape;

a heat pipe being arranged so as to absorb heat energy at one end thereof and dissipate the heat energy at least at a second end thereof;

wherein the burr and heat pipe are arranged so that the heat pipe first end is thermally coupled to the burr so that at least some heat energy being developed by the burr when in use is absorbed by the heat pipe first end and is communicated in the direction of the heat pipe second end;

a tubular member that is connected to the burr and extends outwardly from the burr so that a longitudinal extending portion of the heat pipe is disposed within the tubular member; and

wherein the tubular member is operably coupled to the motor such that when in use, the tubular member and the burr are rotated by the motor at a desired rotational speed.

* * * * *

专利名称(译)	热管冷却毛刺包括体现它的手术器械		
公开(公告)号	US20150230821A1	公开(公告)日	2015-08-20
申请号	US14/624070	申请日	2015-02-17
[标]申请(专利权)人(译)	GYRUS ACMI INC D B—OLYMPUS手术TECHNOLO		
申请(专利权)人(译)	GYRUS ACMI , INC. (D.B.A. OLYMPUS外科TECHNOLO		
当前申请(专利权)人(译)	GYRUS ACMI , INC.		
[标]发明人	BATCHELOR KESTER J NELSON JEFFREY J		
发明人	BATCHELOR, KESTER J. NELSON, JEFFREY J.		
IPC分类号	A61B17/3207		
CPC分类号	A61B17/32002 A61B2017/00973 A61B2018/00005 A61B2217/005 A61B2217/007 A61B17/320758		
优先权	61/942192 2014-02-20 US		
其他公开文献	US9901364		
外部链接	Espacenet USPTO		

摘要(译)

特征在于一种手术器械，包括旋转切割工具和传热机构，传热机构构造成在使用这种旋转切割工具期间吸收热能。传热机构配置成使吸收的热能传递到外部散热器。这种传热机构包括热管，例如，烧结或芯吸式热管。热能在热管的一端被吸收，以最小化在手术部位处和/或周围对组织等造成损害的可能性。还有一种外科手术器械，其包括这样的外科手术器械和外科手术或医疗方法或程序，用于使用这种外科手术器械或外科手术器械操纵，可旋转地切割，研磨，研磨或清除哺乳动物身体的组织，骨骼或其他结构或组件。

