




US 20040225277A1

(19) **United States**(12) **Patent Application Publication**
Jacob(10) **Pub. No.: US 2004/0225277 A1**(43) **Pub. Date: Nov. 11, 2004**(54) **ENDOLUMINAL COLOSTOMY SYSTEM
AND PROCEDURE**(57) **ABSTRACT**(76) **Inventor: Brian P. Jacob, New York, NY (US)**Correspondence Address:
DARBY & DARBY P.C.
P. O. BOX 5257
NEW YORK, NY 10150-5257 (US)(21) **Appl. No.: 10/798,246**(22) **Filed: Mar. 10, 2004****Related U.S. Application Data**(60) **Provisional application No. 60/453,580, filed on Mar. 11, 2003.****Publication Classification**(51) **Int. Cl.⁷ A61B 17/11**(52) **U.S. Cl. 604/506; 606/153; 128/898;
606/139; 604/500**

A trocar for positioning within a body lumen such as an intestine is disclosed. The trocar has a window adjacent its distal end in communication with the internal lumen of the trocar. The trocar is sufficient rigid to stabilize the body lumen upon positioning therein to maintain patency of the body lumen. A slot in communication with the window extends to the distal end of the trocar.

A surgical procedure for reversing a colostomy procedure is also disclosed. The above described trocar is inserted into a first intestinal section through an opening in the abdominal wall. A guide wire is introduced through the rectal opening and advanced through the rectal stump and out the opening in the abdominal wall. An anvil is connected to the guide wire and the guide wire withdrawn through the rectal opening to advance the anvil within the first intestinal section. An anastomosis instrument is introduced through the rectal opening and connected to the anastomosis instrument. The anastomosis instrument is fired to connect the two intestinal sections to reestablish continuity between them.

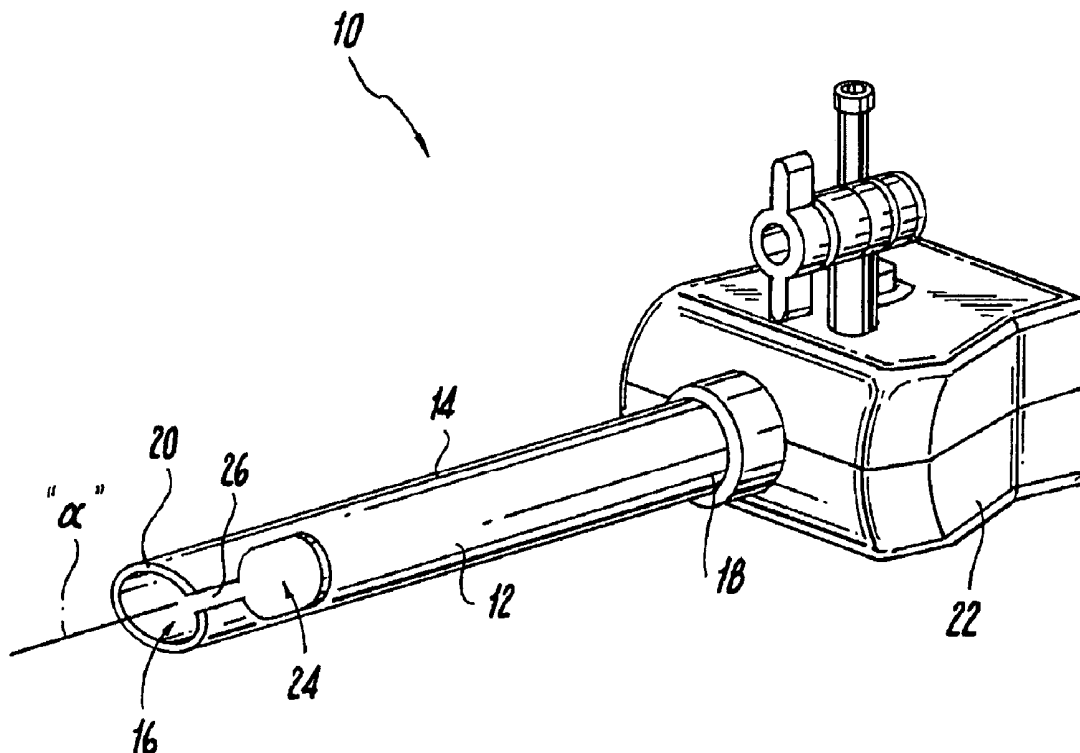

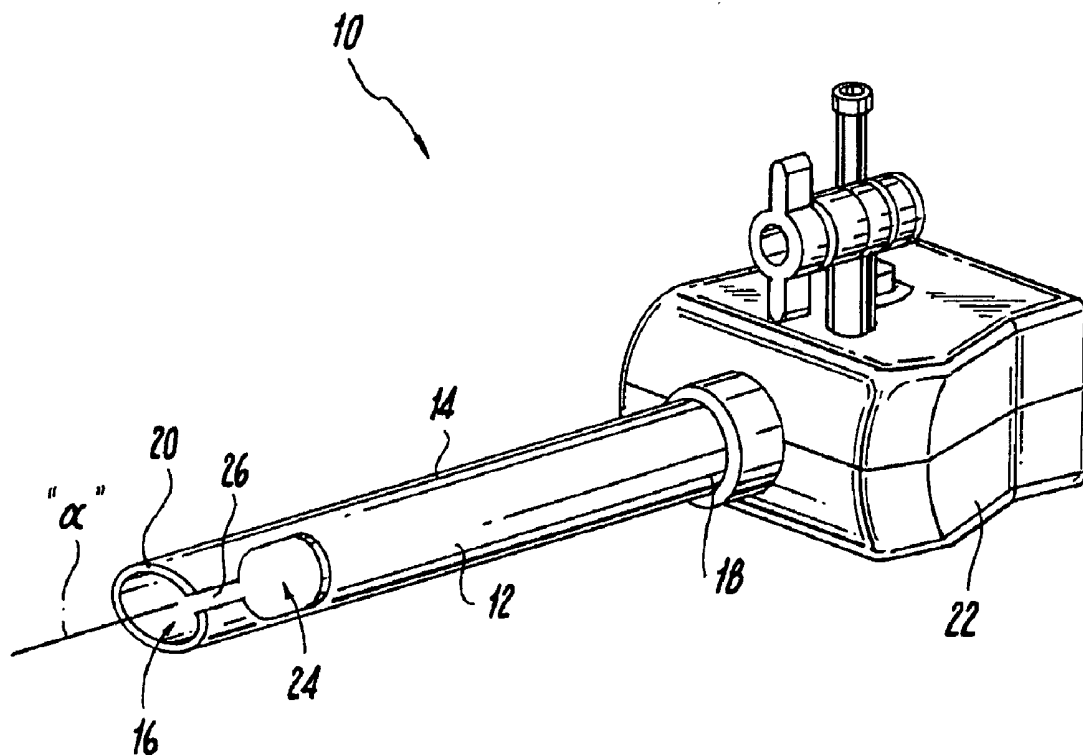
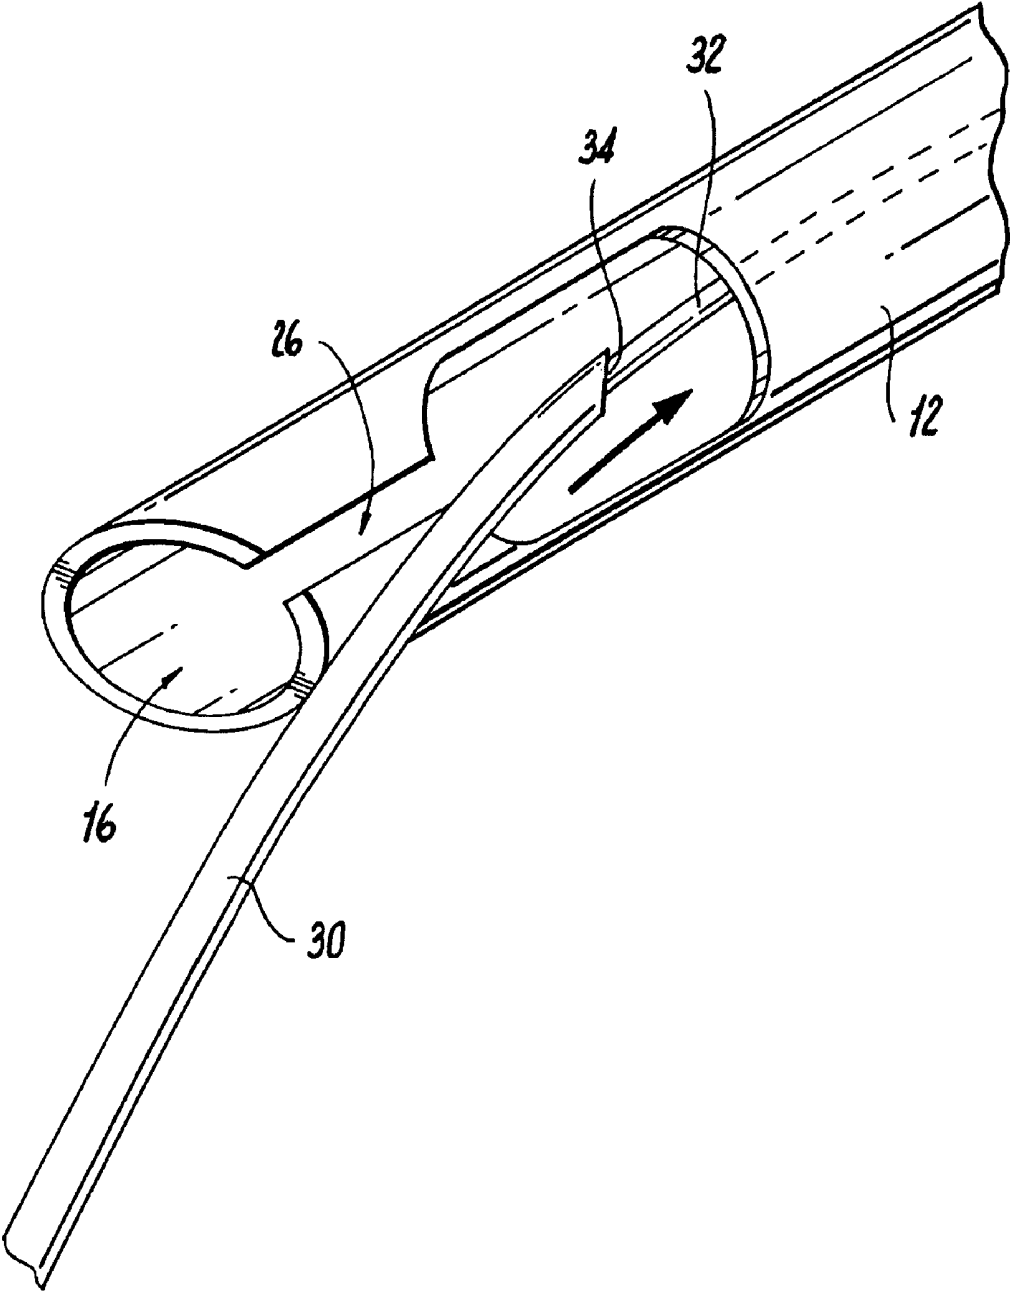


Fig. 1

Fig. 2



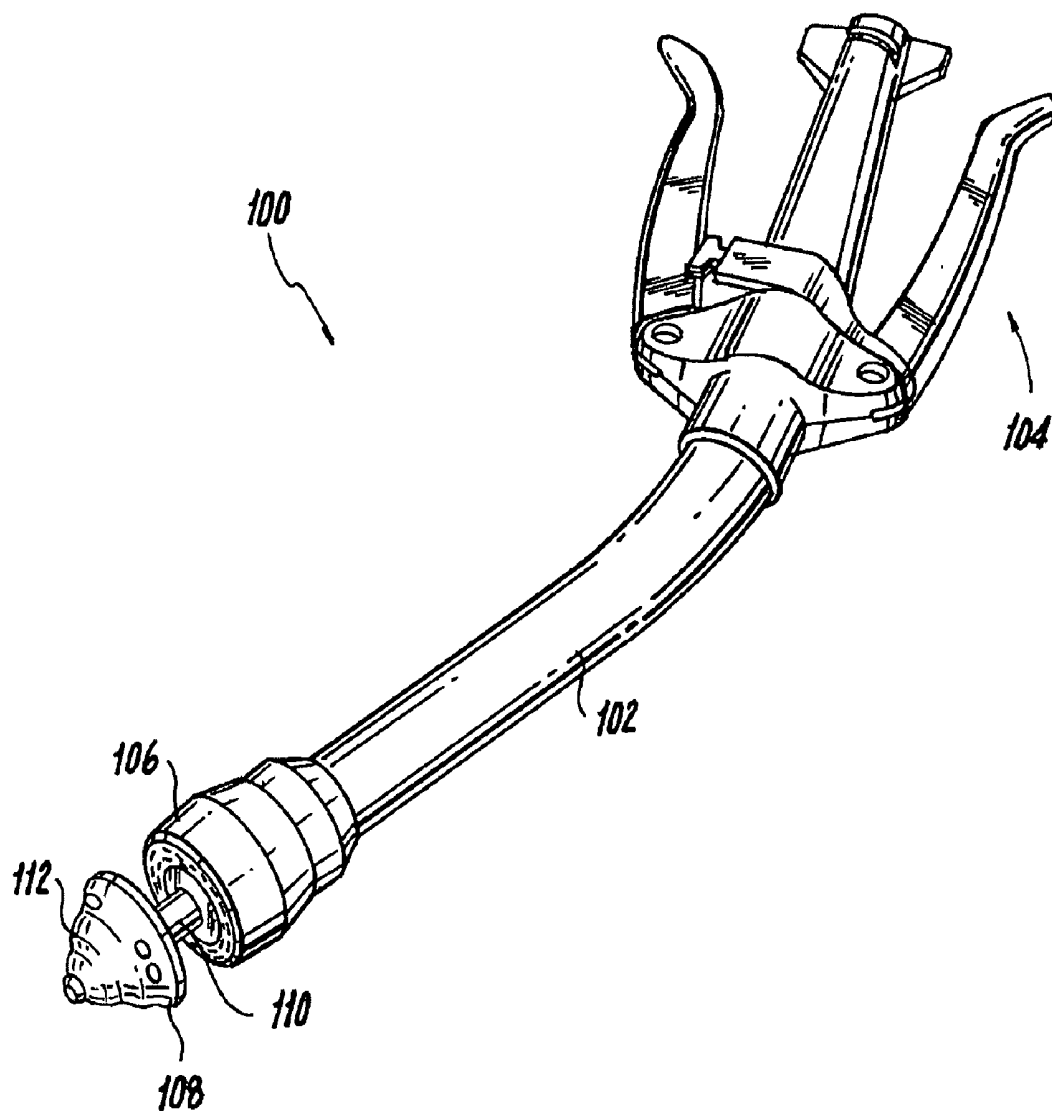


Fig. 3

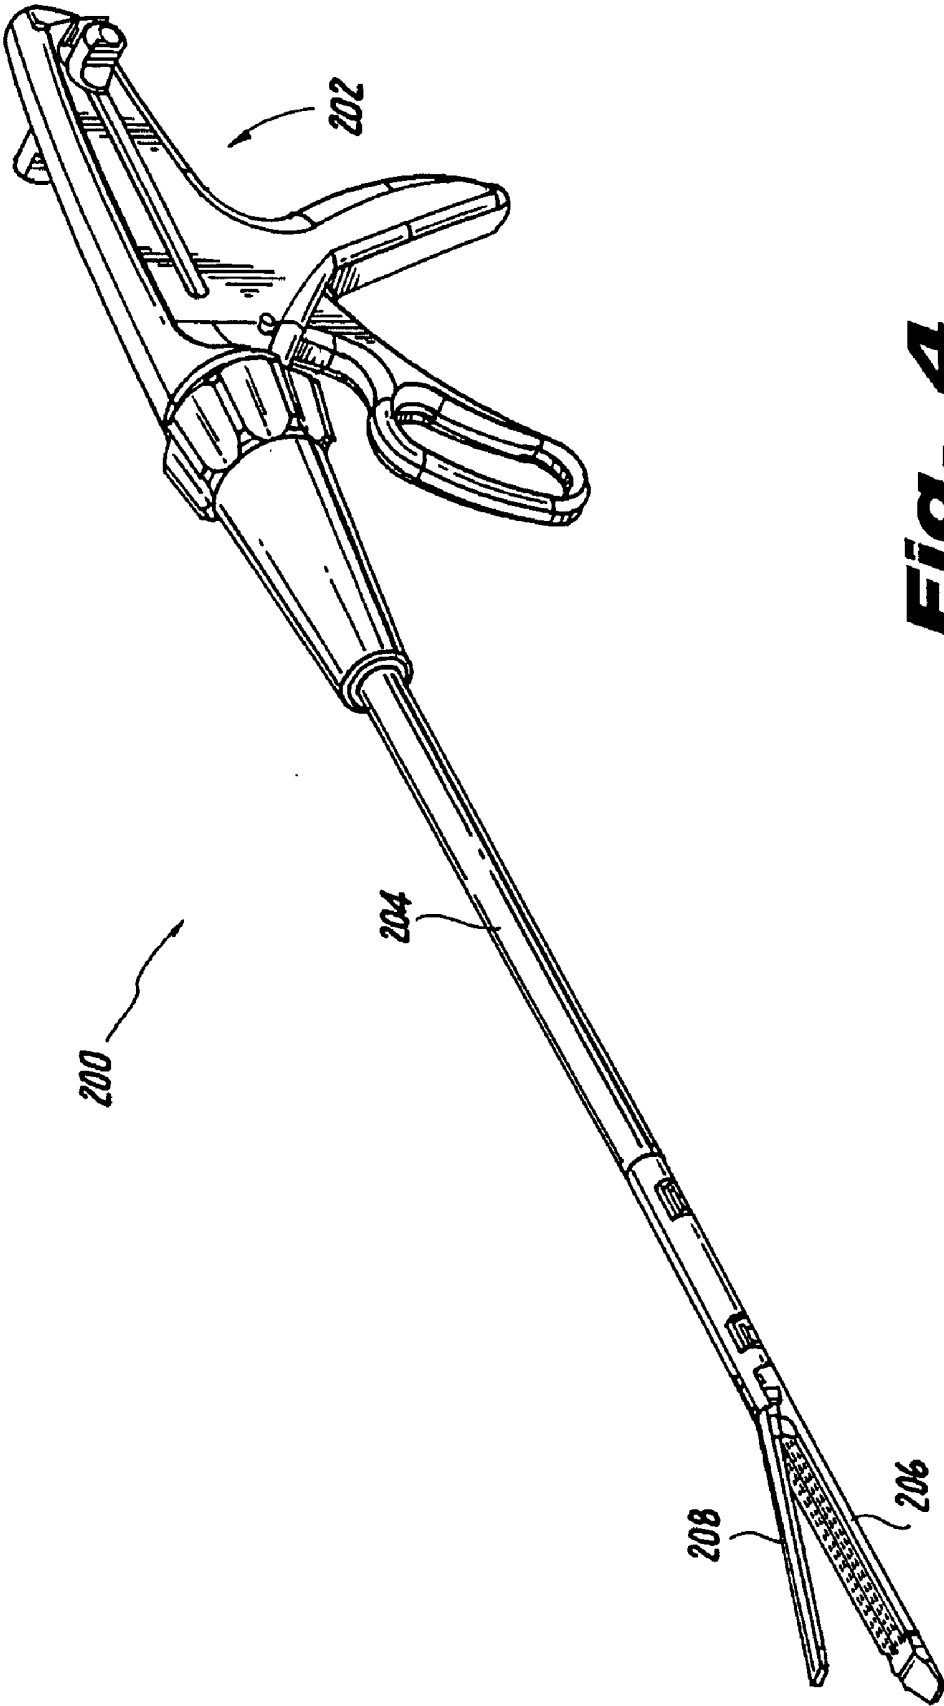


Fig. 4

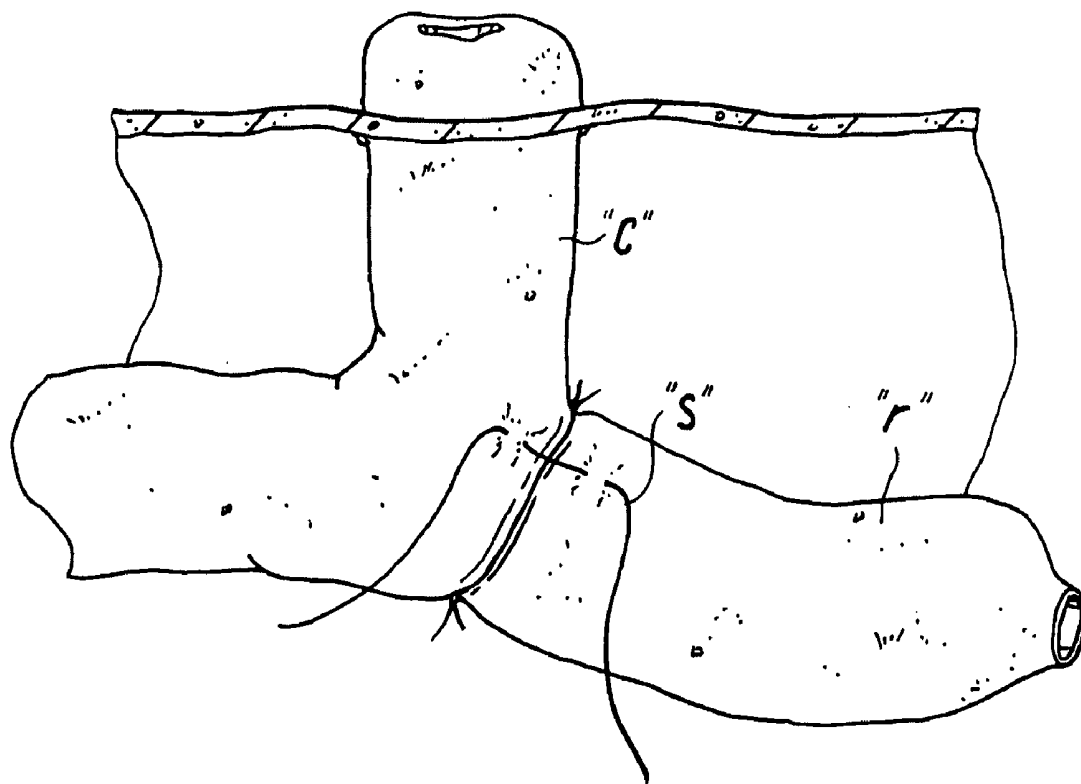


Fig. 5

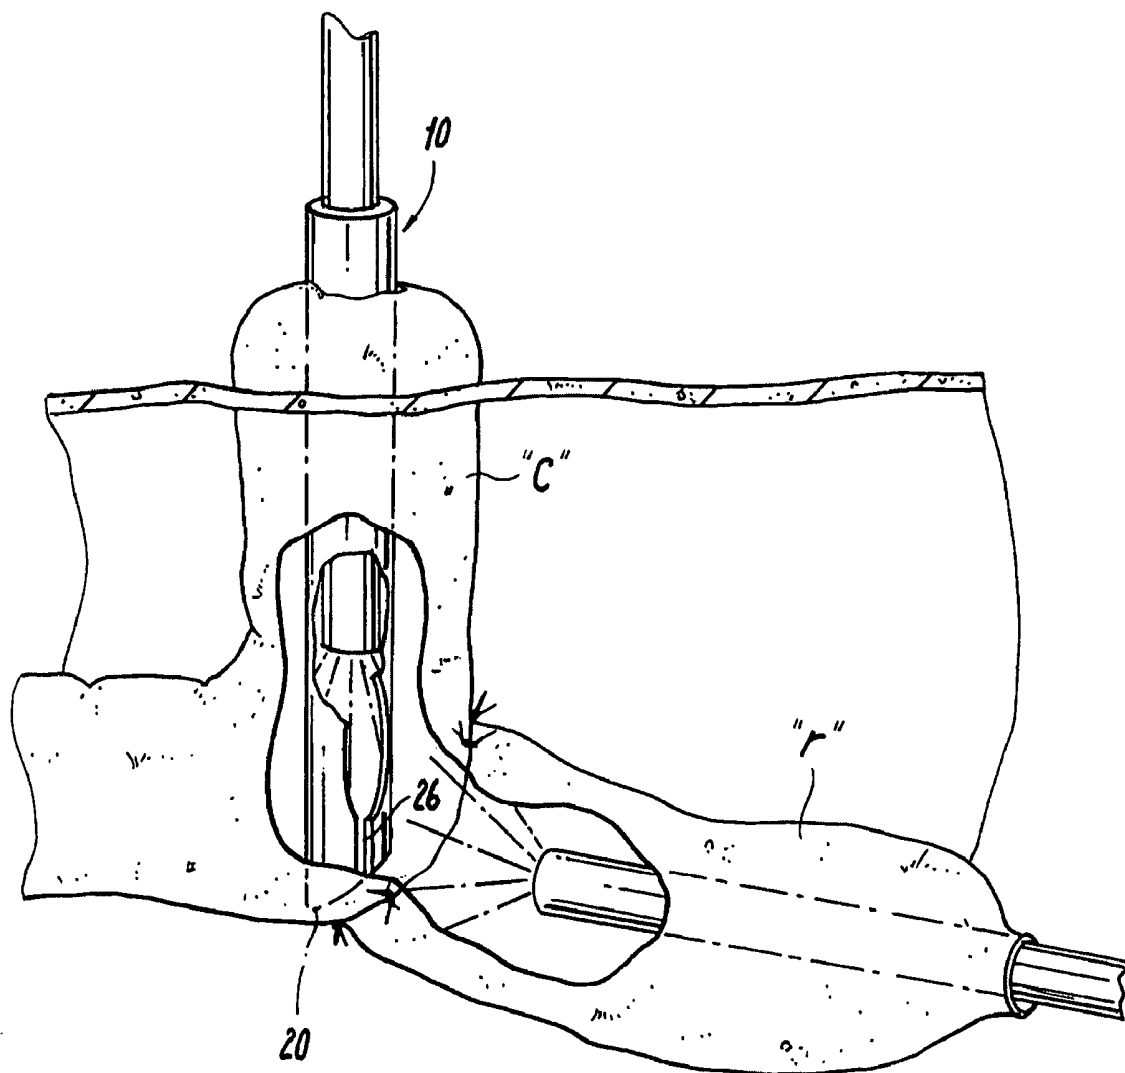


Fig. 6

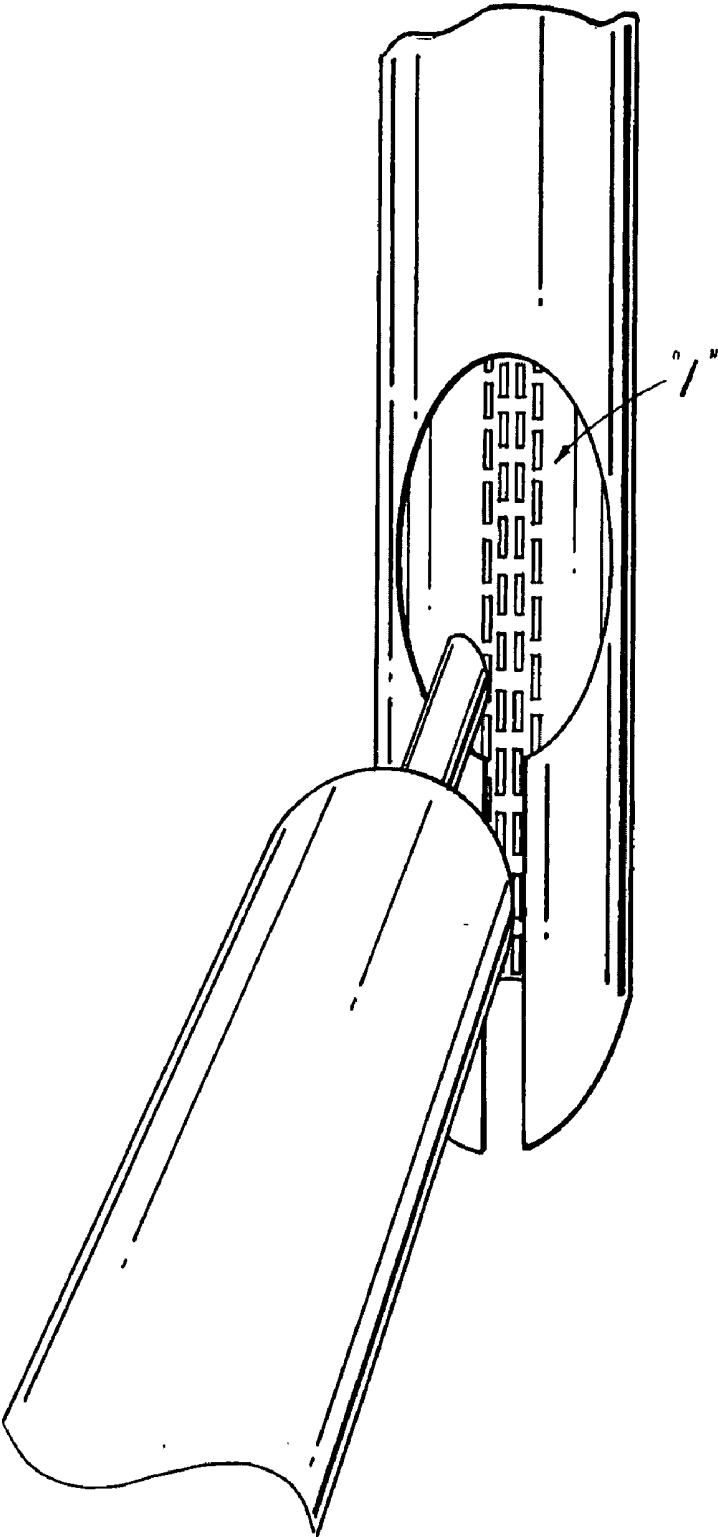


Fig. 7

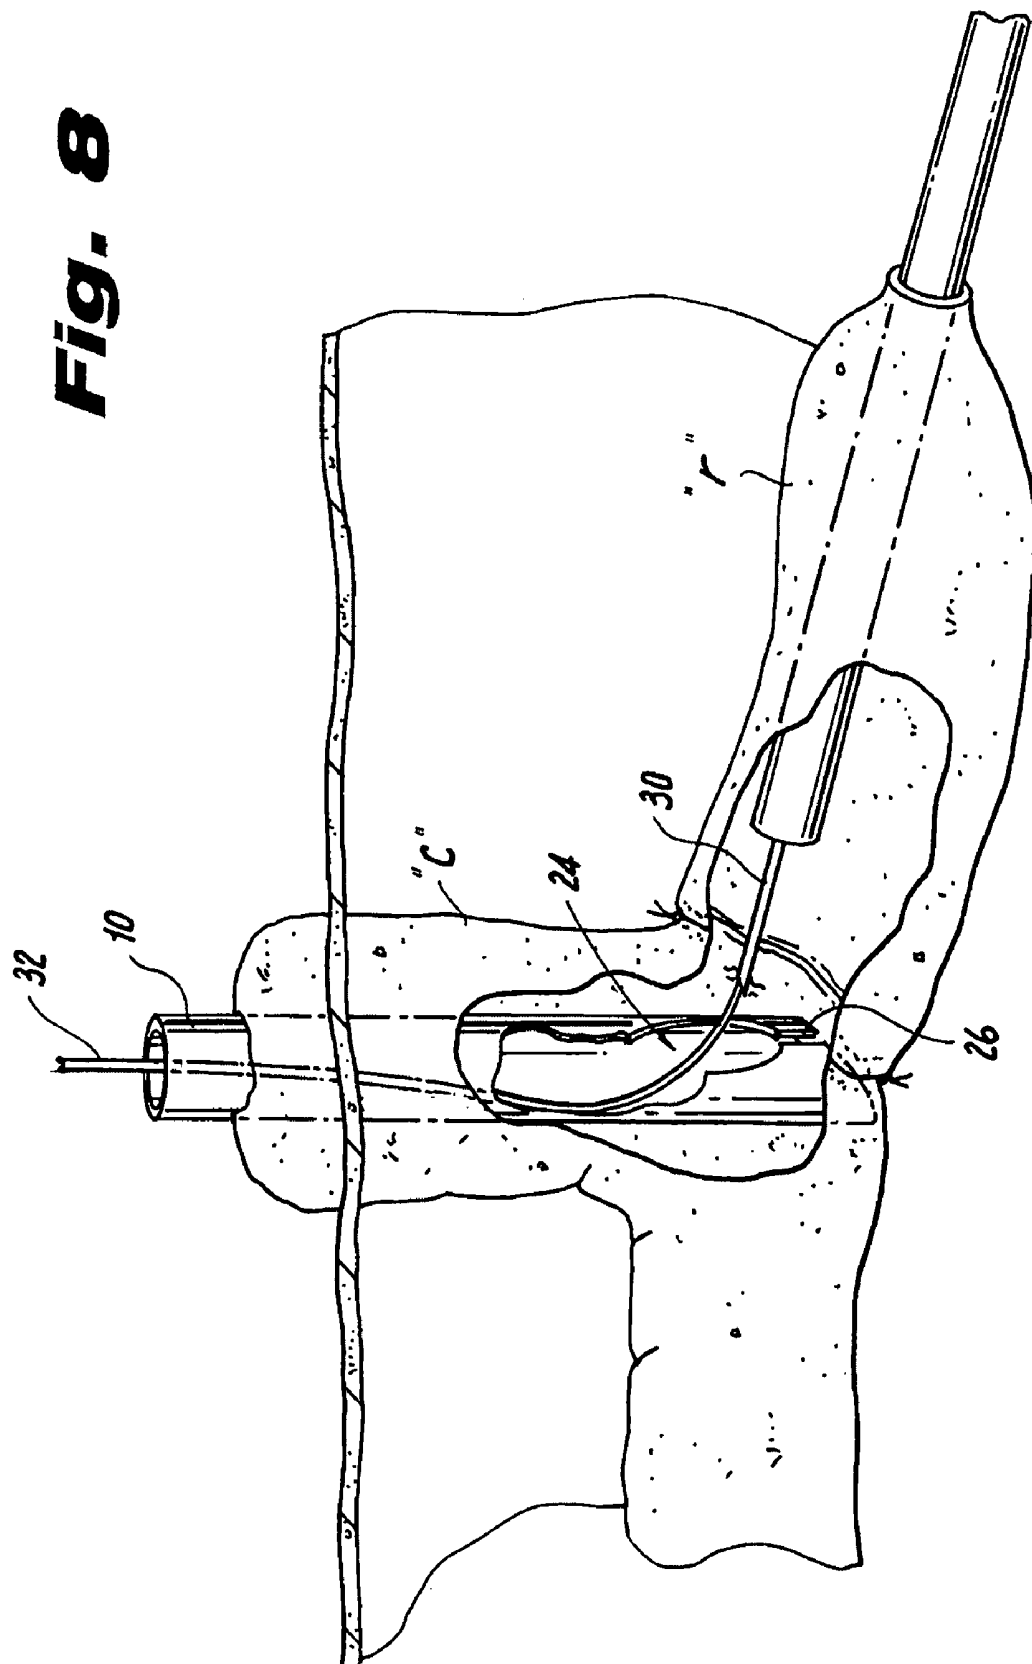


Fig. 8

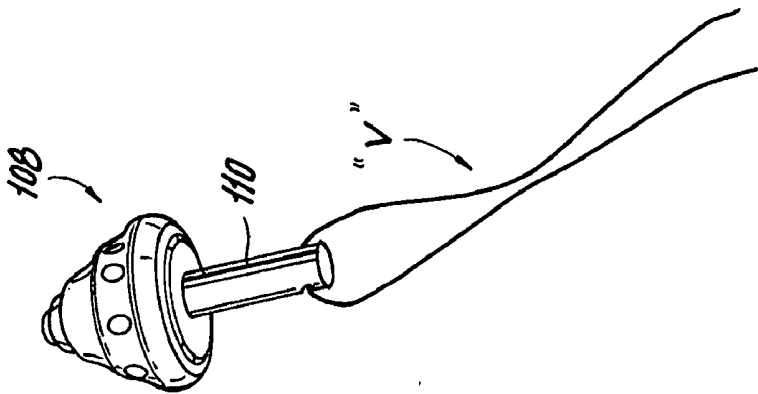


Fig. 9a

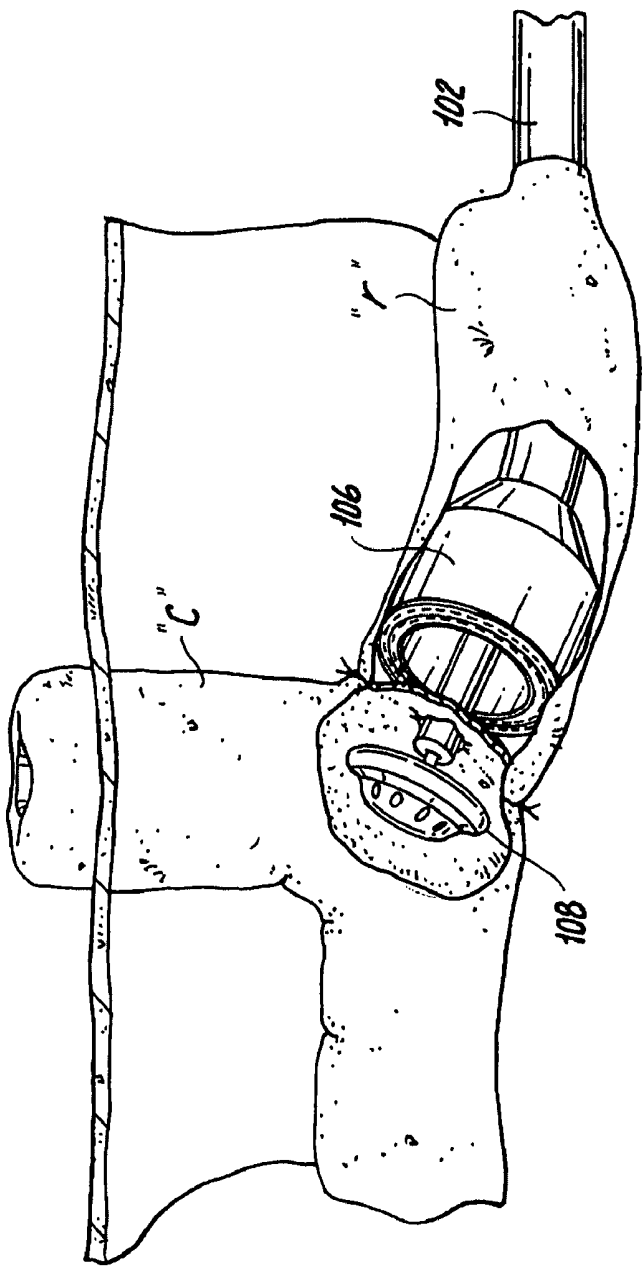


Fig. 9

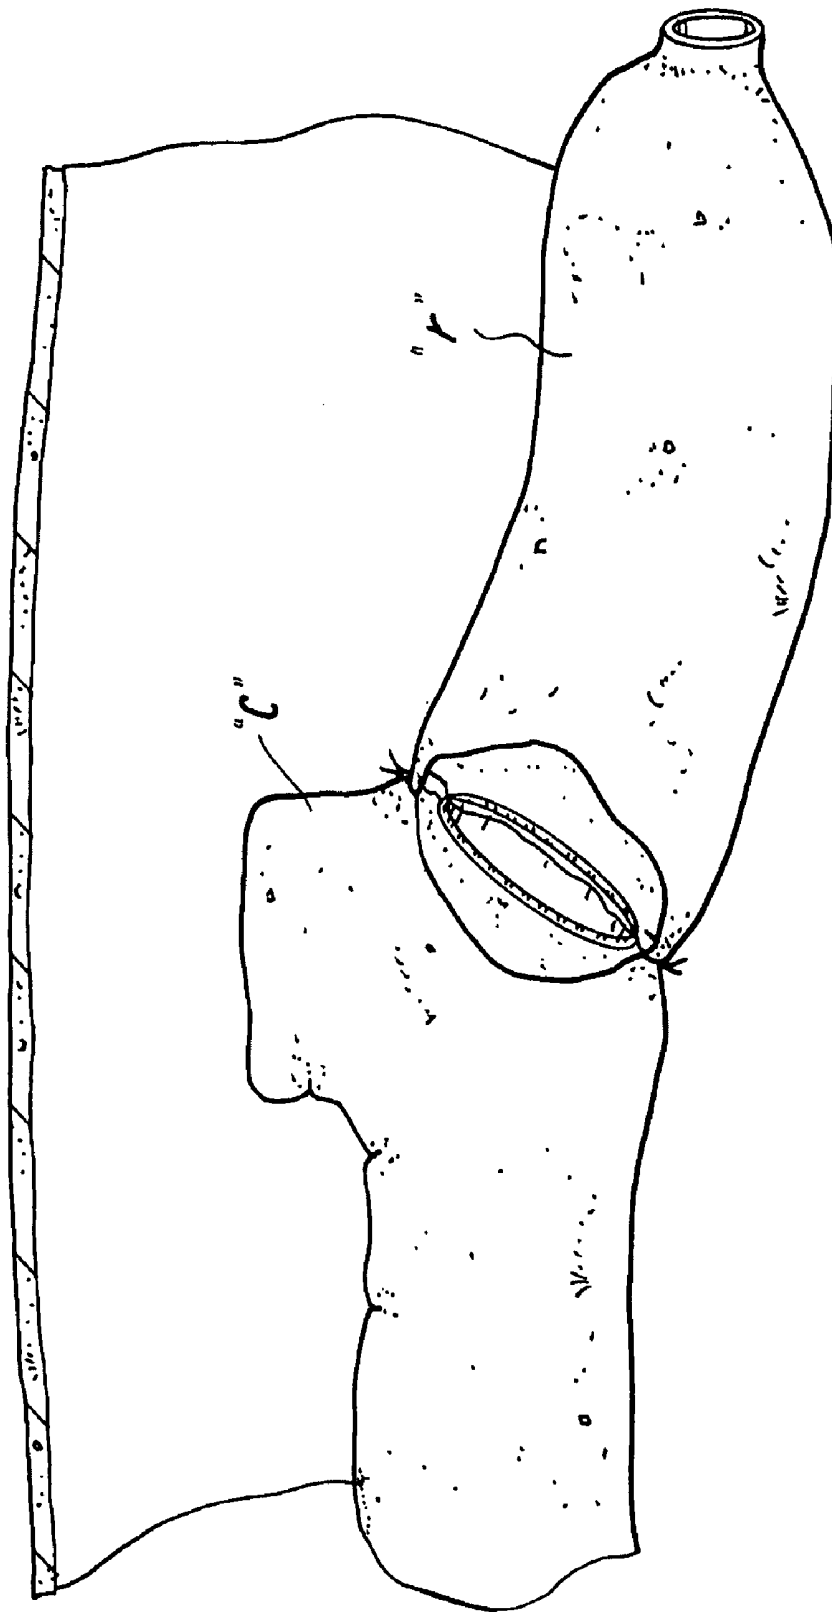


Fig. 10

ENDOLUMINAL COLOSTOMY SYSTEM AND PROCEDURE

[0001] This application claims priority pursuant to 35 U.S.C. 119 based upon U.S. Provisional Patent Application Serial No. 60/453,580 filed Mar. 11, 2003, the entire disclosure of which is hereby incorporated by reference.

1. FIELD OF THE DISCLOSURE

[0002] The present invention relates to a colostomy procedure and, more particularly, to a method for performing an endoluminal colostomy reversal procedure and a device for use in the procedure.

2. DESCRIPTION OF THE PRIOR ART

[0003] A colostomy is a surgical procedure in which a portion of a large intestine or colon is brought through the abdominal wall to provide an alternate conduit to carry feces from the body. A colostomy is established to treat various disorders of the large intestine including cancer, obstruction, inflammatory bowel disease, etc. Colostomies may be temporary or permanent.

[0004] A typical colostomy procedure is an end colostomy. An end colostomy involves the removal of a diseased portion of the intestinal tract. The healthy or functioning end of the intestine, i.e., which remains connected to the upper gastro intestinal tract, is brought out of the skin of the abdominal wall where it is sutured in place to create an opening or stoma in the surface of the body. An adhesive drainage (stoma appliance) may be placed around the opening. Thereafter, the distal portion of the bowel which is connected to the rectum may be removed or, in the alternative, closed via suturing and left in the abdomen.

[0005] Depending on the disease process being treated, the colostomy may be reversed within weeks or months after the first operation to reestablish a normal gastrointestinal path through the rectum. However, known techniques and associated devices for, effecting colostomy reversal are relatively invasive resulting in increased trauma to the patient and/or an increased morbidity and mortality rate.

SUMMARY

[0006] Accordingly, the present disclosure is directed to an apparatus and associated procedure for reversing a colostomy procedure. The preferred apparatus advantageously limits the invasiveness of this second stage reversal procedure. In one preferred embodiment, an access device for positioning within a body lumen such as an intestine is disclosed. The access device includes an access member having an outer wall defining an internal lumen. The access member defines a longitudinal axis and proximal and distal ends. The outer wall has a window adjacent the distal end in communication with the internal lumen. The access member has a cross-sectional dimension transverse to the longitudinal axis and a rigidity sufficient to stabilize the body lumen upon positioning therein to maintain patency of the body lumen. The outer wall may define a slot in communication with the window and extending to the distal end of the access member.

[0007] A novel surgical procedure for reversing a colostomy procedure of the type where an intestinal section is resected leaving a first intestinal section which is attached

adjacent an opening in the abdominal wall and a second intestinal section which extends to a rectal opening is disclosed. The procedure incorporates the aforescribed access device. The procedure includes the steps of:

[0008] accessing a first intestinal section through the opening in the abdominal wall;

[0009] introducing a guide within the rectal opening and advancing the guide through the second intestinal section and out the opening in the abdominal wall;

[0010] connecting an anvil to the guide;

[0011] withdrawing the guide through the rectal opening to advance the anvil within the first intestinal section;

[0012] introducing an anastomosis instrument within the rectal opening and into the second intestinal section and connecting the anvil to the anastomosis instrument; and

[0013] firing the anastomosis instrument to connect the first and second intestinal sections to re-establish continuity between the first and second intestinal sections.

[0014] Preferably the first intestinal section is accessed with an access device which is positioned through the opening in the abdominal wall and advanced within the first intestinal section. The guide is advanced through the lumen of the access device and out the opening in the abdominal wall. Thereafter the access device may be removed.

[0015] The procedure may be visualized with endoscopes positioned through trocars accessing the abdominal cavity and/or with scopes introduced within the access device and rectal opening.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The foregoing features of the present disclosure will become more readily apparent and will be better understood by referring to the following detailed description of preferred embodiments, which are described hereinbelow with reference to the drawings wherein:

[0017] **FIG. 1** is a perspective view of an access device of the system to be utilized in performing the novel endoluminal procedure for colostomy reversal in accordance with the principles of the present disclosure;

[0018] **FIG. 2** is a view illustrating additional components of the system utilized with the access device of **FIG. 1** to perform the colostomy reversal procedure;

[0019] **FIG. 3** is a perspective view of an end to end anastomosis instrument;

[0020] **FIG. 4** is a perspective view of a surgical stapling apparatus that can be used in performing the colostomy reversal procedure;

[0021] **FIGS. 5-10** are views illustrating the sequence of steps in performing an endoluminal procedure for colostomy reversal in accordance with the preferred method of the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] The preferred embodiments of the system and surgical procedure disclosed herein are discussed in terms of a colostomy reversal procedure in the digestive system, and devices utilized to carry out the procedure.

[0023] The following discussion will include a description of each instrument or device utilized in performing the colostomy reversal procedure followed with a description of a preferred method for performing the colostomy reversal in accordance with the principles of the present disclosure.

[0024] In the discussion which follows, the term "proximal", as is traditional will refer to the portion of the structure which is closest to the operator while the term distal will refer to the portion which is furthest from the operator.

[0025] Referring now to **FIG. 1**, there is illustrated a preferred embodiment of an instrument or device of the system for performing an endoluminal colostomy reversal procedure in accordance with the principles of the present disclosure. A trocar or access device **10** includes an elongated access member **12** having an outer wall **14** which defines a longitudinal axis "a". Outer wall **14** encloses longitudinal bore **16** which extends the length of the access member **12**, i.e., from proximal end **18** to distal end **20** of the access member **12** and into a lumen of the large intestine. Access device **10** preferably has sufficient rigidity to be advanced through an abdominal opening. Suitable materials of fabrication include preferably medical grade material inclusive of medical grade polymeric materials, stainless steel, titanium or any other suitable metal. Alternatively, access device may be flexible to permit navigation through a potentially tortuous path through tissue. In a preferred embodiment, access device **10** includes a trocar or cannula sleeve which may or may not include a cannula housing **22** shown in **FIG. 1**. The cannula sleeve defines an outer wall encircling the longitudinal passageway and a longitudinal bore extending through the sleeve. The diameter of the cannula sleeve preferably ranges from about 2 mm (millimeters) to about 20 mm, more preferably from about 5 mm to about 12 mm. If equipped, the cannula housing **22** provides a housing or handle dimensioned to facilitate manipulation of the access device **10** about the surgical site.

[0026] Access member **12** or cannula sleeve has a window **24** in its outer wall **14** spaced from distal end **20**. Window **24** communicates with longitudinal bore **16** of access member **12** and is advantageously dimensioned to receive instrumentation therein during performance of the surgical procedure. Window **24** also permits visualization of the operative site. Preferably, window **24** defines a radial arc ranging from about 90 degrees to about 180 degrees about longitudinal axis "a" of the access member **12**. Access member **12** may further include a slot **26** which extends from distal end **20** to window **24**. Slot **26** facilitates removal of a surgical instrument and/or access, member **12** during the procedure as will be discussed.

[0027] Access device **10** acts as both a mucosal protection and lumen stabilizing device for the anastomosis site. The endoluminal trocar serves several purposes. Besides increasing precision for locating and visualizing the zone of safety within the future ostomy site, the tube stabilizes the future anastomosis site, permits a precise needle puncture, and protects the opposite luminal wall from inadvertent injury.

[0028] Referring now to **FIG. 2**, there is illustrated additional surgical instrumentation of the system utilized to perform the method in accordance with the principles of the present disclosure. This instrumentation includes needle **30** and guide wire **32**. Needle **30** is preferably a cannulated needle having a distal beveled edge **34** for incising tissue. Cannulated needle **30** preferably defines an inner bore or cannulation for reception and passage of the guide wire **32**. Guide wire **32** may be any suitable guide wire having sufficient flexibility for maneuvering within tissue.

[0029] **FIG. 3** illustrates a circular or end to end anastomosis instrument which is utilized to perform the procedure of the present disclosure. This instrument **100** is marketed under the name PREMIUM CEEATM manufactured by U.S. Surgical Corporation, of Norwalk, Conn. and is the subject of commonly assigned U.S. Pat. No. 5,119,983, the contents of which are incorporated herein by reference. This instrument **100** includes an elongated shaft **102** having a handle portion **104** at a proximal end to actuate the instrument and a staple holding component **106** disposed at a distal end. An anvil component **108** is detachably mounted to the distal end of elongated shaft **102** by a mounting mechanism within the shaft which cooperatively engages the anvil component. Anvil component **108** includes anvil rod **110** with attached anvil head **112**. Anvil head **112** includes staple receiving buckets (not shown) to receive the staples expelled by the staple firing mechanism to clinch the staples and effect joining of the adjacent tissue sections. One anvil suitable for the purposes of the present disclosure is disclosed in commonly assigned U.S. Pat. No. 5,718,360 to Green et al., the contents of which are incorporated herein by reference.

[0030] In use of instrument **100**, opposed end portions of the organs to be stapled are clamped between the anvil head **112** and the staple holding component **106**. The clamped tissue is stapled by driving one or more staples from the staple holding component **106** so that the ends of the staples pass through the tissue and are clinched by the anvil head **112**. In some applications of the circular anastomosis procedure, the anvil rod **110** with attached anvil head **112** is mounted to the distal end of the shaft **102** prior to insertion of the instrument into the tissue to be anatomized. However, in other applications and in accordance with the preferred method of the present disclosure, it is preferable to utilize a detachable anvil which may be mounted to the instrument subsequent to positioning of the instrument and the anvil component within their respective tissue sections. In such instances, the stapling instrument and the anvil **108** are separately applied to the operative site. Each tissue section is then secured to their respective anvil **108** or staple holding component **106** by, e.g., a purse string stitch. The anvil **108** is mounted to the surgical instrument by inserting anvil rod **110** of the anvil **108** within the distal end of the instrument so that a mounting mechanism within the instrument securely engages the rod **110**.

[0031] Colostomy Procedure

[0032] A preferred colostomy procedure is known as a laparoscopic Hartmann procedure generally described in the background of this application. The Hartmann procedure involves resecting a diseased colon portion and rerouting the healthy proximal tract or colon through an opening or stoma in the abdominal wall leaving the distal bowel section connected to the rectum. The end of the healthy colon is

preferably folded back to receive sutures which pass through the folded areas for attachment to the abdominal wall. The preferred Hartmann procedure is preferably performed under laparoscopic conditions which involve insufflating the peritoneal cavity with insufflation gases to raise the cavity wall to provide enhanced access therein. The diseased colon is resected preferably with a surgical stapling apparatus which is introduced through a trocar accessing the abdominal cavity. One suitable apparatus is marketed under the tradename ENDO GIA™ by U.S. Surgical Corporation of Norwalk, Ct. and is depicted in FIG. 4. This instrument is the subject of commonly assigned U.S. Pat. No. 5,894,979, the contents of which are incorporated herein by reference. This instrument 200 is adapted to place a plurality of longitudinal or linear rows of staples and may further include a knife for making an incision in body tissue between the rows of staples. The instrument 200 includes a frame 202 and an elongated tubular member 204 mounted to the frame 202. Mounted to the distal end portion of the tubular member is a cartridge assembly 206 which houses a plurality of rows of staples. An anvil 208 is pivotably movable relative to the cartridge assembly 206 to position tissue therebetween. Upon activation, the staples are fired to be clinched by the anvil 208 while the knife severs the tissue between the adjacent rows of staples. This instrument fires a linear row(s) of staples through the colon. A knife blade incorporated within the instrument removes or severs the tissue adjacent the staple line thus detaching the diseased colon section from the lower or bowel section of the intestinal tract. As appreciated, however, the end of the bowel section or rectal stump removed from the anal opening is closed via the staple line.

[0033] With reference now to FIG. 5, as part of the Hartmann procedure, the rectal or bowel stump "r" may be re-approximated to the surface of the colon section adjacent the end colostomy. This is accomplished by suturing the stapled end of the rectal stump to the serosal surface of the colon "c" at a location displaced from the anterior abdominal wall. A plurality of circumferentially displaced sutures "s" may be used to secure this re-approximation. Fluoroscopy may be utilized to confirm the re-approximation. Alternatively, this step may be performed during the colostomy reversal procedure.

[0034] Endoluminal Colostomy Reversal Procedure

[0035] After a period of healing, attention is directed to performing the novel colostomy reversal procedure. At this point, if the rectal stump was not re-approximated during the colostomy procedure, re-approximation is effected in the aforescribed manner. The abdominal cavity is insufflated via known techniques. With reference now to FIG. 6, initially, access device 10 is introduced within the stoma opening and advanced whereby the distal end 20 is adjacent the reapproximation location with window 24 of access device 10 arranged to face the rectal stump "r". Upon insertion, access device 10 serves as a stabilizing device; Specifically, the lumen of the end colostomy limb or colon "c" is often collapsed, so as to assist in maintaining patency. The access device is advantageously configured to open and stabilize the lumen upon its introduction within the healthy colon "c". Thereafter, two endoscopes (e.g., one rigid sigmoidoscope and one flexible endoscope) are inserted into the rectum and the end-colostomy respectively to obtain clear images of both sides of the future anastomosis. One suitable endoscope or laparoscope is disclosed in U.S. Pat. No. 5,954,637 to Francis, the contents of which are incor-

porated herein by reference. The endoscope is preferably equipped with an inclined angle of view and is positioned to a location where the distal end of the scope is adjacent the window 24 to permit visualization of the interior wall of the colon "c". With simultaneous views obtained of the end colostomy lumen and the stapled end of the rectal stump or Hartmann pouch, a "zone-of-safety" is determined to identify the site of the future anastomosis.

[0036] With reference to FIGS. 7 and 8, needle 30 is introduced through the sigmoidoscope until the beveled edge 34 presses against the stapled tissue area. Using dual imaging provided by the scopes, the surgeon monitors movement of the needle edge 34 on the tissue on the rectal stump side. Once location of the needle 30 is confirmed, the needle 30 is advanced through the tissue to form a puncture hole adjacent the staple line "1" to establish communication between the lumen of the rectal stump "r" and the lumen of the healthy colon "c". The endoscope is then withdrawn from access device 10.

[0037] As best depicted in FIG. 8, guide wire is advanced through cannulated needle 30 and extends through window 24 of access device 10 to enter the lumen of the access device 10. During insertion through the window 24, the guide wire 32 is eventually engaged by the inner wall portion of access device 10 opposed to window 24 and continues to run along the lumen of the access device 10 for exposure outside the body. By virtue of the positioning of window 24, guide wire 32 may be safely inserted through the colon tissue with minimal potential of any undesired penetration into the colon, i.e., the guide wire 32 is confined within the window 24 and lumen of access device 10 during insertion and advancement into the healthy colon. The guide wire 32 is continually advanced through access device until the tip of the guide wire 32 is passed out the colostomy. Access device 10 is then removed. During removal of the access device 10, the guide wire 32 traverses the slot 26 in the access device to be in general alignment with the longitudinal bore 16. This facilitates removal of the access device along the guide wire 32.

[0038] Referring to FIG. 9, an anvil 108 of the type aforescribed in connection with FIG. 3 is connected to the exposed end of the guide wire. The anvil 108 may be connected to the guide wire 32 with sutures "v", e.g., passed through an opening in the anvil rod. Other means for connecting the anvil 108 to the guide wire 32 are also envisioned. Thereafter, the guide wire 32 is withdrawn from the rectal stump "r" thus pulling the anvil 108 through the proximal colon section for positioning the anvil adjacent the future colostomy site as depicted in FIG. 9. It is appreciated that the anvil rod of the anvil 108 must be introduced through the puncture openings in the healthy colon and rectal stump. This may be facilitated with the use of forceps introduced through a strategically positioned trocar or through the rectal opening. Additionally, the suture "v" attached to anvil 108 may be grasped and manipulated to orient the anvil at the desired location. The rigid sigmoidoscope is removed. A circular stapler instrument of the type described in connection with FIG. 3 is then introduced through the rectal opening. The anvil 108 is thereafter connected to the circular stapler instrument 100. Once together, the tissue is approximated and the stapler is fired. Firing of the stapler attaches the rectal stump "r" with the healthy colon "c" and redefines the path through the intestinal tract and out the rectum. As appreciated, a circular knife blade within the circular stapler instrument cuts a circular opening through the respective tissue upon firing.

Alternatively, the stapler may be devoid of a circular knife blade whereby the coring step is performed manually with a scalpel. **FIG. 9** illustrates the reestablished continuity of the intestines. The connection is inspected for completion and an endoscope is inserted transanally to inspect the integrity of the anastomosis. Finally, the end colostomy is removed or taken down and the stoma opening is closed.

[0039] It will be understood that various modifications may be made to the embodiments disclosed herein. Therefore, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments. For example, it is envisioned that the procedure has application in other reversing other colostomy procedures such as a double barrel colostomy (involving the formation of two separate stomas in the abdominal wall) and/or loop colostomy (involving bringing a loop of a colon section out the opening in the colon wall and making an incision in the colon to allow drainage of feces). It is also contemplated that the access device can be inserted in the second or distal intestinal section through the rectal opening and the procedure reversed. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

What is claimed is:

1. An access device for positioning within a body lumen, which comprises:

an access member including an outer wall defining an internal lumen, the access member having a longitudinal axis and proximal and distal ends, the outer wall defining a window adjacent the distal end in communication with the internal lumen for permitting surgical instrumentation to enter therethrough, the access member having a cross-sectional dimension transverse to the longitudinal axis and a rigidity sufficient to stabilize the body lumen upon positioning therein to maintain patency of the body lumen.

2. The access device according to claim 1 wherein the outer wall defines a slot in communication with the window and extending to the distal end of the access member.

3. The access device according to claim 1, including a housing mounted to the access member for facilitating manipulation about an operative site.

4. A surgical procedure for reversing a colostomy procedure of the type where, an intestinal section is resected leaving a first intestinal section which is attached adjacent an opening in the abdominal wall and a second intestinal section which extends to a rectal opening, comprising the steps of:

accessing a first intestinal section through the opening in the abdominal wall;

introducing a guide within the rectal opening and advancing the guide through the second intestinal section and out the opening in the abdominal wall;

withdrawing the guide through the rectal opening to advance the anvil within the first intestinal section;

introducing an anastomosis instrument within the rectal opening and into the second intestinal section and connecting the anvil to the anastomosis instrument; and

firing the anastomosis instrument to connect the first and second intestinal sections to re-establish continuity between the first and second intestinal sections.

5. A surgical procedure for reversing a colostomy procedure of the type where a intestinal section is resected leaving a first intestinal section which is attached adjacent an opening in the abdominal wall and a second intestinal section which extends to a rectal opening, comprising the steps of:

positioning an access device within the opening in the abdominal wall and advancing the access device within the first intestinal section;

manipulating the second intestinal section to a position in proximity to the first intestinal section;

introducing a guide within the rectal opening and advancing the guide through the second intestinal section;

passing the guide through the second intestinal section and into the first intestinal section;

advancing the guide through a lumen of the access device and out the opening in the abdominal wall;

removing the access device; connecting an anvil to the guide;

withdrawing the guide through the rectal opening to advance the anvil within the first intestinal section;

introducing an anastomosis instrument within the rectal opening and into the second intestinal section;

connecting the anvil to the anastomosis instrument; and

firing the anastomosis instrument to connect the first and second intestinal sections to re-establish continuity between the first and second intestinal sections.

6. The surgical procedure according to claim 5 wherein the access device includes an outer wall and a window defined in the outer wall in communication with the lumen of the access device and wherein the step of advancing the guide includes initially introducing the guide into the window of the access device.

7. The surgical procedure according to claim 5, including the step of introducing a cannulated needle within the rectal opening to access the first intestinal section.

8. The surgical procedure according to claim 7 wherein the step of introducing a guide includes advancing the guide through the cannulated needle and into the first intestinal section.

9. The surgical procedure according to claim 8 wherein the step of introducing a cannulated needle is performed under laparoscopic visualization.

10. The surgical procedure according to claim 5 wherein the anastomosis instrument is a circular anastomosis instrument and wherein during the step of firing the anastomosis instrument, a circular array of stapler is driven through tissue margins of the first and second intestinal section.

11. The surgical procedure according to claim 10 wherein the anastomosis instrument includes a circular knife and wherein during the step of firing the circular knife pierces tissue of the first and second intestinal portions to define an annular opening therethrough.

专利名称(译)	腔内结肠造口系统和程序		
公开(公告)号	US20040225277A1	公开(公告)日	2004-11-11
申请号	US10/798246	申请日	2004-03-10
[标]申请(专利权)人(译)	JACOB BRIAN P		
申请(专利权)人(译)	JACOB BRIAN P.		
当前申请(专利权)人(译)	JACOB BRIAN P.		
[标]发明人	JACOB BRIAN P		
发明人	JACOB, BRIAN P.		
IPC分类号	A61B17/11 A61B17/34		
CPC分类号	A61B17/1114 A61B17/3417 A61B17/3421 A61B2017/1135		
优先权	60/453580 2003-03-11 US		
其他公开文献	US8192355		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种用于定位在诸如肠的体腔内的套管针。套管针具有邻近其远端的窗口，与套管针的内腔连通。套管针足够刚性以在定位在其中时稳定体腔以维持体腔的开放性。与窗口连通的槽延伸到套管针的远端。还公开了用于逆转结肠造口术的外科手术。上述套管针通过腹壁上的开口插入第一肠段。导丝通过直肠开口引入并穿过直肠残端并从腹壁开口伸出。砧座连接到导丝，并且导丝通过直肠开口抽出，以使砧座在第一肠段内前进。通过直肠开口引入吻合器械并连接到吻合器械。发射吻合器以连接两个肠段以重建它们之间的连续性。

