



US 20070129662A1

(19) **United States**(12) **Patent Application Publication**  
**Maginot**(10) **Pub. No.: US 2007/0129662 A1**(43) **Pub. Date: Jun. 7, 2007**(54) **BYPASS GRAFTING SYSTEM AND APPARATUS**(76) Inventor: **Thomas J. Maginot**, Crown Point, IN (US)

Correspondence Address:

**FENWICK & WEST LLP**  
**SILICON VALLEY CENTER**  
**801 CALIFORNIA STREET**  
**MOUNTAIN VIEW, CA 94041 (US)**


application No. 08/391,960, filed on Feb. 21, 1995, now Pat. No. 5,571,167, which is a continuation of application No. 08/138,912, filed on Oct. 18, 1993, now Pat. No. 5,456,712, which is a division of application No. 08/056,371, filed on May 3, 1993, now Pat. No. 5,304,220, which is a continuation-in-part of application No. 07/725,597, filed on Jul. 3, 1991, now Pat. No. 5,211,683.


**Publication Classification**(21) Appl. No.: **11/673,053**(51) **Int. Cl.**  
**A61F 2/06** (2006.01)(22) Filed: **Feb. 9, 2007**(52) **U.S. Cl.** ..... **604/8; 623/1.36; 623/1.23****Related U.S. Application Data**

(60) Continuation of application No. 10/731,068, filed on Dec. 8, 2003, which is a continuation of application No. 09/903,831, filed on Jul. 11, 2001, which is a continuation of application No. 09/111,062, filed on Jul. 7, 1998, now abandoned, which is a continuation of application No. 09/090,598, filed on Jun. 4, 1998, now Pat. No. 5,934,286, which is a continuation of application No. 09/073,336, filed on May 5, 1998, now Pat. No. 5,979,455, which is a continuation of application No. 08/702,742, filed on Aug. 23, 1996, now Pat. No. 5,749,375, which is a continuation of

(57) **ABSTRACT**

Minimally invasive techniques utilized in bypass grafting are disclosed. For instance, a method of implanting an end portion of a graft in the body of a patient during a bypass grafting procedure includes the steps of (i) advancing a medical instrument within a circulatory system of said body, (ii) guiding a distal end of said medical instrument out of said circulatory system through an opening defined in said circulatory system after said medical instrument advancing step, (iii) advancing said end portion of said graft within said medical instrument after said guiding step, and (iv) securing said end portion of said graft to a blood vessel of said circulatory system after said end portion advancing step.

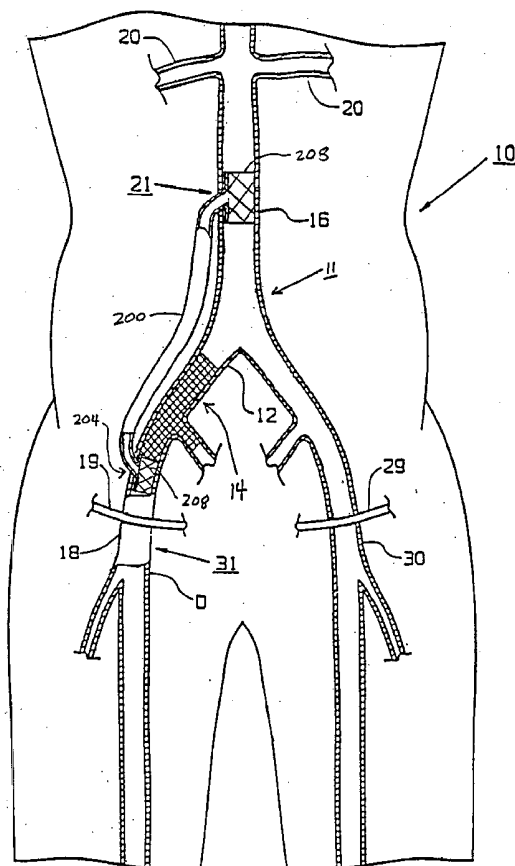

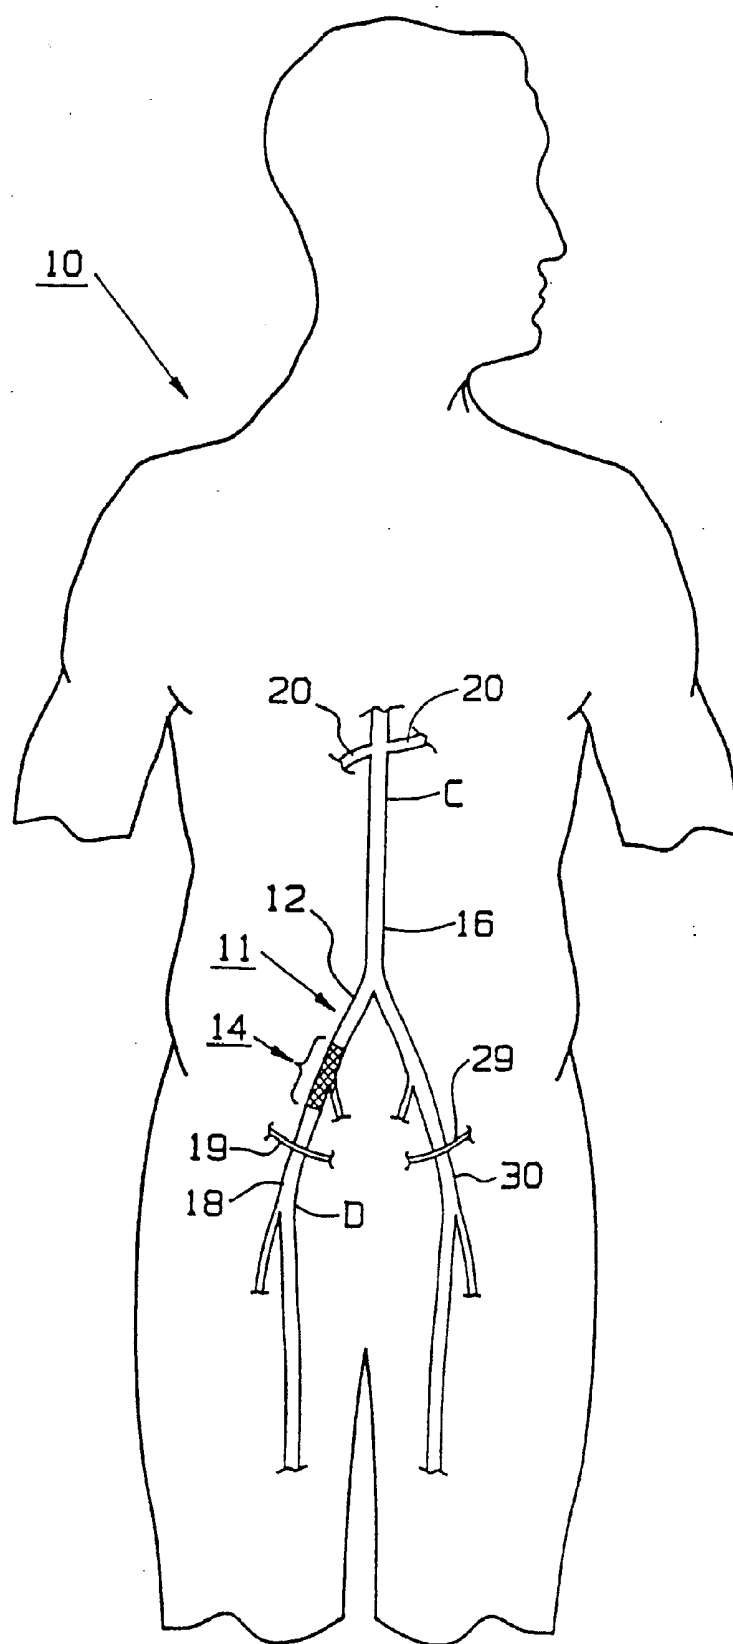

II. 1

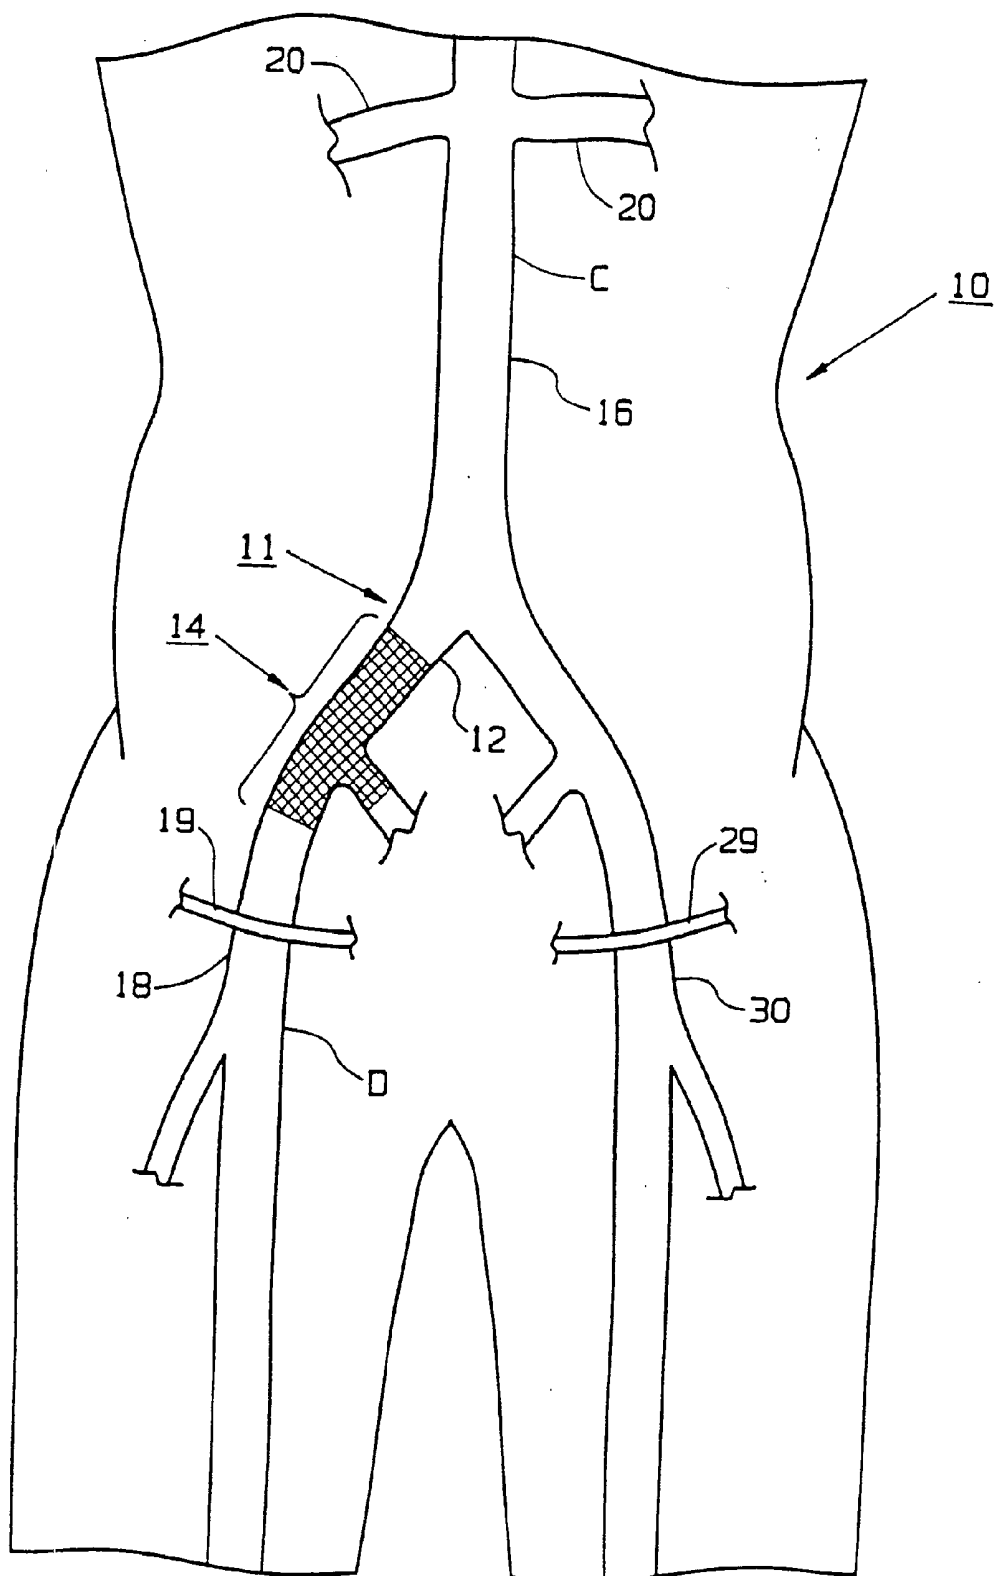


FIG. 2

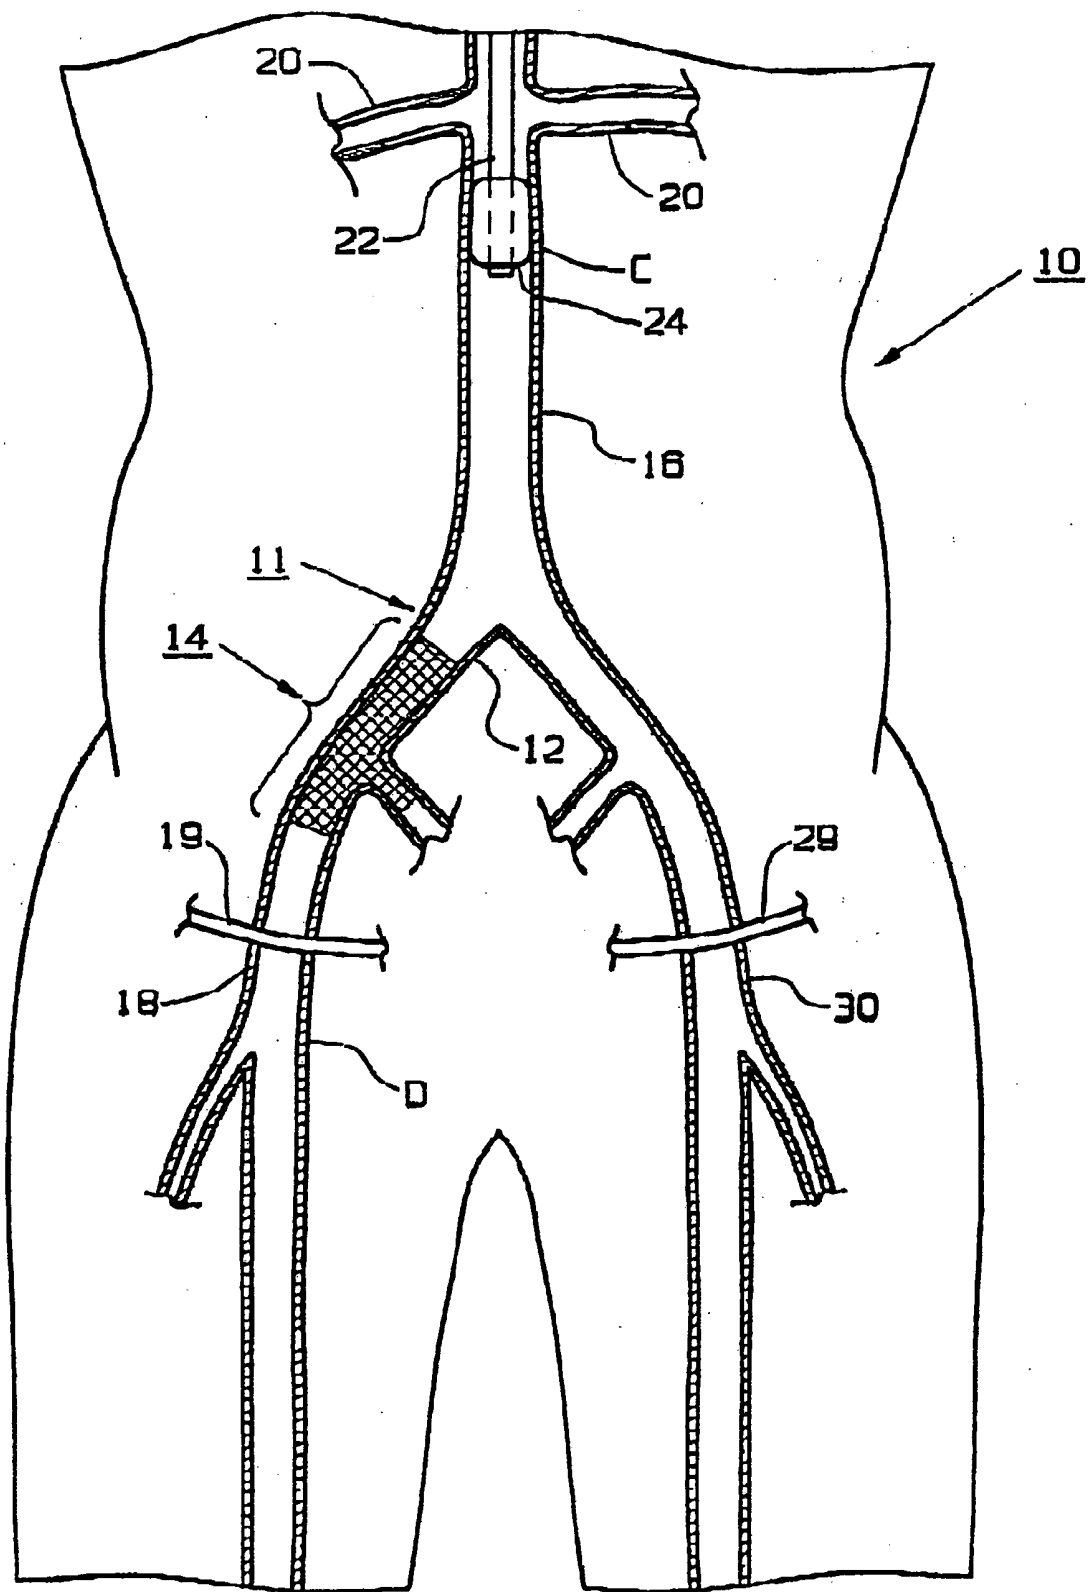


FIG. 3

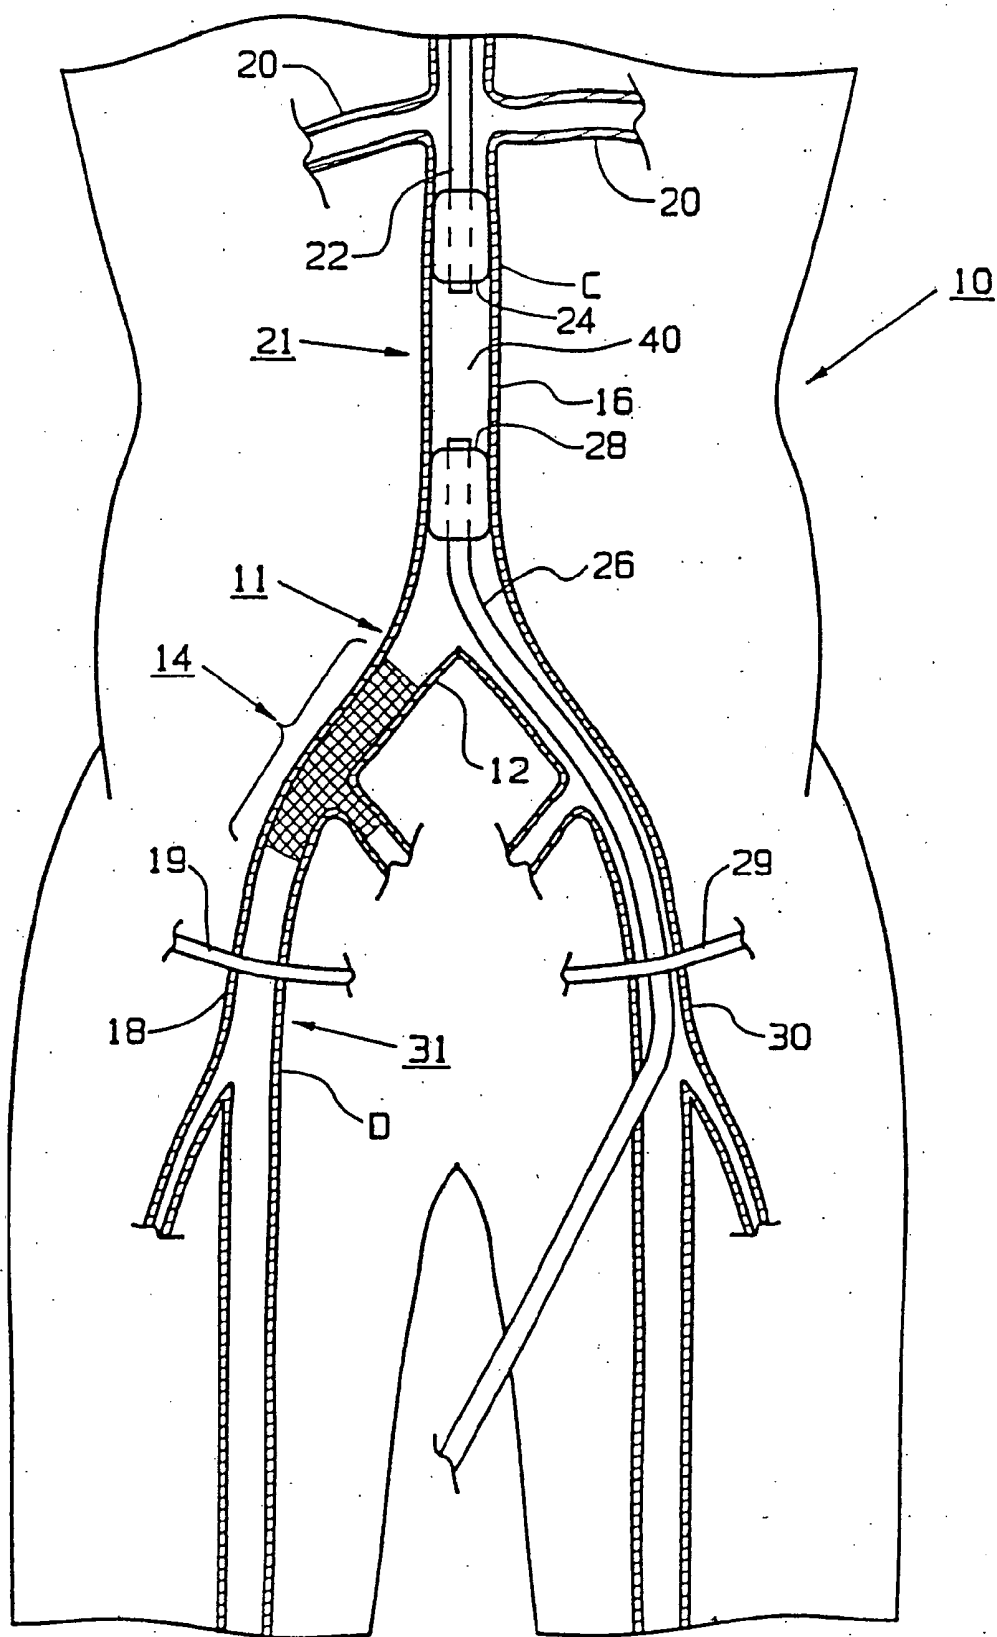


FIG. 4

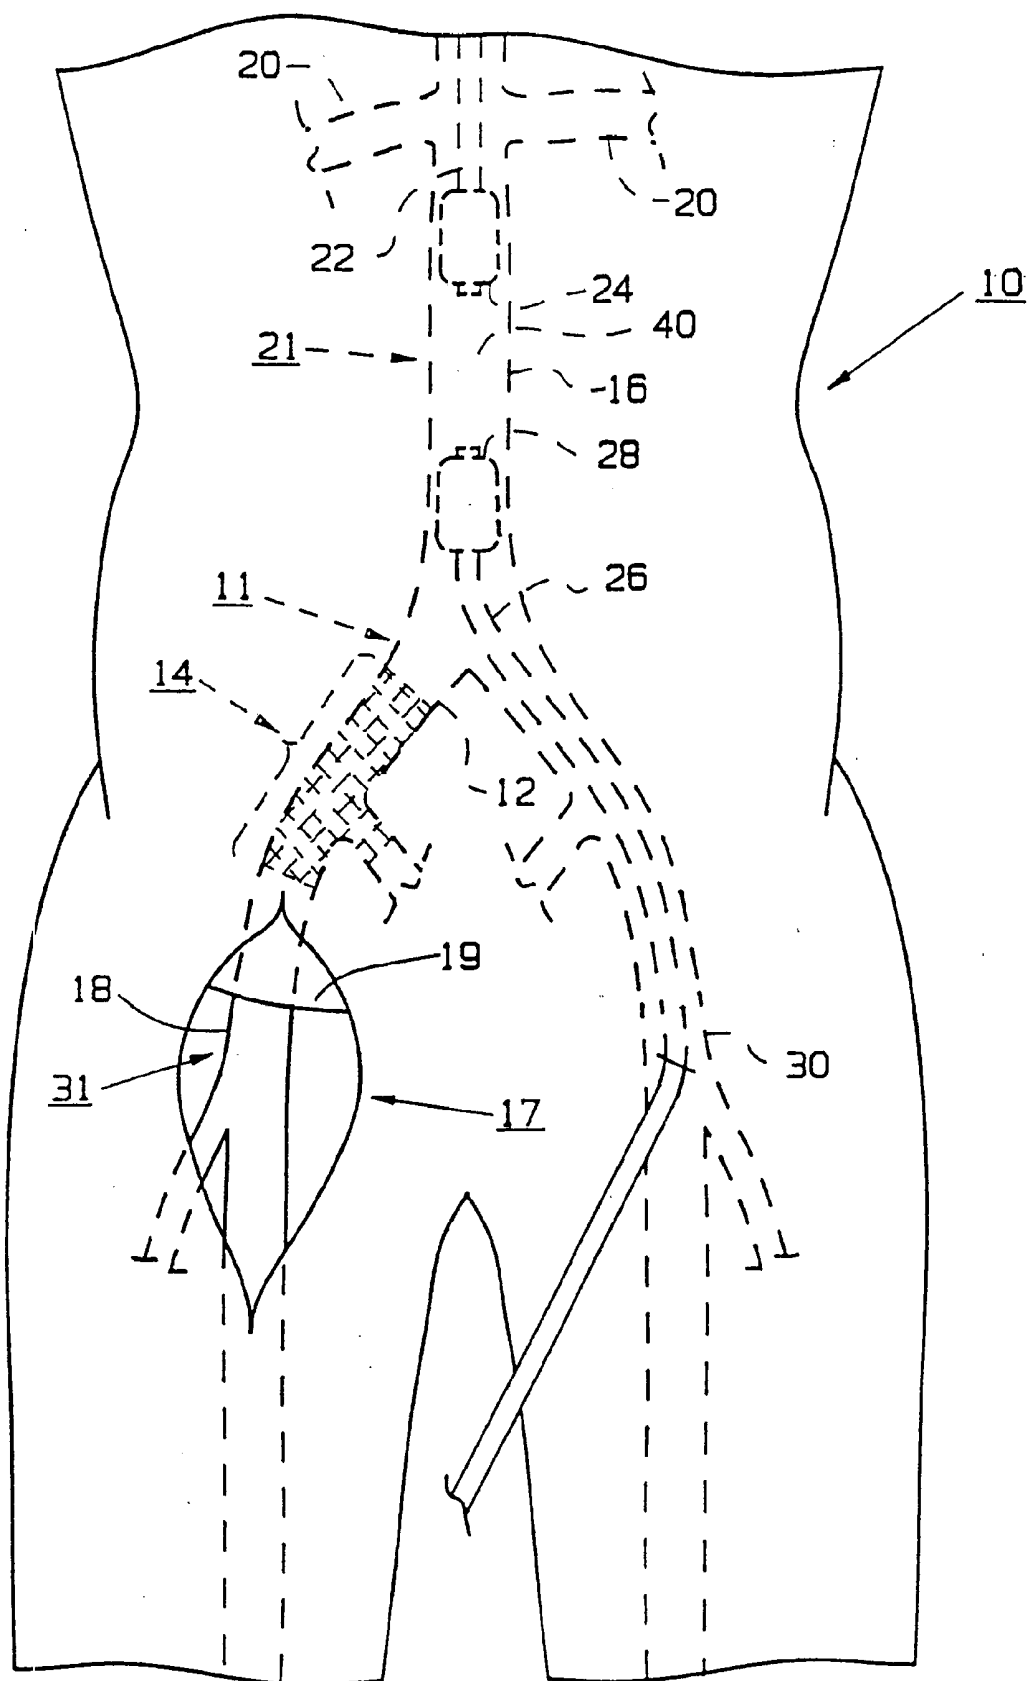


FIG. 5

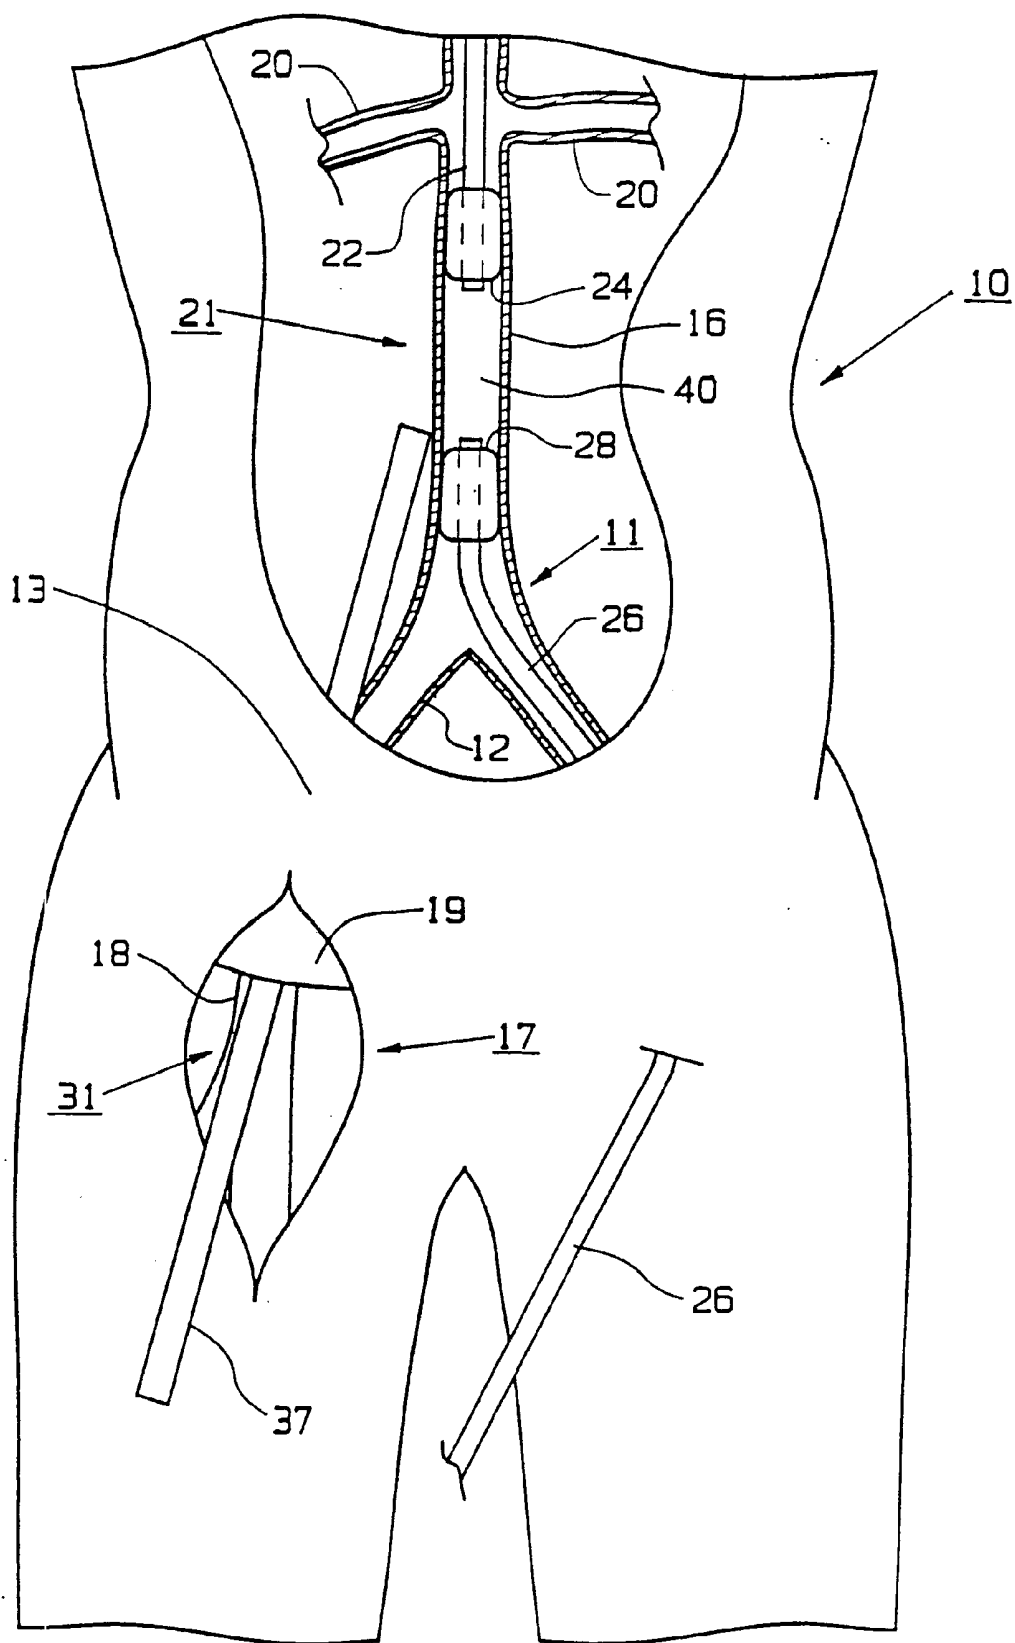


FIG. 6

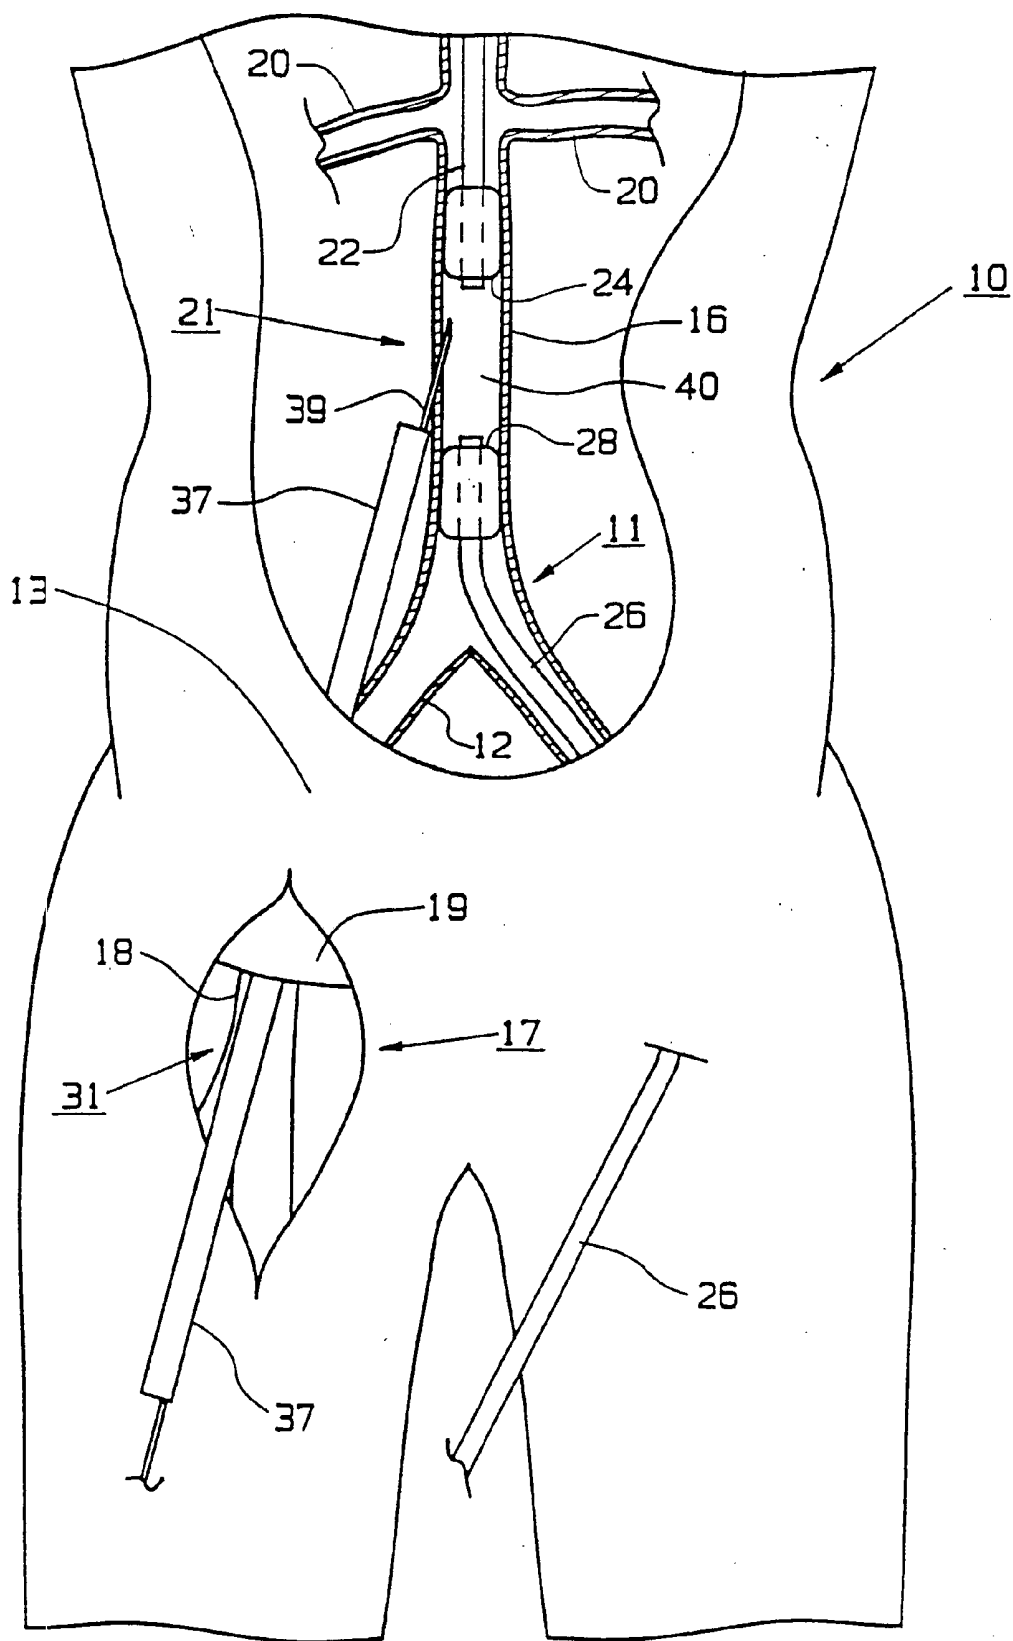


FIG. 7



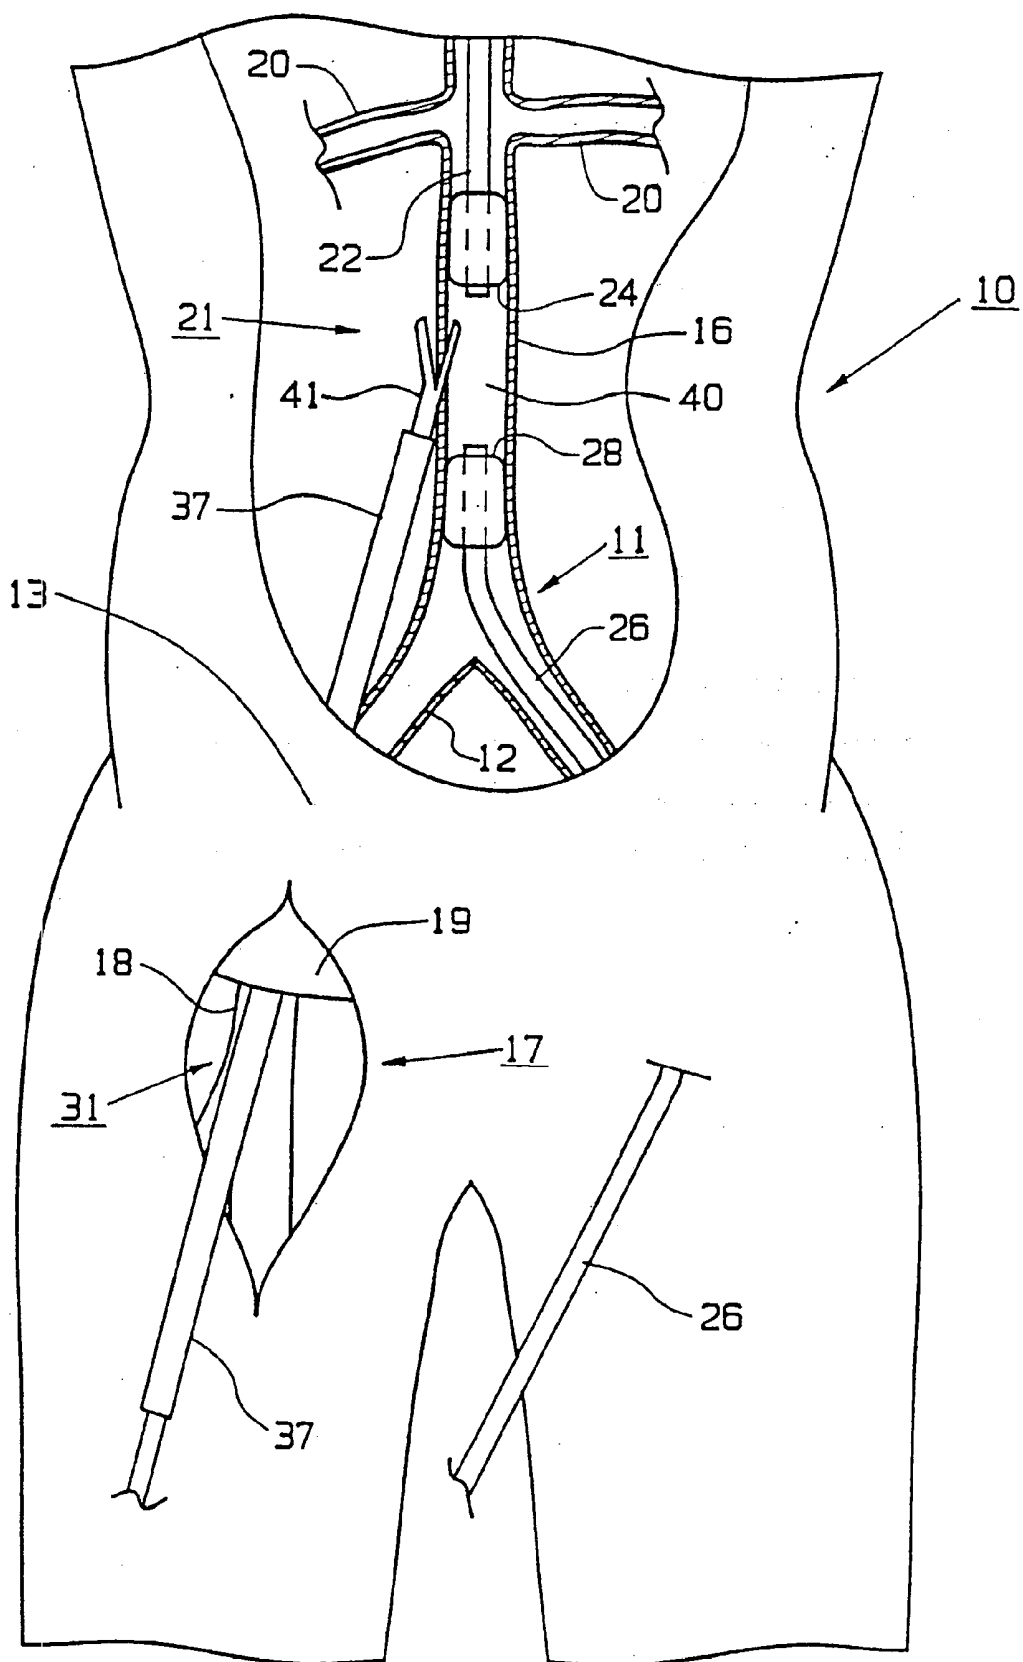
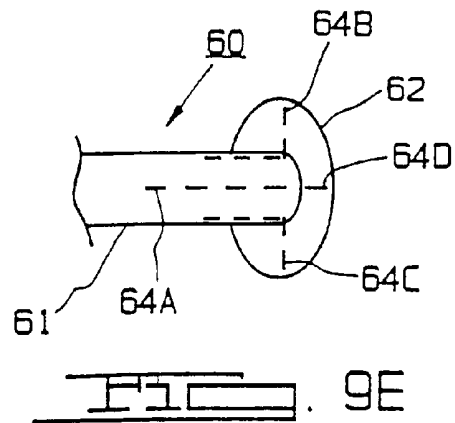
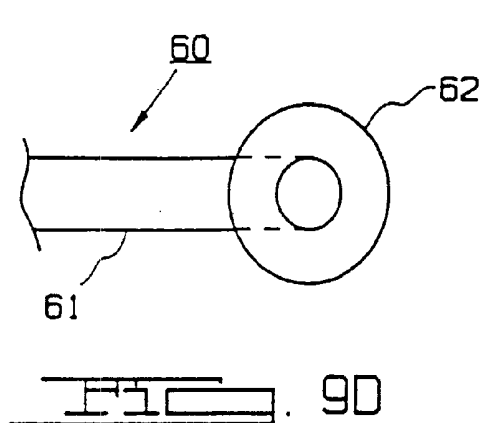
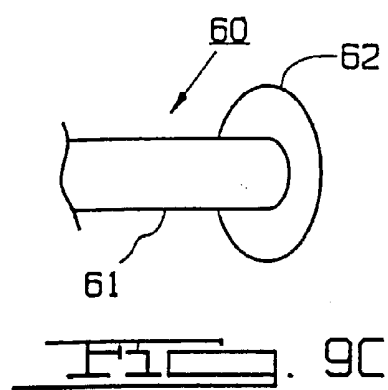
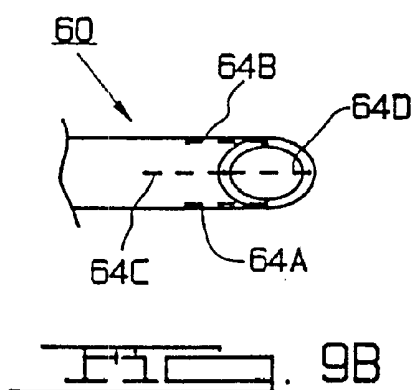
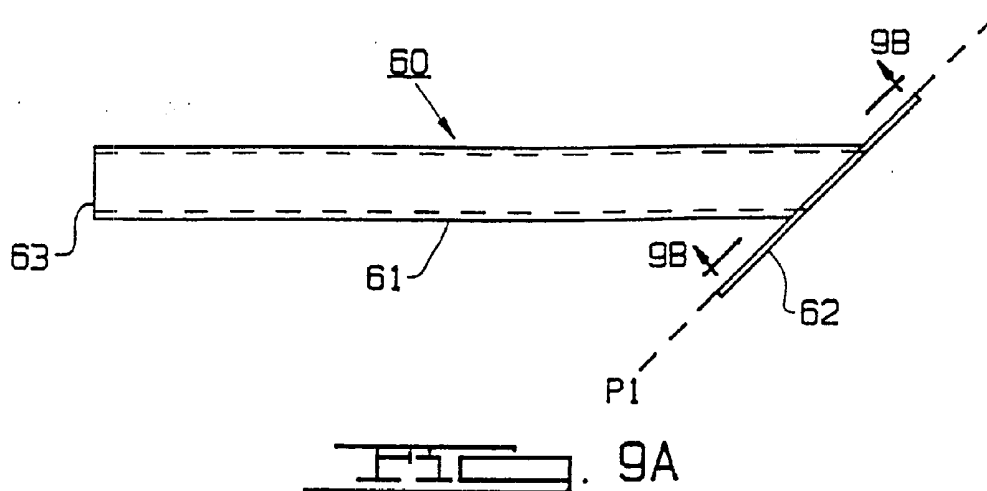


FIG. 8






FIG. 9F




FIG. 9G




FIG. 9H

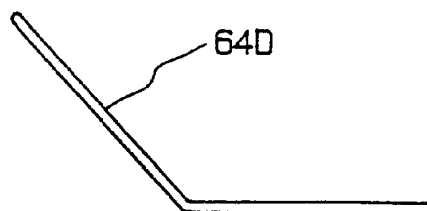


FIG. 9I

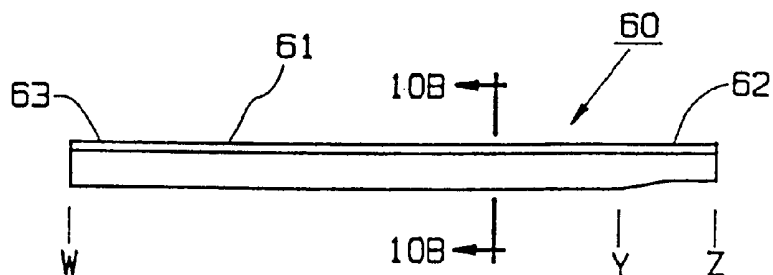


FIG. 10A




FIG. 10B


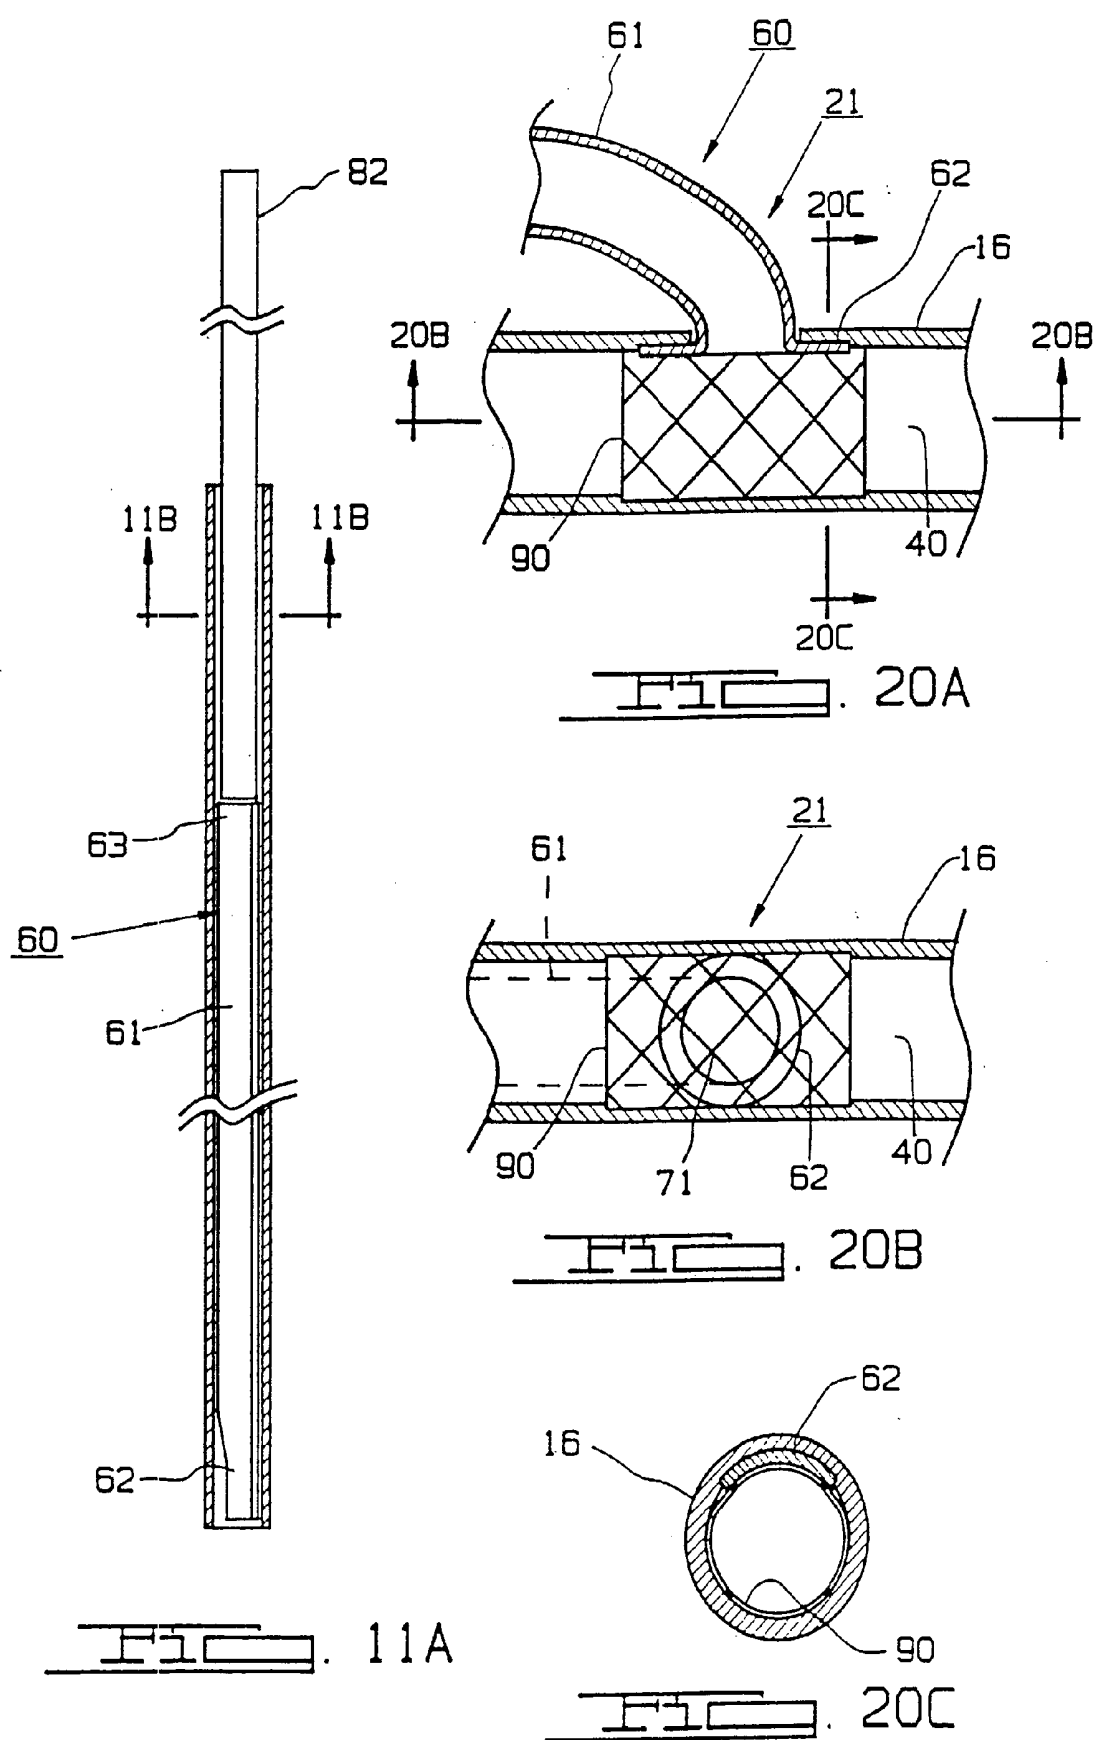


FIG. 11B



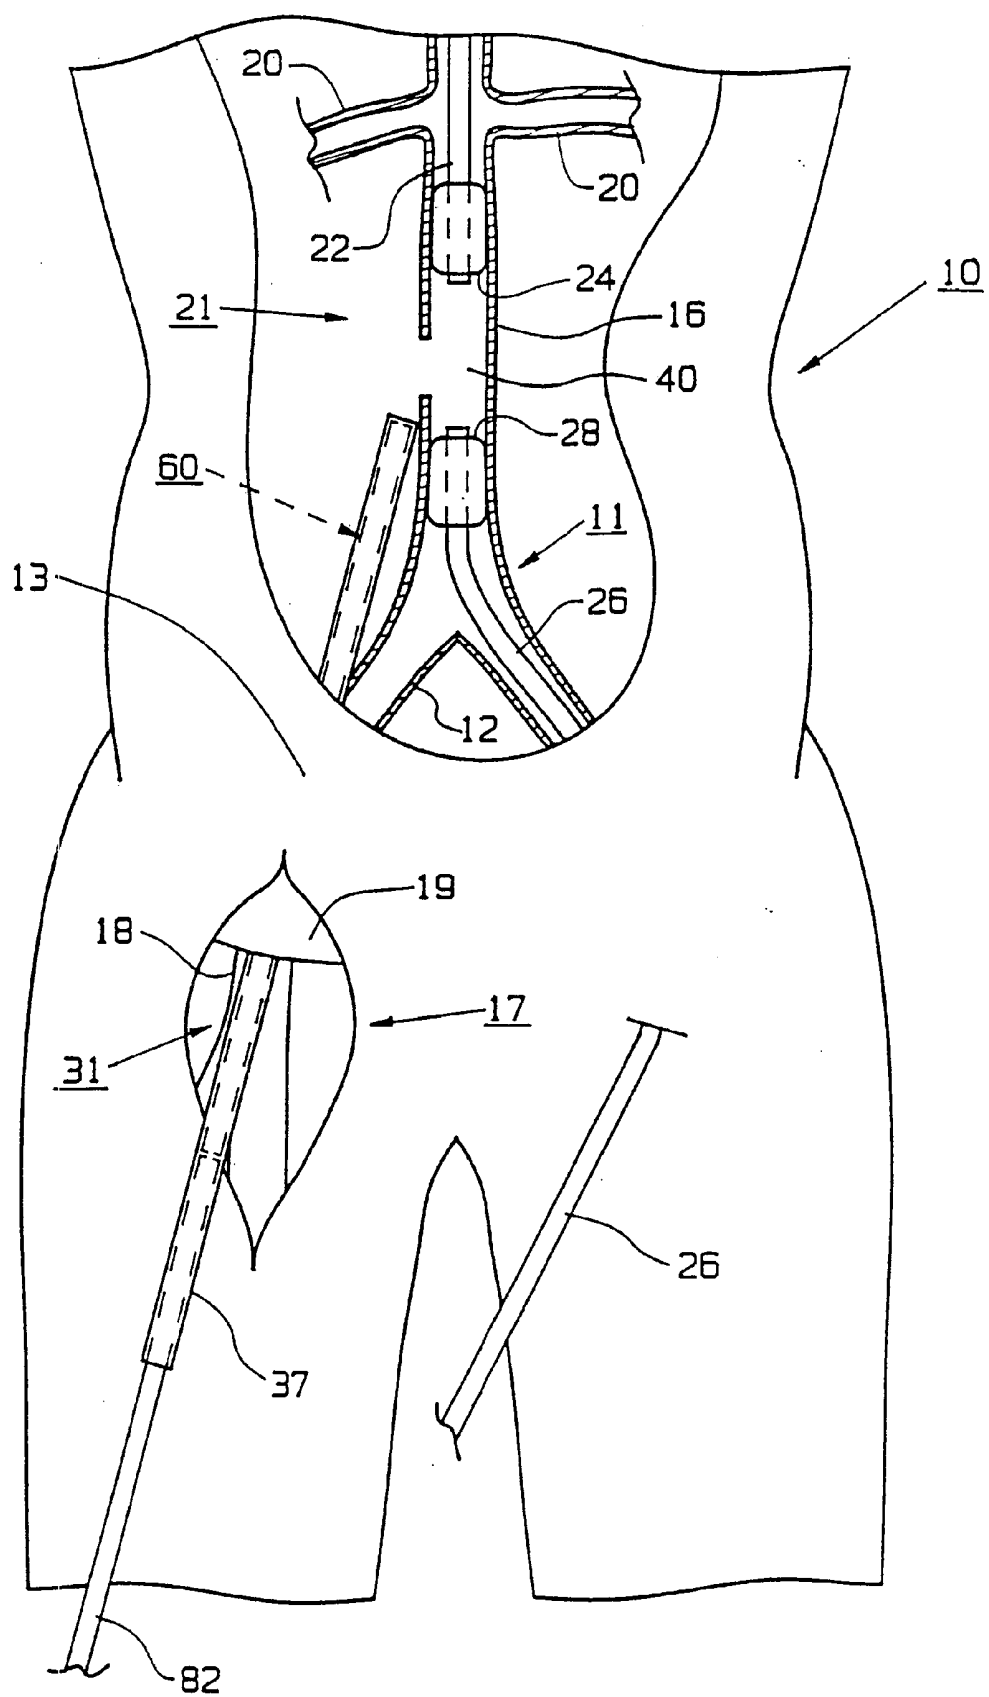


FIG. 12

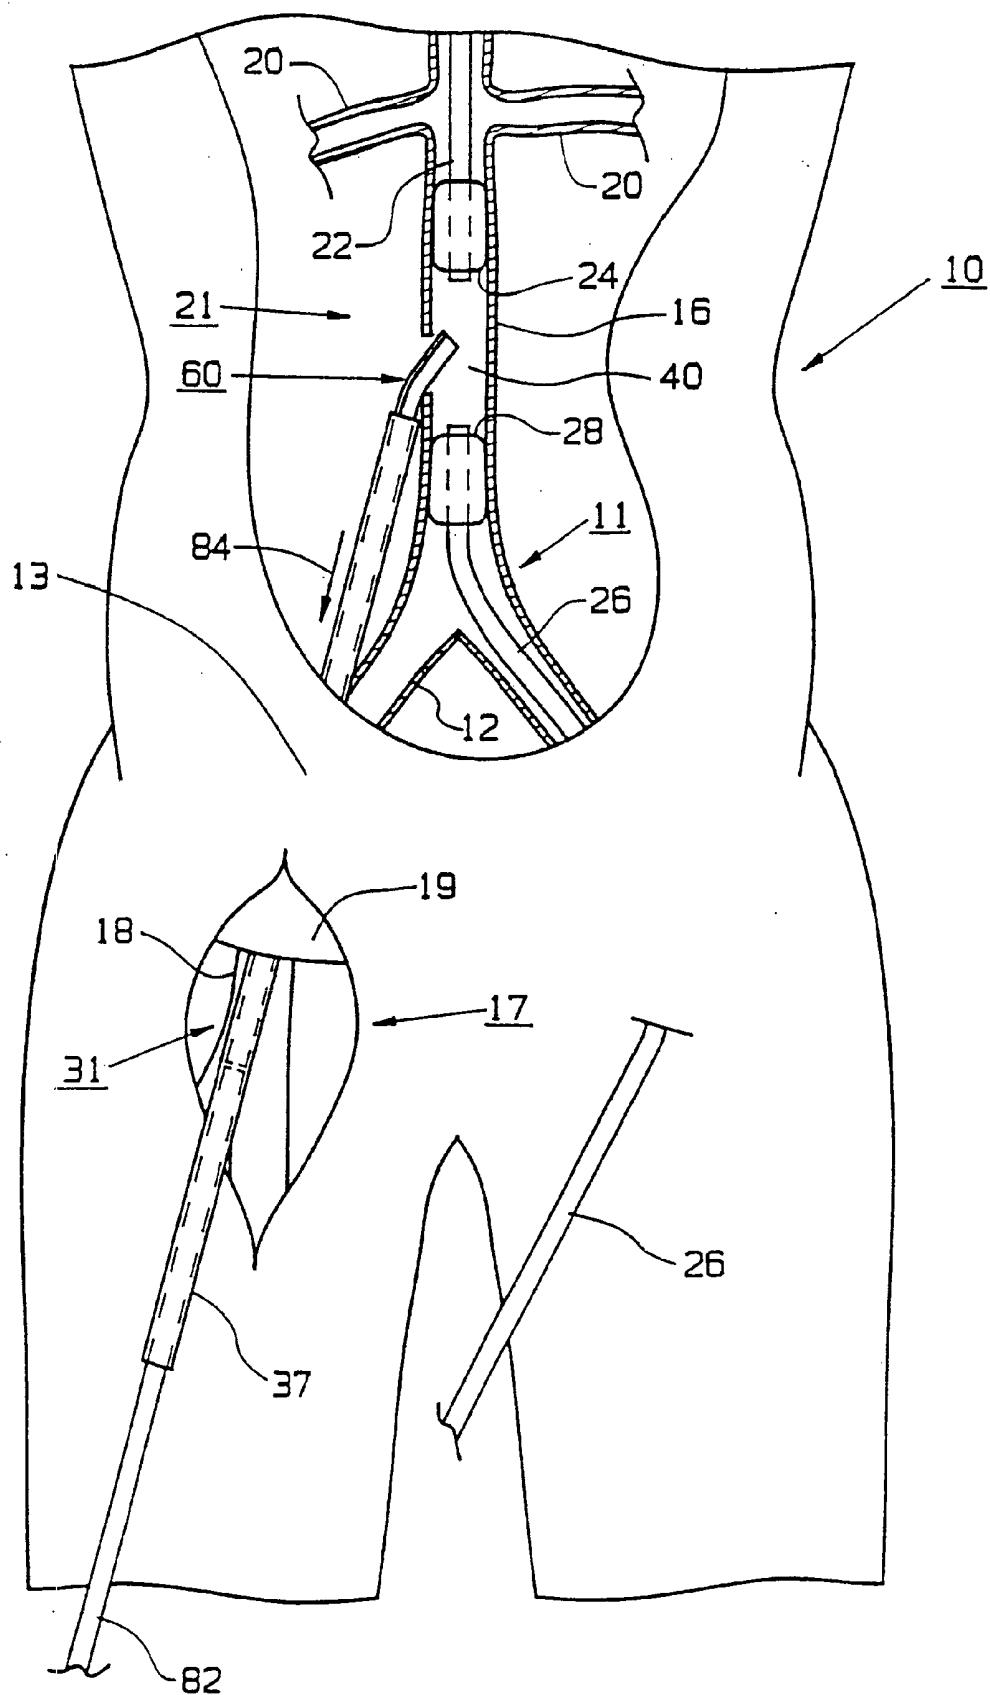


FIG. 13

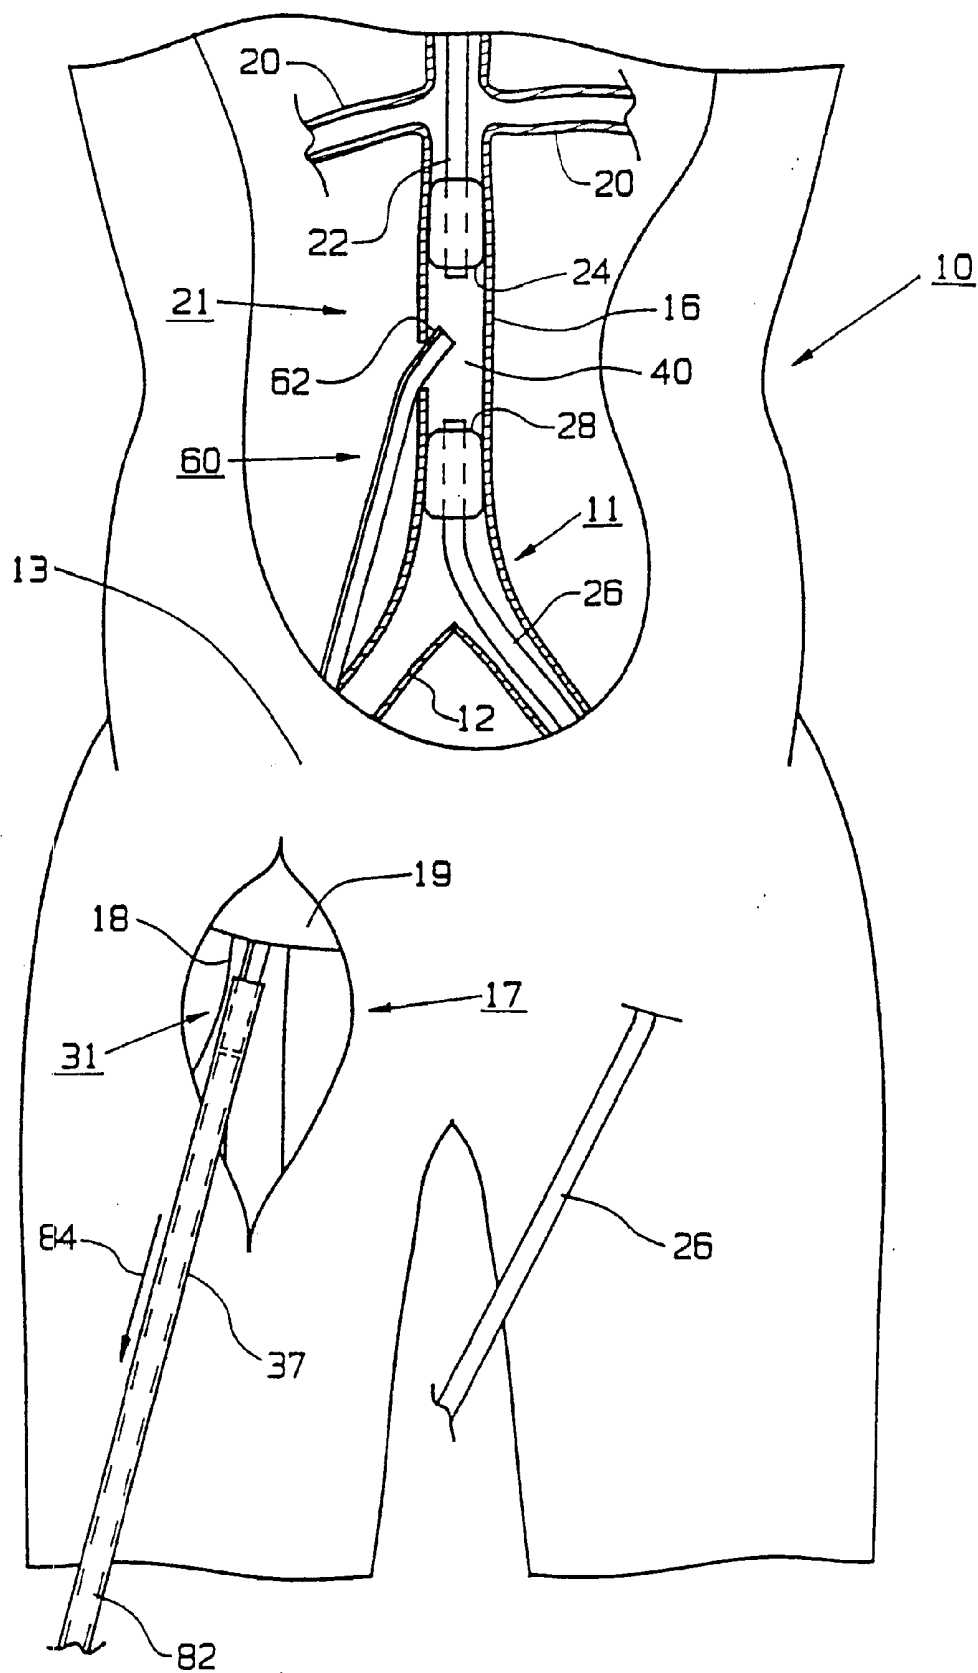


FIG. 14

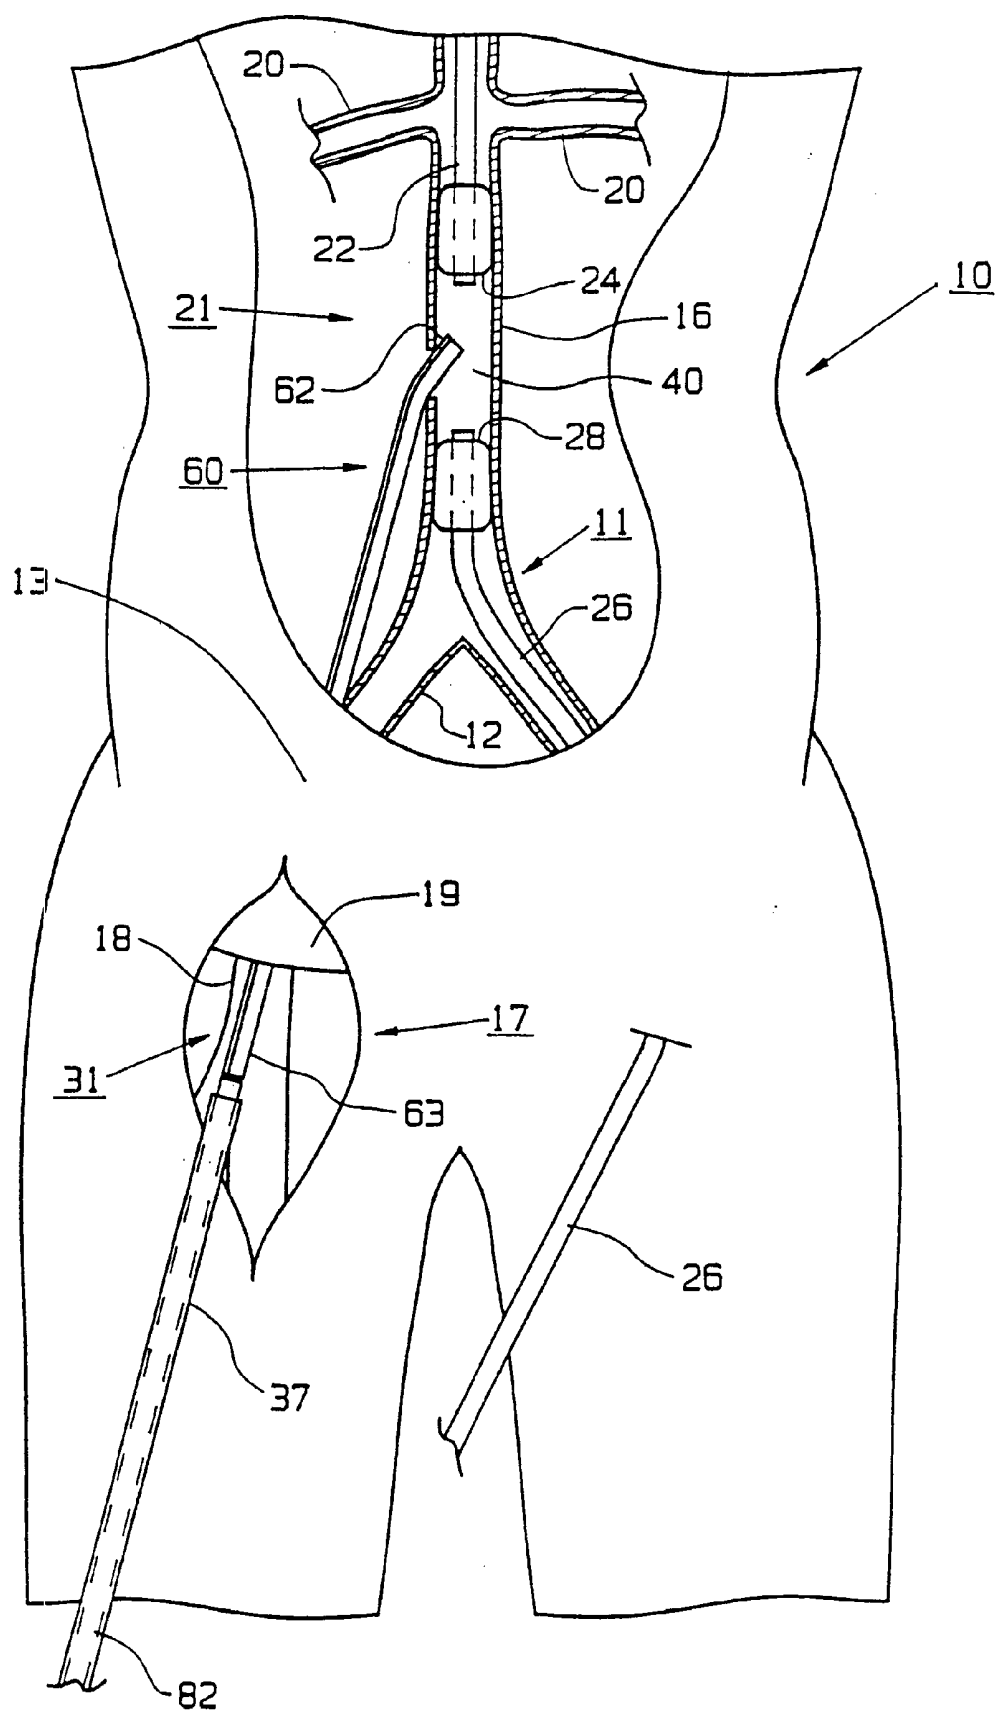


FIG. 15





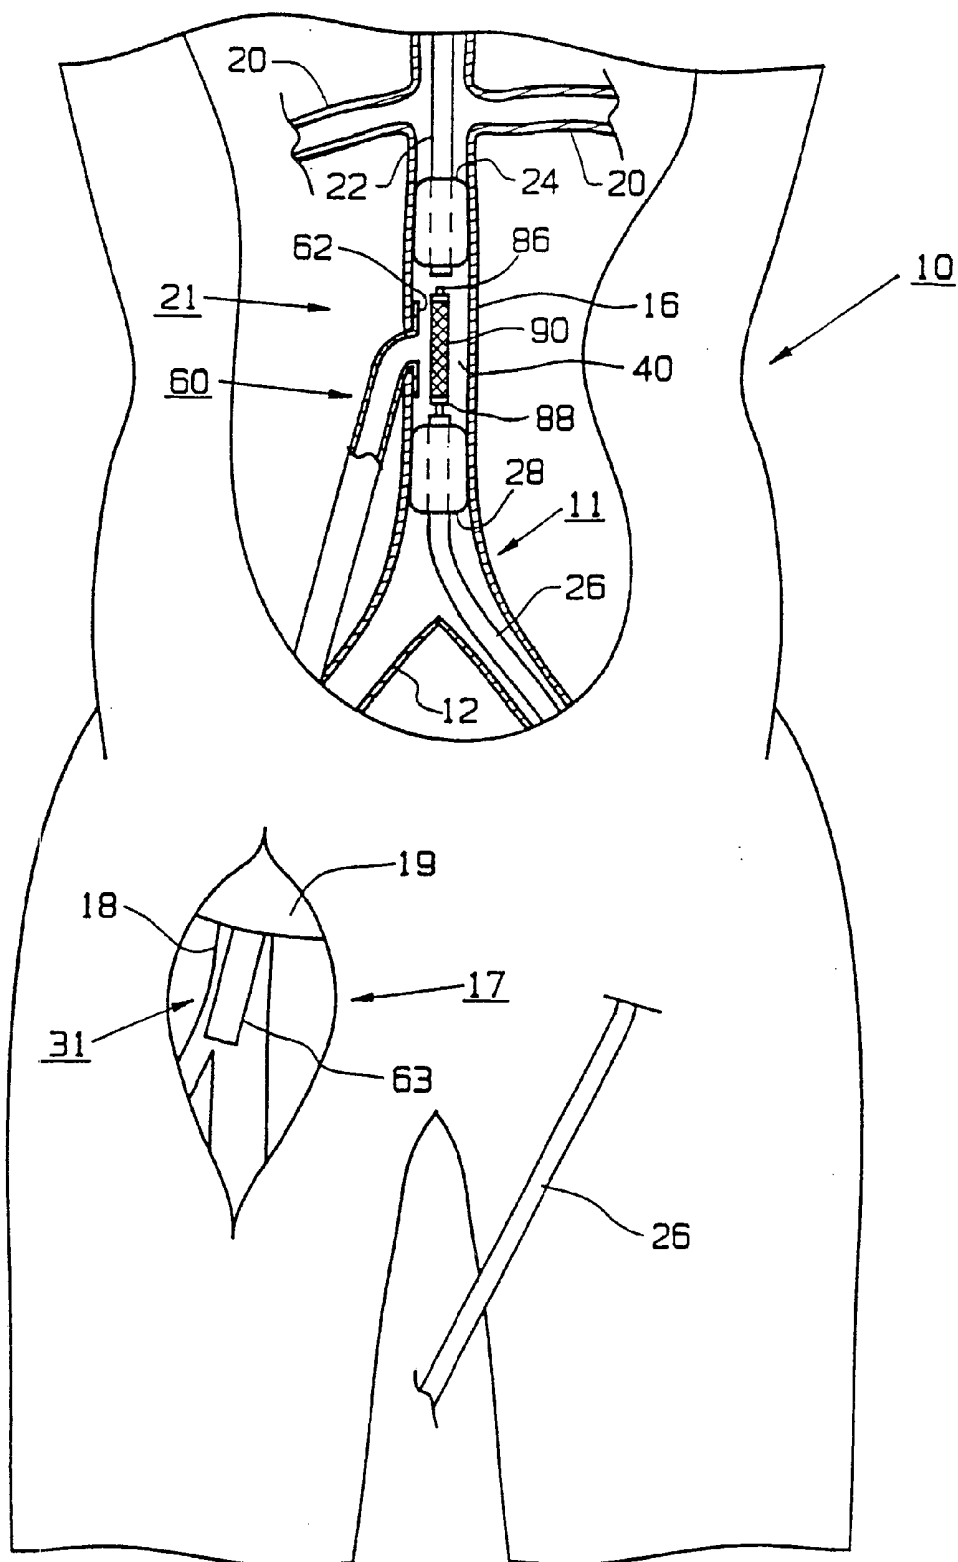


FIG. 17





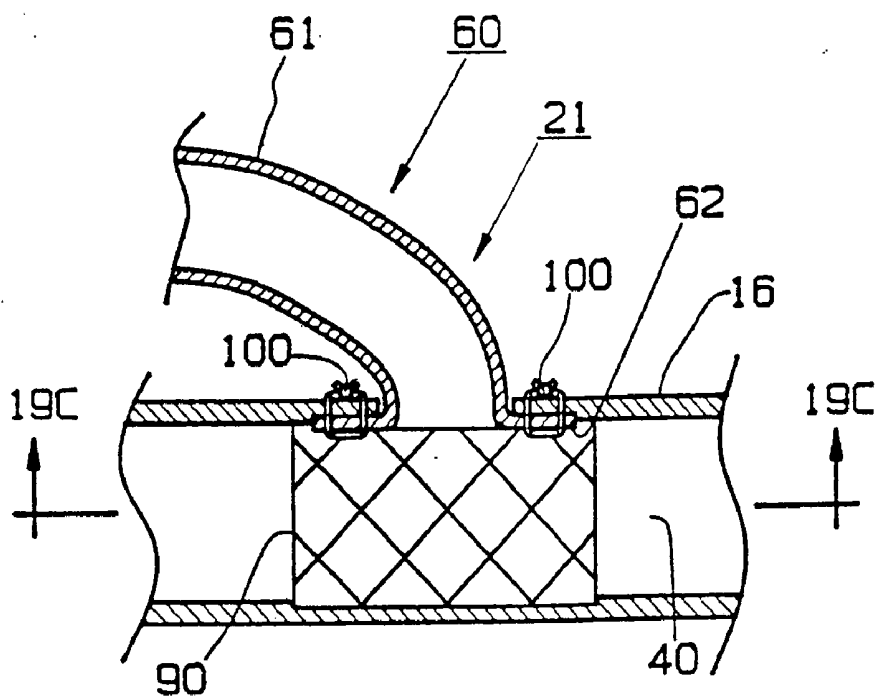


FIG. 19B

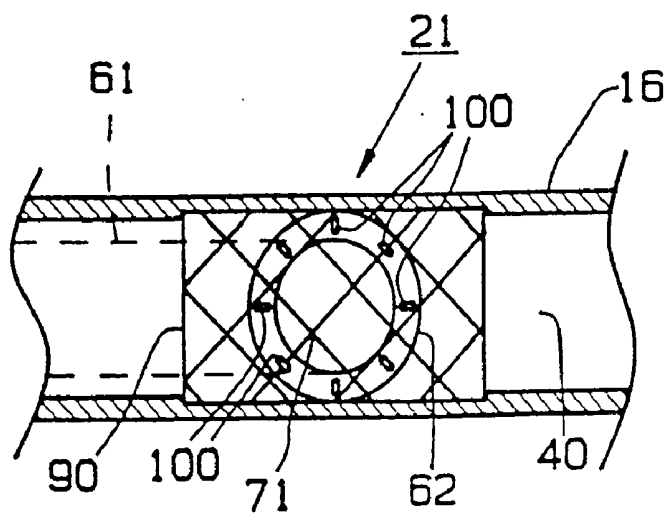


FIG. 19C

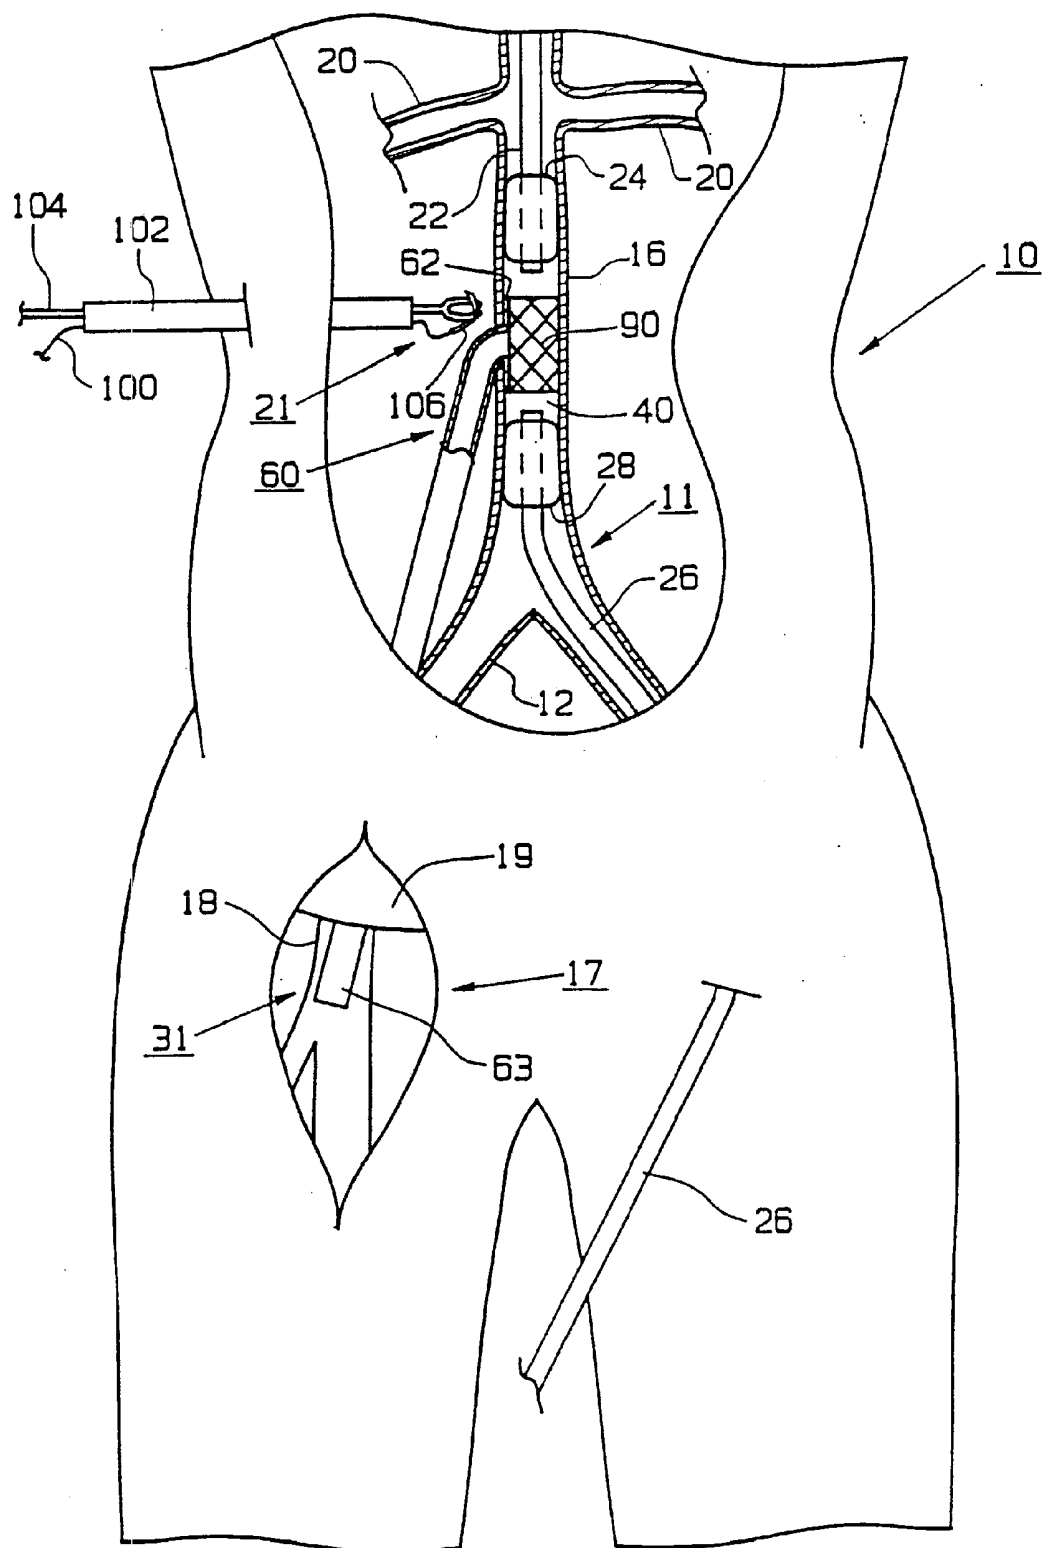


FIG. 190

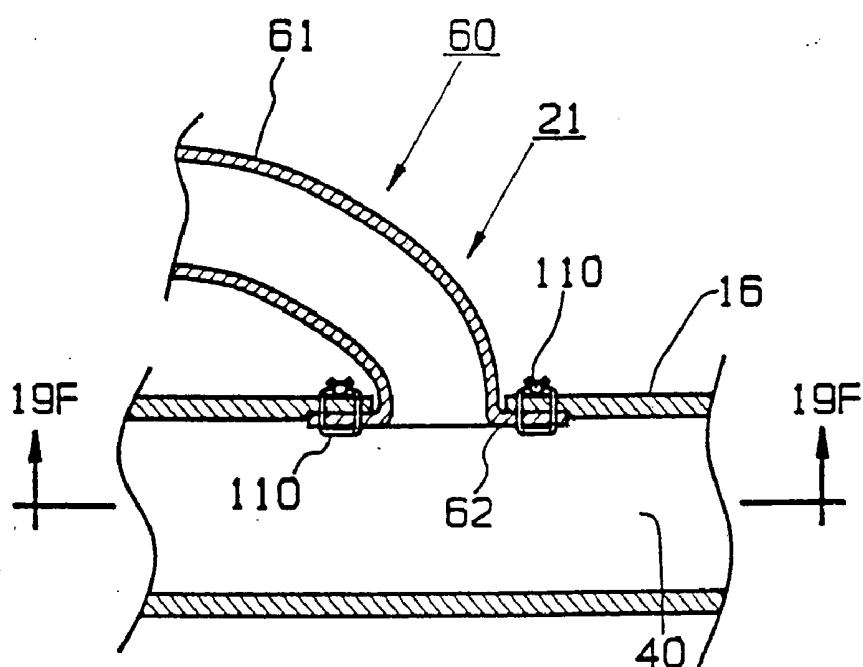


FIG. 19E

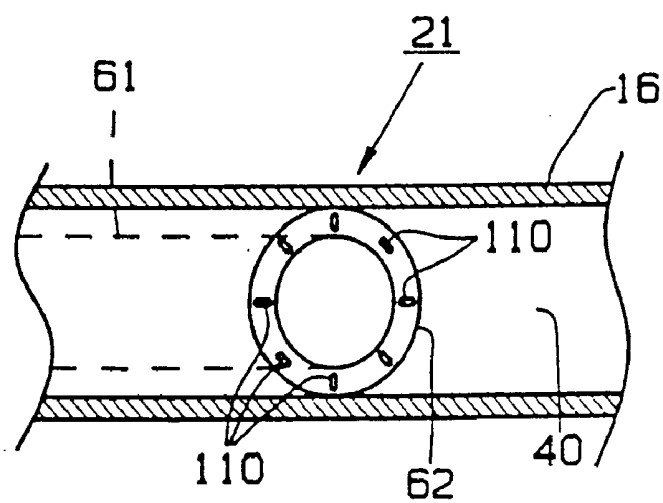


FIG. 19F

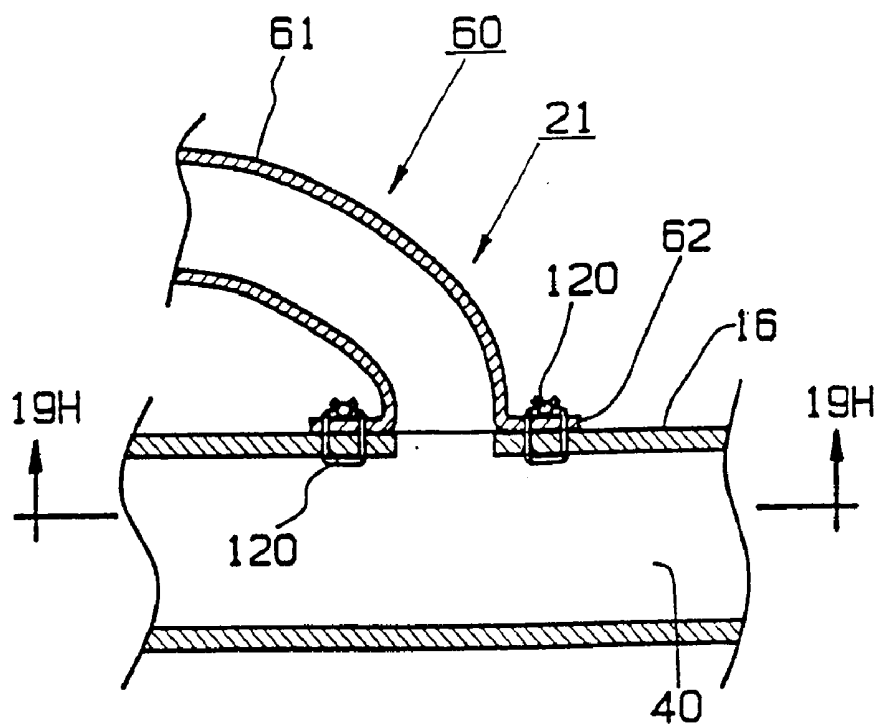


FIG. 19G

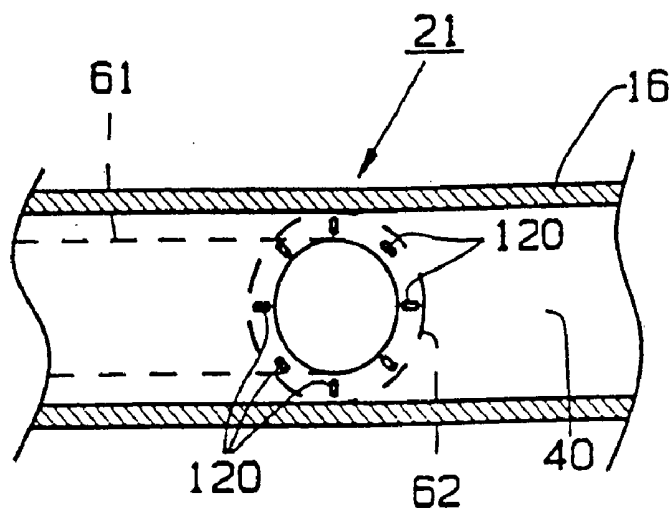
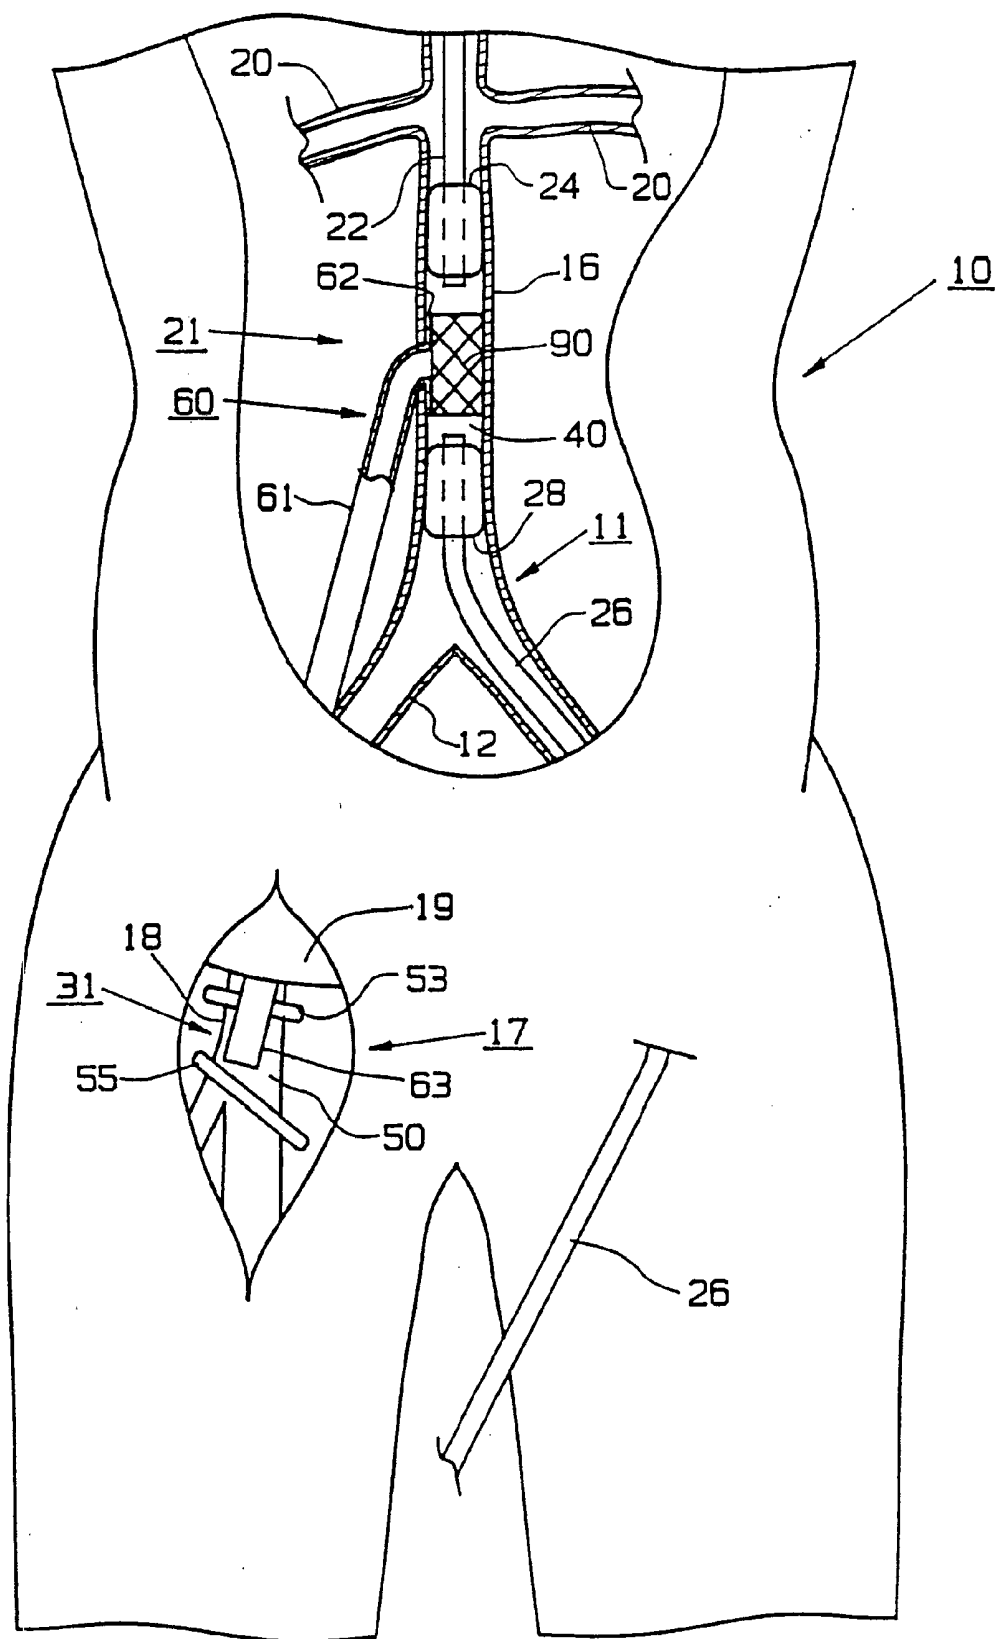


FIG. 19H





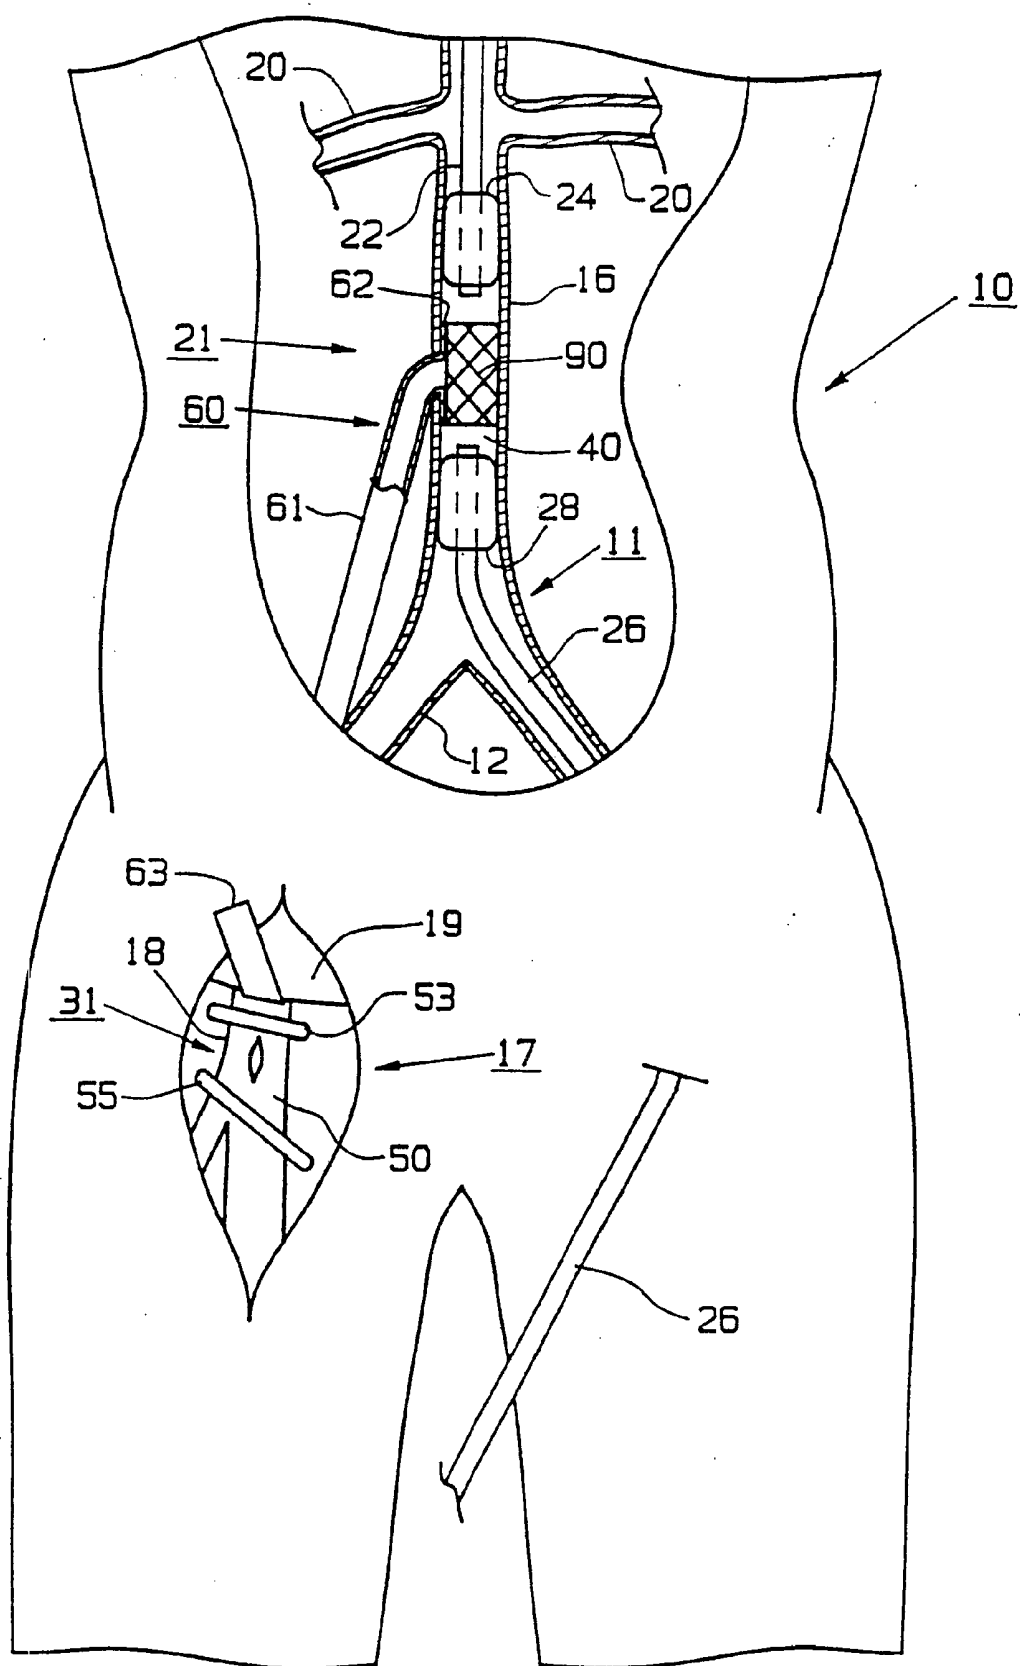


FIG. 22

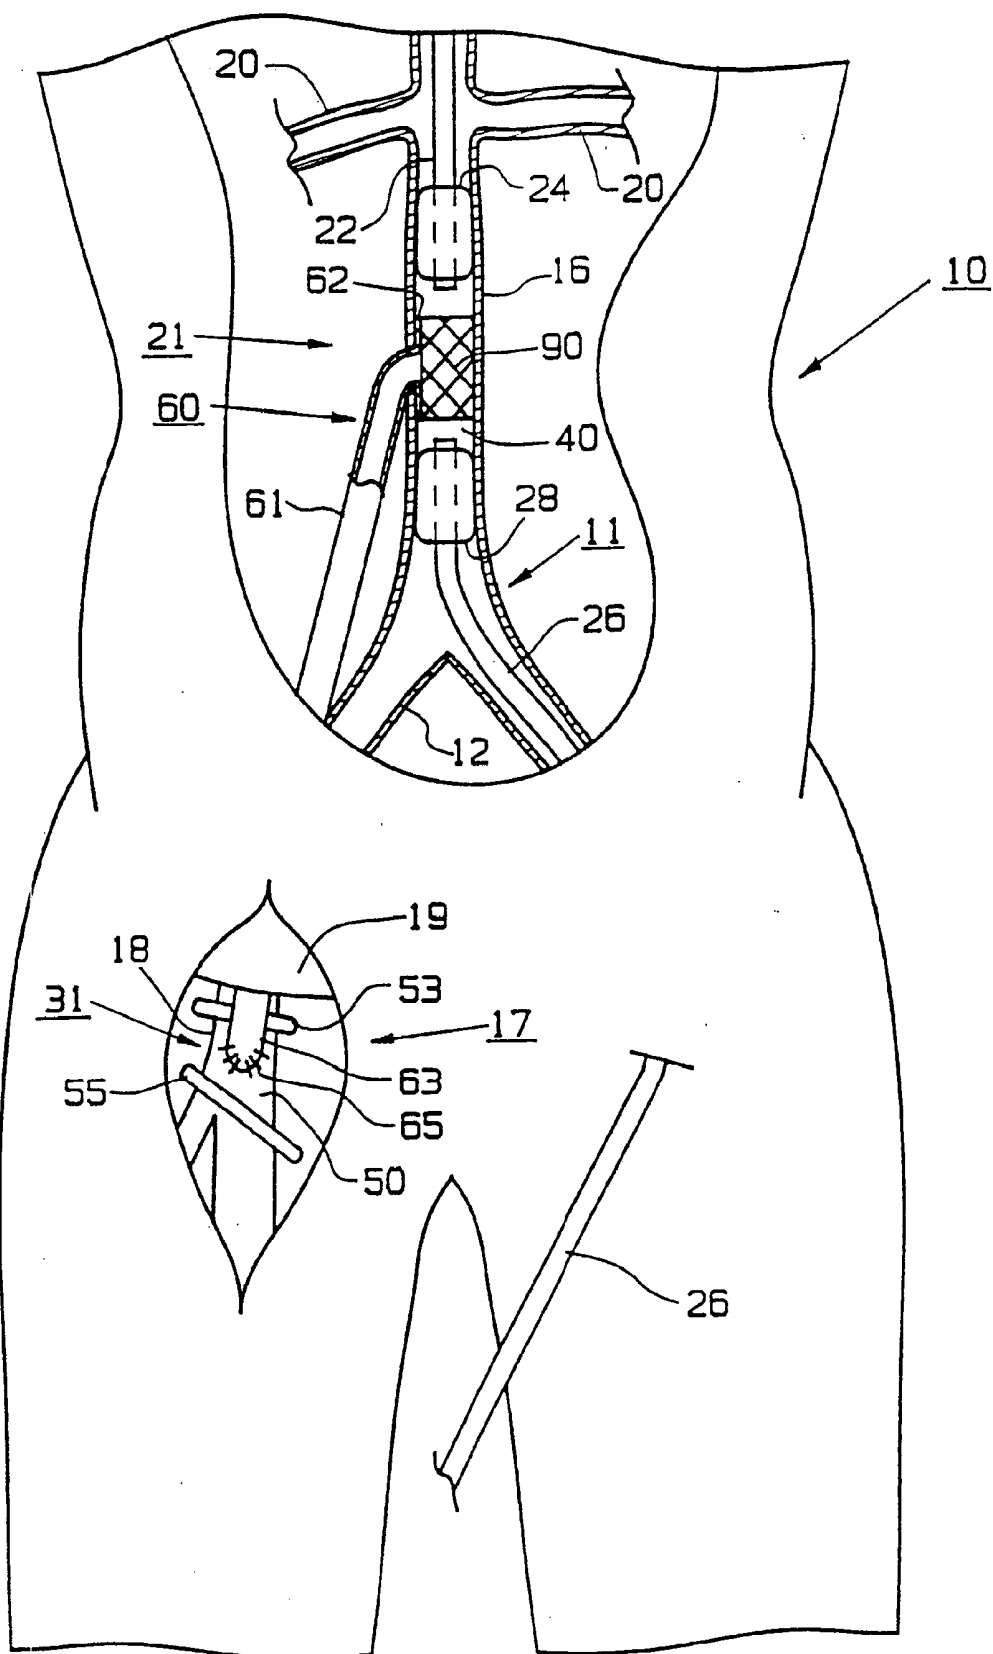


FIG. 23

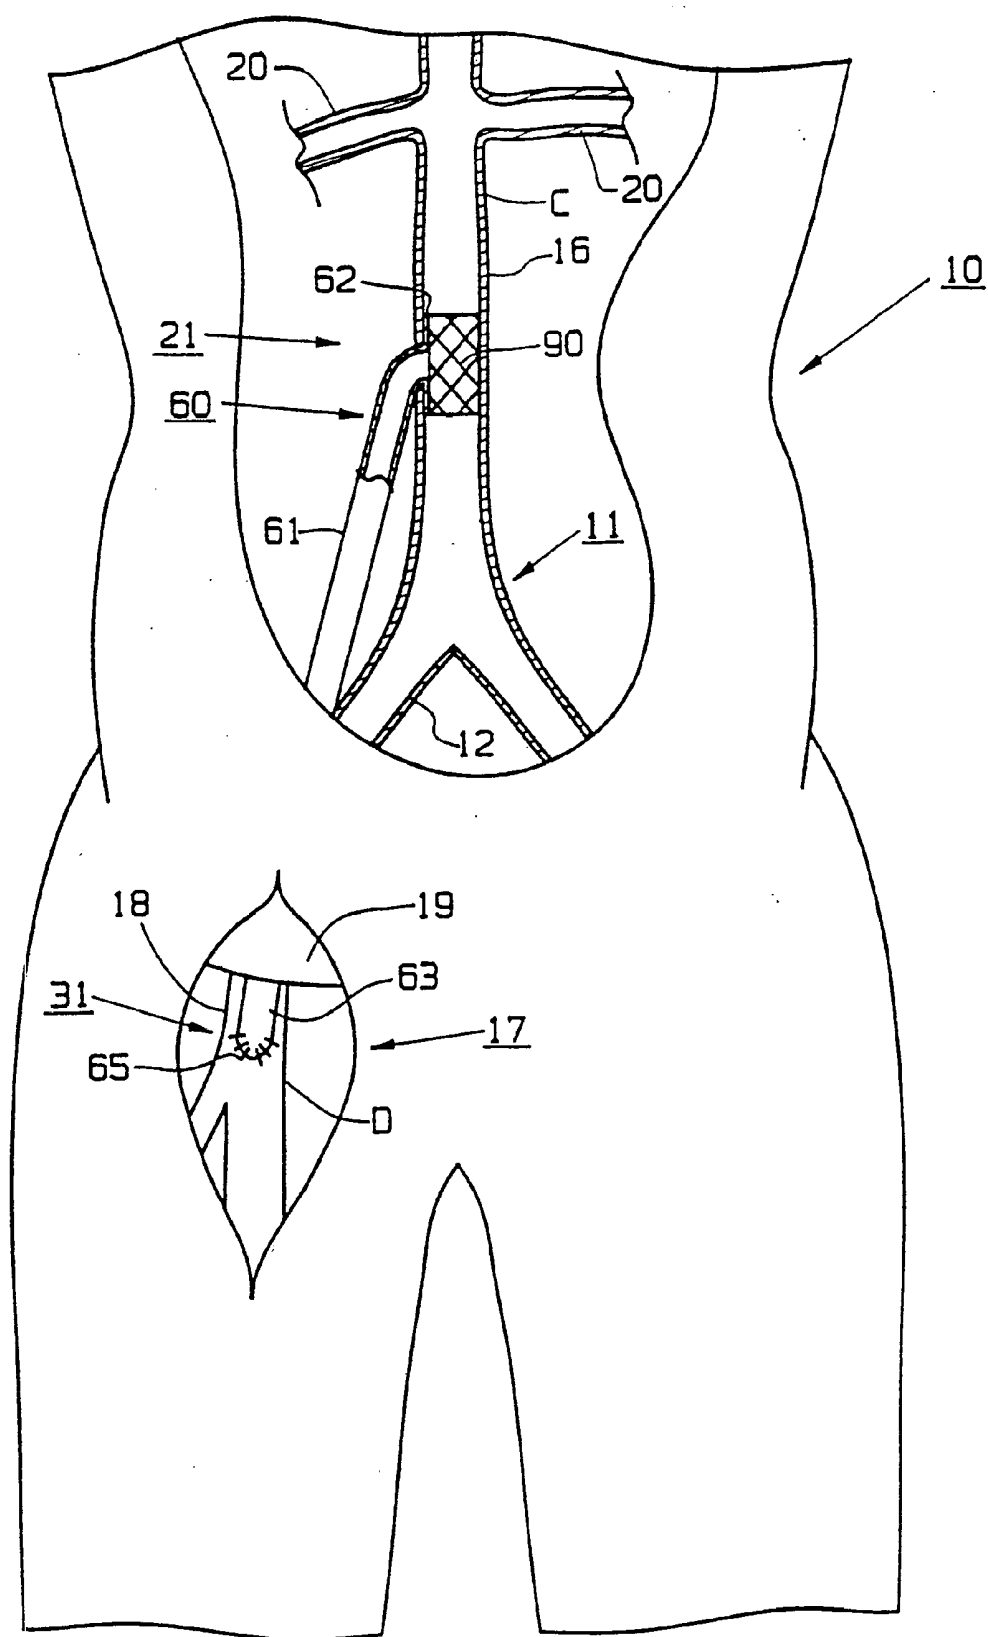


FIG. 24

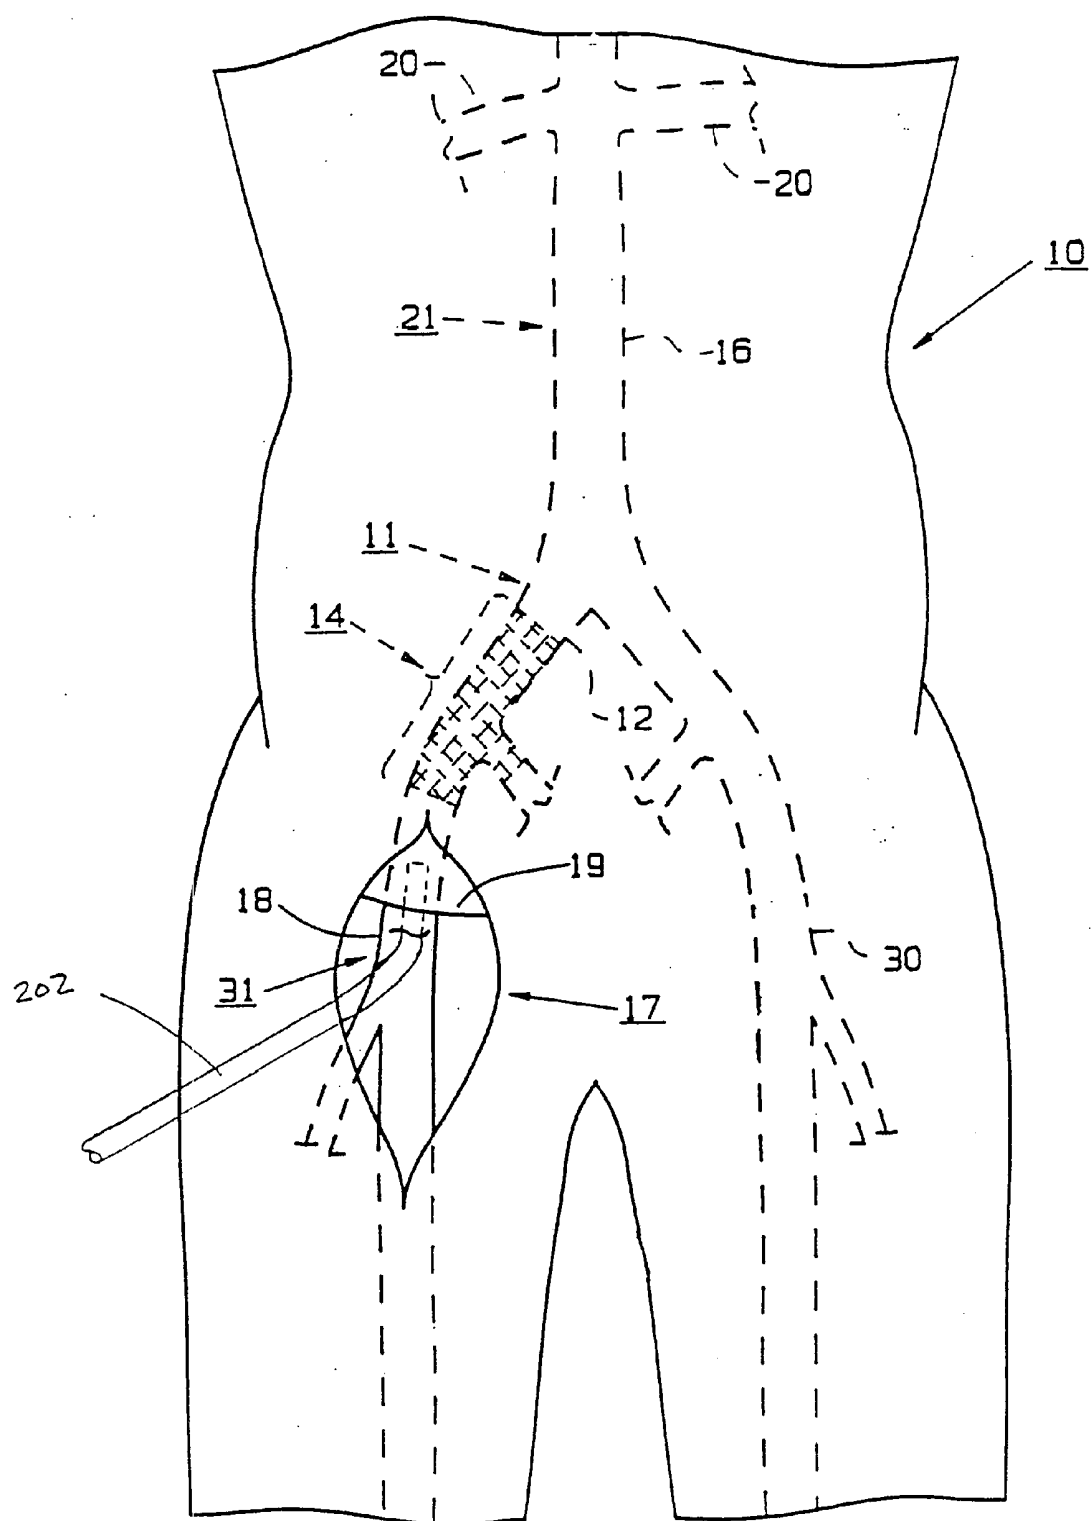


FIG. 25





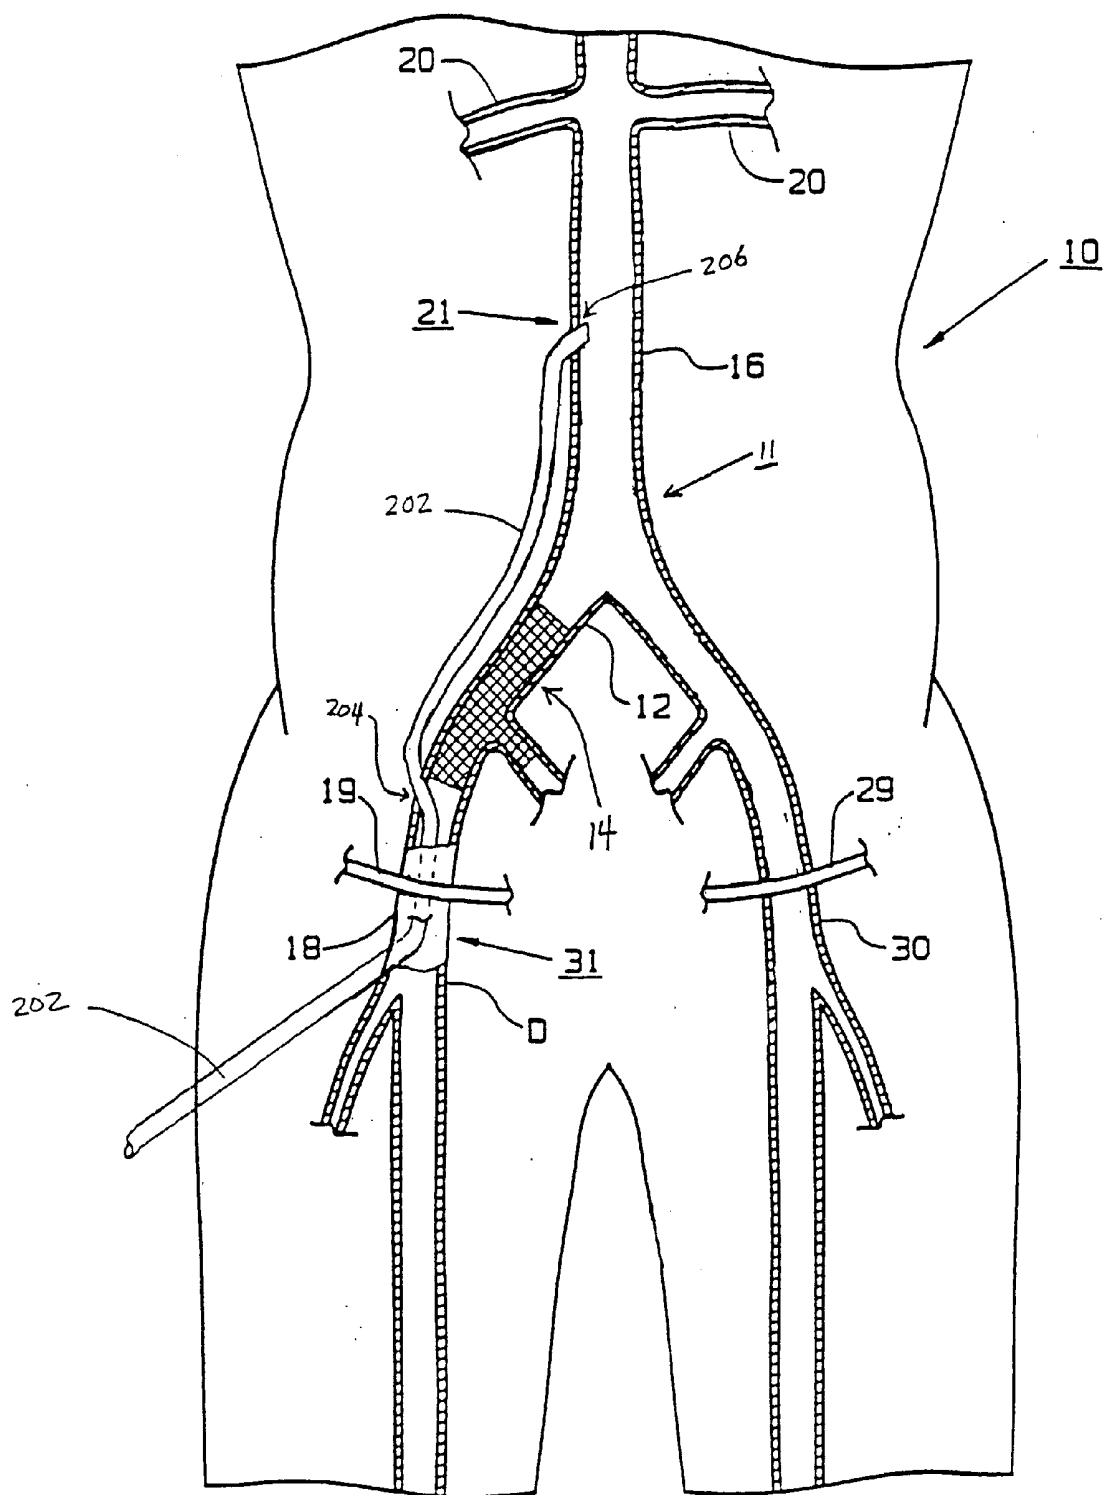


FIG. 28



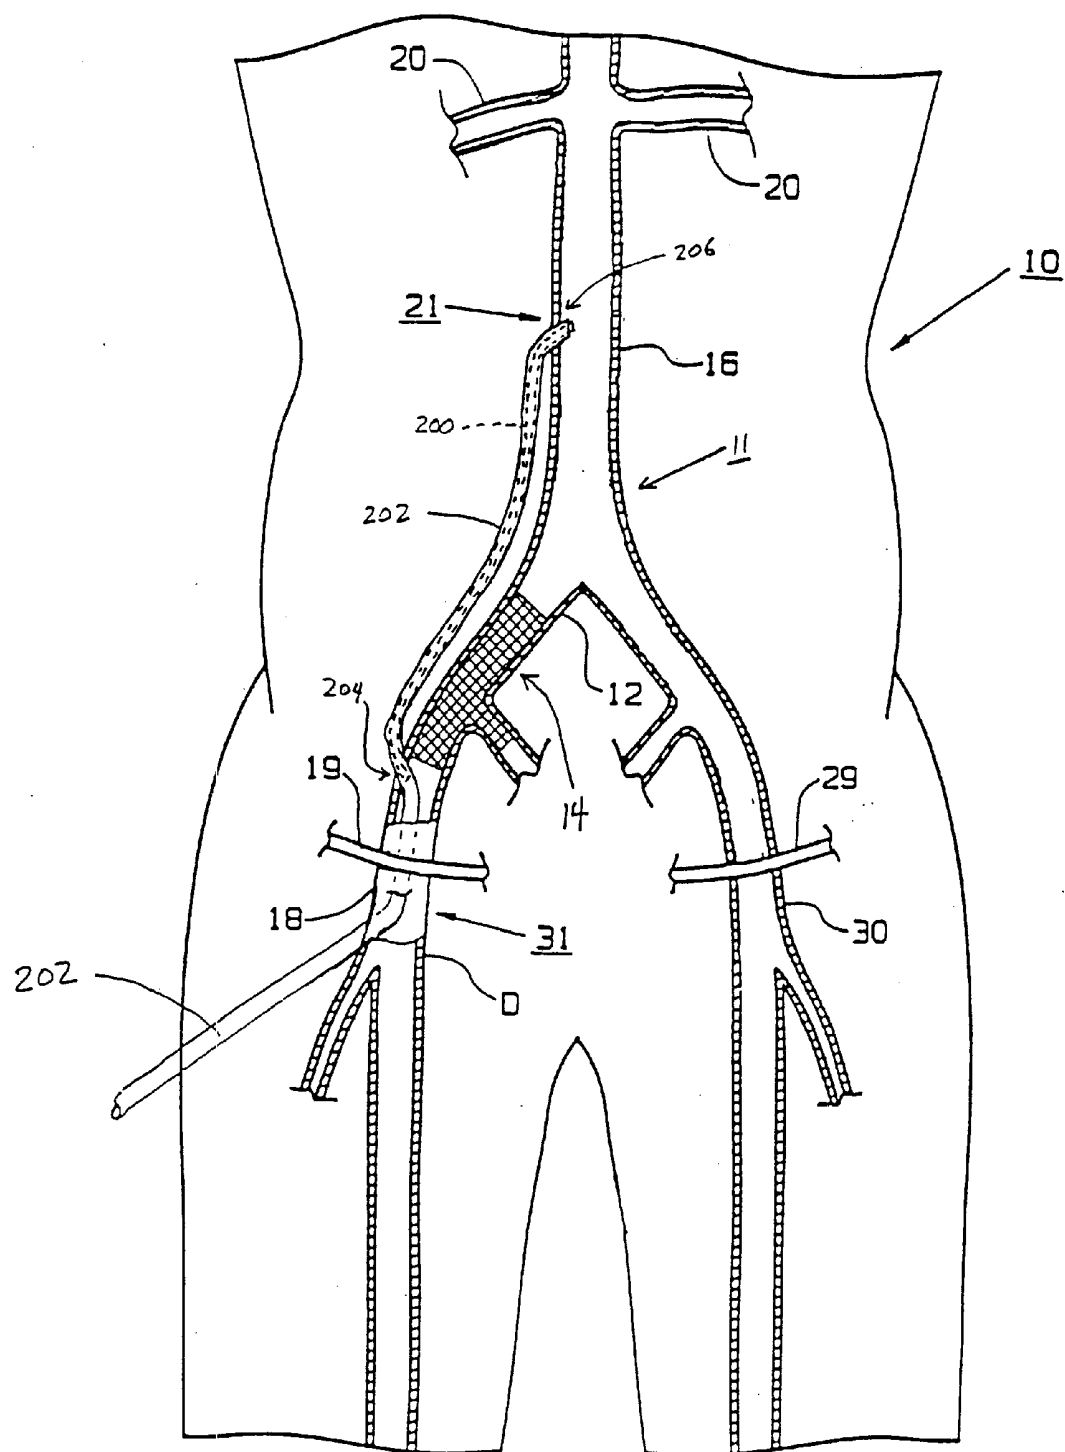


FIG. 29

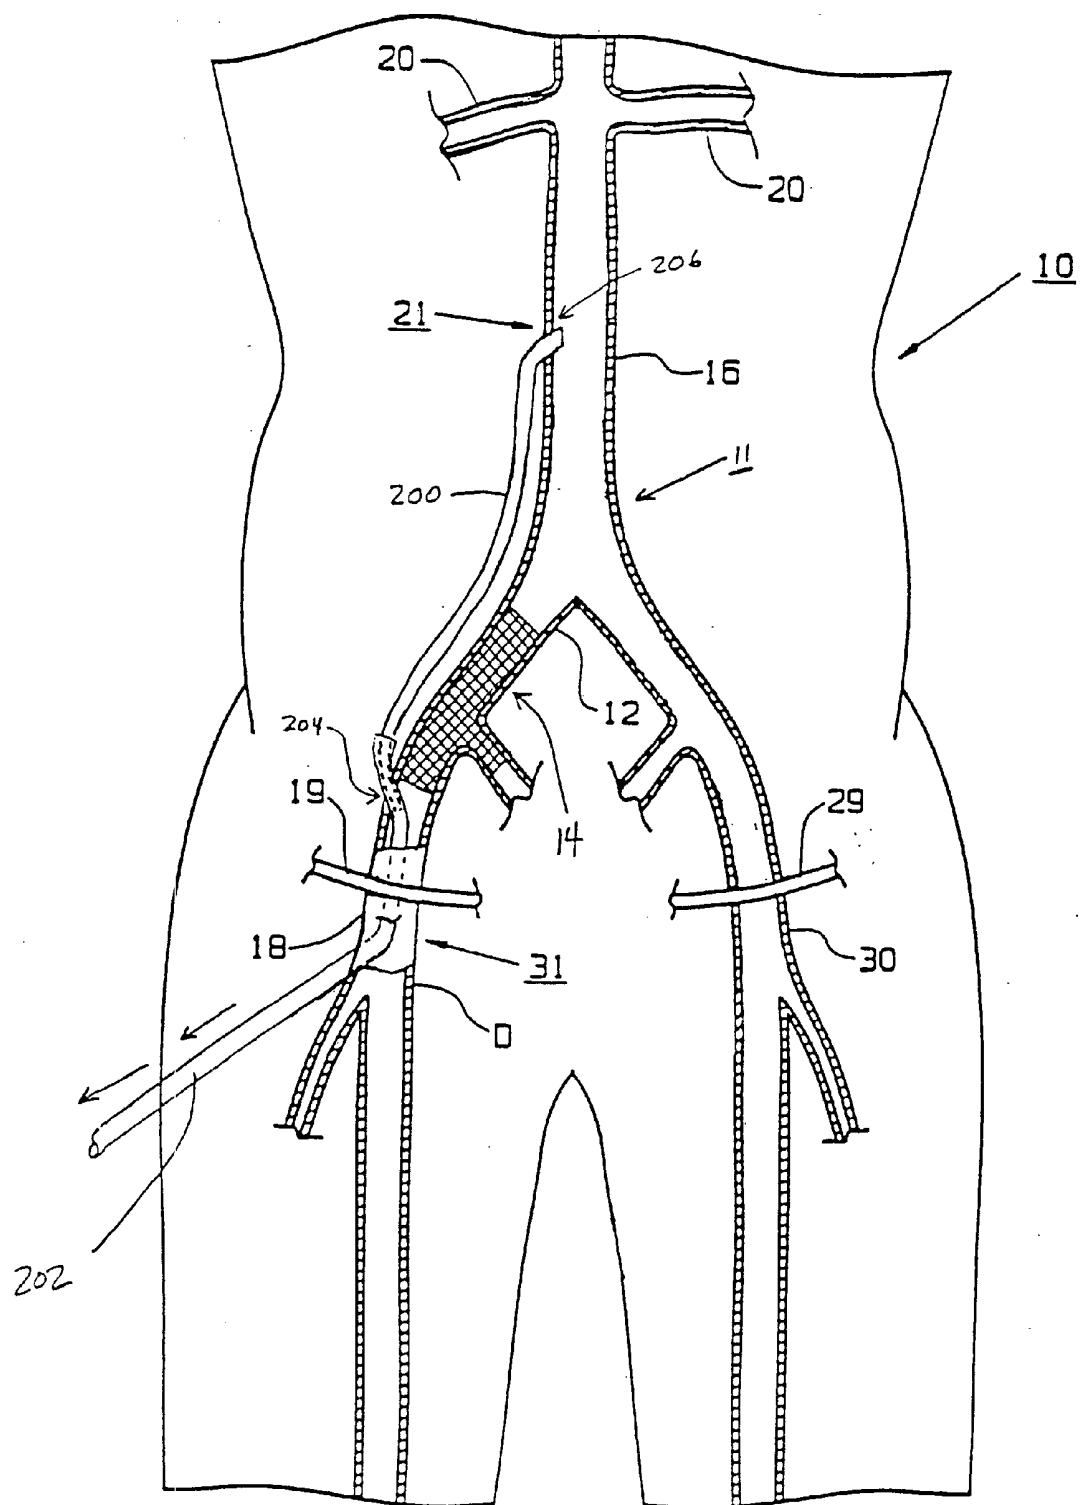


FIG. 30

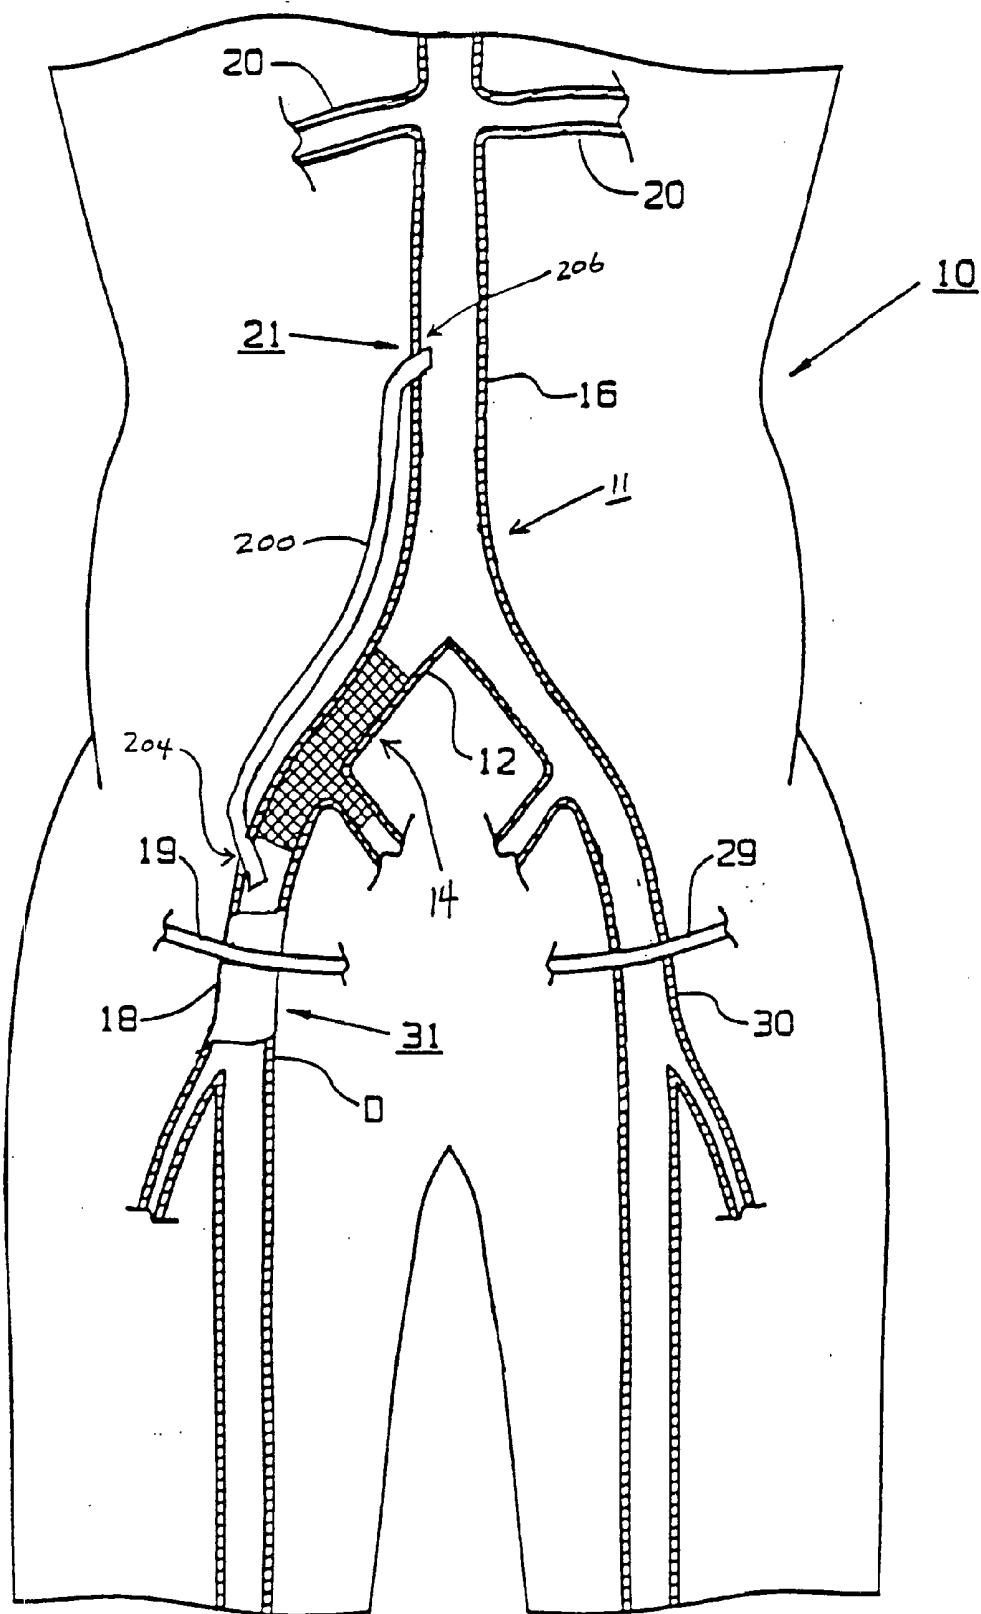


FIG. 31

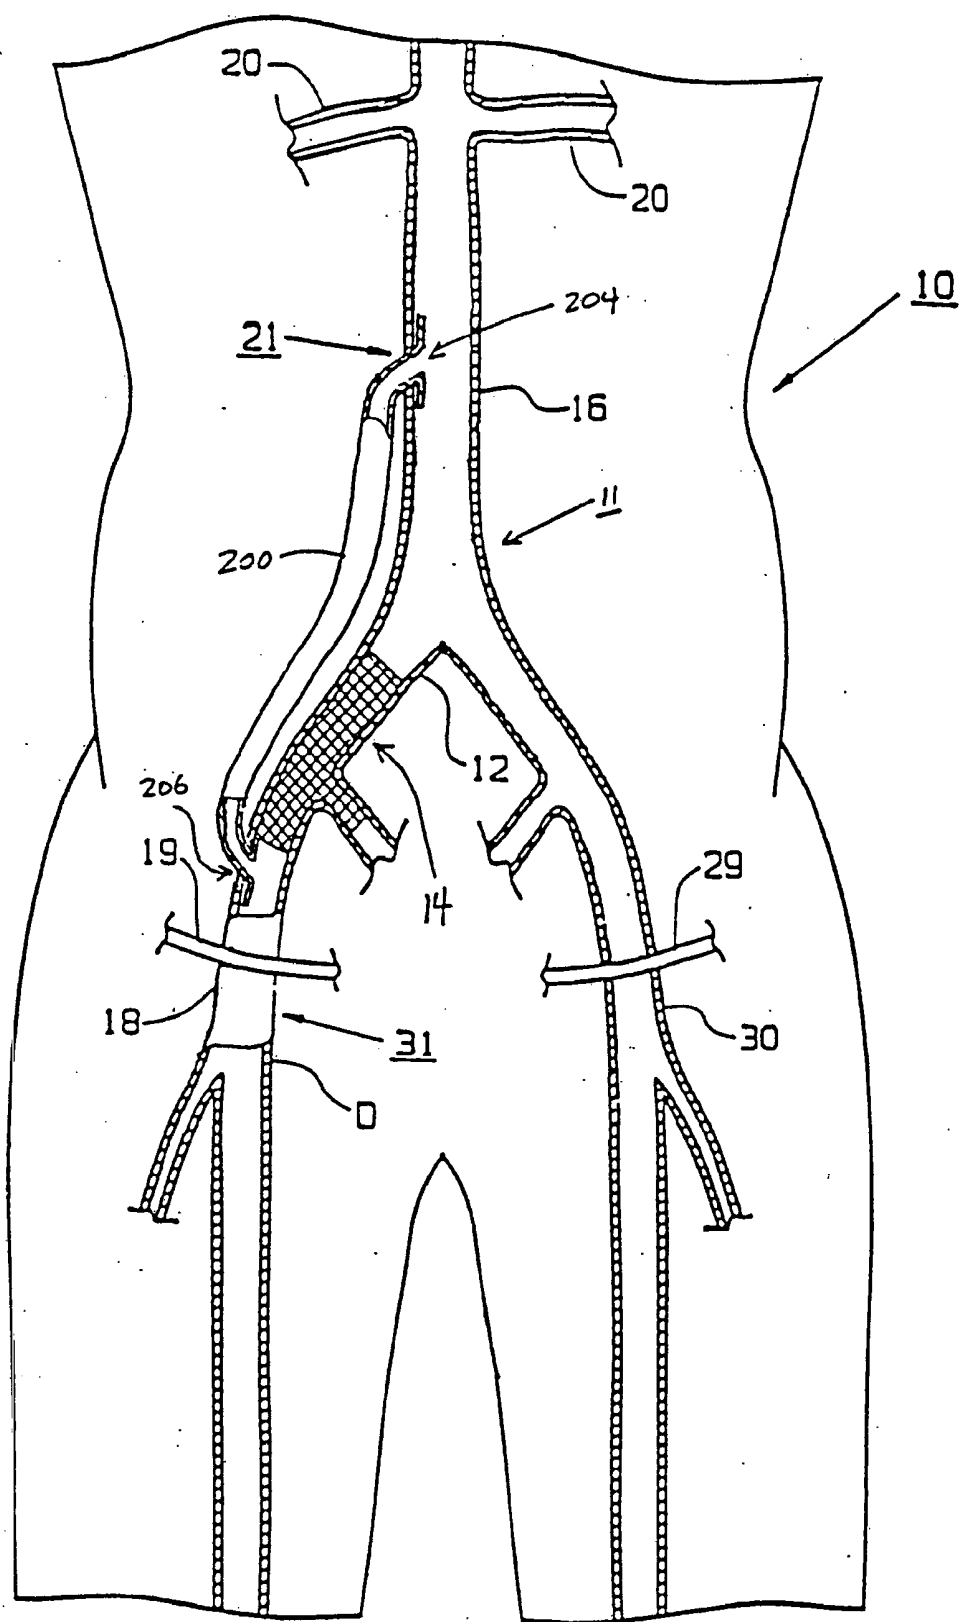


FIG. 32



**BYPASS GRAFTING SYSTEM AND APPARATUS**

[0001] This application is a continuation of application Ser. No. 10/731,068, filed on Dec. 8, 2003, which is a continuation of application Ser. No. 09/903,831, filed on Jul. 11, 2001, entitled "Bypass Grafting Method", which application is a continuation of abandoned application Ser. No. 09/111,062 filed Jul. 7, 1998, which is a continuation of application Ser. No. 09/090,598 filed Jun. 4, 1998, now U.S. Pat. No. 5,934,286, which is a continuation of application Ser. No. 09/073,336, filed May 5, 1998, now U.S. Pat. No. 5,979,455, which is a continuation of application Ser. No. 08/702,742, filed Aug. 23, 1996, now U.S. Pat. No. 5,749,375, which is a continuation of application Ser. No. 08/391,960, filed Feb. 21, 1995, now U.S. Pat. No. 5,571,167, which is a continuation of application Ser. No. 08/138,912, filed Oct. 18, 1993, now U.S. Pat. No. 5,456,712, which is a division of application Ser. No. 08/056,371, filed on May 3, 1993, now U.S. Pat. No. 5,304,220, which is a continuation-in-part of application Ser. No. 07/725,597, filed on Jul. 3, 1991, now U.S. Pat. No. 5,211,683.

**FIELD OF THE INVENTION**

[0002] The present invention relates generally to a system and apparatus for improving blood flow in the body of a patient and more particularly to an extravascular bypass grafting technique that utilizes a graft and delivery system in an intravascular approach.

**BACKGROUND OF THE INVENTION**

[0003] Treatment of vascular disease in which the lumen of a blood vessel is significantly narrowed or occluded by atherosclerosis includes surgical and endovascular methods. Conventional surgical methods include obtaining access to a blood vessel via one or more surgical incisions and either removing the blockage by performing an endarterectomy or bypassing the blockage by placing a bypass graft which has a generally cylindrical shape. Endovascular methods include obtaining access to a blood vessel with a catheter and improving blood flow therein by performing an atherectomy, atherolysis, or balloon and laser angioplasty with or without endovascular stent placement. In general, the preferred treatment of severe stenosis or occlusion of a long vessel segment has been surgical bypass grafting.

[0004] Although conventional surgical bypass grafting is an accepted procedure. It presents substantial morbidity and mortality risks. Also, not all patients are acceptable candidates for the above surgical procedure due to advanced age and preexisting medical conditions. Moreover, conventional surgical bypass grafting is an invasive procedure which may require extended hospitalization due to postoperative recovery. In addition, the above surgical procedure may involve substantial financial costs to patients, hospitals and society in general. Further, incisions made during the above surgical procedure may cause significant cosmetically unattractive scarring which is undesirable to many patients.

**SUMMARY OF THE INVENTION**

[0005] One embodiment of the present invention involves a method of implanting a graft prosthesis in the body of a patient to bypass a segment of a blood vessel. The method includes the steps of (1) making an incision in the body, (2) positioning a graft so that one end of the graft is located

substantially adjacent the blood vessel at a site upstream of the segment and a second end of the graft is located substantially adjacent the blood vessel at a site downstream of the segment wherein the positioning step includes the step of placing the graft into the body through the incision, and further wherein the positioning step is performed while the upstream site is covered by a substantially intact portion of the epidermis of the body, (3) isolating a region of the area within the blood vessel substantially adjacent the upstream site from fluid communication with the rest of the area within the blood vessel, wherein the upstream isolating step is performed while the upstream site is covered by the substantially intact portion of the epidermis of the body (4) making an arteriotomy in a sidewall of the blood vessel substantially adjacent the upstream site to create a communicating aperture between the upstream isolated region and an area outside of the blood vessel, wherein the upstream arteriotomy making step is performed while the upstream site is covered by the substantially intact portion of the epidermis of the body (5) forming an anastomosis between the end portion of the graft and the blood vessel substantially adjacent the second location, wherein the anastomosis forming step is performed while the second location is covered by the substantially intact portion of the epidermis of the body, and further wherein the anastomosis forming step includes the step of suturing the end portion of the graft to the blood vessel, (6) isolating a region of the area within the blood vessel substantially adjacent the downstream site from fluid communication with the rest of the area in the blood vessel, (7) making an arteriotomy in the sidewall of the blood vessel substantially adjacent the downstream site to create a communicating aperture between the downstream isolated region and the area outside of the blood vessel, and (8) forming an anastomosis between the second end of the graft and the blood vessel substantially adjacent the downstream site.

[0006] Another embodiment of the present invention involves a method for implanting an end portion of a graft within the body of a patient during a bypass grafting procedure. The method includes the steps of (1) making an incision in the body at a first location, (2) isolating a region of the area within a blood vessel of the body substantially adjacent a second location from fluid communication with the rest of the area within the blood vessel, wherein the first location is remote from the second location, and further wherein the isolating step is performed while the second location is covered by a substantially intact portion of the epidermis of the body, (3) making an arteriotomy in the sidewall of the blood vessel substantially adjacent the second location to create a communicating aperture between the isolated region and the outside of the blood vessel, wherein the arteriotomy making step is performed while the second location is covered by the substantially intact portion of the epidermis of the body, (4) advancing the end portion of the graft through the incision to the second location, wherein the advancing step is performed while the second location is covered by the substantially intact portion of the epidermis of the body, and (5) forming an anastomosis between the end portion of the graft and the blood vessel substantially adjacent the second location, wherein the anastomosis forming step is performed while the second location is covered by the substantially intact portion of the epidermis of the body,

and further wherein the anastomosis forming step includes the step of suturing the end portion of the graft to the blood vessel.

[0007] Still another embodiment of the present invention involves a graft which is securable to a sidewall of a blood vessel having an arteriotomy defined therein. The graft includes a body portion, and a flanged end portion attached to the body portion, the flanged end portion being positionable substantially adjacent a portion of the sidewall of the blood vessel which substantially surrounds the arteriotomy.

[0008] Yet another embodiment of the present invention involves a graft and stent assembly which is securable to a sidewall of a blood vessel having an arteriotomy defined therein. The graft and stent assembly includes a graft having an end portion which is positionable within the blood vessel and substantially adjacent a portion of the sidewall of the blood vessel which substantially surrounds the arteriotomy. The graft and stent assembly further includes a stent positionable within the blood vessel and in contact with the end portion of the graft so as to secure the end portion of the graft between the sidewall of the blood vessel and the stent.

[0009] One object of the present invention is to provide an improved method for implanting a graft prosthesis in the body of a patient.

[0010] Another object of the present invention is to provide an improved method for implanting an end portion of a graft within the body of a patient.

[0011] Still another object of the present invention is to provide a method of implanting a graft prosthesis in the body of a patient which is less invasive relative to conventional surgical bypass grafting procedures.

[0012] Yet another object of the present invention is to provide a method of implanting a graft prosthesis in the body of a patient which obviates at least one surgical incision (e.g. the abdominal surgical incision) as compared to conventional surgical bypass grafting procedures.

[0013] Still another object of the present invention is to provide a method of implanting a graft prosthesis in the body of a patient which has low morbidity and mortality risk to patients.

[0014] Yet another object of the present invention is to provide a method of implanting a graft prosthesis in the body of a patient which can be performed on patients whom are elderly or have poor preexisting medical conditions.

[0015] Still another object of the present invention is to provide a method of implanting a graft prosthesis in the body of a patient which requires relatively less financial costs to patients, hospitals and society in general as compared to conventional surgical bypass grafting techniques.

[0016] Yet another object of the present invention is to provide an improved graft prosthesis.

[0017] Still another object of the present invention is to provide an improved graft and stent assembly.

[0018] Another object of the present invention is to provide a graft which can be conveniently secured to a blood vessel.

[0019] Yet another object of the present invention is to provide a graft and stent assembly which allows the graft to be conveniently secured to a blood vessel.

[0020] Yet still another object of the present invention is to provide a graft which is easy to implant in the body of a patient.

[0021] Still another object of the present invention is to provide a graft and stent assembly which is easy to implant in the body of a patient.

[0022] Another object of the present invention is to provide a graft which functions well after it is implanted in the body of a patient.

[0023] Yet another object of the present invention is to provide a graft and stent assembly which functions well after it is implanted in the body of a patient.

[0024] Other objects and benefits of the present invention can be discerned from the following description and accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIG. 1 is a fragmentary front elevational view of a human body showing a blood vessel which includes the aorta, the right common iliac artery, the right common femoral artery and the left common femoral artery wherein a segment of the blood vessel is occluded. FIG. 1 also shows a portion of each inguinal ligament of the human body.

[0026] FIG. 2 is an enlarged fragmentary view of the human body and blood vessel of FIG. 1.

[0027] FIG. 3 shows the human body and blood vessel of FIG. 2 with a balloon-tip catheter positioned within the blood vessel wherein the balloon is inflated in accordance with the preferred method of the present invention.

[0028] FIG. 4 is a view similar to FIG. 3 but showing a second balloon-tip catheter positioned within the blood vessel wherein the second balloon is inflated in accordance with the preferred method of the present invention.

[0029] FIG. 5 is a view similar to FIG. 4 but showing the blood vessel in phantom except for a portion thereof that is exposed through a gaping surgical incision. Also shown exposed through the surgical incision in FIG. 5 is a portion of the right inguinal ligament.

[0030] FIG. 6 is a view similar to FIG. 5 but showing another portion of the blood vessel. Including the aorta, exposed for clarity of description. Moreover, in FIG. 6, a laparoscope (depicted schematically) is shown inserted through the surgical incision in accordance with the preferred method of the present invention.

[0031] FIG. 7 is a view similar to FIG. 6 but showing a needle positioned within the laparoscope in accordance with the preferred method of the present invention.

[0032] FIG. 8 is a view similar to FIG. 7 but showing the needle removed from the laparoscope and replaced with a scissors device in accordance with the preferred method of the present invention.

[0033] FIG. 9A is an elevational view of a graft prosthesis used in carrying out the preferred method of the present invention.

[0034] FIG. 9B is a fragmentary sectional view taken along the line 9B-9B of FIG. 9A as viewed in the direction of the arrows.

[0035] FIG. 9C is a fragmentary perspective view of the graft prosthesis of FIG. 9A showing its outwardly extending flanged end portion.

[0036] FIG. 9D is another fragmentary perspective view of the graft prosthesis of FIG. 9A showing its outwardly extending flanged end portion.

[0037] FIG. 9E is a view similar to FIG. 9C but showing a plurality of springs, in phantom, integrally positioned within the outwardly extending flanged end portion, in addition to a portion of the sidewalls of the graft prosthesis of FIG. 9A.

[0038] FIG. 9F is an elevational view of one of the plurality of springs of FIG. 9E.

[0039] FIG. 9G is an elevational view of another of the plurality of springs of FIG. 9E.

[0040] FIG. 9H is an elevational view of yet another of the plurality of springs of FIG. 9E.

[0041] FIG. 9I is an elevational view of still another of the plurality of springs of FIG. 9E.

[0042] FIG. 10A is an elevational view of the graft prosthesis of FIG. 9A wherein the graft prosthesis is in a rolled configuration.

[0043] FIG. 10B is a cross-sectional view taken along the line 10B-10B of FIG. 10A as viewed in the direction of the arrows.

[0044] FIG. 11A is an elevational view of the laparoscope of FIG. 6. Moreover, FIG. 11A shows the graft prosthesis of FIG. 10A, positioned within the laparoscope in accordance with the method of the present invention. FIG. 11A, further shows a plunger, used in carrying out the preferred method of the present invention, partially positioned within the laparoscope in accordance with the preferred method of the present invention.

[0045] FIG. 11B is a cross-sectional view taken along the line 11B-11B of FIG. 11A as viewed in the direction of the arrows.

[0046] FIG. 12 is a view similar to FIG. 8 but showing the scissors device removed from the laparoscope and replaced with the graft prosthesis and plunger of FIG. 11A in accordance with the preferred method of the present invention.

[0047] FIG. 13 is a view similar to FIG. 12 but showing the graft prosthesis being advanced out the distal end of the laparoscope in accordance with the preferred method of the present invention.

[0048] FIG. 14 is a view similar to FIG. 13 but showing the graft prosthesis being further advanced out the distal end of the laparoscope in accordance with the preferred method of the present invention.

[0049] FIG. 15 is a view similar to FIG. 14 but showing the graft prosthesis being yet further advanced out the distal end of the laparoscope in accordance with the preferred method of the present invention.

[0050] FIG. 16 is a view similar to FIG. 15 but showing the laparoscope removed from the surgical incision and showing the graft prosthesis after it had reverted back to its pre-rolled configuration in accordance with the preferred method of the present invention.

[0051] FIG. 17 is a view similar to FIG. 16 but showing a third balloon-tip catheter having a balloon thereon and further having an expandable stent, in its unexpanded state, positioned over the balloon, advanced to a position within the blood vessel in accordance with the preferred method of the present invention.

[0052] FIG. 18 is a view similar to FIG. 17 but showing the balloon of the third balloon-tip catheter inflated so as to expand the stent in to its expanded configuration in accordance with the preferred method of the present invention.

[0053] FIG. 19A is a view similar to FIG. 18 but showing the third balloon-tip catheter removed from the blood vessel and showing the stent expanded to form an anastomosis between one end of the graft prosthesis and the blood vessel in accordance with the preferred method of the present invention.

[0054] FIG. 19B is an enlarged schematic side elevational view showing a number of sutures tied to the sidewall of the blood vessel so as to secure the end portion of the graft and the stent thereto as a possible additional procedure in order to further ensure the integrity of the anastomosis of FIG. 19A.

[0055] FIG. 19C is a cross-sectional view taken along the line 19C-19C of FIG. 19B as viewed in the direction of the arrows.

[0056] FIG. 19D is a view similar to FIG. 19A but showing a laparoscope (depicted schematically) inserted through an incision in the epidermis of the body and into the peritoneal cavity, and further showing a grasper holding a curved needle with an end of a suture attached thereto wherein the distal end of the grasper is positioned at the upstream site.

[0057] FIG. 19E is an enlarged schematic side elevational view showing a number of sutures tied to the sidewall of the blood vessel so as to secure the end portion of the graft thereto (without the use of the stent), wherein the end portion of the graft is positioned within the upstream isolated region, as an alternative procedure in forming an anastomosis between the end portion of the 15 graft and the blood vessel.

[0058] FIG. 19F is a cross-sectional view taken along the line 19F-19F of FIG. 19E as viewed in the direction of the arrows.

[0059] FIG. 19G is an enlarged schematic side elevational view showing a number of sutures tied to the sidewall of the blood vessel so as to secure the end portion of the graft thereto (without the use of the stent), wherein the end portion of the graft is positioned outside of the upstream isolated region, as another alternative procedure in forming an anastomosis between the end portion of the graft and the blood vessel.

[0060] FIG. 19H is a cross-sectional view taken along the line 19H-19H of FIG. 19G as viewed in the direction of the arrows.

[0061] FIG. 20A is an enlarged side elevational view showing the anastomosis of FIG. 19A.

[0062] FIG. 20B is a cross-sectional view taken along the line 20B-20B of FIG. 20A as viewed in the direction of the arrows.



[0063] FIG. 20C is a cross-sectional view taken along the line 20C-20C of FIG. 20A as viewed in the direction of the arrows.

[0064] FIG. 21 is a view similar to FIG. 19A but showing a pair of clamps positioned on the blood vessel in accordance with the preferred method of the present invention.

[0065] FIG. 22 is a view similar to FIG. 21 but showing an arteriotomy formed in the sidewall of the blood vessel in accordance with the preferred method of the present invention.

[0066] FIG. 23 is a view similar to FIG. 22 but showing an anastomosis formed between the other end, the graft prosthesis and the blood vessel in accordance with the preferred method of the present invention.

[0067] FIG. 24 is a view similar to FIG. 23 but showing the first balloon-tip catheter and the second balloon-tip catheter removed from the blood vessel in accordance with the preferred method of the present invention.

[0068] FIGS. 25-33 are views showing performance of a bypass grafting procedure in accordance with the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

[0069] For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments and methods illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated devices and methods, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

[0070] Referring now to the drawings, FIG. 1 shows a portion of a human body, generally designated by the reference numeral 10, with an artery, the common iliac artery 12, having an occluded segment, generally designated by the reference numeral 14. Human body 10 is further shown having other arteries, in particular, aorta 16, right common femoral artery 18, left common femoral artery 1530 and renal arteries 20. In addition, human body 10 includes a right inguinal ligament 19 and a left inguinal ligament 29. Human body 10 also includes an epidermis 13 (see e.g. FIG. 6). The preferred method disclosed herein describes the implantation of a graft to couple aorta 16 to right common femoral artery 18 thereby bypassing occluded segment 14. FIG. 2 shows an enlarged view of aorta 16, right common iliac artery 12, occluded segment 14, right common femoral artery 18, left common femoral artery 30, renal arteries 20 and right inguinal ligament 19. In FIGS. 1 and 2, a blood vessel is shown, generally designated by the reference numeral 11, which includes aorta 16, right common iliac artery 12, right common femoral artery 18 and left common femoral artery 30. Blood vessel 11, when not occluded, conveys blood from a point C within aorta 16 to a point D within right common femoral artery 18 (see FIGS. 1-2). However, due to the presence of occluded segment 14, blood is substantially totally precluded from being conveyed from point C within aorta 16 to point D within right common

femoral artery 18 via the direct route of right common iliac artery 12. While the inventive method will hereinafter be described with regard to a substantially totally occluded segment of a blood vessel of a patient, it will be understood to one skilled in the art that the inventive method is equally effective for bypass of a partially occluded segment of a blood vessel. In addition, the inventive method is also useful for bypass of an aneurysmal segment of a blood vessel.

[0071] Referring now to FIGS. 3-24, successive steps according to the preferred method of the present invention are depicted of the implantation of a graft prosthesis of the present invention to couple aorta 16 to right common femoral artery 18 thereby bypassing occluded segment 14 of blood vessel 11.

[0072] One step of the preferred method of the present invention comprises isolating a region of the area within the blood vessel 11, located near a site 211 s (see FIG. 4) upstream of occluded segment 14, from fluid communication with the rest of the area within the blood vessel. There also exists a site 31 which is located downstream of occluded segment 14 (see FIG. 4). Upstream site 21 is located substantially adjacent the blood vessel 11 and designates a working area where the distal end of medical instruments and various medical devices may be positioned during the process of securing one end of a graft to the blood vessel. Upstream site 21 is located near blood vessel 11 so as to allow such distal end of medical instruments and medical devices to be appropriately manipulated at upstream site 21 to thereby successfully secure the one end of the graft to the blood vessel. Downstream site 31 is located substantially adjacent the blood vessel 11 and also designates a working area where the distal end of medical instruments, physician's hands and various medical devices may be positioned during the process of securing a second end of the graft to the blood vessel. Downstream site 31 is also located near blood vessel 11 so as to allow such distal end of medical instruments, physician's hands and medical devices to be appropriately manipulated at downstream site 31 to thereby successfully secure the second end of the graft to the blood vessel.

[0073] Referring now to FIG. 3, a balloon-tip catheter 22 having a balloon 24 thereon is percutaneously inserted into blood vessel 11 via the right or left axillary artery (not shown). This step may be accomplished using standard catheterization techniques. The distal end of catheter 22 is then advanced into aorta 16 until balloon 24 is positioned distal to renal arteries 20 as shown in FIG. 3. Balloon 24 is then inflated to and maintained at a size such that fluid communication is substantially terminated in aorta 16 between the portion of blood vessel 11 proximal to balloon 24 and the portion of blood vessel 11 distal to balloon 24. Since conventional balloon-tip catheters may not have a balloon thereon that possess the characteristics necessary to terminate fluid communication in the aorta as described above, modification may be readily made to an existing design of a conventional balloon-tip catheter to achieve the above desired results. One such modification would include providing a balloon on the catheter with is inflatable to an outer diameter which is larger than the inner diameter of the aorta. Another such modification would include providing a coarse textured outer surface to the balloon of the catheter. The above modification would provide increased frictional resistance between the inflated balloon and the sidewall of

the blood vessel when force is applied to the balloon in the axial direction thereof. A balloon-tip catheter having a conventional design is available through Medi-tech, Incorporated of Watertown, Massachusetts, as Order No.17-207 (Description: OBW/4018/2/100).

[0074] Referring now to FIG. 4, a balloon-tip catheter 26 having a balloon 28 thereon and an open lumen defined therein is percutaneously inserted into blood vessel 11 via the left common femoral artery 30. This step may be accomplished using standard catheterization techniques. The distal end of the catheter 26 is then advanced into aorta 16 until balloon 28 is positioned proximal to the aortic bifurcation. Balloon 28 is then inflated to and maintained at a size such that fluid communication is substantially terminated in aorta 16 between the portion of blood vessel 11 proximal to balloon 28 and the portion of blood vessel 11 distal to balloon 28. Since conventional balloon-tip catheters may not have a balloon thereon that possess the characteristics necessary to terminate fluid communication in the aorta as described above, modification similar to that 10 described with respect to catheter 22 may need to be made to catheter 26. In addition, further modification may need to be made to catheter 26 since a conventional balloon-tip catheter may not have an open central lumen defined therein which possesses a diameter large enough for the advancement therethrough of a compressed stent mounted on a balloon of another balloon-tip catheter as will be required by the preferred method of the present invention (see FIG. 17). Such further modification would be to create an open central lumen in catheter 26 that possesses a diameter larger than the outer diameter of the compressed stent which is mounted on the balloon of the balloon-tip catheter as referred to above. Due to the increased size requirements of catheter 26 as 20 alluded to above, a surgical cut-down may need to be performed in order to expose left common femoral artery 30. Such exposure would facilitate both placement of catheter 26 into blood vessel 11 and repair of such blood vessel following subsequent removal of such catheter therefrom.

[0075] Temporary occlusion of the blood flow in the inferior mesenteric artery 2s (not shown) by laparoscopic procedures may need to be performed in order to prevent the flow of blood from the inferior mesenteric artery into aorta 16 due to placement of inflated balloons 24 and 28 as discussed above.

[0076] The region bound by balloon 24 of catheter 22 and balloon 28 of catheter 26 and the sidewall of blood vessel 11 contained therebetween defines a region 40 of the area within blood vessel 11, located near site 21 upstream of occluded segment 14, which is substantially isolated from fluid communication with the rest of the area within blood vessel 11.

[0077] Alternatively, the step of isolating the region of the area within blood vessel 11, located near upstream site 21, from fluid communication with the rest of the area within the blood vessel may be accomplished by laparoscopically placing a first clamp around the blood vessel 11 at the location where balloon 24 of the balloon-tip catheter 22 was described as having been inflated and also laparoscopically placing a second clamp around the blood vessel 11 at the location where balloon 28 of the balloon-tip catheter 26 was described as having been inflated.

[0078] Another step according to the method of the present invention comprises making an arteriotomy in the

sidewall of blood vessel 11, near upstream site 21, to create a communicating aperture between upstream isolated region 40 and the outside of blood vessel 11.

[0079] Referring now to FIG. 5, right common femoral artery 18 and right inguinal ligament 19 are exposed via a surgical incision 17. Such exposure is accomplished using standard surgical techniques.

[0080] Insufflation of the peritoneal cavity is then performed using standard techniques associated with laparoscopy. A laparoscope 37 (see FIG. 6), having an open central lumen (i.e. a working channel) defined therein, is then inserted into human body 10 through the opening between right common femoral artery 18 and right inguinal ligament 19. Laparoscope 37 may additionally include a fiber optic illumination device and a telescope for viewing. A tilt table may be used with the patient (i.e. human body 10) positioned thereon in order to maneuver the patient's abdominal contents away from the laparoscope insertion site and the area near upstream site 21. Laparoscope 37 is then advanced toward upstream site 21 until its distal end is positioned there at as shown in FIG. 6. One or more additional laparoscopes and associated laparoscopic operating instruments may be employed using standard laparoscopic techniques to assist in the above positioning via direct visualization, tissue retraction and tissue dissection. One laparoscope which may be used in carrying out the preferred method of the present invention is available through Karl Storz Endoscopy-America Incorporated of Culver City, Calif., as Catalog No 26075A. Modification may be readily made to laparoscope 37, such as rounding the distal edge thereof, in order to reduce the possibility of tissue trauma as a result of advancement of laparoscope 37 within human body 10. A book which discloses various standard laparoscopic techniques and standard associated laparoscopic operating instruments is entitled "Laparoscopy for Surgeons," authored by Barry 15 A. Salky, M.D., published by Igaku-Shoin Medical Publishers, Inc. of New York, N.Y., U.S.A. (1990), and the pertinent part of the disclosure of which is herein incorporated by reference.

[0081] Referring now to FIG. 7, a puncture needle 39 is advanced through the open central lumen of laparoscope 37 until its distal end exits the laparoscope. Thereafter, needle 39 is manipulated to penetrate through the sidewall of blood vessel 11 to the inside thereof, thus creating a puncture in the blood vessel. Needle 39 is then withdrawn and a scissors device 41 is advanced through the open central lumen of laparoscope 37 until its distal end exits the laparoscope (see FIG. 8). The scissors device is then manipulated to enlarge the puncture in the sidewall of the blood vessel. Scissors device 41 is then withdrawn from laparoscope 37. One puncture needle which may be used in carrying out the preferred method of the present invention is available through Karl Storz Endoscopy-America, Incorporated of Culver City, Calif., as Catalog No. 261 78R. Additionally, one scissors device which may be used in carrying out the method of the present invention is available through Karl Storz Endoscopy-America, Incorporated of Culver City, Calif., as Catalog No. 25 178PS.

[0082] It should be noted that if upstream isolated region 40 was not substantially isolated from fluid communication with the rest of the area within the blood vessel, the act of making an arteriotomy in the sidewall of blood vessel 11

near upstream site **21** would cause significant blood leakage out of blood vessel **11** and such blood leakage may be fatal to the patient.

[0083] According to another step of the method of the present invention, a graft prosthesis is positioned so that one end of the graft is located substantially adjacent blood vessel **11** at downstream site **21** and the other end of the graft prosthesis is located substantially adjacent blood vessel **11** at downstream site **31**. The above positioning step includes the step of advancing the graft prosthesis within the human body **10** with a medical instrument.

[0084] One type of graft prosthesis which may be used is a graft, generally designated by the reference numeral **60** and shown in FIGS. 9A-9E. Graft **60** includes a body portion **61** having a length slightly larger than the distance between upstream site **21** and downstream site **31**. Graft **60** has an outwardly extending flanged end portion **62** as shown in FIGS. 9A, 9C, 9D and 9E. End portion **62** is resiliently maintained outwardly extending by four springs **64A-64D** as shown in FIGS. 9B and 9E-9I. In their relaxed state, springs **64A-64D** maintain end portion **62** within a plane **PI** as shown in FIG. 9A. It should be noted that a number of springs other than four may be used, if desired, to maintain end portion **62** outwardly extending as previously shown and described. Graft **60** further includes a second end portion **63** having a design similar to that of a conventional prosthetic graft as shown in FIG. 9A. Graft **60** is preferably made of synthetic fibers. By way of example, graft **60** can be made from the material sold under the trademark Dacron by E.I. du Pont de Nemours & Co., Inc. of Wilmington, Del. Body portion **61** and end portion **62** are integrally formed together with springs **64A-64D** maintained integrally within the end portion **62** and a portion of the sidewalls of body portion **61** as shown in FIGS. 9B and 9E. Graft **60** maintains its shape as shown in FIGS. 9A-9E absent application of external forces thereto and also graft **60** will revert back to such shape upon termination of such external forces thereto.

[0085] Graft **60** is positioned within the open central lumen defined in laparoscope **37**. In order to achieve the above, graft **60** is preferably rolled into a substantially cylindrical shape as shown in FIGS. 10A and 10B. End portion **62** of graft **60** is manipulated to lie substantially parallel to body portion **61** of graft **60** while graft **60** is in its rolled configuration as shown in FIG. 10A. The outer diameter of graft **60**, in its rolled configuration, from point **W** to point **Y** is larger than the outer diameter of the rolled graft from point **Y** to point **Z** as shown in FIG. 10A. The above is due to the angular construction of end portion **62** as shown in FIG. 9A. The outer diameter of the rolled graft from point **W** to point **Y** is slightly smaller than the inner diameter of laparoscope **37**. As a result, in its rolled configuration, graft **60** can be positioned within the open central lumen of laparoscope **37**. Moreover, graft **60** can be maintained in its rolled configuration while positioned in the central lumen of laparoscope **37** due to the inner diameter thereof. Graft **60** is then inserted into the proximal end of the central lumen of laparoscope **37** and advanced until its full length is entirely therein. A plunger **82** is insertable into the central lumen of laparoscope **37** as shown in FIGS. 11A and 11B. Plunger **82** has a length sufficient to span the length of laparoscope **37**. Plunger **82** enables an operator to selectively position graft **60** within body **10**. FIGS. 11A and 12 show graft **60** positioned in the distal portion of the central

lumen of laparoscope **37** after being advanced by plunger **82**. Laparoscope **37** with graft **60** contained therein is then advanced and manipulated such that the distal end of the laparoscope is advanced through the communicating aperture near upstream site **21** and into isolated region **40**. While the plunger is held stationary, laparoscope **37** is then withdrawn axially over plunger **82** and graft **60** in the direction of arrow **84** as sequentially shown in FIGS. 13-15. This allows graft **60** in its rolled configuration to be delivered out the distal end of laparoscope **37**. FIG. 15 shows end portion **62** of graft **60** positioned within upstream isolated region **40** and end portion **63** of graft **60** positioned at downstream site **31**. Since graft **60** is no longer held in its rolled configuration by the inner diameter of the open central lumen of laparoscope **37**, graft **60** becomes unrolled and reverts to its prerolled configuration as shown in FIG. 16. Injection of a saline solution into graft **60**, via end portion **63**, may be performed to facilitate the reverting of graft **60** to its prerolled configuration. Alternatively, an additional laparoscope may be used to manipulate graft **60** to its prerolled configuration. Alternatively, a balloon-tip catheter may be advanced into graft **60** via end portion **63** and the graft converted to its prerolled configuration by inflation and deflation of the balloon along various segments of the graft.

[0086] Also shown in FIG. 16, end portion **62** of graft **60** is positioned within upstream isolated region **40** near upstream site **21** and end portion **63** of graft **60** is positioned at downstream site **31** while body portion **61** of graft **60** is positioned outside of blood vessel **11**. Note that end portion **62** has also reverted back to its prerolled configuration so that such end portion is outwardly extending relative to body portion **61** of graft **60**.

[0087] Another step according to the preferred method of the present invention includes forming an anastomosis between end portion **62** of graft **60** and blood vessel **11** near upstream site **21**.

[0088] A balloon-tip catheter **86** having a balloon **88** thereon and further having an expandable stent **90** in its unexpanded configuration, positioned over balloon **38** is advanced through the open central lumen of catheter **26** until its distal end is located within upstream isolated region **40** near upstream site **21** (see FIG. 17). Catheter **86** is further advanced until balloon **88** is positioned substantially adjacent end portion **62** of graft **60** as shown in FIG. 17. Balloon **88** is then inflated to expand stent **90** to its expanded configuration such that end portion **62** is secured between stent **90** and the sidewall of blood vessel **11** near upstream site **21** as shown in FIG. 18. Balloon **88** is then deflated and catheter **86** is then removed from body **10** via the central lumen of catheter **26**. FIG. 19A shows body **10** after catheter **86** is removed therefrom. Moreover, FIGS. 20A-20C show end portion **62** of graft **60** being forced into the sidewall of blood vessel **11** by stent **90** (in its expanded configuration) such that graft **60** is secured to blood vessel **11** near upstream site **21** at its end portion **62**.

[0089] One stent which may be used, with a minor degree of modification, in carrying out the preferred method of the present invention is disclosed in U.S. Pat. No. 4,776,337 issued to Palmaz on Oct. 11, 1988, the pertinent part of the disclosure of which is herein incorporated by reference. Such modification would be to provide stent **90** with an outer

diameter (in its fully expanded configuration) that is larger than the inner diameter of blood vessel 11 near upstream site 21.

[0090] Note that stent 90 includes a plurality of intersecting bars 71 which span the orifice of graft 60 near end portion 62 as shown in FIG. 208. Intersecting bars 71 which span the above orifice do not substantially hinder blood flow through the graft orifice as demonstrated by the technical article entitled "Intravascular Stents to Prevent Occlusion and Restenosis After Transluminal Angioplasty" which was published in the Mar. 19, 1987 edition of the periodical "The New England Journal of Medicine," the pertinent part of the disclosure of which is herein incorporated by reference.

[0091] Further modification may be readily made to stent 90 whereby stent 90 would have an opening defined in its sidewall which is of similar dimensions to the orifice of graft 60 near end portion 62. Such opening would have no intersecting bars traversing thereover. The above modification would allow stent 90 to be positioned within blood vessel 11 near upstream site 21 wherein the above opening would be substantially superimposed over the orifice of graft 60 near end portion 62. This would allow blood to flow through the connection between blood vessel 11 and graft 60 near upstream site 21 in an unimpeded manner.

[0092] As a possible additional procedure in order to further ensure the integrity of the anastomosis between end portion 62 of graft 60 and blood vessel 11 near upstream site 21, a number of sutures 100 may be tied to the sidewall of blood vessel 11 so as to further secure end portion 62 and stent 90 to the sidewall of blood vessel 11 as schematically shown in FIGS. 19B and 19C. This is accomplished by inserting a laparoscope 102 (which is similar to laparoscope 37) having an open central lumen into human body 10 until its distal end is near upstream site 21. Thereafter, a grasper 104 is advanced through the central lumen of laparoscope 102. The grasper 104 has in its grasp a curved needle 106 having an end of suture 100 attached thereto as shown in FIG. 19D. By manipulating the distal end of grasper 104, the needle 106 and the end of suture 100 are passed through the sidewall of blood vessel 11 and end portion 62 of graft 60 and into blood vessel 11. With continued manipulation, the needle 106 and the end of suture 100 are then brought back out of blood vessel 11. The suture 100 is then tied by standard laparoscopic techniques. One article that refers to standard laparoscopic techniques for tying sutures is entitled "Laparoscopic Choledocholithotomy which was published in Volume 1, Number 2, 1991 edition of the "Journal of Laparoendoscopic Surgery," (Mary Ann Liebert, Inc. Publishers) pages 79-32, and another article that refers to standard laparoscopic techniques for tying sutures is entitled "Improvement in Endoscopic Hernioplasty: Transcutaneous Aquadissection of the Musculofascial Defect and Preperitoneal Endoscopic Patch Repair", which was published in Volume 1, Number 2, 1991 edition of the "Journal of Laparoendoscopic Surgery" (Mary Ann Liebert, Inc. Publishers), pages 83-90, the pertinent part of both of the above articles of which is herein incorporated by reference. A number of other sutures 100 are then tied to the sidewall of blood vessel 11 and end portion 62 of graft 60 in a manner similar to that hereinbefore described so as to further secure end portion 62 to the sidewall of blood vessel 11 as schematically shown in FIGS. 19B and 19C. One or more

additional laparoscopes and associated laparoscopic operating instruments may be employed using standard laparoscopic techniques to assist in the above suturing procedure. Of course, sutures 100 may be sewn in a conventional running fashion so as to secure end portion 62 to the sidewall of blood vessel 11. Also, end portion 62 may be sutured to the sidewall of blood vessel 11 prior to the placement of stent 90 within blood vessel 11.

[0093] Alternatively, the step of forming an anastomosis between end portion 62 of graft 60 and blood vessel 11 near upstream site 21 may be accomplished by suturing alone (i.e. without the use of stent 90). In particular, once end portion 62 of graft 60 is positioned within upstream isolated region 40 near upstream site 21 as shown in FIG. 16, end portion 62 is sutured to the sidewall of blood vessel 11 as schematically shown in FIGS. 19E and 19F. Note that in this alternative step, end portion 62 is sutured to an interior portion of blood vessel 11 as schematically shown in FIGS. 19E and 19F. Also note that end portion 62 is sutured to the sidewall of blood vessel 11 so as to be positioned substantially adjacent a portion of the sidewall of blood vessel 11 which substantially surrounds the arteriotomy. This is accomplished by tying a number of sutures 110 to the sidewall of blood vessel 11 and end portion 62 of graft 60 so as to secure end portion 62 to the sidewall of blood vessel 11 as schematically shown in FIGS. 19E and 19F. The sutures 110 shown in FIGS. 19E and 19F are applied in the same manner as the sutures 100 shown in FIGS. 19B, 19C and 19D were applied as described above. Of course, sutures 110 may be sewn in a conventional running fashion so as to secure end portion 62 to the sidewall of blood vessel 11.

[0094] As a further alternative, the end portion 62 of graft 60 need not be positioned in upstream isolated region 40 but rather end portion 62 may be positioned adjacent the sidewall of blood vessel 11 so that the communicating aperture (i.e. the arteriotomy) in the sidewall of blood vessel 11 near upstream site 21 is aligned with the central passage of graft 60. At this position, end portion 62 is sutured to the sidewall of blood vessel 11 as schematically shown in FIGS. 19G and 19H. Note that in this further alternative step, end portion 62 is sutured to an exterior portion of blood vessel 11 as schematically shown in FIGS. 19G and 19H. Also note that end portion 62 is sutured to the sidewall of blood vessel 11 so as to be positioned substantially adjacent a portion of the sidewall of blood vessel 11 which substantially surrounds the arteriotomy. This is accomplished by tying a number of sutures 120 to the sidewall of blood vessel 11 and end portion 62 of graft 60 so as to secure end portion 62 to the sidewall of blood vessel 11 as schematically shown in FIGS. 19G and 19H. The sutures 120 shown in FIGS. 19G and 19H are applied in the same manner as the sutures 100 shown in FIGS. 19B, 19C and 19D were applied as described above. Of course, sutures 120 may be sewn in a conventional running fashion so as to secure end portion 62 to the sidewall of blood vessel 11.

[0095] The remainder of the preferred method of the present invention is performed using standard surgical techniques. A book which discloses various standard surgical techniques is entitled "Color Atlas of Vascular Surgery," authored by John S. P. Lumley, published by Wolfe Medical Publications Ltd. of Baltimore, Md. (1986), printed by W.S. Cowell, Ltd. of Ipswich, United Kingdom, and the pertinent part of the disclosure of which is herein incorporated by

reference. More specifically, another step according to the preferred method of the present invention comprises isolating a region **50** of the area within blood vessel **11**, located near site **31** downstream of occluded segment **14**, from fluid communication with the rest of the area within the blood vessel. Referring now to FIG. **21**, a pair of surgical clamps **53** and **55** are positioned on blood vessel **11**, one being placed upstream of isolated region **50** and the other being placed downstream of isolated region **50**.

[0096] Another step according to the method of the present invention comprises making an arteriotomy in the sidewall of blood vessel **11**, near downstream site **31**, to create a communicating aperture between downstream isolated region **50** and the outside of the blood vessel **11**. End portion **63** of graft **60** is retracted by surgical forceps (not shown) to expose blood vessel **11** near downstream site **31** (see FIG. **22**). A scalpel puncture is then made in blood vessel **11** near downstream site **31** and thereafter the puncture is extended to the appropriate length with a pair of surgical scissors. FIG. **22** shows the communicating aperture defined in the sidewall of blood vessel **11**, near downstream site **31**.

[0097] Another step according to the preferred method of the present invention comprises forming an anastomosis between end portion **63** of graft **60** and blood vessel **11** near downstream site **31**. Graft **60** is then cut to an appropriate length and thereafter end portion **63** is cut an appropriate shape for attachment to blood vessel **11**. End portion **62** of graft **60** is then surgically stitched with suture **65** to blood vessel **11** near downstream site **31** as shown in FIG. **23**.

[0098] Clamps **53** and **55** are then removed from blood vessel **11**, and moreover balloons **24** and **28** are then deflated and thereafter catheters **22** and **26** are removed from body **10** as shown in FIG. **24**. This allows blood to flow to former upstream isolated region **40**. Once blood flow reaches former upstream isolated region **40**, a flow of blood will enter graft **60** and flow therethrough to former downstream isolated region **50** thereby bypassing occluded segment **14**. Consequently, proper blood flow will now exist in body **10** from point C within aorta **16** to point D within right common femoral artery **18** as a result of performing the above described method of bypass of occluded segment **14**.

[0099] While the invention has been described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiments and methods have been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

[0100] For instance, it is possible that left common femoral artery **30** and left inguinal ligament **29** could be exposed via a surgical incision similar to that of incision **17** as hereinbefore described. Thereafter, a Y-shaped graft could be utilized instead of graft **60** as hereinbefore disclosed. The Y-shaped graft could be advanced in a rolled configuration through laparoscope **37** and delivered to a position substantially adjacent blood vessel **11** similar in manner to that hereinbefore described. An additional laparoscope could be inserted into human body **10** through the opening defined between left common femoral artery **30** and left inguinal ligament **29** in a manner substantially similar to that hereinbefore described with respect to the insertion of laparo-

scope **37** into human body **10**. The additional laparoscope could be advanced toward the left limb of the Y-shaped graft and thereafter used to grasp such limb and pull it toward left common femoral artery **30** and subsequently out of the surgical incision near the left common femoral artery. The end portion of the left limb of the Y-shaped graft could be cut to an appropriate length and shape, and thereafter, an anastomosis could be made between such end portion and left common femoral artery **30** similar in manner to that hereinbefore described with regard to right common femoral artery **18** and end portion **63** of graft **60**.

[0101] Moreover, for example, in an alternative embodiment of the present invention, it is possible that a graft **200** may be utilized which would be similar to graft **60** hereinbefore described, however, both end portions of such graft **200** could be similar in structure to end portion **62** of graft **60** (see FIGS. **29-33**). In other words, each graft end could possess an end portion that is resiliently maintained outwardly extending relative to the body portion of the graft **200**. A catheter **202** could be placed into blood vessel **11** at right femoral artery **18** and advanced toward occluded segment **14** (see FIG. **25**). Prior to arriving at occluded segment **14**, the distal end of the catheter **202** could be manipulated and guided out of blood vessel **11** through a puncture site **204** laparoscopically created in the blood vessel in a manner similar to that hereinbefore described (see FIG. **26**). The catheter **202** could then be advanced substantially adjacent blood vessel **11** over and past occluded segment **14** (see FIG. **27**). One or more additional laparoscopes could assist in the above advancement (see also FIG. **27**). The distal end of the catheter **202** could then be manipulated and guided to reenter blood vessel **11** at a site upstream of occluded segment **14** through a puncture site **206** laparoscopically created in blood vessel **11** in a manner similar to that hereinbefore described (see FIG. **28**). The graft **200** having a resiliently outwardly extending end portion at each end thereof could then be advanced in a rolled configuration through the catheter **202** and delivered to a position substantially adjacent blood vessel **11** similar in manner to that hereinbefore described with respect to graft **60** and laparoscope **37** (see FIGS. **29, 30, 31**). The graft **200** could have a predetermined length equal to a length slightly larger than the distance between the puncture site **206** located upstream of occluded segment **14** and the puncture site **204** located downstream of occluded segment **14**. As a result, the distal end portion of the graft **200** could be positioned within blood vessel **11** at a location upstream of occluded segment **14** and the proximal end portion of the graft **200** could be positioned within blood vessel **11** at a location downstream of occluded segment **14** while the body portion of the graft **200** could be positioned substantially adjacent and outside of blood vessel **11** (see FIG. **29, 30, 31**). Of course, an area within the blood vessel near each end portion of the graft **200** could be isolated from fluid communication with the rest of the area within the blood vessel in a manner substantially similar to that hereinbefore described with respect to upstream isolated region **40**. After being advanced out of the distal end of the catheter **202**, the graft **200** (including each outwardly extending end portion) could revert back to its prerolled configuration as hereinbefore described with respect to graft **60** (see FIG. **32**). Thereafter, a stent **208** could be placed, in an expanded configuration, adjacent each of the end portions of the graft **200** within blood vessel **11** in order to secure such end

portions of the graft **200** to blood vessel **11** as hereinbefore describe with respect to stent **90** and end portion **62** of graft **60** (see FIG. 33).

What is claimed is:

1. A graft assembly, comprising:
  - a graft having an orifice; and
  - a plurality of arms extending away from said orifice of said graft.
2. The graft assembly of claim 1, wherein:
  - said graft defines a fluid lumen; and
  - each of said plurality of arms extend outwardly from said fluid lumen.
3. The graft assembly of claim 1, wherein each of said plurality of arms extends radially outwardly from said orifice.
4. The graft assembly of claim 1, wherein:
  - said graft includes a flange portion; and
  - each of said plurality of arms is positioned in contact with said flange portion.
5. The graft assembly of claim 4, wherein at least a part of each of said plurality of arms is integrally positioned within said flange portion.
6. The graft assembly of claim 1, wherein each of said plurality of arms is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.
7. The graft assembly of claim 1, wherein said plurality of arms are configured to inhibit advancement of said graft in a direction away from a blood vessel with said plurality of arms located adjacent to an internal sidewall of said blood vessel.
8. The graft assembly of claim 1, wherein said plurality of arms is secured to said graft.
9. A graft and delivery assembly, comprising:
  - a delivery sheath defining an interior space;
  - a graft positioned within said interior space of said delivery sheath; and
  - a spring assembly positioned within said interior space of said delivery sheath, said spring assembly being in a compressed state in response to said spring assembly being located within said interior space of said delivery sheath.
10. The assembly of claim 9, wherein:
  - said spring assembly includes a plurality of spring arms secured to said graft;
  - said graft defines a fluid lumen; and
  - said spring assembly is configured with each of said plurality of arms extending outwardly from said fluid lumen responsive to said spring assembly being located outside of said delivery sheath.
11. The graft assembly of claim 9, wherein:
  - said graft includes a flange portion; and
  - each of said plurality of spring arms is positioned in contact with said flange portion.
12. The graft assembly of claim 11, wherein each of said plurality of spring arms is integrally positioned within said flange portion.

13. The graft assembly of claim 11, wherein said delivery sheath is a laparoscope.

14. The graft assembly of claim 10, in which the spring assembly includes a plurality of spring arms that extend radially outwardly from said orifice when said spring assembly is advanced to a location outside of said delivery sheath.

15. The graft assembly of claim 14, wherein each of said plurality of spring arms is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.

16. A graft assembly, comprising:

- a blood flow conduit having an orifice at an end of the conduit; and

- a plurality of struts each extending outwardly from said orifice.

17. The graft assembly of claim 16, wherein:

- said graft includes a flange portion at said end; and

- each of said plurality of struts is positioned in contact with said flange portion.

18. The graft assembly of claim 17, wherein each of said plurality of struts is integrally positioned within said flange portion.

19. The graft assembly of claim 16, wherein each of said plurality of struts extends radially outwardly from said orifice.

20. The graft assembly of claim 16, wherein each of said plurality of struts is configured to move from a first position in relation to said blood flow conduit to a second position in relation to said blood flow conduit due to spring action.

21. The graft assembly of claim 16, wherein each of said plurality of struts is configured to move from a first position in relation to said blood flow conduit to a second position in relation to said blood flow conduit in response to said plurality of struts being advanced out of a delivery device.

22. The graft assembly of claim 20, wherein each of said plurality of struts extends radially outwardly from said orifice of said graft with each of said plurality of struts positioned in said second position in relation to said graft.

23. The graft assembly of claim 16, wherein said plurality of struts are configured to inhibit advancement of said blood flow conduit in a direction away from a blood vessel with said plurality of struts located adjacent to an internal sidewall of said blood vessel.

24. A medical assembly, comprising:

- a delivery device having a passageway extending there-through; and

- a graft assembly including (i) a graft positioned within said passageway of said delivery device, and (ii) a plurality of struts secured to said graft.

25. The medical assembly of claim 24, wherein:

- each of said plurality of struts includes (i) an inner end located adjacent to an orifice of said graft, and (ii) an outer end which is spaced apart from said orifice of said graft.

26. The assembly of claim 24, wherein said graft is a synthetic graft.

27. The graft assembly of claim 24, wherein said delivery device is a laparoscope.

28. The graft assembly of claim 24, wherein:  
said graft includes a flange portion; and  
each of said plurality of struts is positioned in contact with said flange portion.
29. The graft assembly of claim 28, wherein each of said plurality of struts is integrally positioned within said flange portion.
30. The graft assembly of claim 24, wherein each of said plurality of struts is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.
31. The graft assembly of claim 24, wherein each of said plurality of struts is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action in response to removal of said plurality of struts from said passageway of said delivery device.
32. The graft assembly of claim 24, wherein said plurality of struts is configured to inhibit advancement of said graft in a direction away from a blood vessel due to physical interaction between said plurality of struts and said blood vessel with said plurality of arms located adjacent to an internal sidewall of said blood vessel.
33. A graft assembly, comprising:  
a graft having a fluid lumen; and  
a plurality of braces extending outwardly from an end of said graft.
34. The graft assembly of claim 33, wherein:  
said graft includes an orifice at said end; and  
each of said plurality of braces extends outwardly from said orifice.
35. The graft assembly of claim 34, wherein each of said plurality of braces extends radially outwardly from said orifice.
36. The graft assembly of claim 33, wherein:  
said graft includes a flange portion; and  
each of said plurality of braces is positioned in contact with said flange portion.
37. The graft assembly of claim 49, wherein at least a part of each of said plurality of braces is integrally positioned within said flange portion.
38. The graft assembly of claim 33, wherein each of said plurality of braces is maintained resiliently outwardly extending in a direction transverse to said fluid lumen.
39. The graft assembly of claim 33, wherein each of said plurality of braces is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.
40. The graft assembly of claim 35, wherein said plurality of braces is configured to inhibit advancement of said graft away from a blood vessel with said plurality of braces located adjacent to an internal sidewall of said blood vessel.
41. A graft assembly configured to be positioned in relation to an arteriotomy defined in a blood vessel, comprising:  
a graft having an orifice configured to align with an arteriotomy so that blood exiting an arteriotomy transfers to said graft through said orifice; and  
a plurality of arms extending away from said orifice of said graft, each of said plurality of arms being configured to lie adjacent a sidewall of said blood vessel with said orifice of said graft aligned with said arteriotomy.
42. The graft assembly of claim 41, wherein each of said plurality of arms extends radially outwardly from said orifice of said graft.
43. The graft assembly of claim 41, wherein:  
said graft includes a flange portion; and  
each of said plurality of arms is positioned in contact with said flange portion.
44. The graft assembly of claim 43, wherein each of said plurality of arms is integrally positioned within said flange portion.
45. The graft assembly of claim 41, wherein:  
said graft has a fluid lumen; and  
each of said plurality of arms extends in a direction transverse to said fluid lumen.
46. The graft assembly of claim 41, wherein each of said plurality of arms is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.
47. The graft assembly of claim 41, wherein each of said plurality of arms is configured to move from a first position in relation to said graft to a second position in relation to said graft in response to said plurality of arms being advanced out of an internal space of a delivery device.
48. The graft assembly of claim 41, wherein said plurality of arms are configured to inhibit advancement of said graft in a direction away from a blood vessel due to physical interaction between said plurality of arms and said blood vessel with said plurality of arms located adjacent to an internal sidewall of said blood vessel.
49. A graft and delivery assembly, comprising:  
a graft having an orifice configured to align with an arteriotomy defined in a blood vessel so that blood exiting said arteriotomy transfers to said graft through said orifice;  
a plurality of support members extending away from said orifice of said graft, each of said plurality of support members being configured to lie adjacent a sidewall of said blood vessel with said orifice aligned with said arteriotomy; and a delivery device configured to receive said graft within an interior space thereof.
50. The graft assembly of claim 49, wherein each of said plurality of support members is configured to move from a first position in relation to said graft to a second position in relation to said graft in response to said plurality of support members being disposed out of said delivery device.
51. The graft assembly of claim 50, wherein each of said plurality of support members extends radially outwardly from said orifice of said graft with each of said plurality of support members positioned in said second position in relation to said graft.
52. The graft assembly of claim 49, wherein:  
said graft includes a flange portion, and  
each of said plurality of support members is positioned in contact with said flange portion.

53. The graft assembly of claim 52, wherein each of said plurality of support members is integrally positioned within said flange portion.

54. The graft assembly of claim 49, wherein said delivery device is a laparoscope.

55. The graft assembly of claim 49, wherein each of said plurality of support members is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action.

56. The graft assembly of claim 49, wherein each of said plurality of support members is configured to move from a first position in relation to said graft to a second position in relation to said graft due to spring action in response to removal of said plurality of support members from said internal space of said delivery device.

57. The graft assembly of claim 49, wherein said delivery device is further configured to receive said plurality of support members within said interior space of said delivery device.

58. The graft assembly of claim 49, wherein said plurality of support members is configured to inhibit advancement of said graft away from said blood vessel due to physical interaction between said plurality of support members and said blood vessel with said plurality of support members located adjacent to an internal sidewall of said blood vessel.

59. A graft and delivery system, comprising:

a delivery device having a passageway defined therein; and

a graft located within the passageway of the delivery device.

60. The system of claim 59, wherein the delivery device includes a tubular shape.

61. The system of claim 59, wherein:

the graft has a first end, a second end, and a body;

the first end of the graft is located at a first position in the passageway;

the second end of the graft is located at a second position in the passageway; and

the body of the graft is interposed between the first position and the second position in the passageway.

62. The system of claim 59, wherein:

the passageway includes a distal opening and a proximal opening; and the graft extends within the passageway between the distal opening and the proximal opening.

63. The system of claim 59, wherein the delivery device is a laparoscope.

64. The system of claim 59, wherein an end of the graft is located within the passageway adjacent to a distal end of the delivery device.

65. A blood flow conduit and delivery system, comprising:

a delivery device having an interior space defined therein; and

a blood flow conduit located within the interior space of the delivery device.

66. The system of claim 65, wherein the delivery device is configured in a tubular shape.

67. The system of claim 65, wherein:

the blood flow conduit has a first end, a second end, and a body;

the first end of the blood flow conduit is located at a first position in the interior space;

the second end of the blood flow conduit is located at a second position spaced from the first position in the interior space; and

the body of the blood flow conduit is interposed between the first position and the second position in the interior space.

68. The system of claim 65, wherein:

the delivery device includes a distal opening and a proximal opening; and

the interior space extends between the distal opening and the proximal opening.

69. The system of claim 65, wherein the delivery device is a laparoscope.

70. The system of claim 65, wherein an end of the blood flow conduit located within the interior space is disposed adjacent to a distal end of the delivery device.

71. A graft and delivery system, comprising:

a delivery device; and

a graft including its full length disposed within the delivery device.

72. The system of claim 71, wherein the delivery device includes a tubular shape.

73. The system of claim 71, wherein:

the graft has a first end, a second end, and a body;

the first end of the graft is located at a first position in the delivery device;

the second end of the graft is located at a second position spaced from the first position in the delivery device; and

the body of the graft is interposed between the first position and the second position in the delivery device.

74. The system of claim 71, wherein:

the delivery device includes a distal opening and a proximal opening; and

a passage extends between the distal opening and the proximal opening.

75. The system of claim 71, wherein the delivery device is a laparoscope.

76. The system of claim 71, wherein an end of the graft is disposed within the delivery service adjacent to a distal end of the delivery device.

77. A graft and delivery system, comprising:

a delivery sheath having a passageway defined therein; and

a graft located within the passageway of the delivery sheath.



**78.** The system of claim 77, wherein the delivery sheath is configured in a tubular shape.

**79.** The system of claim 77, wherein:

the graft has a first end, a second end, and a body;

the first end of the graft is located at a first position in the passageway;

the second end of the graft is located at a second position spaced from the first position in the passageway; and

the body of the graft is interposed between the first position and the second position in the passageway.

**80.** The system of claim 77, wherein:

the delivery sheath includes a distal opening and a proximal opening; and

the passageway extends between the distal opening and the proximal opening.

**81.** The system of claim 77, wherein the delivery sheath is a laparoscope.

**82.** The system of claim 77, wherein an end of the graft is disposed within the passageway adjacent to a distal end of the delivery sheath.

**83.** A blood flow conduit and a delivery system, comprising:

a medical instrument having an interior space, defined therein; and

a blood flow conduit located within the interior space of the medical instrument.

**84.** The system of claim 83, wherein the medical instrument includes a tubular shape.

**85.** The system of claim 83, wherein:

the blood flow conduit has a first end, a second end, and a body;

the first end of the blood flow conduit is located at a first position in the interior space;

the second end of the blood flow conduit is located at a second position spaced from the first position in the interior space; and

the body of the blood flow conduit is interposed between the first position and the second position in the interior space.

**86.** The system of claim 83, wherein:

the medical instrument includes a distal opening and a proximal opening; and

the interior space extends between the distal opening and the proximal opening.

**87.** The system of claim 83, wherein the medical instrument is a laparoscope.

**88.** The system of claim 83, wherein an end of the blood flow conduit located within the interior space is disposed adjacent to a distal end of the medical instrument.

\* \* \* \* \*

专利名称(译)	绕过嫁接系统和装置		
公开(公告)号	<a href="#">US20070129662A1</a>	公开(公告)日	2007-06-07
申请号	US11/673053	申请日	2007-02-09
[标]申请(专利权)人(译)	马奇诺托马斯·		
申请(专利权)人(译)	马奇诺托马斯·		
当前申请(专利权)人(译)	马奇诺托马斯·		
[标]发明人	MAGINOT THOMAS J		
发明人	MAGINOT, THOMAS J.		
IPC分类号	A61F2/06 A61B17/11 A61F2/82 A61F2/88 A61F2/90		
CPC分类号	A61B17/11 A61B2017/1107 A61F2/06 A61F2/064 A61F2/07 A61F2/856 A61F2/88 A61F2/90 A61F2/954 A61F2/958 A61F2002/065 A61F2002/821 Y10S623/902 Y10S623/903 A61F2002/075 A61F2220/0075		
其他公开文献	US7753946		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

公开了用于旁路移植的微创技术。例如，在旁路移植手术期间将移植物的末端部分植入患者体内的方法包括以下步骤：(i) 在所述身体的循环系统内推进医疗器械，(ii) 引导远端在所述医疗器械推进步骤之后，通过所述循环系统中限定的开口从所述循环系统中取出所述医疗器械，(iii) 在所述引导步骤之后使所述移植物的所述端部在所述医疗器械内前进，以及(iv) 固定所述端部在所述端部推进步骤之后，所述移植物的的一部分到所述循环系统的血管中。

