



US 20080319456A1

(19) **United States**(12) **Patent Application Publication**
Hart(10) **Pub. No.: US 2008/0319456 A1**(43) **Pub. Date: Dec. 25, 2008**(54) **SURGICAL STAPLE-CLIP AND APPLIER**(52) **U.S. CL. 606/142; 606/151**(75) **Inventor: Charles C. Hart, Summerville, SC (US)**(57) **ABSTRACT**

Correspondence Address:


APPLIED MEDICAL RESOURCES CORPORATION**22872 Avenida Empresa****Rancho Santa Margarita, CA 92688 (US)**(73) **Assignee: Applied Medical Resources Corporation, Rancho Santa Margarita, CA (US)**(21) **Appl. No.: 12/200,582**(22) **Filed: Aug. 28, 2008****Related U.S. Application Data**

(62) Division of application No. 10/533,398, filed on Apr. 30, 2005, filed as application No. PCT/US03/40318 on Dec. 16, 2003.

(60) Provisional application No. 60/434,344, filed on Dec. 17, 2002.

Publication Classification(51) **Int. Cl.**
A61B 17/08 (2006.01)
A61B 17/10 (2006.01)

A surgical staple-clip including a clip component and a securing member is used in a wide range of surgical procedures. The staple-clip may be introduced to a surgical site in an un-assembled condition through a small port or trocar. An applier for the staple-clip comprising a pair of opposed jaw-like channels is provided to position and apply the clip component and the securing member. The clip component is positioned around a target tissue and is compressed or clamped upon the tissue using only the force required for a specific surgical procedure such as occlusion, ligation or fixation. When the clip component is properly applied, the securing member is urged forward and over the clip component to secure the staple-clip. The clip component may include traction enhancement features such as surface interruptions, bumps, valleys and ridges. With the staple-clip of the invention, the force required to constrict or occlude the tissue is separate from the force required to secure and maintain the staple-clip in position and, as a result, the body tissue is not over-compressed and nourishment to the body tissue is maintained. Other aspects of the invention include thumb actuated clip appliers for use in hand assisted laparoscopy (HAL). In one embodiment, a clip applier includes a handle and a thumb actuated mechanism that is used to slidably release clips onto a body tissue or vessel by sliding the thumb actuated mechanism forward and backward using only one hand. In another aspect of the invention, a two-stage clip is disclosed having a clip component and a staple component for securing the clip after it has been properly positioned.

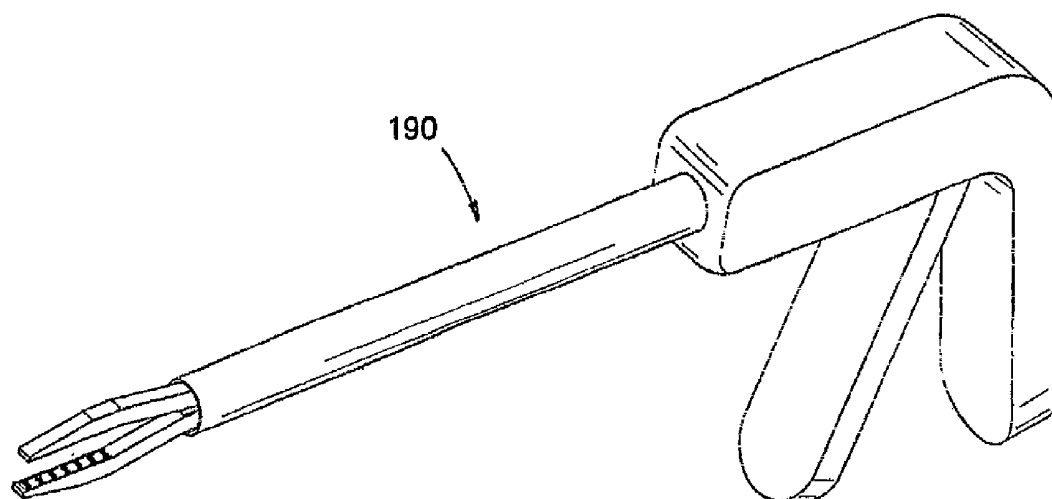

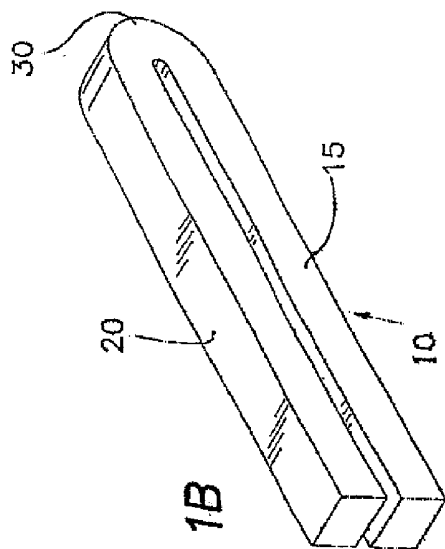


FIG. 1B

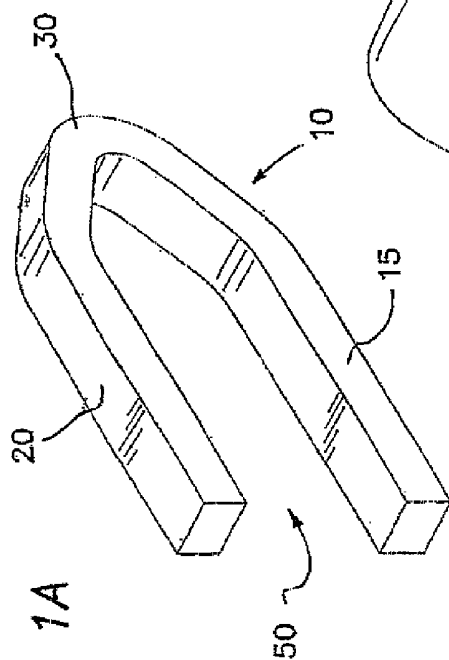


FIG. 1A

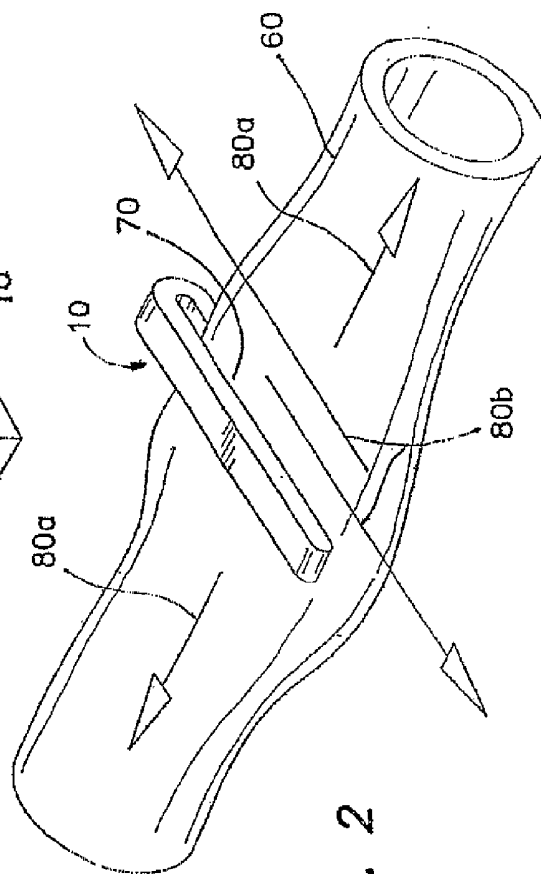


FIG. 2

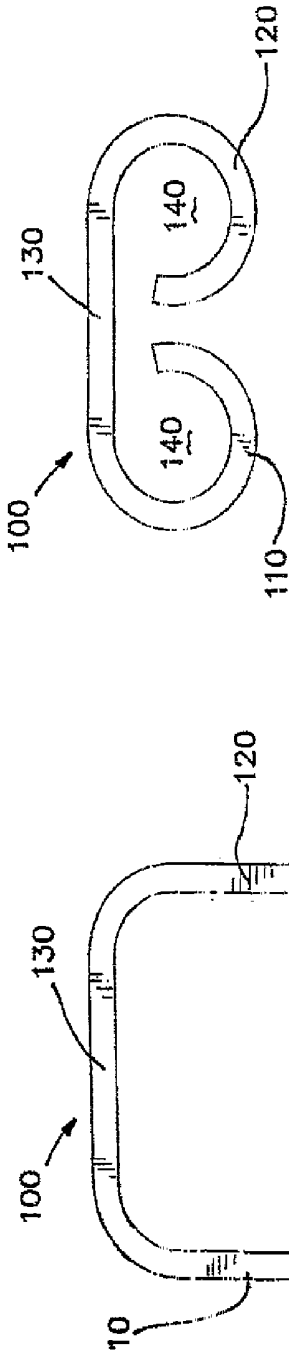


FIG. 3A

FIG. 3B

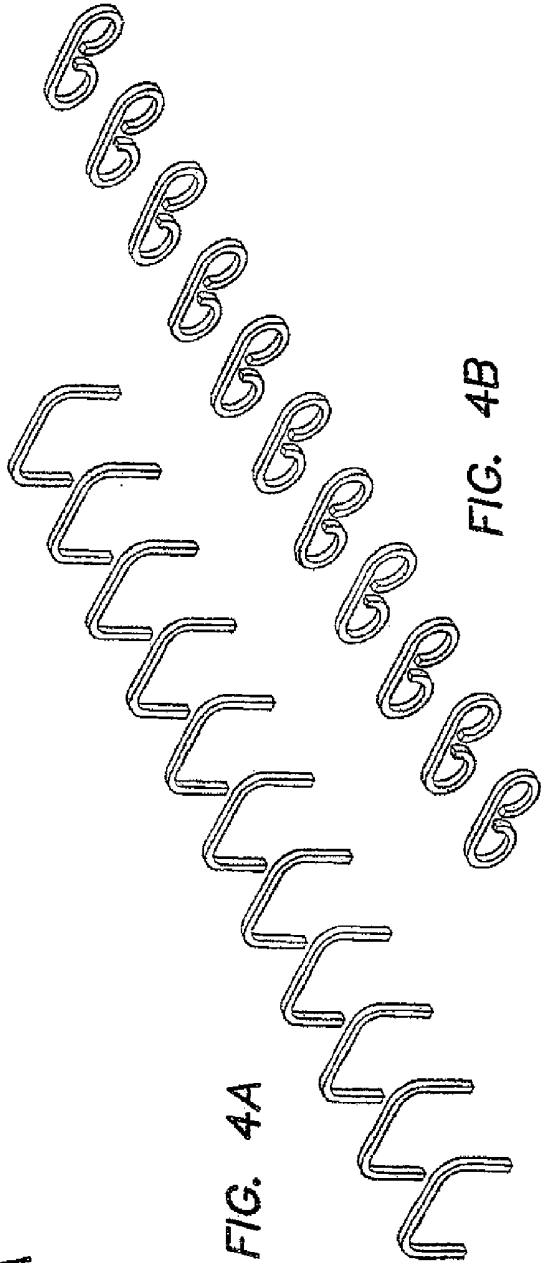
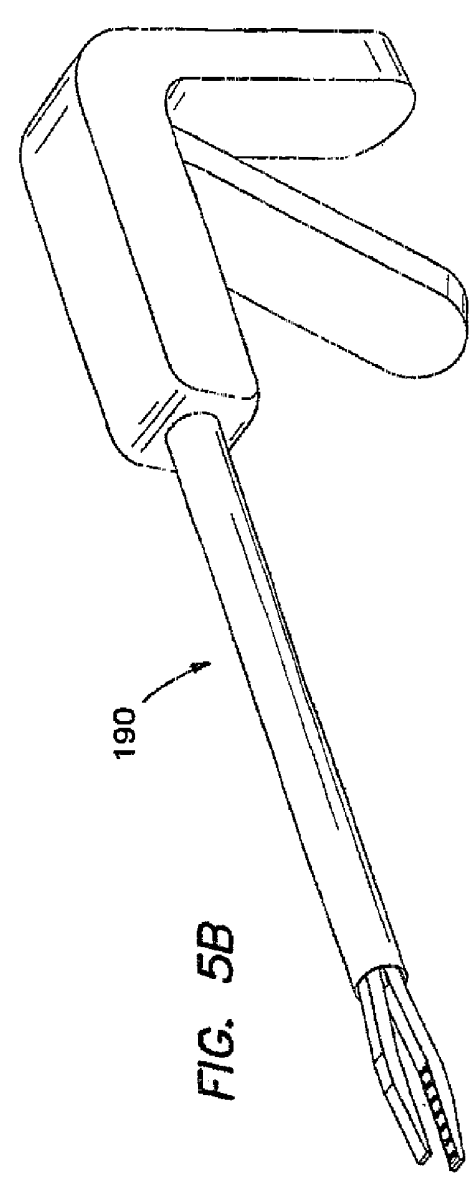
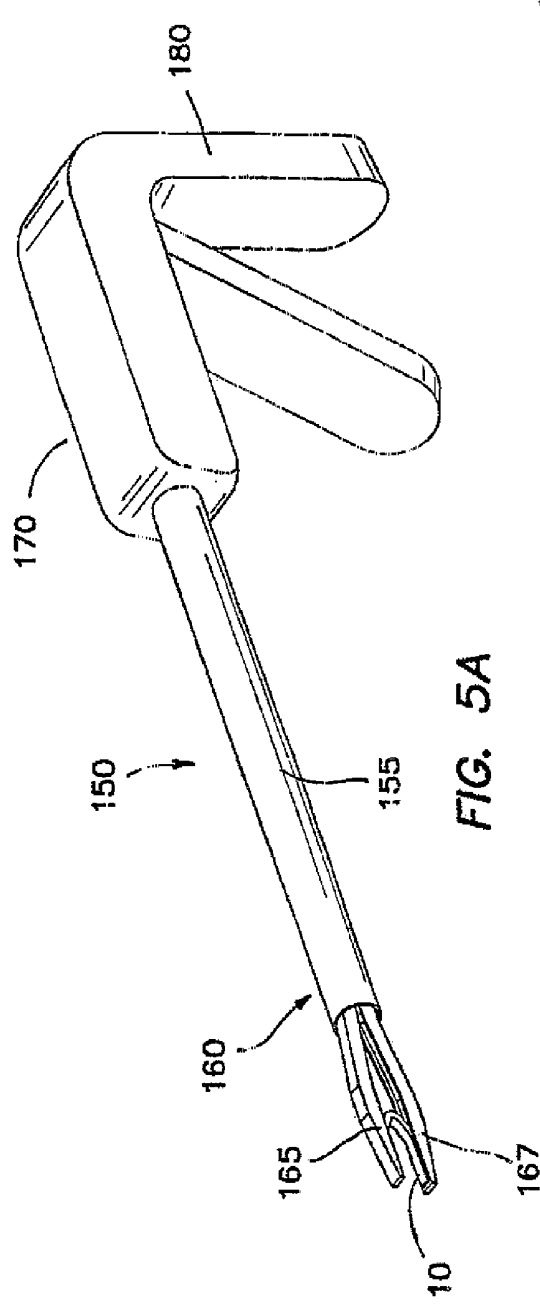
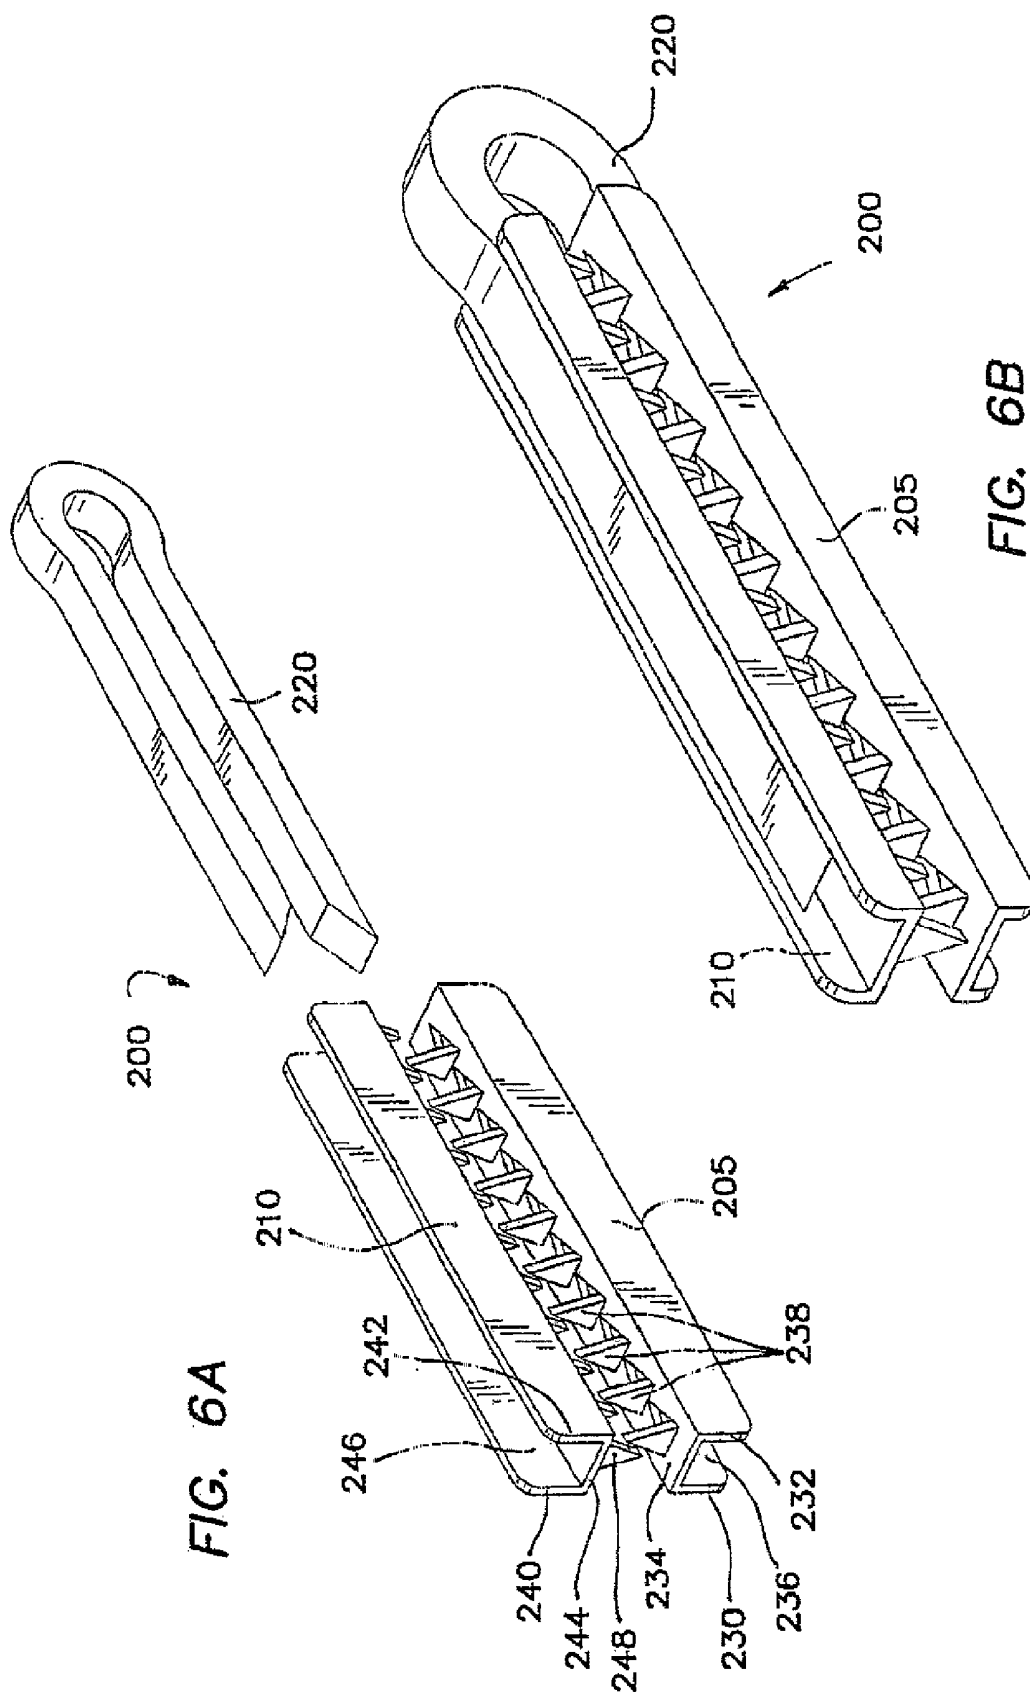


FIG. 4A

FIG. 4B





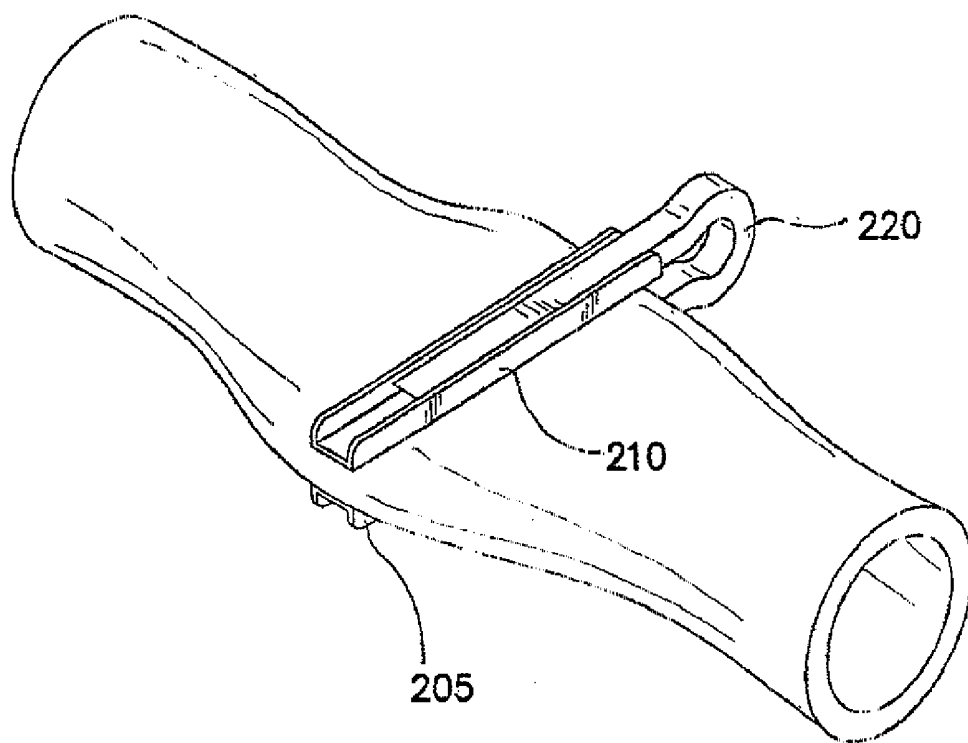
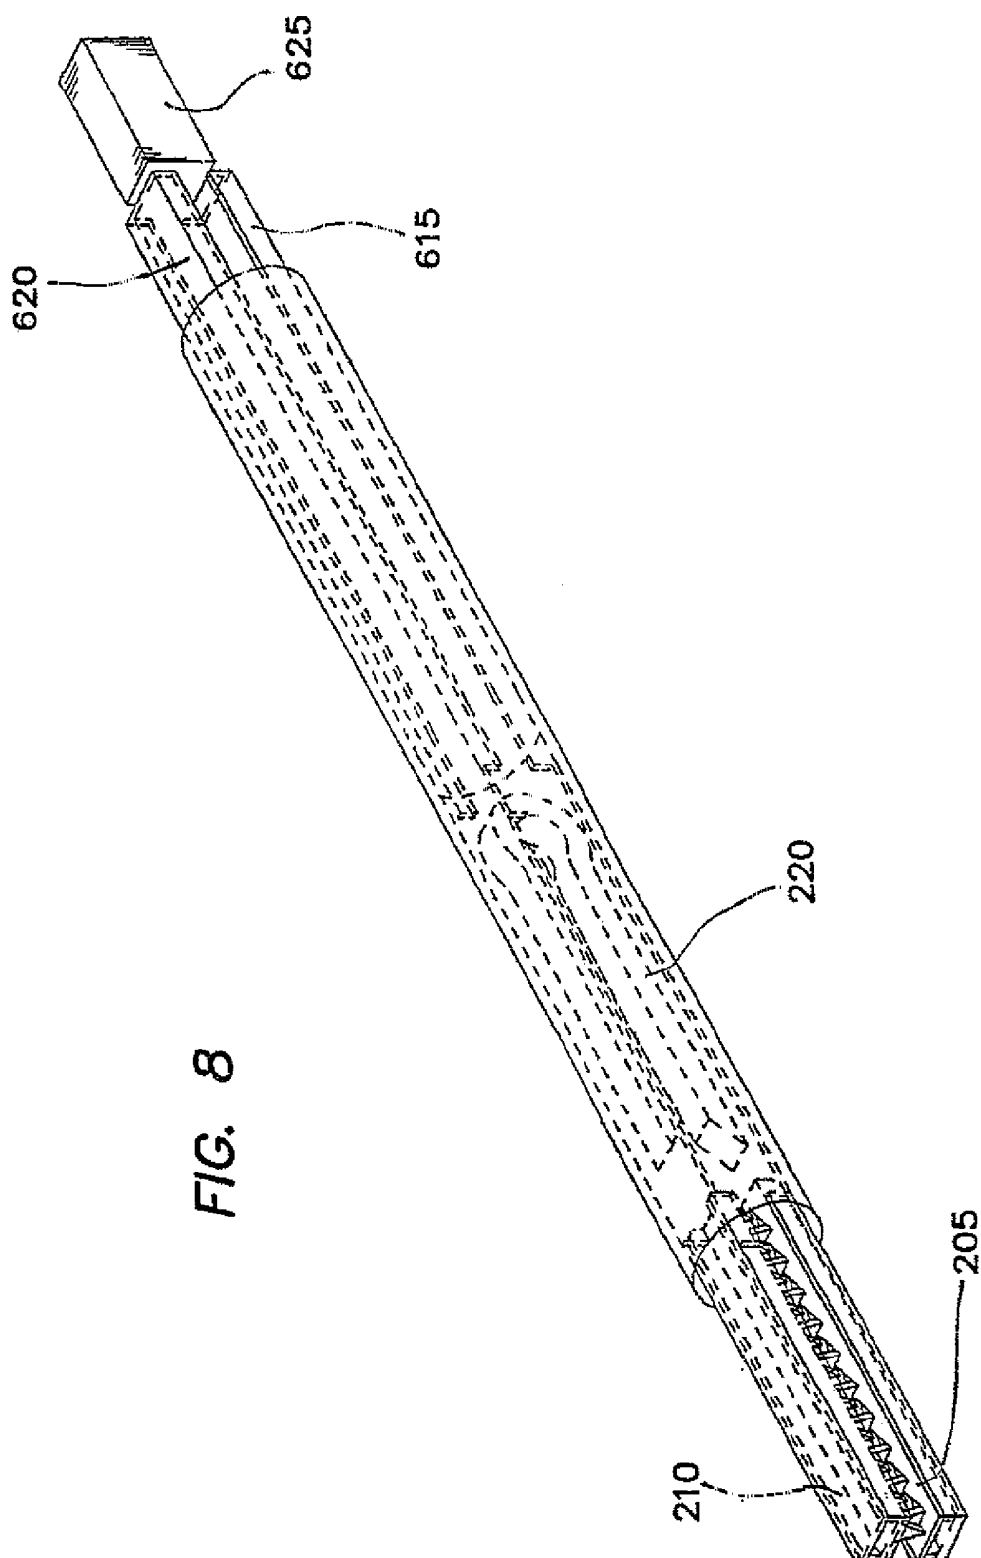


FIG. 7



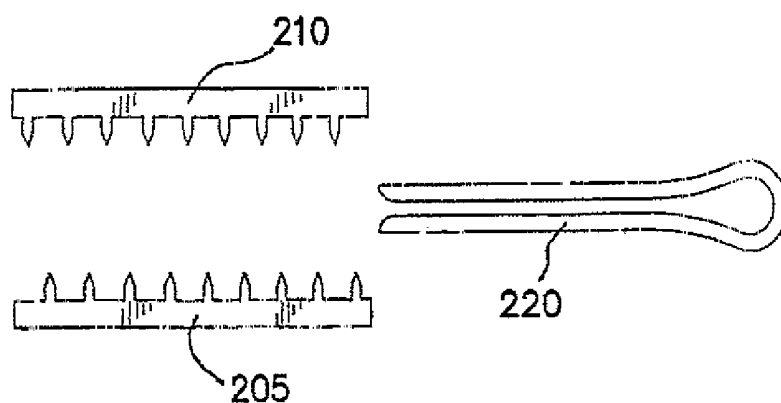


FIG. 9A

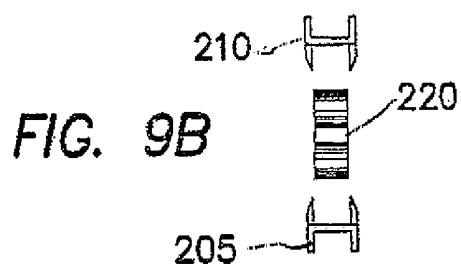


FIG. 9B

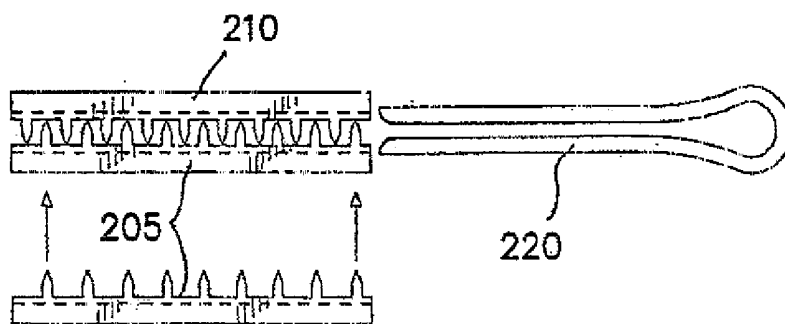


FIG. 9C

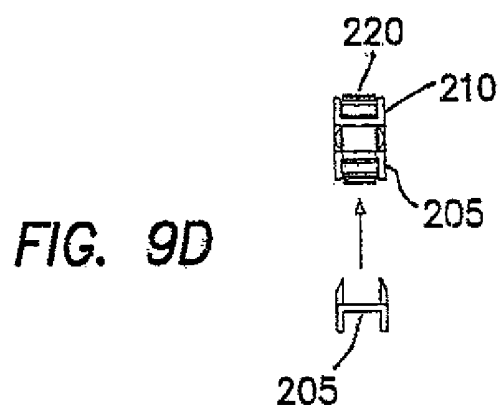


FIG. 9D

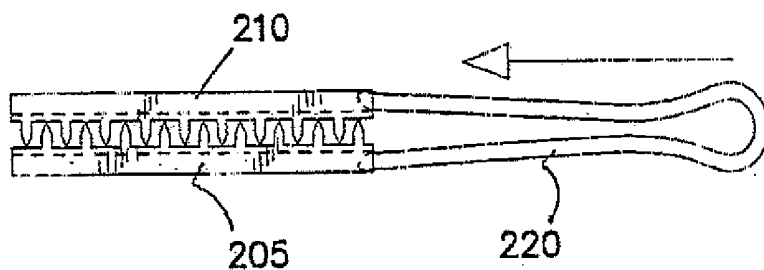


FIG. 9E

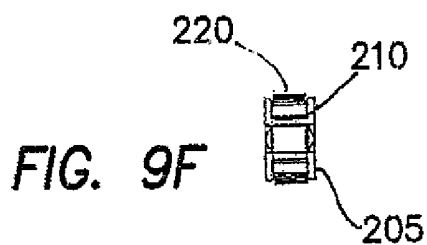


FIG. 9F

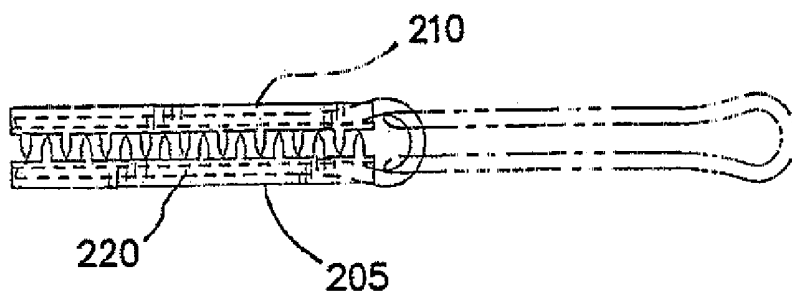


FIG. 9G

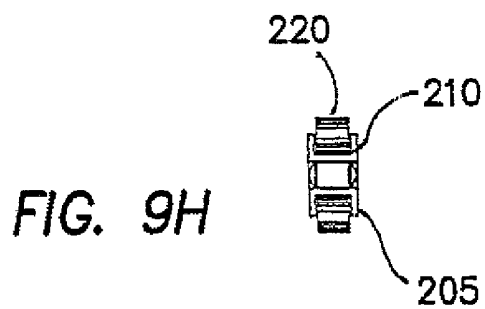


FIG. 9H

FIG. 10A

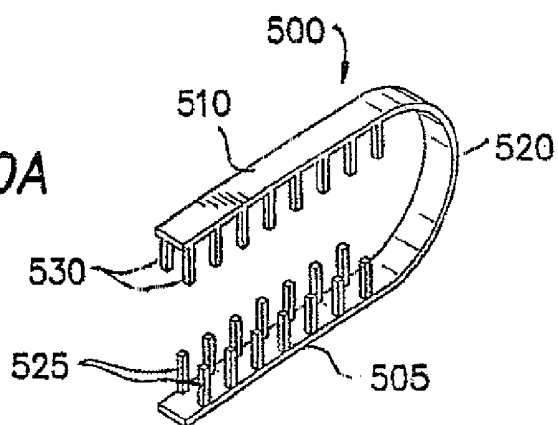


FIG. 10C


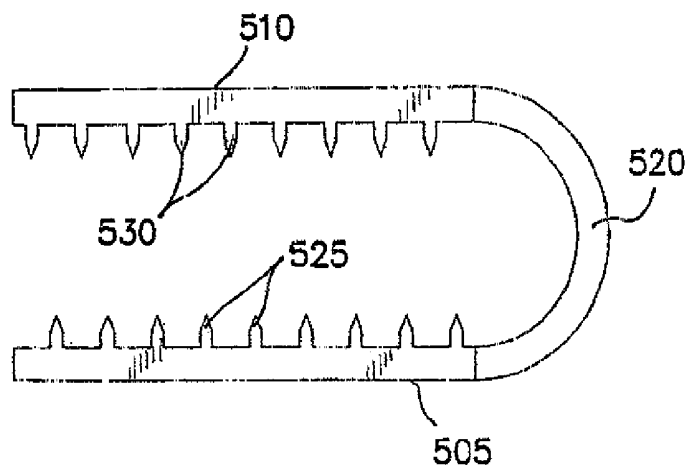
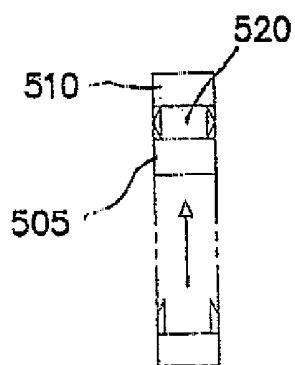
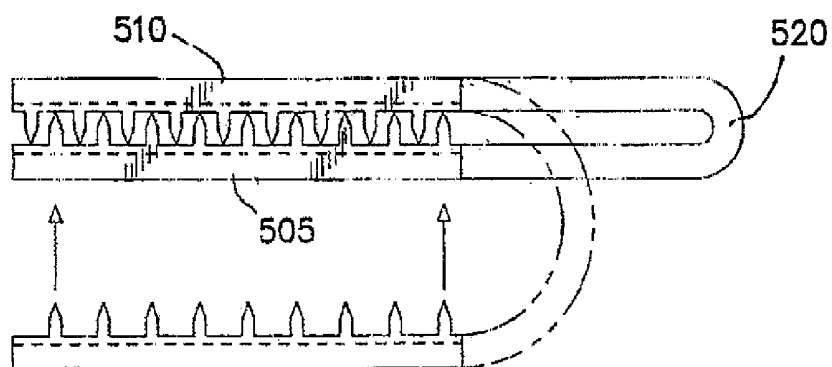
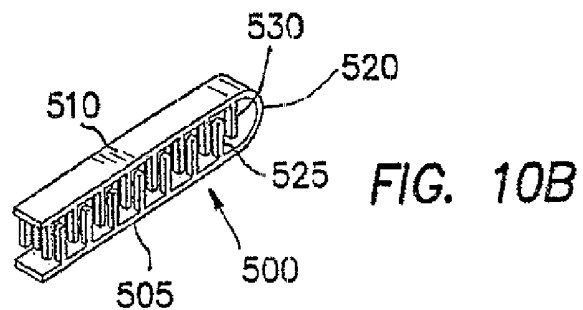
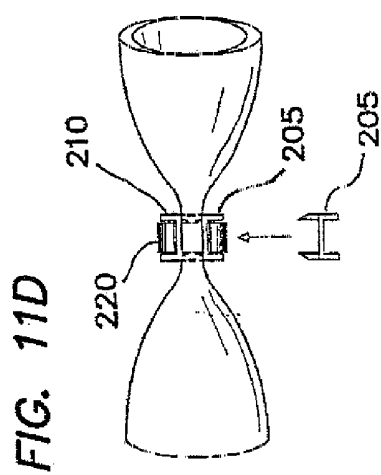
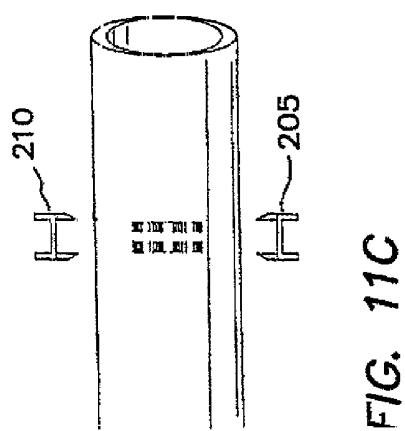
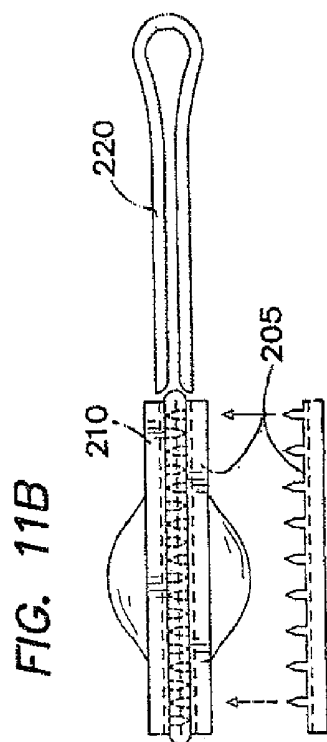
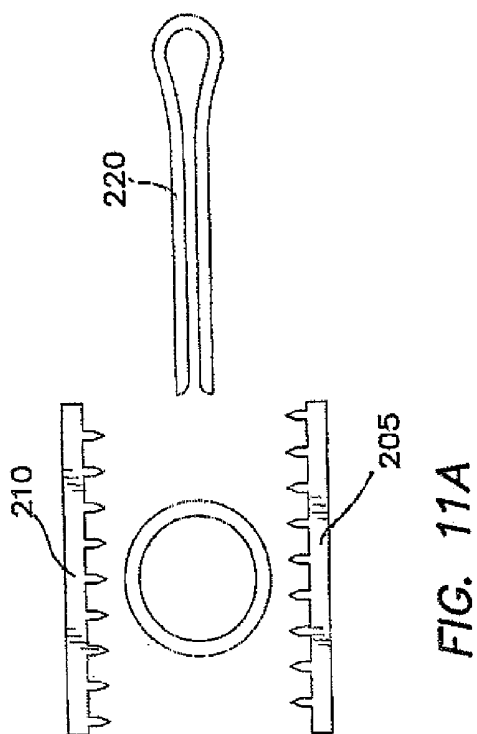
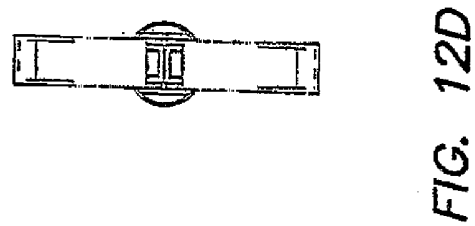
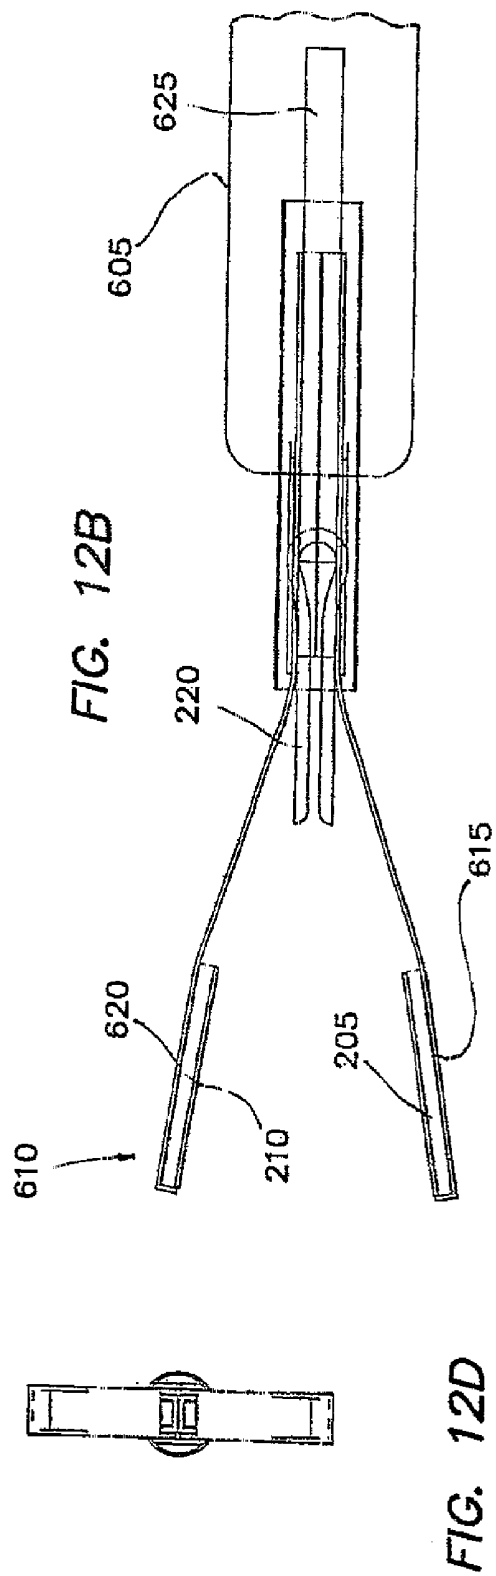
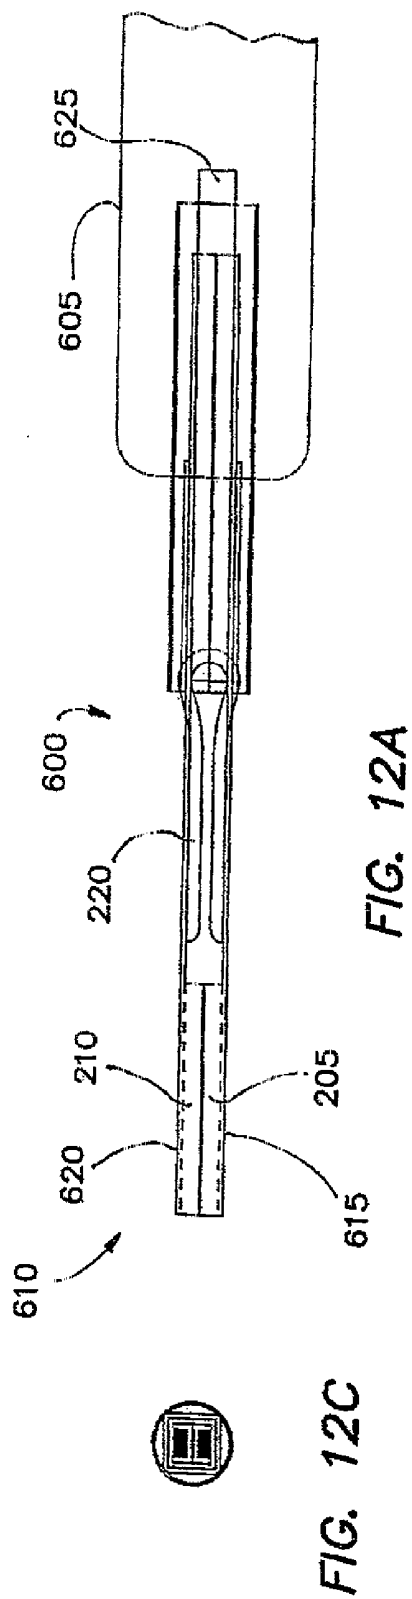


FIG. 10E







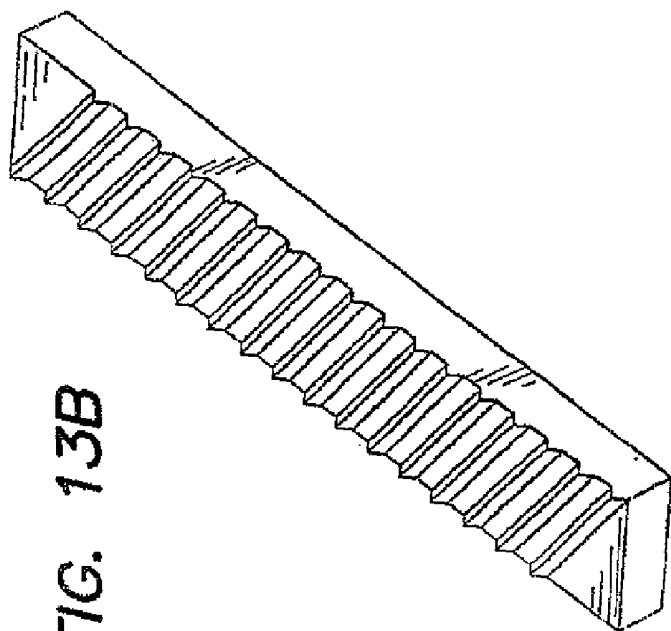


FIG. 13B

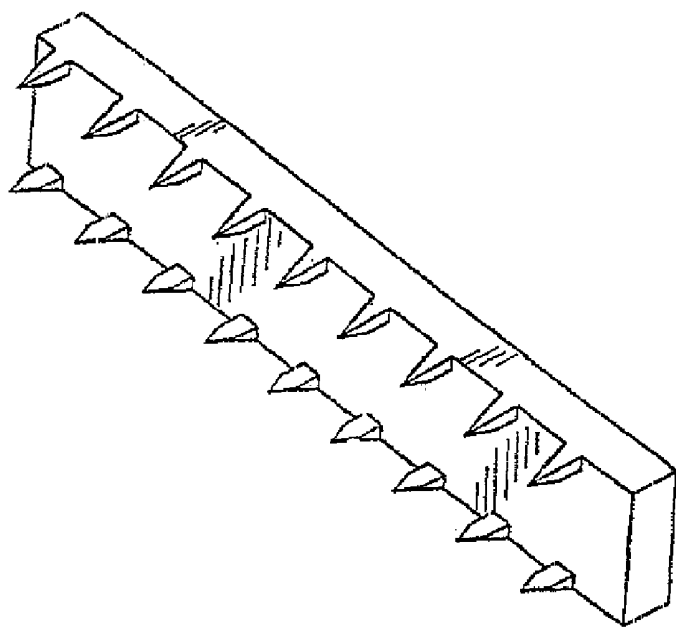


FIG. 13A

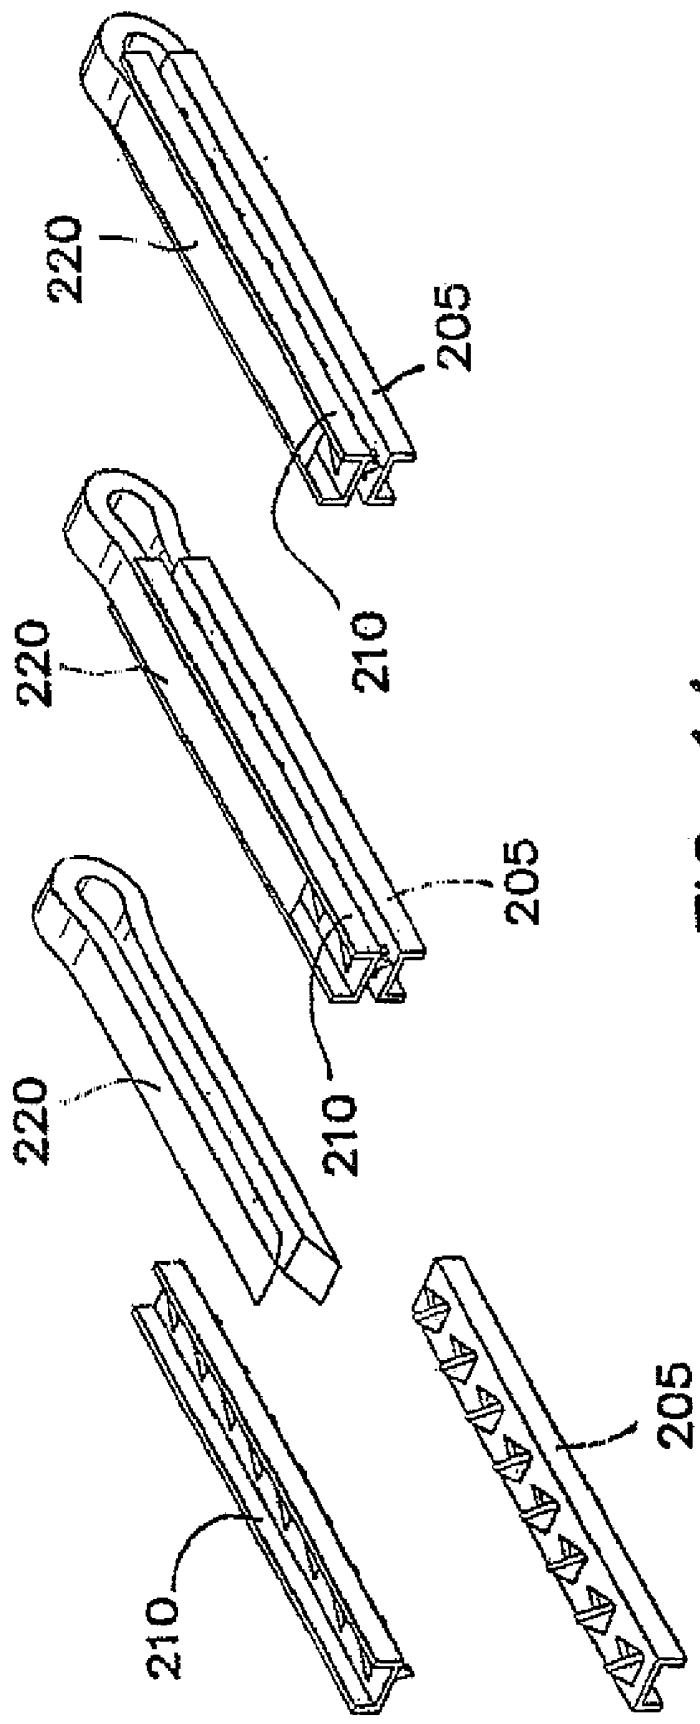
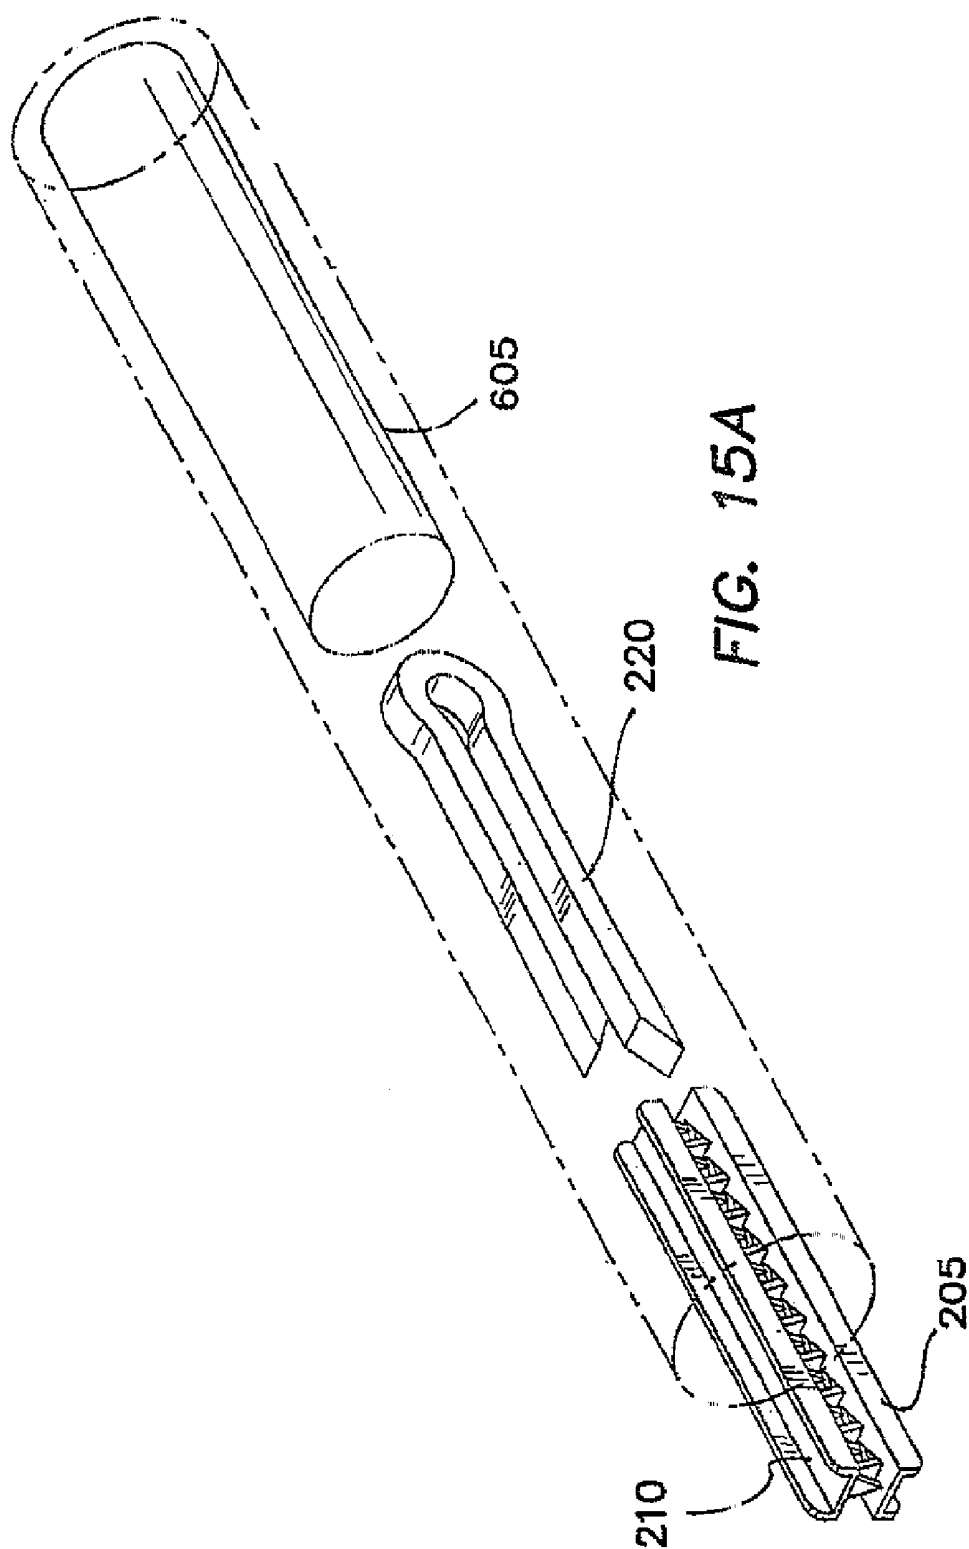
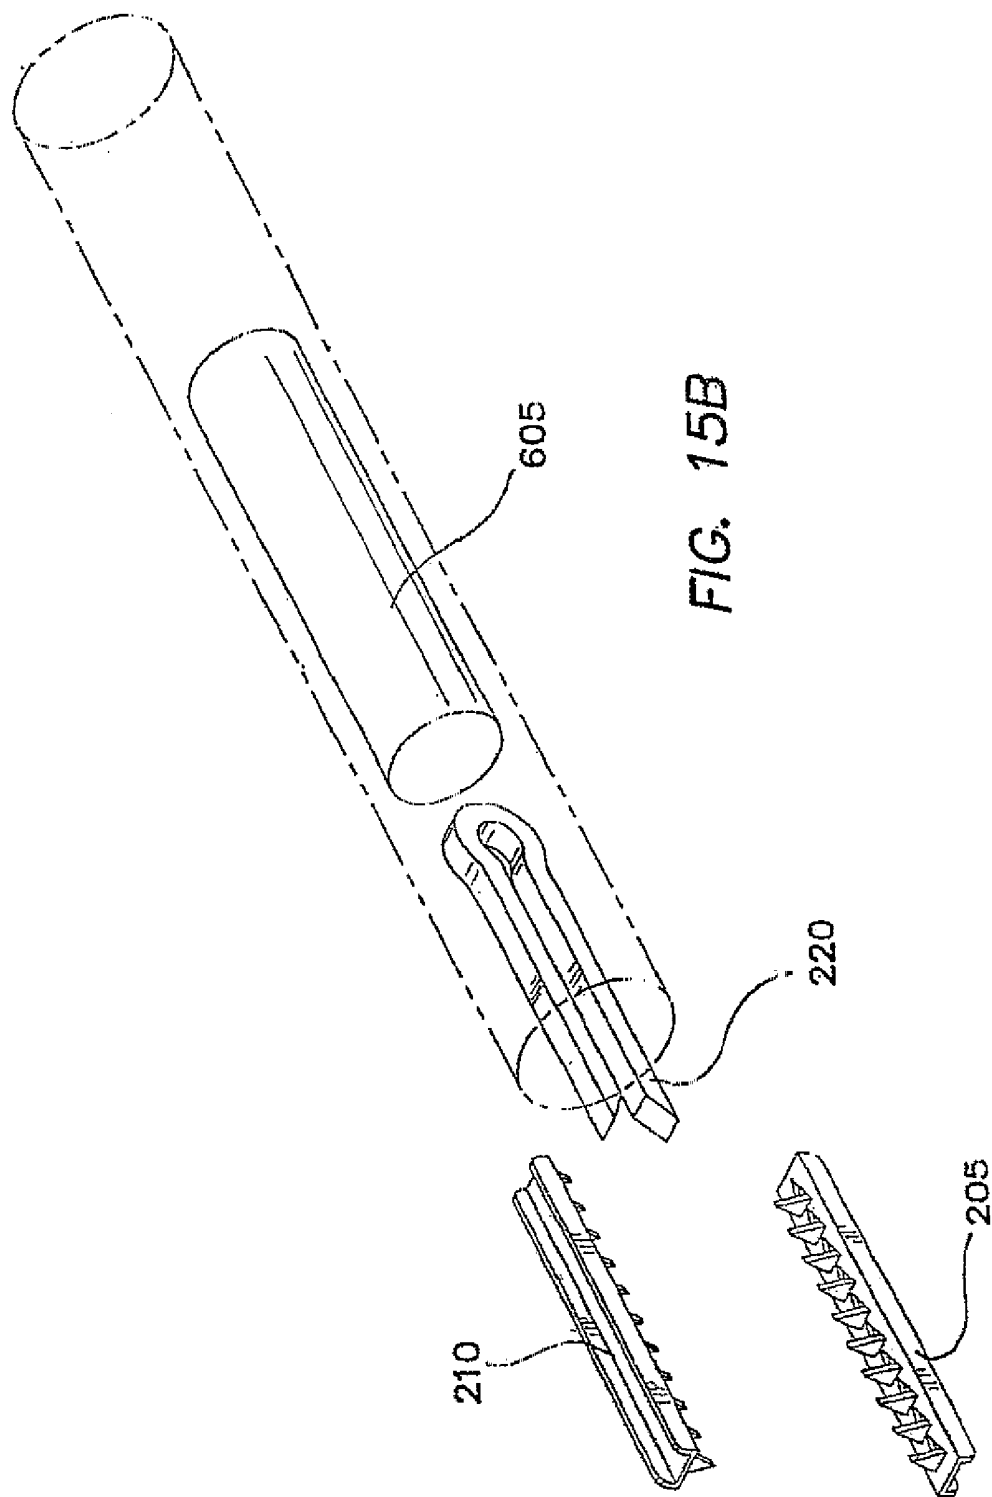
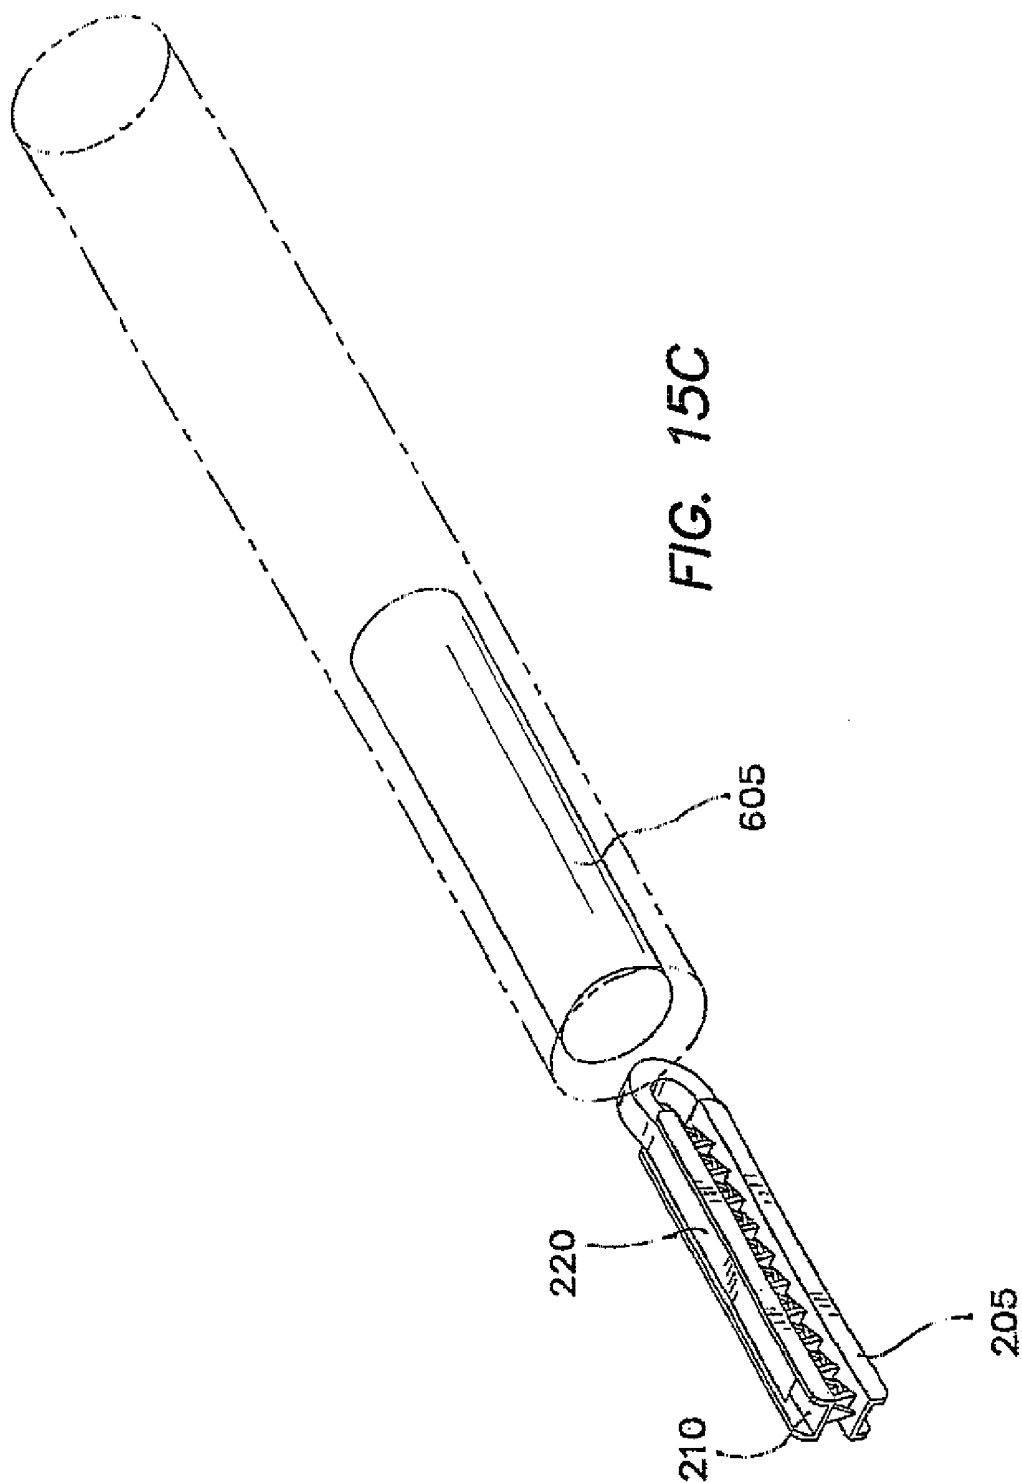
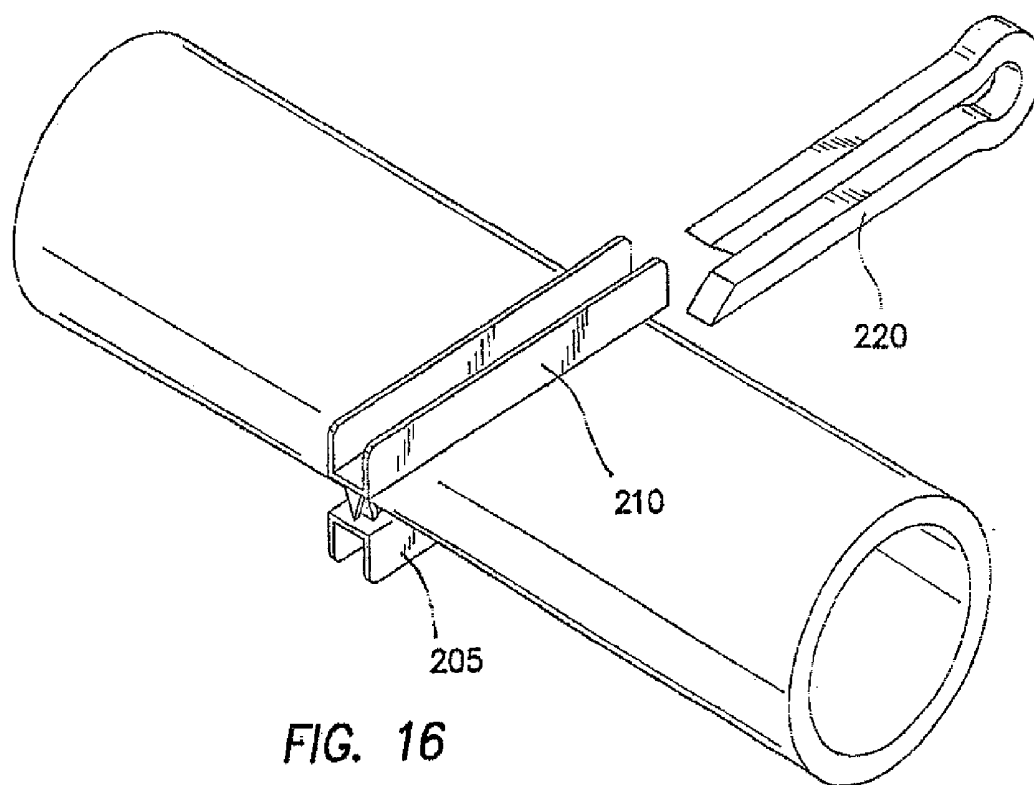


FIG. 14









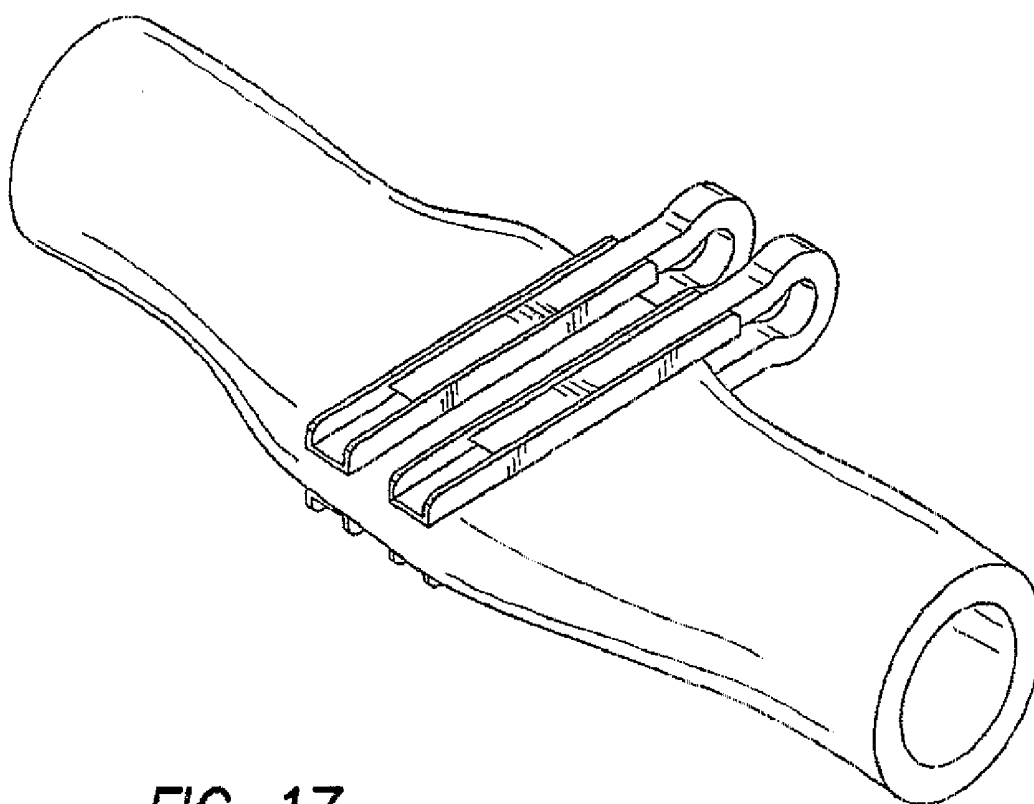
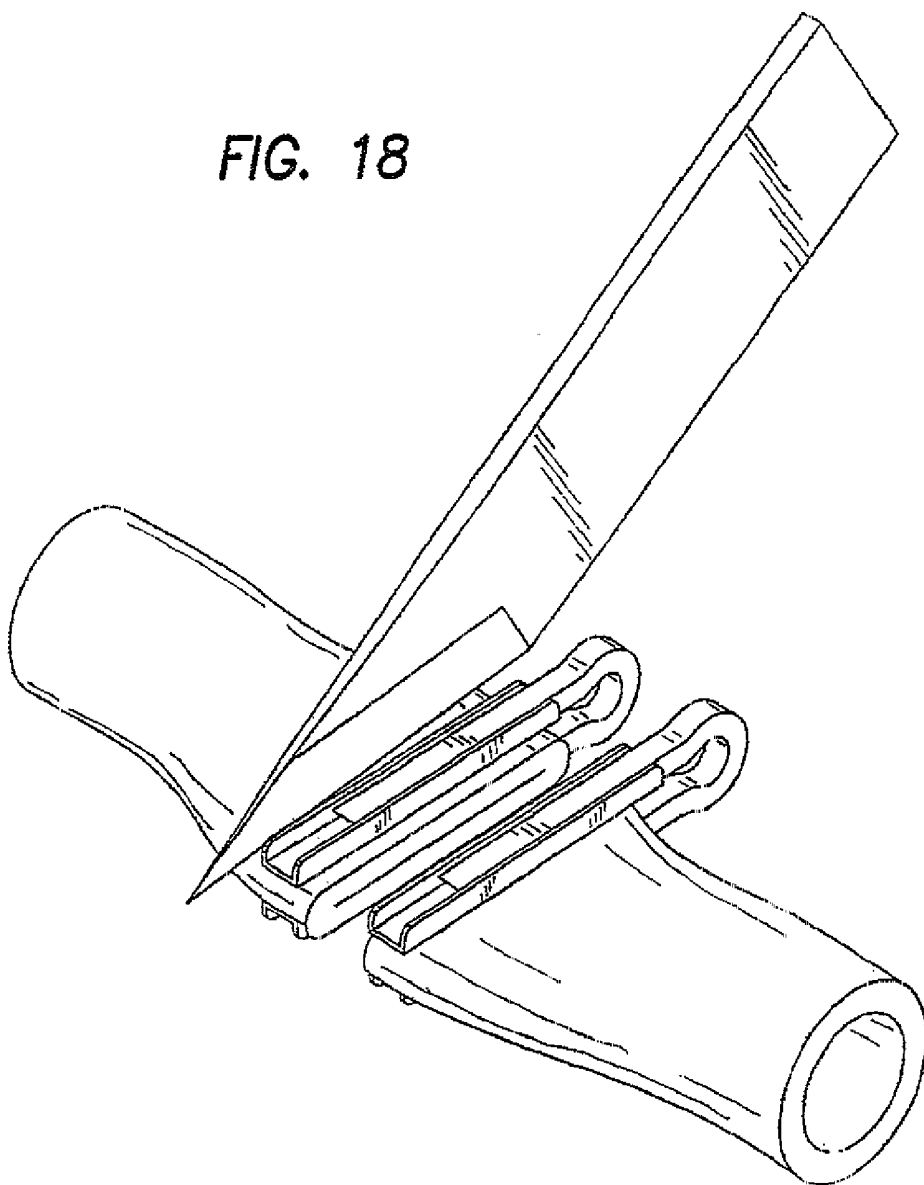
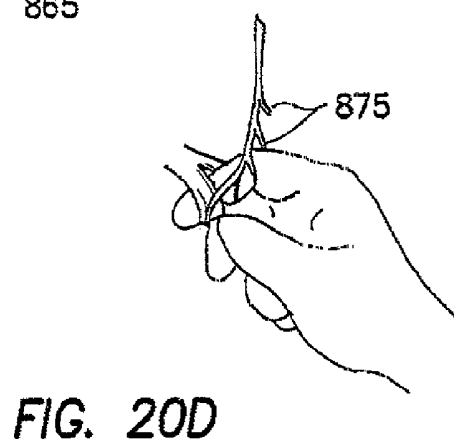
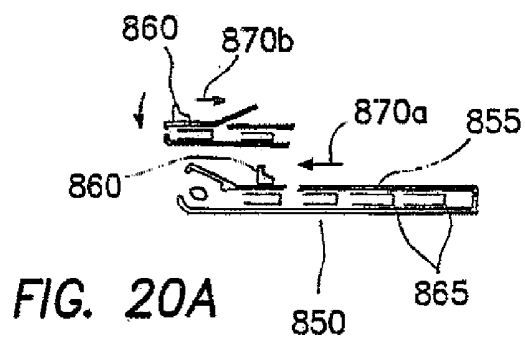
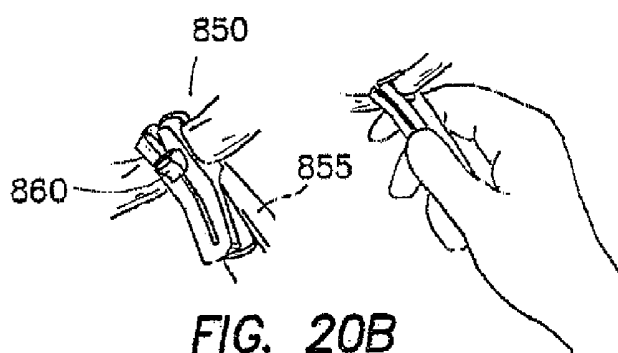
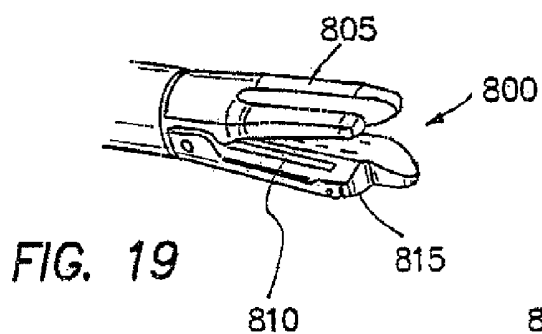


FIG. 17

FIG. 18





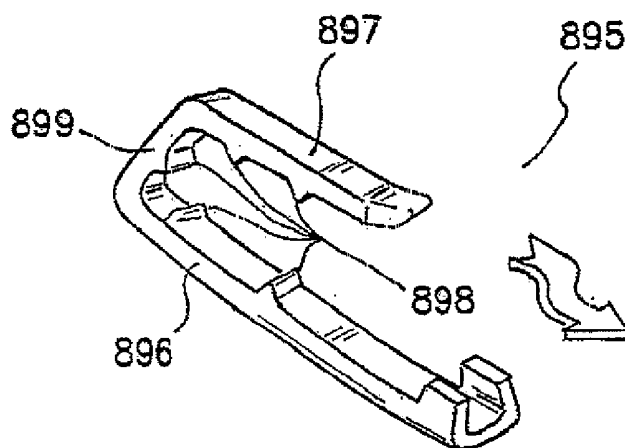
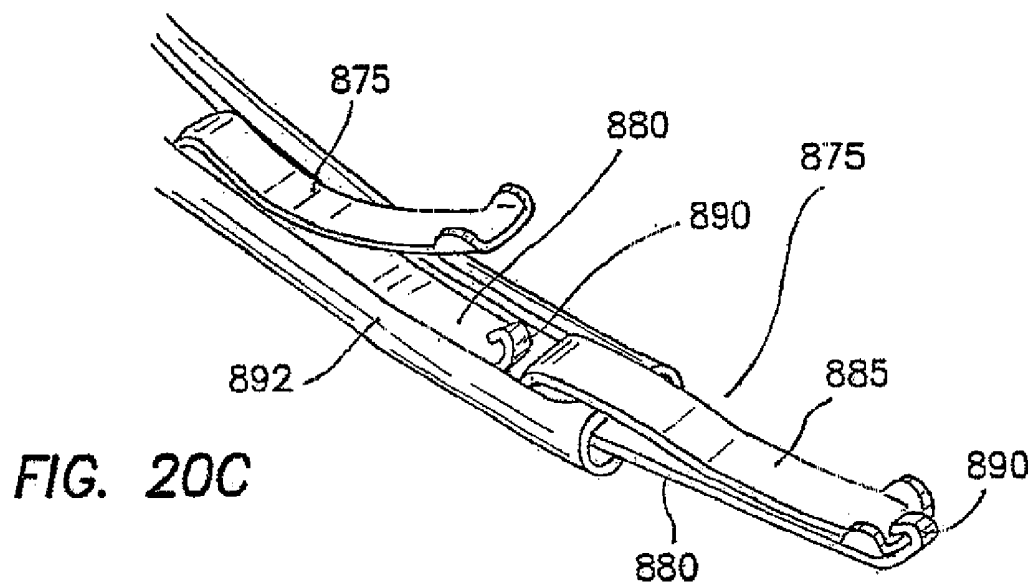


FIG. 20E

FIG. 21

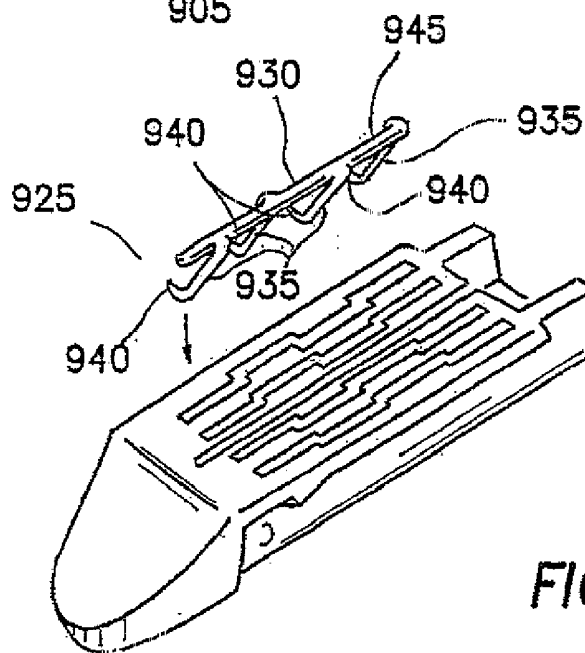
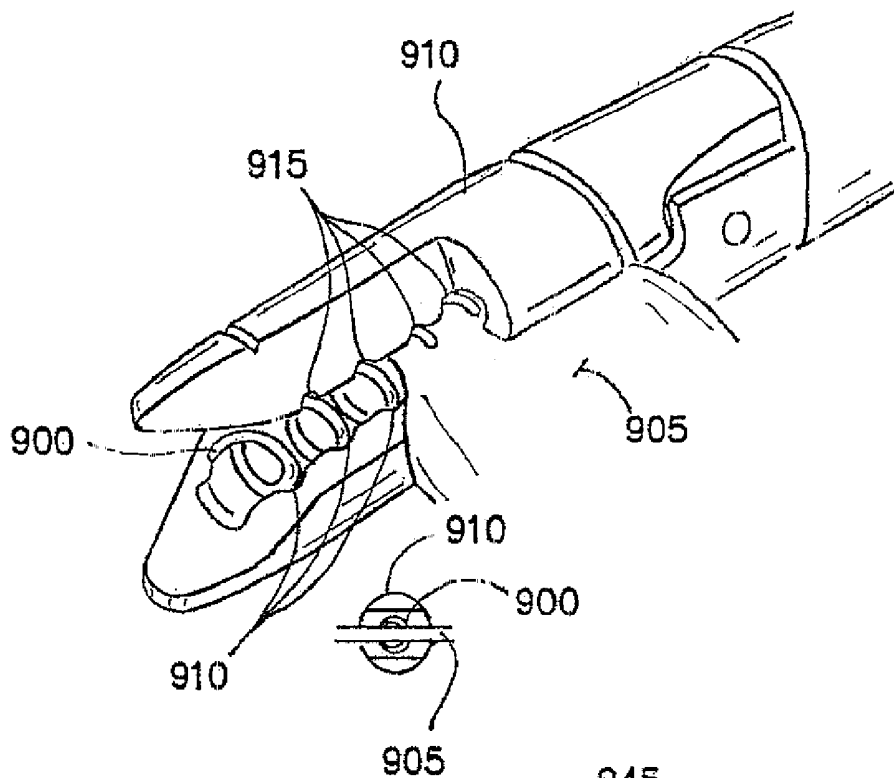
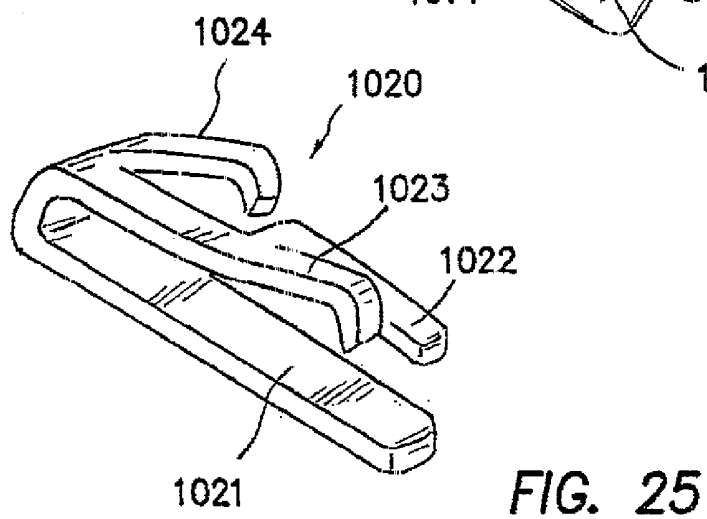
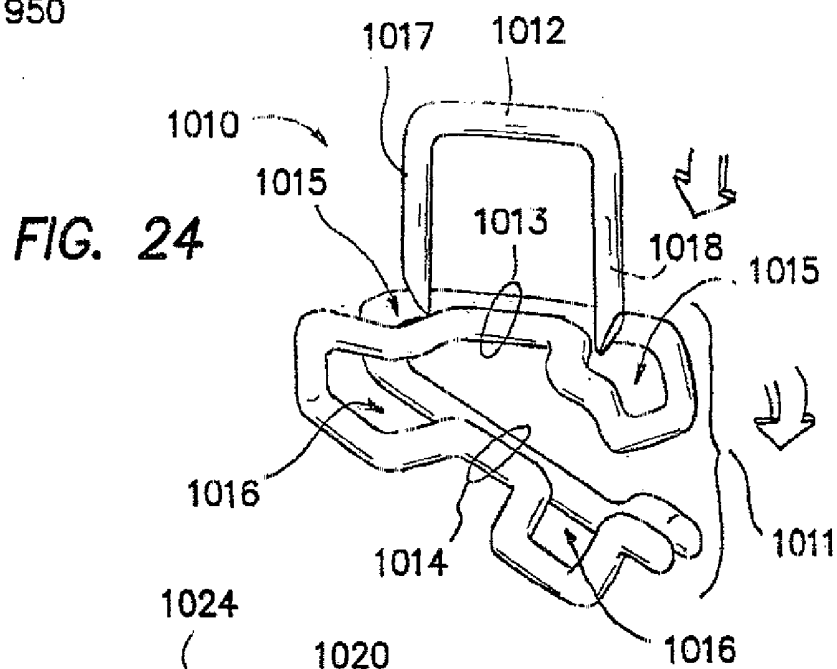
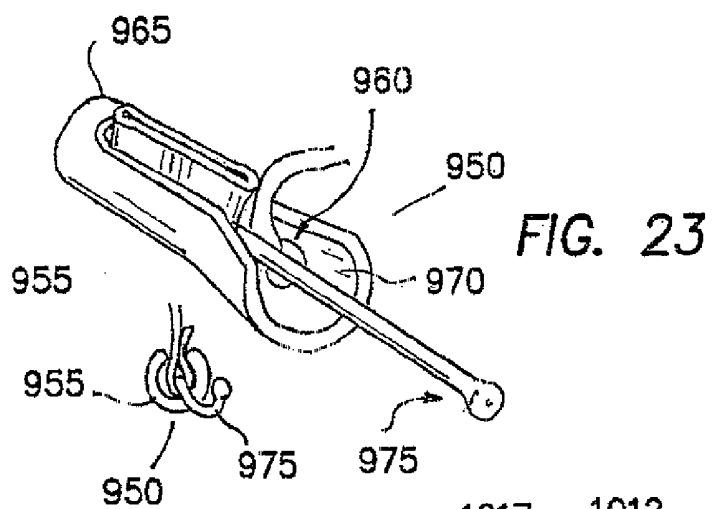


FIG. 22



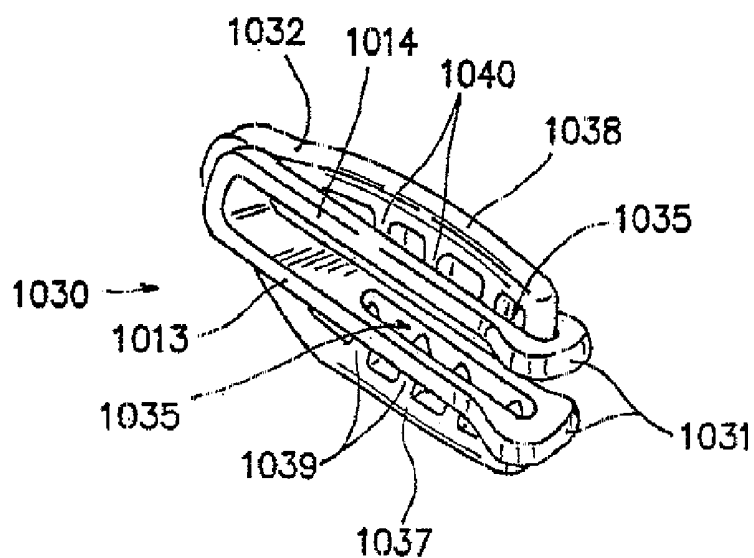


FIG. 26

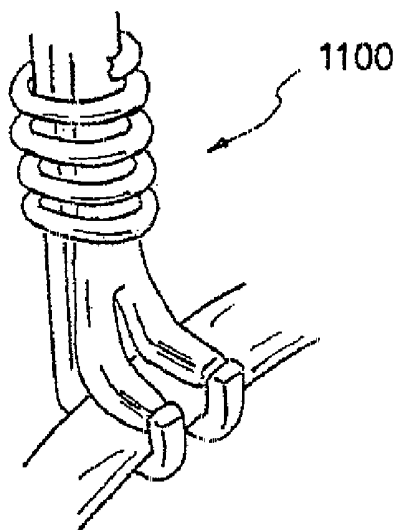


FIG. 27

SURGICAL STAPLE-CLIP AND APPLIER

[0001] This is a non-provisional application claiming the priority of provisional application Ser. No. 60/434,344, filed on Dec. 17, 2002, entitled "Surgical Staple-Clip and Applier," which is fully incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] This invention generally relates to medical devices and, more specifically, to a staple-clip and applier adapted for use in surgical procedures

[0004] 2. Discussion of the Prior Art

[0005] Clips and staples are widely used in many surgical procedures such as occlusion, ligation and fixation of various body tissues and vessels. Clips are generally U-shaped, open-ended wires that are positioned around a target tissue and clamped together to constrict or occlude the tissue. A clip applier is typically used for applying the clips. Clip appliers can be configured for applying a single clip or multiple clips in both open and minimally invasive or laparoscopic surgeries. The individual clips are provided in a loading cartridge or rack of a clip applier. With minimally invasive surgery, a clip applier must be able to deliver clips through a small access port or trocar having a diameter of about 10 mm to 12 mm. Accordingly, the size of a deliverable laparoscopic clip must be smaller than the inside diameter of the trocar through which it is introduced. Typically, a 12 mm clip applier is capable of delivering a clip that is no longer than 7-8 mm. It is not uncommon for laparoscopic surgeons to discover that even the largest clip available is undersized for a particular surgical procedure. Moreover, clips will occasionally move about or slip off the tissue to which they have been applied. In some cases, a surgeon may apply an excessive compressive force to the clip and tissue to minimize movement or slippage of the clip. This excessive compression may cause necrosis of tissue since nutrition to the tissue is interrupted or eliminated.

[0006] Staples are also widely used in many surgical procedures to constrict or occlude a body tissue or vessel. A surgical staple typically includes a pair of penetrating legs connected by a base portion. Surgical staples are applied using a stapler, which compresses the penetrating legs as the legs advance through the body tissue and are bent against an opposing jaw of the stapler to secure the staple to the body tissue. A feature of the staple is it defines open portions that provide nourishment to the tissue even when the staple is bent. Surgical staples have proved to be effective, however, the staplers used for applying the staples are often bulky and require a very strong closing or compressing force, which is not ideal for minimally invasive or laparoscopic surgeries. As such, it is desirable to find a staple/clip providing good traction to prevent movement and slippage while requiring only a force to close or compress the staple/clip. Specifically, it is desirable to have a staple/clip where the force required to constrict or occlude a body tissue is separate from the force required to secure and maintain the device in position. The staple-clip would provide good traction while maintain proper nourishment to the body tissue. It is advantageous to use the staple/clip, for example, to secure the renal vessel in donor nephrectomy.

SUMMARY OF THE INVENTION

[0007] The present invention is directed to a surgical staple-clip for use in a wide range of surgical procedures. The

staple-clip comprises a plurality of individual elements including a clip component and a securing or fixation member connected with the clip component to form a composite staple-clip. The composite staple-clip may be configured for use in both open and minimally invasive or laparoscopic surgeries. The staple-clip may be introduced to a surgical site in an un-assembled condition through a small port or trocar. An applier for the staple-clip comprising a pair of opposed jaw-like channels is provided to position and apply the clip component and the securing member. The clip component is positioned around a target tissue and is compressed or clamped upon the tissue using only the force required for a specific surgical procedure such as occlusion, ligation or fixation. When the clip component is properly applied and the desired effects are observed, the securing member is urged forward and over the clip component to secure the staple-clip.

[0008] In one aspect of the invention, the clip component includes traction enhancement features including surface interruptions, bumps, valleys, ridges and the like. In another aspect of the invention, the clip component includes tissue-penetrating features similar to those of a staple. It is appreciated that with the staple-clip of the invention, the force required to constrict or occlude the tissue is separate from the force required to secure and maintain the staple-clip in position. That is, only the compressive force needed to perform a specific surgical procedure such as occlusion, ligation or fixation is applied to the body tissue, and the force normally required to secure and maintain a clip of the prior art is not applied since traction and security are supplied by the clip component and securing member of the staple-clip. As a result, the body tissue is not over-compressed and nourishment to the body tissue is maintained.

[0009] Other aspects of the invention include thumb actuated clip appliers for use in hand assisted laparoscopy (HAL). In one embodiment, a clip applier includes a handle and a thumb actuated mechanism that is used to slidably release clips onto a body tissue or vessel by sliding the thumb actuated mechanism forward and backward using only one hand. This design closes the jaws around the body tissue or vessel and allows a closed clip to slide into position. In another embodiment, a clip is provided having a first arm and a second arm folded over the first arm. The first arm includes a latch mechanism such as an inwardly turned portion or hook at its distal end that is configured to interlock or mate with a distal end of the second arm when the arms are clamped together. The latch mechanism operates in a similar way to a hair clip and responds to thumb pressure. An operator may single-handedly access the clip and slide it onto a body tissue or vessel as needed. The arms of the clip may include tissue-penetrating elements on the inner, opposed faces of the arms.

[0010] In another aspect of the invention, a two-stage clip is disclosed having a clip component and a staple component for securing the clip after it has been properly positioned. The clip component is formed from a first piece of material and includes opposed arms, each of which includes openings allowing penetration of legs of the staple component. The staple component is formed from a second piece of material and is used to puncture a body tissue or vessel and to interlock the clip component. The arms of the clip component may include a latch mechanism at the distal ends to mate with each other when the arms are closed or clamped together. During use, the first stage closes the arms of the clip. After the first stage, the clip can still be safely removed. The second stage secures the clip permanently onto the body tissue or vessel by

applying the staple component to the clip component. In another embodiment, a two-stage clip is formed entirely from a single piece of material and includes a first arm and an opposed second arm. The second arm further includes securing elements, all of which are formed as an integral, one-piece construction. With this construction, the securing elements may still remain open after the first stage when the arms are clamped upon a body tissue or vessel. A second action then presses the securing elements into the body tissue or vessel.

[0011] These and other features and advantages of the invention will become more apparent with a discussion of preferred embodiments in reference to the associated drawings.

DESCRIPTION OF THE DRAWINGS

[0012] FIGS. 1(a) and 1(b) illustrate a typical surgical clip in an open condition and a closed condition, respectively;

[0013] FIG. 2 illustrates the movement and slippage of a typical surgical clip;

[0014] FIGS. 3(a) and 3(b) illustrate a typical surgical staple in an open condition and a closed condition, respectively;

[0015] FIGS. 4(a) and 4(b) illustrate a typical arrangement of open and closed surgical staples, respectively;

[0016] FIGS. 5(a) and 5(b) illustrate a typical surgical clip applicator and staple applicator, respectively;

[0017] FIG. 6(a) is a perspective view of the clip components and securing member of the staple-clip in accordance with an embodiment of the invention;

[0018] FIG. 6(b) is a perspective view of the assembled staple-clip of FIG. 6(a);

[0019] FIG. 7 is a perspective view of the assembled staple-clip of FIG. 6(b) placed upon a body conduit or passage;

[0020] FIG. 8 is a perspective view of the staple-clip and applicator configured for use in a minimally invasive surgical procedure;

[0021] FIGS. 9(a), 9(c), 9(e) and 9(g) are side views of the staple-clip of the invention in an open, closing, closed and locked condition, respectively;

[0022] FIGS. 9(b), 9(d), 9(f) and 9(h) are end views of the staple-clip of FIGS. 9(a), 9(c), 9(e) and 9(g), respectively;

[0023] FIGS. 10(a) and 10(b) are perspective views of a clip in an open and closed condition, respectively, having a monolithic construction in accordance with another embodiment of the invention;

[0024] FIGS. 10(c) and 10(d) are side views of the clip of FIGS. 10(a) and 10(b), respectively, having pointed tissue-penetrating elements;

[0025] FIGS. 10(e) and 10(f) are end views of the clip of FIGS. 10(c) and 10(d), respectively;

[0026] FIGS. 11(a) and 11(b) are side views of the staple-clip before and after placement upon a body conduit or passage, respectively;

[0027] FIGS. 11(c) and 11(d) are end views of the staple-clip of FIGS. 11(a) and 11(b), respectively;

[0028] FIGS. 12(a) and 12(b) are schematic side views of a staple-clip applicator in a closed and open condition, respectively;

[0029] FIGS. 12(c) and 12(d) are front, end views of the staple-clip applicator of FIGS. 12(a) and 12(b), respectively;

[0030] FIGS. 13(a) and 13(b) are perspective views of the tissue contacting face portions of a staple-clip in another aspect of the invention;

[0031] FIG. 14 illustrates the sequence of placing the securing member upon the tissue-engaging members of the staple-clip of the invention;

[0032] FIGS. 15(a), 15(b) and 15(c) illustrate the invention sized and configured to pass through a small trocar port in a first condition, second condition and final condition, respectively;

[0033] FIG. 16 illustrates placement of a single staple-clip of the invention;

[0034] FIG. 17 illustrates parallel placement of the staple-clips of the invention;

[0035] FIG. 18 illustrates parallel placement of the staple-clips of the invention with a cutting element placed between the staple-clips;

[0036] FIG. 19 illustrates a laparoscopic stapler configured for use in donor nephrectomy in accordance with another aspect of the invention;

[0037] FIGS. 20(a)-20(e) illustrate various thumb actuated clip applicators for use in hand assisted laparoscopy (HAL) in accordance with additional aspects of the invention;

[0038] FIG. 21 illustrates a spring like coil for suturing a body tissue or vessel in accordance with another aspect of the invention;

[0039] FIG. 22 illustrates a plurality of staples formed from a single piece of material in accordance with another aspect of the invention;

[0040] FIG. 23 illustrates a temporary HAL clamp for use in donor nephrectomy in accordance with another aspect of the invention;

[0041] FIGS. 24-26 illustrate various two-stage staple-clips in accordance with additional aspects of the invention; and

[0042] FIG. 27 illustrates a holder to press a body tissue flat and to provide clearance during placement of a staple-clip having sharp features.

DESCRIPTION OF PREFERRED EMBODIMENTS AND BEST MODE OF THE INVENTION

[0043] FIGS. 1 and 2 illustrate a surgical clip 10 of the prior art having a generally open shape including a first leg 15, a second leg 20 and a base 30 connecting the first leg 15 and the second leg 20. The clip 10 can be positioned around a body conduit or passage, e.g., a blood vessel, and compressed using a clip applicator 150 as illustrated in FIG. 5(a). The clip applicator 150 generally comprises an elongate shaft 155, sized and configured to fit through a surgical trocar port, a distal end 160 having a pair of opposed jaws 165, 167 and a proximal end 170 having a handle 180 to open and close the jaws 165, 167. The clip 10, held in an open condition, is supplied to the jaws 165, 167 either automatically or manually. The clip 10 is advanced to a desired site and subsequently closed or compressed. With the first and second legs 15 and 20 properly formed, the jaws 165, 167 can be opened and moved away from the tissue leaving the clip 10 clamped around the tissue. The clip 10 derives its strength from the material from which it is made. The material chosen must be sufficiently malleable to allow the clip to be compressed as illustrated in FIG. 1(b) while preventing spring-back of the material after application of a compressive force.

[0044] There are many factors that must be considered in applying a surgical clip to a body tissue or vessel. First, the clip must be sufficiently wide to completely encompass the tissue. As illustrated in FIG. 1(a), the clip 10 must have an

open area **50** that is wide enough to encompass the target tissue. Second, the clip must be compressible with a reasonable application force, i.e., a force that an operator feels comfortable applying to the body tissue. Third, the clip, once applied, must not move from the location where it was applied. As illustrated in FIG. 2, the clip **10** must not slip along axes **80(a)** or **80(b)** or slip off of body vessel **60**. A fourth factor is that the clip **10** should not compress the body tissue so much that it constricts, interrupts or destroys the nourishment of the tissue. As can be seen, the above factors of clip-based ligation or fixation are difficult to achieve using a single wire-formed clip. Moreover, the issues of compression and traction must be separated if proper nourishment of the tissue is to be preserved while maintaining a secure placement of the clip.

[0045] Surgical staples are another device that is commonly used for occlusion, ligation and fixation of body tissues and vessels. Referring to FIG. 3(a), a typical surgical staple **100** comprises generally straight, penetrating leg portions **110** and **120** connected together by a base portion **130**. As the penetrating leg portions **110**, **120** are applied to a body tissue or vessel, the leg portions advance through the tissue and are bent against the opposing jaw of the stapler and toward each other as illustrated in FIG. 3(b). The bending of the staple **100** forms a confinement of the body tissue that is, for the most part, independent of the compression of the tissue itself. FIG. 5(b) illustrates a laparoscopic stapler **190** that operates in much the same way as a clip applicator. During use, the stapler **190** is advanced over a portion of body tissue and is compressed to deliver at least one, and more often several, penetrating surgical staples. See, for example, FIGS. 4(a) and 4(b). The compressed surgical staple **100** has a general shape of the capital letter "B" where fluid nourishment of the tissue is provided through open portions **140** of the folded staple **100**. Surgical staples have proved to be effective and are a standard in surgery. However, the staplers used for applying the staples are often bulky and require a very strong closing or compressing force, which is not ideal for minimally invasive or laparoscopic surgeries. Accordingly, there is a need in the art for a device having features and advantages of both the staple and clip. The staple/clip would provide good traction to prevent the device from moving or dislodging from the body tissue while maintaining proper nourishment to the tissue. In addition, the force required to constrict or occlude the body tissue would be separated from the force required to secure and maintain the device in position. Specifically, the portion of tissue to be treated would not be compressed more than is necessary to achieve the desired result.

[0046] FIG. 6(a) illustrates a surgical staple-clip **200** in accordance with a first embodiment of the invention. The staple-clip **200** comprises a first tissue-engaging member **205**, a second tissue-engaging member **210** opposed to the first tissue-engaging member **205**, and a securing or fixation member **220** for securing the first and second tissue-engaging members **205**, **210**. The first tissue-engaging member **205** comprises generally opposed walls **230**, **232** and a connecting wall **234** that together define an elongate channel **236**. The second tissue-engaging member **210** is similar to the first tissue-engaging member **205** and comprises generally opposed walls **240**, **242** and a connecting wall **244** that together define an elongate channel **246**. The tissue-engaging members **205**, **210** are normally held such that the front faces of the connecting walls **234**, **244**, respectively, are opposed to

each other. The opposing front faces of the connecting walls **234**, **244** may include a plurality of tissue-penetrating elements **238**, **248**, respectively.

[0047] An advantage of the staple-clip of the invention is it provides good traction without requiring an excessive compressive force to be applied to the staple-clip. In particular, the securing member **220** is sized and configured to slide into the elongate channels **236**, **246** to securely clamp the tissue-engaging members **205**, **210** around a body tissue or vessel with minimal compressive force. More specifically, the force required to secure and maintain the staple-clip (to provide adequate traction) is independent from the force required to constrict or occlude a body tissue or vessel. With the staple-clip of the invention, only the compressive force needed to perform a specific surgical procedure such as occlusion, ligation or fixation is applied to the body tissue, and the force normally required to secure and maintain a clip of the prior art is not applied since traction and security are supplied by the tissue-engaging members **205**, **210**. In other words, the staple-clip of the present invention provides the necessary traction without requiring an excessive compressive force to keep the staple-clip from moving or becoming loose. As a result, nourishment of the lightly compressed tissue is maintained and tissue necrosis due to over-compression is eliminated.

[0048] In another aspect of the invention, the tissue-engaging members include traction enhancing features including bumps, ridges, slots, holes, etc. as generally illustrated in FIGS. 13(a) and 13(b). The traction enhancing features are sized and configured to grip tissue and provide traction and security beyond that which might be achieved by over-compressing a typical clip. The securing member **220** may be a spring-clip or a deformable clip acting as a retention member and providing a uniform pressure across the occluded tissue or vessel to prevent loosening of the staple-clip **200** over time as illustrated in FIGS. 7, 9(a)-9(h) and 14. The tissue-penetrating elements **238**, **248** are configured to penetrate the tissue and to prevent the tissue from moving or sliding when clamped as illustrated in FIGS. 11(a)-11(d), 16 and 17.

[0049] It is appreciated that the connecting walls **234**, **244** and the respective tissue-penetrating elements **238**, **248** may be formed as an integral, one-piece construction. It is further appreciated that the number of rows of tissue-penetrating elements and the number of tissue-penetrating elements per row may vary according to each application and the shape and size of the clip and body tissue. It is further noted that the tissue-penetrating elements in each row may be aligned or staggered as desired. The tissue-engaging members **205**, **210** and the securing member **220** may have cross-sections of any configuration including polygonal, circular and elliptical configurations.

[0050] Referring to FIG. 10, there is shown a monolithic staple-clip **500** in accordance with another aspect of the invention. The monolithic staple-clip **500** has a general shape of the capital letter "U". The staple-clip **500** comprises a first tissue-engaging portion or leg **505**, an opposed second tissue-engaging portion or leg **510** and a deformable connecting portion **520** connecting the first and second tissue-engaging portions **505** and **510**. Each of the opposing faces of the tissue-engaging portions **505**, **510** comprises a plurality of tissue penetrating elements or protrusions **525**, **530**, respectively. The protrusions are sized and configured to penetrate tissue that is captured between the tissue-engaging portions and provide traction and security beyond that which might be

achieved by over-compressing a typical clip. Similar to other aspects of the invention, only the force required to perform a specific surgical procedure such as occlusion, ligation or fixation is applied to a body tissue and the force previously needed to secure and maintain the clip is no longer applied. Nourishment of the lightly compressed tissue is thus maintained and tissue necrosis due to over-compression is eliminated.

[0051] The monolithic staple-clip **500** may be formed from a flat metal sheet that is die-cut, stamped or etched forming a first notched or toothed portion, a smooth connecting portion and a second notched or toothed portion. The notches or teeth of the first and second portions are then bent so as to extend in the same direction or plane and to form channels within the notches or teeth. The staple-clip is then formed in a U-shape by bending the connecting portion so that the notches or teeth of the two tissue-engaging portions are opposed. A preferred embodiment of the monolithic staple-clip comprises a malleable material such as Titanium or stainless steel. Other materials include any medically acceptable metal or plastic material that is ductile, malleable or deformable.

[0052] It is appreciated that the staple-clips of the invention can be applied to a body tissue or vessel using an applier **600** as illustrated in FIGS. **12(a)-12(d)**. The staple-clip applier **600** generally comprises an elongate shaft **605**, sized and configured to fit through a surgical trocar port, a distal end **610** having a pair of opposed jaws **615**, **620**, and a proximal end (not shown) having a handle to open and close the jaws **615**, **620**. The staple-clip applier **600** further comprises a sliding member **625** to advance the securing member **220** over the tissue-engaging members **205**, **210** after closure of the jaws **615**, **620** as further described below. The jaws **615**, **620** operate to apply the tissue-engaging members **205**, **210**, respectively, around a target body tissue or vessel. The tissue-engaging members are supplied to the jaws either manually or automatically. With the tissue-engaging members **205**, **210** properly placed, the jaws **615**, **620** can be compressed using only the force required for a specific surgical procedure such as occlusion, ligation or fixation. When the tissue-engaging members **205**, **210** are properly applied, the sliding member **625** can then urge the securing member **220** forward and over the tissue-engaging members **205**, **210** to secure the staple-clip **200** as illustrated in FIGS. **9(a)-9(h)**, **11(a)-11(d)** and **14**. The tissue-engaging members **205**, **210** and securing member **220** may be introduced to a surgical site in an un-assembled condition through a small port or trocar FIGS. **8** and **15(a)-15(c)** further illustrate the staple-clip and applier sized and configured for use in a minimally invasive or laparoscopic surgical procedure.

[0053] Multiple staple-clips may also be loaded in a staple-clip applier and advanced individually or simultaneously between the jaws. In the case of simultaneously applying the staple-clips, the applier must include a plurality of slots in the opposed jaws to receive the multiple staple-clips. A cutting member such as a blade may be included in the applier to be advanced between the staple-clips after they have been applied to transect the body tissue between the staple-clips as illustrated in FIGS. **17** and **18**.

[0054] In another aspect of the invention, FIG. **19** depicts a traditional laparoscopic stapler **800** that is configured specifically for donor nephrectomy. The stapler **800** includes a plurality of rows of staples on the patient side **805** and a temporary clip **810** that substitutes for a typical set of staples on the kidney side **815**. The stapler **800** operates like existing place

and cut staplers with the exception that a temporary clip or clips **810** replace the set of staples on the kidney side **815**. The temporary clip **810** may be a staple cartridge configured for use in donor nephrectomy. An advantage of this configuration is it salvages a greater portion of the vessel for the transplant procedure.

[0055] Another aspect of the invention is directed to hand assisted laparoscopy (HAL), the widespread acceptance of which has created many opportunities for surgical advancement utilizing single hand procedures. FIGS. **20(a)-20(e)** illustrate thumb actuated clip appliers **850**, **875** and **895** in accordance with the teachings of the invention. The clip applier **850** includes a handle **855** and a thumb actuated mechanism **860**. An operator can slidably release clips **865** onto a vessel by sliding the thumb actuated mechanism **860** forward **870a** and backward **870b** using only one hand as illustrated in FIGS. **20(a)-20(b)**. This design closes the jaws around the vessel and allows a closed clip to slide into position. The handle **855** also serves as a reservoir for additional clips **865**. The clip **875** is also designed for HAL applications and includes a first arm **880** and a second arm **885** folded over the first arm **880**. The first arm **880** includes a latch mechanism **890** such as an inwardly turned portion or hook at its distal end that is configured to interlock or mate with a distal end of the second arm **885** when the arms are clamped together. The latch mechanism **890** operates in a similar way to a hair clip and responds to thumb pressure. An operator may single-handedly access the clip **875** and slide it onto a body tissue or vessel as needed.

[0056] A plurality of clips **875** may be strung end-to-end in a clip sleeve **892** suspended through an open port. An advantage of the clip **875** is there is no instrument to misplace. The clip sleeve **892** holding the clips **875** can also be withdrawn or fed through any open port or trocar. The clip sleeve **892** can also be designed to keep the clips **875** partially closed, enabling the use of smaller ports or trocars. The clip **895** as illustrated in FIG. **20(e)** is similar to the clip **875** but further includes tissue-penetrating elements **898** on the inner faces of arms **896**, **897**. The clip **895** may also include a third arm **899** connecting the arms **896**, **897**.

[0057] In another aspect of the invention as illustrated in FIG. **21**, a spring like coil **900** is used for suturing a body tissue or vessel in place of clips and staples. The spring like coil **900** is applied onto a body tissue or vessel **905** by using a stapler **910** having grooved jaws **910**, **915**. The spring like coil **900** is preferably loaded or twisted into one of the grooved jaws **910**, **915**, which is then compressed or clamped against the other grooved jaw to constrict or occlude the vessel **905**. An advantage of this design is closure of the coil **900** provides a stitch like nature that replicates a uniformly applied suture. In one configuration, a single coil is inserted in place of each suture. It is appreciated that a single coil or multiple coils may be loaded into the grooved jaws of a stapler for each specific surgical procedure or closure.

[0058] In yet another aspect of the invention, FIG. **22** illustrates multiple staples **925** formed from a single piece of material **930** to reduce the high manufacturing costs associated with current stapler cartridges. These costs savings translate to increased margins or reduced product cost. Each of the staples **925** has an angled leg **935** and an inclined rail **940** for easy push up and closure by a stapler. The staples **925** all share a common portion **945**, which allows the row of staples to be formed as an integral, one-piece construction. The staples **925** can also be formed to offset each other and to emulate mul-

tiple rows. An advantage of this aspect of the invention is it provides a compact cartridge that is suitable for donor nephrectomy.

[0059] FIG. 23 illustrates a temporary HAL clamp 950 for use in donor nephrectomy in accordance with another aspect of the invention. The clamp 950 includes a tubular section 955 defining an opening 960 extending from a proximal end 965 to a distal end 970, and a lead-in wire 975 operably attached to the proximal end 965. The lead-in wire 975 is movable between an open position and a closed position. When closed, the lead-in wire 975 is slidably received and secured in the opening 960 of the tubular section 955. During use, an operator may manually wrap a vessel or vessels (e.g., the renal artery and vein) can be cinched together into the clamp) around the lead-in wire 975 and secure the wire 975 in the opening 960 of the tubular section 955. The lead-in wire 975 may be bent against the wall of the tubular section 955 to further secure the vessel(s) for kidney removal and transport.

[0060] FIGS. 24, 25 and 26 illustrate two-stage clips 1010, 1020 and 1030, respectively, in accordance with additional embodiments of the invention. The clips 1010, 1020 and 1030 require an applicator (not shown) for placement onto a body tissue or vessel. The clip 1010 includes a clip component 1011 and a staple 1012 for securing the clip after it has been properly positioned. The clip component 1011 is formed from a single wire and includes opposed arms 1013, 1014. Each of the arms 1013, 1014 includes openings 1015, 1016, respectively, allowing penetration of legs 1017, 1018 of the staple 1012. The staple 1012 is formed from a second wire and is used to puncture the body tissue or vessel and interlock the clip component 1011. The arms 1013, 1014 may include a latch mechanism at the distal ends to mate with each other when the arms are closed or clamped together. During use, the first stage closes the arms 1013, 1014 of the clip. After the first stage, the clip can still be safely removed. The second stage secures the clip permanently onto the body tissue or vessel by applying the staple 1012 to the clip component 1011.

[0061] The two-stage clip 1020 as shown in FIG. 25 is formed entirely from a single piece of material and includes a first arm 1021 and an opposed second arm 1022. The second arm 1022 further includes securing elements 1023, 1024, all of which are formed as an integral, one-piece construction. With this construction, the securing elements 1023, 1024 may still remain at an angle after the first stage (when the arms 1021 and 1022 are clamped upon a body tissue or vessel). A second action then presses the securing elements 1023, 1024 into the body tissue or vessel. The clip 1030 as shown in FIG. 26 is similar to the clip 1010 and includes a clip component 1031 and a staple component 1032 for securing the clip after it has been properly positioned. The clip component 1031 includes opposed arms 1013, 1014 defining openings 1035, 1036, respectively. The staple component 1032 includes opposed arms 1037, 1038 having tissue-securing elements 1039, 1040, respectively, which operate to secure the clip onto a body tissue or vessel through the openings 1035, 1036. The clip 1030 may be formed in sheet stock.

[0062] FIG. 27 illustrates a tissue holder 1100 for use with staple-clips that may include sharp features, e.g., tissue-penetrating elements, that can potentially injure tissue during a surgical procedure. In particular, the tissue holder 1100 is used to press a body tissue flat and to provide clearance during placement of a staple-clip.

[0063] Although exemplary embodiments of the invention have been shown and described, many alterations and modifications may be made by those having ordinary skill in the art without departing from the spirit and scope of the invention. Therefore, it must be understood that the illustrated embodiments have been set forth only for the purposes of examples and that they should not be taken as limiting the invention. In addition, the words used in this specification to describe the invention and its various embodiments are to be understood not only in the sense of their commonly defined meanings, but to include any special definition given in this specification.

1. A medical device to constrict or occlude a body tissue or vessel, comprising:

- a first tissue-engaging member having opposed walls and a first connecting wall defining a first elongate channel;
- a second tissue-engaging member opposed to the first tissue-engaging member having opposed walls and a second connecting wall defining a second elongate channel;
- and

- a securing member for securing the first and the second tissue-engaging members such that front faces of the first and the second connecting walls are opposed to each other.

2. The medical device of claim 1, wherein each of the front faces of the first and the second connecting walls includes a plurality of tissue-penetrating elements.

3. The medical device of claim 1, wherein the securing member is sized and configured to slide into the first and the second elongate channels to securely clamp the first and the second tissue-engaging members around the body tissue or vessel with minimal compressive force.

4. The medical device of claim 3, wherein the force required to secure and maintain adequate traction is independent from the force required to constrict or occlude the body tissue or vessel.

5. The medical device of claim 4, wherein only a compressive force needed to perform a specific surgical procedure such as occlusion, ligation or fixation is applied to the body tissue.

6. The medical device of claim 5, wherein tissue necrosis due to over-compression is eliminated.

7. The medical device of claim 1, wherein at least one of the first and the second tissue engaging-members includes a plurality of bumps, ridges, slots, and holes.

8. The medical device of claim 1, wherein the securing member is a spring clip or a deformable clip acting as a retention member and providing uniform pressure across the occluded tissue or vessel.

9. The medical device of claim 2, wherein the first and the second connecting walls and the tissue-penetrating elements are formed as an integral, one-piece construction.

10. The medical device of claim 2, wherein the tissue-penetrating elements are formed in a plurality of rows.

11. The medical device of claim 10, wherein the number of tissue-penetrating elements per row and the number of rows vary according to each application.

12. The medical device of claim 10, wherein the tissue-penetrating elements are aligned or staggered.

13. The medical device of claim 2, wherein the tissue-penetrating elements and the securing member have cross-sections of any configuration including polygonal, circular and elliptical configurations.

14. A medical device to constrict or occlude a body tissue or vessel, comprising:

a first tissue-engaging portion having a first face including a plurality of tissue penetrating elements or protrusions; a second tissue-engaging portion opposing the first tissue-engaging portion having a second face including a plurality of tissue penetrating elements or protrusions; and a deformable portion connecting the first and the second tissue-engaging portions.

15. The medical device of claim **14**, wherein only a force required to perform a specific surgical procedure such as occlusion, ligation or fixation is applied to the body tissue or vessel.

16. The medical device of claim **15**, wherein tissue necrosis due to over-compression is eliminated.

17. The medical device of claim **14**, wherein the medical device is formed from a flat metal sheet that is die-cut, stamped or etched forming a first notched or toothed portion of the first tissue-engaging portion, a smooth connecting portion of the deformable portion and a second notched or toothed portion of the second tissue-engaging portion.

18. The medical device of claim **17**, wherein a plurality of notches or teeth of the first and the second portions are bent so as to extend in the same direction or plane and to form channels within the notches or teeth.

19. The medical device of claim **17**, wherein the device is formed in a U-shape by bending the deformable portion so that the notches or teeth of the first and the second tissue-engaging portions are opposed.

20. The medical device of claim **14**, wherein the device is formed from any medically acceptable metal or plastic material that is ductile, malleable or deformable.

21. The medical device of claim **20**, wherein the metal includes titanium and stainless steel.

22-34. (canceled)

35. A clip to constrict or occlude a body tissue or vessel, comprising:

a first arm including a latch mechanism at a distal end; and a second arm folded over the first arm at a distal end and configured to interlock or mate with the latch mechanism of the first arm.

36. The clip of claim **35**, wherein the latch mechanism is a hook.

37. The clip of claim **36**, wherein at least one of the first and the second arms includes tissue-penetrating elements or securing elements on an inner face.

38. The clip of claim **35**, further comprising a third arm connecting the first arm and the second arm.

39. A clamp to constrict or occlude a body tissue or vessel, comprising:

a tubular section having an opening extending from a proximal end to a distal end; and

a lead-in wire operably attached to the proximal end and is movable between an open position and a closed position, wherein in the closed position, the lead-in wire is slidably received and secured in the opening of the tubular section.

40. The clip of claim **39**, wherein the lead-in wire is bent against a wall of the tubular section to further secure the body tissue or vessel.

41. The clip of claim **39**, wherein the clamp is used in donor nephrectomy.

42. A medical device to constrict or occlude a body tissue or vessel, comprising:

a clip formed from a first wire including opposed arms and openings; and

a staple for securing the clip, the staple formed from a second wire having legs to puncture the body tissue or vessel and to interlock the clip through the openings.

43. The medical device of claim **42**, wherein the arms further comprise a latch mechanism at their distal ends to mate with each other when the arms are closed or clamped together.

* * * * *

专利名称(译)	外科钉书夹和施法器		
公开(公告)号	US20080319456A1	公开(公告)日	2008-12-25
申请号	US12/200582	申请日	2008-08-28
[标]申请(专利权)人(译)	应用医疗资源		
申请(专利权)人(译)	应用医疗资源CORPORATION		
当前申请(专利权)人(译)	应用医疗资源CORPORATION		
[标]发明人	HART CHARLES C		
发明人	HART, CHARLES C.		
IPC分类号	A61B17/08 A61B17/10 A61B17/00 A61B17/064 A61B17/068 A61B17/122 A61B17/128		
CPC分类号	A61B17/0643 A61B17/0644 A61B17/068 A61B17/0682 A61B17/122 A61B17/105 A61B2017/00858 A61B2017/0641 A61B2017/0649 A61B2017/1225 A61B17/08 A61B17/1285		
优先权	PCT/US2003/040318 2003-12-16 WO 60/434344 2002-12-17 US		
其他公开文献	US8998935		
外部链接	Espacenet USPTO		

摘要(译)

包括夹子部件和固定构件的外科钉夹在广泛的外科手术中使用。钉夹可以通过小口或套管针以未组装状态引入手术部位。提供用于钉夹的施法器，其包括一对相对的爪状通道，以定位和施加夹子部件和固定构件。夹子部件围绕目标组织定位，并且仅使用特定外科手术例如闭塞，结扎或固定所需的力压缩或夹紧在组织上。当夹子部件被适当地施加时，固定构件被向前推动并且在夹子部件上方以固定钉夹。夹子部件可包括牵引增强特征，例如表面中断，凸起，凹陷和脊。利用本发明的钉夹，收缩或闭塞组织所需的力与将钉夹固定和保持在适当位置所需的力分开，结果，身体组织不会过度压缩和营养。保持身体组织。本发明的其他方面包括用于手辅助腹腔镜检查（HAL）的拇指致动夹具施放器。在一个实施例中，夹子施放器包括手柄和拇指驱动机构，其用于通过滑动将夹子可滑动地释放到身体组织或血管上。拇指驱动机构只用一只手向前和向后。在本发明的另一个方面，公开了一种两级夹子，其具有夹子部件和钉部件，用于在夹子被正确定位之后固定夹子。

