



US 20150150685A1

(19) **United States**(12) **Patent Application Publication**
Forsell(10) **Pub. No.: US 2015/0150685 A1**(43) **Pub. Date: Jun. 4, 2015**(54) **HIP JOINT METHOD**(71) Applicant: **Peter Mats Forsell**, Bouveret (CH)(72) Inventor: **Peter Mats Forsell**, Bouveret (CH)(21) Appl. No.: **14/612,389**(22) Filed: **Feb. 3, 2015****Related U.S. Application Data**

(63) Continuation of application No. 14/600,064, filed on Jan. 20, 2015, which is a continuation of application No. 13/383,332, filed on Jan. 10, 2012, now Pat. No. 8,945,233, filed as application No. PCT/SE2010/050822 on Jul. 12, 2010.

(60) Provisional application No. 61/229,738, filed on Jul. 30, 2009.

(30) **Foreign Application Priority Data**

Jul. 10, 2009	(SE)	0900957-2
Jul. 10, 2009	(SE)	0900958-0
Jul. 10, 2009	(SE)	0900959-8
Jul. 10, 2009	(SE)	0900960-6
Jul. 10, 2009	(SE)	0900962-2
Jul. 10, 2009	(SE)	0900963-0
Jul. 10, 2009	(SE)	0900965-5
Jul. 10, 2009	(SE)	0900966-3
Jul. 10, 2009	(SE)	0900968-9
Jul. 10, 2009	(SE)	0900969-7
Jul. 10, 2009	(SE)	0900970-5
Jul. 10, 2009	(SE)	0900972-1
Jul. 10, 2009	(SE)	0900973-9
Jul. 10, 2009	(SE)	0900974-7
Jul. 10, 2009	(SE)	0900976-2
Jul. 10, 2009	(SE)	0900978-8
Jul. 10, 2009	(SE)	0900981-2

Publication Classification(51) **Int. Cl.***A61F 2/32* (2006.01)*A61B 17/16* (2006.01)*A61F 2/28* (2006.01)*A61F 2/36* (2006.01)*A61F 2/30* (2006.01)*A61B 17/06* (2006.01)*A61L 24/00* (2006.01)*A61F 2/46* (2006.01)*A61B 19/00* (2006.01)*A61B 17/34* (2006.01)*A61B 17/064* (2006.01)(52) **U.S. Cl.**

CPC *A61F 2/32* (2013.01); *A61B 17/3472* (2013.01); *A61B 17/1666* (2013.01); *A61F 2/28* (2013.01); *A61F 2/3609* (2013.01); *A61B 17/1659* (2013.01); *A61B 17/064* (2013.01); *A61B 17/06166* (2013.01); *A61L 24/00* (2013.01); *A61F 2/4609* (2013.01); *A61F 2/4607* (2013.01); *A61B 19/5212* (2013.01); *A61B 17/3468* (2013.01); *A61F 2/30756* (2013.01); *A61F 2002/3611* (2013.01); *A61F 2002/30448* (2013.01); *A61F 2002/30433* (2013.01); *A61F 2002/30331* (2013.01); *A61F 2002/30451* (2013.01); *A61F 2002/30462* (2013.01); *A61F 2002/30472* (2013.01); *A61F 2002/30378* (2013.01); *A61F 2002/30464* (2013.01); *A61F 2002/30476* (2013.01); *A61F 2002/30449* (2013.01); *A61F 2002/3619* (2013.01)

(57)

ABSTRACT

A method of treating a hip joint of a human patient by providing at least one hip joint surface comprising the steps of: cutting the skin of the human patient, dissecting an area of the pelvic bone on the opposite side from the acetabulum, creating a hole in the dissected area from the opposite side from the acetabulum, the hole passing through the pelvic bone and into the hip joint of the human patient, and providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, through the hole in the pelvic bone of the human patient.

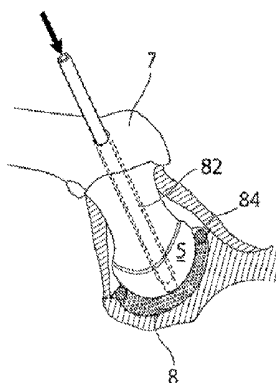


Fig. 1

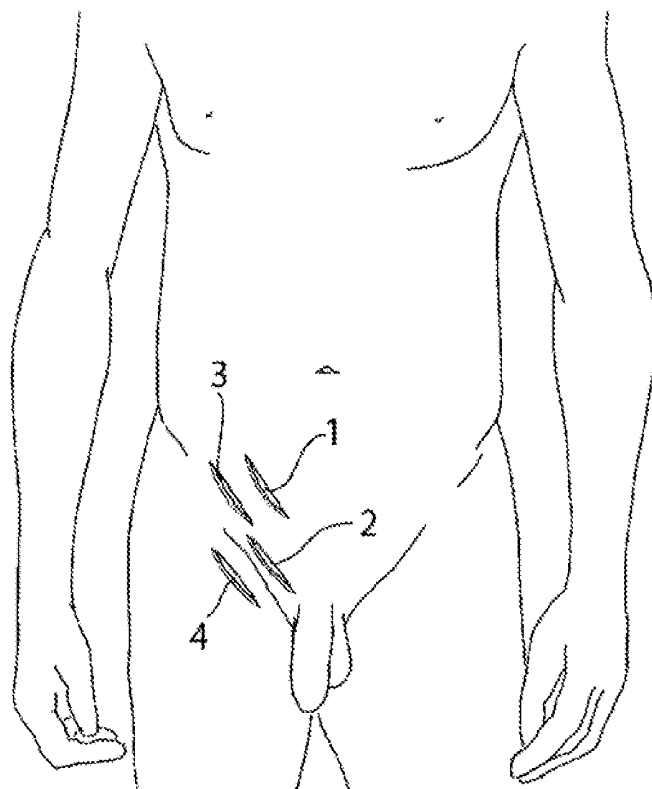


Fig. 2

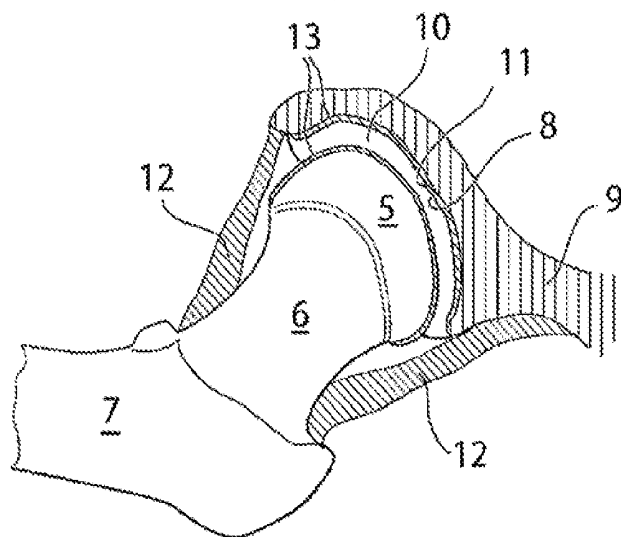


Fig.3

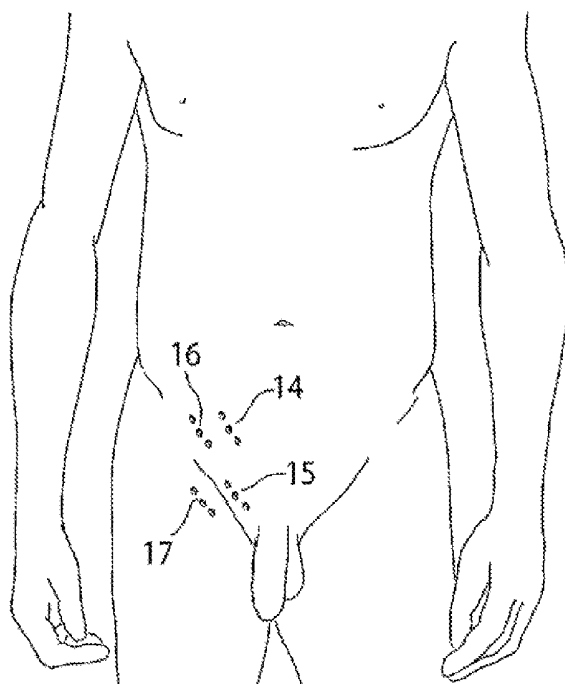


Fig.4

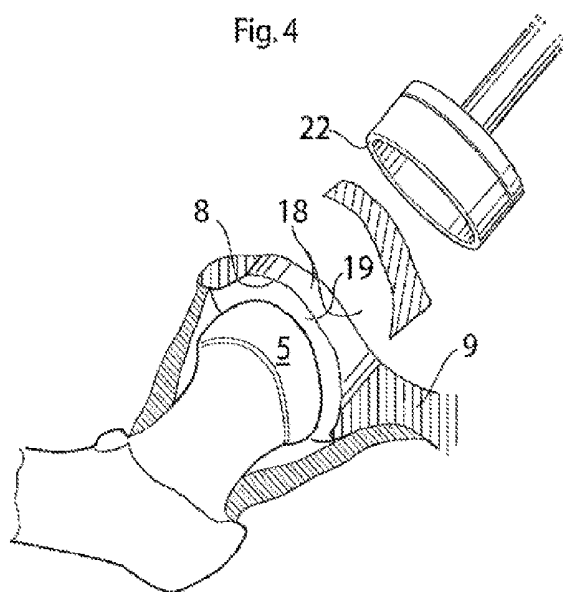


Fig.5

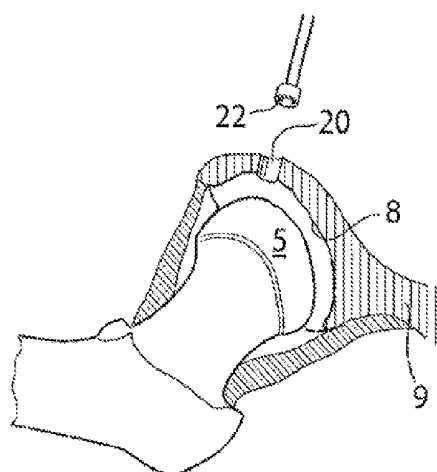


Fig. 6

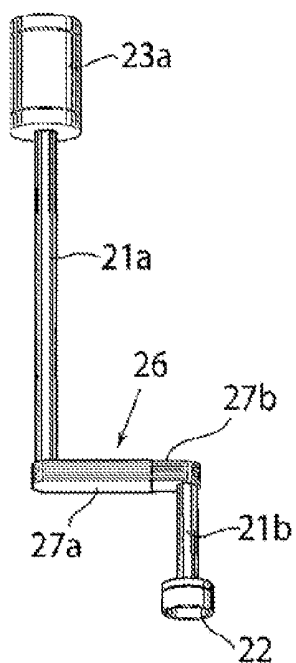


Fig. 7

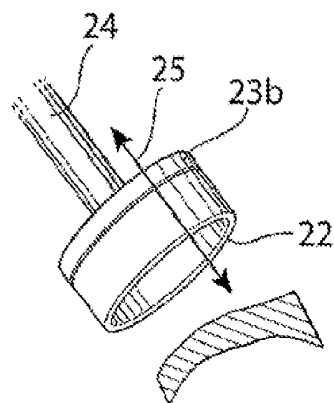


Fig. 8

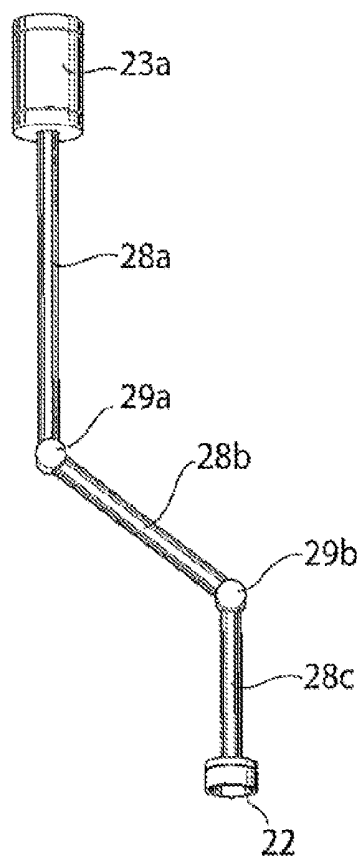


Fig. 9

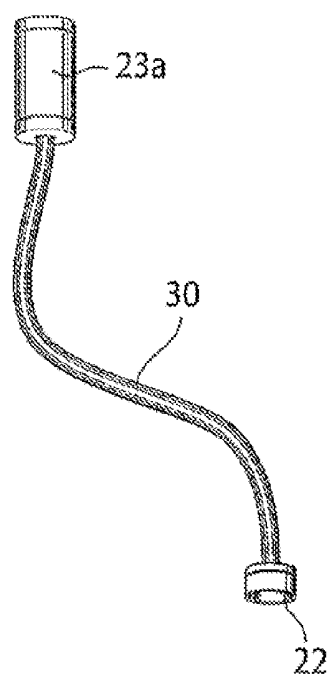


Fig. 10

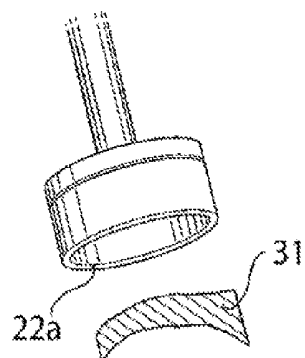


Fig. 11

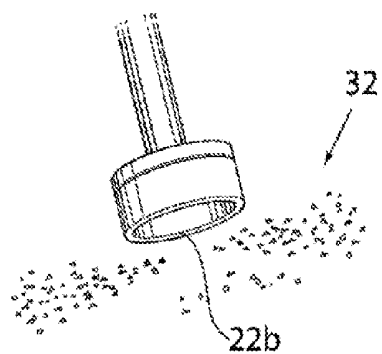


Fig. 12

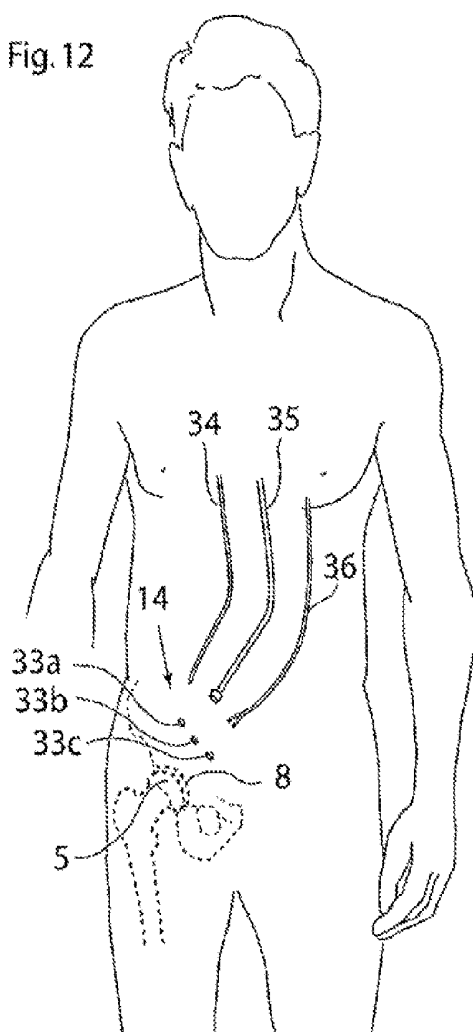


Fig. 13

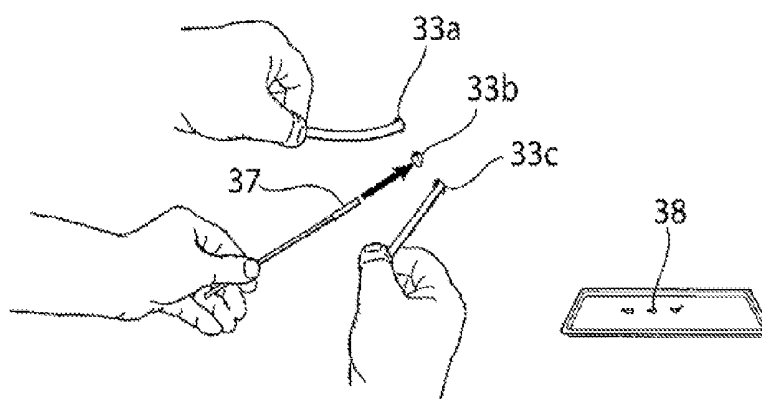


Fig. 14

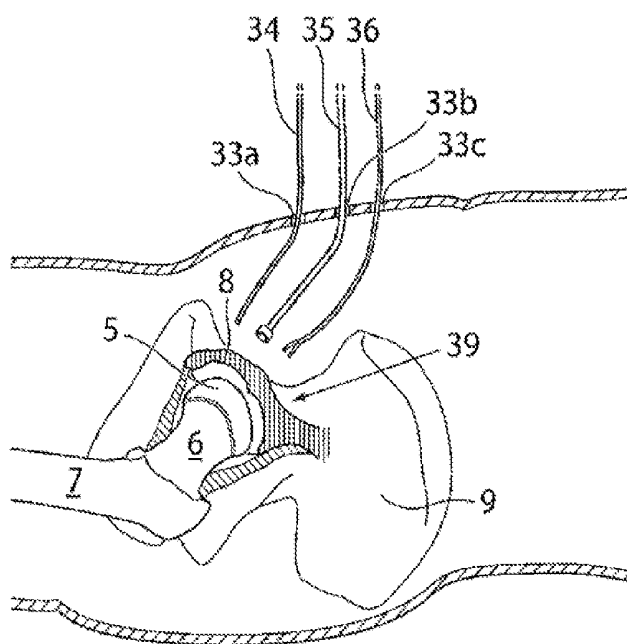


Fig. 15

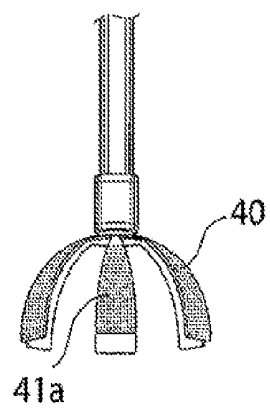


Fig. 16

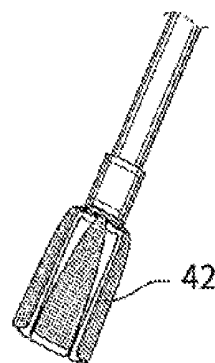


Fig. 17

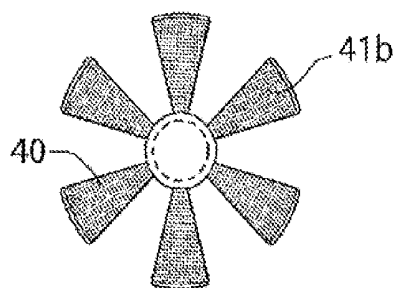


Fig. 18

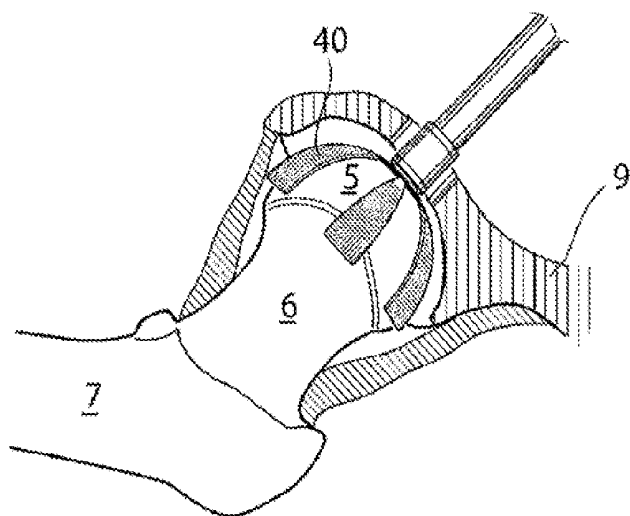


Fig. 19

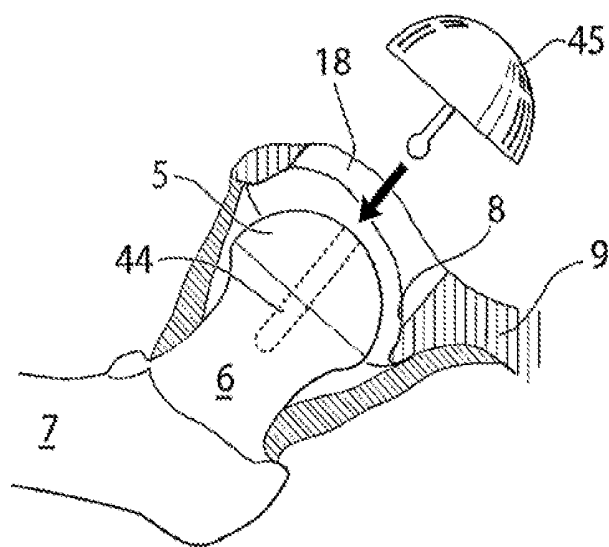


Fig. 20

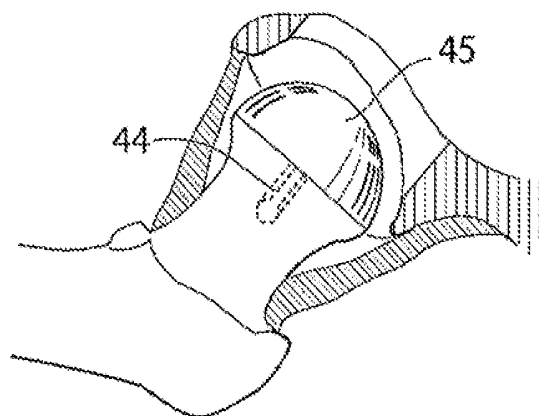


Fig. 21 a

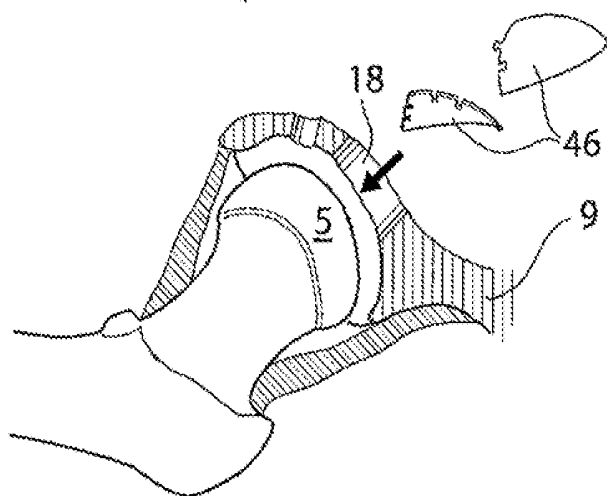


Fig. 21 b

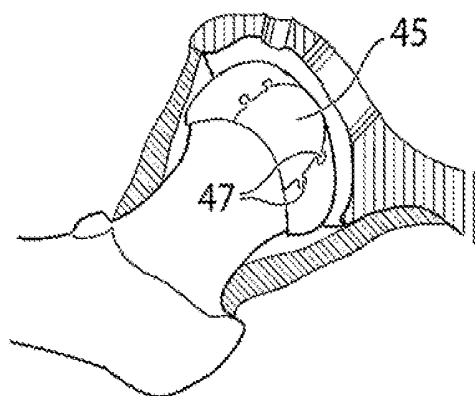


Fig. 21 d

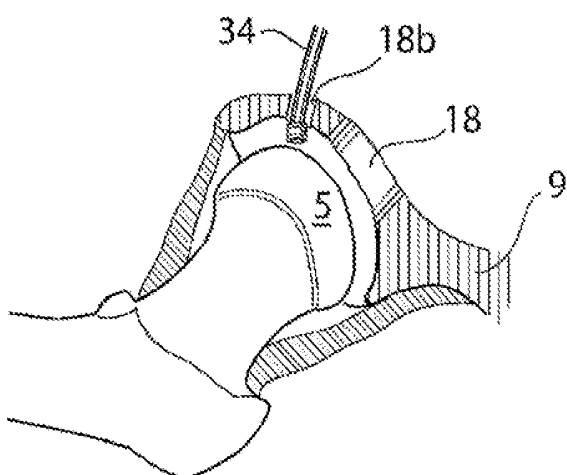


Fig. 21 c



Fig. 22

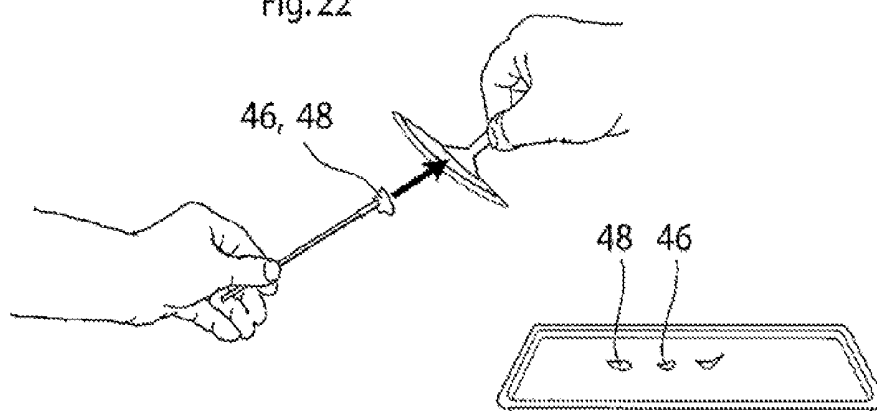


Fig. 23

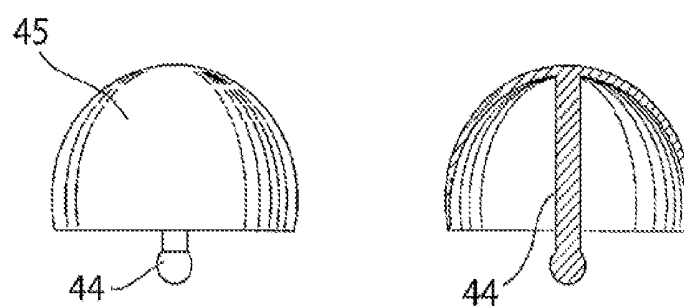


Fig. 24

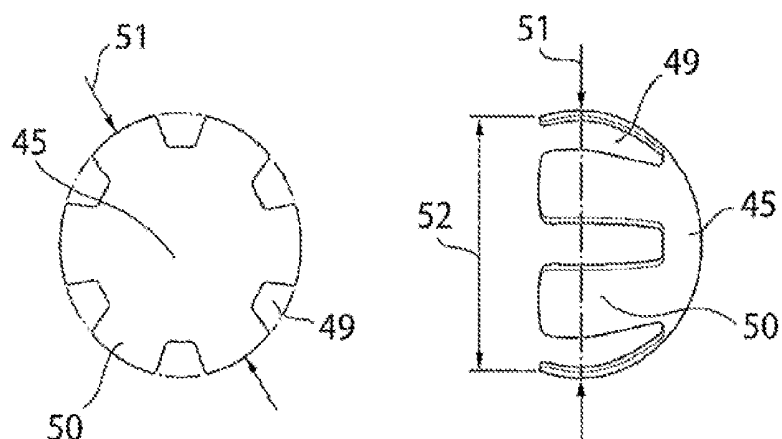


Fig. 25a




Fig. 25b

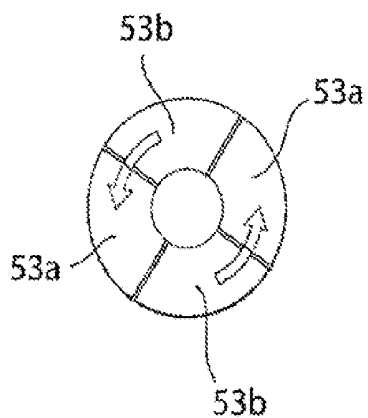


Fig. 25c




Fig. 25d




Fig. 25e




Fig. 26 a

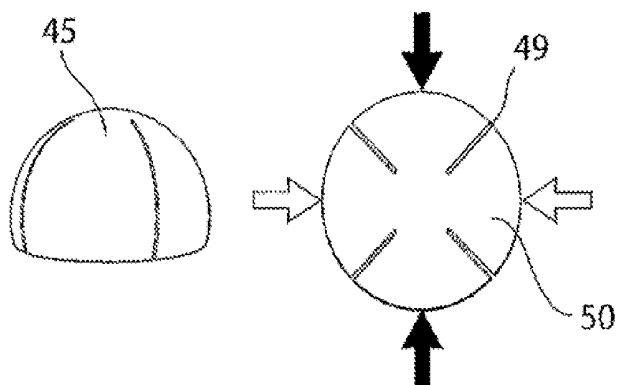


Fig. 26 b

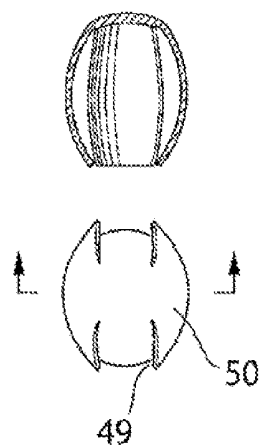


Fig. 27 a

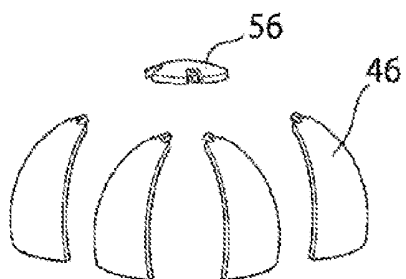


Fig. 27 b

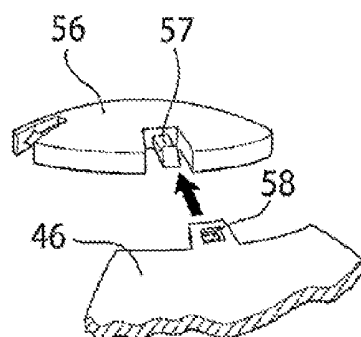


Fig. 27c




Fig. 28 a

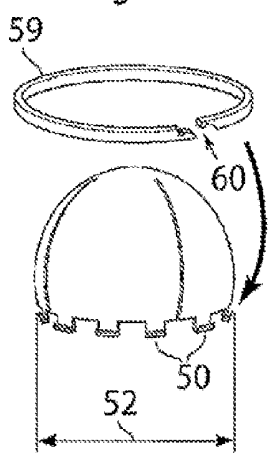


Fig. 28 b

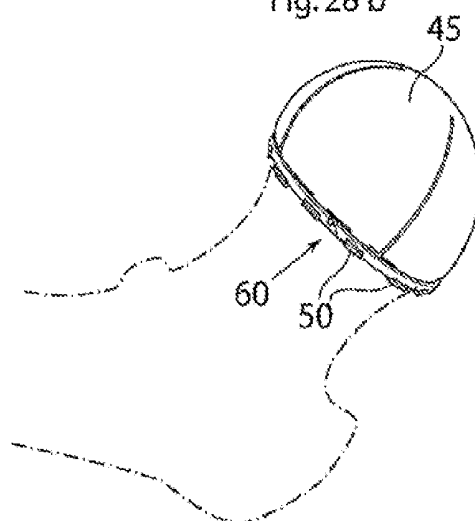


Fig. 28 c

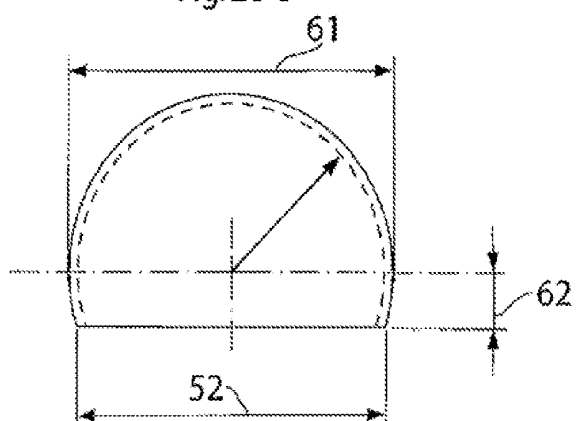


Fig. 29 a

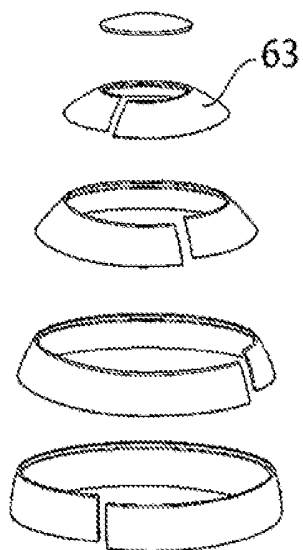


Fig. 29 b




Fig. 29 c

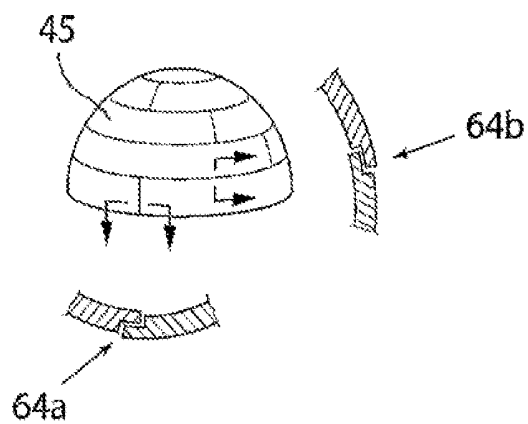


Fig. 30

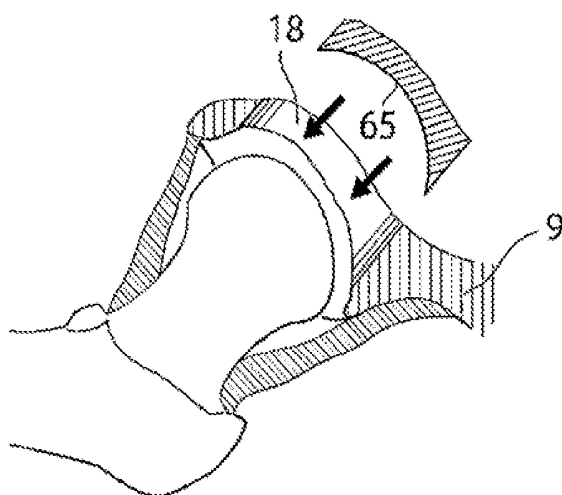


Fig.31

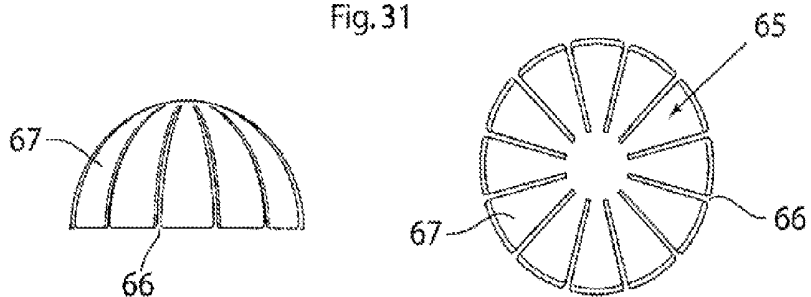


Fig.32 a

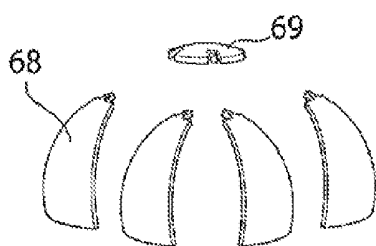


Fig.32 b




Fig.32 c




Fig.33 a

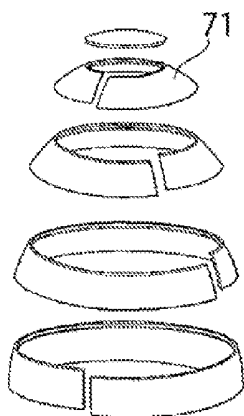


Fig.33 b




Fig.33 c

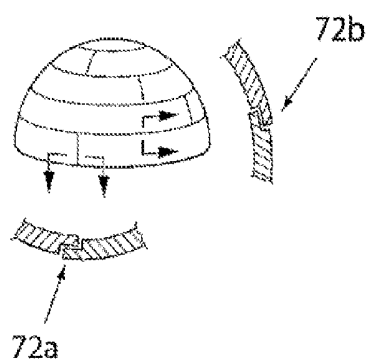


Fig. 34 a




Fig. 34 b

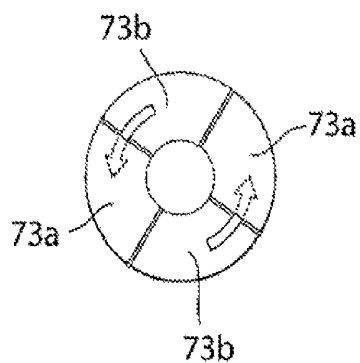


Fig. 34 c




Fig. 34 d




Fig. 35 a

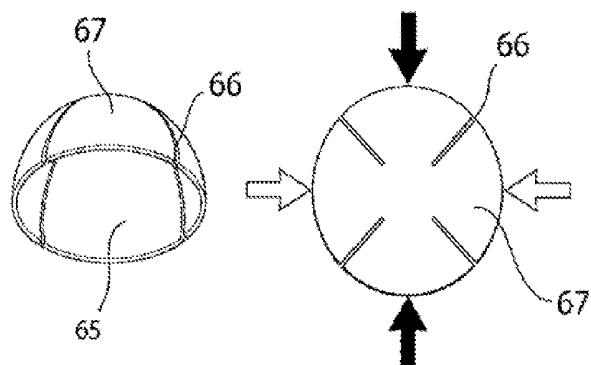


Fig. 35 b




Fig.36 a




Fig.36 b

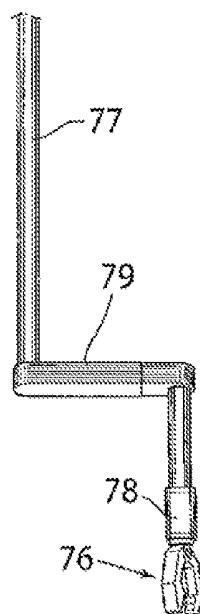


Fig.36 c

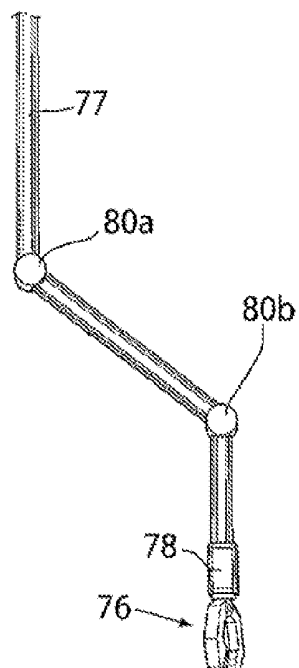
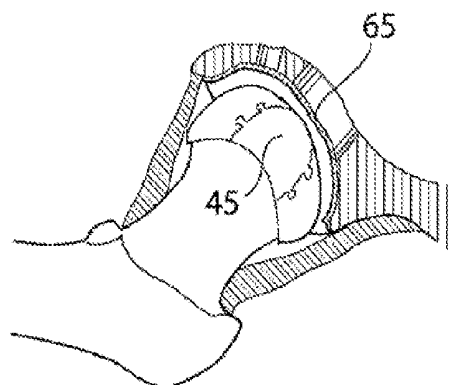


Fig.37



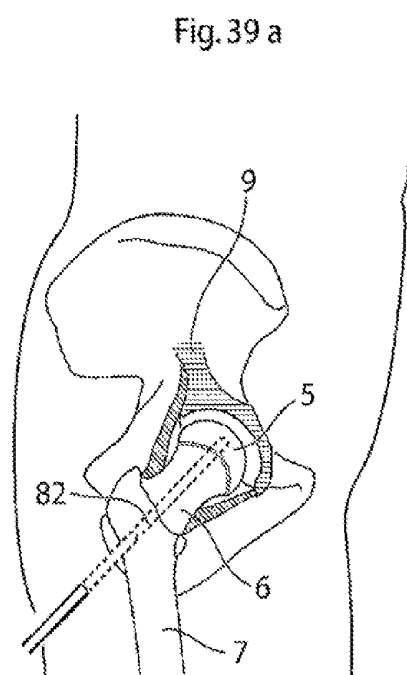
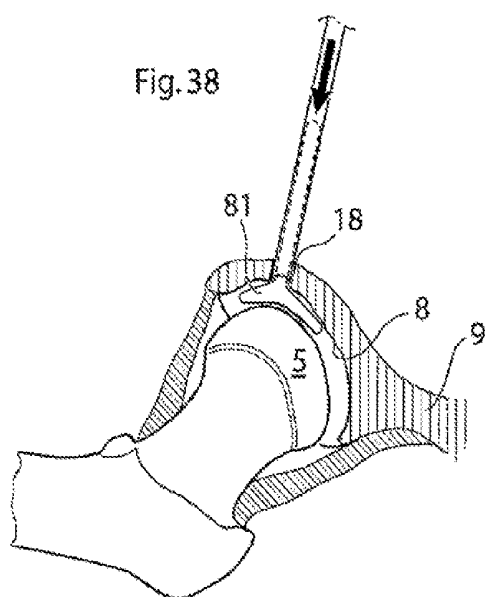


Fig. 39 b

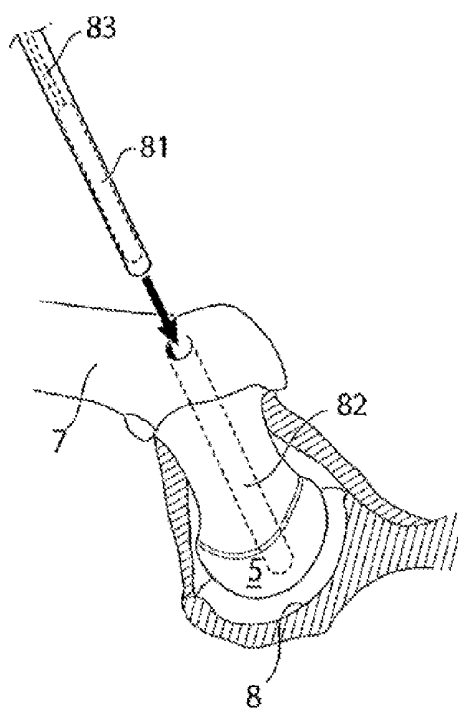


Fig. 39 c

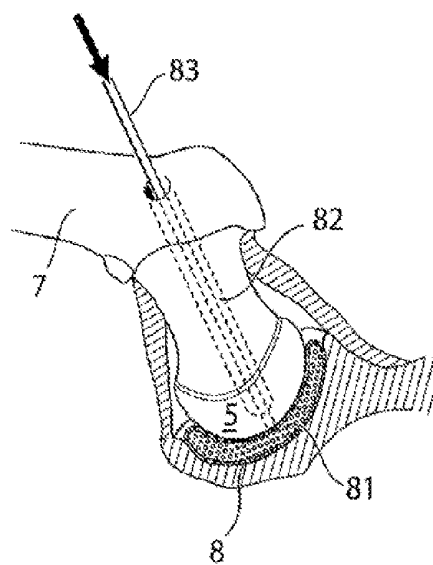


Fig. 39 d

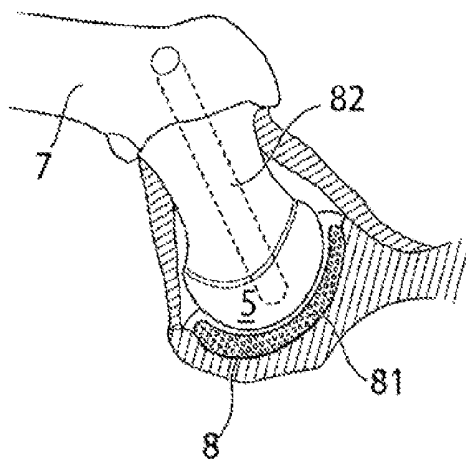


Fig. 40

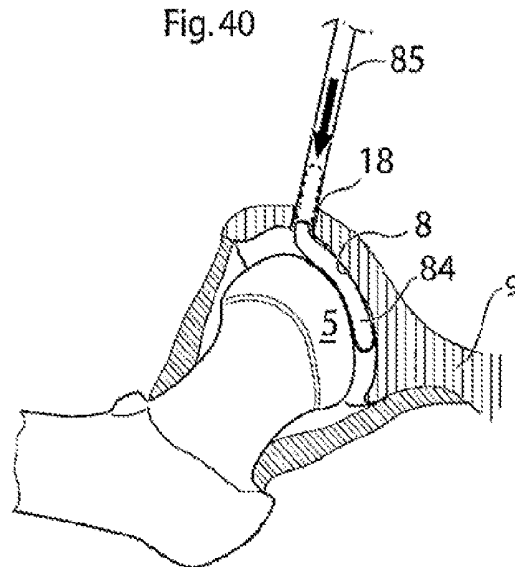


Fig. 41

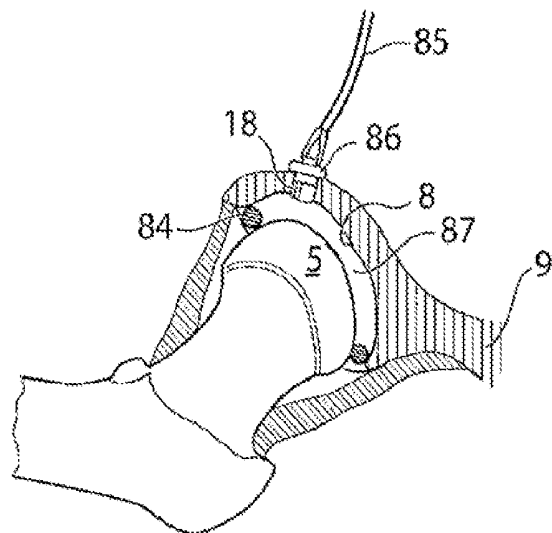


Fig. 42 a

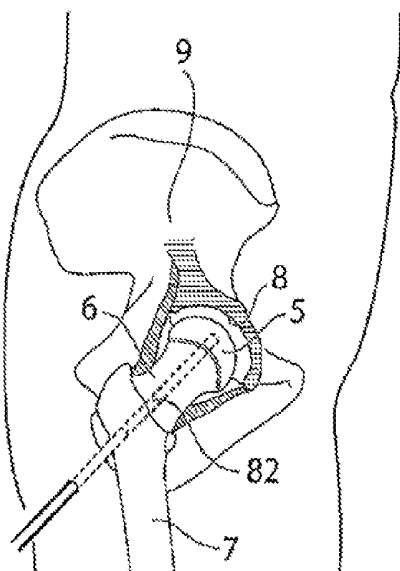


Fig. 42 b

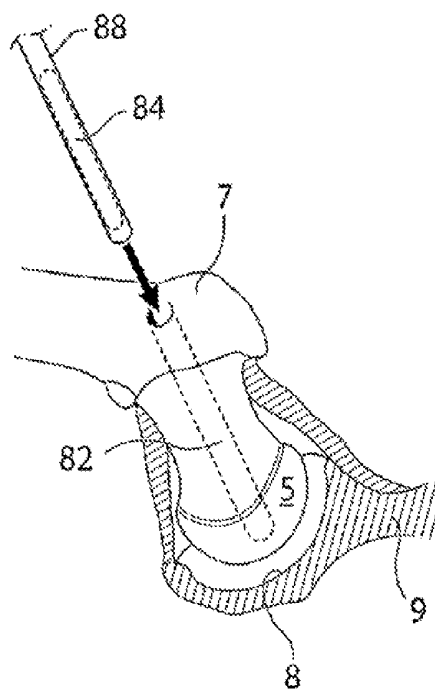
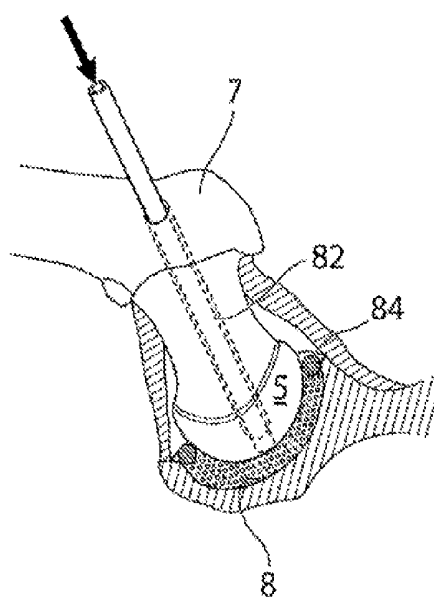


Fig. 42 c



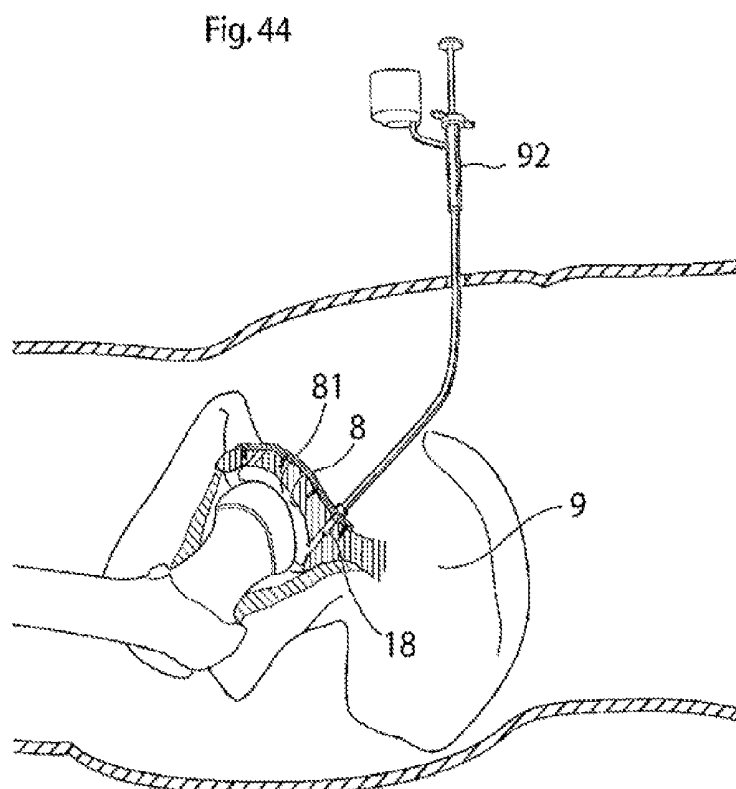
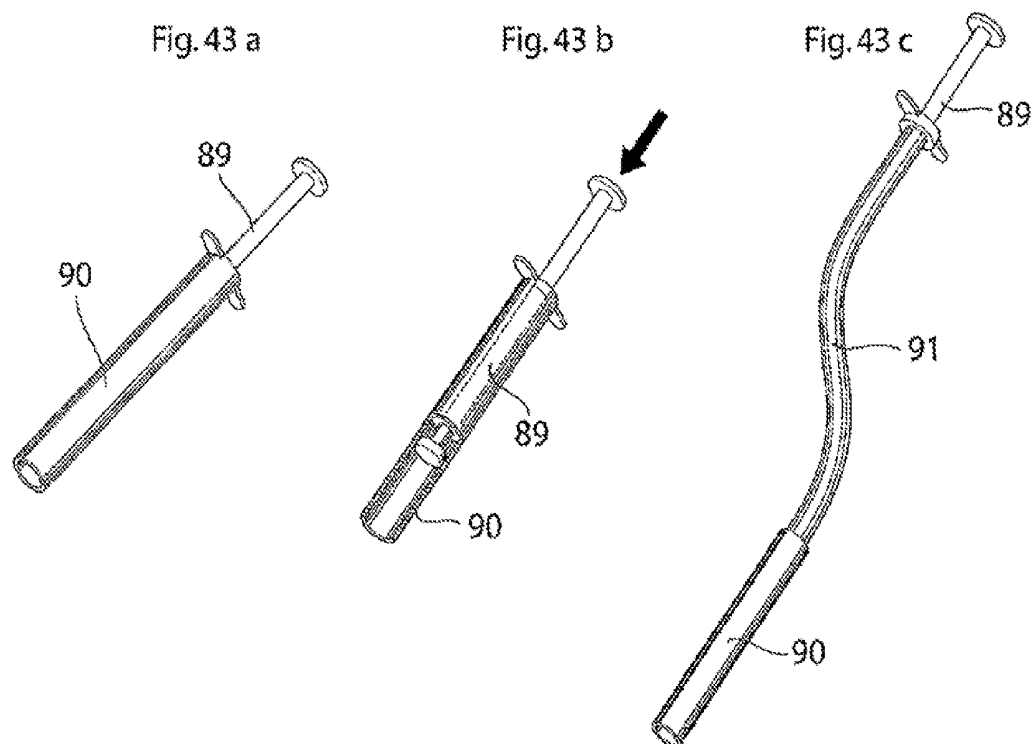


Fig. 45

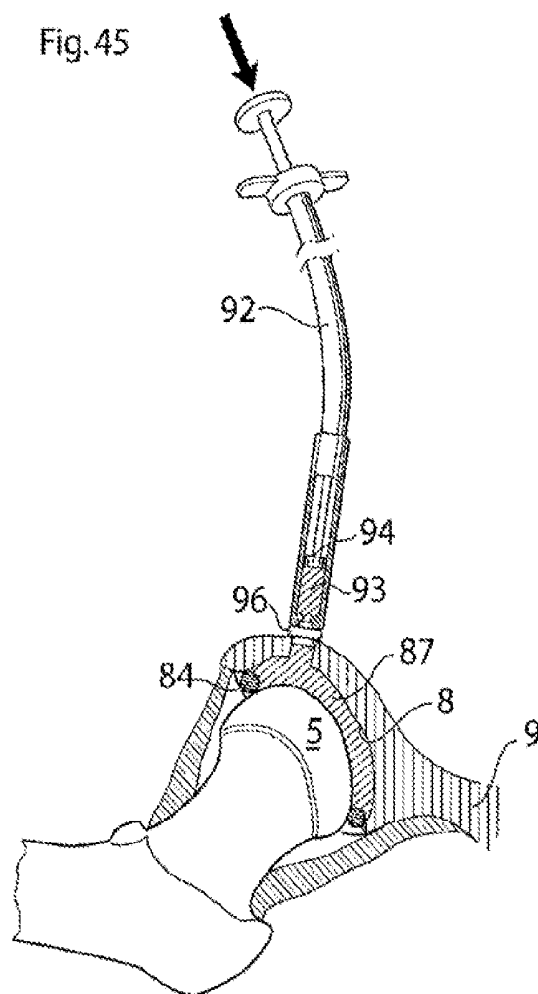
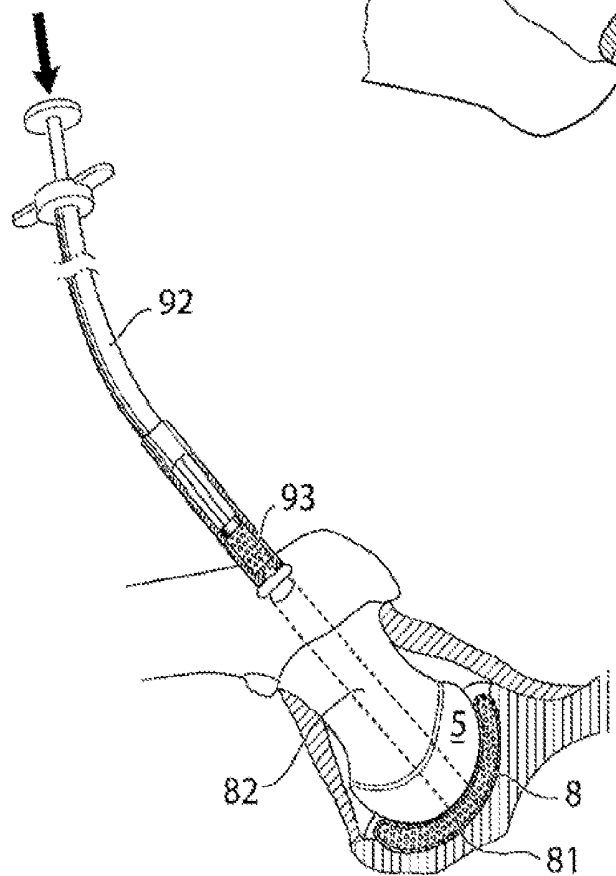


Fig. 46



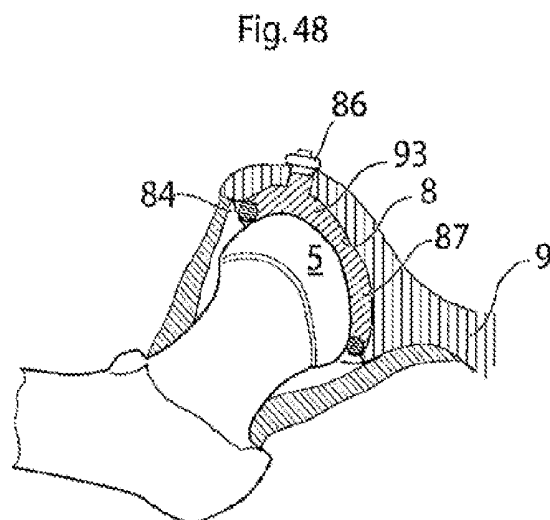
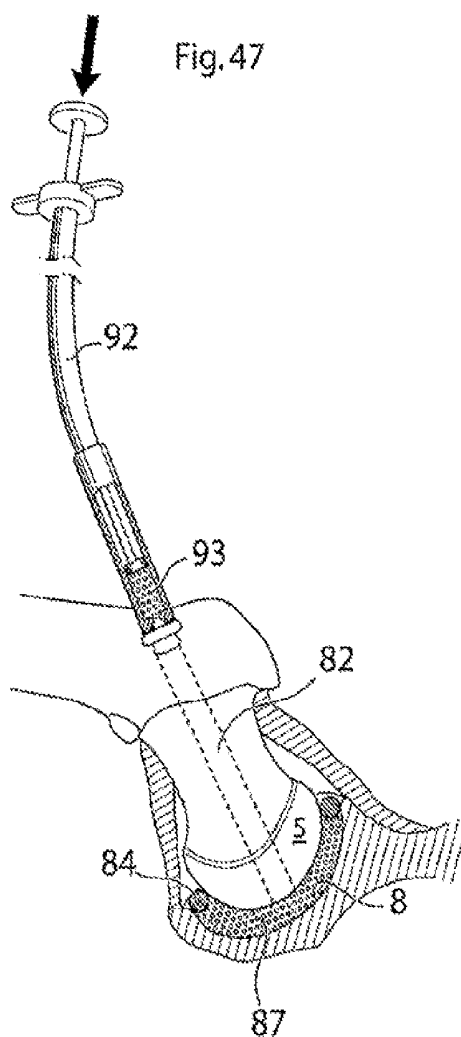


Fig. 49

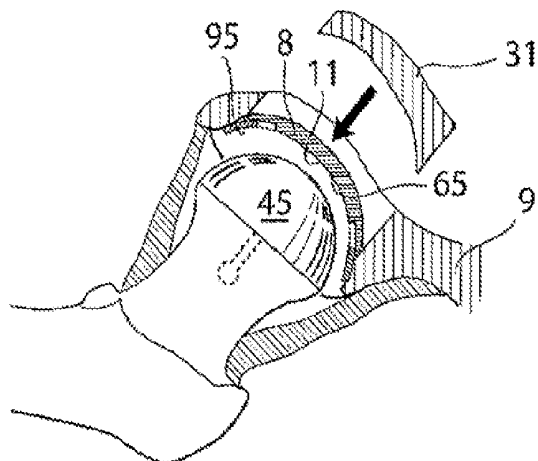


Fig. 50

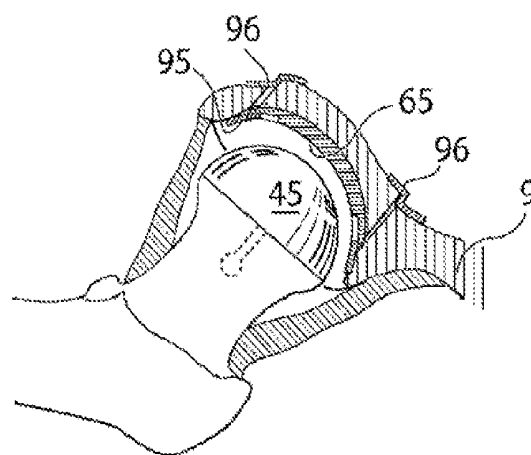


Fig. 51

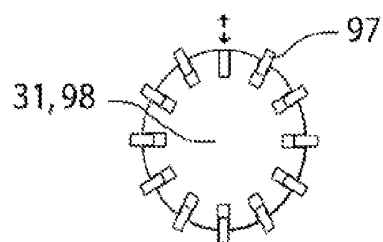


Fig. 52 a

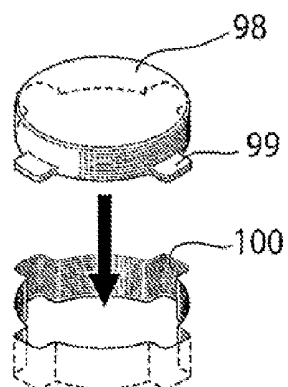


Fig. 52 c

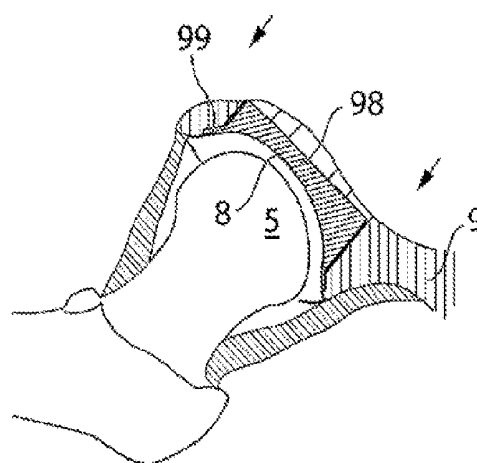


Fig. 52 b




Fig. 53 a

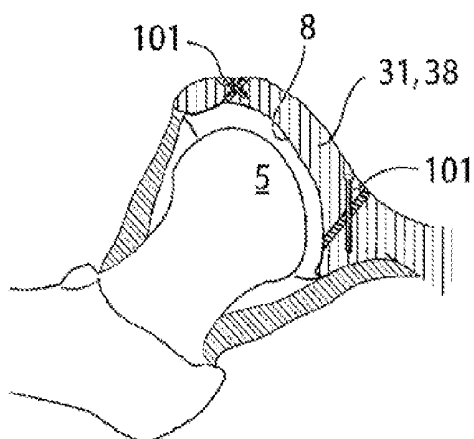


Fig.53 b

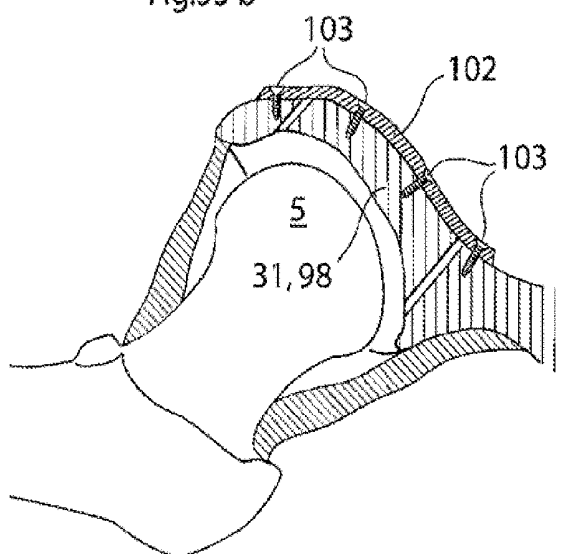


Fig.53 c

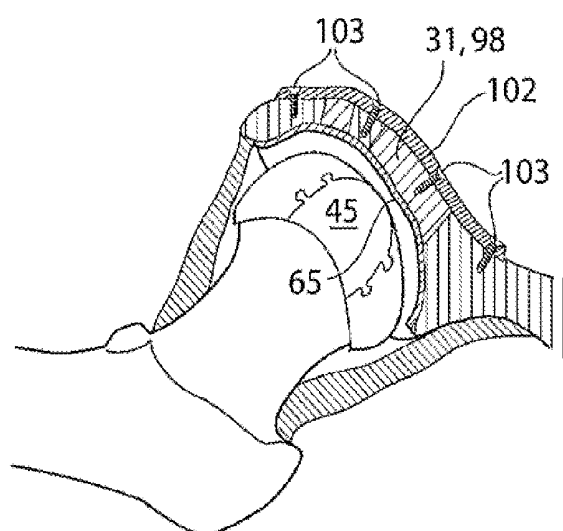


Fig.53 d

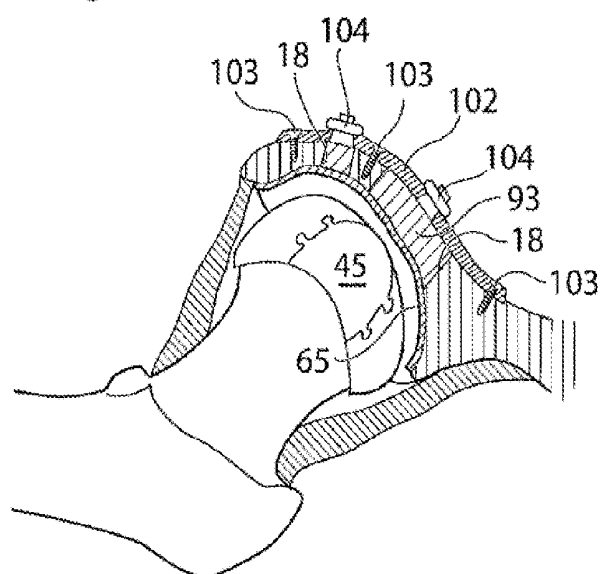


Fig.54 a

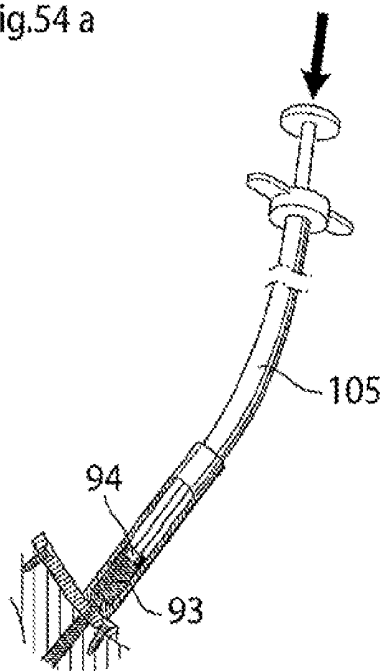


Fig.54 b

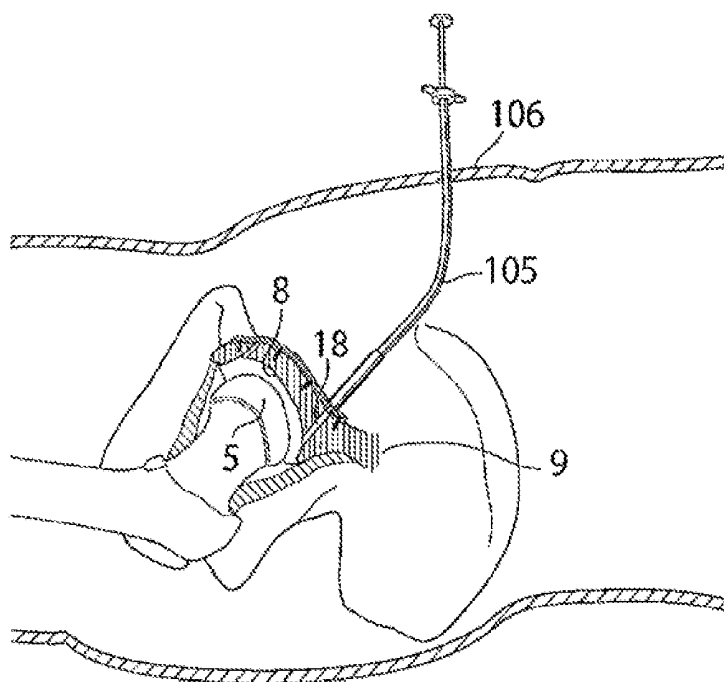


Fig.55

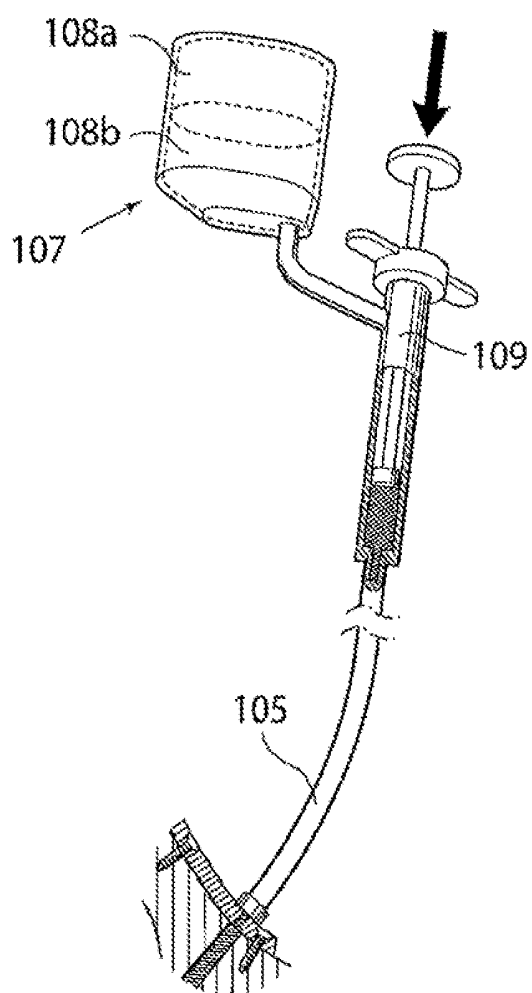


Fig.56 a


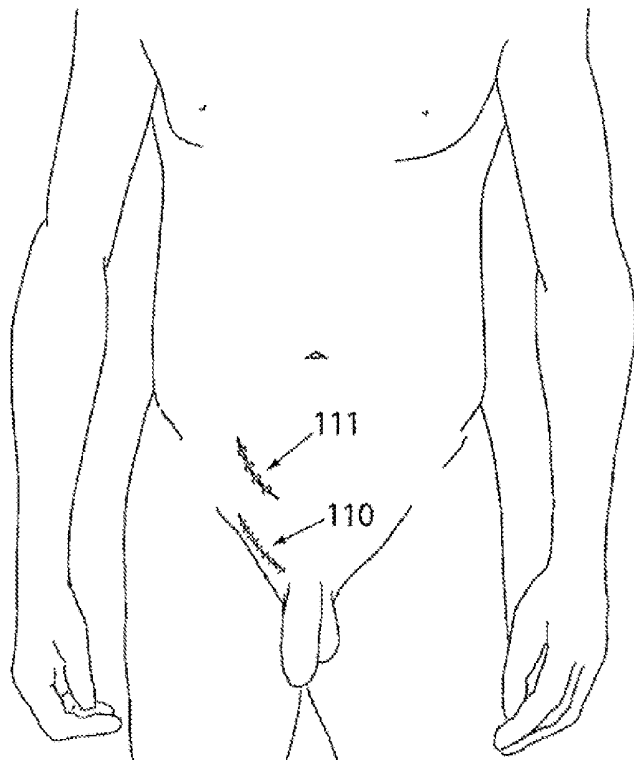


Fig.56 b

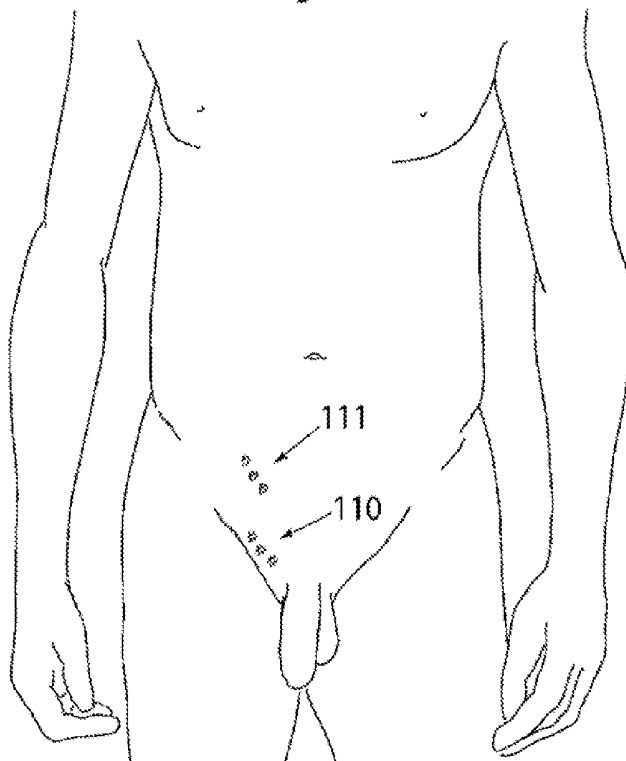

HIP JOINT METHOD

FIELD OF INVENTION

[0001] The present invention relates generally to a surgical or laparoscopic/arthroscopic method of operating a hip joint of a human patient.

BACKGROUND

[0002] Hip joint Osteoarthritis is a syndrome in which low-grade inflammation results in pain in the hip joints, caused by abnormal wearing of the cartilage that acts as a cushion inside of the hip joint. This abnormal wearing of the cartilage also results in a decrease of the joints lubricating fluid called Synovial fluid. Hip joint Osteoarthritis is estimated to affect 80% of all people over 65 years of age, in more or less serious forms.

[0003] The present treatment for hip osteoarthritis comprises NSAID drugs, local injections of Hyaluronic acid or Glucocorticoid to help lubricate the hip joint, and replacing parts of the hip joint with a prosthesis through hip joint surgery.

[0004] The replacing of parts of the hip joint is one of the most common surgeries to date performed at hundreds of thousands of patients in the world every year. The most common method comprises placing a metal prosthesis in femur and a plastic bowl in acetabulum. This operation is done through a lateral incision in the hip and upper thigh and through fascia lata and the lateral muscles of the thigh. To get access to the joint, the supporting hip joint capsule attached to femur and ilium of pelvis needs to be penetrated, making it difficult to get a fully functional joint after the surgery. Femur is then cut at the neck with a bone saw and the prosthesis is placed in femur either with bone cement or without. Acetabulum is slightly enlarged using an acetabular reamer, and the plastic bowl is positioned using screws or bone cement.

[0005] The surgery typically requires one week of hospitalization due to the increased risk of infection. The recovery process is on average about 6 weeks, but even after this period the patient should not perform any physical activities that places large strain on the joint.

[0006] It would therefore be desirable to have an operational method that could spare the hip joint capsule and reduce the removal of healthy femur bone. It would further be preferable to have a method of operating that could shorten the time for recovery of the patient, and reducing the amount of affected large blood vessels, thus reducing the risk of blood clots.

SUMMARY

The Surgical and Laparoscopic/Arthroscopic Method

[0007] A first object is to provide a surgical and/or laparoscopic/arthroscopic method for treating a hip joint of a human patient by providing at least one hip joint surface. The hip joint comprises a caput femur located on the very top of the femur bone and an acetabulum, which is a part of the pelvic bone, the caput femur is in connection with the acetabulum.

[0008] The idea is to perform an operation in the hip joint through a hole in the pelvic bone, however some of the aspects of the present invention can be performed using conventional surgery entering the hip joint through the hip joint capsule, or by entering through the femur bone.

[0009] The surgical method comprises the steps of cutting the skin of the human patient, dissecting an area of the pelvic

bone on the opposite side from acetabulum, creating a hole in the dissected area which passes through the pelvic bone and into the hip joint, and providing at least one hip joint surface into the hip joint, through the hole in the pelvic bone.

[0010] According to one embodiment, the step of cutting the skin of the human patient could be performed in the abdominal wall, the inguinal area, the pelvic region or the abdominal region of the patient.

[0011] The laparoscopic/arthroscopic method comprises the steps of inserting a needle or a tube like instrument into the abdominal region, pelvic region or inguinal region of the patient's body, using the needle or tube like instrument to fill the patient's body with gas, placing at least two laparoscopic/arthroscopic trocars in the patient's body, and inserting a camera through one of the laparoscopic/arthroscopic trocars into the patient's body. At least one dissecting tool is inserted through one of said at least two laparoscopic/arthroscopic trocars, after which an area of the pelvic bone on the opposite side from said acetabulum is dissected. Furthermore the method comprises the steps of creating a hole in said dissected area that passes through the pelvic bone and into the hip joint of the human patient, and providing at least one hip joint surface to the hip joint, through the hole in the pelvic bone.

[0012] According to one embodiment, the step of inserting a needle or tube like instrument is performed in the abdominal wall, the inguinal area, the pelvic region or the abdominal region of the patient.

[0013] The step of dissecting an area of the pelvic bone performed in both the surgical and the laparoscopic/arthroscopic method could be performed in the abdominal cavity, an area between peritoneum and the pelvic bone, an area of the pelvic bone and surrounding tissue, the pelvic area or an area of the pelvic bone that comprises the inguinal area. Dissecting a combination of the above mentioned areas is also conceivable. It is obvious that the methods described may both be combined or altered reaching the same goal to dissect the pelvic bone on the opposite side of the acetabulum.

[0014] The surgical or laparoscopic/arthroscopic method could further comprise the step of reaming the caput femur and/or the acetabulum, e.g. by means of an expandable reamer.

[0015] According to one embodiment the artificial hip joint surface could be fixated to the pelvic bone or to the caput femur after the step of providing said hip joint surface. The fixation could be performed by means of mechanical fixing members, such as screws or plates, adhesive, bone cement, or a combination thereof. When the artificial hip joint surface has been placed in the hip joint, the surgical or laparoscopic/arthroscopic method could further comprise the step of closing the hole in the pelvic bone using a bone plug, a prosthetic part, bone cement, or a combination thereof.

[0016] According to another embodiment the artificial hip joint surface is provided by means of a mould placed in the hip joint through a hole in the pelvic bone, the hip joint capsule or the femur bone. Said artificial hip joint surface could comprise an artificial acetabulum surface and/or an artificial caput femur surface. After the mould has been inserted into the hip joint a fluid is injected which serves as an artificial caput femur surface after hardening. It is conceivable that said mould is resorbable by the human body or made of a material adapted to melt.

[0017] According to yet another embodiment the artificial hip joint surface is provided by injecting a fluid into a sealed

area of the hip joint. Said artificial hip joint surface could comprise an artificial acetabulum surface and/or an artificial caput femur surface. The sealed area is sealed by means of at least one sealing member placed in said hip joint through a hole in the pelvic bone, the hip joint capsule or the femur bone. It is conceivable that said at least one sealing member is resorbable by the human body or made of a material adapted to melt.

[0018] After the steps of the surgical method have been performed, the instruments are withdrawn and the skin is closed using sutures or staples.

The Acetabulum Surface

[0019] According to one embodiment, the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface adapted to be inserted into the hip joint through a hole in the pelvic bone and to be in connection with the pelvic bone and carry the load placed on the caput femur from the weight of the patient by the connection with the pelvic bone. It is conceivable that the diameter of the hole is larger than the largest diameter of the artificial acetabulum surface thus allowing the artificial acetabulum surface to pass through the hole in its entirety, however it is also conceivable that said hole is smaller than the largest diameter of the artificial acetabulum surface thus hindering the artificial acetabulum surface from passing through the hole, which makes it possible for the edges of said hole to carry the load placed on said acetabulum from the weight of the patient.

[0020] According to one embodiment, the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least one supporting member which in turn could comprise at least one screw, adhesive, at least one plate, bone cement, a section of the artificial acetabulum surface or a combination of the mentioned alternatives. It is also conceivable that the supporting member comprises a first and second part. The second part is displaceable in relation to the first part and adapted to carry a load by the connection with the pelvic bone, and carries the load when displaced.

[0021] According to one embodiment, the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least two acetabulum surface parts. The at least two artificial acetabulum surface parts are adapted to be connected to each other after insertion in a hip joint of a human patient to form an artificial acetabulum surface. The two artificial caput femur surface parts could be adapted to be mechanically connected using at least one of: at least one screw, at least one pin, at least one portion of at least one of the parts adapted to be introduced into the other part, the parts being adapted to be sliding into the other part, form fitting, welding, adhesive, pin, wire, a ball mounted into a bowl being portions of said parts, a male portion of one part mounted into a female portion of the other part, a key introduced into a lock being portions of said parts, band, or other mechanical connecting members.

[0022] The artificial acetabulum being severable enables the insertion of the artificial acetabulum surface through a hole smaller than the artificial acetabulum surface which makes it possible for the edges of said hole to carry the load placed on said acetabulum from the weight of the human patient.

[0023] According to one embodiment, the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface adapted to have a varying largest

diameter for insertion through a hole in the pelvic bone from the opposite side from acetabulum, and the diameter of said artificial acetabulum surface varies when said artificial acetabulum surface is being inserted through said hole in the pelvic bone. Since the largest diameter of the artificial acetabulum surface is adapted to vary between being both smaller and larger than the hole in the pelvic bone, the hole could have a diameter smaller than the largest diameter of the artificial acetabulum surface.

[0024] The surgical or laparoscopic/arthroscopic method could comprise the step of inserting the artificial acetabulum surface adapted to have a varying largest diameter through the hole in the pelvic bone. In this embodiment it is conceivable that the artificial acetabulum surface is adapted to be flexible in its construction, thus enabling the insertion of said artificial acetabulum surface through a hole in the pelvic bone that is smaller than said largest diameter of the artificial acetabulum surface. The flexible part of the artificial acetabulum surface could further be adapted to expand after insertion through the hole making the largest diameter of the artificial acetabulum surface larger than the diameter of the hole in the pelvic bone, thus hindering the artificial acetabulum surface from passing through the hole.

Caput Femur Surface

[0025] According to one embodiment, the step of providing at least one hip joint surface comprises the step of providing an artificial caput femur surface adapted to be in connection with said acetabulum surface. It is conceivable that the diameter of the hole is larger than the largest diameter of the caput femur thus allowing the caput femur to pass through the hole. However it is also conceivable that said hole is smaller than the largest diameter of the caput femur thus hindering the caput femur from passing through the hole.

[0026] According to one embodiment, the step of providing an artificial caput femur surface comprises providing an artificial caput femur surface comprising at least two caput femur surface parts adapted to be connected to each other after insertion in a hip joint to form an artificial caput femur surface. According to one embodiment the at least two artificial caput femur surface parts are inserted through a hole in the pelvic bone from the opposite side from acetabulum, said hole having a diameter less than the largest diameter of said artificial caput femur surface. The mechanical connection that connects the parts of the artificial caput femur surface could be created using screws, form fitting, welding, sprits, band, adhesive or some other mechanical connecting member.

[0027] According to one embodiment the step of providing an artificial caput femur surface comprises providing an artificial caput femur surface adapted to have a varying largest diameter and having a largest diameter that varies for insertion through a hole in the pelvic bone from the opposite side from acetabulum of said human patient. Since the largest diameter of the artificial caput femur surface varies between being both smaller and larger than the hole in the pelvic bone, the hole could have a diameter smaller than the largest diameter of the artificial caput femur surface.

[0028] According to one embodiment, the step of providing an artificial caput femur surface comprises the step of inserting the artificial caput femur surface adapted to have a varying largest diameter through the hole in the pelvic bone. In this embodiment it is conceivable that the artificial caput femur surface is adapted to be flexible in its construction, and is

flexible in its construction when being inserted through a hole in the pelvic bone that is smaller than said largest diameter of the artificial caput femur surface. The flexible part of the artificial caput femur surface could further be adapted to expand, and expands, after insertion through the hole making the largest diameter of the artificial caput femur surface larger than the diameter of the hole in the pelvic bone, thus hindering the artificial caput femur surface from passing through the hole.

[0029] According to one embodiment, the step of providing an artificial caput femur surface comprises the step of providing at least two artificial caput femur surface parts. These at least two artificial caput femur surface parts are adapted to be connected, and connects to each other to form an artificial caput femur surface having a greatest internal cross-sectional area. The artificial caput femur surface is hollow and has an opening with a cross-sectional area smaller than the greatest internal cross-sectional area of the artificial caput femur, i.e. said artificial caput femur surface is larger than equator frustum spherical.

[0030] According to one embodiment, the step of providing an artificial caput femur surface comprises the step of providing an artificial caput femur surface that is hollow and has a greatest internal cross-sectional area and an opening with an area less than said greatest internal cross-sectional area of said artificial caput femur surface when mounted on the caput femur. The artificial caput femur surface further comprises at least one slit allowing said artificial caput femur surface to be mounted on said caput femur, which requires a diameter larger than the diameter of caput femur, and an opening smaller than said greatest internal cross-sectional area.

[0031] The surgical or laparoscopic/arthroscopic method could further comprise the steps of, inserting at least two artificial caput femur surface parts into the hip joint and mounting the at least two artificial caput femur surface parts on the hip joint to form an artificial caput femur surface. The artificial caput femur surface could be mechanically fixated to the caput femur by means of the mounting on the caput femur, i.e. the artificial caput femur surface can not be removed without dismounting the artificial caput femur surface parts.

Instruments

[0032] According to one embodiment the above mentioned step of reaming the acetabulum and/or the caput femur is performed by means of an expandable reamer after the step of inserting said expandable reamer through a hole in the pelvic bone has been performed.

[0033] The expandable reamer could be adapted to be inserted through a hole in the pelvic bone and could be adapted to be bent using one or more fixed angles, adjustable angles or parallel displaced parts or sections.

[0034] According to one embodiment the hole in said dissected area could be created using a surgical instrument creating a through-going hole in the acetabulum area from the abdominal side of the pelvic bone of said human patient through repetitive or continuous movement.

[0035] The surgical instrument could be adapted to create a through-going hole in the acetabulum area from the abdominal side of the pelvic bone of said human patient through repetitive or continuous movement. Furthermore the surgical instrument could comprise a driving member, a bone contacting organ in connection with said driving member and an operating device adapted to operate said driving member.

[0036] According to one embodiment the step of creating a through-going hole in the acetabulum area from the abdominal side of the pelvic bone is performed using a surgical instrument adapted to create a through-going hole in the pelvic bone further adapted to be bent using one or more fixed angles, adjustable angles or parallel displaced parts or sections. It is furthermore conceivable that said instrument could be adapted to ream the acetabulum and/or the caput femur, e.g. by means of the bone contacting organ being replaceable.

[0037] According to one embodiment the surgical or laparoscopic/arthroscopic method comprises the step of dissecting in the dissecting area. In this embodiment it is further conceivable that said dissecting is performed using a dissecting tool adapted to dissect an area of the pelvic bone from the opposite side from acetabulum.

[0038] According to one embodiment the surgical or laparoscopic/arthroscopic method comprises the step of placing a mould in the hip joint. In this embodiment it is further conceivable that said mould is placed in the hip joint through at least one of, the hip joint capsule, the pelvic bone, or the femur bone using a mould placing instrument. This instrument could be adapted to place a mould in the hip joint of a human patient, furthermore said instrument could be equipped with a fixed angle, an adjustable angle or a parallel displaced part or section for improved reach.

[0039] According to another embodiment the above mentioned surgical or laparoscopic/arthroscopic method comprises the step of placing at least one sealing member in the hip joint. In this embodiment it is further conceivable that the sealing member is placed in the hip joint through at least one of, the hip joint capsule, the pelvic bone, or the femur bone using an instrument adapted therefor. This instrument could be equipped with a fixed angle, an adjustable angle or a parallel displaced part or section for improved reach.

[0040] According to some of the above mentioned embodiments, the step of providing an artificial caput femur or acetabulum surface comprises the steps of providing at least two artificial acetabulum/caput femur surface parts. According to these embodiments the surgical or laparoscopic/arthroscopic method could comprise the step of inserting these at least two artificial acetabulum/caput femur surface parts, in which case a surgical instrument adapted therefor could be used. Said instrument could be adapted to insert the parts through at least one of, the hip joint capsule, the pelvic bone, or the femur bone. It is furthermore conceivable that said instrument is equipped with a fixed angle, an adjustable angle or a parallel displaced part or section for improved reach.

[0041] According to one embodiment the driving member and bone contacting organ together from an elongated member, placing said elongated member achieving a first supporting point for the bone contacting organ in the femoral bone and a second supporting point in a pelvic bone.

[0042] According to one embodiment, an operating device giving force to said driving member from outside the body, lateral on the opposite side of said hip joint outside the opposite side ilium pelvic bone outside the body. The elongated member could be adapted to receiving force from an operation device in the abdomen.

[0043] According to another embodiment, the elongated member is adapted to receive said force from an operation device outside the body, lateral of the proximal femoral bone.

BRIEF DESCRIPTION OF DRAWINGS

[0044] The invention is now described, by way of example, with reference to the accompanying drawings, in which:

[0045] FIG. 1 shows different locations of the incisions made in the human body in the surgical method,

[0046] FIG. 2 shows the hip joint in section,

[0047] FIG. 3 shows different locations where small incisions can be made in the human body in the laparoscopic/arthroscopic method,

[0048] FIG. 4 shows the hip joint in section when a hole is created in the pelvic bone,

[0049] FIG. 5 shows the hip joint in section when a small hole is created in the pelvic bone,

[0050] FIG. 6 shows the instrument that creates a hole in the pelvic bone according to a first embodiment,

[0051] FIG. 7 shows the instrument that creates a hole in the pelvic bone according to a first embodiment in greater detail,

[0052] FIG. 8 shows the instrument that creates a hole in the pelvic bone according to a second embodiment,

[0053] FIG. 9 shows the instrument that creates a hole in the pelvic bone according to a third embodiment,

[0054] FIG. 10 shows the bone contacting organ according to a first embodiment,

[0055] FIG. 11 shows the bone contacting organ according to a second embodiment,

[0056] FIG. 12 shows the laparoscopic/arthroscopic method of operating the hip joint of a human patient,

[0057] FIG. 13 shows a step of the laparoscopic/arthroscopic method in greater detail,

[0058] FIG. 14 shows a lateral view in section of the laparoscopic/arthroscopic method,

[0059] FIG. 15 shows the expandable reamer,

[0060] FIG. 16 shows the expandable reamer in its folded state,

[0061] FIG. 17 shows the expandable reamer from underneath,

[0062] FIG. 18 shows the expandable reamer being used in the surgical or laparoscopic/arthroscopic method,

[0063] FIG. 19 shows the step of providing an artificial caput femur surface,

[0064] FIG. 20 shows the a section of the hip joint after the artificial caput femur surface has been provided,

[0065] FIG. 21a show the insertion of artificial caput femur surface parts into the hip joint,

[0066] FIG. 21b shows the artificial caput femur surface parts after they have been connected inside of the hip joint forming an artificial caput femur surface,

[0067] FIG. 21c shows how the form of the artificial caput femur surface parts enables the connection of the artificial caput femur surface parts to form an artificial caput femur surface,

[0068] FIG. 21d shows a camera being inserted into the hip joint,

[0069] FIG. 22 shows the insertion of artificial hip joint surface parts in the surgical method,

[0070] FIG. 23 shows the artificial caput femur surface according to a first embodiment,

[0071] FIG. 24 shows the artificial caput femur surface according to a second embodiment,

[0072] FIG. 25a shows the artificial caput femur surface according to a third embodiment,

[0073] FIG. 25b shows the function of the artificial caput femur surface according to a third embodiment,

[0074] FIG. 25c shows the artificial caput femur surface according to a third embodiment, in its folded state,

[0075] FIG. 25d shows the artificial caput femur surface according to a third embodiment in perspective,

[0076] FIG. 25e shows the connecting function of the artificial caput femur surface according to a third embodiment,

[0077] FIG. 26a shows the artificial caput femur surface according to a fourth embodiment,

[0078] FIG. 26b shows the artificial caput femur surface according to the fourth embodiment in its folded state,

[0079] FIG. 27a shows the artificial caput femur surface according to a fifth embodiment,

[0080] FIG. 27b shows the artificial caput femur surface according to the fifth embodiment in greater detail,

[0081] FIG. 27c shows the artificial caput femur surface according to the fifth embodiment when assembled,

[0082] FIG. 28a shows the artificial caput femur surface according to a sixth embodiment,

[0083] FIG. 28b shows the artificial caput femur surface according to a sixth embodiment when fixated to the caput femur,

[0084] FIG. 28c shows an artificial caput femur surface being larger than equator frustum spherical,

[0085] FIG. 29a shows the artificial caput femur surface according to a seventh embodiment,

[0086] FIG. 29b shows the artificial caput femur surface according to the seventh embodiment when assembled,

[0087] FIG. 29c shows the artificial caput femur surface according to the seventh embodiment with the connecting members enlarged,

[0088] FIG. 30 shows an artificial acetabulum surface when being inserted into a hip joint,

[0089] FIG. 31 shows an artificial acetabulum surface according to a first embodiment,

[0090] FIG. 32a shows an artificial acetabulum surface according to a second embodiment,

[0091] FIG. 32b shows an artificial acetabulum surface according to the second embodiment in greater detail,

[0092] FIG. 32c shows the artificial acetabulum surface when assembled,

[0093] FIG. 33a shows an artificial acetabulum surface according to a third embodiment,

[0094] FIG. 33b shows an artificial acetabulum surface according to the third embodiment when assembled,

[0095] FIG. 33c shows the connection function of the artificial acetabulum surface according to the third embodiment,

[0096] FIG. 34a shows an artificial acetabulum surface according to a fourth embodiment,

[0097] FIG. 34b shows the function of the artificial acetabulum surface according to the fourth embodiment,

[0098] FIG. 34c shows an artificial acetabulum surface according to a fourth embodiment in its folded state,

[0099] FIG. 34d shows the connection function of the artificial acetabulum surface according to the fourth embodiment,

[0100] FIG. 35a shows an artificial acetabulum surface according to a fifth embodiment,

[0101] FIG. 35b shows an artificial acetabulum surface according to the fifth embodiment in its folded state,

[0102] FIG. 36a shows an instrument for inserting parts into a hip joint according to a first embodiment.

[0103] FIG. 36b shows an instrument for inserting parts into a hip joint according to a second embodiment,

[0104] FIG. 36c shows an instrument for inserting parts into a hip joint according to a third embodiment,

[0105] FIG. 37 shows a hip joint in section after an artificial caput femur surface and an artificial acetabulum surface have been provided,

[0106] FIG. 38 shows a hip joint in section when a mould is being inserted,

[0107] FIG. 39a shows the creation of a hole in the femur bone,

[0108] FIG. 39b shows an instrument able to introduce objects into a hip joint through the femur bone,

[0109] FIG. 39c shows the placing of a mould inside of the hip joint using an instrument that operates through the femur bone,

[0110] FIG. 39d shows the hip joint in section after the placing of a mould inside of the hip joint using an instrument that operates through the femur bone,

[0111] FIG. 40 shows the insertion of a first sealing member into a hip joint,

[0112] FIG. 41 shows the insertion of a second sealing member,

[0113] FIG. 42a shows the creation of a hole in the femur bone,

[0114] FIG. 42b shows an instrument able to introduce objects into a hip joint through the femur bone,

[0115] FIG. 42c shows the placing of a sealing member inside of the hip joint using an instrument that operates through the femur bone,

[0116] FIG. 43a shows an instrument for insertion of a mould or a scaling member into a hip joint,

[0117] FIG. 43b shows the instrument for insertion of a mould or a sealing member into a hip joint in section,

[0118] FIG. 43c shows the instrument for insertion of a mould or a sealing member into a hip joint according to a second embodiment,

[0119] FIG. 44 shows the insertion of fluid into an area of the hip joint,

[0120] FIG. 45 shows the filling of a scaled area inside of the hip joint using an instrument that operates through the pelvic bone,

[0121] FIG. 46 shows the filling of a mould inside of the hip joint using an instrument that operates through the femur bone,

[0122] FIG. 47 shows the filling of a sealed area inside of the hip joint using an instrument that operates through the femur bone,

[0123] FIG. 48 shows a hip joint in section after a scaled area in the hip joint has been filled with a fluid,

[0124] FIG. 49 shows the closing of a hole in the hip joint using a bone plug.

[0125] FIG. 50 shows the fixation of a bone plug in the pelvic bone,

[0126] FIG. 51 shows a part for closing a hole in the pelvic bone having displaceable supporting members,

[0127] FIG. 52a shows a prosthetic part being used to close a hole in the pelvic bone,

[0128] FIG. 52b shows how sections of a prosthetic part is used as support against the edges of the hole in the pelvic bone,

[0129] FIG. 52c shows the insertion of a prosthetic part in the hole in the pelvic bone,

[0130] FIG. 53a shows how screws are being used to fixate a bone plug or a prosthetic part in the hole in the pelvic bone of a human patient,

[0131] FIG. 53b shows how a supporting plate is being used to fixate a bone plug or a prosthetic part in the hole in the pelvic bone of a human patient,

[0132] FIG. 53c shows two bone plugs or prosthetic parts being fixated using a supporting plate,

[0133] FIG. 53d shows a section of the hip joint after two holes in the pelvic bone have been filled with a fluid,

[0134] FIG. 54a shows an injecting member adapted to inject a fluid into an area of the hip joint,

[0135] FIG. 54b shows an injecting member adapted to inject a fluid into an area of the hip joint when injecting a fluid,

[0136] FIG. 55 shows an injecting member in further detail,

[0137] FIG. 56a shows the step of suturing or stapling in the surgical method,

[0138] FIG. 56b shows the step of suturing or stapling in the laparoscopic/arthroscopic method,

DEFINITIONS

[0139] Functional position size and full functional size is the size of the artificial hip joint surface when it performs its function of working as a hip joint surface inside of the hip joint.

[0140] Frustum spherical is a geometric shape wherein a section of a sphere has been removed from a full sphere along a cross-sectional area of the sphere. Larger than equator frustum spherical aims to illustrate that the section removed from the sphere is smaller than the remainder so that the surface of the sphere still covers more than half of a full sphere and thus passes beyond the equator of said full sphere. An illustration of the larger than equator frustum spherical artificial caput femur surface is given in FIG. 28c.

[0141] The largest diameter of caput femur is the largest diameter of the sphere shaped caput femur that could be created with a radius substantially perpendicular to the column femur bone.

[0142] A cross-sectional distance is the distance between two or more elements located on a common three dimensional geometrical structure. According to one embodiment a cross sectional distance is the distance between two elements on an artificial caput femur surface, wherein said two elements produces a spherical shape having said cross-section.

[0143] Functional hip movements are to be understood as movements of the hip that at least partly correspond to the natural movements of the hip. On some occasions the natural movements of the hip joint might be somewhat limited or altered after hip joint surgery, which makes the functional hip movements of a hip joint with artificial surfaces somewhat different than the functional hip movements of a natural hip joint.

[0144] The functional position of an implantable medical device or prosthesis is the position in which the hip joint can perform functional hip movements. The final position is to be understood as a functional position in which the medical device needs no further position change.

[0145] Biocompatible material is to be understood as being a material with low level of immune response. Biocompatible materials are sometimes also referred to as biomaterials. Analogous is biocompatible metals a biocompatible metal with low immune response such as titanium or tantalum. The biocompatible metal could also be a biocompatible alloy comprising at least one biocompatible metal.

[0146] Form fitting is to be understood as an element having a part or section which is adapted to enable a mechanical connection of said element to at least one other element using

said part or section. Form fitted structure is a structure of an element which enables form fitting.

DETAILED DESCRIPTION

[0147] In the following a detailed description of embodiments of the present invention will be given. In the drawing figures, like reference numerals designate identical or corresponding elements throughout the several figures. It will be appreciated that these figures are for illustration only and are not in any way restricting the scope of the invention. Thus, any references to direction, such as “up” or “down”, are only referring to the directions shown in the figures. Also, any dimensions etc. shown in the figures are for illustration purposes.

[0148] The medical device according to any of the embodiments could comprise at least one material selected from a group consisting of: polytetrafluoroethylene (PTFE), perfluoroalkoxy (PFA) and fluorinated ethylene propylene (FEP). It is furthermore conceivable that the material comprises a metal alloy, such as cobalt-chromium-molybdenum or titanium or stainless steel, or polyethylene, such as cross-linked polyethylene or gas sterilized polyethylene. The use of ceramic material is also conceivable, in the contacting surfaces or the entire medical device such as zirconium or zirconium dioxide ceramics or alumina ceramics. The part of the medical device in contact with human bone for fixation of the medical device to human bone could comprise a porous structure which could be a porous micro or nano-structure adapted to promote the growth-in of human bone in the medical device for fixating the medical device. The porous structure could be achieved by applying a hydroxy-apatite (HA) coating, or a rough open-pored titanium coating, which could be produced by air plasma spraying, a combination comprising a rough open-pored titanium coating and a HA top layer is also conceivable. The contacting parts could be made of a self lubricated material such as a waxy polymer, such as PTFE, PFA, FEP, PE and UHMWPE, or a powder metallurgy material which could be infused with a lubricant, which preferably is a biocompatible lubricant such as a Hyaluronic acid derivative. It is also conceivable that the material of contacting parts or surfaces of the medical device herein is adapted to be constantly or intermittently lubricated. According to some embodiments the parts or portions of the medical device could comprise a combination of metal materials and/or carbon fibers and/or boron, a combination of metal and plastic materials, a combination of metal and carbon based material, a combination of carbon and plastic based material, a combination of flexible and stiff materials, a combination of elastic and less elastic materials, Corian or acrylic polymers.

[0149] FIG. 1 shows a frontal view of the body of a human patient. A surgical method of operating the hip joint from the opposite side from acetabulum, is according to a first embodiment performed starting with an incision 1 in the abdominal wall of the human patient. The incision 1 passes through the rectus abdominis and peritoneum in to the abdomen of the human patient. In a second preferred embodiment the incision 2 is conducted through the abdominal wall, preferably rectus abdominis and in to the pelvic area, below peritoneum. According to a third embodiment the incision 3 is performed just between Ilium and the surrounding tissue, an incision 3 which could enable the pelvic bone to be dissected with very little penetration of fascia and muscular tissue. According to a fourth embodiment the incision 4 is made in the inguinal channel. In all of the four embodiments the tissue surrounding

the pelvic bone 9 in the area opposite to acetabulum is removed or penetrated which enables the surgeon to reach the pelvic bone 9.

[0150] FIG. 2 shows the hip joint of a human patient in a lateral view. The hip joint comprises a caput femur 5 placed at the very top of collum femur 6 which is the top part of the femur bone 7. The caput femur is in connection with the acetabulum 8 which is a bowl shaped part of the pelvic bone 9. Both the caput femur surface 10 and the acetabulum surface 11 is covered with articular cartilage 13 which acts as a cushion in the hip joint. In patients with hip joint osteoarthritis, this articular cartilage 13 is abnormally worn down due to a low grade inflammation. The hip joint is surrounded by the hip joint capsule 12 which provides support for the joint and hinders luxation. After conventional hip joint surgery, penetrating the hip joint capsule 12, the capsule 12 is dramatically weakened due to the limited healing possibilities of its ligament tissue. By performing hip joint surgery without damaging the hip joint capsule 12 the patient can fully recover and place equal amount of strain on an artificial joint as is possible on a natural one.

[0151] FIG. 3 shows a frontal view of the body of a human patient. A laparoscopic/arthroscopic method of operating the hip joint, from the opposite side from acetabulum, is according to a first embodiment performed starting with making small incisions 14 in the abdominal wall of the human patient. The small incisions enable the surgeon to insert laparoscopic/arthroscopic trocars into the abdomen of the human patient. According to the first embodiment the incisions 14 passes through the rectus abdominis and peritoneum in to the abdomen of the human patient. According to a second preferred embodiment the small incisions 15 is conducted through the rectus abdominis and in to the pelvic area, below peritoneum.

[0152] According to a third embodiment the small incisions 16 is performed just between Ilium and the surrounding tissue, an incision 16 which could enable the pelvic bone to be dissected with very little penetration of fascia and muscular tissue. According to a fourth embodiment the incision 17 is made in the inguinal channel. In all of the four embodiments the tissue surrounding the pelvic bone 9 in the area opposite to acetabulum 8 is removed or penetrated which enables the surgeon to reach the pelvic bone 9.

[0153] After dissecting the pelvic bone 9 a hole 18 is created in the bone 9, shown in FIG. 4. The hole 18 passes through the pelvic bone from the opposite side from acetabulum 8 and into the hip joint 19. According to a first embodiment the hole 18 is large which allows a prosthesis to pass through said hole 18 in its full functional size. According to a second embodiment the hole 20 created in the surgical or laparoscopic/arthroscopic method is much smaller as shown in FIG. 5 allowing the surgical instrument creating the hole to be smaller, and thus the incision and dissection performed in the human body.

[0154] FIG. 6 shows a first embodiment of said surgical instrument creating the hole 18, 20 in the pelvic bone 9. The surgical instrument comprises a driving member 21a,b. The driving member 21a,b could be a shaft, a rod, a belt, a chain or any other element suitable for transferring force or torque. The surgical instrument also comprises a bone contacting organ 22 which is adapted to create the hole 18, 20 in the pelvic bone 9. The bone contacting organ 22 could have a sawing, drilling or milling effect using sharp objects; it is furthermore conceivable that said bone contacting organ 22 creates a hole using water, abrasive fluids, laser or radiation.

The surgical instrument also comprises an operating device **23a** adapted to operate the driving member **21a,b**. The operating device could comprise an electrical, mechanical, pneumatic or magnetic motor and it could be adapted to create a rotating, oscillating, vibrating or repetitive movement. According to one embodiment the operating device **23b** could be placed in direct connection with the bone contacting organ **22** shown in FIG. 7 in which case the operating device **23b** also serves as driving member. In this construction a handle portion **24** could be attached to the surgical instrument facilitating the surgeons handling of said surgical instrument. To improve the reach of the surgical instrument the handle portion **24** could be attached perpendicular to the hole-creating direction **25** of the surgical instrument, it is furthermore conceivable that the handle portion **24** is bent by means of a parallel displaced part or section, a fixed angle, an adjustable angle or a flexible part or section.

[0155] According to one embodiment of FIG. 6 the surgical instrument further comprises a parallel displaced part or section **26**. The parallel displaced part or section **26** improves the reach of the medical device and enables the creation of a hole **18** in the pelvic bone **9** from the opposite side from acetabulum **8**. According to one embodiment shown in FIG. 6 the parallel displaced part or section **26** has a telescopic function by means of the parallel displaced part or section **26** being divided in to a first and second part **27a, b**, wherein the second part **27b** can slide in and out of the first part **27a**.

[0156] FIG. 8 shows the surgical instrument according to a second embodiment wherein said surgical instrument comprises a driving member **28a,b,c** with two angle adjusting members **29a,b**. The angle adjusting members **29a,b** could be adjustable for varying the angle of said driving member **28a,b,c** or fixed in an angle suitable for creating a hole in the pelvic bone **9** from the opposite side from acetabulum **8**. In another embodiment (not shown) the part of the driving member **28c** in connection with the bone contacting organ **22** could be very short enabling the surgical instrument to operate very close to the pelvic bone **9** when creating a hole **18** in said pelvic bone **9**.

[0157] FIG. 9 shows the surgical instrument according to a third embodiment wherein the driving member **30** is flexible, enabling said driving member **30** to be very precisely adjusted to create a hole **18** in the pelvic bone **9** of the patient. The stiffness of said driving member **30** could range from completely flexible to completely stiff to fit the surroundings of the particular operation.

[0158] FIG. 10 shows the bone contacting organ according to a first embodiment wherein the bone contacting organ **22a** is adapted to create a bone plug **31**. The bone plug **31** could be adapted to be replaced into said hole **18** after the steps of the surgical or laparoscopic/arthroscopic method have been performed in the hip joint.

[0159] FIG. 11 shows the bone contacting organ according to a second embodiment wherein the bone contacting organ **22b** is adapted to create small pieces of bone **32** when creating said hole **18** in the pelvic bone **9**. The small pieces of bone could be transported from the area and out of the body using vacuum power or a hydraulic transport system.

[0160] FIG. 12 shows a frontal view of the body of a human patient, illustrating the laparoscopic/arthroscopic method of operating the hip joint from the opposite side from acetabulum **8**. The hip joint comprising the acetabulum **8** and the caput femur **5**. The small incisions **14** in the abdominal wall of the human patient allows the insertion of laparoscopic/arthro-

scopic trocars **33a,b,c** into the body of the patients. Whereafter one or more camera **34**, a surgical instrument adapted to create a hole in the pelvic bone **35**, or instruments **36** for introducing, placing, connecting, attaching, creating or filling prosthesis or prosthetic parts, can be inserted into said body through said laparoscopic/arthroscopic trocars **33a,b,c**.

[0161] FIG. 13 shows a close-up of the insertion **37** of prosthetic parts **38** into the patients body through said laparoscopic/arthroscopic trocars **33a,b,c**.

[0162] FIG. 14 shows a lateral view of the body of a human patient, with the hip joint shown in section. The hip joint comprises a caput femur **5** placed at the very top of collum femur **6** which is the top part of the femur bone **7**. The caput femur **5** is in connection with the acetabulum **8** which is a bowl shaped part of the pelvic bone **9**. Laparoscopic/arthroscopic trocars **33a,b,c** is being used to reach the hip joint **39** with one or more camera **34**, a surgical instrument **35** adapted to create a hole in the pelvic bone **9**, or instruments **36** for introducing, placing, connecting, attaching, creating or filling prosthesis or prosthetic parts.

[0163] The surgical and laparoscopic/arthroscopic methods shown in FIGS. 1, 3, 12, 13, 14 further comprises the step of reaming the acetabulum **8** or the caput femur **5**. According to a first embodiment the reaming of the acetabulum **8** or the caput femur **5** is performed using an expandable reamer shown in FIG. 15-17. The expandable reamer comprises at least one reaming blade **40** which comprises a reaming surface **41a,b**. Said expandable reamer could be adapted to ream the acetabulum **8**, the caput femur **5** or both. In the embodiment where said expandable reamer is adapted to ream the acetabulum **8** said reaming surface **41a** is located on the exterior part of the at least one reaming blade **40**, whereas in the embodiment when said expandable reamer is adapted to ream the caput femur **5**, said reaming surface **41b** is located on the interior part of the at least one reaming blade **40**. According to a second embodiment said expandable reamer is adapted to ream both the acetabulum and the caput femur, in which case the reamer has reaming surfaces **41a,b** both on the exterior and the interior part of the at least one reaming blade **40**.

[0164] FIG. 16 shows the expandable reamer according to a third embodiment, wherein the reaming blades **40** can be folded towards a center of the semi-sphere that the expandable reamer produces in its expanded state, shown in FIG. 15. The folding of the reaming blades **40** enables the expandable reamer to be introduced into a hip joint through a hole smaller than the area possible to ream using said expandable reamer.

[0165] FIG. 17 shows the interior said of the expandable reamer with the reaming blades **40**. In the embodiment when the expandable reamer is adapted to ream the caput femur said interior side of the at least one reaming blade **40** comprises a reaming surface **41b**.

[0166] FIG. 18. shows the expandable reamer according to any of the embodiments when reaming said acetabulum **8** and/or said caput femur **5**. The reamer can be adapted to be operated manually or by means of a rotating, vibrating or oscillating operating device.

[0167] According the one embodiment the bone contacting organ **22** of the surgical instrument shown in FIG. 6-11 can be replace with the expandable reamer shown in FIGS. 15-17, and in which case the expandable reamer can be powered using the operating device **23a,b** used in said surgical instrument.

[0168] After the preparation of the hip joint surfaces the method step of inserting or creating new surfaces is performed.

[0169] FIG. 19 shows the hip joint in section with the caput femur 5 placed at the very top of collum femur 6 which is the top part of the femur bone 7. The caput femur is in connection with the acetabulum 8 which is a bowl shaped part of the pelvic bone 9. According to a first embodiment the hole 18 created in the pelvic bone 9 from the opposite side from acetabulum 8, is larger than said artificial caput femur surface 45, enabling the insertion of said artificial caput femur surface 43 in its full functional size. Said insertion of said artificial caput femur surface 43 could be performed as a step of the surgical method, as well as a step of the laparoscopic/arthroscopic method. After the insertion, the artificial caput femur surface 43 is attached to the caput femur 5, according to the embodiment shown in FIGS. 19-20 the attaching is performed by means of a mechanical attachment 44 comprising a shaft or screw penetrating the cortex. It is however also conceivable that the mechanical attachment 44 is assisted by bone cement or adhesive placed between caput femur 5 and the artificial caput femur surface 43, or in connection with said shaft or screw 44. Alternative ways of attaching the artificial caput femur surface 43 includes: form fitting, welding, sprints, band or some other mechanical connecting member.

[0170] FIG. 20 shows the hip joint in section with the artificial caput femur surface 43 attached to the caput femur 5.

[0171] FIG. 21a shows the hip joint in section according to a second embodiment in which the hole 18 in the pelvic bone 9 is smaller than the artificial caput femur surface 45 in its full functional size. According to this embodiment the artificial caput femur surface 45 is introduced into said hip joint through the hole 18 in the pelvic bone 9 from the opposite side from acetabulum 8. The artificial caput femur surface parts 46 are connected to each other after insertion into said hip joint to form the artificial caput femur surface 45.

[0172] FIG. 21b shows the hip joint in section when the artificial caput femur surface parts 46 are connected to each other using form fitting 47, however it is conceivable that the form fitting is assisted or replaced with adhesive or bone cement. After the artificial caput femur surface parts 46 have been introduced and connected in the hip joint, they are mechanically fixated to the caput femur 5, the mechanical fixation could be done by means of screws, form fitting, welding, sprints, band, adhesive or some other mechanical attachment member.

[0173] FIG. 21c shows the artificial caput femur surface parts 46 with the parts supplying the form fitting 47.

[0174] FIG. 21d shows the hip joint in section wherein a second hole 18b in the pelvic bone 9 enables the surgeon to place a camera 34 into the hip joint, preferably used in the laparoscopic/arthroscopic method.

[0175] FIG. 22 shows the artificial hip joint surface parts 48 being inserted through an incision according to the surgical method. According to a first embodiment the artificial hip joint surface parts 48 are artificial caput femur surface parts 46, adapted to be connected to each other after the insertion to form an artificial caput femur surface 45. The same insertion can be performed in the laparoscopic/arthroscopic method, shown in FIG. 13.

[0176] FIG. 23 shows the artificial caput femur surface 45 according to a first embodiment also shown in FIG. 19-20. The shaft or screw placed in the middle of the artificial caput

femur surface 45 serves as a mechanical attachment 44 penetrating the cortex of the caput femur 5 and fixating the artificial caput femur surface 45 to the caput femur 5.

[0177] FIG. 24 shows a second embodiment of the artificial caput femur surface 45. The second embodiment comprises at least one slit 49 enabling the construction of the artificial caput femur surface 45 to be flexible, thus enabling the largest diameter 51 to vary for insertion of said artificial caput femur surface 45 through a hole in the pelvic bone 9 smaller than the full functional size of said artificial caput femur surface 45. According to this embodiment the artificial caput femur surface 45 further comprises artificial caput femur surface arms 50 located on the sides of said at least one slit 49. The caput femur surface arms 50 can be made of a flexible material enabling the insertion through a hole 18 in the pelvic bone 9 smaller than the largest diameter 51 of said artificial caput femur surface 45 when in its full functional size.

[0178] According to one embodiment the artificial caput femur surface 45 could be adapted to pass beyond the maximum diameter of the caput femur 5. This enables a mechanical fixation using the form of said artificial caput femur surface 45. In the embodiment where the artificial caput femur surface 45 travels beyond the maximum diameter of the caput femur 5 the construction can be made flexible so that the size of the artificial caput femur surface 45 can vary to become smaller for insertion through a hole 18 in the pelvic bone 9 smaller than the full functional size of the artificial caput femur surface 45, and have an opening adapter to travel over the caput femur 5 that can be larger than the same opening is in the full functional size of the artificial caput femur surface 45 enabling the artificial caput femur surface 45 to at least partly cover an area beyond the maximum diameter of caput femur 5 from the direction of the acetabulum 8. According to a second embodiment the artificial caput femur surface 45 comprises two or more artificial caput femur surface arms 50 which have a cross sectional distance 52 between each other. This cross sectional distance 52 is according to one embodiment shorter than the maximum diameter of the caput femur 5 enabling the mechanical fixation of the artificial caput femur surface 45 by means of said artificial caput femur surface arms 50.

[0179] FIG. 25a,b,c,d,e shows the artificial caput femur surface 45 according to a fourth embodiment, in which said artificial caput femur surface 45 comprises a first 53a and a second 53b section, as shown in FIG. 25b. The first and second sections are displaceable in relation to each other. According to a first embodiment said first section 53a can be rotated in relation to said second section 53b so that said second section 53b travels underneath said first section 53a to create a displaced artificial caput femur surface 54, as shown in FIG. 25c, which is possible to insert into a hip joint of a human patient through a hole 18 being oval, or at least having an area smaller than the cross sectional area of the artificial caput femur surface 45 when in its full functional size 45, as shown in FIG. 25a. According to this embodiment the two sections are connected to each other when the artificial caput femur surface 45 is returned to its full functional size using a mechanical form fitting 55, as shown in FIG. 25e. However it is also conceivable that said connection is assisted or replaced with screws, welding, sprints, band, adhesive or some other mechanical connecting member.

[0180] FIG. 26 shows a fourth embodiment of an artificial caput femur surface 45 comprising four slits. The artificial caput femur surface 45 is flexible in its construction allowing

the four artificial caput femur arms **50** to be folded towards the center axis of the artificial caput femur surface **45** thus allowing the artificial caput femur surface **45** to be inserted into a hip joint through a hole smaller than the full functional size of the artificial caput femur surface **45**. The artificial caput femur surface **45** according to this embodiment can be constructed to go beyond the maximum diameter of the caput femur **5**, in which case the construction with the slits **49** allows the artificial caput femur surface **45** to change to both a smaller and a larger size than said full functional size.

[0181] FIG. **26b** shows the artificial caput femur surface **45** in section when said artificial caput femur surface arms **50** are folded for insertion through a hole **18** with an area smaller than the largest area of the artificial caput femur surface **45** when in its full functional size.

[0182] FIG. **27a** shows fifth embodiment of the artificial caput femur surface **45** having multiple artificial caput femur surface parts **46**. Said multiple artificial caput femur surface parts **46** are adapted to be connected to an interconnecting artificial caput femur surface part **56** after insertion into a hip joint. The interconnecting artificial caput femur surface part **56** comprises self locking connecting members **57**, shown in FIG. **27b**, that fits with corresponding self locking members **58** of the artificial caput femur surface parts **46**. The artificial caput femur surface parts **46** creates an artificial caput femur surface **45** when connected to each other, shown in FIG. **27c**. The self locking members **57, 58** can be assisted or replaced with screws, welding, sprints, band, adhesive or some other mechanical connecting member. The artificial caput femur surface **45** according to this embodiment can further be adapted to go beyond the maximum diameter of the caput femur **5**.

[0183] FIG. **28a** shows a sixth embodiment the artificial caput femur surface **45** adapted to pass beyond the maximum diameter of the caput femur **5**. This enables a mechanical fixation using the form of said artificial caput femur surface **45**. In this embodiment the artificial caput femur surface **45** comprises at least two slits **49** adapted to make said artificial caput femur surface **45** flexible for travelling over and beyond the maximum diameter of the caput femur **5**. The construction could further be made flexible so that the size of the artificial caput femur surface **45** can vary to become smaller for insertion through a hole **18** in the pelvic bone **9** smaller than the full functional size of the artificial caput femur surface **45**. It is also conceivable that the artificial caput femur surface **45** comprises two or more artificial caput femur surface arms **50** which have a cross sectional distance **52** between each other. This cross sectional distance **52** is according to one embodiment shorter than the maximum diameter of the caput femur **5** enabling the mechanical fixation of the artificial caput femur surface **45** by means of said artificial caput femur surface arms **50**. For further fixation a band, cord or wire **59** can be placed around the artificial caput femur surface **45** beyond the maximum diameter of the caput femur **5**. The band, cord or wire can be mechanically connected using a self locking member **60** for forming a ring-shaped element able to assist in the fixation of the artificial caput femur surface **45** to the caput femur **5**.

[0184] FIG. **28b** shows the artificial caput femur surface **45** when fixated to the caput femur with the supporting band, cord or wire placed around the artificial caput femur surface **45** beyond the maximum diameter of the caput femur **5**.

[0185] FIG. **28c** shows the artificial caput femur surface **45** in section having a greatest cross-sectional distance **52**

adapted to travel over and beyond the maximum diameter of the caput femur **5**. The maximum diameter of the caput femur **5** being positioned at a corresponding largest cross sectional distance **61** of the artificial caput femur surface **45**. A second distance **62** is the distance that the artificial caput femur surface **45** travels beyond the maximum diameter of the caput femur **5**. Said distance **62** being part of the mechanical fixation of the artificial caput femur surface **45** to the caput femur **5**.

[0186] FIG. **29a** shows a seventh embodiment of the artificial caput femur surface **45** comprising multiple ring-shaped artificial caput femur surface parts **63**. Said multiple ring-shaped artificial caput femur surface parts **63** are adapted to be connected to each other to form an artificial caput femur surface **45**. According to one embodiment said artificial caput femur surface parts **63** are adapted to be connected to each other using mechanical connecting members **64a, b**, **64a** shows how an individual ring-shaped artificial caput femur surface part **63** can be connected to itself to form a continuous ring shape **64b** shows how an individual ring-shaped artificial caput femur surface part **63** connects to other ring-shaped artificial caput femur surface parts **63** to form an artificial caput femur surface **45**. The artificial caput femur surface **45** according to this embodiment can further be adapted to go beyond the maximum diameter of the caput femur **5**.

[0187] After the step of providing an artificial caput femur surface the surgical and laparoscopic/arthroscopic methods could further comprises the step of providing an artificial acetabulum surface.

[0188] According to a first embodiment the artificial acetabulum surface **65** is provided through a hole **18** in the pelvic bone **9** from the opposite side from acetabulum **8**. FIG. **30** shows an artificial acetabulum surface **65** in its full functional size as it is being inserted through a hole **18** in the pelvic bone **9**.

[0189] FIG. **31** shows an artificial acetabulum surface **65** according to a second embodiment in which the artificial acetabulum surface **65** comprises at least one slit **66** enabling the artificial acetabulum surface **65** to vary in size for insertion through a hole **18** in the pelvic bone **9** smaller than the full functional size of the artificial caput femur surface **45**. The slits **66** are placed between one or more artificial caput femur surface arms **67** which are flexible by means of the material or by means of a joint affecting said artificial caput femur surface arms **67**.

[0190] FIG. **32a, b, c** shows an artificial acetabulum surface **65** according to a second embodiment in which the artificial acetabulum surface **65** comprises multiple artificial acetabulum surface parts **68**. Said multiple artificial acetabulum surface parts **68** are adapted to be connected to an interconnecting artificial acetabulum surface part **69** after insertion into a hip joint. The interconnecting artificial caput femur surface part **69** comprises self locking connecting members **70a, b**, shown in FIG. **32b**, that fits with corresponding self locking members **70b** of the artificial acetabulum surface parts **68**. The artificial acetabulum surface parts **68** create an artificial acetabulum surface **65** when connected to each other, shown in FIG. **32c**. The self locking members **70a, b** can be assisted or replaced with screws, welding, sprints, band, adhesive or some other mechanical connecting member.

[0191] FIG. **33a, b, c** shows an artificial acetabulum surface **65** according to a third embodiment in which the artificial acetabulum surface **65** comprises multiple ring-shaped artificial acetabulum surface parts **71**. Said multiple ring-shaped

artificial acetabulum surface parts **71** are adapted to be connected to each other to form an artificial acetabulum surface **65** after insertion in a hip joint. According to one embodiment said artificial acetabulum surface parts **71** are adapted to be connected to each other using mechanical connecting members **72a,b**.

[0192] FIG. **33c** shows how an individual ring-shaped artificial acetabulum surface part **72a** can be connected to itself using the mechanical connecting member **70a** to form a continuous ring shape. Further **33c** shows how an individual ring-shaped artificial acetabulum surface part **71** connects to other ring-shaped artificial acetabulum surface parts **63** using the mechanical connecting member **72b** to form an artificial acetabulum surface **65**.

[0193] FIG. **34a,b,c,d** shows an artificial acetabulum surface **65** according to a fourth embodiment in which the artificial acetabulum surface **65** comprises a first **73a** and a second **73b** section, shown in FIG. **34b**. The first and second sections are displaceable in relation to each other. According to a first embodiment said first section **73a** can be rotated in relation to said second section **73b** so that said second section **73b** travels underneath said first section **73a** to create a displaced artificial acetabulum surface **74**, as shown in FIG. **34c**, which is possible to insert into a hip joint of a human patient through a hole being oval, or at least having an area smaller than the cross sectional area of the artificial acetabulum surface **65** when in its full functional size **65**. According to this embodiment the two sections **73a,b** are connected to each other when the artificial acetabulum surface is returned to its full functional size using a mechanical form fitting **75**, as shown in FIG. **34d**. However it is also conceivable that said connection is assisted or replaced with screws, welding, springs, band, adhesive or some other mechanical connecting member.

[0194] FIG. **35a** shows an artificial acetabulum surface **65** according to a fifth embodiment in which the artificial acetabulum surface **65** comprises four slits **66**. The artificial acetabulum surface **65** is flexible in its construction allowing the four artificial acetabulum arms **67** to be folded towards the center axis of the artificial acetabulum surface **65** thus allowing the artificial acetabulum surface to be inserted into a hip joint through a hole smaller than the full functional size of the artificial acetabulum surface **65**. FIG. **35b** shows the artificial acetabulum surface **65** according to the fifth embodiment in its folded state.

[0195] FIG. **36a** shows a surgical instrument adapted to insert a prosthesis, prosthetic parts or parts needed to create or provide a hip joint surface, according to a first embodiment. The surgical instrument comprises a gripping portion **76** and a handling portion **77**. According to the embodiments shown in FIG. **36a,b,c** the instrument further comprises a rotation element **78** that enables the gripping part **76** to rotate in relation to the handling part **77**, however it is equally conceivable that the surgical instrument lacks this rotation element **78**.

[0196] FIG. **36b** shows the surgical instrument adapted to insert a prosthesis, prosthetic parts or parts needed to create or provide a hip joint surface, according to a second embodiment. According to this embodiment the surgical instrument further comprises a parallel displaced section **79**, which increases the reach of the instrument and facilitates the reaching of the hip joint through a hole in the pelvic bone from the opposite side from acetabulum.

[0197] FIG. **36c** shows the surgical instrument adapted to insert a prosthesis, prosthetic parts or parts needed to create or provide a hip joint surface, according to a third embodiment. According to this embodiment the surgical instrument further comprises two angle adjusting members **80a,b**. The angle adjusting members could be adjustable for varying the angle of said gripping part **76** in relation to the handling portion **77**, or fixed in an angle suitable for creating operating in a hip joint through a hole in the pelvic bone from the opposite side from acetabulum **8**.

[0198] FIG. **37** shows the hip joint in section after the artificial caput femur surface **45**, and the artificial acetabulum surface **65** have been provided.

[0199] A different approach to the step of providing an artificial hip joint surface will now be described. This approach comprises the steps of casting an artificial hip joint surface inside of the hip joint. These steps can be performed by means of a mould, or without.

[0200] FIG. **38** shows the step of placing a mould **81** inside of the hip joint of a human patient through a hole **18** in the pelvic bone **9**. The step of placing said mould **81** can be performed in the surgical, or in the laparoscopic/arthroscopic method.

[0201] FIG. **39a,b,c,d** shows an alternative approach to placing said mould **81** in the hip joint of a human patient. Said alternative approach comprises the steps of creating a hole **82** in the femur bone **7** following a length axis of the collum femur **6**, said hole starting from the lateral side of the thigh, penetrating the cortex of the femur bone **7** and eventually reaching the cortex of the caput femur **5** from the inside thereof, penetrating said cortex and entering into the hip joint. After the creation of the hole **82** in the femur bone **7** the mould **81** is inserted into the hip joint through the hole **82** using a surgical instrument **83** adapted therefor, shown in FIG. **39b**.

[0202] FIG. **39c** shows the mould **82** when being inserted into the hip joint using the surgical instrument **83** adapted therefor.

[0203] FIG. **39d** shows the mould **82** after insertion into the hip joint, the surgical instrument used to place said mould **82** in the hip joint is retracted after the insertion is completed.

[0204] It is also conceivable that the hip joint surface is provided by casting the hip joint surface inside of the hip joint without the use of a mould.

[0205] FIG. **40** shows the hip joint in section wherein a first sealing member **84** is inserted through a hole **18** in the pelvic bone **9** using an instrument adapted therefor **85**. The step of placing said first sealing member **84** can be performed in the surgical, or in the laparoscopic/arthroscopic method.

[0206] FIG. **41** shows the hip joint in section wherein a second sealing member **86** is inserted through the surgical or laparoscopic/arthroscopic method. The first **84** and second **86** sealing members creates a sealed space **87** between the acetabulum **8** and the caput femur **5** adapted to be used as a mould for providing an artificial acetabulum **65** and/or a caput femur surface **45**.

[0207] FIG. **42a,b,c** shows an alternative approach to placing said first sealing member **84** in the hip joint of a human patient. Said alternative approach comprises the steps of creating a hole **82** in the femur bone **7** following a length axis of the collum femur **6**, as shown in FIG. **44a**, said hole starting from the lateral side of the thigh, penetrating the cortex of the femur bone **7** and eventually reaching the cortex of the caput femur **5** from the inside thereof, penetrating said cortex and entering into the hip joint. After the creation of the hole **82** in

the femur bone 7 the first sealing member 84 is inserted into the hip joint through the hole 82 using a surgical instrument 88 adapted therefor, as shown in FIG. 44c.

[0208] FIG. 43a,b,c shows the surgical instrument adapted to insert a mould 81 and/or a first and second sealing member 84,86 into the hip joint of a human patient through a hole 18 in the pelvic bone 9 or a hole 82 in the femur bone 9.

[0209] FIG. 43b shows a section of the surgical instrument 83,85,88 comprising a tube like element for housing of the mould 81 and/or said first and second sealing members 84,86. A piston 89 used to transport said mould 81 and/or first and second sealing members 84,86 into the hip joint of a human patient is also shown.

[0210] FIG. 43c shows a surgical instrument 83,85,88 adapted to insert a mould 81 and/or a first and second sealing member 84,86 into the hip joint of a human patient, the second embodiment further comprises a flexible or bent part 91 improving the reach of the surgical instrument.

[0211] After the steps of providing a mould 81 or a sealed space 87, fluid is injected into said mould 81 or into said sealed space 87 through the hole 18 in the pelvic bone 9 or the hole 82 in the femur bone 7.

[0212] FIG. 44 shows a lateral section of the human body wherein an injecting member 92 injects a fluid into a mould 81 in the hip joint through a hole 18 in the pelvic bone 9 from the opposite side from acetabulum 8.

[0213] FIG. 45 shows the hip joint in section wherein an injecting member 92 injects a fluid 93 into a sealed area 87 in the hip joint through a hole 18 in the pelvic bone 9 from the opposite side from acetabulum 8. Said sealed area 87, being sealed by a first 84 and second 86 sealing member. The injecting member 92 comprises a piston 94 that pushes said fluid 93 into the sealed area 87.

[0214] FIG. 46 shows the hip joint in section wherein an injecting member 92 injects a fluid 93 into a mould 81 in the hip joint through a hole 82 in the femur bone 7. The injecting member 92 comprises a piston 94 that pushes said fluid 93 into the mould 81.

[0215] FIG. 47 shows the hip joint in section wherein an injecting member 92 injects a fluid 93 into a sealed area 87 in the hip joint through a hole 82 in the pelvic bone 9 from the opposite side from acetabulum 8. Said sealed area 87, being sealed by at least a first 84 sealing member. The injecting member 92 comprises a piston 94 that pushes said fluid 93 into the sealed area 87.

[0216] FIG. 48 shows the sealed area 87, sealed by the first 84 and second 86 sealing member together with the caput femur 5 and the pelvic bone 9. A fluid adapted to harden 93 has been injected into said sealed area, and after the hardening of said fluid it provides at least one hip joint surface.

[0217] After the injecting member 92 has injected a fluid 93 into a mould 81 or a sealed area 87 it is being retracted from the area.

[0218] The mould 81 and the first and second sealing members 84,86 according to any of the embodiments can further be adapted to be resorbable by the human body or to melt after they have served their purpose.

[0219] After at least one hip joint surface has been provided through a hole 18 in the pelvic bone 9, in accordance with any of the embodiment above, said hole 18 needs to be closed.

[0220] FIG. 49 shows the hip joint of a human patient in section wherein a bone plug 31 is placed in the hole 18 in the pelvic bone 9 to close said hole 18. According to a first embodiment the artificial acetabulum surface 65 comprises

supporting members 94 which carries the load placed on the acetabulum 8 from weight of the human patient through the contact with the caput femur 5. Said supporting members can be adapted to be displaceable 97 supporting members. The bone plug 31 can be attached to the artificial acetabulum surface 11 and/or the pelvic bone 9 by means of bone cement, adhesive, screws, form fitting, welding, sprints, band or some other mechanical connecting member.

[0221] FIG. 50 shows the hip joint of a human patient in section wherein the bone plug 31 placed in the hole 18 in the pelvic bone 9 is further supported by supporting means 96 placed between the bone plug 31 and the pelvic bone 9 on the opposite side from acetabulum 8 using at least one of: bone cement, adhesive, screws, form fitting, welding, sprints, band or some other mechanical connecting member.

[0222] FIG. 51 shows a bone plug 31 or a prosthetic part 98 comprising several displaceable supporting members adapted to carry the load placed on the acetabulum 8 from weight of the human patient through the contact with the caput femur 5. The displaceable parts 97 are displaced into a corresponding part in or at the edge of the hole 18 in the pelvic bone 9.

[0223] According to a second embodiment the closing of the hole 18 in the pelvic bone is done by means of a prosthetic part 98. FIG. 52a shows the prosthetic part 98 being inserted into a hole 18 in the pelvic bone 9 from the opposite side from acetabulum 8. According to one embodiment the prosthetic part 98 comprises supporting members 99 adapted to correspond with sections 100 of the hole 18 in the pelvic bone 9. After the prosthetic part 98 has been inserted into said hole 18 in the pelvic bone 9 it is rotated so that the supporting members 99 comes in contact with the pelvic bone 9 and can carry the load placed on the acetabulum 8 from weight of the human patient through the contact with the caput femur 5. Said prosthetic part 98 could also be adapted to serve as artificial acetabulum surface 65 according to any of the above mentioned embodiments.

[0224] FIG. 52b shows the prosthetic part 98 when rotated to carry the load placed on the acetabulum 8 from weight of the human patient through the contact with the caput femur 5.

[0225] FIG. 52c shows the hip joint of a human patient in section wherein the prosthetic part 98 closes the hole 18 in the pelvic bone 9 and carries the load placed on the acetabulum 8 from weight of the human patient through the contact with the caput femur 5 by means of the supporting members 99. The prosthetic part 98 can further be fixated to the pelvic bone 9 by means of bone cement, adhesive, screws, form fitting, welding, sprints, band or some other mechanical connecting member.

[0226] FIG. 53a shows the hip joint of a human patient in section wherein bone plug 31 or prosthetic part 98 is attached to the pelvic bone 9 by means of screws 101 placed from the opposite side from acetabulum 8. The screws 101 are possible to place in different angles depending on reach or need for support.

[0227] FIG. 53b shows the hip joint of a human patient in section wherein bone plug 31 or prosthetic part 98 is attached to the pelvic bone 9 by means of a plate 102 at least partly covering said bone plug 31 or prosthetic part 98. According to a first embodiment the plate 102 is attached to the pelvic bone 9 by means of screws 103 placed from the opposite side from acetabulum 8. However it is also conceivable that said screws

103 can be replaced or assisted by bone cement, adhesive, form fitting, welding, sprints, band or some other mechanical connecting member.

[0228] FIG. 53c shows the hip joint of a human patient in section wherein two bone plugs **31** or prosthetic parts **98** are attached to the pelvic bone **9** by means of a plate **102** at least partly covering said bone plugs **31** or prosthetic parts **98**. According to a first embodiment the plate **102** is attached to the pelvic bone **9** by means of screws **103** placed from the opposite side from acetabulum **8**. However it is also conceivable that said screws **103** can be replaced or assisted by bone cement, adhesive, form fitting, welding, sprints, band or some other mechanical connecting member. FIG. 53c also shows the provided artificial acetabulum surface **65**.

[0229] FIG. 53d shows the hip joint of a human patient in section wherein two holes **18** in the pelvic bone has been covered by means of a fluid injected into said holes **18**, through sealing members **104**, said fluid **93** being adapted to harden. Further more a plate **102** has been provided at least partly covering said holes **18**. According to a first embodiment the plate **102** is attached to the pelvic bone **9** by means of screws **103** placed from the opposite side from acetabulum **8**. However it is also conceivable that said screws **103** can be replaced or assisted by bone cement, adhesive, form fitting, welding, sprints, band or some other mechanical connecting member. FIG. 53d also shows the provided artificial acetabulum surface **65**, and the provided artificial caput femur surface **45**.

[0230] FIG. 54a shows an injecting member **105** for injecting a fluid adapted to harden **93**, preferably bone cement or adhesive to be used as support in the closing of the hole **18** in the pelvic bone **9**. The injecting member **105** comprises a piston **94** that pushes said fluid **93** the area where it is wanted.

[0231] FIG. 54b shows the injecting member **105** as it is inserted through the skin **106** of a human patient in the surgical or laparoscopic/arthroscopic method, and is further placed in connection with the hip joint through the hole **18** in the pelvic bone **9**. The injecting member **105** is adapted to inject a fluid **93** adapted to harden.

[0232] FIG. 55 shows the injecting member **105** according to any of the embodiments above, adapted to inject fluid **93** into a mould **81**, a sealed area **87** or a connecting area between the pelvic bone **9** and a prosthetic part, the pelvic bone **9** and a bone plug **31** or the caput femur **5** and a prosthetic part. Said injecting member comprises a container **107** adapted to hold a fluid for injection. According to a first embodiment said container comprises two compartments **108a, b** adapted to hold two different fluids, said fluids being adapted to harden when mixed. In the embodiment when the container **107** is adapted to hold two fluids, it is conceivable that the injecting member **105** further comprises a mixing member **109** wherein said two fluids are being mixed before injection. According to a second embodiment (not shown) said container **107** is adapted to keep said fluid sterile. According to a third embodiment (not shown) said container **107** is adapted to keep said fluid cold and according to a fourth embodiment (not shown) said container **107** is adapted to keep said fluid in a dark environment. Furthermore a combination of the above mentioned embodiments is conceivable.

[0233] After the step of closing the hole in the pelvic bone of the human patient is concluded all instruments are retracted and the final step of the surgical or laparoscopic/arthroscopic method is performed. The final step comprises

suturing or stapling the affected tissue and finally suturing or stapling the skin of the human patient.

[0234] FIG. 56a shows the step of suturing **110** or stapling **111** the skin **106** of the human patient in the surgical method, whereas FIG. 56b shows the step of suturing **110** or stapling **111** the skin **106** of the human patient in the laparoscopic/arthroscopic method.

[0235] Please note that any embodiment or part of embodiment as well as any method or part of method could be combined in any way. All examples herein should be seen as part of the general description and therefore possible to combine in any way in general terms.

1-77. (canceled)

78. A method of treating a hip joint of a human patient by providing at least one hip joint surface, said hip joint comprising a caput femur and an acetabulum, said method comprising the steps of:

- cutting the skin of the human patient,
- dissecting an area of the pelvic bone on the opposite side from the acetabulum,
- creating a hole in said dissected area from the opposite side from the acetabulum, said hole passing through the pelvic bone and into the hip joint of the human patient, and
- providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, through said hole in the pelvic bone of the human patient,

wherein the step of dissecting an area of the pelvic bone comprises at least one of the following:

- dissecting an area between peritoneum and the pelvic bone,
- dissecting an area of the pelvic bone comprises dissecting an area between the pelvic bone and the surrounding tissue,
- dissecting an area of the pelvic bone comprises dissecting an area of the pelvic region, and
- dissecting an area of the pelvic bone comprises dissecting an area of the inguinal region.

or,

wherein the method further comprises at least two of the following steps:

- dissecting an area of the abdominal cavity,
- penetrating the hip joint capsule,
- dissecting an area between peritoneum and the pelvic bone,
- dissecting an area of the pelvic bone comprises dissecting an area between the pelvic bone and the surrounding tissue,
- dissecting an area of the pelvic bone comprises dissecting an area of the pelvic region,
- dissecting an area of the pelvic bone comprises dissecting an area of the inguinal region, and
- removing or penetrating the tissue surrounding the pelvic bone in the area opposite to acetabulum.

79. A method of treating a hip joint of a human patient by providing at least one hip joint surface, said hip joint comprising a caput femur and an acetabulum, said method comprising the steps of:

- inserting a needle or a tube like instrument into the patient's body,
- using the needle or tube like instrument to fill a part of the patient's body with gas and thereby expanding a cavity within the body, wherein said cavity is located in a region to be able to reach the opposite side of the pelvic bone.

placing at least two laparoscopic/arthroscopic trocars in said cavity,
 inserting a camera through one of the laparoscopic/arthroscopic trocars into said cavity,
 inserting at least one dissecting tool through one of said at least two laparoscopic/arthroscopic trocars,
 dissecting an area of the pelvic bone on the opposite side from the acetabulum,
 creating a hole in said dissected area from the opposite side from the acetabulum, said hole passing through the pelvic bone and into the hip joint of the human patient, and
 providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, through said hole in the pelvic bone of the human patient.
 closing said hole in the pelvic bone, wherein said closing of said hole in the pelvic bone is performed by means of bone cement, a bone plug, or a prosthetic part.

80. The method of treating a hip joint of a human patient according to claim 2, wherein the step of providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, comprising the method step of providing at least one of: an artificial caput femur, an artificial caput femur surface, an artificial acetabulum and an artificial acetabulum surface, wherein the method further comprising the step of, mounting said at least one hip joint surface in said hip joint.

81. The method of treating a hip joint of a human patient according to claim 2, further comprising the step of reaming the acetabulum.

82. The method of treating a hip joint of a human patient according to claim 2, further comprising the step of reaming the caput femur.

83. The method of treating a hip joint of a human patient according to claim 1, further comprising the step of fixating the hip joint surface to the caput femur, other part of femoral bone or to the pelvic bone.

84. The method of treating a hip joint of a human patient according to claim 6, wherein said fixation is performed by means of mechanical fixating members, bone cement or adhesive.

85. The method of treating a hip joint of a human patient according to claim 2, further comprising the step of placing a mold inside of the hip joint of the human patient, further comprising the step of injecting a fluid into said mold placed inside of the hip joint of the human patient.

86. The method of treating a hip joint of a human patient according to claim 2, further comprising the steps of:
 placing at least one sealing member between the acetabulum and the caput femur, thus creating a sealed area between the acetabulum and the caput femur, and
 injecting a fluid into said sealed area, and
 said fluid changing from fluid to solid form.

87. The method of treating a hip joint of a human patient according to claim 2, further comprising the step of withdrawing instruments.

88. The method of treating a hip joint of a human patient according to claim 2, further comprising the step of closing the skin of the human patient using sutures or staples.

89. The method of treating a hip joint of a human patient according to claim 2, wherein the step of cutting the skin of the human patient is performed in the abdominal wall of the human patient.

90. The method of treating a hip joint of a human patient according to claim 2, wherein the step of cutting the skin of the human patient is performed in the inguinal area of the human patient.

91. The method of treating a hip joint of a human patient according to claim 2, wherein the step of cutting the skin of the human patient is performed in the pelvic region of the human patient.

92. The method of treating a hip joint of a human patient according to claim 2, wherein the step of dissecting an area of the pelvic bone comprises dissecting an area of the abdominal cavity.

93. The method of treating a hip joint of a human patient according to claim 2, wherein the step of dissecting an area of the pelvic bone comprises dissecting an area between peritoneum and the pelvic bone.

94. The method of treating a hip joint of a human patient according to claim 2, wherein the step of dissecting an area of the pelvic bone comprises dissecting an area between the pelvic bone and the surrounding tissue.

95. The method of treating a hip joint of a human patient according to claim 2, wherein the step of dissecting an area of the pelvic bone comprises dissecting an area of the pelvic region.

96. The method of treating a hip joint of a human patient according to claim 2, wherein the step of dissecting an area of the pelvic bone comprises dissecting an area of the inguinal region.

97. The method of treating a hip joint of a human patient according to claim 1, closing said hole in the pelvic bone, wherein said closing of said hole in the pelvic bone is performed by means of bone cement, a bone plug, or a prosthetic part.

98. The method of treating a hip joint of a human patient according to claim 3, wherein the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least one supporting member, wherein said supporting member comprises at least one of the following:

- screws,
- adhesive,
- at least one plate,
- bone cement,
- a section of said artificial acetabulum, or
- other mechanical supporting constructions.

99. The method of treating a hip joint of a human patient according to claim 21, wherein said supporting member comprises a first and second part, the method comprising the steps of:

- displacing said second part in relation to said first part, wherein said second part is carrying said load by the connection with the pelvic bone, and
- is carrying said load when displaced.

100. The method of treating a hip joint of a human patient according to claim 3, wherein the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least two acetabulum surface parts, and wherein said at least two artificial acetabulum surface parts are further connecting to each other after insertion in a hip joint of a human patient and forming an artificial acetabulum surface.

101. The method of treating a hip joint of a human patient according to claim **23**, wherein said at least two artificial acetabulum surface parts are mechanically connecting using at least one of the following:

- at least one screw,
- at least one pin,
- at least one portion of at least one of the parts adapted to be introduced into the other part,
- the parts being adapted to be sliding into the other part,
- form fitting,
- welding,
- adhesive,
- pin,
- wire,
- a ball mounted into a bowl being portions of said parts,
- a male portion of one part mounted into a female portion of the other part,
- a key introduced into a lock being portions of said parts,
- band, and
- other mechanical connecting members.

102. The method of treating a hip joint of a human patient according to claim **3**, wherein the step of creating a hole in the said dissected area comprises creating a hole having a diameter larger than the largest diameter of an artificial caput femur of the patient, thus allowing an artificial caput femur to pass through said hole.

103. The method of treating a hip joint of a human patient according to claim **3**, wherein the step of providing an artificial caput femur surface comprises providing an artificial caput femur surface comprising at least two caput femur surface parts, connecting to each other after insertion in a hip joint of a human patient to form an artificial caput femur surface.

104. The method of treating a hip joint of a human patient according to claim **26**, wherein said at least two artificial caput femur surface parts are mechanically connecting using at least one of the following:

- at least one screw,
- at least one pin,
- at least one portion of at least one of the parts adapted to be introduced into the other part,
- the parts being adapted to be sliding into the other part,
- form fitting,
- welding,
- adhesive,
- pin,
- wire,
- a ball mounted into a bowl being portions of said parts,
- a male portion of one part mounted into a female portion of the other part,
- a key introduced into a lock being portions of said parts,
- band, and
- other mechanical connecting members.

105. The method of treating a hip joint of a human patient according to claim **26**, wherein the step of providing an artificial caput femur surface comprises the step of providing an artificial caput femur surface being hollow and having a greatest internal cross-sectional diameter and comprising an opening, said opening being adapted to have a diameter or cross sectional distance less than said greatest internal cross-sectional diameter of said hollow medical device when mounted on the caput femur of a human patient, wherein said hollow medical device further is adapted to:

have a diameter of said opening of said hollow medical device larger than the diameter of the caput femur, when introduced onto the caput femur, and

have at least the smallest distance of said opening diameter or cross sectional distance being smaller than said greatest internal cross-sectional diameter of said hollow medical device, after mounting said device on said caput femur and in a functional position thereon,

thereby allowing the method steps of:

mounting said artificial caput femur surface on said caput femur, which requires an opening diameter or cross sectional distance larger than the diameter of caput femur, and

decreasing said opening to become smaller than said greatest internal cross-sectional area of said hollow medical device after mounting on the caput femur.

106. The method of treating a hip joint of a human patient according to claim **28**, wherein said artificial caput femur surface further comprises at least one slit allowing the method steps of, mounting said artificial caput femur surface on said caput femur.

107. The method of treating a hip joint of a human patient according to claim **28**, wherein said artificial caput femur surface is frustum spherical.

108. The method of treating a hip joint of a human patient according to claim **3**, further comprising the step of inserting said at least two artificial acetabulum surface parts into a hip joint using a surgical instrument adapted to insert and inserting said at least two artificial acetabulum surface parts through at least one of:

- the pelvic bone, or
- the femur bone.

109. The method of treating a hip joint of a human patient according to claim **3**, further comprising the step of inserting said at least two artificial caput femur surface parts into a hip joint using a surgical instrument adapted to insert and inserting said at least two artificial caput femur surface parts through at least one of:

- the pelvic bone, and
- the femur bone.

110. The method of treating a hip joint of a human patient according to claim **2**, further comprising the step of creating said hole in said dissected area using a surgical instrument adapted to create and creating a through-going hole in the acetabulum area from the abdominal side of the pelvic bone of said human patient, said instrument comprising:

- a driving member,
- a bone contacting organ in connection with said driving member, wherein said bone contacting organ is adapted to create said hole,
- an operating device adapted to operate said driving member, said method further comprising the steps of:
 - operating said driving member, and
 - creating said hole in the acetabulum area starting from the abdominal side of the pelvic bone of the human patient through repetitive or continuous movement using said bone contacting organ of said instrument.

111. The method according to any of claim **34**, wherein said driving member and bone contacting organ together from an elongated member, placing said elongated member achieving a first supporting point for the bone contacting organ in the femoral bone and a second supporting point in a pelvic bone.

112. The method according to claim **34**, connecting an operation device giving force to said driving member from outside the body, lateral on the opposite side of said hip joint outside the opposite side ilium pelvic bone outside the body.

113. The method according to claim **34**, wherein said elongated member is receiving said force from an operation device in the abdomen.

114. The method according to claim **34**, wherein said elongated member is adapted to receive said force from an operation device outside the body, lateral of the proximal femoral bone.

115. The method of treating a hip joint of a human patient according to claim **1**, wherein the step of providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, comprising the method step of providing at least one of: an artificial caput femur, an artificial caput femur surface, an artificial acetabulum and an artificial acetabulum surface, wherein the method further comprising the step of, mounting said at least one hip joint surface in said hip joint.

116. The method of treating a hip joint of a human patient according to claim **38**, wherein the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least one supporting member, wherein said supporting member comprises at least one of the following:

- screws,
- adhesive,
- at least one plate,
- bone cement,
- a section of said artificial acetabulum, or
- other mechanical supporting constructions.

117. The method of treating a hip joint of a human patient according to claim **39**, wherein said supporting member comprises a first and second part, the method comprising the steps of:

- displacing said second part in relation to said first part, wherein said second part is carrying said load by the connection with the pelvic bone, and
- is carrying said load when displaced.

118. The method of treating a hip joint of a human patient according to claim **38**, wherein the step of providing an artificial acetabulum surface comprises providing an artificial acetabulum surface comprising at least two acetabulum surface parts, and wherein said at least two artificial acetabulum surface parts are further connecting to each other after insertion in a hip joint of a human patient and forming an artificial acetabulum surface.

119. The method of treating a hip joint of a human patient according to claim **41**, wherein said at least two artificial acetabulum surface parts are mechanically connecting using at least one of the following:

- at least one screw,
- at least one pin,
- at least one portion of at least one of the parts adapted to be introduced into the other part,
- the parts being adapted to be sliding into the other part,
- form fitting,
- welding,
- adhesive,
- pin,
- wire,
- a ball mounted into a bowl being portions of said parts,

- a male portion of one part mounted into a female portion of the other part,

- a key introduced into a lock being portions of said parts, band, and

- other mechanical connecting members.

120. The method of treating a hip joint of a human patient according to claim **38**, wherein the step of creating a hole in the said dissected area comprises creating a hole having a diameter larger than the largest diameter of an artificial caput femur of the patient, thus allowing an artificial caput femur to pass through said hole.

121. The method of treating a hip joint of a human patient according to claim **38**, wherein the step of providing an artificial caput femur surface comprises providing an artificial caput femur surface comprising at least two caput femur surface parts, connecting to each other after insertion in a hip joint of a human patient to form an artificial caput femur surface.

122. The method of treating a hip joint of a human patient according to claim **44**, wherein said at least two artificial caput femur surface parts are mechanically connecting using at least one of the following:

- at least one screw,
- at least one pin,
- at least one portion of at least one of the parts adapted to be introduced into the other part,
- the parts being adapted to be sliding into the other part,
- form fitting,
- welding,
- adhesive,
- pin,
- wire,
- a ball mounted into a bowl being portions of said parts,
- a male portion of one part mounted into a female portion of the other part,
- a key introduced into a lock being portions of said parts, band, and
- other mechanical connecting members.

123. The method of treating a hip joint of a human patient according to claim **44**, wherein the step of providing an artificial caput femur surface comprises the step of providing an artificial caput femur surface being hollow and having a greatest internal cross-sectional diameter and comprising an opening, said opening being adapted to have a diameter or cross sectional distance less than said greatest internal cross-sectional diameter of said hollow medical device when mounted on the caput femur of a human patient, wherein said hollow medical device further is adapted to:

- have a diameter of said opening of said hollow medical device larger than the diameter of the caput femur, when introduced onto the caput femur, and

- have at least the smallest distance of said opening diameter or cross sectional distance being smaller than said greatest internal cross-sectional diameter of said hollow medical device, after mounting said device on said caput femur and in a functional position thereon,

thereby allowing the method steps of:

- mounting said artificial caput femur surface on said caput femur, which requires an opening diameter or cross sectional distance larger than the diameter of caput femur, and

- decreasing said opening to become smaller than said greatest internal cross-sectional area of said hollow medical device after mounting on the caput femur.

124. The method of treating a hip joint of a human patient according to claim **46**, wherein said artificial caput femur surface further comprises at least one slit allowing the method steps of, mounting said artificial caput femur surface on said caput femur.

125. The method of treating a hip joint of a human patient according to claim **46**, wherein said artificial caput femur surface is frustum spherical.

126. The method of treating a hip joint of a human patient according to claim **38**, further comprising the step of inserting said at least two artificial acetabulum surface parts into a hip joint using a surgical instrument adapted to insert and inserting said at least two artificial acetabulum surface parts through at least one of:

- the pelvic bone, or
- the femur bone.

127. The method of treating a hip joint of a human patient according to claim **38**, further comprising the step of inserting said at least two artificial caput femur surface parts into a hip joint using a surgical instrument adapted to insert and inserting said at least two artificial caput femur surface parts through at least one of:

- the pelvic bone, and
- the femur bone.

128. The method of treating a hip joint of a human patient according to claim **1**, further comprising the step of creating said hole in said dissected area using a surgical instrument adapted to create and creating a through-going hole in the acetabulum area from the abdominal side of the pelvic bone of said human patient, said instrument comprising:

- a driving member,
- a bone contacting organ in connection with said driving member, wherein said bone contacting organ is adapted to create said hole,
- an operating device adapted to operate said driving member, said method further comprising the steps of:
- operating said driving member, and
- creating said hole in the acetabulum area starting from the abdominal side of the pelvic bone of the human patient through repetitive or continuous movement using said bone contacting organ of said instrument.

129. The method according to any of claim **51**, wherein said driving member and bone contacting organ together from an elongated member, placing said elongated member achieving a first supporting point for the bone contacting organ in the femoral bone and a second supporting point in a pelvic bone.

130. The method according to claim **51**, connecting an operation device giving force to said driving member from outside the body, lateral on the opposite side of said hip joint outside the opposite side ilium pelvic bone outside the body.

131. The method according to claim **51**, wherein said elongated member is receiving said force from an operation device in the abdomen.

132. The method according to claim **51**, wherein said elongated member is adapted to receive said force from an operation device outside the body, lateral of the proximal femoral bone.

133. The method according to claim **2**, wherein the method includes the step of providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, through said hole in the pelvic bone of the human patient, the method further comprises at least one of the following parallel steps of:

entering the hip joint through the hip joint capsule, and entering the hip joint through the femur bone.

134. The method according to claim **2**, wherein the method step of dissecting an area of the pelvic bone on the opposite side from the acetabulum, comprises the step of dissecting two or more of the following areas:

- an area in the abdominal cavity,
- an area between peritoneum and the pelvic bone,
- an area of the pelvic bone and surrounding tissue,
- the pelvic region, and
- an area of the pelvic bone that comprises the inguinal area,

in all cases to dissect the pelvic bone on the opposite side of the acetabulum.

135. The method according to claim **2**, wherein the method step of dissecting

- an area of the pelvic bone on the opposite side from the acetabulum,

comprises the step of removing or penetrating the tissue surrounding the pelvic bone in the area opposite to acetabulum which enables the surgeon to reach the pelvic bone.

136. The method according to claim **2**, comprises the step of using at least one camera and one or more surgical instruments, wherein the method further comprising, based on using the at least one camera and the one or more surgical instruments, using the one or more instruments for at least one of the following method steps:

- providing a rotating, oscillating, vibrating or repetitive movement,
- providing a rotating element and using rotating power from outside the body via the femoral bone,
- providing a rotating element and using rotating power from outside the body via the pelvic bone from the opposite side of the hip joint,
- providing a rotating element and using rotating power from the abdomen from the opposite side of the hip joint,
- dissecting to reach the hip joint,
- dissecting inside the hip joint via the femoral bone,
- dissecting inside the hip joint via the pelvic bone from the opposite side of the hip joint,
- dissecting inside the hip joint via the femoral capsule,
- reaming inside the hip joint via the femoral bone,
- reaming inside the hip joint via the pelvic bone from the opposite side of the hip joint,
- reaming inside the hip joint via the femoral capsule,
- moving parts or tissue to or from inside the hip joint via the femoral bone,
- moving parts or tissue to or from inside the hip joint via the pelvic bone from the opposite side of the hip joint,
- moving parts or tissue to or from inside the hip joint via the femoral capsule,
- creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the femoral bone,
- creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the pelvic bone from the opposite side of the hip joint,
- creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the femoral capsule,
- inserting at least one prosthetic part inside the hip joint via the femoral bone,
- inserting at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,

inserting at least one prosthetic part inside the hip joint via the femoral capsule,
 placing at least one prosthetic part inside the hip joint via the femoral bone,
 placing at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,
 placing at least one prosthetic part inside the hip joint via the femoral capsule,
 connecting at least one prosthetic part inside the hip joint via the femoral bone, connecting at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,
 connecting at least one prosthetic part inside the hip joint via the femoral capsule,
 fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the femoral bone,
 fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,
 fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the femoral capsule,
 attaching at least two prosthetic parts to each other inside the hip joint via the femoral bone,
 attaching at least two prosthetic parts to each other inside the hip joint via the pelvic bone from the opposite side of the hip joint,
 attaching at least two prosthetic parts to each other inside the hip joint via the femoral capsule,
 attaching in the hip joint at least one prosthetic part inside the hip joint via the femoral bone,
 attaching in the hip joint at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,
 attaching in the hip joint at least one prosthetic part inside the hip joint via the femoral capsule,
 filling at least one prosthetic part inside the hip joint via the femoral bone,
 filling at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint, and
 filling at least one prosthetic part inside the hip joint via the femoral capsule.

137. The method according to claim 1, wherein the method includes the step of providing at least one hip joint surface to the hip joint from the opposite side from the acetabulum, through said hole in the pelvic bone of the human patient, the method further comprises at least one of the following parallel steps of:

entering the hip joint through the hip joint capsule, and
 entering the hip joint through the femur bone.

138. The method according to claim 1, wherein the method step of dissecting

an area of the pelvic bone on the opposite side from the acetabulum,

comprises the step of removing or penetrating the tissue surrounding the pelvic bone in the area opposite to acetabulum which enables the surgeon to reach the pelvic bone.

139. The method according to claim 1, comprises the step of using at least one camera and one or more surgical instruments, wherein the method further comprising, based on using the at least one camera and the one or more surgical

instruments, using the one or more instruments for at least one of the following method steps:

providing a rotating, oscillating, vibrating or repetitive movement,

providing a rotating element and using rotating power from outside the body via the femoral bone,

providing a rotating element and using rotating power from outside the body via the pelvic bone from the opposite side of the hip joint,

providing a rotating element and using rotating power from the abdomen from the opposite side of the hip joint,

dissecting to reach the hip joint,

dissecting inside the hip joint via the femoral bone,

dissecting inside the hip joint via the pelvic bone from the opposite side of the hip joint,

dissecting inside the hip joint via the femoral capsule,

reaming inside the hip joint via the femoral bone,

reaming inside the hip joint via the pelvic bone from the opposite side of the hip joint,

reaming inside the hip joint via the femoral capsule,

moving parts or tissue to or from inside the hip joint via the femoral bone,

moving parts or tissue to or from inside the hip joint via the pelvic bone from the opposite side of the hip joint,

moving parts or tissue to or from inside the hip joint via the femoral capsule,

creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the femoral bone,

creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the pelvic bone from the opposite side of the hip joint,

creating and preparing new surfaces for placing the artificial hip joint surface inside the hip joint via the femoral capsule,

inserting at least one prosthetic part inside the hip joint via the femoral bone,

inserting at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,

inserting at least one prosthetic part inside the hip joint via the femoral capsule,

placing at least one prosthetic part inside the hip joint via the femoral bone,

placing at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,

placing at least one prosthetic part inside the hip joint via the femoral capsule,

connecting at least one prosthetic part inside the hip joint via the femoral bone,

connecting at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,

connecting at least two prosthetic parts to each other inside the hip joint via the femoral capsule,

fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the femoral bone,

fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,

fixating with bone cement or mechanical elements in the hip joint at least one prosthetic part inside the hip joint via the femoral capsule,

attaching at least two prosthetic parts to each other inside the hip joint via the femoral bone,
attaching at least two prosthetic parts to each other inside the hip joint via the pelvic bone from the opposite side of the hip joint,
attaching at least two prosthetic parts to each other inside the hip joint via the femoral capsule,
attaching in the hip joint at least one prosthetic part inside the hip joint via the femoral bone,
attaching in the hip joint at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint,
attaching in the hip joint at least one prosthetic part inside the hip joint via the femoral capsule,
filling at least one prosthetic part inside the hip joint via the femoral bone,
filling at least one prosthetic part inside the hip joint via the pelvic bone from the opposite side of the hip joint, and
filling at least one prosthetic part inside the hip joint via the femoral capsule.

* * * * *

专利名称(译)	髌关节法		
公开(公告)号	US20150150685A1	公开(公告)日	2015-06-04
申请号	US14/612389	申请日	2015-02-03
[标]申请(专利权)人(译)	福塞尔PETER MATS		
申请(专利权)人(译)	福塞尔, PETER MATS		
当前申请(专利权)人(译)	福塞尔, PETER MATS		
[标]发明人	FORSELL PETER MATS		
发明人	FORSELL, PETER MATS		
IPC分类号	A61F2/32 A61B17/16 A61F2/28 A61F2/36 A61F2/30 A61B17/06 A61L24/00 A61F2/46 A61B19/00 A61B17/34 A61B17/064		
CPC分类号	A61F2/32 A61F2002/3619 A61B17/1666 A61F2/28 A61F2/3609 A61B17/1659 A61B17/064 A61B17/06166 A61L24/00 A61F2/4609 A61F2/4607 A61B19/5212 A61B17/3468 A61F2/30756 A61F2002/3611 A61F2002/30448 A61F2002/30433 A61F2002/30331 A61F2002/30451 A61F2002/30462 A61F2002/30472 A61F2002/30378 A61F2002/30464 A61F2002/30476 A61F2002/30449 A61B17/3472 A61B17/1637 A61B17/1664 A61B17/1668 A61B17/74 A61B17/86 A61F2/34 A61F2/3601 A61F2/3603 A61F2002/30469 A61F2002/30471 A61F2002/30495 A61F2002/305 A61F2002/30507 A61F2002/30558 A61F2002/30563 A61F2002/30565 A61F2002/30579 A61F2002/30594 A61F2002/30616 A61F2002/30818 A61F2002/30878 A61F2002/30886 A61F2002/3241 A61F2002/3483 A61F2002/3615 A61F2002/3631 A61F2002/4631 A61F2002/4635 A61F2002/4677 A61F2220/0025 A61B90/361 A61F2/4603 A61F2002/30593		
优先权	0900957 2009-07-10 SE 0900958 2009-07-10 SE 0900959 2009-07-10 SE 0900960 2009-07-10 SE 0900962 2009-07-10 SE 0900963 2009-07-10 SE 0900965 2009-07-10 SE 0900966 2009-07-10 SE 0900968 2009-07-10 SE 0900969 2009-07-10 SE 0900970 2009-07-10 SE 0900972 2009-07-10 SE 0900973 2009-07-10 SE 0900974 2009-07-10 SE 0900976 2009-07-10 SE 0900978 2009-07-10 SE 0900981 2009-07-10 SE 13/383332 2012-01-10 US PCT/SE2010/050822 2010-07-12 WO 61/229738 2009-07-30 US		
其他公开文献	US10195037		
外部链接	Espacenet USPTO		
摘要(译)			

一种通过提供至少一个髋关节表面来治疗人类患者的髋关节的方法，包括以下步骤：切割人类患者的皮肤，在与髌臼相对的一侧解剖骨盆区域，形成孔在从髌臼的相对侧的解剖区域中，孔穿过骨盆骨并进入人类患者的髋关节，并且从髌臼的相对侧向髋关节提供至少一个髋关节表面，通过人类患者骨盆中的洞。

