

(19)



(11)

EP 1 633 236 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.04.2013 Bulletin 2013/15

(21) Application number: **04754920.9**

(22) Date of filing: **10.06.2004**

(51) Int Cl.:
A61F 9/007 ^(2006.01) **A61F 9/008** ^(2006.01)
A61B 17/3201 ^(2006.01) **A61B 17/3205** ^(2006.01)
A61B 18/04 ^(2006.01) **A61B 18/08** ^(2006.01)
A61B 18/12 ^(2006.01) **A61B 18/18** ^(2006.01)
A61B 18/20 ^(2006.01)

(86) International application number:
PCT/US2004/018483

(87) International publication number:
WO 2004/110260 (23.12.2004 Gazette 2004/52)

(54) **DEVICE FOR TREATMENT OF GLAUCOMA AND OTHER SURGICAL PROCEDURES AND METHOD OF PRODUCING SUCH DEVICE**

VORRICHTUNG ZUR BEHANDLUNG VON GLAUKOM UND ANDERE CHIRURGISCHE EINGRIFFE UND VERFAHREN ZU DESSEN HERSTELLUNG

DISPOSITIF POUR LE TRAITEMENT DU GLAUCOME ET AUTRES PROCEDURES CHIRURGICALES ET PROCÉDÉ DE SA FABRICATION

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **10.06.2003 US 477258 P**

(43) Date of publication of application:
15.03.2006 Bulletin 2006/11

(73) Proprietor: **NEOMEDIX CORPORATION**
San Juan Capistrano, California 92675 (US)

(72) Inventors:
• **MITTELSTEIN, Michael**
Laguna Niguel, California 92677 (US)
• **SORENSEN, John, T.**
Ladera Ranch, California 92694 (US)

• **MIRHASHEMI, Soheila**
Laguna Niguel, California 92677 (US)
• **GERG, James, B.**
Lake Forest, California 92630 (US)

(74) Representative: **Maughan, Sophie Louise et al**
Scott & York
Intellectual Property Ltd
45 Grosvenor Road
St Albans, Hertfordshire AL1 3AW (GB)

(56) References cited:
WO-A-02/056805 US-A- 3 294 085
US-A- 5 431 646 US-A- 5 755 716
US-A- 5 957 914 US-A1- 2002 111 608

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 633 236 B1

Description

BACKGROUND OF THE INVENTION

A. *Symptoms and Etiology of Glaucoma*

[0001] The term "glaucoma" refers generally to a group of diseases which cause progressive damage to the optic nerve and resultant optical field defects, vision loss and, in some cases, blindness. Glaucoma is frequently, but not always, accompanied by abnormally high intraocular pressure. Aqueous humor is continually produced by cells of the ciliary body and such aqueous humor fills the anterior chamber of the eye. Excess aqueous humor normally drains from the anterior chamber of the eye, through a structure known as the trabecular meshwork and then out of the eye through a series of drainage tubules. However, in many glaucoma patients, drainage of the aqueous humor through the trabecular meshwork is impaired, thereby causing the pressure of aqueous humor within the anterior chamber to increase.

[0002] In general, there are four types of glaucoma--primary, secondary, congenital and pigmentary. Primary glaucoma, which is the most common form, can be classified as either open angle or closed angle. Secondary glaucoma (e.g., neovascular glaucoma) occurs as a complication of a variety of other conditions, such as injury, inflammation, vascular disease and diabetes. Congenital glaucoma is elevated eye pressure present at birth due to a developmental defect in the eye's drainage mechanism. Pigmentary glaucoma is a rare form of the disease wherein pigment from the iris clogs the trabecular meshwork, preventing the drainage of aqueous humor from the anterior chamber.

[0003] Glaucoma is a leading cause of blindness in the United States. The loss of vision in glaucoma patients is typically progressive and may be due, at least in part, to compression of the vasculature of the retina and optic nerve as a result of increased intraocular pressure. It is generally accepted that reducing intraocular pressure, through the use of drugs and/or surgery, can significantly reduce glaucomatous progression in patients who suffer from normal-tension glaucoma and can virtually halt glaucomatous progression in patients who suffer from primary open-angle glaucoma with elevated intraocular pressures. Furthermore, it is generally acknowledged that lowering intraocular pressure in glaucoma patients can prevent or lessen the irreversible glaucoma-associated destruction of optic nerve fibers and the resultant irreversible vision loss.

B. *Surgical Treatment of Glaucoma*

[0004] The surgical treatment of glaucoma is generally aimed at either a) decreasing the amount of aqueous humor produced by the ciliary body or b) improving drainage of aqueous humor from the anterior chamber of the eye.

[0005] The procedures aimed at decreasing the production of aqueous humor include cyclocryotherapy, wherein a cryosurgical probe is used to freeze a portion of the ciliary body, thereby destroying cells that produce aqueous humor, and laser cyclophotocoagulation, wherein a laser is used to destroy part of the ciliary body resulting in decreased production of aqueous humor.

[0006] The procedures intended to improve drainage of aqueous humor from the anterior chamber include trabeculoplasty, trabeculectomy, goniotomy and shunt implantation.

[0007] In trabeculoplasty, the surgeon uses a laser to create small holes through the trabecular meshwork to increase aqueous humor drainage through the normal drainage channels.

[0008] In trabeculectomy, the surgeon removes a tiny piece of the wall of the eye, which may include a portion of the trabecular meshwork, thereby creating a new drainage channel which bypasses the trabecular meshwork and the normal drainage channels. Aqueous humor then drains with relative ease through the new drainage channel into a reservoir known as a "bleb" that has been created underneath the conjunctiva. Aqueous humor that drains into the bleb is then absorbed by the body. Trabeculectomy is often used in patients who have been unsuccessfully treated with trabeculoplasty or who suffer from advanced glaucoma where optic nerve damage is progressing and intraocular pressure is significantly elevated.

[0009] In goniotomy, a tissue cutting or ablating device is inserted into the anterior chamber of the eye and used to remove a full thickness strip of the tissue from the trabecular meshwork overlying Schlemm's canal. In many cases, a strip of about 2 mm to about 10 mm in length and about 50 μm to about 200 μm in width is removed. This creates a permanent opening in the trabecular meshwork through which aqueous humor may drain. The goniotomy procedure and certain prior art instruments useable to perform such procedure are described in United States Patent Application Serial No. 10/052,473 published as No. 2002/011608A1 (Baerveldt).

[0010] In shunt implantation procedures, a small drainage tube or shunt is implanted in the eye such that aqueous humor may drain from the anterior chamber, through the shunt and into a surgically created sub-conjunctival pocket or "bleb." Aqueous humor that drains into the bleb is then absorbed by the patient's body.

[0011] Trabeculoplasty, trabeculectomy and shunt implantation procedures are sometimes unsuccessful due to scarring or closure of the surgically created channels or holes and/or clogging of the drainage tube. Because it involves removal of a full thickness strip from the trabecular meshwork, the goniotomy procedure is less likely to fail due to scarring or natural closure of the surgically created channel. Although the previously described devices can be used to successfully perform goniotomy procedures, there remains a need in the art for the development of new tissue cutting and ablation instruments

that may be used to perform the goniotomy procedure as well as other procedures where it is desired to remove a strip of tissue from the body of a human or veterinary patient.

[0012] US-A-5 755 716 (Garito Jonc et al) discloses a device for cutting or ablating tissue in a human or veterinary patient.

SUMMARY OF THE INVENTION

[0013] The present invention provides a device for cutting or ablating tissue in a human or veterinary patient. This device generally comprises, consists essentially of, or consists of: a) an elongate probe having a distal end, b) a tissue cutting or ablating apparatus and c) a protector that extends from the probe. The protector generally has a first side and a second side and the tissue cutting or ablating apparatus is located adjacent to the first side of the protector. The distal end of the probe having protector extending therefrom, is structured to be advanceable into tissue or otherwise placed and positioned within the patient's body such that tissue adjacent to the first side of the protector is cut away or ablated by the tissue cutting or ablation apparatus while tissue that is adjacent to the second side of the protector is not substantially damaged by the tissue cutting or ablating apparatus.

[0014] Additionally, the protector may be formed entirely or partially of an insulating material. For example, the protector may be formed of a core made of an electrically and/or thermally conductive material, for example a conductive metallic material, and may include a non-conductive coating or covering, for example a polymer coating that is electrically and thermally insulating. In some embodiments of the invention, the electrically and thermally insulating material, hereinafter sometimes simply referred to as "coating" may comprise a flexible, pliable material in comparison with the more rigid core..

[0015] In some embodiments of the invention, the protector is configured not only to provide protection to tissue located adjacent to the second side of the protector, but also may be configured to facilitate positioning and/or advancement of the device within the surgical site. In this particular regard, United States Patent Application No. 2002/0111608A1 (Baerveldt) describes goniotomy devices that have a foot plate sized and configured to be inserted through the trabecular meshwork and into Schlemm's Canal and to, thereafter, advance through Schlemm's Canal as the device is used to remove a portion of the trabecular meshwork. In embodiments of the present invention that are used to remove portions of the trabecular meshwork (i.e., to perform a goniotomy procedure) the protector may be configured, for example shaped and sized, for insertion and advancement through Schlemm's Canal in substantially the same manner as that described in the United States Patent Application No. 2002/0111608A1 (Baerveldt).

[0016] It is to be appreciated that in embodiments of the device of the present invention that are designed and

/or intended for use in tissue cutting or ablating applications other than goniotomy procedures, the protector may be of any other suitable configuration required to perform the desired protection and/or positioning/guidance functions.

[0017] The tissue cutting or ablating apparatus may comprise any suitable type of apparatus that is operative to cut or ablate tissue, for example a strip of tissue. For example, the cutting and ablating apparatus may comprise a electrosurgical or radiofrequency tissue cutting or ablation apparatus (e.g., monopolar or bipolar configured electrodes), apparatus (e.g., a light guide and/or lens) that emits light energy to cause thermal cutting or ablation of tissue (e.g., pulsed or non-pulsed optical incoherent high intensity light, pulsed or non-pulsed laser light, light that is infrared, visible and/or ultraviolet, etc.), mechanical tissue cutting or ablation apparatus (e.g., knife blade(s), scissor(s), rotating cutter(s), etc.), ultrasonic cutting or ablation apparatus (e.g., an ultrasound transmission member that extends through the device to a location adjacent the first side of the protector and undergoes axial or radial ultrasonic vibration), or any other suitable mechanism.

[0018] Optionally, the device may further include one or more lumen(s) for providing fluid infusion and/or aspiration to and/or from the surgical site, for example from a remote infusion and/or aspiration source.

[0019] In some embodiments of the invention, the device is in the form of an elongate probe that is attachable to a surgical handpiece for facilitating manual manipulation of the probe. In some embodiments of the invention, the entire device is structured and intended for one time use, and in other embodiments of the invention, one or more components of the device are autoclavable and reusable. For example, in some embodiments of the invention, the device comprises a disposable catheter probe having a molded distal end including the protector and/or the cutting or ablating apparatus integrally molded or formed in the distal end of the catheter. In other embodiments of the invention, the device includes a elongate probe, made of one or more segments of stainless steel hypotubing, and including a proximal portion that is configured to be received within a conventional surgical handpiece, which may include various functionable switches, conduit ports, electrical connections and the like for enabling manual operation of the various functions of the device to be described elsewhere herein.

[0020] For example, the present device may be configured and structured to be couplable to 1) a console, for example, a control console, or other separate apparatus having for example, but not limited to an electrosurgical signal generator for transmitting energy needed to operate the tissue cutting or ablation apparatus, for example an electrosurgical signal generator suitable for providing electrical energy to the cutting or ablating apparatus utilizing incoherent or laser light energy, such as infrared, visible, and/or ultraviolet wave energy, rotating shaft or other mechanical drive, etc., and/or 2) an aspi-

ration source, for example comprising a pump mechanism for aspirating fluid from the surgical site through the optional aspiration lumen (if present) of the device and/or 3) a source of fluid, for example an irrigation source, for infusing or irrigating the surgical site through the optional fluid infusion lumen (if present) of the device. Examples of commercially available surgical consoles that may be suitable for use with the present invention, for example, surgical consoles of which the present devices may be attached or connected to, include but are not limited to the Infinity/Accurus/Legacy Systems, available from Alcon, Inc., Fort Worth, Texas, the Millinium System, available from the Bausch & Lomb Corporation, Rochester, New York, or the Sovereign System, available from Advanced Medical Optics, Santa Ana, California.

[0021] Further in accordance with the invention, some embodiments of the device may be constructed to cut and remove a strip or pieces of tissue from the patient's body and to permit retrieval of that strip or pieces of tissue to prevent them from causing untoward postsurgical effects within the body or for preservation, biopsy, chemical/biological analysis or other purposes. In embodiments of the device that are equipped with the optional aspiration lumen, the aspiration lumen may be positioned such that a strip or pieces of tissue cut or severed by the tissue cutting or ablation apparatus may be withdrawn from the body through the aspiration lumen.

[0022] Still further in accordance with the invention, the width or size of the tissue that is cut or ablated from the patient's body, as well as the degree to which adjacent tissues that remain in the body are damaged by thermal energy or other affects of the cutting or ablation process, may be controlled in some embodiments of the device by controlling the amount of power or energy that is delivered to the tissue cutting or ablation apparatus. In this regard, in embodiments where the tissue cutting or ablation apparatus is a monopolar or bipolar electrosurgical apparatus, there will be a high power density zone closest to the electrode(s) wherein thermal cutting or ablation of tissue will occur. This high power density zone may be surrounded by a medium power density zone wherein the thermal energy is great enough to also cut or ablate tissue under some circumstances. The voltage and/or current supplied to the electrode(s) may be adjusted to control the size and extent of the high power density zone and/or the surrounding medium power density zone, thereby providing for cutting or ablation of a strip of tissue of a desired size while avoiding significant or irreparable damage to tissue that is to be protected (e.g., tissue located on the second side of the protector) or other tissue at the margins of or in close proximity to the strip of tissue that has been cut or ablated.

[0023] Still further in accordance with the invention there are provided methods for performing medical or surgical procedures, including percutaneous surgical procedures, using the devices of the present invention. For example, the present invention provides method for performing a goniotomy procedure, wherein the protec-

tor of the device, for example the device of the present invention described elsewhere herein, is inserted through the trabecular meshwork into Schlemm's Canal, and the tissue cutting or ablating apparatus is energized and the device is advanced in a manner that results in cutting or ablation of a portion of the trabecular meshwork. In a general tissue cutting procedure, the protector of the device is inserted to a desired position, the tissue cutting or ablation device is energized and the device is advanced, thereby causing a strip to be cut or ablated from tissue that becomes positioned on the first side of the protector while no substantial damage occurs to tissue located on the second side of the protector.

[0024] Further in accordance with the invention, some embodiments of the device may be fabricated in part from tubing, such as stainless steel hypotubing (referred to as "tube-fabricated" embodiments). In such tube-fabricated embodiments, the device generally comprises an outer tube and an inner tube, wherein the inner tube extends through the lumen of the outer tube and a distal portion of the inner tube extends out of and beyond the distal end of the outer tube. The protector is formed on the distal end of the inner tube and the tissue cutting or ablation apparatus may be formed on and/or inserted through the inner tube such that it is positioned at a location adjacent to the first side of the protector. Also, the lumens of the inner and/or outer tubes may be used for infusion and/or aspiration of fluid.

[0025] Still further in accordance with the invention, there is provided a method for manufacturing the tube-fabricated embodiments of the device. Such method generally comprises A) providing an inner tube and an outer tube and inserting the inner tube through the lumen of the outer tube such that a distal portion of the inner tube extends out of and beyond the distal end of the outer tube, B) forming cuts in the distal portion of the inner tube to form at least one leg thereon, C) bending a leg formed in Step B to create a protector having a first side and a second side and D) positioning the tissue cutting or ablation apparatus adjacent to the first side of the protector. Optionally, in some embodiments, the method may further comprise the step of E) applying an insulating material (e.g., a polymer such as polyimide) to the protector. Such insulating material may be applied to the protector by any suitable method, such as by single layer dip coating, multiple layer dip coating, spray coating, painting, electrostatic powder deposition, vapor deposition, advancement of a fabricated insulating cover over the protector, etc.

[0026] Still further in accordance with the invention, in manufacturing some tube-fabricated embodiments wherein the tissue cutting or ablation apparatus comprises an electrosurgical apparatus, an electrode may be formed by additionally cutting and bending a part of the distal portion of the inner tube to form such electrode. In this regard, Step B of the above-summarized manufacturing method may comprise cutting the distal portion of the inner tube to create first and second legs thereon

and, thereafter, Step C of the above-summarized manufacturing method may comprise i) bending the first leg to create a protector having a first side and a second side and ii) bending the second leg to create an electrode adjacent to the first side of the protector. Electrical energy may then be transmitted through the inner tube to the electrode formed on its distal portion. In embodiments where the electrosurgical apparatus is monopolar, only one electrode need be formed adjacent to the first side of the protector and an exposed or capacitively coupled grounding electrode may be attached to the patient's body near the site of the surgery or elsewhere on the body. In embodiments where the electrosurgical apparatus is bipolar, it will be necessary to locate a second electrode adjacent to the first side of the protector. Such second electrode may be so positioned by advancing an electrical conduction member that has an electrode surface on its distal end (e.g., an insulated wire having the insulation removed from its distal tip) through the lumen of the inner tube to a position where the electrode surface of the electrical conduction member is located adjacent to the first side of the protector and a desired distance from the other electrode. The electrical conduction member/second electrode may be secured in place by adhesive, mechanical constraint or any other suitable affixation means. In this regard, aperture(s) may be formed in one or both of the leg(s) formed in Step B and the electrically conductive member may extend through such aperture(s) such that the aperture(s) will localize, guide the positioning of, hold, stabilize or affix the location of the electrical conducting member/second electrode.

[0027] Further aspects and elements of the invention will be understood by those of skill in the art upon reading the detailed description of specific examples set forth herebelow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028]

Figure 1 is a perspective view of a system incorporating an electrosurgical goniectomy device of the present invention.

Figure 2 is an enlarged perspective view of section 2 of Figure 1.

Figures 3A-3G are step-by-step showings of an example of a method for manufacturing an electrosurgical goniectomy device of the present invention.

Figure 4A is a cross section of a human eye having electrosurgical goniectomy device inserted therein.

Figure 4B is an enlarged view of a portion of the human eye showing the angle, Schlemm's Canal and the trabecular meshwork.

Figure 4C is an enlarged view of a distal portion of the device being used to remove trabecular meshwork tissue from an eye during a goniectomy procedure.

Figure 5A is a perspective view of a distal portion of another electrosurgical goniectomy device of the present invention.

Figure 5B is a side view of the distal end of the electrosurgical goniectomy device of Figure 5A.

DETAILED DESCRIPTION

[0029] Turning now to Fig. 1, a device in accordance with the present invention for cutting and/or ablating tissue, for example, tissue of an eye during a goniectomy procedure, is shown generally at 10. The device 10 generally comprises an elongate handpiece or probe having a distal end having a tissue cutting or ablating apparatus 4 disposed generally within the distal end or distal portion of the probe 3. The tissue cutting or ablating apparatus 4 may be a suitable mechanism designed to cut, ablate, cauterize, sever and/or remove tissue from a target region, for example, from a surgical site. The device 10 may be part of a larger surgical system 11, for example, the device 10 may be structured and adapted to be operatively connectable to a separate apparatus, for example a surgical control console 70 for controlling and powering operation of various functions of the device during a surgical procedure. Examples of surgical consoles that may be suitable include but are not limited to the Infinity/Accurus/Legacy Systems, available from Alcon, Inc., Fort Worth, Texas, the Millinium System, available from the Bausch & Lomb Corporation, Rochester, New York, or the Sovereign System, available from Advanced Medical Optics, Santa Ana, California.

[0030] A distal end of a tube-fabricated embodiment of the device 10 is shown in Fig. 2. This particular device 10 is designed to be especially effective for cutting/ ablating and sometimes removing tissue, for example portions of the trabecular meshwork during a goniectomy procedure. It should be appreciated that although the following description will generally refer to this specific embodiment, the scope of the present invention is not intended to be limited thereby. For example, the device 10 may be modified as necessary and/or desirable to be effective for use in surgical procedures other than goniectomy procedures and such modified devices are considered to be within the scope of the present invention.

[0031] The tube-fabricated device 10 generally comprises a probe 3 comprising an outer tube 12 and an inner tube 14 disposed therein and having a distal portion extending or projecting therefrom.

[0032] As shown in Fig. 2, the inner tube 14 has a smaller outer diameter than an inner diameter of the outer tube 12 such that when inner tube 14 is positioned within the outer tube 12, for example, substantially coaxial therewith, the outer tube 12 inner surface is spaced apart from the inner tube 14 outer surface as shown.

[0033] More specifically, the outer tube 12 defines a lumen 16 which may serve as an infusion lumen, hereinafter sometime referred to as an irrigation lumen. For example, the outer tube 12 may include an irrigation or

infusion port 26 disposed on the distal portion of the outer tube 12 as shown. During a surgical procedure, irrigation fluid, such as a balanced salt solution (BSS) may be passed through lumen 16 and out of port 26 and into the anterior chamber of an eye as needed to maintain a desired intraocular pressure in the eye.

[0034] The inner tube 14 generally contains or defines the cutting or ablating portion of the device 10, as will be described in greater detail elsewhere herein. The inner tube 14 also defines a lumen 19, preferably having a port adjacent the cutting or ablating apparatus, wherein the lumen 19 may serve as an aspiration lumen during the surgical procedure. Accordingly, an aspiration source may be connected to inner tube lumen 19 to allow cut tissue, excess fluid or other material to be suctioned or removed from the surgical site during the procedure.

[0035] In embodiments of the device that are designed for cutting or ablating tissue during a goniotomy procedure, the device 10 is preferably sized and configured such that the distal end thereof can be placed within an eye, for example within the anterior chamber of the eye, as far as and including the irrigation port 26. It is noted that irrigation port 26 may alternatively be utilized as an aspiration port in some circumstances, if desirable.

[0036] It is further contemplated that in some instances it may be helpful to utilize the aspiration lumen 19 as a temporary or even permanent irrigation lumen such that irrigation fluid is passed from the distal opening of the inner tube 14. For example, as the device 10 is initially being inserted into the anterior chamber prior to the cutting or ablation of tissue, it may be helpful to pass irrigation fluid into the anterior chamber of the eye through the inner tube 14 in order to maintain ocular pressure and facilitate further insertion of the distal end of the relatively wider outer tube 12 of the device 10. Once the distal end of the outer tube 12 is in place in the anterior chamber a sufficiently distance such that port 26 is located within the anterior chamber, irrigation of the eye may be moved to the outer tube irrigation port 26. Initial irrigation by means of the inner lumen 19 may also be helpful in causing gentle widening of the insertion site so as to more easily allow insertion of the relatively wider outer tube through the insertion site.

[0037] Preferably, all components of the device 10 are comprised of surgical grade materials. In addition, with the exception of the cutting or ablating surfaces of the device 10, exposed surfaces of the distal end of the device are preferably formed and/or treated such that they include substantially no sharp portions, burrs or contaminants. For example, in the embodiment shown in Fig. 2, the distal most portion of the outer tube 12 is rounded or frustro-conical in shape, so as to prevent or reduce the occurrence of any substantial damage to tissue upon insertion, operation and removal of the device 10 from the eye.

[0038] For devices of the invention designed for goniotomy surgical procedures, the outer tube 12 may comprise about 19 gauge to about 20 gauge stainless

steel hypotubing, and the inner tube 14 may comprise about 25 gauge stainless steel hypotubing. In addition, preferably for such devices of the invention, the projecting distal portion of the inner tube 14 has a length L of between about 1 mm and about 4 mm, and more preferably about 2.5 mm.

[0039] The cutting or ablating portion of the device 10 may comprise any suitable mechanism for cutting or ablating tissue. For example, in the specific embodiment shown in Fig. 2, the cutting or ablating apparatus comprises an electrosurgical tissue cutting/ablating apparatus. More specifically, the device 10 includes a bipolar electrode mechanism comprising a first pole or first electrode 22 and a second pole or second electrode 21. In use, one of the first and second electrodes is provided with electrical energy and to operate as an active electrode and the other of the first and second electrodes operates as a return electrode. When such an electrode is powered it generates a zone of high energy in immediate proximity of the electrode, and a zone of relatively lower energy outside of the zone of high energy. This zone of relatively lower energy is a zone of thermal energy that is effective in cutting or ablating ocular tissue, for instance, particularly tissue of the trabecular meshwork. The return electrode may be electrically couplable to the patient's body.

[0040] It is contemplated that alternative embodiments of the invention may include any other suitable mechanism or apparatus that is operative to cut or ablate tissue, for example a strip of tissue, such as a monopolar electrode mechanism, a radiofrequency tissue cutting or ablation apparatus, apparatus (e.g., a light guide and/or lens) that emits light energy to cause thermal cutting or ablation of tissue (e.g., pulsed or non-pulsed optical incoherent high intensity light, pulsed or non-pulsed laser light, light that is infrared, visible and/or ultraviolet, etc.), mechanical tissue cutting or ablation apparatus (e.g., knife blade(s), scissor(s), rotating cutter(s), etc.), ultrasonic cutting or ablation apparatus (e.g., an ultrasound transmission member that extends through the device to a location adjacent the first side of the protector and undergoes axial or radial ultrasonic vibration) or others.

[0041] The device 10 further comprises a protector 24 having a first side located adjacent to the cutting or ablating apparatus, and a second side located on a distal-most portion of the device 10. The protector 24 is structured and designed to preventing damage to tissue located near the tissue to be cut. For example, the protector 24 is designed to protect or prevent any substantial damage to surfaces of Schlemm's canal while the device 10 is being utilized to cut portions of the trabecular meshwork during a goniotomy procedure.

[0042] More particularly, the device 10 may be structured such that the tissue cutting or ablating apparatus (e.g. the electrode mechanism 20,22) is structured to cause thermal cutting or ablating of tissue and the protector 24 is structured to isolate or protect adjacent tissue located adjacent the second side of the protector 24. For

example, the protector 24 may be formed partially or entirely of an insulating material. Alternatively or additionally, the protector 24 may be formed of metal and include a coating 30 made of an insulating material, such as a polymer, for example, a polyimide material.

[0043] Turning back now to Fig. 1, the cutting or ablation device 10 may be used as part of a surgical system 11. The system 11 may comprise or consist of a surgical control console 70 including a high frequency electrosurgical generator module 76 and an aspiration pump module 74. A source of irrigation fluid 72 may also be provided which preferably operates as a gravity feed irrigation line. Control of the console 70 during surgical procedures may be accomplished by use of an aspiration footpedal 78 which controls an aspiration pump 74, and use of an electrosurgical footpedal 80 which controls the electrosurgical generator 76. One or both of the footpedals 78 and 80 may be pressure sensitive such that operating power is controllable by the depth or distance at which the footpedal is pressed or moved by the operator. Furthermore, footpedals 78 and 80 may be combined into a single functional unit. The cutting or ablation device 10 may be provided as a pre-sterilized, single-use disposable probe that is attachable to a standard surgical handpiece. After the cutting and ablation device has been attached to the handpiece, further connections to the electrosurgical generator module 76, the aspiration pump module 74 and the source of irrigation fluid 72, may be implemented as shown. Thus, the cutting or ablation device 10 has irrigation, aspiration, and electrosurgical capabilities, as described herein.

[0044] A surgical procedure using the device 10 of the present invention may be performed as follows.

Method for Performing Goniotomy

[0045] The device 10 and system 11 are useable to perform a variety of procedures wherein it is desired to form an incision or opening of a desired width or to remove, from a mass of tissue, a strip of tissue of a desired width.

[0046] Figures 4A-4C, show an example of a goniotomy procedure that may be performed to treat glaucoma, using the device 10 and system 11 of the present invention. This goniotomy procedure is an *ab interno* surgical procedure wherein a sector of the trabecular meshwork TM is removed from the eye of the patient to facilitate drainage of aqueous humor from the anterior chamber AC of the eye through Schlemm's Canal and the associated collector channels CC, thereby relieving elevated intraocular pressure.

[0047] First, a small incision IN is made in the cornea C at about 3 o'clock in the left eye, or at about 9 o'clock in the right eye. A 1.5 mm slit knife may be used to make this incision IN.

[0048] The device 10 is attached to the source of irrigation fluid 72 (e.g., balanced salt solution) such that irrigation fluid will flow through lumen 16 of the outer tube

12 and out of outflow aperture 26. The device 10 is then inserted through the incision IN and into the anterior chamber AC (with irrigation flowing). In some cases, during the insertion of the device 10, the source of irrigation fluid 72 may initially be connected to the device such that the irrigation fluid will flow through the lumen 19 of the distal portion of inner tube 14. In this manner, irrigation fluid will begin to infuse into the anterior chamber AC as soon as the distal tip of the protruding distal portion of inner tube 14 has entered the anterior chamber AC, rather than being delayed until the larger outer tube 12 and aperture 26 have been advanced through the incision IN and into the anterior chamber. By this alternative approach, irrigation fluid may be caused to flow out of the incision IN as the device 10 is being inserted, thereby spreading or opening the incision. Such spreading or opening of the incision IN may facilitate advancement of the larger diameter outer tube 12 through the incision IN. In cases where this alternative approach is used, the source of infusion fluid 72 will be disconnected from lumen 19 after the device has been inserted into the anterior chamber AC and, thereafter, the infusion fluid source 72 will be reconnected to lumen 16 of outer tube 12 such that infusion fluid will flow out of aperture 26. Negative pressure (e.g., via aspiration pump module 74) may then be applied to lumen 19 of the inner tube 14 so as to aspirate fluid and debris through lumen 19. The vertical height of the infusion fluid source 72 may be adjusted to provide sufficient gravity feed of infusion fluid to make up for the volume of fluid or matter being aspirated from the anterior chamber AC through lumen 19, thereby maintaining the desired pressure of fluid within the anterior chamber AC during the procedure.

[0049] A lens device (e.g. Ocular Single Mirror Gonio, Model OSMG, Ocular Instruments, Bellevue, Washington) may be positioned on the anterior aspect of the eye to enable the physician to clearly visualize the angle A where the segment of trabecular meshwork TM is to be removed. Under such visualization, the device 10 is advanced until the distal tip of the cutter tube or inner tube 14 is positioned adjacent to the trabecular meshwork TM at the location where the strip is to be removed. Thereafter, the protector is advanced through the trabecular meshwork TM and into Schlemm's Canal SC.

[0050] The tissue cutting or ablation apparatus, such as bipolar electrodes 21, 22 or 46, 47, is/are then energized and the device 10 is advanced along Schlemm's Canal, thereby causing the cutting or ablation apparatus, such as bipolar electrodes 21 and 22, to cut or ablate a strip of the trabecular meshwork TM to create opening O, as shown in Figure 4C.

[0051] In the bipolar embodiments of the device 10 shown in Figures 2 or 5A-5B, discharge of electrosurgical energy via the bipolar electrodes 21, 22 or 46, 47 will remove a full thickness strip of tissue from the trabecular meshwork TM without traumatizing the underlying walls of Schlemm's canal and/or the collector channels, as those structures remain protected from the electrosurgi-

cal energy by the advancing protector 24 or 52. The insulated protector 24 or 52 serves two primary purposes: 1) the size and shape of the protector 24 or 52 allows its placement in Schlemm's Canal SC to facilitate guiding the device along Schlemm's Canal SC during the cutting of the strip from the trabecular meshwork TM and 2) the protector 24 or 52 protects and shields the underlying walls of Schlemm's Canal SC and the collector channels from trauma during electrosurgical discharge.

[0052] After a strip of tissue of the desired length (e.g., about 2 mm to about 10 mm) has been removed, the tissue cutting or ablation apparatus, such as bipolar electrodes 21, 22 or 46, 47, is/are then de-energized, the aspiration and possibly infusion are stopped and the device 10 is removed from the eye.

[0053] Following completion of the surgery, aqueous humor will drain from the anterior chamber AC through the opening O that was created by removal of the strip of tissue from the trabecular meshwork TM.

[0054] The present invention further provides a method for manufacturing a device such as tube-fabricated device 10 shown in Fig. 2.

[0055] A method in accordance with the present invention for manufacturing the tube-fabricated device 10 generally comprises the steps of providing outer tube 12 and inner tube 14 made of suitable material, for example hypotubing or other material suitable for use in ophthalmic surgery as described elsewhere herein, and inserting the inner tube within the lumen 16 of the outer tube 12 such that a distal portion of inner tube 14 extends or projects a sufficient distance beyond a distal end of the outer tube 12, as shown.

[0056] The method further comprises the steps of forming at least one leg on a distal portion of the inner tube 14, for example by beveling the distal end of the inner tube 14 and forming cuts therein and bending the at least one leg to form the protector 24.

Figs. 3A-3G show the steps involved in manufacturing the device 10 shown in Fig. 2, in accordance with one embodiment of the present invention.

[0057] Turning now to Fig. 3A and 3A', the step of forming at least one leg comprises cutting the distal portion of the inner tube 14, for example, having a beveled distal end of about 45 degrees, to form a first leg 24A and a second leg 22A. The legs 22A and 24A may be formed by cutting substantially U-shaped or V-shaped grooves or notches 28 into the beveled distal portion of the inner tube 14 in order to form relatively longer first leg 24A and a relatively shorter second leg 22A. In this embodiment, the second leg 22A includes a narrow distal tip region and a relatively wider flared region proximal thereto.

[0058] The method may further comprise providing the cutting or ablating apparatus of the device 10 adjacent the first side of the protector 24. More particularly, this step may comprise forming the electrode mechanism from a portion of the inner tube 14, for example, from the second leg 22A. For example, turning now to Fig. 3B, the final position of the second leg 22A is pressed or bent

radially inwardly as shown in Fig. 3B such that the distal most tip of the second leg 22A is appropriately positioned to form one pole of the bipolar electrode mechanism. In order to accommodate a second pole of the bipolar electrode mechanism, the method may comprise forming an aperture 19 in the second leg 22A, shown more clearly in Fig. 3B' and passing a wire or other electrically conductive member 20 (hereinafter "electrode member 20") therethrough. The aperture 19 is cut to a size and configuration such that it will accommodate the electrode member 20 such as shown in Fig. 2.

[0059] The step of bending the second leg 22A may be accomplished by using tweezers or other suitable tool for gripping and bending the second leg 22A. The distal tip of the second leg 22A (which will form a pole of the electrode) is positioned such that it is substantially aligned with a central axis of the inner tube 14 in the final manufacturing process.

[0060] Next, the protector 24 (shown in Fig. 2) may be formed as follows. Second leg 22A is bent slightly radially outwardly, as shown in Fig. 3C and 3C'. A forming member, for example a pin, wire or other preferably rigid cylindrical member (shown in dashed lines in Figs. 3C and 3D) is then placed between the first leg 24A and second leg 22A.

[0061] Referring now to Fig. 3D and 3D', the first leg 24A is pressed, bent or otherwise shaped, for example by using substantially constant radial pressure, around the forming member, to form the curved configuration of first leg 24A shown in Fig. 3D.

[0062] Protector 24, shown in Fig. 3E and 3E' may be formed by insulating the bent first leg 24A with insulating coating 30. This step may be accomplished using any suitable means, for example, by dip coating, spray coating, or advancement of a fabricated cover over the first leg 24A. The step of insulating or providing insulation may comprise dipping the first leg 22A in a polymer precursor, for example a liquid polyimide, and allowing the liquid polyimide to cure. In some embodiments of the invention, liquid polyimide is applied to both the inside, or first surface, and the outside, or second surface by using a suitable applicator, for example, a tip of a small diameter wire, for example 0.006" diameter wire dipped in a liquid polyimide. In any event, care is taken not to coat the distal tip of second leg 22A.

[0063] Turning now to Figs. 3F and 3F', the present invention may comprise the step of forming first electrode 22, (hereinafter sometimes referred to as first pole of bipolar electrode) from distal portion of the inner tube 14. This step may be accomplished by bending second leg 22A radially inwardly, or in some circumstances, allowing second leg 22A to rebound or spring back to its preformed, inwardly bent shape upon removal of the cylindrical forming member (shown in dashed lines in Figs. 3C and 3D).

[0064] As shown, in this particular embodiment, upon being bent inwardly, the distal tip of the second leg 22A is positioned such that it is spaced apart from and adja-

cent the first side (inside surface) of the protector 24 and is substantially aligned with the central axis of the inner tube 14. The distal most tip of the second leg 22A forms the first pole of the bipolar electrode cutting mechanism.

[0065] Next, electrode member 20 is inserted or passed through aperture 19 as shown in Fig. 3G such that a distal tip of the electrode member 20 will form the second pole of the bipolar electrode. For example, the first pole and the second pole of the bipolar electrode are preferably spaced apart from each other a distance of about 1/20 mm. The electrodes 21 and 22 are operated to create high temperature region spanning/bridging the electrodes 21 and 22, for example by formation of a high energy plasma. More specifically, the method of the invention may further include the step of providing the electrode member 20 by stripping or removing a distal most portion of an insulated electrically conductive wire in order to expose the conductive portion thereof which will form the second pole or second electrode 21 of the bipolar electrode mechanism. In other words, the electrically conductive member 20 may comprise an insulated wire 20' having insulation 23 stripped or removed from a distal tip thereof as shown in Fig. 2 and Fig. 3G, to expose the electrically conductive tip. Alternatively, the method may comprise providing a non-insulated electrically conductive wire and applying insulation to a proximal portion of the wire while leaving a distal most portion exposed. Such insulation may be applied in a liquid form, for example, the insulation may be applied as liquid polyimide, which is then cured.

[0066] Once the second electrode 21 is appropriately placed, electrically conductive member 20 is secured in place, for example by securing the electrically conductive member 20 to the inner tube 14 for example, by adhesive or other suitable means.

[0067] The bipolar electrode and the first side of the protector 24 are spaced apart from each other a distance suitable to receive the tissue to be cut by the device 10. It is noted that preferably, in this embodiment of the invention, the distal-most tip of the electrically conductive member 20 is somewhat proximally located with respect to the distal-most tip of the second leg 22A in order to facilitate operation of the device, for example to substantially prevent or reduce the occurrence of tissue becoming unintentionally trapped or wedged within the device. This feature of the invention is shown most clearly in Fig. 3G.

[0068] Turning now to Fig. 5A, an alternative distal end 40 of the tube-fabricated embodiment of the invention is shown, including outer tube 42 and inner tube 44 that are similar or substantially identical to outer tube 12 and inner tube 14 described hereinabove with respect to the device 10 shown in Fig. 2.

[0069] This alternative distal end may operate in substantially the same fashion as the distal end of device 10 shown in Fig. 2. However, the alternative distal end is formed somewhat differently than the distal end shown in Fig. 2.

[0070] The differences may be more readily appreciated by comparing the distal end shown in Fig. 5B with the distal end shown in Fig. 3G. For example, it can be appreciated that second leg 46 (Fig. 5B) which may form a first pole or first electrode of the electrode mechanism, is not bent radially inwardly like second leg 22 (Fig. 3G). In addition electrically conductive member 45 may be positioned or disposed generally along a central axis of the inner tube 44 rather than outwardly therefrom such as electrically conductive member 20. The electrically conductive member 45 includes second pole or second electrode 47 of the electrode mechanism.

[0071] As shown, electrically conductive member 45 may be held in place by means of bracket portions 49 formed from portions of second leg 46, as shown. The bracket portions 49 are preferably utilized for facilitating positioning of the electrically conductive member 45 during assembly. Adhesive and/or other means may be provided for securing the electrically conductive member 45 in place.

[0072] As shown, outer tube 42 may define an irrigation lumen in fluid communication with irrigation port 48. Inner tube 44 may include aspiration/irrigation lumen 50.

[0073] The invention has been described herein with reference to certain examples and embodiments only. No effort has been made to exhaustively describe all possible examples and embodiments of the invention. Indeed, those of skill in the art will appreciate that various additions, deletions, modifications and other changes may be made to the above-described examples and embodiments, without departing from the intended scope of the invention as recited in the following claims. It is intended that all such additions, deletions, modifications and other changes be included within the scope of the following claims.

Claims

1. A device (10, 40) for cutting or ablating tissue in a human or veterinary patient, said device comprising:

an elongate probe having a distal end, and a tissue cutting or ablating apparatus that emits energy which causes cutting or ablation of tissue; said device being further **characterised by:**

said elongate probe comprising an outer tube (12, 42) that has a longitudinal axis, lumen and a distal end and an inner tube (14, 44) that has a longitudinal axis, a lumen, a distal portion, an outer surface and a distal opening, said inner tube (14, 44) extending through the lumen of the outer tube (12, 42) such that the distal portion of the inner tube (14, 44) extends out of and beyond the distal end of the outer tube (12,

42), there being an aperture formed in a side of the outer tube (12, 42); and a protector (24, 52) on the portion of the inner tube (14, 44) that extends out of and beyond the distal end of the inner tube (14, 44), said protector (24, 52) extending at an angle relative to the longitudinal axis of the inner tube (14, 44), said protector having a first side and a second side;

at least one leg member (22a, 46) on the distal portion of the inner tube (14, 44) said leg member (22a, 46) being configurable to support a portion of the tissue cutting or ablating apparatus; said tissue cutting or ablating apparatus extending through the lumen of the inner tube (14, 44), a distal portion of said tissue cutting or ablating apparatus being supported by said at least one leg member (22a, 46) in a position whereby tissue cutting or ablating energy will emit from the tissue cutting or ablating apparatus toward the first side of the protector (24, 52); said protector (24, 52) being positionable such that tissue that is to be cut or ablated by the emitted energy is adjacent to the first side of the protector (24, 52) and tissue that is to be protected is adjacent to the second side of the protector (24, 52), said protector (24, 52) being at least partially formed of an insulating material to deter thermal damage to tissue located adjacent to the second side of the protector (24, 52) when the tissue cutting or ablating apparatus is emitting tissue cutting or ablation energy.

2. A device (10, 40) according to Claim 1 wherein the protector is formed entirely of insulating material.
3. A device (10, 40) according to Claim 1 herein the protector is formed of metal that is at least partially covered by an insulating material.
4. A device (10, 40) according to Claim 1 wherein the insulating material comprises at least partial polymer coating.
5. A device (10, 40) according to Claim 4 wherein the polymer coating comprises a polyimide coating.
6. A device (10, 40) according to Claim 5 wherein the polymer coating is applied to at least a portion of the protector by dipping at least a portion of the protector into a liquid polymer solution which subsequently dries and forms a coating.
7. A device (10, 40) according to Claim 1 further comprising a source of fluid connected to the lumen of the outer tube (12, 42) to infuse fluid through the

lumen of the outer tube (12, 42) and out of the aperture formed in a side of the outer tube (12, 42).

8. A device (10, 40) according to Claim 1 wherein the tissue cutting or ablating apparatus comprises an electrode.
9. A device (10, 40) according to Claim 8 wherein the electrode comprises a bipolar electrode having first and second electrode surfaces.
10. A device (10, 40) according to Claim 8 wherein the electrode comprises a monopolar electrode and wherein the device further comprises a return electrode that can be electrically coupled to the patient's body.
11. A device (10, 40) according to Claim 1 wherein the tissue cutting or ablating apparatus comprises a light emitting apparatus which emits light energy to cut or ablate tissue.
12. A device (10, 40) according to Claim 11 wherein the light emitting apparatus emits laser energy.
13. A device (10, 40) according to Claim 11 wherein the light emitting apparatus emits light energy that causes thermal destruction of tissue.
14. A device (10, 40) according to Claim 11 wherein the light emitting apparatus emits ultraviolet light or infrared light.
15. A device (10, 40) according to Claim 1 wherein the tissue cutting or ablating apparatus comprises an ultrasonic apparatus which uses ultrasound to cut or ablate tissue.
16. A device (10, 40) according to Claim 1 wherein the outer diameter of the inner tube (14, 44) is smaller than the inner diameter of the outer tube (12, 42) such that fluid may flow through the lumen of the outer tube (12, 42) and out of said aperture.
17. A device (10, 40) according to Claim 1 wherein the tissue cutting or ablating apparatus comprises an energy transmitting member that extends through the lumen of the inner tube (14, 44) to deliver energy to an energy emitting location between the distal opening of the inner tube and the first side of the protector.
18. A device (10, 40) according to Claim 17 wherein the energy transmitting member comprises is an electrically conductive member for delivering electrical energy to the energy emitting location.
19. A device (10, 40) according to Claim 17 wherein the

energy transmitting member is a light guide for delivering light energy to the energy emitting location.

20. A device (10, 40) according to Claim 17 wherein the energy transmitting member is an ultrasound transmission member for delivering ultrasonic energy to the energy emitting location.
21. A device (10, 40) according to Claim 1 wherein the tissue cutting or ablating apparatus emits energy which causes cutting or ablation of tissue and wherein the intensity and/or configuration of energy emitted by the tissue cutting or ablating apparatus is such that a strip of tissue of substantially predetermined width is cut or ablated.
22. A device (10, 40) according to Claim 1 wherein the protector (24, 52) is formed by forming cuts in the distal portion of the inner tube (14, 44) and then bending at least a part of the distal portion of the inner tube to form said protector.
23. A device (10, 40) according to Claim 22 wherein the protector (24, 52) is further formed by applying an insulating material to the part of the distal end of the inner tube that is bent to form the protector, thereby forming a protector having an insulating material disposed thereon.
24. A method for manufacturing a device (10, 40) useful for cutting or ablating tissue in a human or veterinary patient, said device comprising an inner tube (14, 44), an outer tube (12, 42) and an electrosurgical cutting or ablating apparatus, the method comprising:
 - A) positioning the inner tube (14, 44) within the outer tube (12, 42) such that a distal portion of the inner tube (14, 44) extends beyond a distal end of the outer tube (12, 42);
 - B) forming a protector on the distal end of the outer tube (12, 42) by
 - a. cutting at least one notch in the distal end of the inner tube (14, 44) to form at least a first leg (24a) on the distal end of the inner tube (14, 44), and
 - b. bending the first leg (24a) on the distal end of the inner tube (14, 44) to form a protector (24, 52) having a first side and a second side, and
 - C) positioning the electrosurgical cutting or ablating apparatus at the distal portion of the inner tube (14, 44) and spaced apart from and adjacent the first side of the protector (24, 52).

25. A method according to claim 24 wherein the step of

positioning an electrosurgical cutting or ablating apparatus comprises forming an electrode member from a portion of the inner tube.

26. A method according to claim 25 wherein the step of forming an electrode includes forming a second leg in the distal portion of the inner tube.
27. A method according to claim 24 wherein the step of bending the first leg (24a) comprises pressing, bending or otherwise shaping the first leg radially inwardly.
28. A method according to claim 24 wherein the step of forming the protector (24, 52) further comprises applying an insulating coating on the first leg (24a).
29. A method according to claim 25 wherein the step of forming an electrode comprises forming a first electrode from a portion of the inner tube and positioning an electrically conductive member including a second electrode spaced apart from and adjacent to the first electrode.
30. A device according to claim 1 wherein the cutting or ablating apparatus comprises a plasma generating apparatus which utilizes properties of plasma to cut or ablate tissue.

Patentansprüche

1. Vorrichtung (10, 40) zum Schneiden oder Abtragen von Gewebe in einem menschlichen oder tierischen Patienten, wobei die Vorrichtung Folgendes umfasst:

eine langgestreckte Sonde mit einem distalen Ende, und eine Gewebe-Schneid- oder -Abtrag-vorrichtung, die Energie emittiert, die das Schneiden oder Abtragen von Gewebe bewirkt, wobei die Vorrichtung weiterhin **dadurch gekennzeichnet ist, dass:**

die langgestreckte Sonde ein äußeres Rohr (12, 42), das eine Längsachse, ein Lumen und ein distales Ende aufweist, und ein inneres Rohr (14, 44) umfasst, das eine Längsachse, ein Lumen und einen distalen Teil, eine Außenoberfläche und eine distale Öffnung aufweist, wobei das Innere Rohr (14, 44) sich durch das Lumen des äußeren Rohres (12, 42) derart erstreckt, dass sich der distale Teil des inneren Rohres (14, 44) aus dem distalen Ende des äußeren Rohres (12, 42) heraus und über dieses hinaus erstreckt, wobei eine Öffnung in einer Seite des äußeren Rohres (12, 42) gebildet ist;

- und
eine Schutzeinrichtung (24, 52) auf dem Teil des inneren Rohres (14, 44) angeordnet ist, der sich aus dem distalen Ende des inneren Rohres (14, 44) heraus und über dieses hinaus erstreckt, wobei die Schutzeinrichtung (24, 52) sich unter einem Winkel gegenüber der Längsachse des inneren Rohres (14, 44) erstreckt, wobei die Schutzeinrichtung eine erste Seite und eine zweite Seite aufweist;
- zumindest ein Schenkelteil (22a, 46) auf dem distalen Teil des inneren Rohres (14, 44) angeordnet ist, wobei der Schenkelteil (22a, 46) konfigurierbar ist, um einen Teil der Gewebe-Schneid- oder -Abtraggvorrichtung zu tragen; wobei sich die Gewebe-Schneid- oder -Abtraggvorrichtung durch das Lumen des inneren Rohres (14, 44) erstreckt, wobei ein distaler Teil der Gewebe-Schneid- oder -Abtraggvorrichtung von dem zumindest einen Schenkelteil (22a, 46) in einer Position getragen wird, wodurch Gewebe-Schneid- oder -Abtragenergie von der Gewebe-Schneid- oder -Abtraggvorrichtung in Richtung auf die erste Seite der Schutzeinrichtung (24, 52) emittiert wird;
- wobei die Schutzeinrichtung (24, 52) derart positionierbar ist, dass Gewebe, das durch die emittierte Energie geschnitten oder abgetragen werden soll, sich benachbart zu der ersten Seite der Schutzeinrichtung (24, 52) befindet, und dass Gewebe, das geschützt werden soll, sich benachbart zu der zweiten Seite der Schutzeinrichtung (24, 52) befindet, wobei die Schutzeinrichtung (24, 52) zumindest teilweise aus einem Isoliermaterial hergestellt ist, um thermische Schäden an Gewebe zu verhindern, das sich benachbart zu der zweiten Seite der Schutzeinrichtung (24, 52) befindet, wenn die Gewebe-Schneid- oder - Abtraggvorrichtung Gewebe schneidende oder abtragende Energie emittiert.
2. Vorrichtung (10, 40) nach Anspruch 1, bei der die Schutzeinrichtung vollständig aus Isoliermaterial hergestellt ist.
 3. Vorrichtung (10, 40) nach Anspruch 1, bei der die Schutzeinrichtung aus Metall hergestellt ist, das zumindest teilweise mit einem Isoliermaterial abgedeckt ist.
 4. Vorrichtung (10, 40) nach Anspruch 1, bei der das Isoliermaterial zumindest eine teilweise Polymer-Beschichtung umfasst.
 5. Vorrichtung (10, 40) nach Anspruch 4, bei der die Polymer-Beschichtung eine Polyimid-Beschichtung

umfasst.

6. Vorrichtung (10, 40) nach Anspruch 5, bei der die Polymer-Beschichtung auf zumindest einen Teil der Schutzeinrichtung dadurch aufgebracht wird, dass zumindest ein Teil der Schutzeinrichtung in eine flüssige Polymer-Lösung getaucht wird, die nachfolgend trocknet und eine Beschichtung bildet.
7. Vorrichtung (10, 40) nach Anspruch 1, die weiterhin eine Quelle für ein Strömungsmedium umfasst, die mit dem Lumen des äußeren Rohres (12, 42) verbunden ist, um durch das Lumen des äußeren Rohres (12, 42) und aus der in einer Seite des äußeren Rohres (12, 42) gebildeten Öffnung ein Strömungsmittel zu infundieren.
8. Vorrichtung (10, 40) nach Anspruch 1, bei der die Gewebe-Schneid- oder - Abtraggvorrichtung eine Elektrode umfasst.
9. Vorrichtung (10, 40) nach Anspruch 8, bei der die Elektrode eine bipolare Elektrode mit ersten und zweiten Elektroden-Oberflächen umfasst.
10. Vorrichtung (10, 40) nach Anspruch 8, bei der die Elektrode eine monopolare Elektrode umfasst, und bei der die Vorrichtung weiterhin eine Rückführungs-Elektrode umfasst, die elektrisch mit dem Körper des Patienten gekoppelt werden kann.
11. Vorrichtung (10, 40) nach Anspruch 1, bei der die Gewebe-Schneid- oder - Abtraggvorrichtung eine Licht emittierende Vorrichtung umfasst, die Lichtenergie zum Schneiden oder Abtragen von Gewebe emittiert.
12. Vorrichtung (10, 40) nach Anspruch 11, bei der die Licht emittierende Vorrichtung Laser-Energie emittiert.
13. Vorrichtung (10, 40) nach Anspruch 11, bei der die Licht emittierende Vorrichtung Lichtenergie emittiert, die eine thermische Zerstörung von Gewebe hervorruft.
14. Vorrichtung (10, 40) nach Anspruch 11, bei der die Licht emittierende Vorrichtung ultraviolettes Licht oder Infrarot-Licht emittiert.
15. Vorrichtung (10, 40) nach Anspruch 1, bei der die Gewebe-Schneid- oder - Abtraggvorrichtung eine Ultraschall-Vorrichtung umfasst, die Ultraschall zum Schneiden oder Abtragen von Gewebe verwendet.
16. Vorrichtung (10, 40) nach Anspruch 1, bei der der Außendurchmesser des inneren Rohres (14, 44) kleiner als der Innendurchmesser des äußeren Roh-

res (12, 42) derart ist, dass ein Strömungsmittel durch das Lumen des äußeren Rohres (12, 42) und aus der Öffnung heraus strömen kann.

17. Vorrichtung (10, 40) nach Anspruch 1, bei der die Gewebe-Schneid- oder -Abtragsvorrichtung ein Energie-Übertragungsteil umfasst, das sich durch das Lumen des inneren Rohres (14, 44) erstreckt, um Energie an eine Energie emittierende Stelle zwischen der distalen Öffnung des inneren Rohres und der ersten Seite der Schutzeinrichtung zu liefern. 5
18. Vorrichtung (10, 40) nach Anspruch 17, bei der das Energie-Übertragungsteil ein elektrisch leitendes Element zur Zuführung elektrischer Energie an die Energie emittierende Stelle umfasst. 10
19. Vorrichtung (10, 40) nach Anspruch 17, bei der das Energie-Übertragungsteil ein Lichtleiter zur Zuführung von Lichtenergie an die Licht emittierende Stelle ist. 15
20. Vorrichtung (10, 40) nach Anspruch 17, bei der das Energie-Übertragungsteil ein Ultraschall-Übertragungsteil zur Zuführung von Ultraschall-Energie an die Energie emittierende Stelle ist. 20
21. Vorrichtung (10, 40) nach Anspruch 1, bei der die Gewebe-Schneid- oder -Abtragsvorrichtung Energie emittiert, die ein Schneiden oder Abtragen des Gewebes hervorruft, und bei der die Intensität und/oder Konfiguration der Energie, die von der Gewebe-Schneid- oder -Abtragsvorrichtung emittiert wird, derart ist, dass ein Streifen des Gewebes mit im Wesentlichen vorgegebener Breite ausgeschnitten oder abgetragen wird. 25
22. Vorrichtung (10, 40) nach Anspruch 1, bei der die Schutzeinrichtung (24, 52) durch die Bildung von Einschnitten in dem distalen Teil des inneren Rohres (14, 44) und nachfolgendes Biegen zumindest eines Teils des distalen Teils des inneren Rohres gebildet wird, um die Schutzeinrichtung zu bilden. 30
23. Vorrichtung (10, 40) nach Anspruch 22, bei der die Schutzeinrichtung (24, 52) weiterhin durch Aufbringen eines Isoliermaterials auf den Teil des distalen Endes des inneren Rohres gebildet wird, der zur Bildung der Schutzeinrichtung gebogen wird, wodurch eine Schutzeinrichtung mit einem darauf angeordneten Isoliermaterial gebildet wird. 35
24. Verfahren zur Herstellung einer Vorrichtung (10, 40), die zum Schneiden oder Abtragen von Gewebe in einem menschlichen oder tierischen Patienten brauchbar ist, wobei die Vorrichtung ein inneres Rohr (14, 44), ein äußeres Rohr (12, 42) und eine elektrochirurgische Schneid- oder Abtragsvorrich- 40

tung umfasst, wobei das Verfahren Folgendes umfasst:

- A) Anordnen des inneren Rohres (14, 44) innerhalb des äußeren Rohres (12, 42) derart, dass sich ein distaler Teil des inneren Rohres (14, 44) über ein distales Ende des äußeren Rohres (12, 42) hinaus erstreckt;
- B) Bilden einer Schutzeinrichtung auf dem distalen Ende des äußeren Rohres (12, 42) durch:

- a. Schneiden von zumindest einer Kerbe in das distale Ende des inneren Rohres (14, 44) zur Bildung eines ersten Schenkels (24a) auf dem distalen Ende des inneren Rohres (14, 44); und
- b. Biegen des ersten Schenkels (24a) auf dem distalen Ende des inneren Rohres (14, 44) zur Bildung einer Schutzeinrichtung (24, 52), die eine erste Seite und eine zweite Seite aufweist, und

- C) Positionieren der elektrochirurgischen Schneid- oder -Abtragsvorrichtung an dem distalen Teil des inneren Rohres (14, 44) und mit Abstand von und benachbart zu der ersten Seite der Schutzeinrichtung (24, 52).

25. Verfahren nach Anspruch 24, bei dem der Schritt des Positionierens einer elektrochirurgischen Schneid- oder -Abtragsvorrichtung das Bilden eines Elektrodenteils aus einem Teil des inneren Rohres umfasst. 45
26. Verfahren nach Anspruch 25, bei dem der Schritt der Bildung einer Elektrode das Formen eines zweiten Schenkels in dem distalen Teil des inneren Rohres einschließt. 50
27. Verfahren nach Anspruch 24, bei dem der Schritt des Biegens des ersten Schenkels (24a) das Pressen, Biegen oder Formen auf andere Weise des ersten Schenkels in Radialrichtung nach innen umfasst. 55
28. Verfahren nach Anspruch 24, bei dem der Schritt des Formens der Schutzeinrichtung (24, 52) weiterhin das Aufbringen einer Isolierbeschichtung auf den ersten Schenkel (24a) umfasst.
29. Verfahren nach Anspruch 25, bei dem der Schritt der Formung einer Elektrode das Formen einer ersten Elektrode aus einem Teil des inneren Rohres und die Positionierung eines elektrisch leitenden Elementes, das eine zweite Elektrode einschließt, im Abstand von und benachbart zu der ersten Elektrode umfasst.

30. Vorrichtung nach Anspruch 1, bei der die Schneid- oder Abtragsvorrichtung eine Plasma erzeugende Vorrichtung umfasst, die Eigenschaften des Plasmas verwendet, um Gewebe zu schneiden oder abzutragen.

5

Revendications

1. Dispositif (10, 40) pour découper ou ablater un tissu sur un patient humain ou animal, ledit dispositif comprenant :

10

une sonde allongée ayant une extrémité distale et un appareil de découpe ou d'ablation de tissu qui émet de l'énergie qui provoque la découpe ou l'ablation du tissu ; ledit dispositif étant en outre **caractérisé par** :

15

ladite sonde allongée comprenant un tube externe (12, 42) qui a un axe longitudinal, une lumière et une extrémité distale et un tube interne (14, 44) qui a un axe longitudinal, une lumière, une partie distale, une surface externe et une ouverture distale, ledit tube interne (14, 44) s'étendant à travers la lumière du tube externe (12, 42) de sorte que la partie distale du tube interne (14, 44) s'étend à l'extérieur de et au-delà de l'extrémité distale du tube externe (12, 42), où l'on trouve une ouverture formée dans un côté du tube externe (12, 42) ; et un dispositif de protection (24, 52) sur la partie du tube interne (14, 44) qui s'étend à l'extérieur de et au-delà de l'extrémité distale du tube interne (14, 44), ledit dispositif de protection (24, 52) s'étendant selon un angle par rapport à l'axe longitudinal du tube interne (14, 44), ledit dispositif de protection ayant un premier côté et un second côté ;

20

25

30

35

40

au moins un élément formant patte (22a, 46) sur la partie distale du tube interne (14, 44), ledit élément formant patte (22a, 46) pouvant être configuré pour supporter une partie de l'appareil de découpe ou d'ablation de tissu ; ledit appareil de découpe ou d'ablation de tissu s'étendant à travers la lumière du tube interne (14, 44), une partie distale dudit appareil de découpe ou d'ablation de tissu étant supportée par ledit au moins un élément formant patte (22a, 46) dans une position moyennant quoi l'énergie de découpe ou d'ablation de tissu est émise de l'appareil de découpe ou d'ablation de tissu vers le premier côté du dispositif de protection (24, 52) ; ledit dispositif de protection (24, 52) pouvant être positionné de sorte que le tissu qui doit être dé-

45

50

55

coupé ou ablaté par l'énergie émise, est adjacent au premier côté du dispositif de protection (24, 52) et le tissu qui doit être protégé est adjacent au second côté du dispositif de protection (24, 52), ledit dispositif de protection (24, 52) étant au moins partiellement formé avec un matériau isolant pour empêcher l'endommagement thermique du tissu positionné de manière adjacente au second côté du dispositif de protection (24, 52) lorsque l'appareil de découpe ou d'ablation de tissu émet l'énergie de découpe ou d'ablation de tissu.

2. Dispositif (10, 40) selon la revendication 1, dans lequel le dispositif de protection est complètement formé à partir d'un matériau isolant.

3. Dispositif (10, 40) selon la revendication 1, dans lequel le dispositif de protection est formé à partir de métal qui est au moins partiellement recouvert par un matériau isolant.

4. Dispositif (10, 40) selon la revendication 1, dans lequel le matériau isolant comprend au moins un revêtement partiel polymère.

5. Dispositif (10, 40) selon la revendication 4, dans lequel le revêtement polymère comprend un revêtement de polyimide.

6. Dispositif (10, 40) selon la revendication 5, dans lequel le revêtement polymère est appliqué sur au moins une partie du dispositif de protection en trempant au moins une partie du dispositif de protection dans une solution polymère liquide qui sèche sensiblement et forme un revêtement.

7. Dispositif (10, 40) selon la revendication 1, comprenant en outre une source de fluide raccordée à la lumière du tube externe (12, 42) pour infuser le fluide à travers la lumière du tube externe (12, 42) et à l'extérieur de l'ouverture formée dans un côté du tube externe (12, 42).

8. Dispositif (10, 40) selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation de tissu comprend une électrode.

9. Dispositif (10, 40) selon la revendication 8, dans lequel l'électrode comprend une électrode bipolaire ayant des première et seconde surfaces d'électrode.

10. Dispositif (10, 40) selon la revendication 8, dans lequel l'électrode comprend une électrode monopolaire et dans lequel le dispositif comprend en outre une électrode de référence qui peut être électriquement couplée au corps du patient.

11. Dispositif (10, 40) selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation de tissu comprend un appareil d'émission de lumière qui émet de l'énergie lumineuse pour découper ou ablater le tissu. 5
12. Dispositif (10, 40) selon la revendication 11, dans lequel l'appareil d'émission de lumière émet de l'énergie laser. 10
13. Dispositif (10, 40) selon la revendication 11, dans lequel l'appareil d'émission de lumière émet de l'énergie lumineuse qui provoque la destruction thermique du tissu. 15
14. Dispositif (10, 40) selon la revendication 11, dans lequel l'appareil d'émission de lumière émet de la lumière ultraviolette ou de la lumière infrarouge. 20
15. Dispositif (10, 40) selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation de tissu comprend un appareil à ultrasons qui utilise les ultrasons pour découper ou ablater le tissu. 25
16. Dispositif (10, 40) selon la revendication 1, dans lequel le diamètre externe du tube interne (14, 44) est plus petit que le diamètre interne du tube externe (12, 42) de sorte que le fluide peut s'écouler à travers la lumière du tube externe (12, 42) et sortir par ladite ouverture. 30
17. Dispositif (10, 40) selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation de tissu comprend un élément de transmission d'énergie qui s'étend à travers la lumière du tube interne (14, 44) pour délivrer l'énergie à un emplacement d'émission d'énergie entre l'ouverture distale du tube interne et le premier côté du dispositif de protection. 35
18. Dispositif (10, 40) selon la revendication 17, dans lequel l'élément de transmission d'énergie comprend un élément électriquement conducteur pour délivrer l'énergie électrique à l'emplacement d'émission d'énergie. 40
19. Dispositif (10, 40) selon la revendication 17, dans lequel l'élément de transmission d'énergie est un guide de lumière pour délivrer l'énergie lumineuse à l'emplacement d'émission d'énergie. 45
20. Dispositif (10, 40) selon la revendication 17, dans lequel l'élément de transmission d'énergie est un élément de transmission à ultrasons pour délivrer l'énergie à ultrasons à l'emplacement d'émission d'énergie. 50
21. Dispositif (10, 40) selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation de tissu émet l'énergie qui provoque la découpe ou l'ablation du tissu et dans lequel l'intensité et/ou la configuration d'énergie émise par l'appareil de découpe ou d'ablation de tissu est telle (sont telles) qu'une bande de tissu de largeur sensiblement prédéterminée est découpée ou ablatée. 55
22. Dispositif (10, 40) selon la revendication 1, dans lequel le dispositif de protection (24, 52) est formé en formant des découpes dans la partie distale du tube interne (14, 44) et en pliant ensuite au moins une partie de la partie distale du tube interne afin de former ledit dispositif de protection.
23. Dispositif (10, 40) selon la revendication 22, dans lequel le dispositif de protection (24, 52) est en outre formé en appliquant un matériau isolant sur la partie de l'extrémité distale du tube interne qui est pliée afin de former le dispositif de protection, formant ainsi un dispositif de protection ayant un matériau isolant disposé sur ce dernier.
24. Procédé pour fabriquer un dispositif (10, 40) utile pour découper ou ablater du tissu chez un patient humain ou animal, ledit dispositif comprenant un tube interne (14, 44), un tube externe (12, 42) et un appareil de découpe ou d'ablation électrochirurgical, le procédé comprenant les étapes consistant à :
- A) positionner le tube interne (14, 44) à l'intérieur du tube externe (12, 42) de sorte qu'une partie distale du tube interne (14, 44) s'étend au-delà d'une extrémité distale du tube externe (12, 42) ;
- B) former un dispositif de protection sur l'extrémité distale du tube externe (12, 42) en
- a. découpant au moins une encoche dans l'extrémité distale du tube interne (14, 44) afin de former au moins une première patte (24a) sur l'extrémité distale du tube interne (14, 44), et
- b. pliant la première patte (24a) sur l'extrémité distale du tube interne (14, 44) pour former un dispositif de protection (24, 52) ayant un premier côté et un second côté, et
- C) positionner l'appareil de découpe ou d'ablation électrochirurgical au niveau de la partie distale du tube interne (14, 44) et espacé de et adjacent au premier côté dudit dispositif de protection (24, 52).
25. Procédé selon la revendication 24, dans lequel l'étape consistant à positionner un appareil de découpe ou d'ablation électrochirurgical comprend l'étape consistant à former un élément d'électrode à partir d'une partie du tube interne.

26. Procédé selon la revendication 25, dans lequel l'étape consistant à former une électrode comprend l'étape consistant à former une seconde patte dans la partie distale du tube interne. 5
27. Procédé selon la revendication 24, dans lequel l'étape consistant à plier la première patte (24a) comprend les étapes consistant à comprimer, plier ou bien façonner d'une autre manière la première patte radialement vers l'intérieur. 10
28. Procédé selon la revendication 24, dans lequel l'étape consistant à former le dispositif de protection (24, 52) comprend en outre l'étape consistant à appliquer un revêtement isolant sur la première patte (24a). 15
29. Procédé selon la revendication 25, dans lequel l'étape consistant à former une électrode comprend les étapes consistant à former une première électrode à partir d'une partie du tube interne et positionner un élément électriquement conducteur comprenant une seconde électrode espacée de et adjacente à la première électrode. 20
30. Dispositif selon la revendication 1, dans lequel l'appareil de découpe ou d'ablation comprend un appareil de génération de plasma qui utilise les propriétés du plasma afin de découper ou d'ablater le tissu. 25

30



35







40

45

50

55

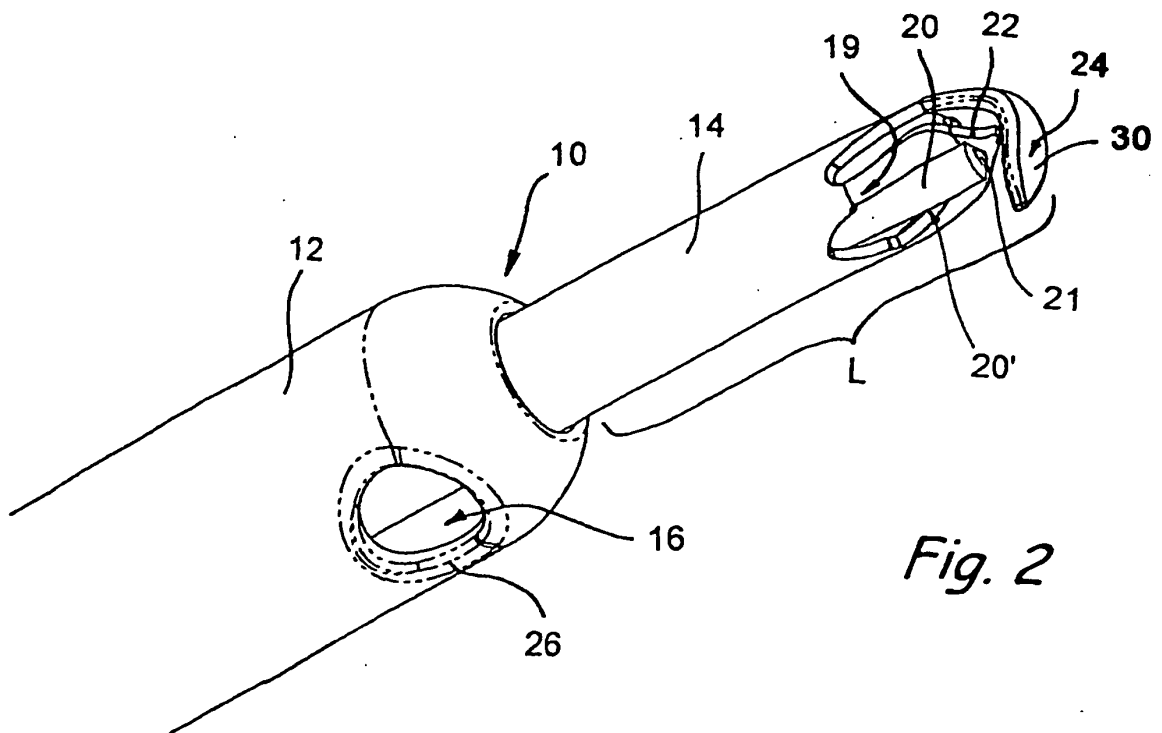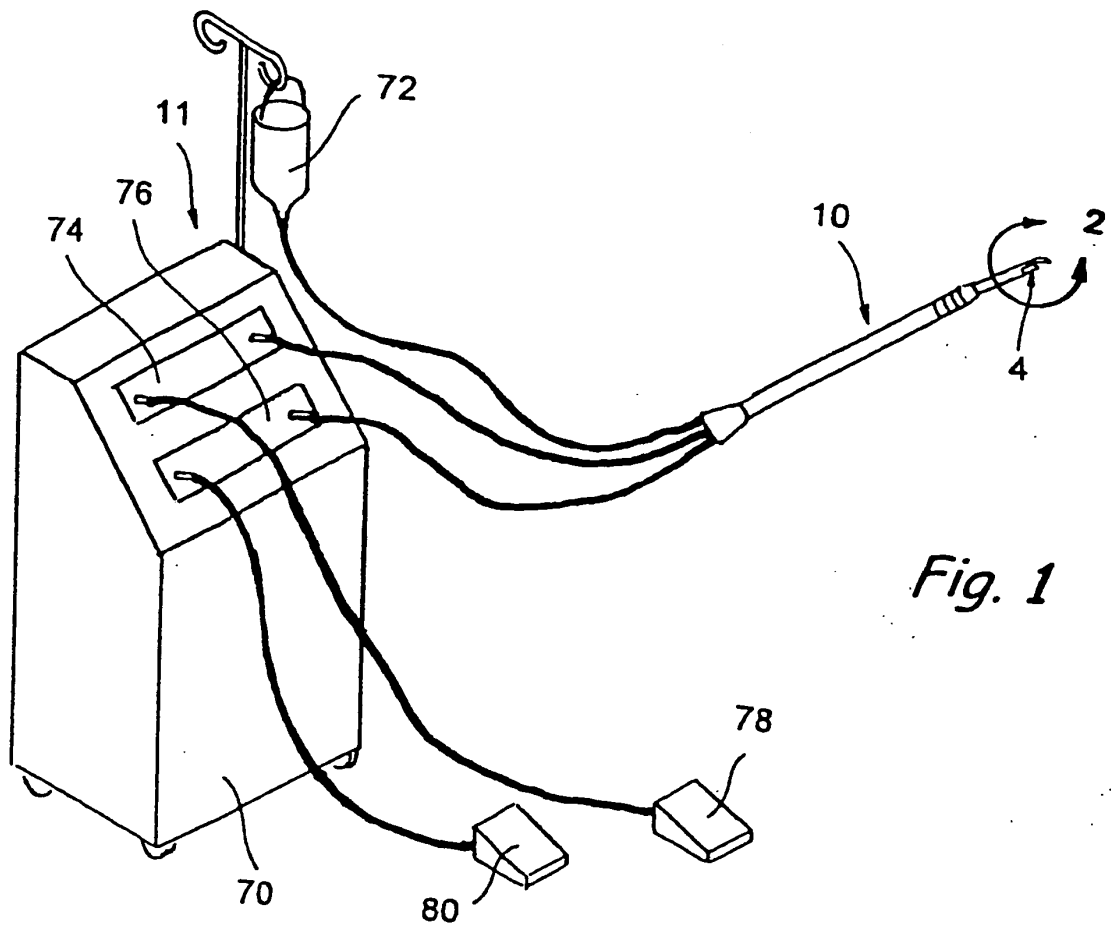

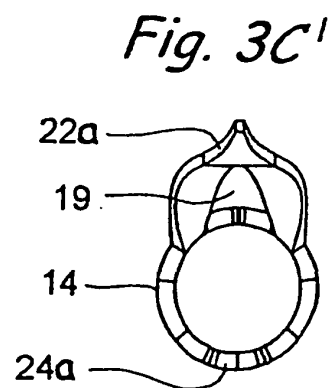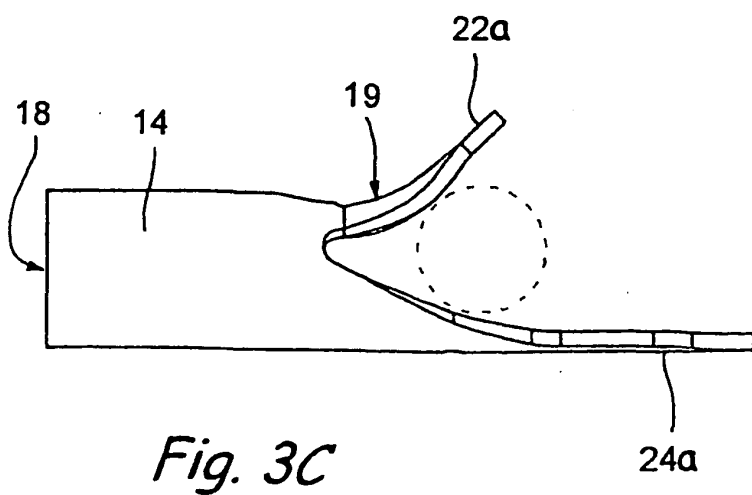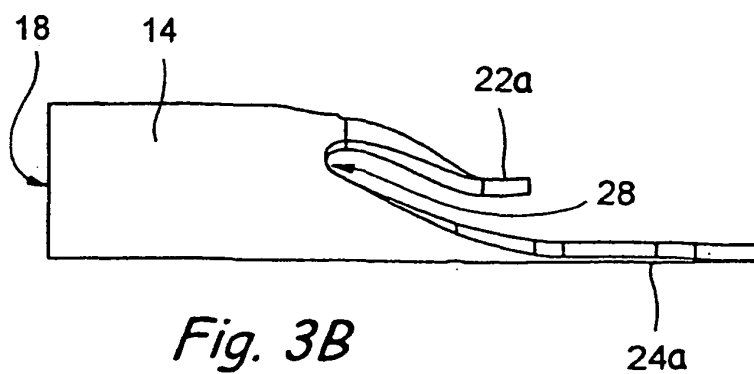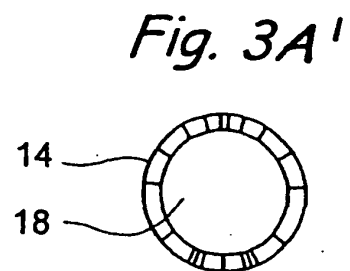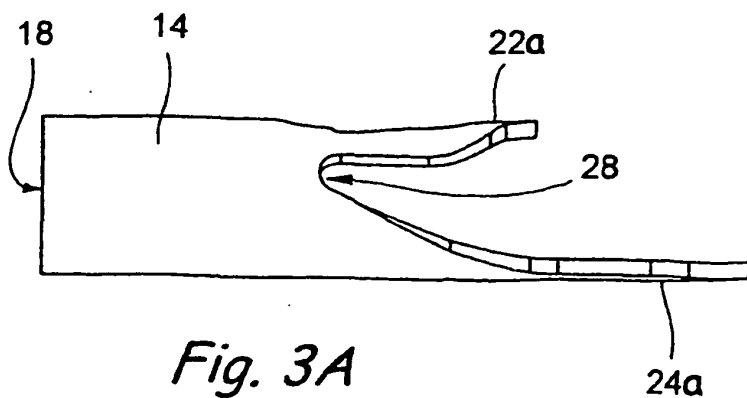

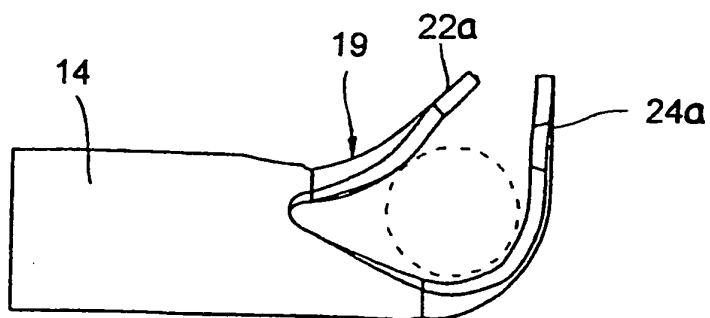


Fig. 3D

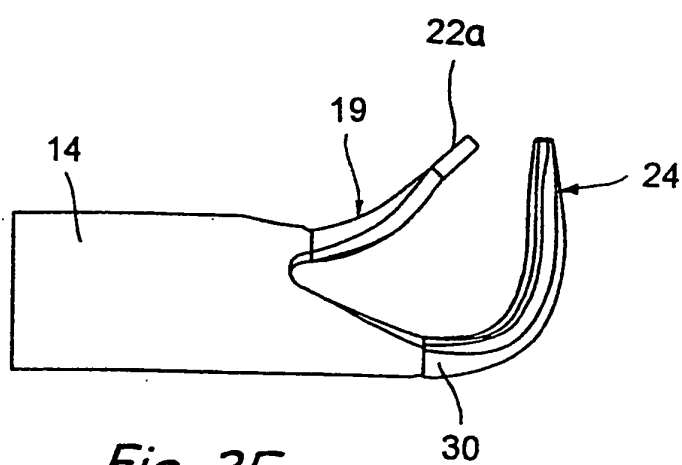
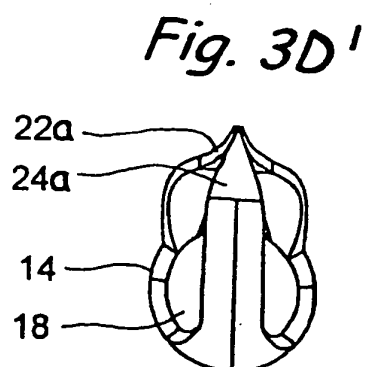


Fig. 3E

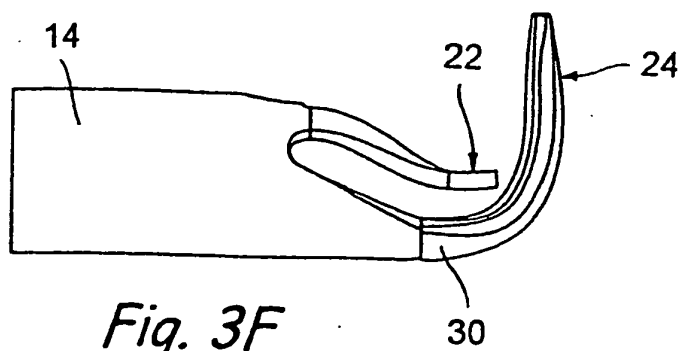
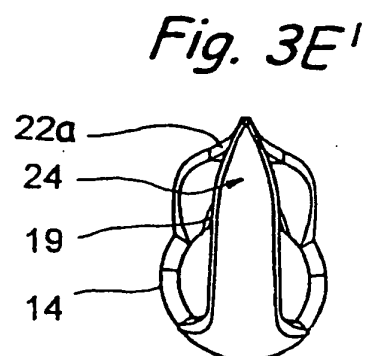
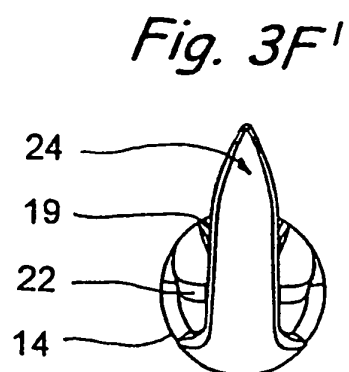
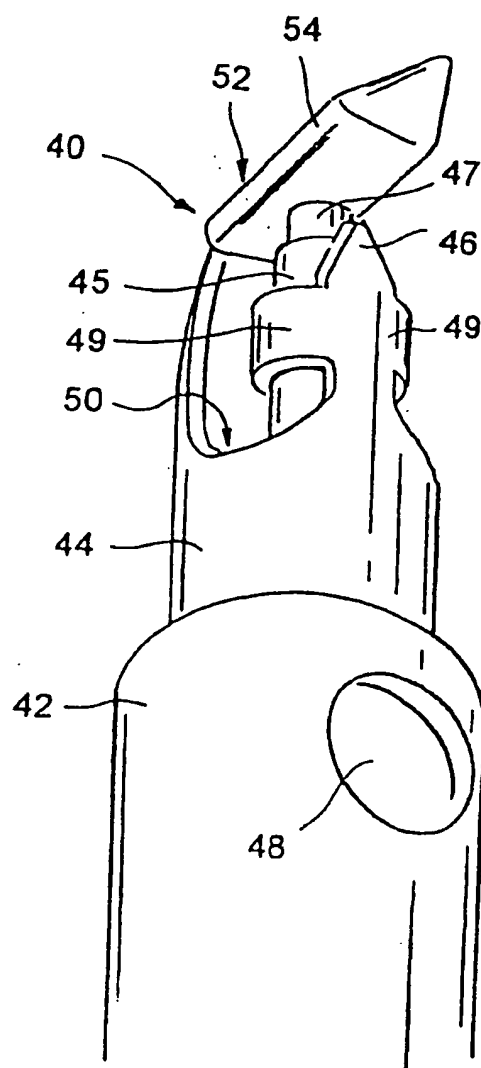
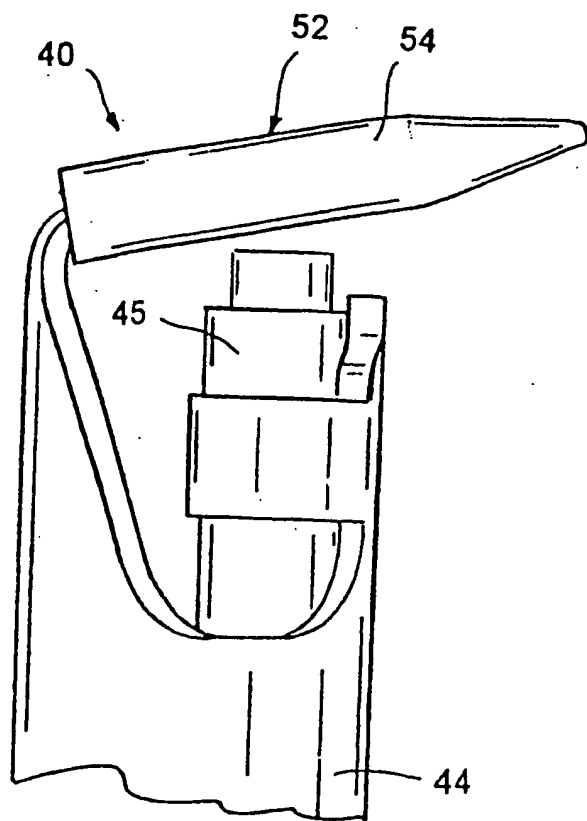
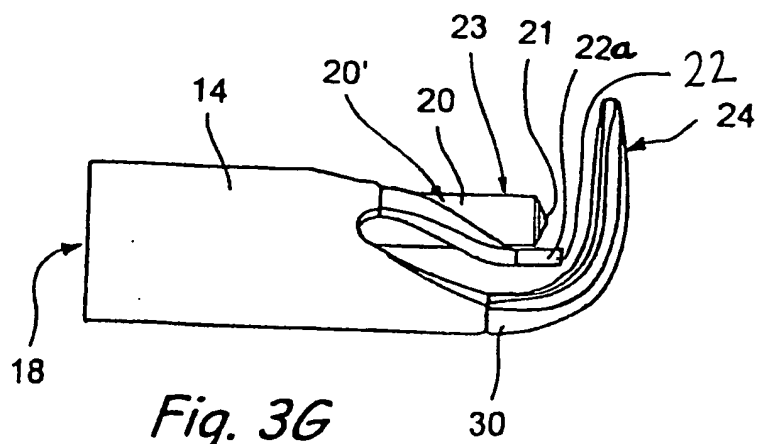


Fig. 3F





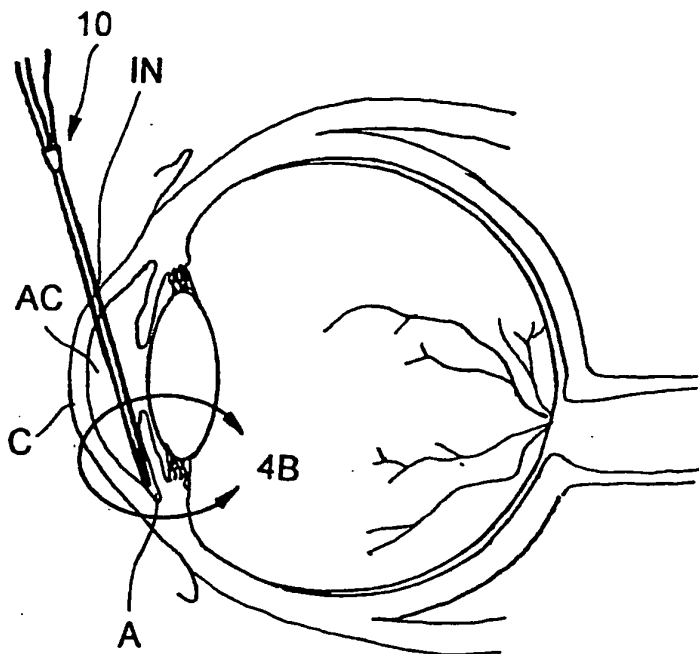


Fig. 4A

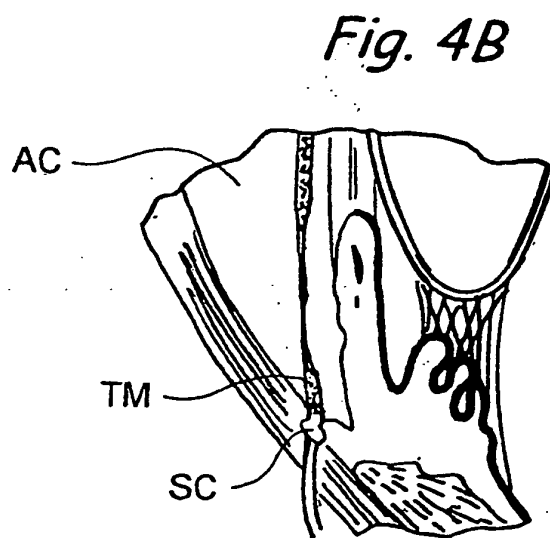


Fig. 4B

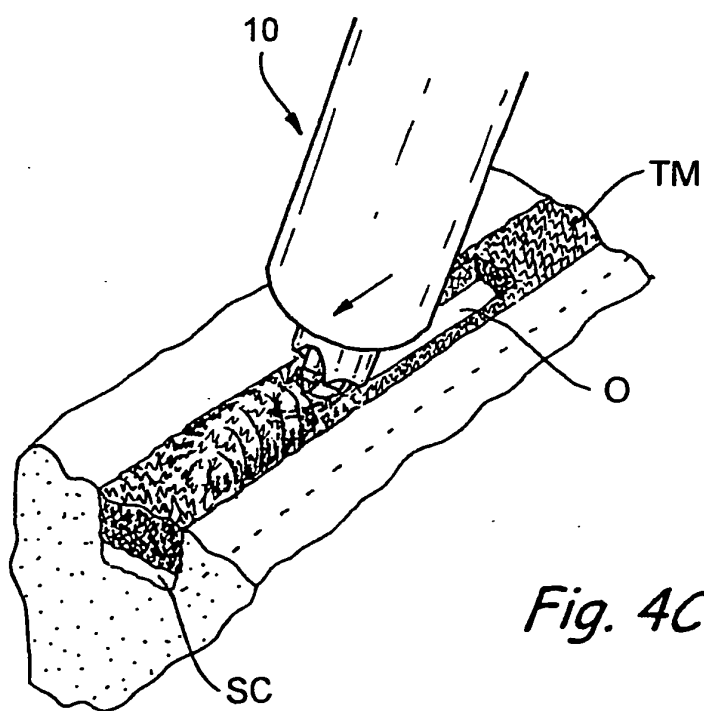


Fig. 4C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 10052473 B [0009]
- US 20020111608 A1, Baerveldt [0009] [0015]
- US 5755716 A [0012]

