



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
26.11.2008 Bulletin 2008/48

(51) Int Cl.:
A61B 17/28 (2006.01) **A61B 17/00** (2006.01)
A61B 17/32 (2006.01) **A61B 1/313** (2006.01)

(21) Application number: **06755368.5**

(86) International application number:
PCT/ES2006/000284

(22) Date of filing: **24.05.2006**

(87) International publication number:
WO 2007/099175 (07.09.2007 Gazette 2007/36)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR

- **PEÑA GONZALEZ, Antonio**
E-08208 Sabadell (barcelona) (ES)
- **CARRERA FABRA, Jordi**
E-08208 Sabadell (barcelona) (ES)
- **TOMÁS JUSTRIBÓ, Albert**
E-08208 Sabadell (barcelona) (ES)

(30) Priority: **03.03.2006 ES 200600522**

(71) Applicant: **Corporacio Sanitaria Parc Tauli**
08208 Sabadell Barcelona (ES)

(74) Representative: **Carpintero Lopez, Francisco et al**
Herrero & Asociados, S.L.
Alcalá 35
28014 Madrid (ES)

(72) Inventors:
• **LAPORTE ROSELLÓ, Enric**
E-08208 Sabadell (barcelona) (ES)

(54) **SURGICAL INSTRUMENT FOR ENDOSCOPIC SURGERY**

(57) Surgical instrument for endoscopic surgery that permits the simulation of the articulation movements of a surgeon finger, comprising a rigid tube (3) whose distal end has a first phalanx (4) articulated, being in turn articulated to a second phalanx (5), which is linked to the rigid tube (3) by means of cables housed in cross ducts (12), situated in the interior of the first phalanx (4), linking

the movement of the second phalanx (5) to that of the first phalanx (4), whose articulation takes place due to the actuation of the transmission rod (11), the rigid tube (3) being attachable to a handle (1) that incorporates a controller (2) for the actuating of the instrument articulation movement by the surgeon, which operates a fork (14), which in turns actuates the transmission rod (11).

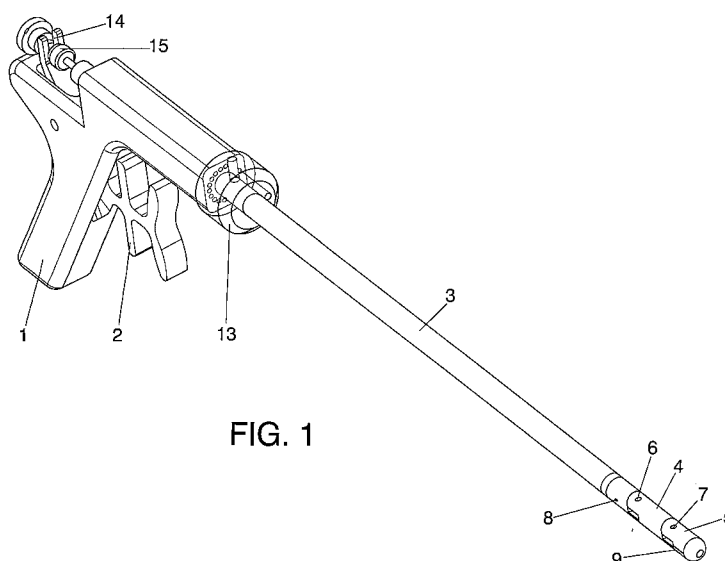


FIG. 1

Description

OBJECT OF THE INVENTION

[0001] The present invention refers to a surgical instrument for endoscopic surgery which has its application in the field of medicine, and more specifically in those operations connected with endoscopic surgery in which an instrument is required that is capable of executing a double articulation in an element inserted in the interior of the body cavity of a patient in a precise way controlled simply with just one hand by a surgeon.

BACKGROUND OF THE INVENTION

[0002] In the field of medicine, the endoscopic approach route has now become consolidated for performing intra-cavity operations, which offers numerous advantages over the open surgery techniques used traditionally. Endoscopy, which comprises the visual examination of a cavity or duct of the organism, is usually applied as a technique that minimizes the invasion of the patient's body cavity and is carried out by means of the insertion of an endoscope by way of a minimal surgical incision through which the sheath passes housing the instrument. The incorporation of cold light and a video camera enables therapeutic manoeuvres to be carried out in the abdominal cavity, ranging from the simple collection of a biopsy to complete operations on the organs that it contains.

[0003] In the abdomen, the introduction of the endoscope and the instruments is usually done by way of rigid or semi-rigid sheaths that pass through the abdominal wall. During the operation they facilitate the replacement of the instruments without the loss of the gas that is used to keep the cavity distended, thanks to a built-in valve system.

[0004] Similarly, in the particular case of laparoscopic surgery, i.e. that endoscopic technique used for actuation in the abdominal cavity, the use of surgical instruments is normally required for the dissection by the surgeon of anatomical spaces of loose conjunctive tissue, for which different types of tweezers and separators are also used.

[0005] The design of instruments of this type to perform a surgical operation by endoscopy is usually determined by a series of functional requirements that the instrument has to be able to fulfil, such as manipulation in the body cavity from the exterior, permitting internal actuation on organs or tissues. For this purpose, these instruments must be capable of performing a series of movements controlled by the surgeon from the exterior. The handling of the instruments in these conditions reduces the operator's manoeuvring capability since he is unable to guide the instrument grasped in his hand, making use of all the joints of his upper limb. The point of penetration of the cannula through which the instrument is inserted into the cavity restricts its movement in the same way as an oar in relation to the rowlock that secures it to the hull of the

boat.

[0006] Accordingly, there is a tendency to incorporate articulated instruments that facilitate surgical manoeuvre instead of or as a supplement to traditional rigid instruments. These articulated instruments have different technical features depending on the surgery in which they are used and some of them are described below.

[0007] In United States Patent No. US 4,178,920, held by the institution 'American Hospital Supply Corporation', a urological instrument is defined that comprises a swivel element for use in cystoscopies, controlled manually by the operator, and which has a single element susceptible to be articulated for facilitating the introduction of a catheter in the mouth of a ureter. This instrument has a very limited application, since it is no use for dissection in spaces of difficult access or for those cases in which an instrument is required that simulates the movement that would be made by the surgeon's finger in open surgery operations. In addition, the articulated element is controlled directly, with no means of cushioning, so that the precision in the control of its movement is not very high, with the result that it proves rather rudimentary.

[0008] On the other hand, United States Patent No. US 5,366,479, applied for by the institution 'United States Surgical Corporation', describes another type of instrument used in endoscopy, which consists of a surgical stapler which, as in the previous case, has an area for gripping it, in the form of a handle, while coupled to this area there is a hollow rod-like element which has an articulated element at its free end that has its rotation in relation to an axis permitted in both directions. This instrument is used in surgery for applying staples, which are housed in a space in the interior of said hollow rod.

[0009] Now, although this instrument permits the rotation of the articulated element in both directions on account of its technical features and its configuration, it presents the same problems as the above-mentioned instrument, as it only permits a rotation movement of the swivel element, i.e. it only comprises one articulation and its use is limited as its purpose is strictly that of setting lines of staples in place for the occlusion of a specific segment of the digestive tube.

DESCRIPTION OF THE INVENTION

[0010] The present invention refers to a surgical instrument for endoscopic surgery which permits the execution of movements that emulate those performed by a surgeon's finger in open surgery operations, by means of a double articulation, all this in an easy and precise way, controlled simply by the surgeon with just one hand, in order to obtain, for instance, the mechanical emulation of the movements of dissection of anatomical spaces of loose conjunctive tissue.

[0011] In view of its features, the surgical instrument proposed by the invention has a special application in operations performed on both the upper and lower abdomen, using the endoscopic route. In the case of oper-

ations on the upper abdomen it is applicable, for example, in cholecystectomy or in gastroesophageal fundoplication, in gastrectomy or in nephrectomy. In the case of operations on the lower hemiabdomen, the instrument is used to carry out the dissection of the preperitoneal space in the repair of an inguinal hernia, in iliac lymphadenectomy or in prostatectomy, for which the instrument is required to emulate the movements of a finger, so that it is best for these to be performed mechanically on account of the recurrence of the gestures.

[0012] In order to meet the above-mentioned functional requirements, the instrument that is the object of the invention comprises a handle, which has an appropriate configuration for it to be gripped and handled by the surgeon with just one hand. Attached to it there is a rigid tube, which is the invasive part of the instrument, at the distal end of which it has a first phalanx articulated in relation to the end of said rigid tube. Said first phalanx has, in turn, a second phalanx articulated at its distal end, the articulation movement of the second phalanx being linked to the articulation movement of the first phalanx by means of cables housed in cross ducts, emulating in this way the articulation movement of a human finger.

[0013] The instrument is held by the handle with a single hand, being controlled by means of placing preferably two fingers, such as for instance the index and middle finger, on a controller located in an area adjacent to the handle, in the form of a trigger, on which an axial movement may be made either by pulling or pressing said controller.

[0014] The interior of the handle holds at least a spring, or some other equivalent cushioning element that regulates and increases the precision of the movement of the controller, which actuates an operating fork, which in turn actuates a transmission rod, which undergoes linear forward movement, said transmission rod being connected to a link, which is in turn connected by its opposite end to the first phalanx.

[0015] In this way, when the surgeon actuates the controller, this operates the transmission rod by way of the fork, causing it to make a linear forward movement inside the rigid tube, while at the same time operating in turn the end of the transmission rod and the link, which is what produces a bending movement in the first phalanx, which swivels in relation to a first axis of rotation.

[0016] The movement of a second phalanx takes place as a result of the swivel movement of the first phalanx on account of the connection that exists between them, so the second phalanx cannot execute a movement separately from the first phalanx, i.e. without this being articulated. The instrument therefore comprises the disposition of cables linking the area of the distal end of the rigid tube, in which these are fixed by means of anterior anchoring holes, with the area of the proximal end of the second phalanx, in which they are fixed by means of end anchoring holes, said cables being crossed by means of cross ducts located in the interior of the first phalanx.

[0017] By means of the cross cable ducts the second

phalanx is successfully connected to the first phalanx, with the result that the movement of this produces a relative movement of the second phalanx in relation to the first phalanx, so that an articulation takes place in respect of a second axis of rotation, located at the distal end of the first phalanx, produced by the actuation of the cables situated on the opposite side to the direction of rotation, which, through being crossover, produces an actuation on the side of the direction of rotation of the second phalanx, acting inversely when the first phalanx recovers its non-articulated position, which constitutes a movement that emulates the articulation movement performed by the phalanxes of a human finger.

[0018] Furthermore, in order to endow the instrument with a superior precision and range of positions, which affords it a greater versatility, the whole rigid tube is provided with the possibility of turning from its position on its own axis in relation to the fixed portion or handle. This is achieved by means of a rotation crown which is situated in the area of the handle provided for the attachment of said rigid tube. The possibility is contemplated of having a mechanism in the interior of said rotation crown comprising at least a spring, or some other equivalent means of cushioning, which permits the rigid tube to be locked or unlocked in a given position after being turned, at the surgeon's discretion, so that said rigid tube, which can turn through 360°, is endowed with complete freedom of rotation while maintaining all the functions and capabilities of the instrument.

[0019] The possibility is also contemplated of having an initial positioning or neutral wheel in the area of actuation of the fork with the transmission rod. By turning it we can adjust its position in relation to the transmission rod, so that, given the position of the fork in respect of said initial positioning wheel, we achieve a given initial position in which the first phalanx and the second phalanx are articulated prior to the operation of the controller by the surgeon, when so required for a specific process.

[0020] In this way, the initial or neutral position of the first phalanx and of the second phalanx may be kept perfectly straight, without any articulation of same, or else an initial position of said phalanxes of the instrument with a given articulation; it is even possible to achieve the initial position, without acting on the controller, with a given articulation when the instrument is in the interior of the patient's body cavity, without the need to withdraw it, which proves extremely useful during the course of an operation.

[0021] In order to increase the versatility of the instrument, as a variant the possibility is considered of providing an internal axial hole both in the rigid tube and in the first and second phalanx, which are connected to a duct in order to enable the tasks of irrigation and suction of liquids to be performed during surgery. The option is also contemplated of incorporating an electric or ultrasound scalpel, of the types known in the state of the art, at the distal end of the second phalanx, so that it may be used in such processes as haemostasis.

[0022] In the instrument that is the object of the invention it is considered incorporating elements that will enable it to be operated remotely, i.e. that allow it to be used from a distance, in telesurgery operations. For this the action of the forces exerted by the surgeon is replaced by a robot, providing the distal end of the rigid tube with sensors, which may consist of the disposition of extensometric gauges according to the three axes of three-dimensional space. Thus, they convert the forces that act on the instrument into electrical signals, providing information on the forces acting on the instrument, or else on the forces that the instrument is exerting on the patient, similar to the perception that the surgeon's hand would have if the instrument were being handled by him. This enables the magnitude of the forces and the direction of the movements made by the instrument to be regulated at all times.

[0023] Therefore, in accordance with the invention described, the surgical instrument for endoscopic surgery proposed by the invention represents an advance in the instruments for endoscopic surgery used heretofore and it resolves the problems explained above in a fully satisfactory way, in that it is a versatile instrument that is provided with a double articulation in order to permit access and its simple precise actuation from the exterior in those areas of the body cavity which are of difficult access in endoscopy, simulating the articulation of a human finger and facilitating a wide variety of movements of the invasive part of the instrument without the need to withdraw it from the patient's body cavity during the course of the operation.

DESCRIPTION OF THE DRAWINGS

[0024] In order to supplement the description being given and to assist a clearer understanding of the features of the invention, in accordance with a preferred specimen practical embodiment of the same, we adjoin as an integral part of said description, a set of drawings wherein there is represented, for informative and non-restrictive purposes, the following:

Figure 1.- It shows a perspective view of the surgical instrument for endoscopic surgery that is the object of the invention.

Figure 2.- It shows a perspective view, in which the outer surfaces are represented as transparent in order to show the interior elements, in which we may observe a close view corresponding to the end area of the rigid tube as well as the first phalanx and the second phalanx of the instrument.

PREFERRED EMBODIMENT OF THE INVENTION

[0025] In the light of the afore-mentioned figures, it may be observed how in one of the possible embodiments of the invention, the surgical instrument for endoscopic sur-

gery comprises a rigid tube (3), the distal end of which has a first phalanx (4) articulated in relation to a first axis of rotation (6), which, in turn, at its distal end, has a second phalanx (5) articulated in respect of a second axis of rotation (7).

[0026] The interior of the rigid tube (3) houses a transmission rod (11), which is connected at its distal end to a link (10), which in turn is also connected, by its opposite end, to the first phalanx (4), the actuation of this transmission rod (11) being what produces the articulation of the phalanxes (4) and (5) of the instrument.

[0027] The movement of the second phalanx (5) is linked to that of the first phalanx (4) by means of cables housed in cross ducts (12) situated in the interior of the first phalanx (4), which are fixed at the distal end of the rigid tube (3) by means of anterior anchoring holes (8), and at the proximal end of the second phalanx (5) by means of end anchoring holes (9).

[0028] The rigid tube (3) is attachable to a handle (1), which has a suitable configuration for the holding, gripping and handling of the instrument by the surgeon with only one hand. It has a controller (2), which, when operated, usually with the fingers, actuates a fork (14), which in turn actuates the transmission rod (11) for its operation.

[0029] The possibility is contemplated of having in the interior of the handle (1) at least a spring - not represented - or some other equivalent cushioning element, which regulates and increases the precision of the movement of the controller (2).

[0030] Furthermore, in order to endow the instrument with a superior precision and range of positions, the possibility is contemplated of permitting the turning of the rigid tube (3) on its own axis in relation to the handle (1) by means of a rotation crown (13), which is situated in the area of attachment between the handle (1) and the rigid tube (3).

[0031] The option is also considered of having in the interior of said rotation crown (13) a mechanism - not represented - comprising at least a spring, or some other equivalent means of cushioning, for locking the position of the rigid tube (3).

[0032] The possibility is also contemplated of having an initial positioning wheel (15) in the area of actuation of the fork (14) with the transmission rod (11), which permits the positional adjustment of the fork (14) in relation to the transmission rod (11), so that it permits the regulation of the initial position of articulation of the first phalanx (4) and of the second phalanx (5), prior to the operation of the controller (2) by the surgeon.

[0033] As a variant, the possibility is also considered of providing an internal axial hole both in the rigid tube (3) and in the first phalanx (4) and in the second phalanx (5), which permit their connection to a duct - not represented - in order to enable the tasks of irrigation and suction of liquids to be performed during surgery.

[0034] The option is also contemplated of incorporating the terminal of an electric or ultrasound scalpel, of the types known in the state of the art, at the distal end

of the second phalanx (5), so that it may facilitate electrocoagulation haemostasis with the same instrument.

[0035] In the instrument, consideration is also given to incorporating elements that will enable it to be operated remotely in telesurgery operations, permitting the forces exerted by the surgeon for the actuation of the instrument to be applied by a robot, providing the distal end of the rigid tube (3) with sensors, which may consist of extensometric gauges according to the three axes of three-dimensional space, which convert the forces that act on the instrument into electrical signals, providing information on the forces that the instrument is exerting on the patient, thus enabling the magnitude of the forces and the direction of the movements made by the instrument to be regulated at all times.

[0036] The possibility is also considered of its being disposable and being made with the intention of its being used in one operation only. In this case the instrument would be sealed, not permitting its disassembly and therefore not permitting its correct resterilization for re-use.

[0037] In the light of this description and set of figures, an expert on the matter would be able to appreciate that the embodiments of the invention which have been described may be combined in numerous ways within the object of the invention. The invention has been described according to some preferred embodiments of same, but for an expert on the matter it will be evident that multiple variations may be introduced in said preferred embodiments without exceeding the object of the invention claimed.

Claims

1. Surgical instrument for endoscopic surgery **characterised in that** it comprises a rigid tube (3), whose distal end has a first phalanx (4) articulated, which in turn, at its distal end, has a second phalanx (5) articulated, which is linked to the rigid tube (3) by means of cables housed in cross ducts (12), situated in the interior of the first phalanx (4), linking the movement of the second phalanx (5) to that of the first phalanx (4).
2. Surgical instrument for endoscopic surgery according to claim 1, **characterised in that** the ends of the cables housed in the ducts (12) are fixed at the distal end of the rigid tube (3) by means of anterior anchoring holes (8), and at the proximal end of the second phalanx (5) by means of end anchoring holes (9).
3. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the interior of the rigid tube (3) houses a transmission rod (11) which is connected at its distal end to a link (10), which is in turn connected, by its opposite end, to the first phalanx (4), whose articulation is pro-

duced by the actuation of the transmission rod (11).

4. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the rigid tube (3) is attachable to a handle (1), which has an appropriate configuration for the holding, gripping and handling of the instrument with just one hand by the surgeon.
5. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the handle (1) has a controller (2), for actuating the instrument articulation movement by the surgeon, which operates a fork (14), which in turn acts on the transmission rod (11).
6. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the interior of the handle (1) is provided with at least a spring, or some other equivalent cushioning element, for regulating and increasing the precision of the movement of the controller (2).
7. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the rigid tube (3) is enabled to rotate around its own axis in respect of the handle (1) by means of a rotation crown (13), which is situated in the coupling area between the handle (1) and the rigid tube (3).
8. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the rotation crown (13) houses a mechanism comprising at least a spring, or some other equivalent means of cushioning, for locking the position of the rigid tube (3).
9. Surgical instrument for endoscopic surgery according to the previous claims, **characterised in that** the area of actuation of the fork (14) with the transmission rod (11) is provided with an initial positioning wheel (15), which permits the positional adjustment of the fork (14) in relation to the transmission rod (11), for regulating the initial position of articulation of the first phalanx (4) and of the second phalanx (5), prior to the operation of the controller (2) by the surgeon.
10. Surgical instrument for endoscopic surgery according to any of the previous claims, **characterised in that** the interior of the rigid tube (3), of the first phalanx (4) and of the second phalanx (5) has an internal axial hole, which is connected to a duct for the tasks of irrigation and suction of liquids during surgery.
11. Surgical instrument for endoscopic surgery according to any of the previous claims, **characterised in that** the distal end of the second phalanx (5) is con-

figured to incorporate a terminal of an electric or ultrasound scalpel.

12. Surgical instrument for endoscopic surgery according to any of the previous claims, **characterised in that** it is disposable. 5
13. Surgical instrument for endoscopic surgery according to any of the previous claims, **characterised in that** the distal end of the rigid tube (3) incorporates sensors, which may consist of extensiometric gauges according to the three axes of three-dimensional space, which convert the forces that act on the instrument into electrical signals, providing information on the forces that the instrument exerts on the patient. 10 15
14. Surgical instrument for endoscopic surgery according to claim 13, **characterised in that** the actuation on the instrument is carried out by means of a robot so that the instrument may be actuated remotely in telesurgery operations. 20

25

30

35

40

45

50

55

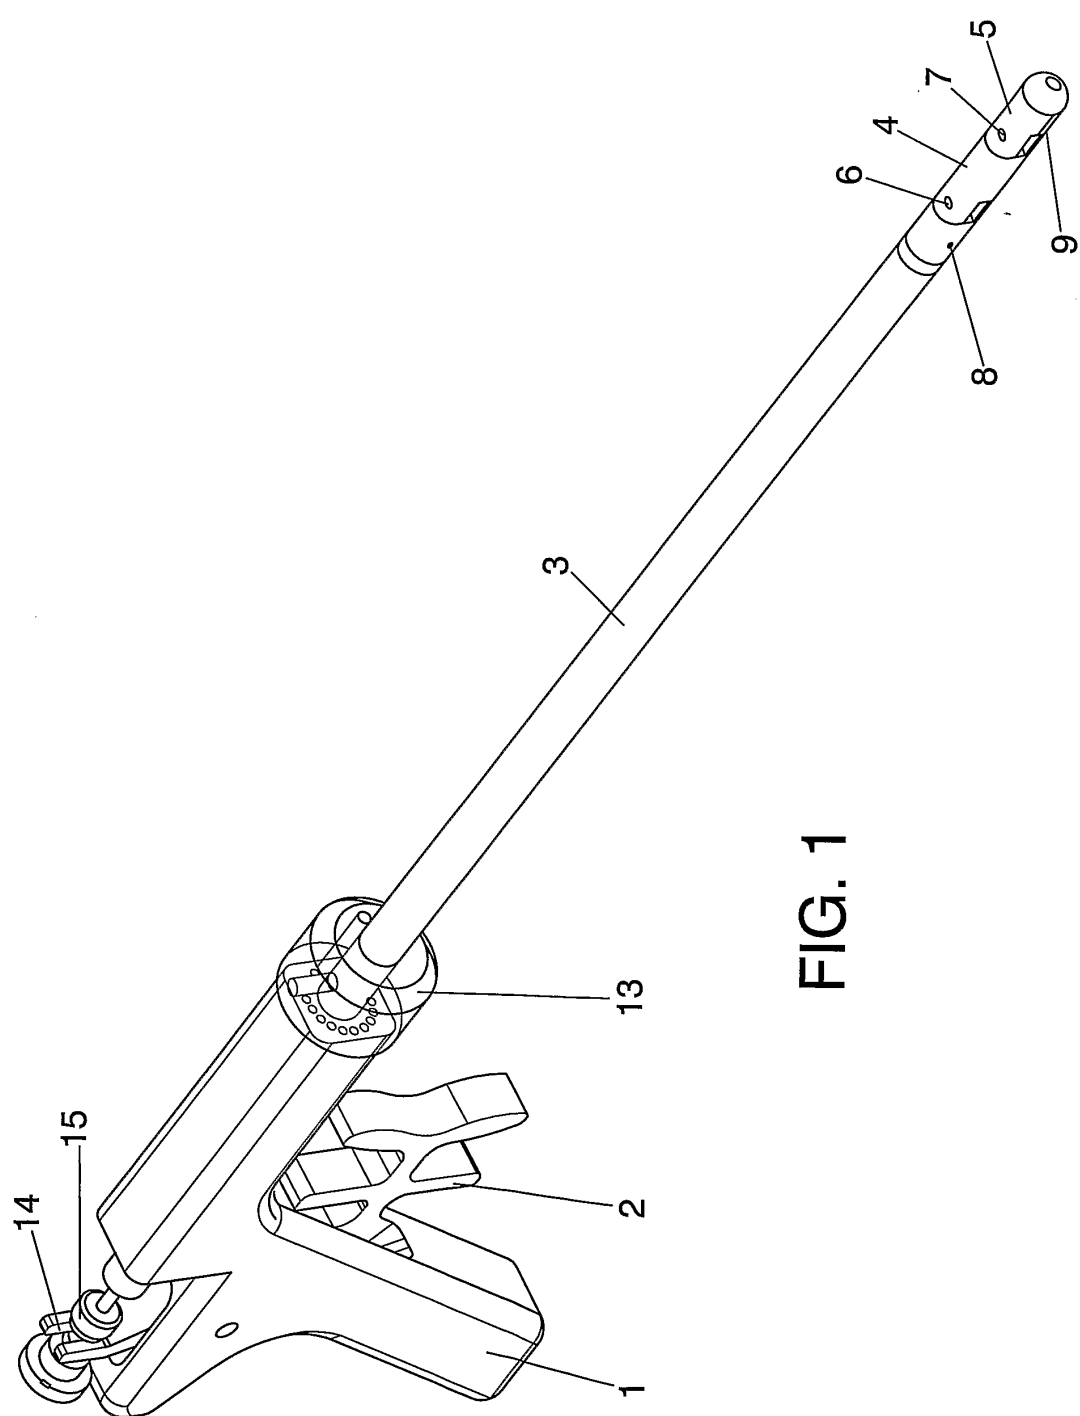


FIG. 1

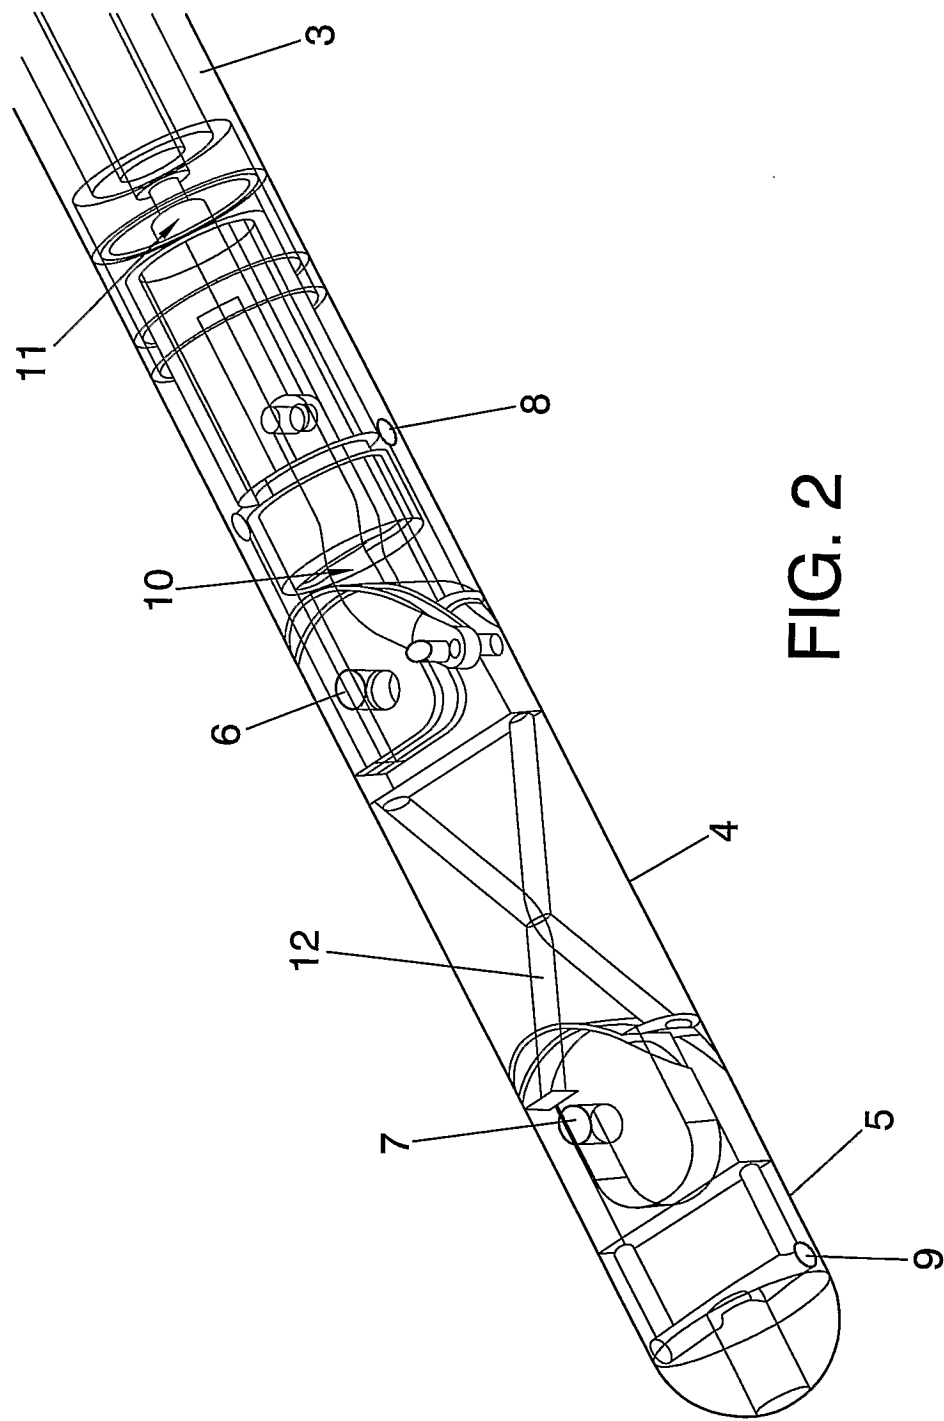


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/ ES 2006/000284

A. CLASSIFICATION OF SUBJECT MATTER

see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B1, A61B17

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CIBEPAT,EPODOC,PAJ,WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0128431 A1 (CORONEO INC ; VALENTINI VALERIO ; PAOLITTO ANTHONY ;) 26.04.2001, abstract and figures.	1-9,12
A	WO 2004112845 A2 (ETHICON ENDO SURGERY INC ; STOKES MICHAEL J) 29.12.2004, the whole document.	1-9,14
A	EP 0592243 A2 (ETHICON INC) 13.04.1994, the whole document.	1-9
A	US 6270508 B1 (KLIEMAN et al.) 07.08.2001, abstract and figures.	1-9,14
A	ES 2114962 T3 (UNITED STATES SURGICAL CORP) 16.06.1998, the whole document.	1-10
A	WO 9421179 A2 (HOURLAY PIERRE ; CEUPPENS JOHAN) 29.09.1994, the whole document.	1-9
A	EP 0600182 A2 (UNITED STATES SURGICAL CORP) 08.06.1994, abstract and figures.	1-9
A	US 5209747 A (KNOEPFLER et al.) 11.05.1993, the whole document.	1-10

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance.		
"E" earlier document but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"O" document referring to an oral disclosure use, exhibition, or other means	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other documents, such combination being obvious to a person skilled in the art
"P" document published prior to the international filing date but later than the priority date claimed		
	"&"	document member of the same patent family

Date of the actual completion of the international search

04.October.2006 (04.10.2006)

Date of mailing of the international search report

(23-10-2006)

Name and mailing address of the ISA/
O.E.P.M.

Paseo de la Castellana, 75 28071 Madrid, España.
Facsimile No. 34 91 3495304

Authorized officer

M. Castilla Baylos

Telephone No. + 34 91 3495491

Form PCT/ISA/210 (second sheet) (April 2005)

EP 1 994 893 A1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/ ES 2006/000284

Patent document cited in the search report	Publication date	Patent family member(s)	Publication date
WO 0128431 A	26.04.2001	CA 2286929 A CA 2387908 A EP 1250097 A EP 20000969142 US 6837851 B US 2005096508 A	18.04.2001 26.04.2001 23.10.2002 18.10.2000 04.01.2005 05.05.2005 05.05.2005
WO 2004112845 A	29.12.2004	US 2005043582 A	24.02.2005 24.02.2005 24.02.2005
EP 0592243 A	13.04.1994	CA 2107931 A BR 9304189 A AU 4890093 A JP 6197906 A US 5330502 A US 5374277 A AU 667239 B AT 151973 T DE 69310072 D ES 2100470 T DE 69310072 T	10.04.1994 12.04.1994 21.04.1994 19.07.1994 19.07.1994 20.12.1994 14.03.1996 15.05.1997 28.05.1997 16.06.1997 06.11.1997 06.11.1997
US6270508B B	07.08.2001	NONE	-----
ES 2114962 T	16.06.1998	CA 2088884 A EP 0557806 A EP 19930102141 US 5383888 A US 5391180 A US 5431662 A US 5490819 A US 5514157 A US 5571115 A US 5607450 A DE 69318324 D US 5766205 A US 5782859 A DE 69318324 T US 2002177874 A US 7087071 B	13.08.1993 01.09.1993 11.02.1993 24.01.1995 21.02.1995 11.07.1995 13.02.1996 07.05.1996 05.11.1996 04.03.1997 10.06.1998 16.06.1998 21.07.1998 05.11.1998 28.11.2002 08.08.2006
WO 9421179 A	29.09.1994	BE 1006889 A	17.01.1995 17.01.1995 17.01.1995
EP 0600182 A	08.06.1994	CA 2107251 A EP 19930115889	03.04.1994 01.10.1993

Form PCT/ISA/210 (patent family annex) (April 2005)

EP 1 994 893 A1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/ ES 2006/000284

Patent document cited in the search report	Publication date	Patent family member(s)	Publication date
WO 0128431 A	26.04.2001	CA 2286929 A CA 2387908 A EP 1250097 A EP 20000969142 US 6837851 B US 2005096508 A	18.04.2001 26.04.2001 23.10.2002 18.10.2000 04.01.2005 05.05.2005 05.05.2005
WO 2004112845 A	29.12.2004	US 2005043582 A	24.02.2005 24.02.2005 24.02.2005
EP 0592243 A	13.04.1994	CA 2107931 A BR 9304189 A AU 4890093 A JP 6197906 A US 5330502 A US 5374277 A AU 667239 B AT 151973 T DE 69310072 D ES 2100470 T DE 69310072 T	10.04.1994 12.04.1994 21.04.1994 19.07.1994 19.07.1994 20.12.1994 14.03.1996 15.05.1997 28.05.1997 16.06.1997 06.11.1997 06.11.1997
US6270508B B	07.08.2001	NONE	-----
ES 2114962 T	16.06.1998	CA 2088884 A EP 0557806 A EP 19930102141 US 5383888 A US 5391180 A US 5431662 A US 5490819 A US 5514157 A US 5571115 A US 5607450 A DE 69318324 D US 5766205 A US 5782859 A DE 69318324 T US 2002177874 A US 7087071 B	13.08.1993 01.09.1993 11.02.1993 24.01.1995 21.02.1995 11.07.1995 13.02.1996 07.05.1996 05.11.1996 04.03.1997 10.06.1998 16.06.1998 21.07.1998 05.11.1998 28.11.2002 08.08.2006
WO 9421179 A	29.09.1994	BE 1006889 A	17.01.1995 17.01.1995 17.01.1995
EP 0600182 A	08.06.1994	CA 2107251 A EP 19930115889	03.04.1994 01.10.1993

Form PCT/ISA/210 (patent family annex) (April 2005)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/ ES 2006/000284

CLASSIFICATION OF SUBJECT MATTER

A61B 17/28 (2006.01)

A61B 17/00 (2006.01)

A61B 17/32 (2006.01)

A61B 1/313 (2006.01)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4178920 A [0007]
- US 5366479 A [0008]

专利名称(译)	内窥镜手术的手术器械		
公开(公告)号	EP1994893A4	公开(公告)日	2012-01-04
申请号	EP2006755368	申请日	2006-05-24
申请(专利权)人(译)	CORPORACIO SANITARIA PARC·托利		
当前申请(专利权)人(译)	CORPORACIO SANITARIA PARC·托利		
[标]发明人	LAPORTE ROSELLO ENRIC PENA GONZALEZ ANTONIO CARRERA FABRA JORDI TOMAS JUSTRIBO ALBERT		
发明人	LAPORTE ROSELLÓ, ENRIC PEÑA GONZALEZ, ANTONIO CARRERA FABRA, JORDI TOMÁS JUSTRIBÓ, ALBERT		
IPC分类号	A61B17/28 A61B17/00 A61B17/32 A61B1/313 A61B17/02 A61B17/29		
CPC分类号	A61B17/29 A61B17/0218 A61B34/70 A61B2017/003 A61B2017/292 A61B2017/2925 A61B2017/2927 A61B2017/2929 A61B2017/320044 A61B2017/32007		
优先权	2006000522 2006-03-03 ES		
其他公开文献	EP1994893B1 EP1994893A1		
外部链接	Espacenet		

摘要(译)

用于内窥镜手术的手术器械，其允许模拟外科医生手指的关节运动，包括刚性管（3），其远端具有铰接的第一指节（4），其又铰接到第二指节（5），通过容纳在第一趾骨（4）内部的交叉管道（12）中的电缆连接刚性管（3），将第二趾骨（5）的运动与第一趾骨的运动联系起来（如图4）所示，其铰接由于传动杆（11）的致动而发生，刚性管（3）可附接到手柄（1），手柄（1）包括控制器（2），用于通过其驱动器械关节运动。外科医生操作叉子（14），叉子又驱动传动杆（11）。