


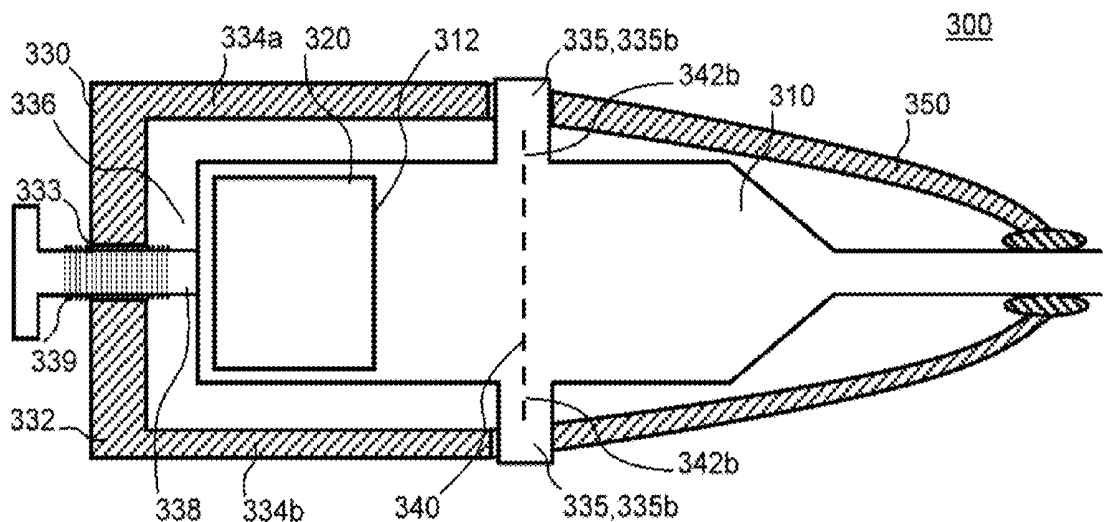

US 20140081299A1

(19) **United States**(12) **Patent Application Publication**
Dietz et al.(10) **Pub. No.: US 2014/0081299 A1**
(43) **Pub. Date: Mar. 20, 2014**(54) **MICROMACHINED ULTRASONIC SCALPEL
WITH EMBEDDED PIEZOELECTRIC
ACTUATOR**(52) **U.S. CL.**
CPC *A61B 17/320068* (2013.01); *H01L 21/62*
(2013.01)
USPC **606/169; 438/22**(71) Applicants: **Timothy G. Dietz**, Terrace Park, OH
(US); **Yanik Tardy**,
Geneveys-sur-Coffrane (CH); **Juergen
Burger**, Ipsach (CH); **Philippe
Margairaz**, La Chaux-de-Fonds (CH);
Toralf Bork, Enges (DE)(57) **ABSTRACT**(72) Inventors: **Timothy G. Dietz**, Terrace Park, OH
(US); **Yanik Tardy**,
Geneveys-sur-Coffrane (CH); **Juergen
Burger**, Ipsach (CH); **Philippe
Margairaz**, La Chaux-de-Fonds (CH);
Toralf Bork, Enges (DE)

An ultrasonic core including a longitudinally elongated, generally planar waveguide defining an aperture extending from a first side of the waveguide toward a medial plane of the waveguide, and having a transducer element sized and shaped so as to substantially conform to the size and shape of the aperture and to be at least partially embedded within the waveguide. In other aspects, an ultrasonic core including a longitudinally elongated, generally planar silicon waveguide having at least one transducer element secured thereto and a wedge-shaped acoustic horn including an inclined side surface, characterized in that the inclined side surface is oriented along the {1,1,1} crystallographic plane of the silicon material. Also, methods of manufacturing the respective ultrasonic cores and ultrasonic handpieces for an ultrasonic surgical instruments incorporating such cores.

(21) Appl. No.: **13/622,921**(22) Filed: **Sep. 19, 2012****Publication Classification**(51) **Int. Cl.**
A61B 17/32 (2006.01)
H01L 21/62 (2006.01)

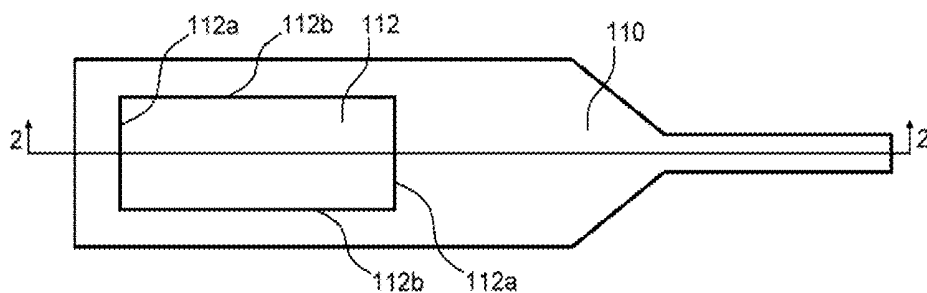


Fig. 1

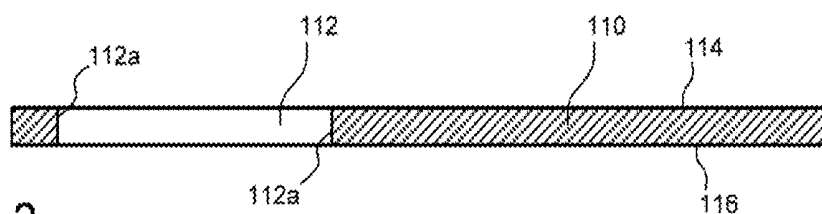


Fig. 2

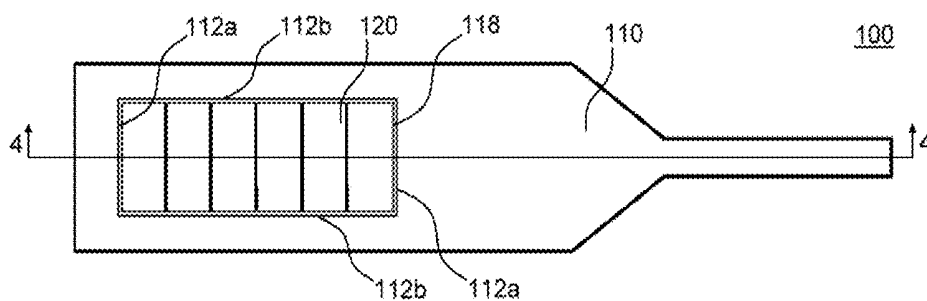


Fig. 3

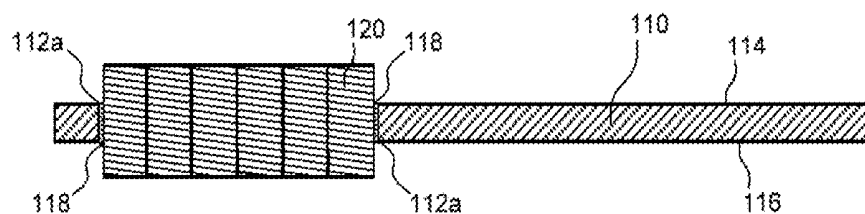


Fig. 4

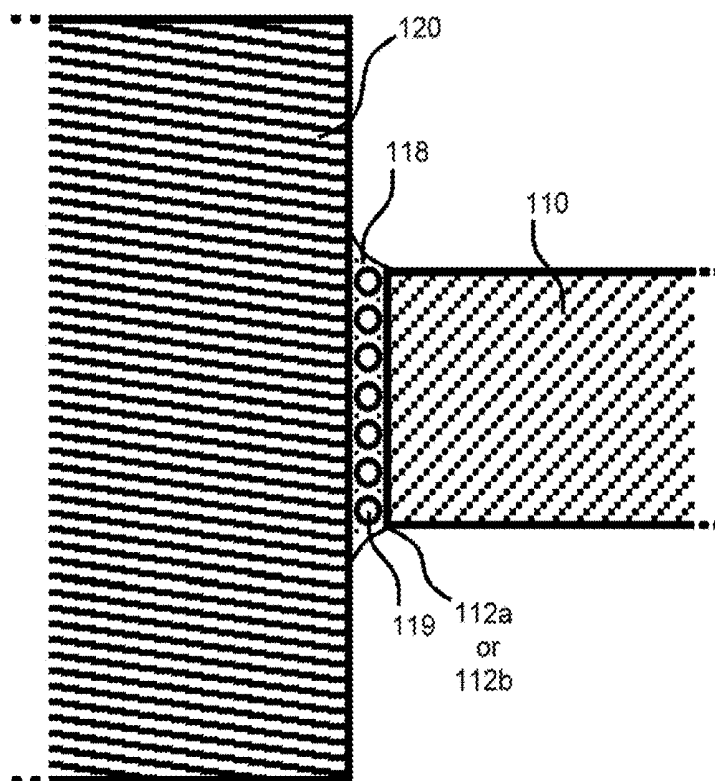


Fig. 5

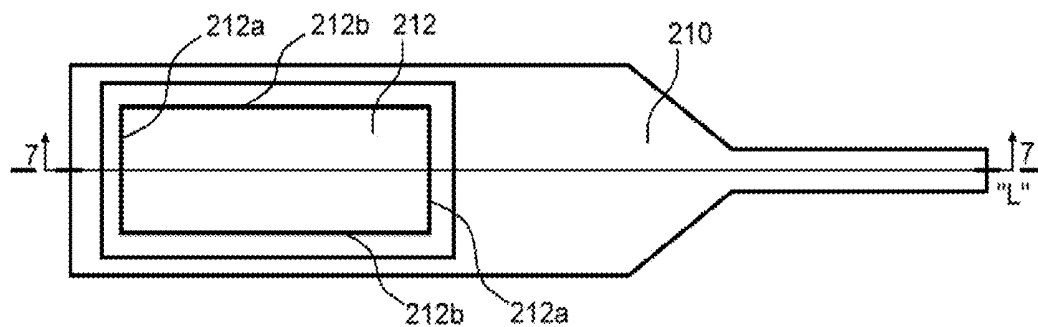


Fig. 6

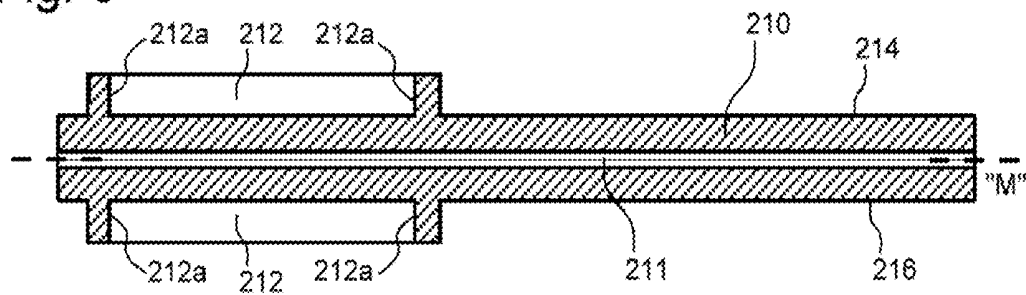


Fig. 7

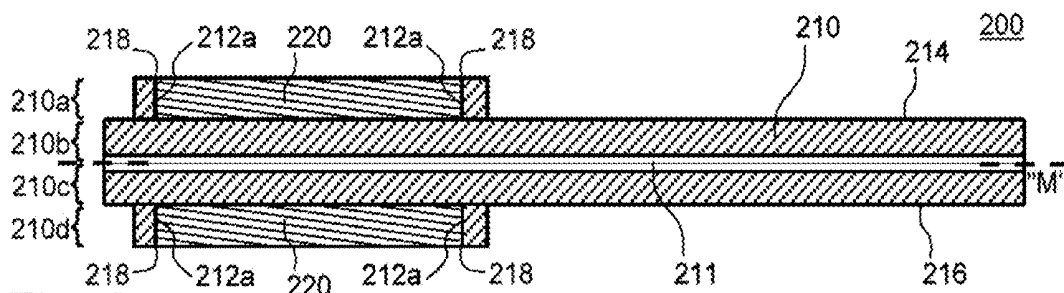


Fig. 8


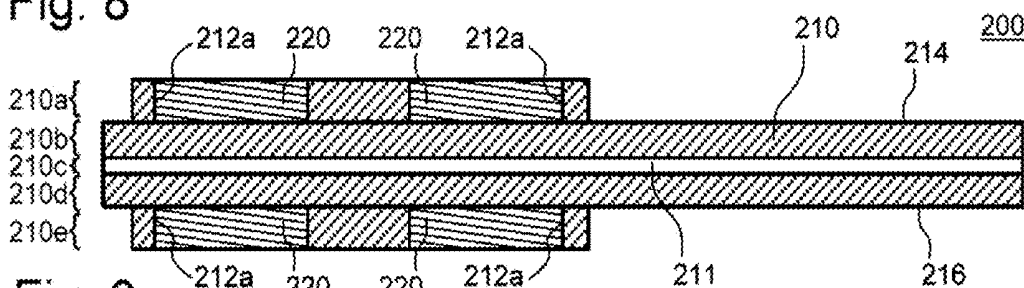


Fig. 9

10

Obtain a waveguide 110 defining an aperture 112 having a first length 113, and a transducer element 120 having a second length 121 greater than the first length but capable of being reversibly shrunk to a third length 122 less than the first length

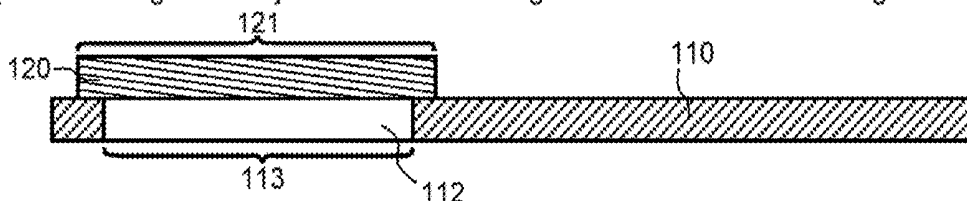


20

Apply a drive current to the transducer element 120 and insert the element 120 within the aperture 112

30 (optional)

Dispose a glue layer 118 between the transducer element 120 and opposite walls of the aperture 112

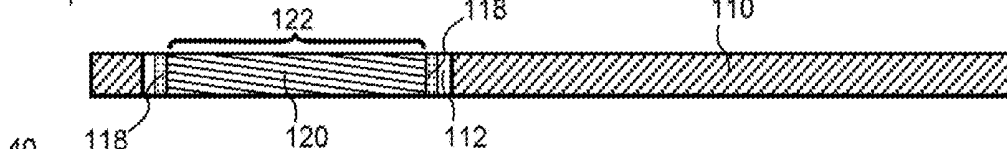

40

Remove the drive current from the transducer element 120 so that the transducer element 120 expands within the aperture 112

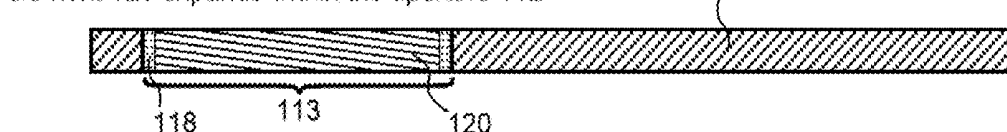


Fig. 10

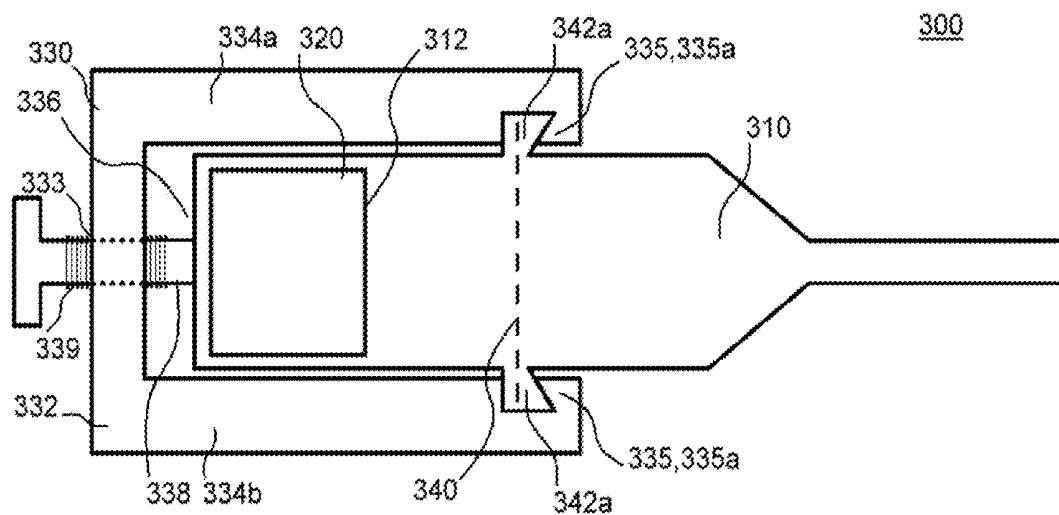


Fig. 11

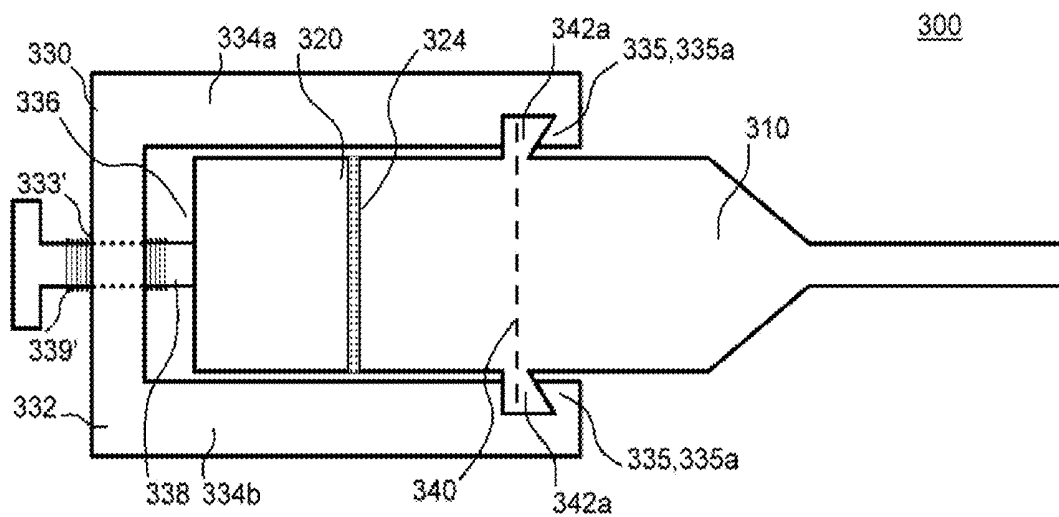


Fig. 12

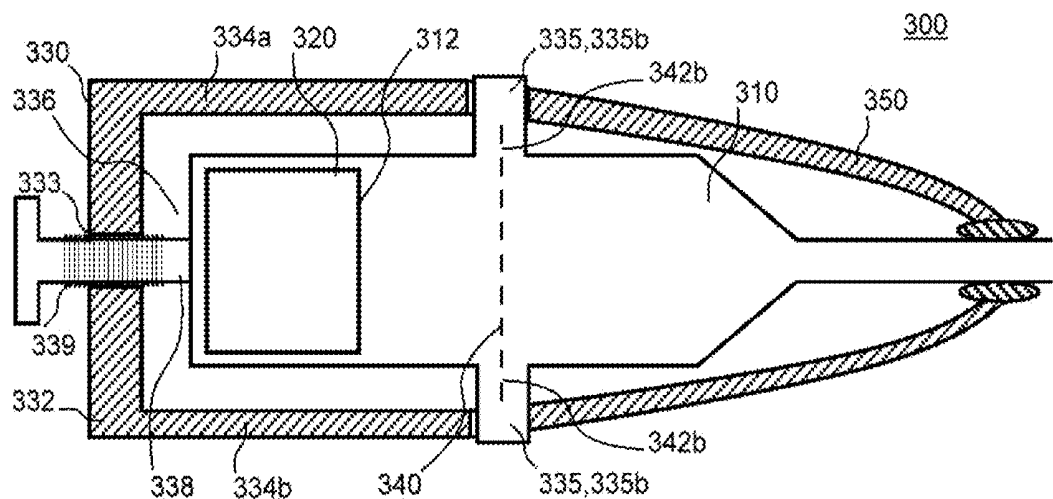


Fig. 13

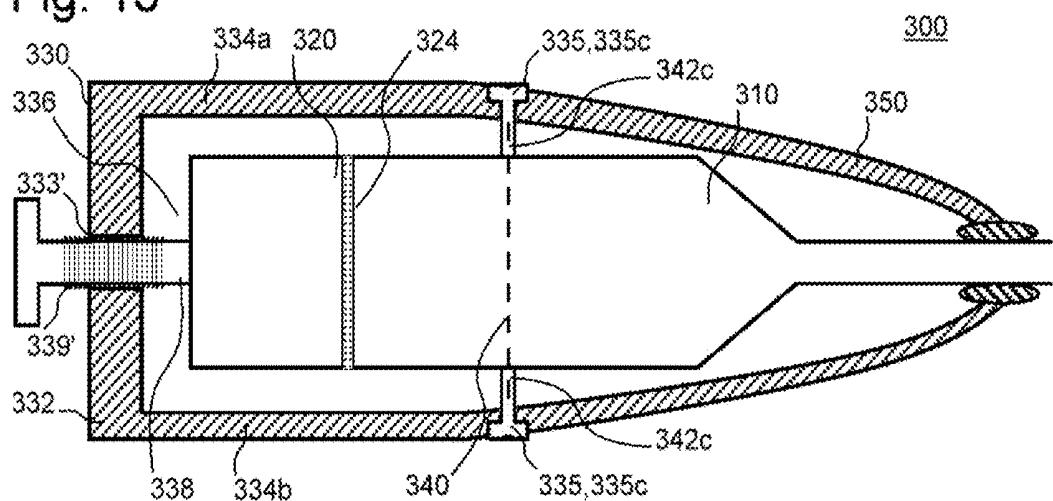


Fig. 14

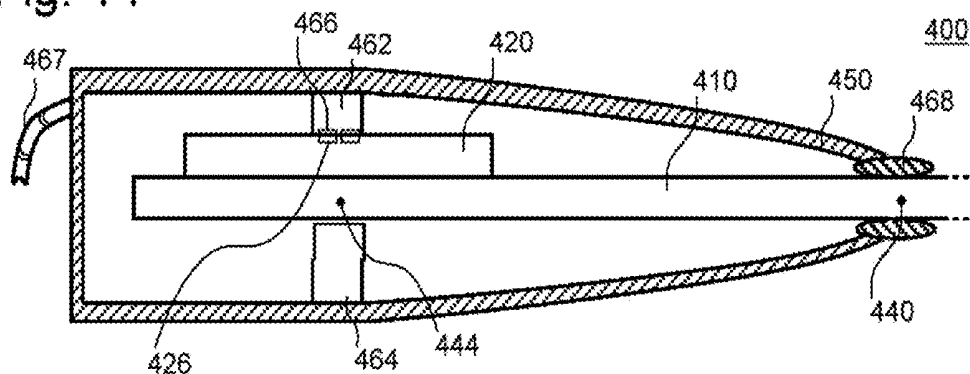


Fig. 15

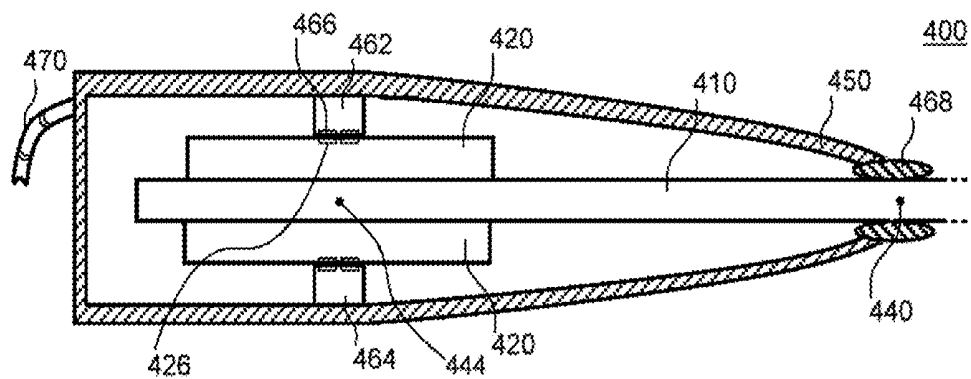


Fig. 16

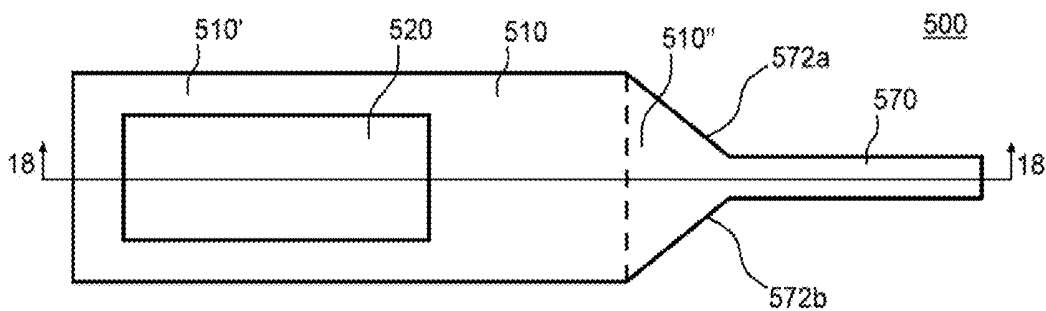


Fig. 17


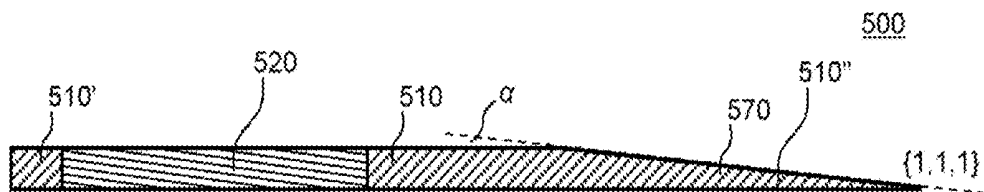


Fig. 18


1010

Obtain a silicon wafer cut so as to have the $\{1,1,1\}$ crystallographic plane disposed at a non-zero acute angle with respect to a face of the wafer.

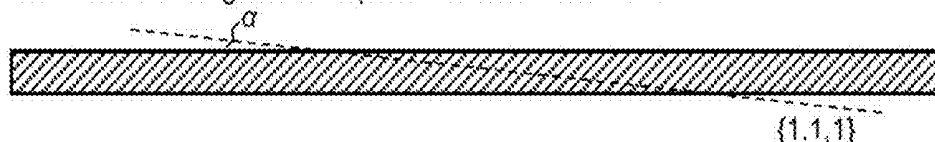

1020

Grow a thermal oxide coating 1022 upon the silicon wafer.

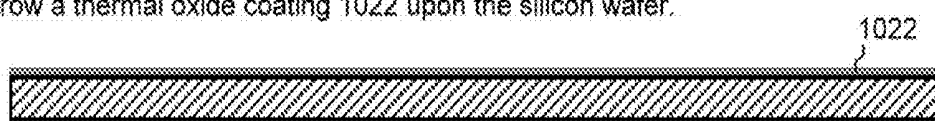


1030

Apply a photoresist coating 1032 to one face of the silicon wafer.



1040

Expose the applied photoresist coating 1032 to a light shown through a photomask bearing a first pattern representative of the inclined side surface of the waveguide.

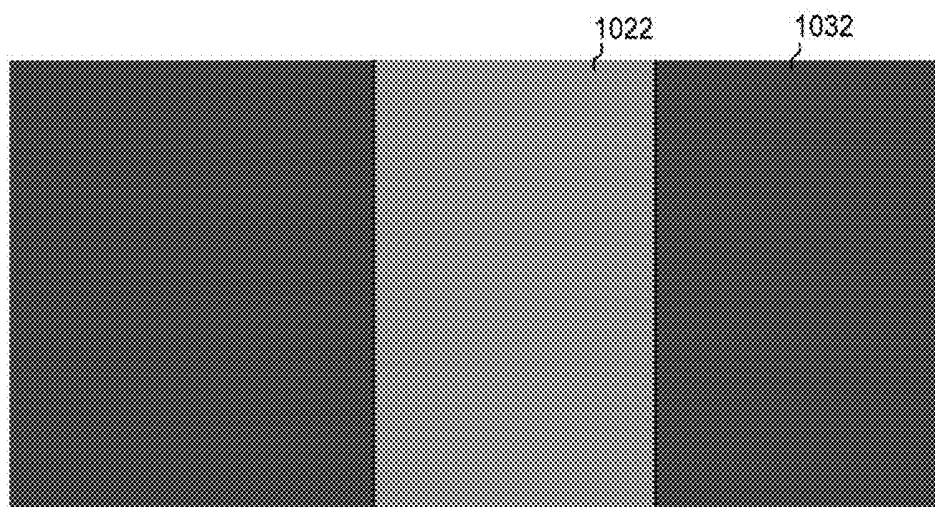

(Partial plan view)

Fig. 19A

1050

Perform an oxide etch to the thermal oxide coating 1022 exposed by the light-induced destruction of the photoresist coating 1032.



1060

Perform a hydroxide etch to the silicon exposed by the oxide etch of the thermal oxide coating 1022 until the exposed silicon is removed to a predetermined maximum depth.



1065 (optional endpoint)

Dice the silicon wafer to yield a waveguide 510 having a wedge-shaped acoustic horn portion 510'' including an inclined side surface 570.


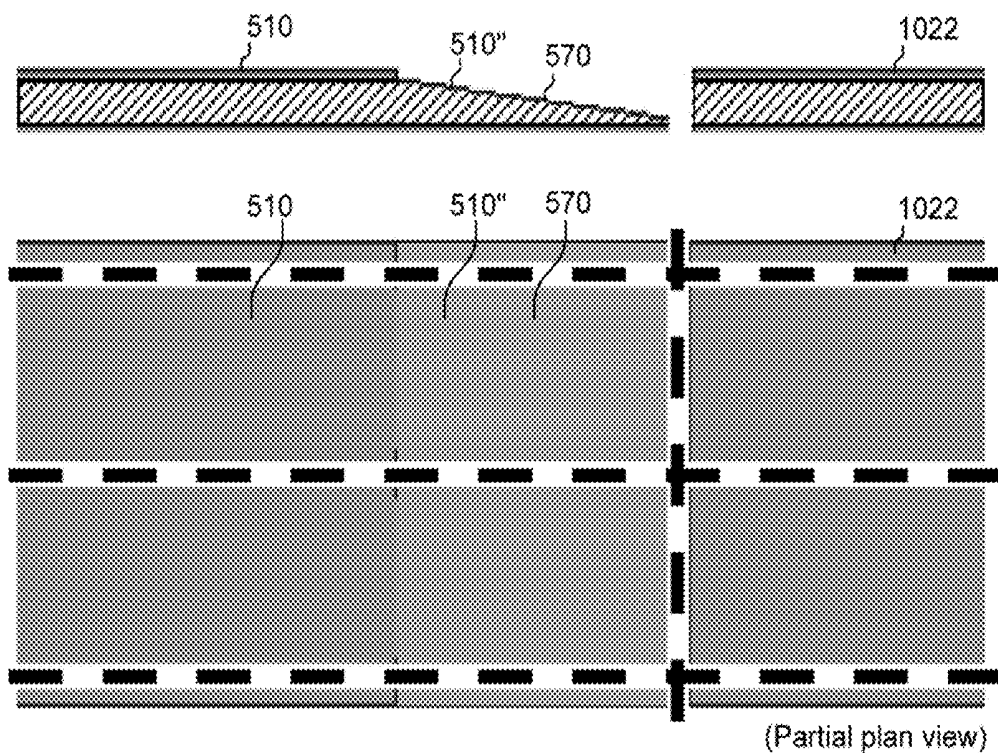


Fig. 19B


1070

Remove and then regrow the thermal oxide coating 1022 upon the silicon wafer.

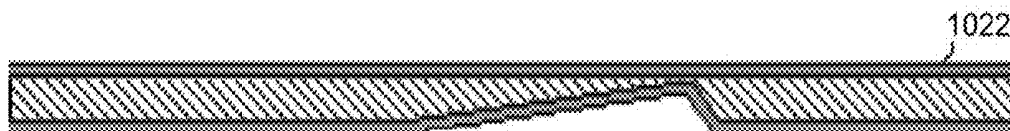



1080

Apply a photoresist coating 1082 to the opposite face of the silicon wafer.

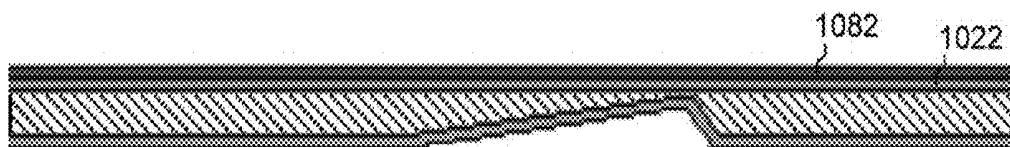

1090

Expose the applied photoresist coating 1082 to a light shown through a photomask bearing a second pattern representative of the edges 572a and 572b and distal end 574 of the inclined side surface 570 of the waveguide 510.

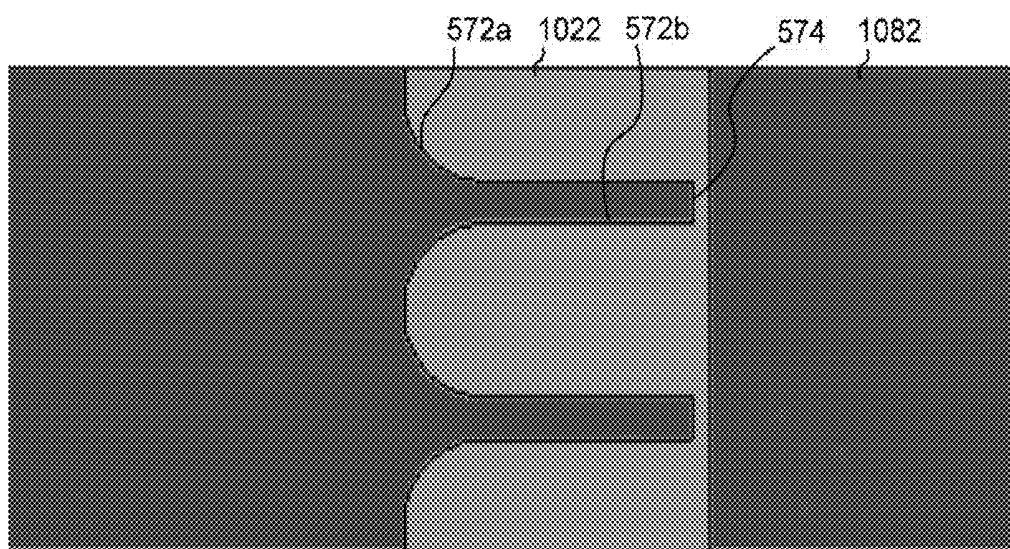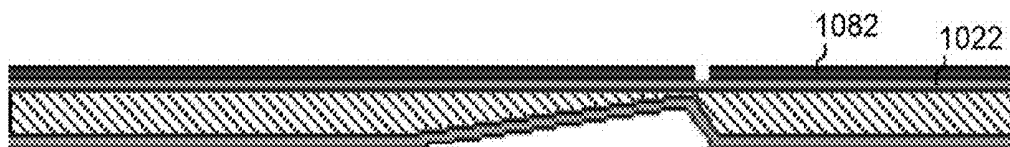


(Partial plan view)

Fig. 19C


1100

Perform an oxide etch to the thermal oxide coating 1022 exposed by the light-induced destruction of the photoresist coating.

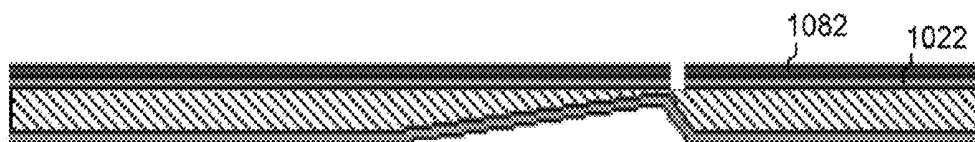


1110

Perform a DRIE etch to etch the edges 572a and 572b and distal end 574 of the inclined side surface through the silicon wafer.

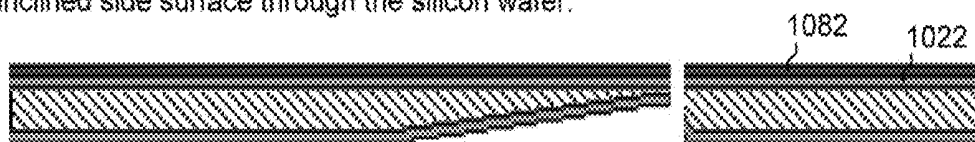


1120 (optional)

Remove and then regrow the thermal oxide coating 1022 upon the silicon wafer.

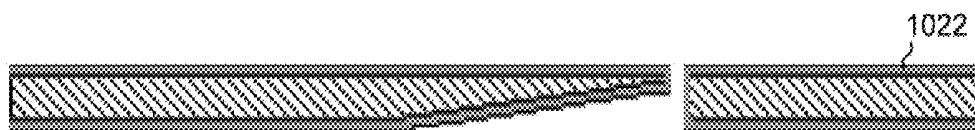

1130

Dice the silicon wafer to yield a waveguide 510 having an acoustic horn portion 510'' and surgical scalpel portion both including an inclined side surface 570.

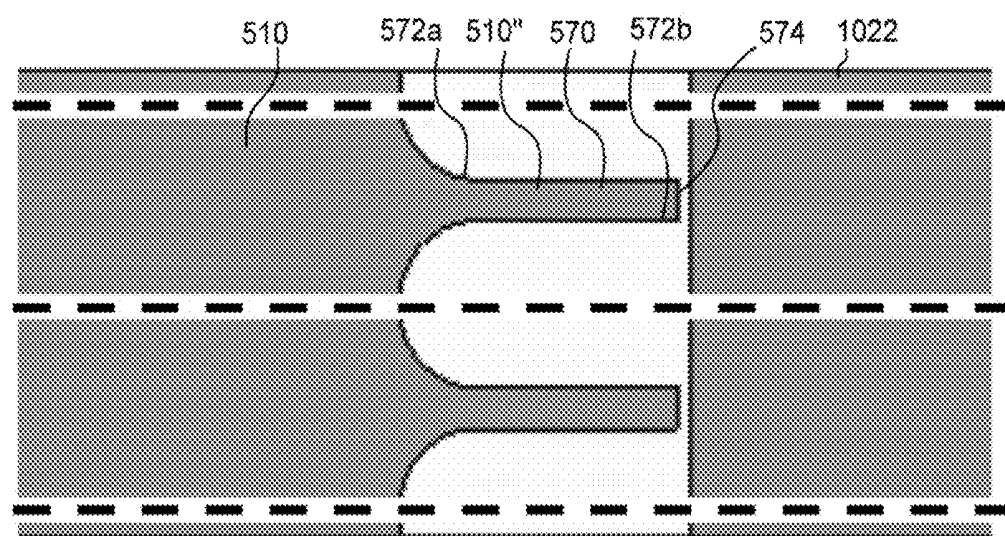

(Partial plan view)

Fig. 19D

MICROMACHINED ULTRASONIC SCALPEL WITH EMBEDDED PIEZOELECTRIC ACTUATOR

FIELD

[0001] The various embodiments relate to ultrasonic surgical instruments and, more particularly, to transducer and waveguide assemblies for ultrasonic surgical scalpels and similar instruments having ultrasonically powered end effectors.

BACKGROUND

[0002] Ultrasonic surgical scalpels and similar instruments for the dissection and/or coagulation of patient tissue typically comprise an ultrasonic transducer assembly, a waveguide assembly, and a surgical end effector. The ultrasonic transducer assembly generally comprises a piezoelectric transducer element compressed between a pair of end masses, with the fore-end mass being configured as an acoustic horn to create acoustic gain between the piezoelectric transducer element and the waveguide assembly. In one known example, the end masses are disposed at the opposite ends of a shaft, and the piezoelectric transducer element comprises a plurality of annular piezoelectric transducer disks disposed along the shaft, with the plurality of disks being compressed, for example, by tightening a threaded connection between the shaft and at least one of the end masses. The piezoelectric transducer element is subsequently powered to establish at least one standing wave or mode of vibration (which may include, without limitation, a longitudinal mode of vibration, a lateral mode of vibration, a torsional mode of vibration, and combinations thereof) which propagates through the shaft and acoustic horn, through the waveguide assembly, and into the ultrasonically powered end effector for application to patient tissue. Exemplary end effectors powered by such devices include ultrasonically vibrated surgical scalpels for the dissection of patient tissue and ultrasonically vibrated clamp devices for the apposition and cauterization of patient tissue.

[0003] The applicant-assignee has recently disclosed various ultrasonic surgical instruments which include transducer elements affixed to longitudinally elongated, generally planar waveguides. See U.S. patent application Ser. Nos. 12/857,373 and 12/857,399, both filed Aug. 16, 2010, the entirety of which are incorporated herein by reference. Such instruments may be constructed upon, for example, a silicon wafer, with transduction and resonator portions taking the place of the shaft and end masses of the aforescribed ultrasonic transducer assembly. However, the transducer elements in such devices cannot be secured between and compressed by adjustable end masses like the ones in the aforescribed ultrasonic transducer assembly. Consequently, the applicant and its associates have continued to seek and to develop improved constructions for these novel and essentially monolithic transducer-supporting waveguides.

SUMMARY

[0004] A first aspect of the invention is an ultrasonic core for an ultrasonic surgical instrument. The ultrasonic core includes a longitudinally elongated, generally planar waveguide defining an aperture extending from a first side of the waveguide toward a medial plane of the waveguide and a transducer element secured to opposite walls of the aperture.

The transducer element is sized and shaped so as to substantially conform to the size and shape of the aperture and to be at least partially embedded within the waveguide. In a first embodiment, the aperture is an open-ended aperture extending to a second, opposite side of the waveguide. In a second embodiment, the aperture is a blind or closed-ended aperture.

[0005] A second aspect of the invention is a method for assembling the ultrasonic core of the aforementioned embodiments. The method includes the steps of (a) obtaining a longitudinally elongated, generally planar waveguide defining an aperture having a first length, and a transducer element having a second length greater than the first length but capable of being reversibly shrunk to a third length less than the first length upon application of a drive current; (b) applying the drive current to the transducer element and inserting the transducer element within the aperture; and (c) removing the drive current from the transducer element so that the transducer element expands within the aperture. The resulting assembly secures the transducer element within the aperture either with or without the use of an intermediate glue layer.

[0006] A third aspect of the invention is an ultrasonic core for an ultrasonic surgical instrument. The ultrasonic core includes a longitudinally elongated, generally planar waveguide; a transducer element secured to the waveguide, and a clamp mechanism. The clamp mechanism includes a base disposed proximally from the proximal end of the waveguide, a pair of restraining arms projecting distally from the base and configured so as to mutually oppose one another across a channel housing the waveguide, and a clamp arm projecting distally from the base between the pair of restraining arms. The base and the clamp arm are mechanically engaged with one another so as to permit the distal end of the clamp arm to be adjustably and securely positioned within the channel, and each restraining arm includes a mount which engages the waveguide at a node positioned distally from the transducer element. The clamp arm may engage a proximal end of the waveguide or a proximal end of a transducer element secured to a proximal end of the waveguide.

[0007] A fourth aspect of the invention is an ultrasonic handpiece for an ultrasonic surgical instrument. The ultrasonic handpiece includes a longitudinally elongated, generally planar waveguide, a transducer element secured to the waveguide, a housing surrounding at least the transducer element, and a clamp mechanism secured to the housing proximate the transducer element. The clamp mechanism engages the transducer element at a transducer node, and both the clamp mechanism and the transducer element include complementary electrical contacts for applying a drive current to the transducer element.

[0008] A fifth aspect of the invention is an ultrasonic core optionally including an surgical scalpel portion. The ultrasonic core includes a longitudinally elongated, generally planar silicon waveguide having a generally planar transduction portion, with at least one transducer element secured to the generally planar transduction portion, and a wedge-shaped acoustic horn portion including an inclined side surface. The ultrasonic core is characterized in that the inclined side surface is oriented along the {1,1,1} crystallographic plane of the silicon material. The wedge-shaped acoustic horn portion may include a unitary surgical scalpel portion as a part of the inclined side surface.

[0009] A sixth aspect of the invention is a method of manufacturing a silicon waveguide for an ultrasonic surgical instrument where a wedge-shaped distal portion of the waveguide

includes an inclined side surface oriented along a $\{1,1,1\}$ crystallographic plane of the silicon material. The method includes the ordered steps of: (a) obtaining a silicon wafer cut so as to have the $\{1,1,1\}$ crystallographic plane disposed at a non-zero acute angle with respect to a face of the wafer; (b) growing a thermal oxide coating upon the wafer; (c) applying a photoresist coating to one face of the wafer; (d) exposing the applied photoresist to a light shown through a photomask bearing a pattern representative of the inclined side surface of the waveguide; (e) performing an oxide etch upon the thermal oxide coating exposed by the light-induced destruction of the photoresist coating and then removing the residual photoresist coating; (f) performing a hydroxide etch upon the silicon exposed by the oxide etch of the thermal oxide coating until the silicon is removed to a predetermined maximum depth; and (g) dicing the silicon wafer to create a longitudinally elongated, generally planar waveguide having at least a wedge-shaped acoustic horn including the inclined side surface. Additional steps may be performed prior to the dicing of the silicon wafer to create a longitudinally elongated, generally planar waveguide having a wedge-shaped acoustic horn portion and a unitary surgical scalpel portion where both portions include the inclined side surface.

[0010] Other aspects of the disclosed ultrasonic cores, handpieces, and surgical instruments will become apparent from the following description, the accompanying drawings, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a plan view of a waveguide for a first embodiment of an ultrasonic core.

[0012] FIG. 2 is a sectional view of the waveguide of FIG. 1.

[0013] FIG. 3 is a plan view of a first embodiment of an ultrasonic core including a transducer element configured as a "Langevin stack."

[0014] FIG. 4 is a sectional view of the ultrasonic core of FIG. 3.

[0015] FIG. 5 is a detail view of the interface between the transducer element and the waveguide of the device of FIGS. 3 and 4.

[0016] FIG. 6 is a plan view of a waveguide for a second embodiment of an ultrasonic core.

[0017] FIG. 7 is a sectional view of the waveguide of FIG. 6.

[0018] FIG. 8 is a sectional view of a first example of a second embodiment of an ultrasonic core.

[0019] FIG. 9 is a sectional view of a second example of a second embodiment of an ultrasonic core.

[0020] FIG. 10 is an illustration of a method for assembling the ultrasonic cores of the first and second embodiments which specifically illustrates the assembly of an exemplary device of the first embodiment.

[0021] FIG. 11 is plan view of a first example of a third embodiment of an ultrasonic core which includes a clamp mechanism for preconstriaining a transducer element.

[0022] FIG. 12 is a plan view of a second example of a third embodiment of an ultrasonic core which includes a clamp mechanism for preconstriaining a transducer element

[0023] FIG. 13 is a partial sectional view of a third example of a third embodiment of an ultrasonic core which includes a clamp mechanism for preconstriaining a transducer element.

[0024] FIG. 14 is a partial sectional view of a fourth example of a third embodiment of an ultrasonic core which includes a clamp mechanism for preconstriaining a transducer element.

[0025] FIG. 15 is a sectional view of a first example of a fourth embodiment of an ultrasonic core and handpiece.

[0026] FIG. 16 is a sectional view of a second example of a fourth embodiment of an ultrasonic core and handpiece.

[0027] FIG. 17 is a plan view of a fifth embodiment of an ultrasonic core and surgical scalpel.

[0028] FIG. 18 is a sectional view of the ultrasonic core and surgical scalpel of FIG. 17.

[0029] FIGS. 19A-D illustrate a method for manufacturing a waveguide for the devices of the fifth embodiment. Exemplary illustrations are sectional views of the silicon wafer unless otherwise indicated.

DETAILED DESCRIPTION

[0030] Before explaining the several embodiments in detail, it should be noted that the embodiments and expressions are not limited in their application or use to the details of construction and arrangement of parts illustrated in the accompanying drawings and description. The illustrative embodiments and expressions may be implemented or incorporated in other embodiments, expressions, variations, and modifications, and may be practiced or carried out in various ways. Furthermore, unless otherwise indicated, the terms and expressions employed herein have been chosen for the purpose of describing the illustrative embodiments for the convenience of the reader, and are not for the purpose of limiting the invention.

[0031] It is further understood that any one or more of the following-described embodiments, expressions, examples, etc. may be combined with any one or more of the other following-described embodiments, expressions, examples, etc. Such modifications and variations are intended to be included within the scope of the claims.

[0032] A first embodiment is shown in FIGS. 1-5. The first embodiment is an ultrasonic core 100 for an ultrasonic surgical instrument, and includes a longitudinally elongated, generally planar waveguide 110. The waveguide material is preferably a single crystal or polycrystalline material, principally silicon, although germanium, diamond, or sapphire may also be used. In alternate constructions, the generally planar waveguide 110 may instead be manufactured from glass, ceramic, titanium, stainless steel, or aluminum. Although typically illustrated as having only a single layer, it will be understood that the waveguide may be a laminated structure including a plurality of planar layers. For example, for a silicon waveguide 110, the opposing sides of adjacent layers may be bonded by known silicon fusion processes to form a waveguide having a desired thickness. For further example, for a titanium waveguide 110, the edges of adjacent layers may be bonded by known laser welding techniques to form a waveguide having a desired thickness. Composite structures, such as a laminated silicon-glass-silicon waveguide, may be bonded by related processes such as anodic bonding. For sake of clarity in this discussion and the appended claims, the term "end" will be understood as referring to a longitudinal boundary, or a surface representing such a boundary; the term "edge" will be understood as referring to a lateral boundary, or surface representing such boundary, in a direction within the plane of the waveguide; and the term "side" will be under-

stood as referring to a lateral boundary, or surface representing such a boundary, in a direction perpendicular to the plane of the waveguide.

[0033] The ultrasonic core **100** also includes a transducer element **120**. The transducer element is preferably formed from a lead-free piezoelectric material, such as barium titanate, or a magnetostrictive material, such as nickel or “GAL-FENOL” (gallium-iron alloys marketed by ETREMA Products, Inc. of Ames, Iowa), so that the ultrasonic surgical instrument may be both inexpensive enough to be employed as a single use device and suitable for disposal as ordinary medical waste, as opposed to lead-bearing hazardous waste. Other transducing materials, including ceramic PZT materials and electrostrictive materials, as well as single crystal materials, may also be used. As shown in FIGS. **4** and **5**, the transducer element **120** may include a plurality of discrete transducing subelements configured as a “Langevin stack.” However, it will be understood that the transducer element **120** may instead be a unitary transducer element like those illustrated in other figures.

[0034] As detailed in FIGS. **1** and **2**, the planar waveguide **110** defines an aperture **112** extending from a first side **114** of the waveguide **110** to a second, opposite side **116** of the waveguide. The aperture **112** may be formed by laser cutting the waveguide **110**, or through alternate methods such as water jet cutting, depending upon the materials involved. As detailed in FIGS. **3** and **4**, the transducer element **120** is sized and shaped to substantially conform to the size and shape of the aperture **112** (with respect to a length between ends and a length between edges, but not necessarily a depth or thickness between sides), and may be secured within the aperture **112** by a glue layer **118** disposed between the transducer element **120** and opposite walls of the aperture **112**. In a first expression of the first embodiment, suitable for use in a device employing a longitudinal mode of vibration, the glue layer **118** may be disposed at opposite end walls **112a** of the aperture **112**. In a second expression of the first embodiment, suitable for use in a device employing a lateral mode of vibration, the glue layer **118** may be disposed at opposite edge walls **112b** of the aperture **112**. Preferably, the glue layer **118** is disposed about the entire periphery of the aperture **112** so as to completely secure the transducer element **120** within it. Disposition about the entire periphery of the aperture **112** will advantageously support the transmission of longitudinal, lateral, and torsional modes of vibration to the planar waveguide **110**.

[0035] In a variation of the first embodiment, detailed in FIG. **5**, the glue layer **118** may include a plurality of rigid beads **119**. The rigid beads **119** serve to increase the apparent modulus of elasticity of the glue layer **118** by interposing a substantially more rigid structure between the end walls **112a**, edge walls **112b**, and/or periphery of the aperture **112** and the ends, edges, and/or periphery of the transducer element **120**. The glue of the glue layer **118** then serves as a matrix to substantially fix the position of the rigid beads **119** between respective portions of the aperture **112** and the transducer element **120**. In a first expression of the embodiment, the rigid beads **119** may be non-conductive glass beads. In a second expression of the embodiment, the rigid beads **119** may be conductive beads, such as glass beads coated with a metallic layer, metallic beads, or the like. In the second expression, electrical power may be transferred between the planar waveguide **110** and the transducer element via the rigid beads **119**, with the beads serving as a hot pole and/or a

ground pole depending upon the particular configuration of the glue layer **118** (e.g., disposed only at opposite walls of the aperture **112** so as to be configurable as two poles, or about the entire periphery of the aperture **112** so as to be configurable as a single pole). In either expression of the embodiment, the glue of the glue layer **118** may be conductive and serve as a hot pole and/or a ground pole apart from, or as a complement to, the rigid beads **119**. Preferably, the rigid beads **119** are sized to form a single layer between the walls of the aperture **112** and the transducer element **120**. Preferably, the rigid beads **119** make up between 10 percent and 65 percent, by volume, of the glue layer **118**.

[0036] In contrast to a planar waveguide having a transducer element glued to a side of the waveguide, where movement is transmitted between the transducer element and the waveguide through an “elongation-propagation”-type action, the structures of the first embodiment provide a transducer element **120** embedded within the waveguide **110**, permitting movement to be transmitted between them in a “push-pull”-type action. This change in transmission characteristics enhances the coupling and coupling efficiency between the structures by changing the principal forces acting across the bonding layer from shear forces to compressive forces, as well as permitting the use of improved bonding materials. Also, in contrast to a planar waveguide having transducer elements glued to opposite sides of the waveguide, the structures of the first embodiment eliminate the need to precisely align opposing transducer elements (in order to avoid undesired modes of vibration).

[0037] A second embodiment is shown in FIGS. **6-10**. The second embodiment is an ultrasonic core **200** for an ultrasonic surgical instrument which includes a similar longitudinally elongated, generally planar waveguide **210** and a similar transducer element **220**. As detailed in FIGS. **6** and **7**, the planar waveguide **210** defines at least one aperture **212** extending from a first side **214** of the waveguide **210** toward a medial plane of the waveguide “M.” However, in contrast to the first embodiment, the aperture is a blind or closed-ended aperture **212** as opposed to an open-ended aperture **112**. In many devices, such as the exemplary devices discussed below, the planar waveguide **210** also defines an opposing aperture **212** extending from a second, opposite side **216** of the waveguide toward the medial plane “M” and/or additional apertures **212** positioned along a longitudinal axis of the waveguide “L.” Each aperture **212** may be formed by machining or chemically etching the waveguide **210**. Additionally or alternately, where more substantial transducer element thicknesses are required, the waveguide **210** may be a laminated structure including a plurality of planar layers. A principal layer or layers may constitute the transduction and resonator portions of the waveguide **210** and, optionally, a truncated auxiliary layer or layers may define the sides of the aperture **212**. Each aperture **212** may then be formed by cutting, machining, and/or chemically etching one or more layers, either individually or in combination. As indicated earlier, the various layers may be bonded by silicon fusion processes, anodic bonding processes, laser welding processes, and other known techniques appropriate for use with the waveguide material(s).

[0038] As detailed in FIG. **8**, each transducer element **220** is sized and shaped to substantially conform to the size and shape of its corresponding aperture **212**, and may be secured within that aperture **212** by a glue layer **218** (not specifically shown) disposed between the transducer element **220** and

opposite walls of the aperture **212**. The transducer element **220** may also be secured to the closed end of the aperture **212** by glue layer **218**, or by an alternate bonding material serving to temporarily position and secure the transducer element within the aperture **212** prior to introduction of the glue layer **218**. In expressions of the second embodiment, the glue layer **218** may be disposed at the ends **212a** of the aperture **212** and/or the edges **214b** (not shown) of the aperture **212**. Preferably, the glue layer **218** is disposed about the entire periphery of the aperture **212** so as to completely secure the transducer element **220** within it. Disposition about the entire periphery of the aperture **212** will advantageously support longitudinal, lateral, and torsional modes of vibration transmission to the planar waveguide **210**. In a variation of the second embodiment, the glue layer **218** may include a plurality of rigid beads **219** (not illustrated for sake of clarity) like those described in the first embodiment and/or conductive components like those described in the first embodiment.

[0039] In contrast to a planar waveguide having transducer elements glued to opposite sides of the waveguide, the structures of the second embodiment provide transducer elements **220** at least partially embedded within the waveguide **210** itself. Each aperture **212** serves to positively locate a corresponding transducer element **220** with respect to an opposing transducer element disposed across the medial plane and/or a serial transducer element disposed at another predetermined (typically, longitudinal) location, and may be precisely positioned with respect to the waveguide **210** during manufacturing of the waveguide out of, for example, a silicon wafer or a titanium sheet. This change in structural characteristics reduces the difficulty in precisely aligning opposing transducer elements across the medial plane “M” in order to avoid undesired modes of vibration. This change in structural characteristics also reduces the difficulty in precisely positioning serial transducer elements at predetermined locations, e.g., at nodes of a desired mode of vibration, in order to avoid undesired modes of vibration and/or destructive interference between the elements of the series.

[0040] In a first example of the second embodiment, shown in FIG. 8, the waveguide **210** is a laminated structure including a plurality of planar layers **210a**, **210b**, etc. of material. Two adjoining principal layers, **210b** and **210c**, define a longitudinal channel or other internal void which may serve, for example, as an internal lumen **211**. Two truncated auxiliary layers, **210a** and **210d**, each define a blind aperture **212**, with the apertures being disposed in mutual opposition across the medial plane “M.” A pair of opposing transducer elements **220** are disposed within the apertures **212** and secured by glue layers **218** as described above. The first example consequently provides a structure suitable for use as an ultrasonic surgical scalpel which may be cooled by an irrigation fluid pumped through the internal lumen **211** in order to prevent the cauterization of dissected patient tissue.

[0041] In a second example of the second embodiment, shown in FIG. 9, the waveguide **210** is a laminated structure including a plurality of planar layers **210a**, **210b**, etc. of material. Three adjoining principal layers, **210b**, **210c**, and **210d**, define a longitudinal channel or other internal void which may serve, for example, as an internal lumen **211**. In contrast to the first example, where the principal layers would be etched or otherwise machined to include partially penetrating voids defining the internal lumen **211**, only the central principal layer **210c** must be cut, machined, or otherwise shaped to provide a channel or void space, leaving the adjoining

principal layers **210b** and **210d** to serve as the sides of the internal lumen **211**. Two truncated auxiliary layers, **210a** and **210e**, each at least partially define a plurality of blind apertures **212** serially disposed along the longitudinal axis of the device, with the pluralities being disposed in mutual opposition across the medial plane “M.” The adjoining principal layers, **210b** and **210d**, may further partially define the respective apertures **212** so as to provide reference points for locating the truncated auxiliary layers, **210a** and **210e**, during lamination of the various layers. Opposing transducer elements **220** are disposed within the apertures **212** and optionally secured by glue layers as described above. The second example provides a structure suitable for use as a cooled ultrasonic surgical scalpel, but also efficiently increases the amplitude of displacement of the waveguide and end effector by enabling the precise positioning of multiple smaller transducer elements in series. Those of skill in the art will appreciate that examples of the first embodiment may similarly employ a plurality of open-ended apertures **112** serially disposed along the longitudinal axis of the device to provide improved ultrasonic surgical scalpels and similar instruments.

[0042] As illustrated in FIG. 10, in a method of assembling the devices of the first and second embodiments, the transducer element(s) **120**, **220** may be sized and shaped to substantially conform to the size and shape of the aperture(s) **112**, **212** after inversely powering the transducer element to shrink the length of the transducer element to a length which is shorter than a corresponding length of the aperture. In step **10**, one obtains a longitudinally elongated, generally planar waveguide **110** defining an aperture **112** having a first length **113**, and a transducer element **120** having a second length **121** greater than the first length **113** but capable of being reversibly shrunk to a third length **122** less than the first length **113** upon application of a drive current. In step **20**, one applies the drive current to the transducer element **120** and inserts the transducer element **120** within the aperture **112**. In optional step **30**, one may dispose a glue layer **118** between the transducer element **120** and opposite walls of the aperture **112**. As discussed above, such a glue layer **118** may include a plurality of rigid beads **119** which may serve to increase the apparent modulus of elasticity of the glue layer **118** and/or to ensure a constant glue layer thickness between the transducer element **120** and the opposite walls of the aperture **112**. In step **40**, one removes the drive current from the transducer element **120** so that the transducer element **120** expands within the aperture **112**. Upon completion, the transducer element **120** is compressionally secured within and prestrained by the opposite walls of the aperture **112**. This preconstraint serves to increase the amplitude of displacement of the waveguide and end effector.

[0043] A third embodiment is shown in FIGS. 11-14. The third embodiment is an ultrasonic core **300** for an ultrasonic surgical instrument which includes a longitudinally elongated, generally planar waveguide **310**, a transducer element **320** secured to the waveguide **310**, and a clamp mechanism **330**. The waveguide **310** may include an aperture **312**, as shown in FIG. 11, with the transducer element **320** sized and shaped to substantially conform to the size and shape of the aperture **312** and secured to opposite walls of the aperture **312**. However, the transducer element **320** may alternately be secured to the proximal end of the waveguide **310**, as shown in FIG. 12, by a bonding material **324**.

[0044] The clamp mechanism 330 may include a base 332 disposed proximally from the proximal end of the waveguide 310, a pair of restraining arms 334a, 334b projecting distally from the base 332 and configured so as to mutually oppose one another across a channel 336 housing the waveguide 310, and a clamp arm 338 projecting distally from the base 332 between the pair of restraining arms 334a, 334b. Those of skill in the art will appreciate that the clamp mechanism may be an internal component of a handpiece for an ultrasonic surgical instrument, as shown in FIGS. 11 and 12, or be a unitary or integrated part of a handpiece housing 350 surrounding the transducer element 320, as shown in FIGS. 13 and 14. The base 332 and the clamp arm 338 may be mechanically engaged with one another so as to permit the distal end of the clamp arm 338 to be adjustably and securely positioned within the channel 336. For example, the base 332 may include an aperture 333 and the clamp arm 338 may include a sawtooth-ribbed section 339 enabling a ratchet-like advancement of the clamp arm 338 relative to the base 332. For further example, the base 332 may include a threaded aperture 333' (not specifically shown) and the clamp arm 338 may include a threaded section 339' (not specifically shown) enabling a screw-like advancement of the clamp arm 338 relative to the base 332. In other examples, the base 332 may include an aperture, channel, or groove, and the clamp arm may be adhered, soldered, or welded into the aperture, channel, or groove while the clamp arm 338 is secured to prestrain the transducer element 120.

[0045] The restraining arms 334a, 334b each include a mount 335 which engages the waveguide 310 at a node 340 positioned distally from the transducer element 320. In a first expression of the third embodiment, shown in FIGS. 11 and 12, each mount includes a hook 335a, and the waveguide 310 includes complementary hooks 342a disposed proximate the node 340 and engaging the mount hooks. In a second expression of the third embodiment, shown in FIG. 13, each mount includes a slot 335b, and the waveguide includes projections 342b extending outwardly from the edges of the waveguide 310 proximate the node 340 and engaging the mount slots. In a third expression of the third embodiment, shown in FIG. 14, each mount includes a pin or screw 335c projecting into the channel 336, and the waveguide includes sockets 342c extending inwardly from the edges of the waveguide 310 proximate the node 340 and engaging the mount pins or screws.

[0046] A fourth embodiment is shown in FIGS. 15 and 16. The fourth embodiment is an ultrasonic handpiece 400 for an ultrasonic surgical instrument which includes a longitudinally elongated, generally planar waveguide 410, a transducer element 420 secured to the waveguide 410, a housing 450 surrounding at least the transducer element 420, and a clamp mechanism 460 secured to the housing 450 proximate the transducer element 420 and engaging the transducer element at a transducer node 444. The clamp mechanism 460 may principally secure the planar waveguide 410 and transducer element 420 within the housing 450 by applying a transverse compressional force to these structures, but may also engage a groove, aperture, or other locating structure with complementary structure such as a tongue or post. The complementary structure may be at least partially elastomeric (e.g., include an elastomeric tip or cushion) so as to vibrationally isolate the housing 450 from the transducer element 420. The clamp mechanism 460 and the transducer element 420 include complementary electrical contacts 466, 426 for

applying a drive current to the transducer element 420. The clamp mechanism electrical contacts 466 may be electrically connected to a remote ultrasound generator via a handpiece cable 467, and the transducer element electrical contacts 426 may be electrically connected to a plurality of electrodes 428 (not shown for sake of clarity) disposed upon and within the transducer element 420.

[0047] In a first example of the fourth embodiment, shown in FIG. 15, a transducer element 420 is secured to the first side 414 of the waveguide 410 without an opposing transducer element being secured to the second, opposite side 416 of the waveguide. The clamp mechanism 460 may include a first clamp arm 462 engaging the transducer element 420 at the transducer node 444 and a second clamp arm 464 engaging the waveguide 410, specifically the second, opposite side 416 of the waveguide, at the transducer node 444. The clamp mechanism electrical contacts 466 are then disposed on the first clamp arm 462. A joint 468, such as an O-ring or similar generally annular elastomeric part, may engage the waveguide 410 at a node 440 positioned distally from the transducer element 420 to increase the stiffness of the waveguide 410 and to prevent contaminants from entering the housing 450.

[0048] In a second example of the fourth embodiment, shown in FIG. 16, a first transducer element 420a is secured to the first side 414 of the waveguide 410 and a second, opposing transducer element 420b is secured to the second, opposite side 416 of the waveguide. The clamp mechanism 460 may include a first clamp arm 462 engaging the first transducer element 420a at the transducer node 444 and a second clamp arm 464 engaging the second transducer element 420b at the transducer node 444. The clamp mechanism electrical contacts 466 may then be disposed on both the first clamp arm 462 and the second clamp arm 464 for engagement with the complementary electrical contacts 426 of the respective transducer elements. Again, a joint 468, such as an O-ring or similar generally annular elastomeric part, may engage the waveguide 410 at a node 440 positioned distally from the transducer elements 420a and 420b to increase the stiffness of the waveguide 410 and to prevent contaminants from entering the housing 450.

[0049] A fifth embodiment is shown in FIGS. 17 and 18. The fifth embodiment is an ultrasonic core 500 which includes a longitudinally elongated, generally planar silicon waveguide 510 having a generally planar transduction portion 510', with at least one transducer element 520 secured to the generally planar transduction portion 510', and a wedge-shaped acoustic horn portion 510" including an inclined side surface 570. The fifth embodiment is characterized in that the inclined side surface 570 is oriented along the {1,1,1} crystallographic plane of the silicon material. The edges of the inclined side surface, 572a and 572b, may also converge toward a central longitudinal axis of the waveguide "L" so as to provide a three-dimensionally varying acoustic horn. In a first example of the fifth embodiment, shown in FIGS. 17 and 18, the edges of the inclined side surface 572a and 572b may linearly converge toward the central longitudinal axis "L" in the acoustic horn portion 510". In a second example of the fifth embodiment, partially shown in FIG. 19C, the edges of the inclined side surface 572a and 572b may curvilinearly converge toward the central longitudinal axis "L" in the acoustic horn portion 510".

[0050] In a variation of the fifth embodiment, the acoustic horn portion **510** may include a unitary surgical scalpel portion.

[0051] Although the following discussion focuses upon a method of manufacturing a waveguide for the ultrasonic core of the fifth embodiment, it is expressly contemplated that the generally planar transduction portion **510'** may take the form of any one of the first through fourth embodiments and combinations thereof, and that the waveguide **510** of the fifth embodiment may be a laminated structure having a pair of mutually opposing principal layers, each including a wedge-shaped acoustic horn portion **510"**, adjoined such that the inclined side surfaces **570** of the respective layers are disposed on opposite sides of the waveguide **510**. For sake of clarity in this discussion and the appended claims, the term "ordered" will be understood as referring to a set of steps that, with respect to each other, are carried out in the stated order, but shall not be interpreted as precluding or excluding the possibility of some other step or steps being performed before, during, or after a recited step nor of some other step of steps being performed between recited steps. Rather, the performance of each recited step serves as a prerequisite to performance of the next.

[0052] As illustrated in FIGS. 19A through 19D, in a method of manufacturing a silicon waveguide for an ultrasonic surgical instrument, a silicon wafer is serially coated, etched, and diced in a number of ordered steps so as to manufacture at least one waveguide **510** having an inclined side surface **570** oriented along a $\{1,1,1\}$ crystallographic plane of the silicon material. In step **1010**, one obtains a silicon wafer cut so as to have the $\{1,1,1\}$ crystallographic plane disposed at a non-zero acute angle with respect to a face of the wafer. Preferably, the $\{1,1,1\}$ crystallographic plane is disposed at an angle α of between 1 degrees and 10 degrees with respect to this face. In step **1020**, one grows a thermal oxide coating **1022** upon the silicon wafer; in step **1030**, one applies a photoresist coating **1032** to one face of the silicon wafer; and in step **1040**, one exposes the applied photoresist coating **1032** to a light shown through a photomask bearing a first pattern representative of the inclined side surface **570** of the waveguide **510**. In step **1050**, one performs an oxide etch, such as a buffered hydrofluoric acid etch (BHF etch) or plasma etch, to the thermal oxide coating **1022** exposed by the light-induced destruction of the photoresist coating **1032**, and then removes the residual photoresist coating **1032**.

[0053] In step **1060**, one performs a hydroxide etch, using etchants such as potassium hydroxide or tetramethylammonium hydroxide, to the silicon exposed by the oxide etch of the thermal oxide coating **1022**. The silicon oriented along the $\{1,1,1\}$ crystallographic plane of the material and having edges protected by the thermal oxide will be comparatively resistant to the etching process, whereas the silicon oriented along other crystallographic planes such as the $\{1,0,0\}$ plane and having edges exposed to the etchant will be comparatively susceptible to the etching process. For example, in a KOH etching process the relative ratio of etching rates for the material in the $\{1,1,1\}$ and $\{1,0,0\}$ planes will be approximately 1:100, creating a V-like notch in the silicon material having a 'long' leg or side oriented along the $\{1,1,1\}$ crystallographic plane and a 'short' leg or side where silicon material is being more rapidly removed. The hydroxide etch is performed until the exposed silicon is removed to a predetermined maximum depth, creating an inclined surface oriented along the $\{1,1,1\}$ crystallographic plane of the silicon mate-

rial. Preferably the predetermined maximum depth is just less than the depth of the silicon wafer so as to form an acoustic horn and unitary ultrasonic surgical scalpel projecting distally therefrom. Alternately, the predetermined maximum depth is a non-zero depth, substantially less than the depth of the silicon wafer, so as to form an acoustic horn providing a stud for the attachment of an ultrasonic end effector. In the latter instance, in step **1065**, one may dice the silicon wafer to yield a waveguide **510** or waveguide layer having a wedge-shaped acoustic horn portion **510"** including the inclined side surface **570**. It will be appreciated that the silicon exposed by the hydroxide etching and, potentially, dicing operation may be converted to a thermal oxide coating so as to improve the strength of the acoustic horn portion. An ultrasonic end effector could later be glued to the distal end of the formed acoustic horn, or fused to the distal end of the formed acoustic horn by known silicon fusion processes, anodic bonding processes, or the like to yield an ultrasonic surgical instrument with an acoustic horn which tapers in both transverse dimensions, like the machined fore-end mass acoustic horns of conventional ultrasonic transducer assemblies.

[0054] In the former instance, where one seeks to manufacture a unitary ultrasonic surgical scalpel, further processing steps are performed. In step **1070**, one removes and then regrows the thermal oxide coating **1022** upon the silicon wafer; and, in step **1080**, one applies a photoresist coating **1082** to the opposite face of the silicon wafer. In step **1090**, one exposes the applied photoresist coating to a light shown through a photomask bearing a second pattern representative of the edges **572a** and **572b** and distal end **574** of the inclined side surface **570** of the waveguide **510**. In step **1100**, one performs an oxide etch, such as a plasma etch, to the thermal oxide coating exposed by the light-induced destruction of the photoresist coating. In step **1110**, one performs a DRIE etch to etch the edges **572a** and **572b** and distal end **574** of the inclined side surface **570** through the silicon wafer. Then, in step **1120**, one optionally removes and then regrows the thermal oxide coating upon the silicon wafer so as to improve the strength and biocompatibility of the surgical scalpel portion; and, in step **1130**, one dices the wafer to yield a waveguide **510** or waveguide layer having a wedge-shaped acoustic horn portion **510"** and surgical scalpel portion both including the inclined side surface **570**.

[0055] The wedge-shaped acoustic horn with inclined side surface enables the manufacturer to produce an acoustic horn which tapers in both transverse dimensions, like the machined fore-end mass acoustic horns of conventional ultrasonic transducer assemblies, and to deliver enhanced ultrasonic gain due to the narrowing of the waveguide material along the inclined side surface. In constructions like that of the fifth embodiment, where the wedge-shaped distal portion of the waveguide includes an acoustic horn portion and a unitary surgical scalpel portion, both portions may include the inclined side surface. The inclined side surface consequently serves to provide enhanced ultrasonic gain to the surgical scalpel and to provide a very sharp distal-most edge, as well as to provide a smooth transition from the acoustic horn portion to the surgical scalpel portion. The method of manufacturing the waveguide takes advantage of the fact that silicon etching processes can be anisotropic, with the structures of the crystal planes being etched at different rates so as to preferentially remove silicon across the $\{1,0,0\}$ and $\{1,1,0\}$ crystallographic planes while intrinsically forming a surface aligned with the $\{1,1,1\}$ crystallographic plane. Thus, an

essentially monolithic essentially monolithic transducer-supporting waveguide can be manufactured to provide superior acoustic gain to a distal end without requiring expensive and complete three dimensional machining equipment and techniques, and ultrasonic handpieces employing such waveguides can be manufactured with smaller ultrasonic cores for a desired amount of end effector displacement.

[0056] While aspects of the invention have been illustrated by the description of several embodiments, it is not the intention of the applicant to restrict or limit the spirit and scope of the appended claims to such detail. Numerous variations, changes, and substitutions will occur to those skilled in the art without departing from the scope of the invention. Moreover, the structure of each element associated with the present invention can be alternatively described as a means for providing the function performed by the element. Accordingly, it is intended that the invention be limited only by the spirit and scope of the appended claims.

What is claimed is:

1. An ultrasonic core for an ultrasonic surgical instrument, the ultrasonic core comprising:

a longitudinally elongated, generally planar waveguide having an aperture extending from a first side of the waveguide toward a medial plane of the waveguide; and a transducer element secured to opposite walls of the aperture, wherein the transducer element is sized and shaped to substantially conform to the size and shape of the aperture.

2. The ultrasonic core of claim 1, wherein the transducer element is secured to the opposite walls of the aperture by a glue layer disposed between the transducer element and the opposite walls of the aperture.

3. The ultrasonic core of claim 2, wherein the glue layer is disposed at the ends of the aperture.

4. The ultrasonic core of claim 3, wherein the glue layer is disposed about the entire periphery of the aperture.

5. The ultrasonic core of claim 2, wherein the glue layer includes a plurality of rigid beads.

6. The ultrasonic core of claim 5, wherein the rigid beads are glass beads.

7. The ultrasonic core of claim 1, wherein the aperture extends from the first side of the waveguide to a second, opposite side of the waveguide.

8. The ultrasonic core of claim 1, wherein the aperture is a blind aperture having a closed end.

9. The ultrasonic core of claim 8, wherein the transducer element is secured to the closed end of the aperture by a glue layer.

10. The ultrasonic core of claim 1, wherein the waveguide is a laminated structure including a plurality of planar layers.

11. A method of assembling an ultrasonic core including a longitudinally elongated, generally planar waveguide, the method comprising the steps of:

obtaining a longitudinally elongated, generally planar waveguide defining an aperture having a first length, and a transducer element having a second length greater than the first length but capable of being reversibly shrunk to a third length less than the first length upon application of a drive current;

applying the drive current to the transducer element and inserting the transducer element within the aperture;

removing the drive current from the transducer element so that the transducer element expands within the aperture,

whereby the transducer element is compressionally secured within and prestrained by the opposite walls of the aperture.

12. The method of claim 11, further comprising the step of disposing a glue layer between the transducer element and opposite walls of the aperture prior to removing the drive current from the transducer element.

13. The method of claim 12, wherein the glue layer is disposed at the ends of the aperture.

14. The method of claim 13, wherein the glue layer is disposed about the entire periphery of the aperture.

15. The method of claim 12, wherein the glue layer includes a plurality of rigid beads.

16. The method of claim 15, wherein the rigid beads are glass beads.

17. An ultrasonic core for an ultrasonic surgical instrument, the ultrasonic core comprising:

a longitudinally elongated, generally planar waveguide;

a transducer element secured to the waveguide; and

a clamp mechanism including a base disposed proximally from the proximal end of the waveguide, a pair of restraining arms projecting distally from the base and configured so as to mutually oppose one another across a channel housing the waveguide, and a clamp arm projecting distally from the base between the pair of restraining arms,

wherein the base and the clamp arm are mechanically engaged with one another so as to permit distal end of the clamp arm to be securely positioned within the channel; and

wherein each restraining arm includes a mount which engages the waveguide at a node positioned distally from the transducer element.

18. The ultrasonic core of claim 17 wherein the pair of arms are unitary members of a handpiece housing surrounding the transducer element.

19. The ultrasonic core of claim 17, wherein the base includes an aperture and the clamp arm includes a sawtooth-ribbed section for engagement with the aperture.

20. The ultrasonic core of claim 17, wherein each mount includes a hook, and the waveguide includes complementary hooks disposed proximate the node and engaging the mount hooks.

21. The ultrasonic core of claim 17, wherein each mount includes a slot, and the waveguide includes projections extending outwardly from the edges of the waveguide proximate the node and engaging the mount slots.

22. The ultrasonic core of claim 17, wherein each mount includes a pin or screw projecting into the channel, and the waveguide includes sockets extending inwardly from the edges of the waveguide proximate the node and engaging the mount pins or screws.

23. An ultrasonic handpiece for an ultrasonic surgical instrument, the ultrasonic handpiece comprising:

a longitudinally elongated, generally planar waveguide;

a transducer element secured to the waveguide;

a housing surrounding at least the transducer element; and

a clamp mechanism secured to the housing proximate the transducer element and engaging the transducer element at a transducer node;

wherein the clamp mechanism and the transducer element include complementary electrical contacts for applying a drive current to the transducer element.

24. The ultrasonic handpiece of claim **23**, wherein the transducer element is secured to a first side of the waveguide, and wherein the clamp mechanism includes a first clamp arm engaging the transducer element at the transducer node and a second clamp arm engaging a second, opposite side of the waveguide at the transducer node.

25. The ultrasonic handpiece of claim **23**, wherein the transducer element is a first transducer element secured to a first side of the waveguide, and further comprising:

a second, opposing transducer element secured to a second, opposite side of the waveguide;

wherein the clamp mechanism includes a first clamp arm engaging the first transducer element at the transducer node and a second clamp arm engaging the second transducer element at the transducer node.

26. An ultrasonic core comprising:

a longitudinally elongated, generally planar silicon waveguide having a generally planar transduction portion, with at least one transducer element secured to the generally planar transduction portion, and a wedge-shaped acoustic horn portion including an inclined side surface,

characterized in that the inclined side surface is oriented along the $\{1,1,1\}$ crystallographic plane of the silicon material.

27. The ultrasonic core of claim **26**, wherein the edges of the inclined side surface converge toward a central longitudinal axis of the waveguide in at least the wedge-shaped acoustic horn portion.

28. The ultrasonic core of claim **27**, wherein said edges linearly converge toward the central longitudinal axis of the waveguide.

29. The ultrasonic core of claim **27**, wherein said edges curvilinearly converge toward the central longitudinal axis of the waveguide.

30. The ultrasonic core of claim **26**, wherein the wedge-shaped acoustic horn portion includes a unitary surgical scalpel portion, and wherein both the wedge-shaped acoustic horn portion and surgical scalpel portion include the inclined side surface.

31. A method of manufacturing a silicon waveguide for an ultrasonic surgical instrument having an inclined side surface oriented along a $\{1,1,1\}$ crystallographic plane of the silicon material, the method comprising the ordered steps of:

obtaining a silicon wafer cut so as to have the $\{1,1,1\}$ crystallographic plane disposed at a non-zero acute angle with respect to a face of the wafer;

growing a thermal oxide coating upon the silicon wafer; applying a photoresist coating to one face of the silicon wafer;

exposing the applied photoresist to a light shown through a photomask bearing a first pattern representative of the inclined side surface of the waveguide;

performing an oxide etch upon the thermal oxide coating exposed by the light-induced destruction of the photoresist coating;

performing a hydroxide etch upon the silicon exposed by the oxide etch of the thermal oxide coating until the silicon is removed to a predetermined maximum depth; and

dicing the silicon wafer to yield a longitudinally elongated, generally planar waveguide having at least a wedge-shaped acoustic horn portion including the inclined side surface,

whereby the inclined side surface is oriented along a $\{1,1,1\}$ crystallographic plane of the silicon material.

32. The method of manufacturing of claim **31**, further comprising the ordered steps, performed after the step of performing a hydroxide etch and prior to the step of dicing the silicon wafer, of:

removing and then regrowing the thermal oxide coating upon the silicon wafer;

applying a photoresist coating to the opposite face of the silicon wafer;

exposing the applied photoresist to a light shown through a photomask bearing a second pattern representative of the edges and distal end of the inclined side surface of the waveguide;

performing an oxide etch upon the thermal oxide coating exposed by the light-induced destruction of the photoresist coating;

performing a DRIE etch upon the silicon exposed by the oxide etch of the thermal oxide coating to etch the edges and distal end of the inclined side surface through the silicon wafer.

33. The method of manufacturing of claim **32**, wherein the a wedge-shaped acoustic horn portion has a unitary surgical scalpel portion projecting distally therefrom, and wherein both the wedge-shaped acoustic horn portion and surgical scalpel portion include the inclined side surface.

34. The method of manufacturing of claim **32**, wherein the predetermined maximum depth is just less than the depth of the silicon wafer.

* * * * *

专利名称(译)	具有嵌入式压电致动器的微机械超声手术刀		
公开(公告)号	US20140081299A1	公开(公告)日	2014-03-20
申请号	US13/622921	申请日	2012-09-19
[标]申请(专利权)人(译)	迪茨蒂莫蒂 TARDY亚尼克 BURGER JUERGEN MARGAIRAZ PHILIPPE BORK TORALF		
申请(专利权)人(译)	迪茨TIMOTHY G. TARDY, 亚尼克 BURGER, JUERGEN MARGAIRAZ, PHILIPPE BORK, TORALF		
当前申请(专利权)人(译)	迪茨TIMOTHY G. TARDY, 亚尼克 BURGER, JUERGEN MARGAIRAZ, PHILIPPE BORK, TORALF		
[标]发明人	DIETZ TIMOTHY G TARDY YANIK BURGER JUERGEN MARGAIRAZ PHILIPPE BORK TORALF		
发明人	DIETZ, TIMOTHY G. TARDY, YANIK BURGER, JUERGEN MARGAIRAZ, PHILIPPE BORK, TORALF		
IPC分类号	A61B17/32 H01L21/62		
CPC分类号	H01L21/62 A61B17/320068 A61B17/320092 A61B17/3211 A61B2017/00526		
外部链接	Espacenet USPTO		

摘要(译)

一种超声波芯，包括纵向伸长的，大致平面的波导，其限定从波导的第一侧朝向波导的中间平面延伸的孔，并且具有尺寸和形状的换能器元件，以便基本上符合波导的尺寸和形状。孔径和至少部分地嵌入波导内。在其他方面，一种超声波芯，包括纵向伸长的，大致平面的硅波导，其具有固定到其上的至少一个换能器元件；以及楔形喇叭，包括倾斜的侧表面，其特征在于，倾斜的侧表面沿着{1'定向。 ， 1,1}硅材料的晶面。此外，制造各个超声波芯和超声波手持件的方法用于包含这种芯的超声波手术器械。

