



US008828000B2

(12) **United States Patent**  
**Panchbahavi**

(10) **Patent No.:** **US 8,828,000 B2**  
(45) **Date of Patent:** **Sep. 9, 2014**

(54) **APPARATUS TO TRACE AND CUT A TENDON OR OTHER Laterally EXTENDED ANATOMICAL STRUCTURE**

(75) Inventor: **Vinod Kumar Panchbahavi**, Galveston, TX (US)

(73) Assignee: **The Board of Regents of the University of Texas System**, Austin, TX (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1442 days.

(21) Appl. No.: **12/030,781**

(22) Filed: **Feb. 13, 2008**

(65) **Prior Publication Data**

US 2008/0221579 A1 Sep. 11, 2008

**Related U.S. Application Data**

(60) Provisional application No. 60/889,581, filed on Feb. 13, 2007.

(51) **Int. Cl.**

**A61B 17/00** (2006.01)

**A61B 17/32** (2006.01)

**A61B 18/18** (2006.01)

**A61B 17/10** (2006.01)

(52) **U.S. Cl.**

CPC ..... **A61B 17/32** (2013.01); **A61B 17/00008** (2013.01); **A61B 17/320016** (2013.01); **A61B 2017/320052** (2013.01); **A61B 2017/00969** (2013.01); **A61B 2017/320056** (2013.01)

USPC ..... **606/79**

(58) **Field of Classification Search**

USPC ..... 606/79–85, 103, 104

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,681,324	A *	10/1997	Kammerer et al.	606/113
5,961,530	A *	10/1999	Moore et al.	606/148
6,068,642	A *	5/2000	Johnson et al.	606/180
6,423,071	B1 *	7/2002	Lawson	606/103
6,440,138	B1 *	8/2002	Reiley et al.	606/79
6,752,814	B2 *	6/2004	Gellman et al.	606/148
7,553,307	B2 *	6/2009	Bleich et al.	606/1
7,857,813	B2 *	12/2010	Schmitz et al.	606/79
2003/0065335	A1 *	4/2003	Guido et al.	606/144
2004/0211434	A1 *	10/2004	Loomas et al.	128/898
2007/0055262	A1 *	3/2007	Tomita et al.	606/82
2007/0123888	A1 *	5/2007	Bleich et al.	606/79

\* cited by examiner


*Primary Examiner* — Christopher Beccia


(74) *Attorney, Agent, or Firm* — Wong, Cabello, Lutsch, Rutherford & Brucculeri, LLP.

(57) **ABSTRACT**


A harvesting apparatus is disclosed for harvesting anatomical structures such as tendons, fine muscles, nerves and blood vessels, where the apparatus includes an elongate member having two longitudinally extending tubes or tubular apertures extending from the member's proximal end to its distal end. The distal end includes opposing heads and an arcuate base. The anatomical structure is placed on the arcuate base and a flexible cutting member is threaded through one tube over the anatomical structure and into and through the other tube. The elongate member is then directed into an animal or human body along the structure to a position where the anatomical structure is to be cut. Then the cutting member is pulled back and forth at the distal end causing into to cut the anatomical structure at the distal head.

**18 Claims, 9 Drawing Sheets**

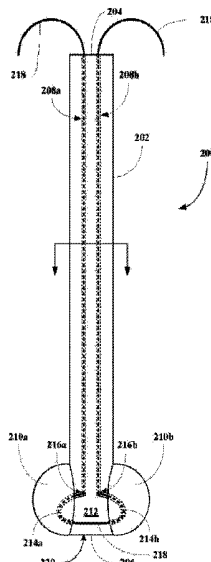

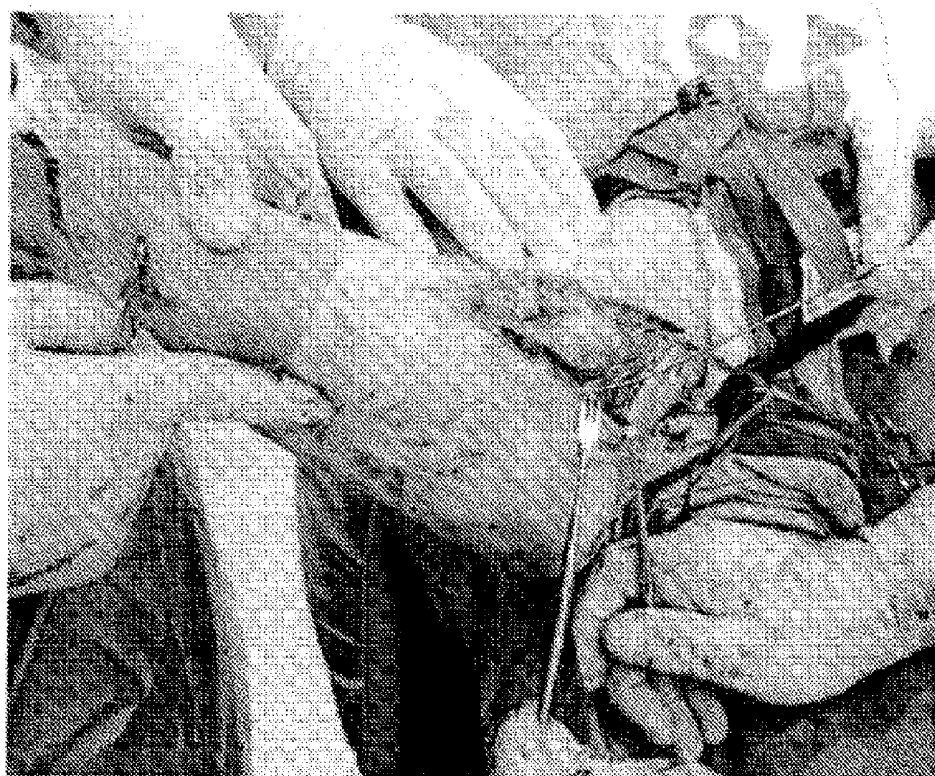

**FIG. 1A**  
**PRIOR ART**

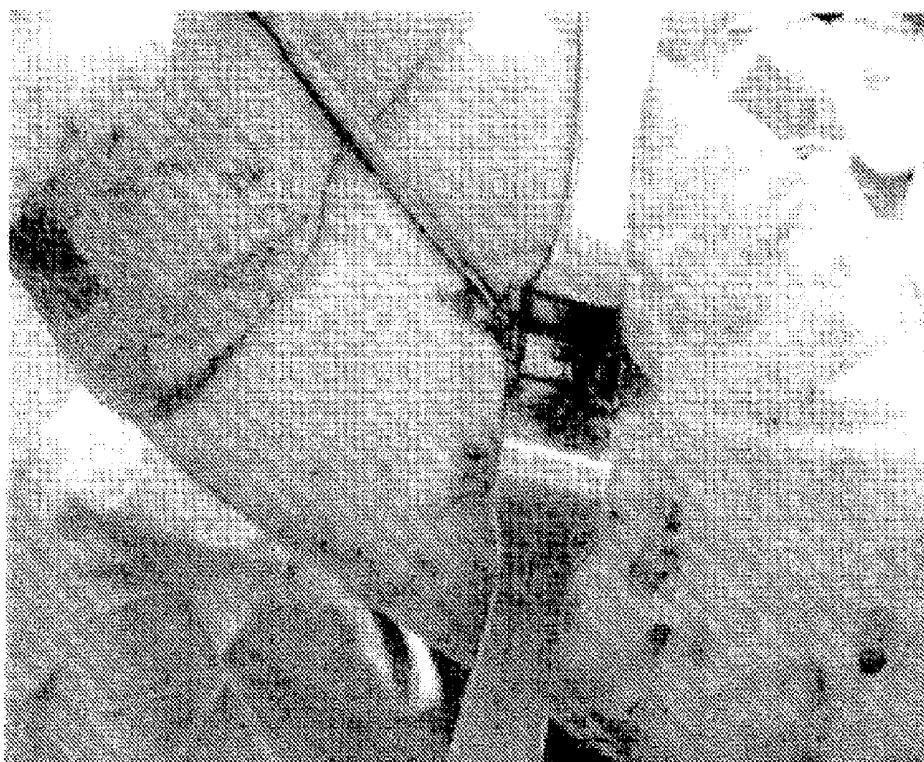

**FIG. 1B**  
**PRIOR ART**



**FIG. 1C**  
**PRIOR ART**

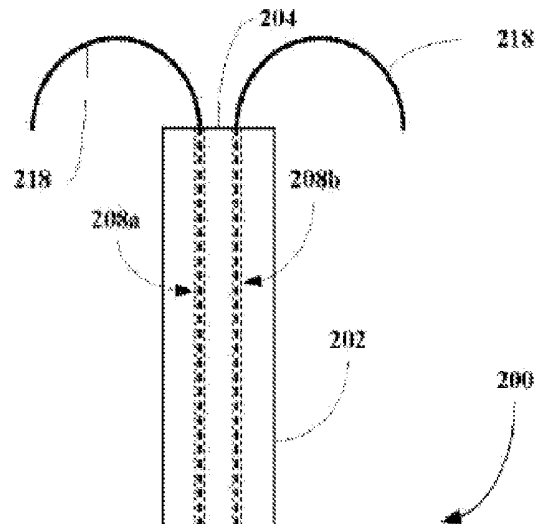


FIG. 2A




FIG. 2B



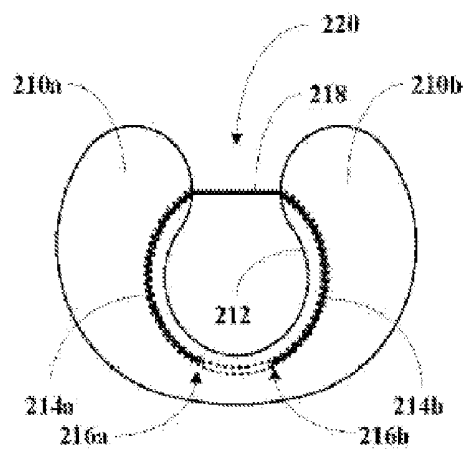



FIG. 2C

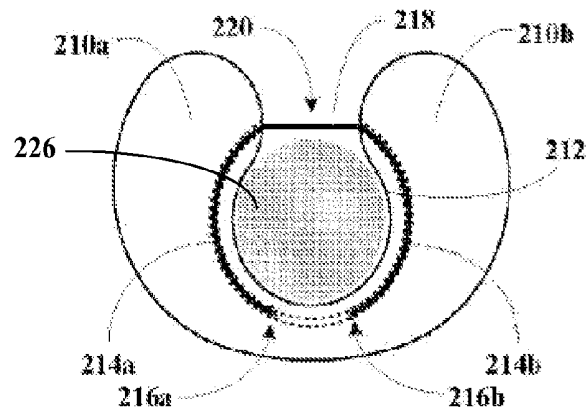


**FIG. 3A**

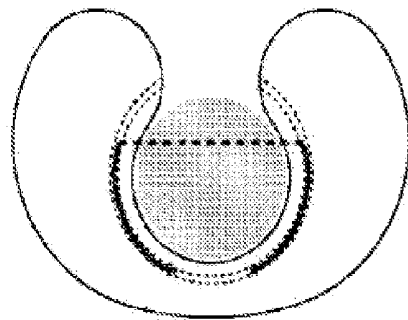

**FIG. 3B**

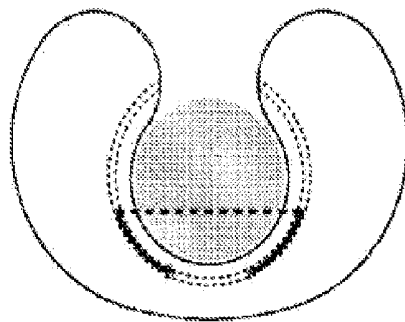

**FIG. 3C**

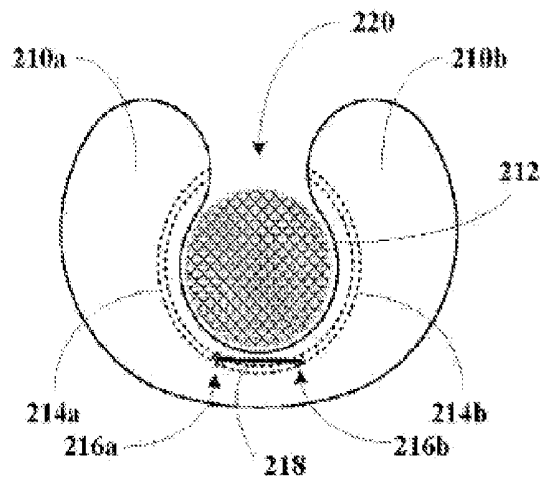

**FIG. 3D**

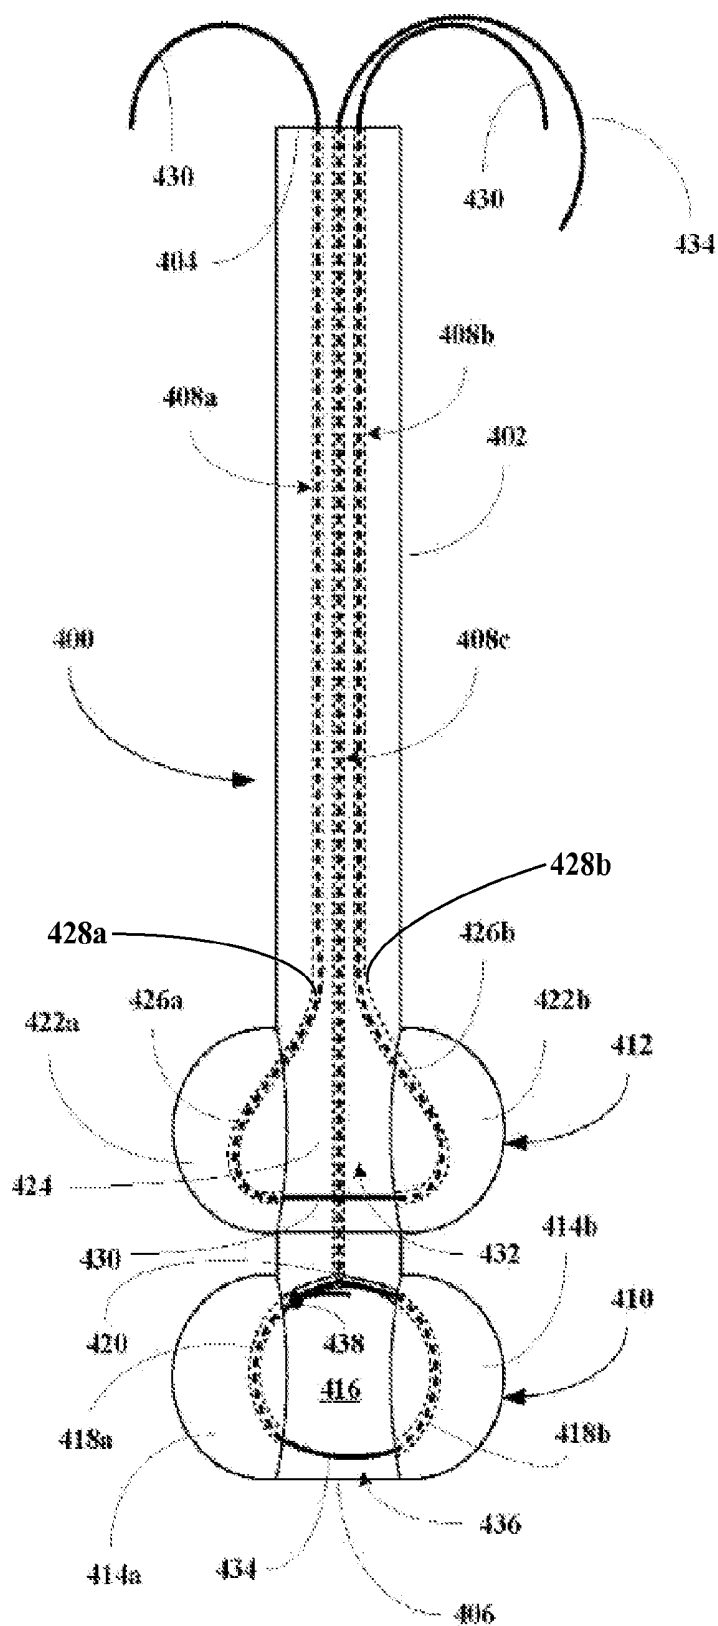


FIG. 4

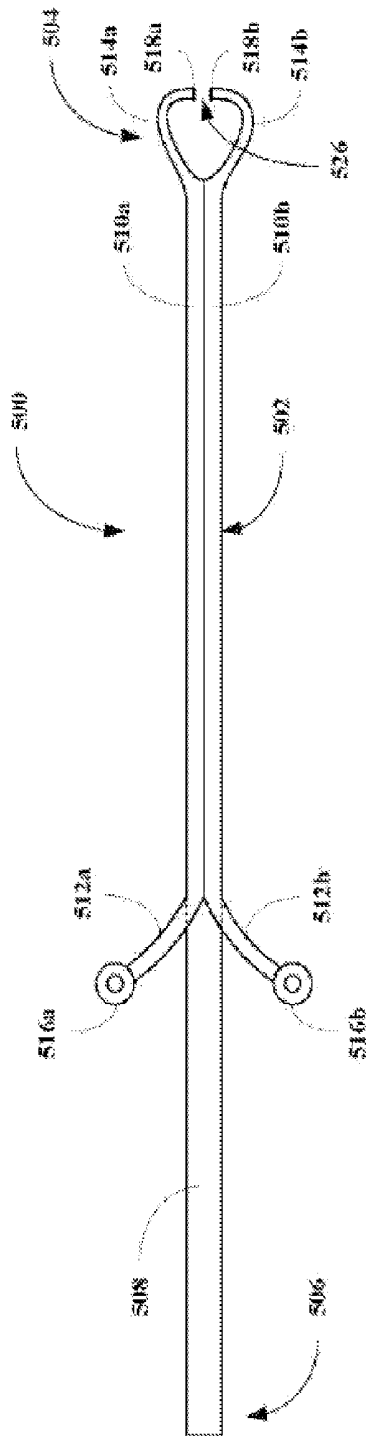


FIG. 5A

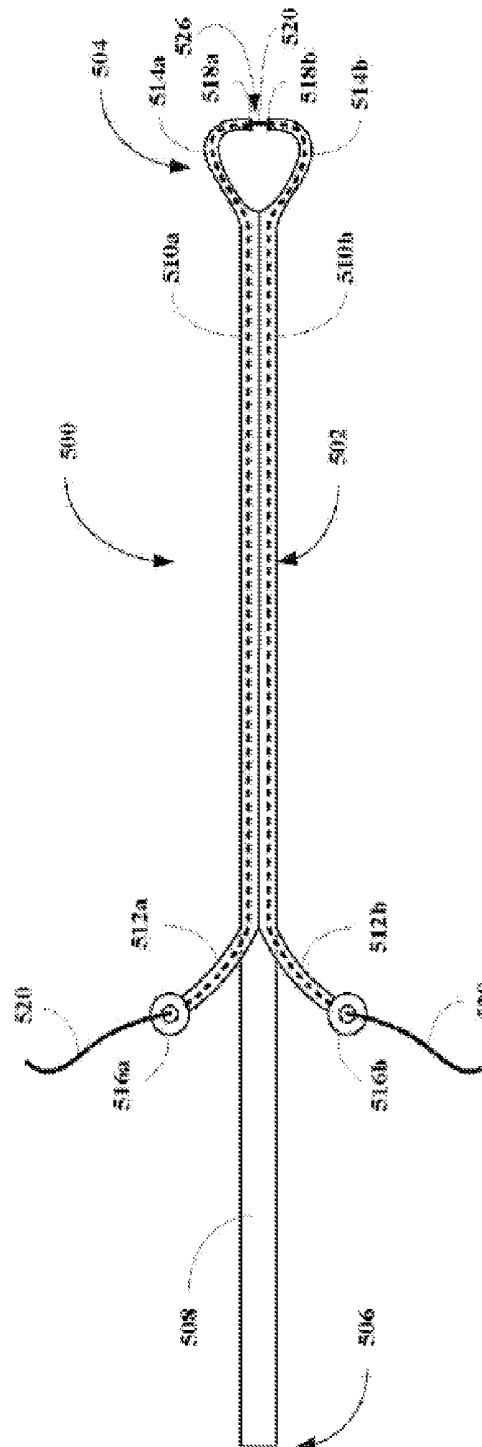
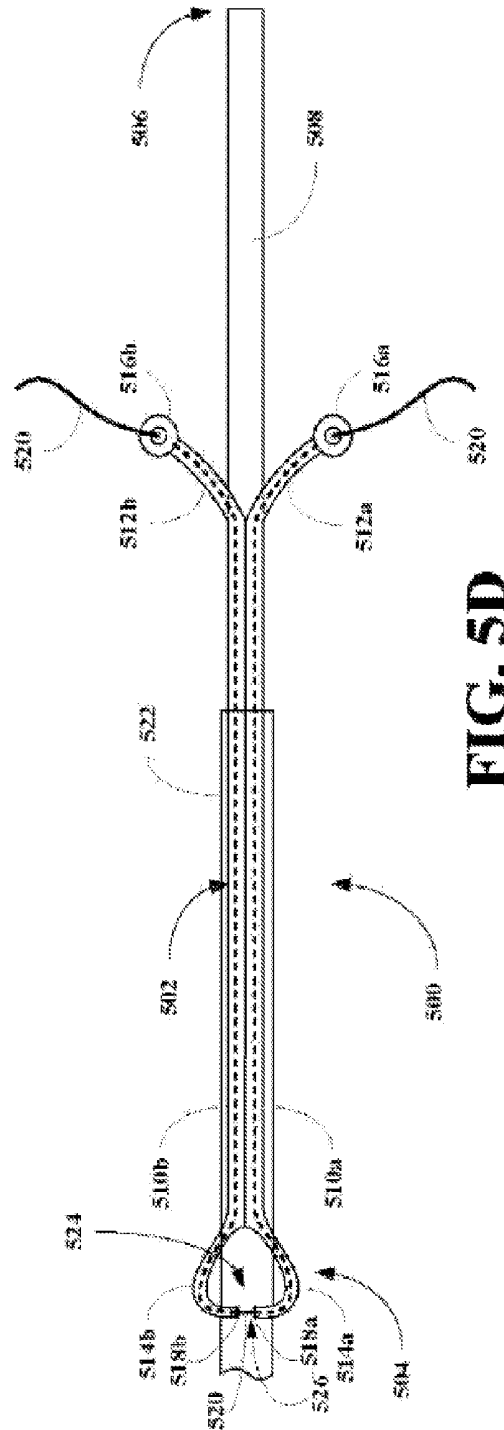
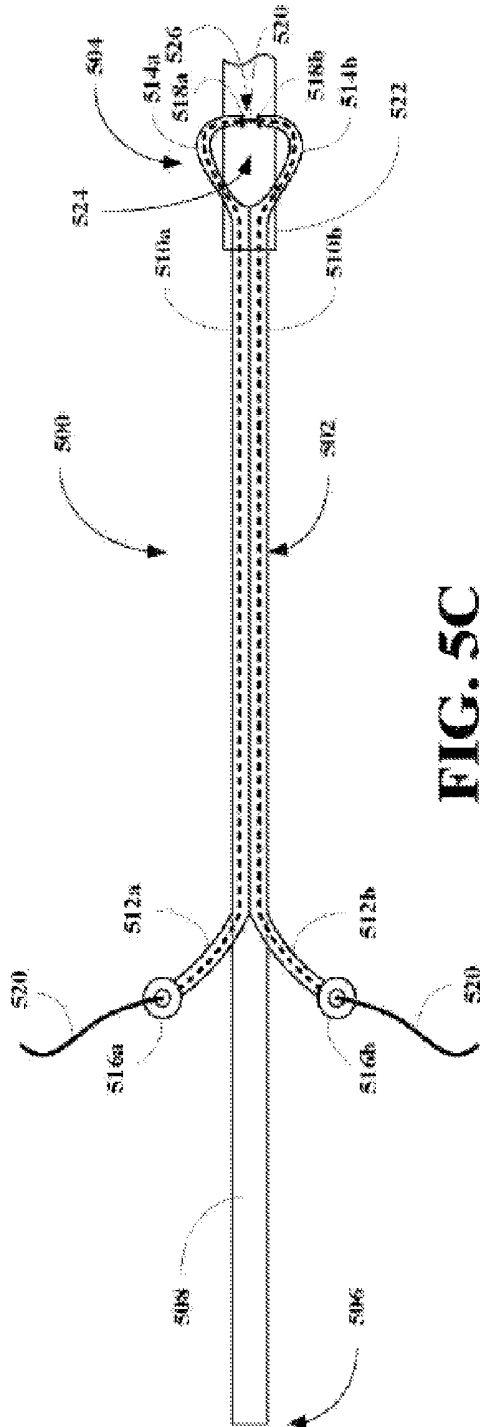


FIG. 5B





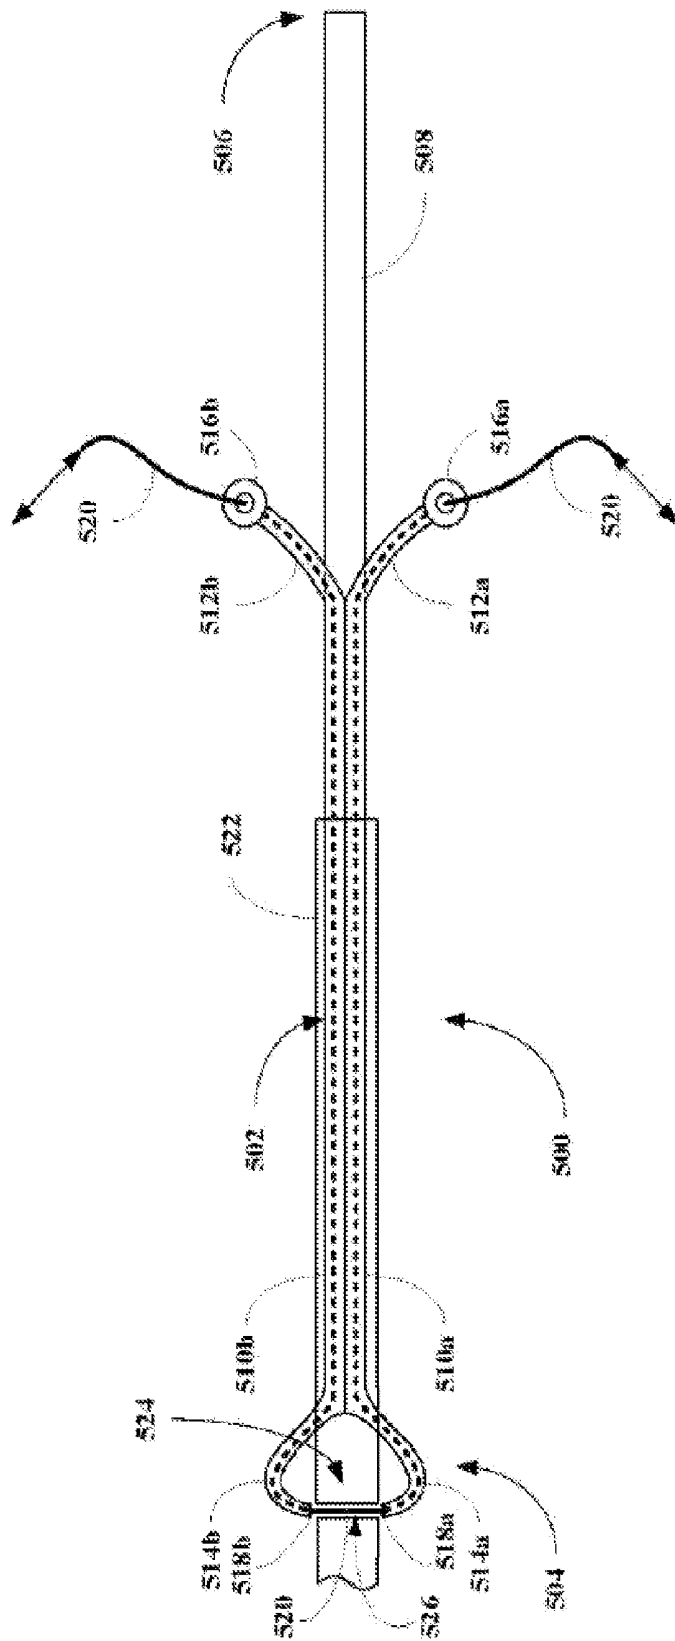


FIG. 5E

1

# APPARATUS TO TRACE AND CUT A TENDON OR OTHER Laterally EXTENDED ANATOMICAL STRUCTURE

## RELATED APPLICATIONS

This application claims priority to and the benefit of U.S. Provisional Patent Application Ser. No. 60/889,581 filed 13 Feb. 2007.

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to an apparatus for tracing and cutting a laterally extending anatomical structure in an animal's body including a human body and to methods for making and using same.

More particularly, the present invention relates to an apparatus for tracing and cutting a laterally extending anatomical structure in an animal's body including a human body, where the apparatus includes an elongate flexible body having a proximal end, a distal end, a cutting member extending from the proximal end to the distal end and back through tubes in the flexible body terminating at two opposing apertures in two opposing cutting guides. The apparatus is ideally suited for harvesting tendons or other laterally extending anatomical structures from a surgically accessible point to a desired cutting point along the tendon or other structure within the animal or human body. The present invention also relates to methods for making and using same.

### 2. Description of the Related Art

The flexor digitorum longus (FDL) and flexor hallucis longus (FHL) tendons are used in a variety of foot reconstructive procedures. These tendons are generally harvested from the midfoot and transferred to a different location in the foot to augment or replace a degenerated tendon.

The FDL is transferred to the navicular bone in treatment of stage II dysfunction of the posterior tibial tendon. The FHL also is used, but less commonly for this purpose. The FHL tendon is more commonly used for Achilles tendon dysfunction caused by chronic tear or degeneration.

With the open operative technique for harvest of the FDL described by Mann and Thompson in J. Bone Joint Surg. 67-A: 556-561, 1985, the FDL sheath is identified at the medial malleolus and followed distally. The abductor hallucis muscle is refracted plantarward to expose the interval between the flexor hallucis brevis and the first metatarsal. The origin of the flexor hallucis brevis muscle is released to increase the exposure of the plantar aspect of the foot. The FDL tendon sheath is opened, and the tendon kept an tension, while the dissection of the sheath is carried distally into the plantar aspect of the foot. As dissection progresses, a number of vessels have to be cauterized. The FDL tendon is sharply divided at the most distal extent possible. A formal tenodesis of the FDL stump and the FHL distally is not considered necessary because of communicating tendinous slips between the FDL and FHL. This "open" technique requires extensive, deep, and difficult, dissection in the midfoot in the vicinity of blood vessels and nerves.

To improve the success of this technique, the inventor has developed a "minimally invasive" augmented technique. The tendon sheath of the FDL or FHL is identified in the region of the hindfoot through the exposure used for the index procedure, such as exploration of the posterior tibial tendon or the Achilles tendon.

A malleable metallic probe that has a smooth bulb at its tip is introduced within the tendon sheath and passed gently

2

distally into the midfoot where it is easily palpated as shown in FIG. 1A. A vertical incision is then made in the skin of the midfoot over the prominence made by the probe. Once the skin is incised, the central part of the plantar aponeurosis is exposed. The vertically oriented fibers of the aponeurosis are separated to expose muscle fibers of the flexor digitorum brevis muscle. These muscle fibers are then separated and retracted to expose the FDL tendon as shown in FIG. 1B. Because the lateral branch of the medial plantar nerve passes close to the medial border of the flexor digitorum brevis and could be at risk, it is important to make the plantar incision long enough to allow adequate visualization. The identity of the tendon is verified by pulling on the tendon through the proximal incision in the hindfoot and assessing transmission of the tension distally to the tendon in the midfoot and at the same time observing maximal flexion in either the lesser toes or greater toe.

The tendon is then cut sharply in the midfoot and the cut end pulled proximally through the incision in the hindfoot as shown in FIG. 1C.

However, even with the augment technique, the technique involves an additional surgical procedure in a very sensitive area of the foot increasing post operative problems. Thus, there is a need in the art for an apparatus that can be used to harvest tendon and other laterally extending anatomical structures in an animal's body including a human body that does not require additional surgical incisions.

## SUMMARY OF THE INVENTION

The present invention provides a harvesting apparatus including an elongate flexible body. The body includes a proximal end, a distal end and a flexible cutting member. The body includes two hollow tubular members extending a length of the body from the proximal end to the distal end. The tubular members run parallel down the length of the body from the proximal end to a point near the distal end. In one embodiment, the distal end includes two opposing cutting guide heads having opposing cutting channels. The distal end also includes an arcuate base between the two heads adapted to receive an anatomical structure. The cutting member is adapted to be threaded into one tubular aperture at the proximal end of the body until it exits through its cutting guide head so that the cutting member is positioned above or rests adjacent a top surface of the structure to be cut. In another embodiment, the distal end includes two opposing cutting guide heads defining a slot for receiving an anatomical structure. The distal end is generally flat, but when an anatomical structure is inserted into the distal end, the distal end flexes up. This tension provides the downward force for cutting through the anatomical structure so that the distal end will relax to its generally flat configuration.

The cutting member is then threaded through the other tubular aperture until it exits the other tubular aperture at the proximal end of the body. The threading can be performed prior to positioning the structure in the distal end or after positioning the structure in the distal end. The distal end of the apparatus is then pushed or slid along the structure until the distal end is positioned at a location along the structure, where the structure is to be cut. By alternately pulling on the cutting member ends, the cutting member will follow the channel and cut the structure section positioned between the two cutting guide heads. In certain embodiments, the channels are angled so that a top of the channel is more distal than a bottom of the channel to increase cutting efficiency. In certain embodiments, a top surface of the body of the apparatus is curved to engage and aid the apparatus body in following the anatomi-

cal structure to the point where the structure is to be cut. The apparatus is ideally suited for harvesting tendons or other laterally extending anatomical structures from a surgically accessible point to a desired cutting point along the tendon within the animal or human body. In those embodiments, where the distal end does not include cutting channels, but cuts due to a force to attain a flat contour and the end expands to allow the anatomical structure to be cut, the back and forth motion of the cutting member cuts through the structure.

The present invention also provides a harvesting apparatus including an elongate flexible body. The body includes a proximal end, a distal end, a flexible cutting member, and a flexible, bio-erodible or bio-degradable suturing member. The body includes three tubular apertures extending a length of the body from the proximal end to the distal end. The tubular apertures run parallel down the length of the body from the proximal end to a point near the distal end. The distal end includes a suturing station and a cutting station. The suturing station includes two opposing suturing heads, an arcuate suturing base between the suturing heads and a suture guide channel extending from the suturing heads to the heads, where the base is adapted to receive an anatomical structure so that the suturing member loops around the structure. The suturing member is designed to be threaded through the tubular aperture leading to the suturing station and fitted into the suture guide channel and across a top surface of the anatomical structure. The suture member is then tied off at the other head with a slip knot so that when the suturing member is pulled at the proximal end of the apparatus, the loop will tighten on the structure sealing the structure at the suturing station. The cutting station includes two opposing cutting guide heads having opposing cutting channels. The cutting station also includes an arcuate base between the two heads adapted to receive the anatomical structure so that the cutting member is positioned above and rests adjacent a top surface of the structure. The cutting member is adapted to be threaded into one tubular aperture at the proximal end of the body until it exits through its cutting guide head. The cutting member is then threaded into and through the other tubular aperture until it exits the other tubular aperture at the proximal end of the body. By alternately pulling on the cutting member ends, the cutting member will follow the channel and cut the structure portion positioned between the two cutting guide heads proximate the sutured portion of the structure. In certain embodiments, the channels are angled so that a top of the channel is more distal than a bottom of the channel to increase cutting efficiency. In certain embodiments, a top surface of the body of the apparatus is curved to engage and aid the apparatus body in following the anatomical structure to the point where the structure is to be cut. The apparatus is ideally suited for harvesting blood vessels or other tubular structures from a surgically accessible point to a desired cutting point along the tendon within the animal or human body.

Any of the above embodiments can also include fiber optic systems for light and viewing the positioning of the distal end of the apparatus. The distal end of the apparatus can also include X-ray opaque elements for X-ray monitoring of distal end positioning. The distal end of the apparatus can also include monitors for monitoring an environment surrounding the distal end. The distal end can also include ultrasound reflective elements for ultrasound monitoring of distal end position.

The present invention provides a method for harvesting a laterally extending anatomical structure of an animal including a human. The method includes the step of making an incision in the animal or human at a convenient location to expose the anatomical structure to be harvested. The distal

end of an apparatus of this invention is then positioned so that the structure rests on the arcuate base between the cutting head or on the two arcuate bases of the suturing station and the cutting station. Once the distal end is properly positioned on the structure, the cutting member is inserted into one of the tubular apertures and threaded through the aperture until it exits at one of the cutting heads. The cutting member is then passed over the structure and into the other tubular aperture at the opposing cutting head and threaded through the tubular aperture until it exits the tubular aperture at the proximal end of the apparatus. The distal end of the apparatus is then forced along the structure from the incision to a position along the structure in the animal or human, where the structure is to be cut. The cutting member is then pulled from one end and then from the other end causing the cutting member to cut into and through the structure at the distal end. After the structure is severed at the distal end, the apparatus is withdrawn along with the cut structure.

The present invention provides a method for harvesting a laterally extending anatomical structure of an animal including a human. The method includes the step of making an incision in the animal or human at a convenient location to expose the anatomical structure to be harvested. The distal end of an apparatus of this invention is then positioned so that the structure rests on the arcuate base between the cutting head or on the two arcuate bases of the suturing station and the cutting station. Once the distal end is properly positioned on the structure, then for those apparatuses with suturing stations, the suturing member is inserted into the suturing tubular aperture until the suturing member exits the end of the suturing tubular aperture at the suturing station. The suturing member is then threaded through the suturing channel until it loops around the structure. A slip knot is then formed in the suturing member and the knot forced into the suturing channel so that it remains there until the suturing member is pulled at the proximal end of the apparatus causing the loop to tighten around the structure and sealing the structure at the suturing station. The cutting member is inserted into one of the tubular apertures and threaded through the aperture until it exits at one of the cutting heads. The cutting member is then passed over the structure and into the other tubular aperture at the opposing cutting head and threaded through the tubular aperture until it exits the tubular aperture at the proximal end of the apparatus. The distal end of apparatus is then forced along the structure from the incision to a position along the structure in the animal or human, where the structure is to be suture and cut. The suturing member is then pulled to suture the structure at the suturing station. Once the structure has been sutured, the cutting member is then pulled from one end and then from the other end causing the cutting member to cut into and through the structure at the distal end. After the structure is severed at the distal end, the apparatus is withdrawn along with the cut structure.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be better understood with reference to the following detailed description together with the appended illustrative drawings in which like elements are numbered the same:

FIGS. 1A-C depict photographs of a prior art instrument and method for extracting a tendon for transplantation.

FIGS. 2A-C depict different views of an embodiment of a harvesting apparatus of this invention including a cutting distal end.

FIGS. 3A-D depict a cutting process of an anatomical structure positioned in a distal end of an apparatus of this invention.

FIG. 4 depicts another embodiment of a harvesting apparatus of this invention including a suturing station and cutting station at the distal end of the apparatus.

FIGS. 5A-E depict another embodiment of harvesting apparatus of this invention and a cutting process of an anatomical structure positioned in a distal end of the apparatus.

#### DETAILED DESCRIPTION OF THE INVENTION

The inventors have found that an apparatus can be constructed to harvest anatomical structures such as tendons, slender muscles, long nerve filaments or bundles, blood vessels, or other laterally extended anatomical structures. The apparatus includes an elongate body having proximal end and a distal end. The distal end includes two opposing cutting guides and an arcuate base adapted to partially surround an anatomical structure positioned with the base. The apparatus includes a flexible cutting member adapted to be threaded through two tubular apertures, each extending from the proximal end to each of the cutting guides of the distal end. When the cutting member is threaded through the tubular members, a portion of the cutting member will rest on a top surface of a portion of the anatomical structure. Once the distal end is positioned at a point on the structure where the structure will be cut, cutting can commence. By alternatively pulling the ends of the cutting member, the member will follow guide channels in the guide heads and cut through the tendon. In certain embodiments, the cutting guides are angled so that when the cutting member is at the top of the guide channels it is farther from the proximal end and closer at the bottom of the guides channels. The angle is generally between about 5° and about 75° from the vertical (taken as 0° here). In other embodiments, the distal end assembly does not include channels, but the distal end assembly prefers to be generally flat, but when the structure is inserted into the distal end assembly, the assembly is flexed. The downward pressure on the structure provides the force that permits the cutting member to cut the structure.

The invention broadly relates to an apparatus including an elongate member including a proximal end and a distal end. The apparatus also include a flexible cutting member in the form of a string or wire. The elongate member includes two tubular apertures extending from the proximal end of the apparatus to a location in the distal end. The distal end includes two opposing cutting guide heads and an arcuate base extending between or interposed between the opposing cutting heads. The tubular apertures terminate at a base of cutting grooves that extend to a top location of the cutting heads so that when an anatomical structure is properly positioned in the arcuate base of the distal end, the cutting member extends across a gap between the cutting heads proximate a top of the structure or resting on the top of the structure. The cutting member is adapted to be inserted into one of the tubular apertures at the proximal end of the apparatus and threaded through the aperture until it exits at the base of its groove. The cutting member is then passed up over the structure along the grooves and into the other tubular aperture. The cutting member is then threaded through the second aperture and out of the proximal end of the apparatus. The distal end of the apparatus is then forced along the structure until the distal end is properly positioned at a location to be cut. Once properly positioned, the structure is cut by pulling alternate ends

of the cutting member back and forth cutting the structure. The cutting member can flow along guide channels in the distal end.

The present invention also relates to a harvesting apparatus comprising an elongate flexible body including a proximal end, a distal end, two hollow tubular members extending a length of the body and having two opposing distal cutting guide heads disposed at the distal end of the body and two proximal openings disposed at or near the proximal end of the body. The apparatus also comprises a flexible cutting member adapted to be threaded into one tubular member through its proximal opening, through the tubular member, out its guide head, into the other tubular member through its guide head, through the other tubular member, and out it its proximal opening. The distal end is adapted to receive an anatomical structure and a back and forth motion of the cutting member results in severing of the anatomical structure. In certain embodiments, the tubular members further have opposing cutting channels. In other embodiments, the tubular members further have an arcuate base between the two heads adapted to receive an anatomical structure. In other embodiments, the channels are angled so that a top of the channel is more distal than a bottom of the channel to increase cutting efficiency. In certain embodiments, a top surface of the body of the apparatus is curved to engage and aid the apparatus body in following the anatomical structure to the point where the structure is to be cut. In other embodiments, the proximal end of the body comprises a handle. The anatomical structure is a tendon, a slender muscle, a long nerve filament or bundle, a vessel, or other laterally extended anatomical structures. In any of the embodiments of this paragraph, the he apparatus may also comprise a fiber optic system for viewing the positioning of the distal end of the apparatus, X-ray opaque elements for X-ray monitoring of distal end positioning, ultrasound reflective elements for ultrasound monitoring of distal end position, or a monitor for monitoring an environment surrounding the distal end.

The present invention also relates to an harvesting apparatus comprising an elongate flexible body. The elongate body includes three tubular members extending a length of the body, each member having proximal openings. The elongate body also includes a distal end comprising a suturing station. The suturing station comprises two opposing suturing heads, a suture guide channel extending from the suturing heads, and an arcuate suturing base between the suturing heads, where the base is adapted to receive an anatomical structure so that the suturing member loops around the structure, where the suturing member is designed to be threaded through the tubular aperture leading to the suturing station and fitted into the suture guide channel and across a top surface of the anatomical structure. The elongate body also includes a cutting station comprising two opposing distal cutting guide heads. The distal end of the body is adapted to receive an anatomical structure and a back and forth motion of the cutting member results in severing of the anatomical structure. The apparatus also includes a flexible cutting member adapted to be threaded into one of the three tubular members through its proximal opening, through the tubular member, out its guide head, into a second of the three tubular member through its guide head, through the second tubular member, and out it its proximal opening. The apparatus also includes a flexible, bio-erodible or bio-degradable suturing member threaded through the third tubular member forming a loop at the suturing station and tied off at one of the suturing heads with a slip knot so that when the suturing member is pulled at its proximal end extending out of the proximal opening of the third tubular member, the loop will tighten on the anatomical struc-

ture suturing the structure at the suturing station. In certain embodiments, the cutting station further comprises opposing cutting channels. In other embodiments, the cutting station further comprises an arcuate base between the two heads adapted to receive an anatomical structure. In other embodiments, the channels are angled so that a top of the channel is more distal than a bottom of the channel to increase cutting efficiency. In other embodiments, a top surface of the body of the apparatus is curved to engage and aid the apparatus body in following the anatomical structure to the point where the structure is to be cut. In other embodiments, the proximal end of the body comprises a handle. In other embodiments, the anatomical structures is a tendon, a slender muscle, a long nerve filament or bundle, a vessel, or other laterally extended anatomical structures. In any of the embodiments of this paragraph, the apparatus may also comprise a fiber optic system for viewing the positioning of the distal end of the apparatus, X-ray opaque elements for X-ray monitoring of distal end positioning, ultrasound reflective elements for ultrasound monitoring of distal end position, or a monitor for monitoring an environment surrounding the distal end.

The present invention also relates to a method for harvesting a laterally extending anatomical structure of an animal including a human, the method comprising the step of making an incision in the animal or human at a convenient location to expose an anatomical structure to be harvested. After the incision is made, a distal end of an apparatus is positioned adjacent a site of the anatomical structure. The apparatus comprises an elongate flexible body including a proximal end, a distal end, and two hollow tubular members extending a length of the body and having two opposing distal cutting guide heads disposed at the distal end of the body and two proximal openings disposed at or near the proximal end of the body. The apparatus also comprises a flexible cutting member, where the distal end is adapted to receive an anatomical structure and a back and forth motion of the cutting member results in severing of the anatomical structure. Next, the cutting member is threaded into one tubular member through its proximal opening, through the tubular member, out its guide head, into the other tubular member through its guide head, through the other tubular member, and out its proximal opening so that a portion of the cutting member is disposed on a top surface of the anatomical structure. Next, the apparatus is slid down the anatomical structure to a position at which the structure is to be cut. Next, the ends of the cutting member are pulled back and forth to cut into and through the anatomical structure at the position. Lastly, the apparatus and the anatomical structure are removed.

The present invention also relates to a method for harvesting a laterally extending anatomical structure of an animal including a human, the method comprising the step of making an incision in the animal or human at a convenient location to expose an anatomical structure to be harvested. After the incision is made, a distal end of an apparatus is positioned adjacent a site of the anatomical structure. The apparatus comprises an elongate flexible body including three tubular members extending a length of the body, each member having proximal openings. The body also includes the distal end comprising a suturing station. The suturing station comprises two opposing suturing heads, a suture guide channel extending from the suturing heads, and an arcuate suturing base between the suturing heads, where the base is adapted to receive an anatomical structure so that the suturing member loops around the structure, where the suturing member is designed to be threaded through the tubular aperture leading to the suturing station and fitted into the suture guide channel and across a top surface of the anatomical structure. The body

also includes a cutting station comprising two opposing distal cutting guide heads. The distal end is adapted to receive an anatomical structure and a back and forth motion of the cutting member results in severing of the anatomical structure. The apparatus also includes a flexible cutting member and a flexible, bio-erodible or bio-degradable suturing member is threaded through the third tubular member forming a loop at the suturing station and tied off at one of the suturing heads with a slip knot. Next, the cutting member is threaded into one tubular member through its proximal opening, through the tubular member, out its guide head, into the other tubular member through its guide head, through the other tubular member, and out its proximal opening so that a portion of the cutting member is disposed on a top surface of the anatomical structure. Next, the apparatus is slid down the anatomical structure to a position at which the structure is to be cut. Next, the ends of the cutting member are pulled back and forth to cut into and through the anatomical structure at the position. Next, the suturing member is pulled at its proximal end extending out of the proximal opening of the third tubular member so that the loop tightens on the anatomical structure suturing the structure at the suturing station. Lastly, the apparatus and the anatomical structure are removed.

Suitable material out of which the apparatus of this invention can be made includes, without limitation, any flexible material that is approved for use in an animal or human body. Moreover, the handle part of the apparatus can be inflexible or less flexible than the tubular members. Exemplary materials include plastics, rubbers, metals or combinations of these materials provided that the material is approved for use in animals or humans.

Suitable material out of which the cutting member of this invention can be made includes, without limitation, any high tensile strength material that can be made into a wire or continuous filament. Exemplary materials include metallic wires, synthetic or natural fibrous materials commonly used in medicine. The wires or filaments can be smooth or rough or textured to improve cutting efficiency. The wires or filaments can be differentially textured so that a portion of the wire or filament will cut the anatomical structure (e.g., tendon, muscle, nerve, vessel, etc.).

Suitable material out of which the suturing member of this invention can be made includes, without limitation, any suturing material now known or will be invented in the future. Exemplary materials include natural sutures made of collagen from intestines of mammals or from synthetic collagen (polymers) or other synthetic polymers that have been approved by the FDA for use in animals including humans.

Referring now to FIGS. 2A-C, an embodiment of an apparatus of this invention, generally **200** is shown to include an elongate member **202** having a proximal end **204** and a distal end **206**. The elongate member **202** includes two tubular apertures **208a** & **b** extending from the proximal end **204** to the distal end **206**. The proximal end **204** can also include two leg sections (shown in the attachment) having feet, where the two tubular apertures terminate. The distal end **206** includes two opposing heads **210a** & **b** and an arcuate base **212** interposed therebetween. The heads **210a** & **b** include cutting guide channels **214a** & **b** having bases **216a** & **b** coincident with the distal ends of the tubular apertures **208a** & **b**. The apparatus **200** also includes a flexible cutting member **218**, which passes through the tubular apertures **208a** from the proximal end **204** of the apparatus **100** to the base **216a**. The member **218** then follows the guide channel **214a**, then across a gap **220** between the heads **210a** and **210b**. The member **218** then follows the channel **214b** into the base **216b**, through the aperture **208b** and out the proximal end **204** of the apparatus.

Looking at FIG. 2B, the member **202** can have a concave top surface **222** and a convey bottom surface **224** adapted to engage an anatomical structure.

Referring now to FIGS. 3A-D, the apparatus **200** of FIGS. 2A-C is shown in a series of views of the apparatus **200** cutting through an anatomical structure **226**.

Referring now to FIG. 4, another embodiment of an apparatus of this invention, generally **400** is shown to include an elongate member **402** having a proximal end **404** and a distal end **406**. The elongate member **402** includes three tubular apertures **408a-c** extending from the proximal end **404** to the distal end **406**. The proximal end **404** can also include two leg sections (shown in the attachment) having feet, where the two tubular aperture terminate. The distal end **406** includes a suturing station **410** and a cutting station **412**. The suturing station **410** includes two opposing suturing station heads **414a& b** and an arcuate base **416** interposed therebetween. The suturing station heads **414a& b** include suturing guide channels **418a& b** having a base **420** coincident with the distal end of the tubular aperture **408c**. The cutting station **412** includes two opposing cutting station heads **422a& b** and an arcuate base **424** interposed therebetween. The cutting station heads **422a& b** include cutting guide channels **426a& b** having bases **428a& b** coincident with the distal ends of the tubular apertures **408a& b**. The apparatus **400** also includes a flexible cutting member **430**, which passes through the tubular aperture **408a** from the proximal end **404** of the apparatus **400** to the base **428a**. The cutting member **430** then follows the guide channel **426a**, then across a gap **432** between the heads **422a** and **422b**. The cutting member **430** then follows the channel **426b** into the base **428b**, through the aperture **408b** and out the proximal end **404** of the apparatus. The apparatus **400** also includes a flexible suturing member **434**, which passes through the tubular aperture **408c** from the proximal end **404** of the apparatus **400** to the base **420**. The suturing member **434** then follows the guide channel **418a**, then across a gap **436** between the heads **414a** and **414b**. The suturing member **434** then follows the channel **418b** past the base **420** and a slip knot **438** is formed and pushed into the channel **418a**. The suturing member **434** is designed to be pulled so that the loop formed by the slip knot **438** tightens about an anatomical structure to suture the structure above the position where it will be cut.

Referring now to FIGS. 5A-E, another embodiment of an apparatus of this invention, generally **500**, is shown to include an elongate member **502** having a distal end **504** and a proximal end **506** comprising a handle **508**. The elongate member **502** also includes two hollow tubular members **510a& b**. The tubular members **510a& b** include proximal end portions **512a& b** and distal end portions **514a& b**. The proximal end portions **512a& b** include flared openings **516a& b**, and similarly, the distal ends **514a& b** include flared openings **518a& b**. The two flared openings **518a& b** face each other, while the two flared openings **516a& b** point away from each other.

Looking at FIG. 5B, a cutting member **520** is designed to be threaded into the opening **516a** or **516b**, through the tubular member **510a** or **510b**, out of the distal end opening **518a** or **518b**, into the distal end opening **518b** or **518a**, through the tubular members **510b** or **510a** and out the proximal end opening **516b** or **516a**, respectively. In this way, the cutting member **520** is disposed across the distal ends **514a& b** of the tubular member **510a& b**.

Looking at FIG. 5C, the distal end **504**, with the cutting member **520**, is slid onto a tendon **522** so that the tendon **522** is inside a cutting zone **524** of the apparatus **500** defined by the curved distal ends **514a& b** of the tubular members **508a& b**.

Looking at FIG. 5D, the apparatus **500**, with the assistance of the handle **506**, is slid down the tendon **520** to a desired location.

Looking at FIG. 5E, the cutting member **520** is then pulled back and forth to cut the tendon **522** at the location within the cutting zone **524**. The distal end portions **514a& b** of the tubular members **510a& b** are flexible so that the end portions **514a& b** can separate further during the tendon cutting process. Cutting is achieved because the cutting zone **524** is designed to be flat.

Alternatively, the apparatus **500** can be slid down a tendon and once the cutting location along the tendon is located, the cutting member **520** can be threaded through the tubular members **510a& b**. With the cutting member **520** in place, the tendon can then be cut as shown in FIG. 5E. Although a gap **526** is shown between the flared distal openings **518a& b**, the gap can be really small so that the cutting member **520** can be threaded through the tubular members **510a& b** without an opportunity for the cutting member **520** to miss the facing opening.

All references cited herein are incorporated by reference. Although the invention has been disclosed with reference to its preferred embodiments, from reading this description those of skill in the art may appreciate changes and modification that may be made which do not depart from the scope and spirit of the invention as described above and claimed hereafter.

I claim:

1. An apparatus for severing an anatomical structure, comprising:
  - a single elongate body having a longitudinal axis, including:
    - a proximal end,
    - a distal end,
    - two parallel tubular members, each tubular member extending a length of the body parallel to the longitudinal axis and each having a distal opening disposed at the distal end of the body and a proximal opening disposed at or near the proximal end of the body, wherein the distal openings are opposed perpendicularly to the longitudinal axis, and
  - a flexible cutting member adapted to be threaded into one tubular member through its proximal opening, out its distal opening, into the other tubular member through its distal opening, and out its proximal opening, such that the flexible cutting member is parallel to the longitudinal axis in the tubular members and is perpendicular to the longitudinal axis between the distal openings, wherein the distal end is adapted to receive an anatomical structure, and wherein the distal end is adapted sever the anatomical structure using the cutting member.
2. The apparatus of claim 1, further comprising an arcuate base adapted to receive the anatomical structure.
3. The apparatus of claim 1, wherein the distal openings are angled so that a top of the distal openings is more distal than a bottom of the distal openings to increase cutting efficiency.
4. The apparatus of claim 1, wherein a surface of the body is curved to aid the body in following the anatomical structure to the point where the structure is to be cut.
5. The apparatus of claim 1, wherein the proximal end of the body comprises a handle.
6. The apparatus of claim 1, wherein the anatomical structure is a tendon, a slender muscle, a long nerve filament or bundle, a vessel, or a laterally extended anatomical structure.
7. The apparatus of claim 1, further comprising:
  - a fiber optic system for viewing the positioning of the distal end of the apparatus,

## 11

an X-ray opaque element for X-ray monitoring of distal end positioning,  
 an ultrasound reflective element for ultrasound monitoring of distal end position, or  
 a monitor for monitoring an environment in the distal end. 5  
**8.** A harvesting apparatus comprising:  
 an elongate flexible body including:  
   first, second, and third tubular members extending a length of the body, each member having a proximal opening,  
   a distal end comprising:  
     a suturing station comprising:  
       two opposing suturing heads,  
       a suture guide channel extending from the suturing heads, and  
     a cutting station comprising two opposing distal cutting guide heads,  
 a flexible cutting member adapted to be threaded into the second tubular member through its proximal opening, out its guide head, into the third tubular member through its guide head, and out its proximal opening, wherein the distal end is adapted to receive an anatomical structure and a back and forth motion of the cutting member results in severing of the anatomical structure, and  
 a flexible, bio-erodible or bio-degradable suturing member adapted to be threaded into the first tubular member leading to the suturing station and fitted into the suture guide channel and forming a loop at the suturing station and tied off at one of the suturing heads with a slip knot so that when the suturing member is pulled at its proximal end extending out of its proximal opening, the loop will tighten on the anatomical structure suturing the structure at the suturing station. 30

## 12

**9.** The apparatus of claim **8**, wherein the cutting station further comprises opposing cutting channels.

**10.** The apparatus of claim **8**, wherein the cutting station further comprises an arcuate base between the two guide heads adapted to receive the anatomical structure.

**11.** The apparatus of claim **9**, wherein the cutting channels are angled so that a top of the cutting channel is more distal than a bottom of the cutting channel to increase cutting efficiency.

**12.** The apparatus of claim **8**, wherein a top surface of the body is curved to aid the body in following the anatomical structure to the point where the structure is to be cut.

**13.** The apparatus of claim **8**, wherein the proximal end of the body comprises a handle.

**14.** The apparatus of claim **8**, wherein the anatomical structure is a tendon, a slender muscle, a long nerve filament or bundle, a vessel, or a laterally extended anatomical structure.

**15.** The apparatus of claim **8**, further comprising:

A fiber optic system for viewing the positioning of the distal end of the apparatus,

an X-ray opaque element for X-ray monitoring of distal end positioning,

an ultrasound reflective element for ultrasound monitoring of distal end position, or

a monitor for monitoring an environment in the distal end.

**16.** The apparatus of claim **1**, wherein the two tubular members are adjacent in the body.

**17.** The apparatus of claim **8**, wherein the first, second, and third tubular members are adjacent in the body.

**18.** The apparatus of claim **8**, wherein the first, second, and third tubular members are parallel.

\* \* \* \* \*



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 8,828,000 B2  
APPLICATION NO. : 12/030781  
DATED : September 9, 2014  
INVENTOR(S) : Vinod Kumar Panchbahavi

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page:

The first or sole Notice should read --

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1490 days.

Signed and Sealed this  
Sixth Day of June, 2017

A handwritten signature in black ink, reading "Michelle K. Lee", is written over a rectangular area with a light gray dot grid pattern.

Michelle K. Lee  
*Director of the United States Patent and Trademark Office*

专利名称(译)	用于追踪和切割肌腱或其他横向延伸的解剖结构的装置		
公开(公告)号	<a href="#">US8828000</a>	公开(公告)日	2014-09-09
申请号	US12/030781	申请日	2008-02-13
申请(专利权)人(译)	德州大学系统的校董会		
当前申请(专利权)人(译)	德州大学系统的校董会		
[标]发明人	PANCHBAHAVI VINOD KUMAR		
发明人	PANCHBAHAVI, VINOD, KUMAR		
IPC分类号	A61B17/00 A61B17/10 A61B17/32 A61B18/18		
CPC分类号	A61B17/32 A61B17/00008 A61B17/320016 A61B2017/320052 A61B2017/00969 A61B2017/320056		
优先权	60/889581 2007-02-13 US		
其他公开文献	US20080221579A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

公开了一种用于收获诸如肌腱，细肌，神经和血管的解剖结构的收获装置，其中该装置包括细长构件，该细长构件具有从该构件的近端延伸到你远端的两个纵向延伸的管或管状孔。远端包括相对的头部和弓形基部。将解剖结构放置在弓形基座上，并且柔性切割构件穿过解剖结构上方的一个管并进入并穿过另一个管。然后将细长构件沿着结构引导到动物或人体中，到达要切割解剖结构的位置。然后在远端处来回拉动切割构件，从而切割远端头部处的解剖结构。

