



US006589252B2

(12) **United States Patent**  
**McGuckin, Jr.**

(10) **Patent No.:** **US 6,589,252 B2**  
(45) **Date of Patent:** **Jul. 8, 2003**

(54) **BREAST SURGERY METHOD AND APPARATUS**

(75) Inventor: **James F. McGuckin, Jr.**, Radnor, PA (US)

(73) Assignee: **Rex Medical**, Conshohocken, PA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 97 days.

(21) Appl. No.: **09/838,722**

(22) Filed: **Apr. 19, 2001**

(65) **Prior Publication Data**

US 2002/0019640 A1 Feb. 14, 2002

**Related U.S. Application Data**

(62) Division of application No. 09/122,185, filed on Jul. 23, 1998.

(60) Provisional application No. 60/053,664, filed on Jul. 24, 1997.

(51) **Int. Cl.<sup>7</sup>** ..... **A61B 17/24**

(52) **U.S. Cl.** ..... **606/114**

(58) **Field of Search** ..... 606/37, 39, 113, 606/114, 127, 128, 159, 180

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,816,552 A	12/1957	Hoffman
3,320,957 A	5/1967	Sokolik
4,503,855 A	3/1985	Maslanka
4,611,594 A	9/1986	Grayhack et al.
4,616,656 A	10/1986	Nicholson et al.
4,966,604 A	10/1990	Reiss
4,976,711 A	12/1990	Parins et al.
4,997,435 A	3/1991	Demeter
5,100,423 A	3/1992	Fearnot
5,176,128 A	1/1993	Andrese
5,190,561 A	3/1993	Graber
5,197,968 A	3/1993	Clement
5,201,741 A	4/1993	Dulebohn

5,207,675 A	5/1993	Canady
5,224,488 A	7/1993	Neuffer
5,282,484 A	2/1994	Reger
5,318,576 A	* 6/1994	Plassche, Jr. et al. .... 604/22
5,353,804 A	10/1994	Kornberg et al.
5,370,647 A	12/1994	Graber et al.
5,376,100 A	* 12/1994	Lefebvre ..... 604/22
5,397,320 A	3/1995	Essig et al.
5,417,697 A	5/1995	Wilk et al.
5,439,474 A	8/1995	Li
5,486,183 A	1/1996	Middleman et al.
5,496,330 A	3/1996	Bates et al.
5,514,153 A	5/1996	Bonutti
5,524,633 A	6/1996	Heaven et al.
5,573,008 A	11/1996	Robinson et al.
5,632,746 A	5/1997	Middleman et al.
5,649,547 A	7/1997	Ritchart et al.
5,653,684 A	8/1997	Laptewicz et al.
5,709,697 A	1/1998	Ratcliff et al.
5,735,289 A	4/1998	Pfeffer et al.

(List continued on next page.)

**FOREIGN PATENT DOCUMENTS**

SU	1683701	10/1991
WO	WO 8905608	6/1989
WO	WO 9502370	1/1995
WO	WO 9944506	9/1999
WO	0020822	4/2000
WO	WO 0074561	12/2000
WO	WO 0128445	4/2001
WO	WO 0128446	4/2001


*Primary Examiner*—Eduardo C. Robert

(74) *Attorney, Agent, or Firm*—Neil D. Gershon

(57) **ABSTRACT**

A surgical apparatus for cutting a tissue mass comprising an elongated housing having a distal portion, a rotatable shaft positioned in the elongated housing, and a plurality of flexible electrocautery cutting blades extending from the housing, wherein the plurality of cutting blades are radially expandable from a first position defining a first diameter to a second larger diameter and the blades are rotatable and transmit electrical energy to cut the tissue mass.

**57 Claims, 8 Drawing Sheets**

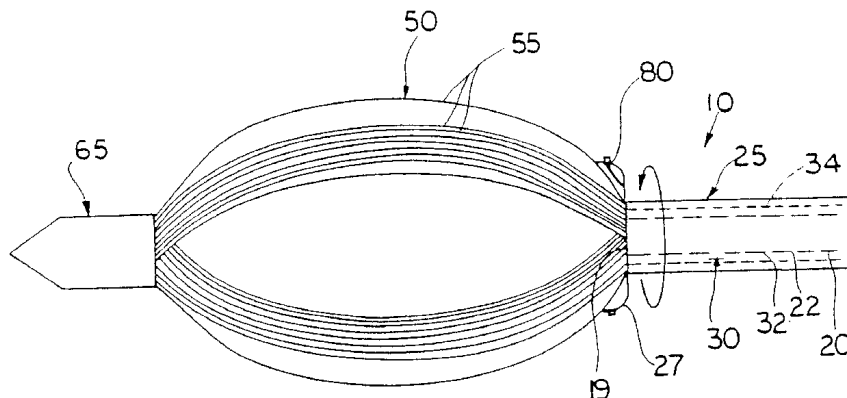

U.S. PATENT DOCUMENTS

5,759,187 A	6/1998	Nakao et al.	6,036,698 A	3/2000	Fawzi et al.
5,794,626 A	8/1998	Kieturakis	6,059,734 A	5/2000	Yoon
5,810,806 A	9/1998	Ritchart et al.	6,068,603 A	5/2000	Suzuki
5,820,629 A	10/1998	Cox	6,080,113 A	6/2000	Heneveld et al.
5,836,953 A	11/1998	Yoon	6,080,114 A	6/2000	Russin
5,871,454 A	2/1999	Majlessi	6,096,053 A	8/2000	Bates
5,895,361 A	4/1999	Turturro	6,106,524 A	8/2000	Eggers et al.
5,895,392 A	4/1999	Riek et al.	6,165,137 A	12/2000	Milliman et al.
5,897,567 A	4/1999	Ressemann et al.	6,179,860 B1	1/2001	Fulton, III et al.
5,904,679 A	5/1999	Clayman	6,221,006 B1	4/2001	Dubrul et al.
5,947,964 A	9/1999	Eggers et al.	6,261,241 B1	7/2001	Burbank et al.
5,989,266 A	11/1999	Foster	6,454,727 B1	9/2002	Burbank et al.
6,007,495 A	12/1999	Matula			

\* cited by examiner

FIG. 1

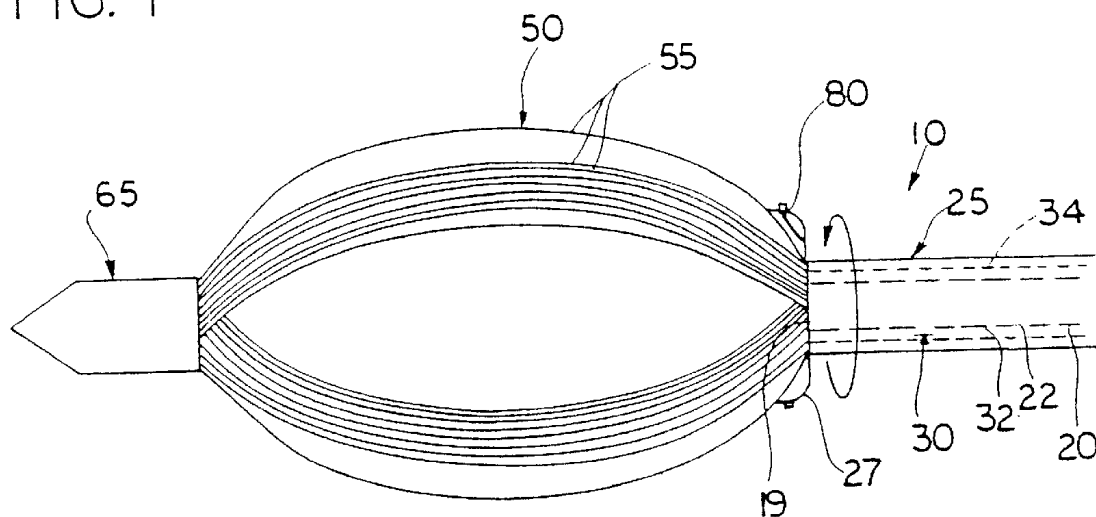


FIG. 2

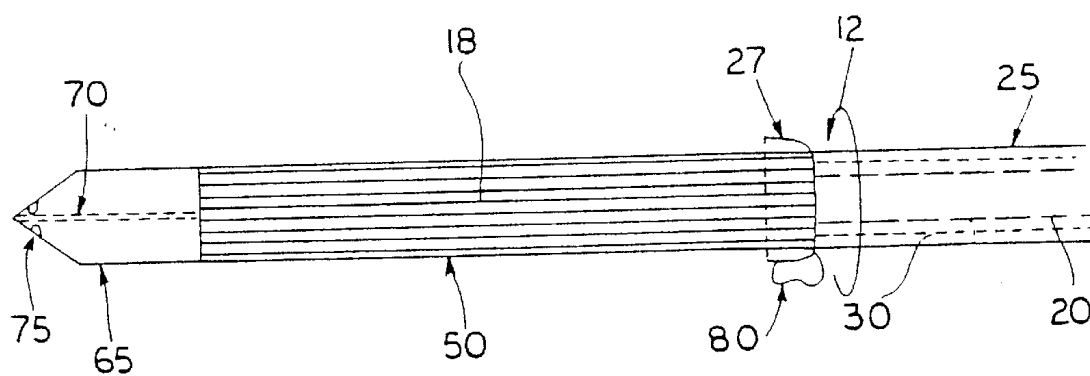



FIG. 3



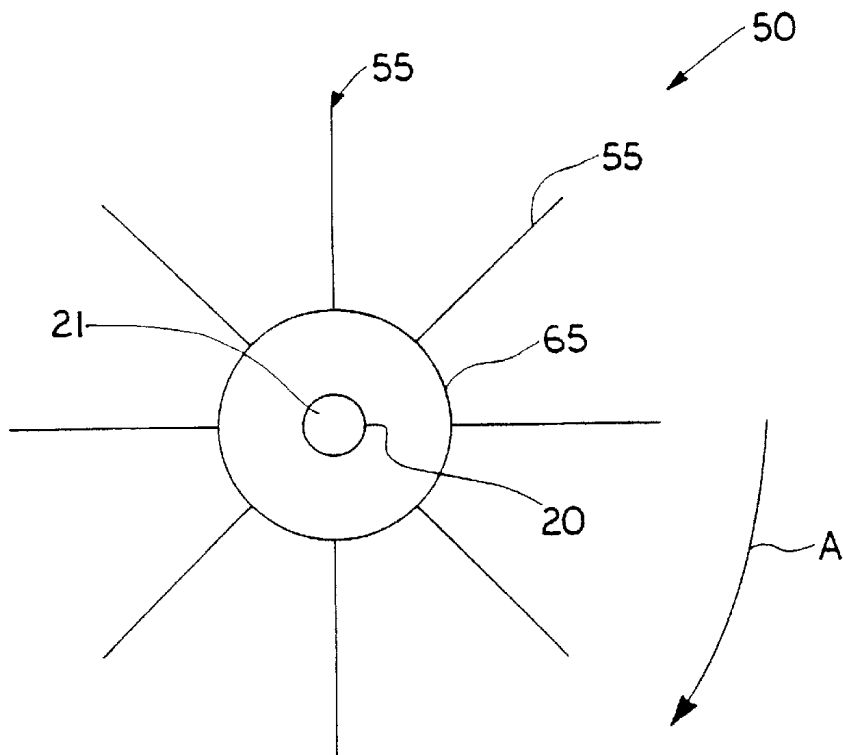


FIG. 4

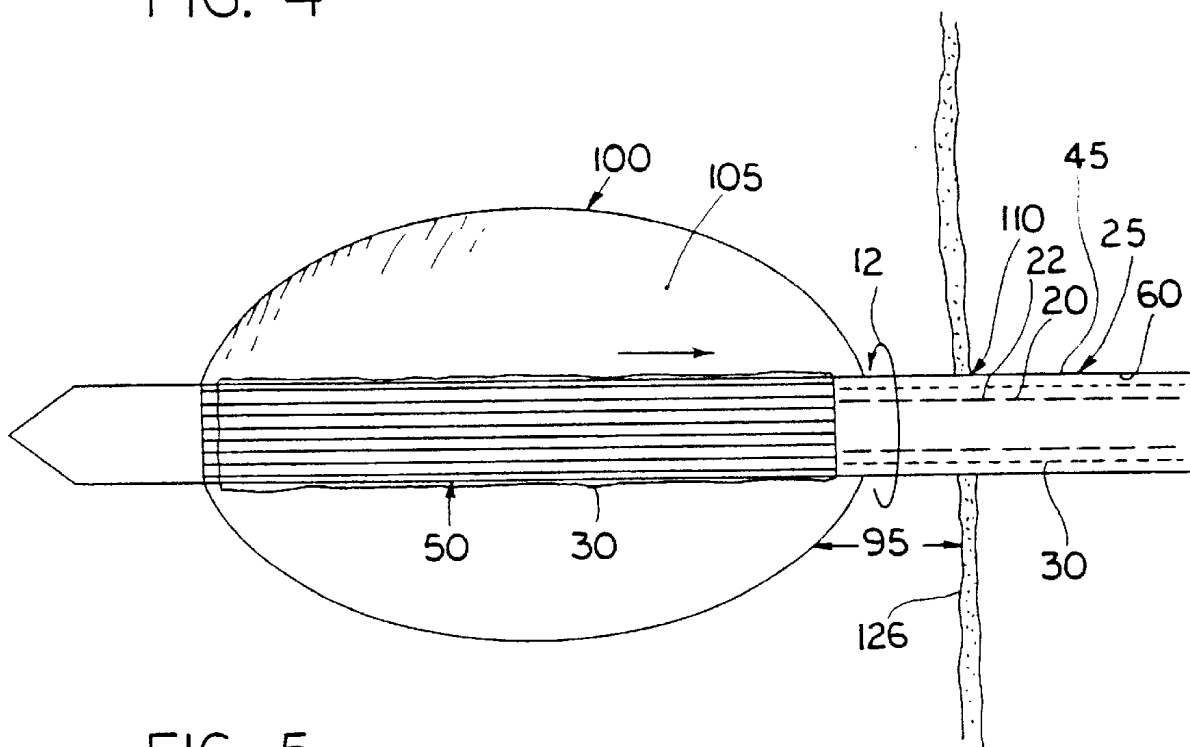
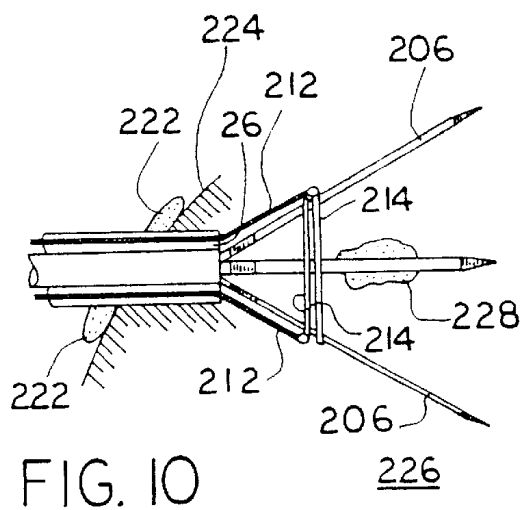
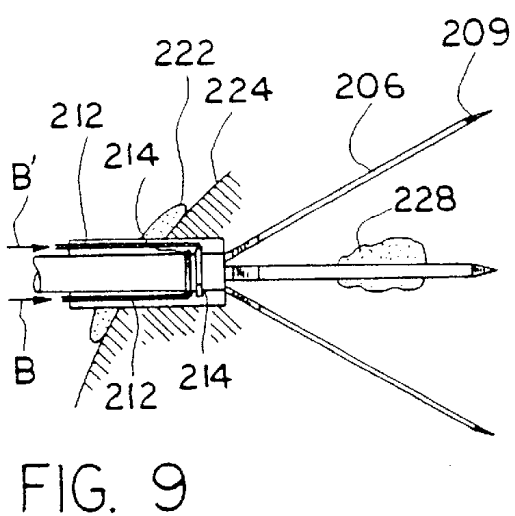
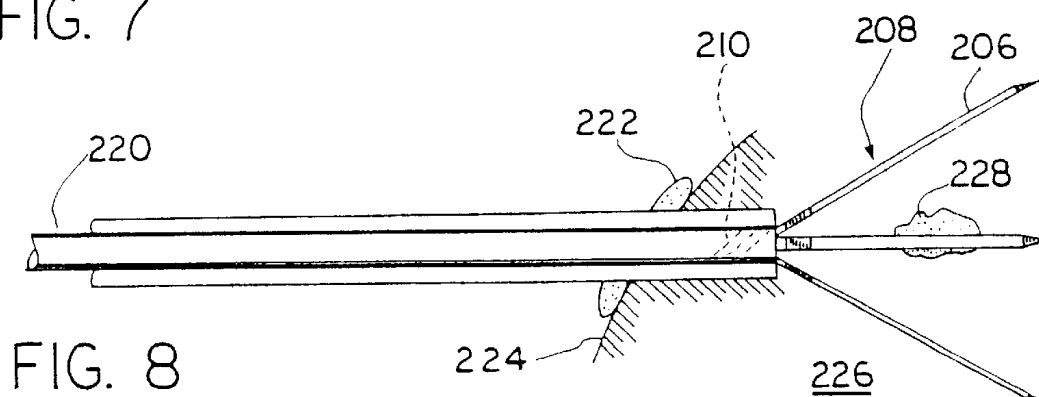
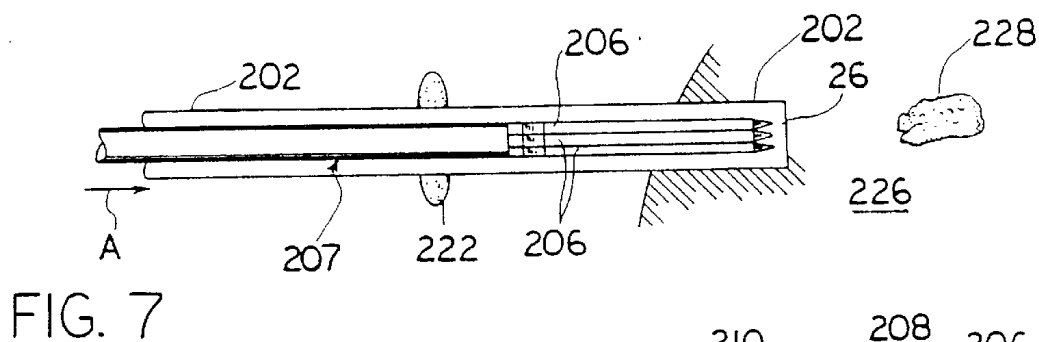
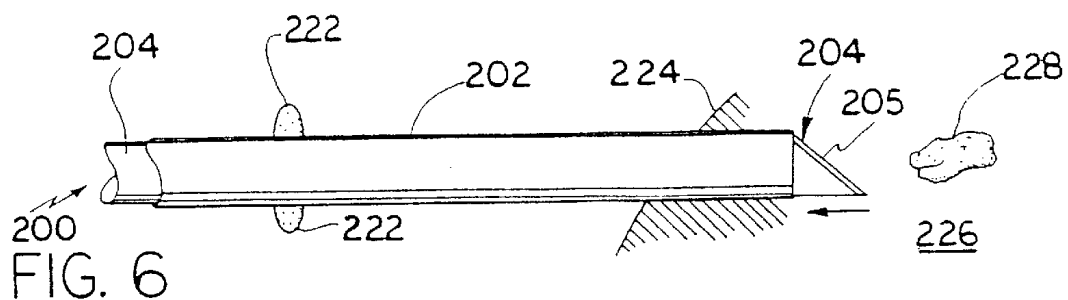


FIG. 5



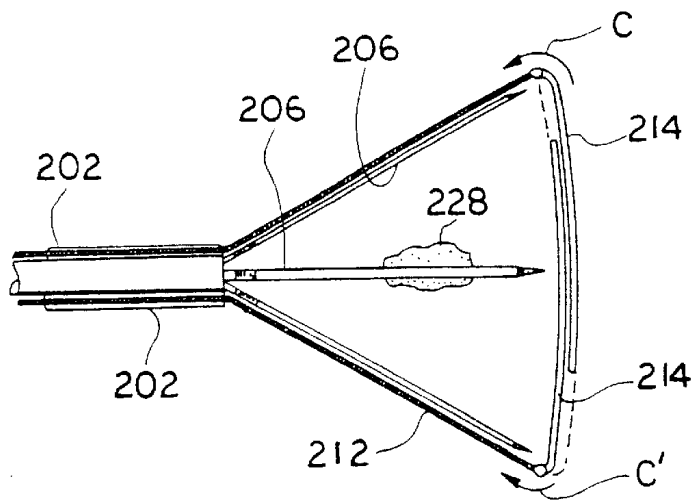


FIG. 11

FIG. 12

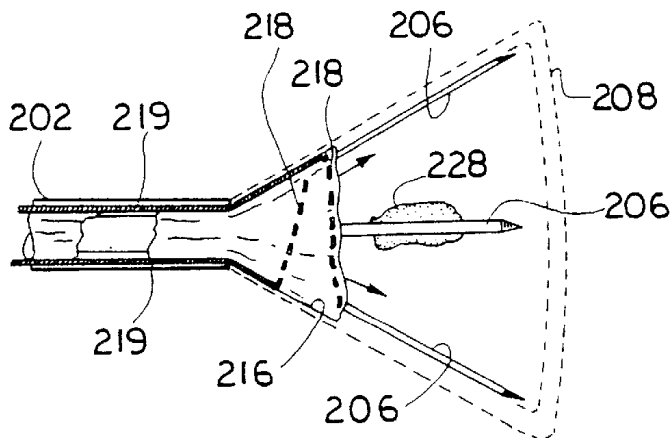
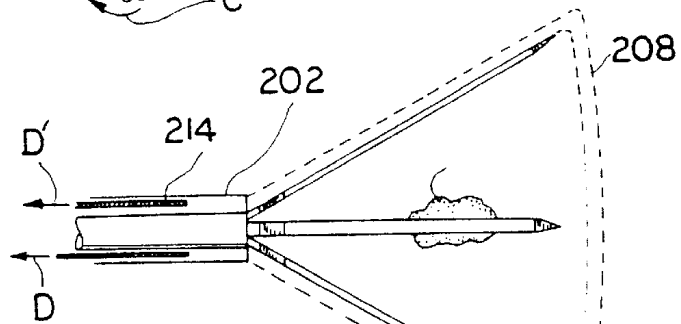
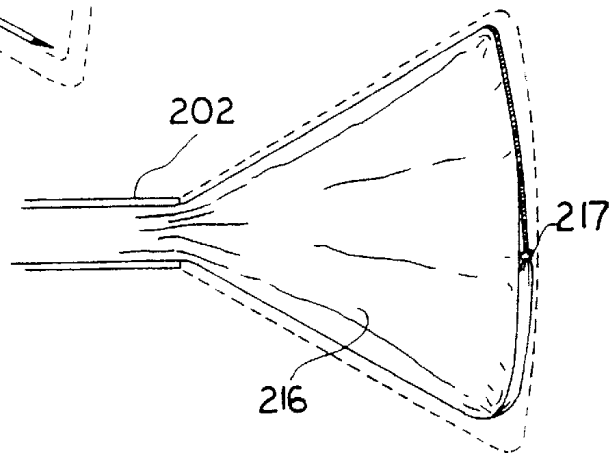
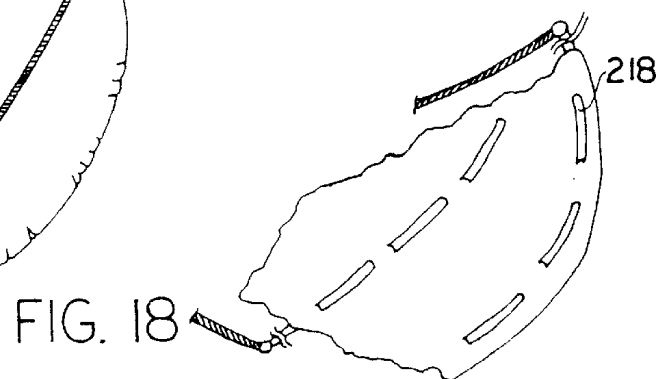
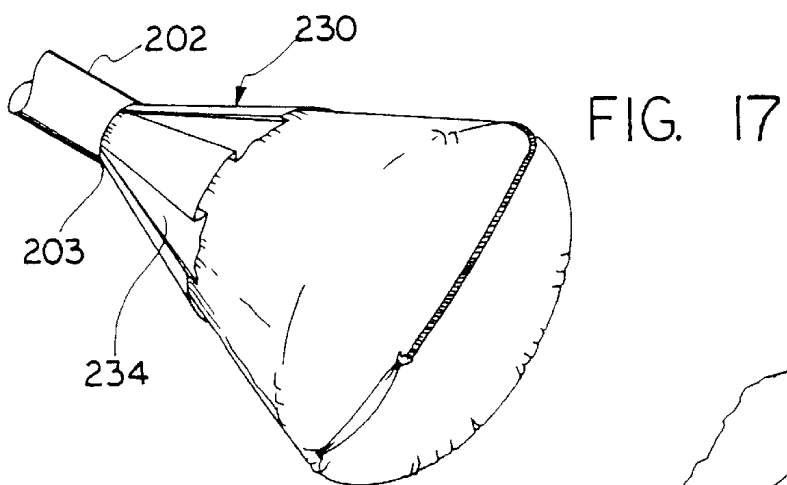
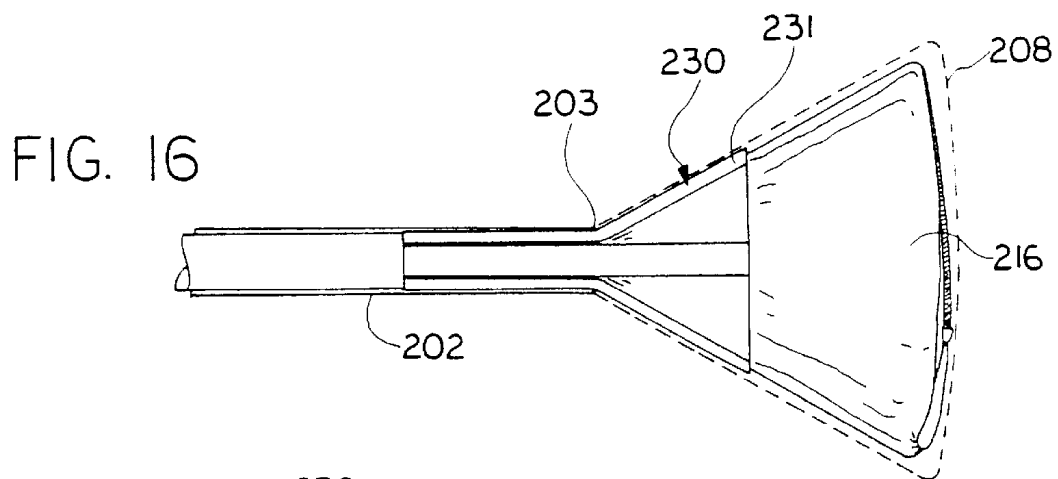
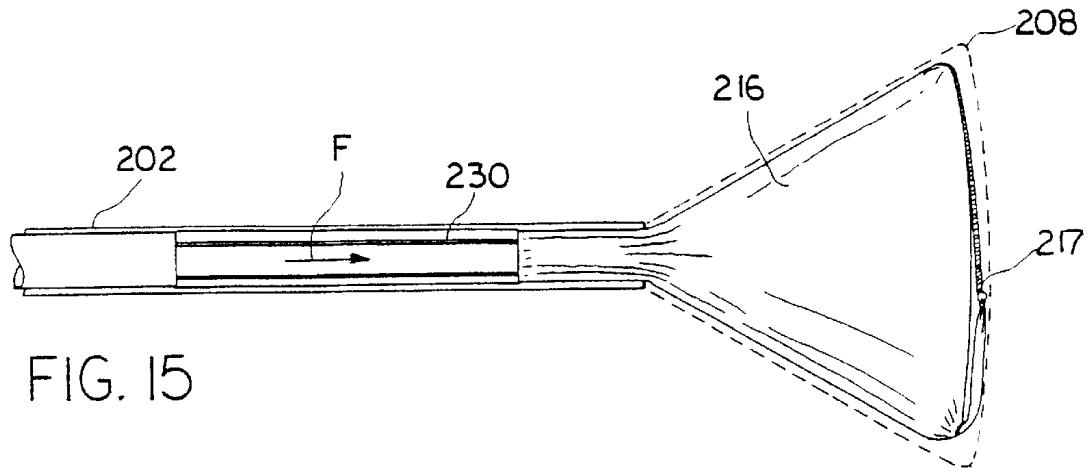


FIG. 13

FIG. 14





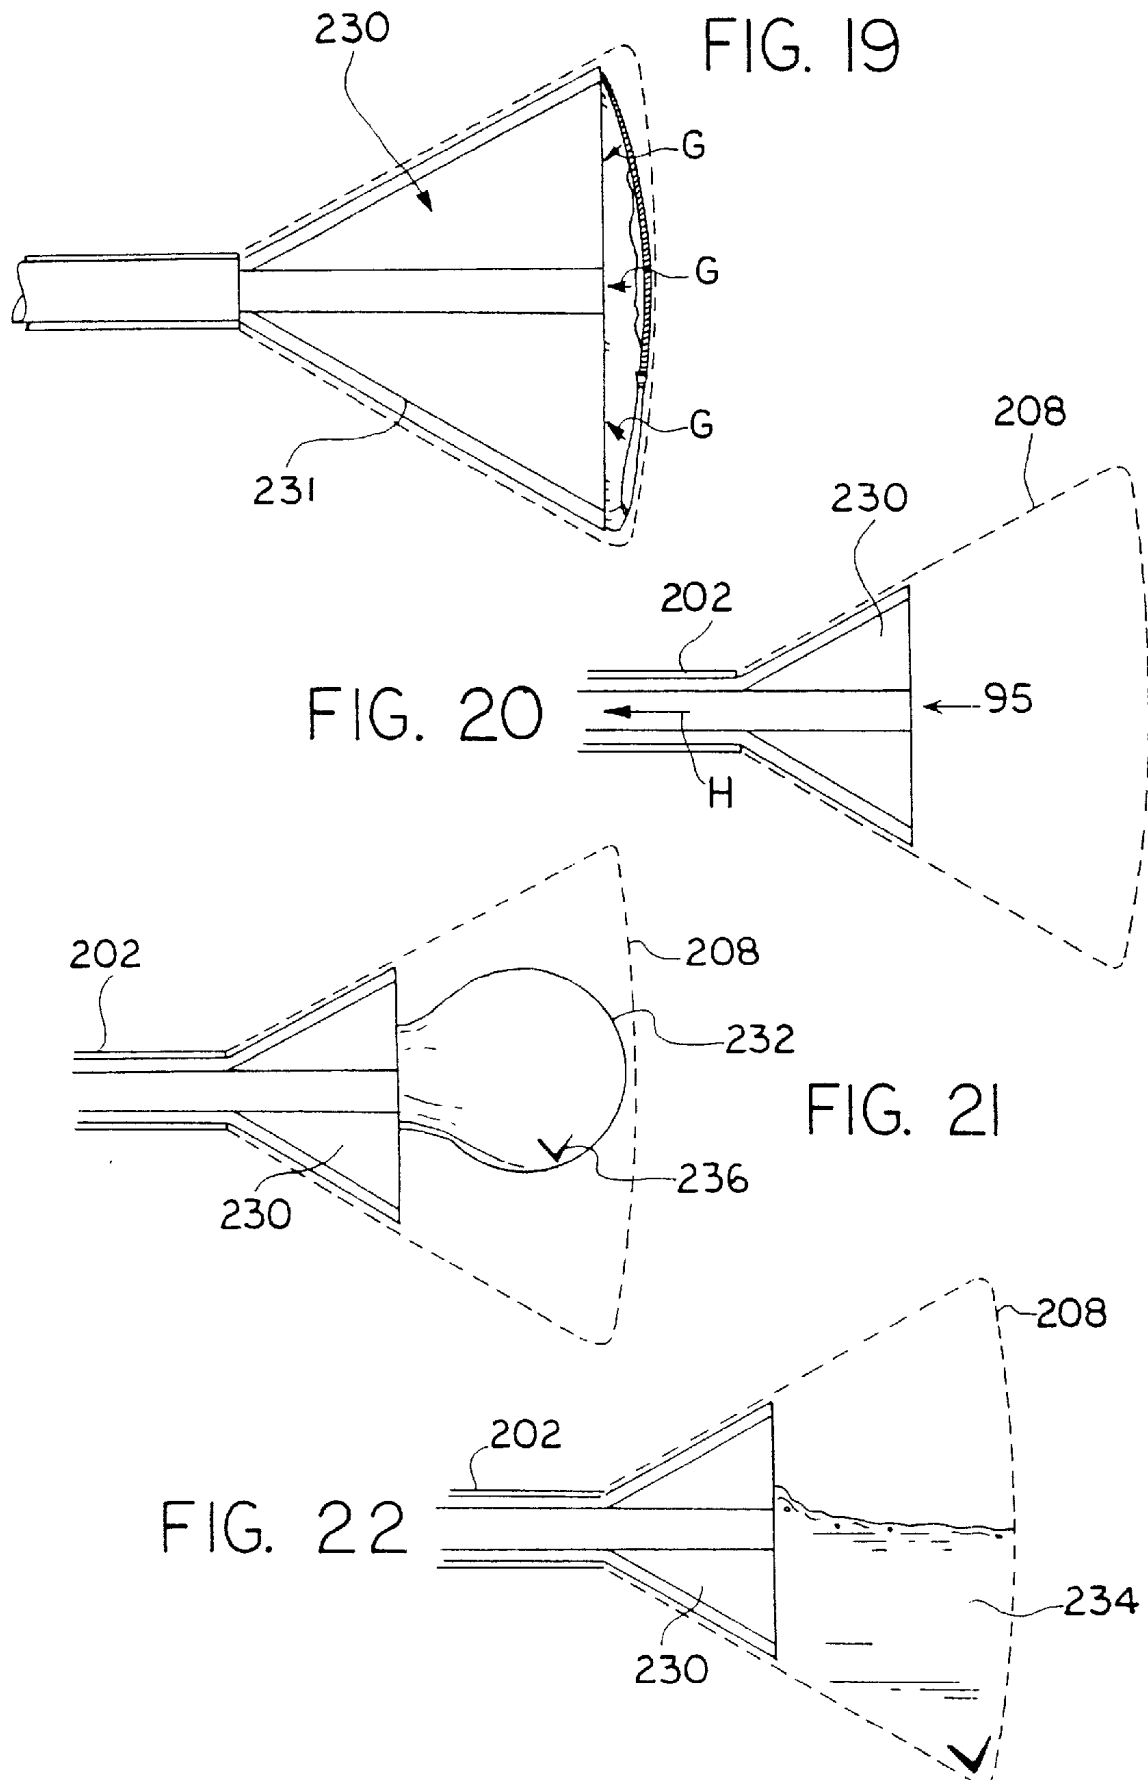


FIG. 23

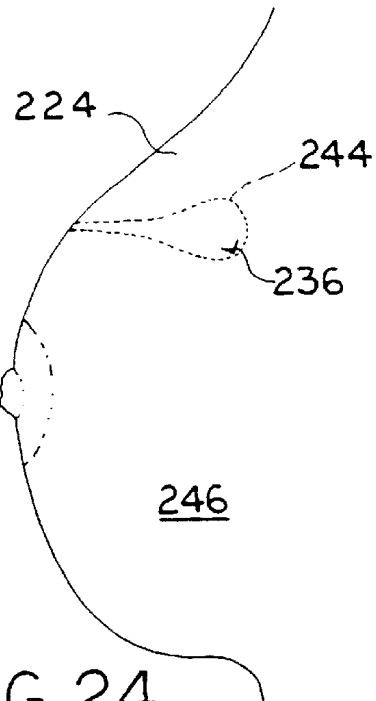
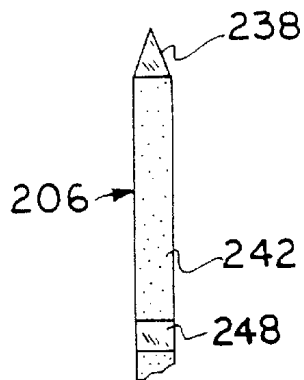


FIG. 24

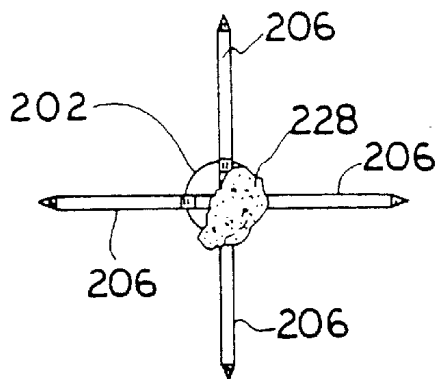


FIG. 25

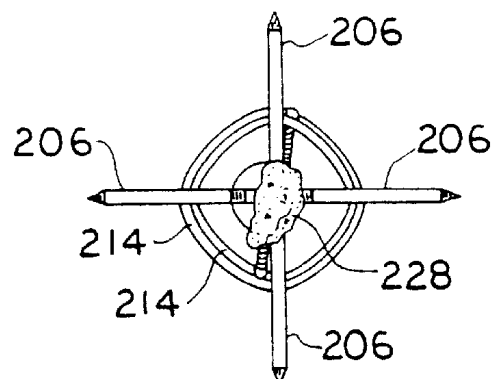


FIG. 26

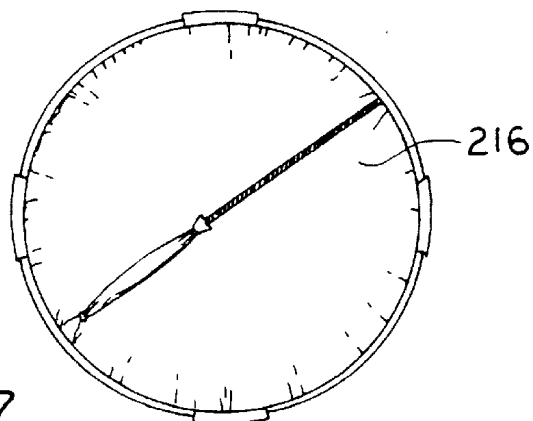


FIG. 27

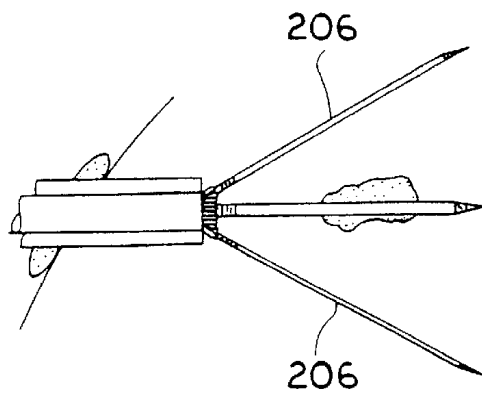


FIG. 29

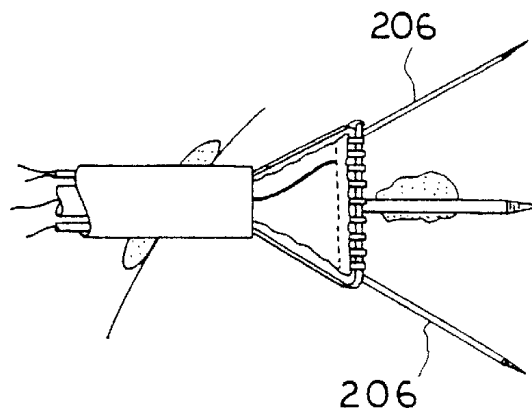


FIG. 30

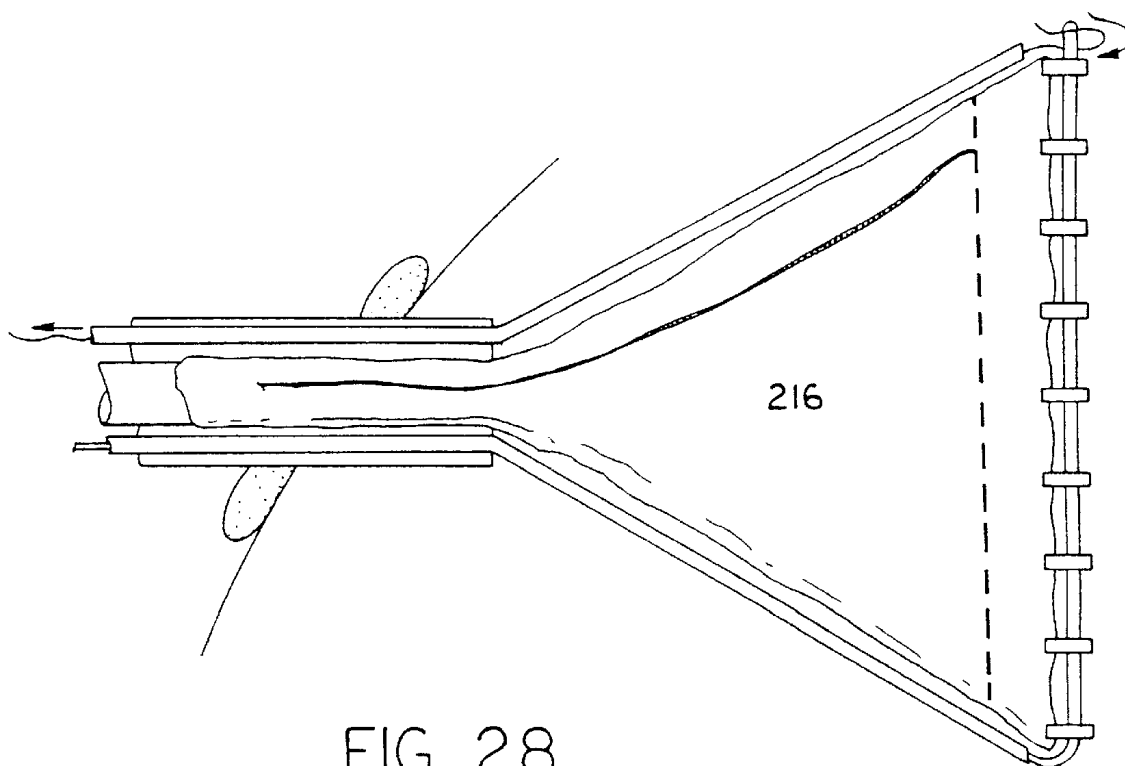


FIG. 28

## BREAST SURGERY METHOD AND APPARATUS

### CROSS REFERENCE TO RELATED PATENT APPLICATION

This application is a divisional of U.S. patent application Ser. No. 09/122,185, filed Jul. 23, 1998 which is based on and entitled, under 35 USC 120, to the benefit of the filing date of U.S. provisional application 60/053,664 filed Jul. 24, 1997 by James F. McGuckin, Jr. and entitled "Minimal Access Breast Surgery Apparatus and Method".

### FIELD OF THE INVENTION

This invention relates to surgical apparatus and methods for obtaining a subcutaneous target mass having varied shape and dimension.

### BACKGROUND OF THE INVENTION AND DESCRIPTION OF THE PRIOR ART

Modern medical diagnostics increasingly rely on complex imaging technologies to identify abnormal conditions and/or masses within the human body. Such technologies as magnetic resonance imaging (MRI), ultrasonics, computerized axial tomography (CAT scan), and mammogram x-rays, aid medical personnel in the initial identification of areas within the body exhibiting potentially dangerous, abnormal biological activity. The beneficial aspect of these technologies is their ability to image biological structures interior to the human body, providing a non-invasive tool useful in facilitating preliminary diagnosis and treatment of detected anomalies.

Detected subcutaneous biological growths, masses, etc. once identified generally require complete surgical excision or at the very least an open biopsy procedure.

Small masses such as calcifications encountered in breast tissue are generally removed in their entirety. The process of excising the mass is an invasive process, performed either during exploratory surgery or utilizing specifically designed surgical apparatus. The retrieved specimen is subsequently pathologically analyzed to determine its biological properties, i.e. benign or malignant.

Several types of apparatus are known for use in removing portions of subcutaneous masses in breast tissue targeted by these imaging techniques. However, these apparatus generally either obtain only small tissue specimens from the main mass or cause significant surface scarring due to the size of the incision necessary to remove the mass with a safe resection margin.

One type of specimen retrieval is performed with needle aspiration devices. These devices have a needle with an end hole. The needle is advanced to a desired location where a sample specimen is obtained via suction. Size and quality of specimens obtained by these devices are often poor, requiring multiple sampling of each desired target mass. Moreover, tissue encountered along the path to the desired location is unavoidably removed. A hollow channel is created upon withdrawal of the device from the patient, thereby allowing "seeding" of the hollow channel removal tract with abnormal cells. Some needle systems utilize an enlarged needle end hole, creating a boring probe which obtains a greater portion of tissue. This lessens the likelihood that the specimen will be too small but increases the amount of surface scarring due to the larger size incision required.

The percutaneous incisions needed when multiple needle channels or large needle bore channels are used often result in significant scarring, dimpling and disfigurement of surface tissue.

Needle side cutting devices have a blade extending around the circumference of a hollow needle shaft. The shaft and blade are axially rotated around the skin entry site, allowing a larger overall specimen to be excised. Target tissue is sliced and a non-contiguous specimen is obtained due to the spiral blade path. While these needle side cutting devices facilitate capture of larger sample specimens, they require resection of a relatively large core of tissue between the incision and the specimen desired to be resected. Additionally, needle side cut devices result in irregularly shaped specimens and subcutaneous cavities having irregular and/or bleeding margins.

Hence, the known devices are particularly ill suited in retrieving tissue masses from the female breast, due to the interest in preserving cosmetic integrity of the surface tissue as well as the inability of the known devices to remove most masses/calcifications during a single application.

### SUMMARY OF THE INVENTION

This invention provides surgical apparatus and methods where size and shape of subcutaneous tissue identified for excision is minimally dependent on dimensions of the percutaneous incision. The apparatus and methods have specific utility in breast surgery.

In one of its aspects this invention provides apparatus for excision of the subcutaneous target tissue mass through a cutaneous incision smaller than maximum transverse dimension of the tissue mass excised where the apparatus includes an axially elongated member including cutaneous tissue piercing means at one end and means connected to the elongated member and being radially expandable relative thereto for cutting a circumferential swath of radius greater than maximum transverse dimension of the elongated member and greater than maximum transverse cross-sectional dimension of the target tissue mass in order to separate the target tissue mass from surrounding tissue for excision thereof through the incision. The apparatus may further include an expandable aseptic shield concentric with the elongated member and axially slidably advanceable over the cutting means when in the radially expanded configuration, to collectably bag the target tissue mass detached from the patient by the cut circumferential swath, for aseptic removal in an axial direction together with the elongated member through the incision resulting from entry of the cutaneous tissue piercing means.

The apparatus may yet further include a sheath which is axially slidably concentric with the elongated member and connected to first ends of the cutting means for expanding the cutting means from generally linear and axial orientation to a curved basket-like orientation by axial movement relative to the elongated member.

In yet another of its aspects the invention provides apparatus for excision of a sub-cutaneous target tissue mass through a cutaneous incision smaller than maximum transverse dimension of the tissue mass excised where the apparatus includes an axially elongated member through which cutaneous tissue piercing means may be extended to emerge at one end thereof. The apparatus further includes means insertable through the elongated member which is radially expandable relative to the elongated member for cutting a conical swath having base radius greater than maximum transverse dimension of the elongated member and greater than maximum transverse cross-sectional dimension of the target tissue mass, for separating the target tissue mass from surrounding tissue for removal thereof through the incision. In this embodiment of the invention the

apparatus further preferably includes expandable aseptic shield means insertable through the elongated member and advanceable over the path of the cutting means to radially expand and collectibly bag the tissue mass detached from a patient by the conical swath cutting for aseptic removal in an axial direction through the elongated member and the incision resulting from entry of the cutaneous tissue piercing means.

In one of its aspects this invention preferably provides such apparatus having a piercing segment for penetrating a percutaneous entrance incision. The forward edge of the piercing segment preferably separates breast tissue in the path of the target tissue to be excised. The piercing segment preferably passes through the specimen to be excised, delivering an associated preferably circular array of preferably highly flexible cutting blades to the interior identified sub-cutaneous breast growth.

The circular array of preferably flexible cutting blades is preferably radially expanded by action of an attached actuating shaft. The blades radially expand to preferably cut by electro-cauterizing the breast tissue as they rotate around a defined periphery. The blades preferably outwardly expand to envelope the target tissue specimen and axially rotate to separate the target tissue growth from surrounding breast tissue. The target tissue growth is excised from surrounding breast tissue outside the periphery of the circular blade path and is preferably secured by a snaring membrane placed riding over the circular array of flexible cutting blades.

The membrane is preferably secured over the blade array through an integral drawstring assembly contracting the mouth of the snaring membrane. The membrane-encased blade array is preferably drawn into a recovery sheath and compressed for aseptic removal from the excision site.

In a method aspect this invention removes subcutaneous breast growths. A percutaneous surface incision is prepared for reception of surgical apparatus. Through use of suitable medical imaging technologies, the cutting apparatus device is guided to the area of the target subcutaneous breast growth while preferably maintaining a fixed subcutaneous reference point. A circular array of blades is then preferably radially expanded, preferably forming a cutting basket having dimensions larger than the target subcutaneous breast growth. Radial expansion and rotation of the electro-cauterizing blades separates the targeted growth from surrounding tissue. A snaring membrane advances over the blade array and is secured by an integral drawstring assembly. A recovery sheath compresses the membrane, encasing the target growth as it is withdrawn from the subcutaneous breast cavity. As a result, a growth which is large relative to the entrance incision is excised. In another of its method aspects this invention provides a procedure for excision of a sub-cutaneous target tissue mass through a cutaneous incision which is smaller than maximum transverse dimension of the target tissue mass to be excised where the procedure includes an advancing tissue piercing means towards a patient to create an incision in the patient's skin, slidably advancing cutting means through the incision and into sub-cutaneous tissue until in position to radially expand and cut a circumferential swath around the target tissue mass larger than the incision, cutting a circumferential swath around the target tissue mass thereby separating the target mass from the surrounding tissue, slidably advancing flexible aseptic containment means over the separated target tissue mass to a position of closure about the target tissue mass and withdrawing the flexible aseptic containment means, with the target tissue mass aseptically contained therewithin, through the incision. The method may further include collapsing the cutting means after cutting the swath.

In yet another of its method aspects, this invention provides a procedure for excision of sub-cutaneous target tissue mass through a cutaneous incision smaller than maximum transverse dimension of the target tissue mass to be excised where the procedure includes advancing tissue piercing means towards the patient to create an incision in the patient's skin, slidably advancing cutting means through the incision and into sub-cutaneous tissue until in position to gradually radially expand and cut a conical swath about the target tissue mass larger than the incision thereby separating the target tissue mass from the surrounding tissue, slidably advancing flexible aseptic containment means over the separated target tissue mass to a position of closure around the target tissue mass and withdrawing the flexible aseptic containment means with the target tissue mass aseptically contained therewithin through the incision. The invention in this aspect preferably further includes radially inwardly collapsing the cutting means, which is preferably wire, after cutting the conical swath and may yet further include radially inwardly cutting tissue along the base of said cone by a passage of the cutting wire therethrough and thereafter closing flexible aseptic containment means over about the periphery of the cone and the target tissue mass contained therewithin.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side view one embodiment of apparatus manifesting aspects of the invention with the cutting blades in radially expanded condition.

FIG. 2 is a side view of the surgical apparatus illustrated in FIG. 1 of the cutting blades in their non-expanded condition.

FIG. 3 is a front view of a modified version of the apparatus illustrated in FIGS. 1 and 2 with the cutting blades in a non-expanded condition as illustrated in FIG. 2.

FIG. 4 is a front view of a modified version of the apparatus illustrated in FIGS. 1 through 3 with the cutting blades in their radially expanded condition as illustrated generally in FIG. 1.

FIG. 5 is a broken schematic partially sectioned view of female breast tissue with the apparatus illustrated in FIGS. 1 through 4 in position within the breast in the process of removing a target tissue mass from the breast with the target tissue mass encased within an aseptic shield portion of the apparatus.

FIG. 6 is a side view of a portion of apparatus according one preferred embodiment of the invention shown in the course of practicing a preferred method aspect of the invention.

FIG. 7 is a side view of a part of the apparatus illustrated in FIG. 6 showing additional parts of one preferred apparatus embodiment of the invention in the course of practicing the inventive method.

FIG. 8 is a side view of the apparatus illustrated in FIG. 7 showing the support struts deployed.

FIG. 9 is a side view of the preferred embodiment of the apparatus showing the struts deploying about a percutaneous growth.

FIG. 10 is a side view of the preferred embodiment of the apparatus showing advancement of the cutting wire along a strut margin.

FIG. 11 is a side view of the apparatus shown in FIG. 10 with the cutting wire fully deployed.

FIG. 12 is a side view of the preferred embodiment of the apparatus depicting a new cutting wire retraction.

FIG. 13 is a side view of the preferred embodiment of the apparatus showing advancement of the bagging structure.

FIG. 14 is a side view of the preferred embodiment with tissue containment bagging completed.

FIG. 15 is a side view of the preferred embodiment of the apparatus showing the containment sheath deploying.

FIG. 16 is a side view of the preferred embodiment of the apparatus showing the containment sheath normally deployed.

FIG. 17 is an isometric view of the apparatus shown in FIG. 16.

FIG. 18 is a broken view of the tissue containment bag showing the drawstring tissue.

FIG. 19 is a side view similar to FIG. 16 but showing the containment sheath fully deployed.

FIG. 20 is a side view similar to FIG. 19 but showing the containment sheath being withdrawn.

FIG. 21 is a side view similar to FIG. 19 showing optional use of a medicament bag and a radiological marker

FIG. 22 is a side view similar to Figure, 19 showing optional use of liquid medication supported in part by the containment sheath.

FIG. 23 is an elevation of a support member.

FIG. 24 depicts the female breast and illustrated the incision resulting from practice of the method.

FIG. 25 is partial end elevation taken looking from the right in FIG. 8.

FIG. 26 is partial end elevation taken looking from the right in FIG. 10.

FIG. 27 is partial end elevation taken looking from the right in FIG. 16.

FIG. 28 is a side elevation of a second preferred embodiment of apparatus embodying the invention with hook and rod structure facilitating simultaneous performance of the cutting and bagging steps.

FIG. 29 is a partially sectioned side elevation of the embodiment of apparatus illustrated in FIG. 28 prior to deployment of the hook and rod structure facilitating simultaneous performance of the cutting and bagging steps.

FIG. 30 is a partially sectioned side elevation of the embodiment of apparatus illustrated in FIG. 28 showing deployment of the hook and rod structure facilitating simultaneous performance of the cutting and bagging steps.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

This invention provides surgical apparatus and methods for excision of percutaneous breast tissue. The apparatus has the capability to pass through an incision substantially smaller than the maximum percutaneous target specimen dimension occupying an excision site.

In one embodiment the surgical apparatus preferably cuts the target tissue with an electro-cauterizing, circular array of flexible cutting blades, preferably collecting the specimen within the periphery of an expandable blade path; thus the complete growth is preferably obtained in a single procedure. The tissue is preferably returned as a complete specimen or, alternatively, in segments within a snaring membrane. A recovery sheath is preferably positioned to further encase and compress the blade array upon contraction.

Referring to FIGS. 1 and 5, the illustrated embodiment of surgical apparatus 10 includes an inner rotatable shaft 20, a tubular recovery sheath 25, a snaring membrane 30, a

circular array of radially flexible and expandable cutting blades generally designated 50, a membrane drawstring 80, a membrane mouth section 27 of recovery sheath 25, a power source (not shown) and a tissue piercing member 65.

Membrane 30 preferably has an inner surface 32 coaxially parallel with shaft 20, and an outer surface 34. Inner surface 32 of membrane 30 preferably slidably facingly contacts the outside surface 22 of shaft 20. Membrane 30 is adjustably positioned in either the distal or proximate direction through the proximate end of shaft 20.

Tubular recovery sheath 25 preferably includes a distal pleated mouth section 27, an outer surface 45, and an inner surface 60 facingly coaxially contacting membrane 30. Inner surface 60 slidably engages outer surface 34 of membrane 30. Shaft 20 defines a rotational axis 12.

Shaft 20 rotates as denoted by arrow 12. Rotatable shaft 20 of surgical apparatus 10 is preferably rotated manually, through mechanical hand control. However, shaft 20 may be operably linked with an electrical motor, not shown, which may be driven by power source 15.

Circular cutting blade 50 includes individual flexible blades 55 which are preferably anchored between piercing member 65 and proximate end of shaft 20. Blades 55 are preferably electro-cauterizing, heated by electrical power source 15.

The materials utilized to construct surgical apparatus 10 are preferably radiopaque to be visible using modern medical imaging systems.

Referring to FIG. 2, surgical apparatus 10 is shown with individual flexible blades 55 in their non-expandable, tissue insertion orientation. In this insertion orientation the blades are parallel with and of slightly smaller diameter than tubular recovery sheath 25. Tubular recovery sheath 25 includes a snaring membrane 30 having a mouth section 27 and a drawstring 80, for drawing membrane 30 closed once it has been opened. Drawstring 80 is positioned along the distal margin of mouth section 27.

Mouth section 27 of membrane 30 expands outwardly in response to pulling of a polyvinyl tab or ripcord upon reaching the excision site. The polyvinyl tab or ripcord is preferably at the end of shaft 20 to the right, which is not shown in the drawing. The polyvinyl tab or ripcord is not visible in the drawing.

Recovery sheath 25 is preferably advanced over circular array of cutting blades 50 and preferably secured in place around the cutting blades and the excised specimen by pulling the drawstring towards the proximate end of shaft 20.

Referring now to FIG. 3, piercing segment 65 is formed to separate subcutaneous tissue in the path between the surface incision and the growth.

FIG. 3 and FIG. 4 show a modification of the embodiment of surgical apparatus 10 illustrated in FIGS. 1 and 2. In the modification illustrated in FIGS. 3 and 4, shaft 20 includes an interior channel 21 extending forwardly through the center of the cutting blade circular array 50 and connecting with piercing membrane 65. A shaft stem section which is not shown connects to a dye port 70 in piercing member 65 for optional delivery of marking fluid to subcutaneous areas. Dye port 70 enables operators of apparatus 10 to deliver marking substances to the subcutaneous excision site. Alternatively, a titanium clip can be ejected from a clip fastening surface 75 for marking excision sites for future medical imaging analysis.

As shown in FIG. 4, the circular array 50 of cutting blades 55 expands radially upon relative moment of shaft 20 in the

direction of piercing member **65**, defining a cutting orientation. Flexible cutting blades **55** are preferably electro-cauterizing, cutting as they outwardly expand and as they rotate after radially outward expansion. Upon rotation of flexible cutting blades **55** in the direction indicated by arrow **A** in FIG. **4**, the target tissue growth is separated from the surrounding subcutaneous breast tissue and remains within the periphery of the circular blade path.

As variations, the circular array of flexible cutting blades **50** may employ radially expandable ultrasonic cutting means, referred to as "harmonic scalpels", or laser cutting means.

The method of excising subcutaneous breast target tissue growths is shown in FIG. **5**. In FIG. **5** the edges of a surgical site where a growth has been removed is indicated as **100**; removal of the growth has created subcutaneous cavity **105**. As shown, subcutaneous cavity **105** is separated from a surface incision **126** by an excision distance **95**.

In preparation for removing the subcutaneous breast tissue growth, percutaneous tissue is cut to produce an incision **126**. A piercing member **65** of surgical apparatus **10** is placed at incision **126**. An excision path is created by forcing piercing member **65** through the subcutaneous breast tissue between the percutaneous incision **126** and the identified target tissue growth. The target tissue growth is the desired excision site which is visualized via a medical imaging system such as ultrasound or mammography. The tip of surgical apparatus **10** is advanced until the piercing segment passes through the growth to be excised.

Once apparatus **10** is properly positioned relative to the target tissue mass as indicated by the medical imaging system, the proximate end of shaft **20** is urged towards piercing member **65**. Flexible cutting blades **55** radially expand to define subcutaneous margin **100**. The array of flexible cutting blades **50** is then rotated about the shaft axis as indicated by arrow **12**, separating the target tissue growth along margin **100**.

Membrane **30** is then advanced over the circular array of cutting blades **50** and secured by pulling integral drawstring **80** to the right in FIG. **5** towards the end of shaft **20**. Drawstring **80** secures the distal margin of membrane **30**. The mouth **27** of sheath **25** is expanded by the polyvinyl pull tab when drawn towards the end of shaft **20**.

Circular array of cutting blades **55**, now encased by membrane **30**, is drawn into the mouth of snaring sheath **25** and removed from subcutaneous cavity **105**.

In the preferred embodiment shown in FIGS. **5-8**, a plurality of guide struts or support members generally designated **206** are advanced through a skin surface incision **126** and past a target tissue mass **228** via a tubular housing defining an extrication channel **26**. As shown in FIGS. **7** and **8**, guide struts (support members) **206** are inserted through surface incision **126** and moved to a position to define a conically shaped desired excision margin respecting the target tissue mass **228**, shown in FIG. **11**. As shown in FIGS. **8** through **10**, the extension and configuration of struts **206** from surface incision **126** past target mass **228** creates a gradually expanding subcutaneous retrieval path referred to as a conical penumbra **208**.

As shown in FIGS. **10-13**, an electro-cauterizing cutting snare in the form of wire loops is advanced along guide struts **206**, creating a conically shaped excision margin.

Referring to FIGS. **10-17**, the cutting snare **155** is advanced beyond the length of the guide struts **150** to where cutting snare **155** is drawn closed by pulling an integral drawstring **160** towards the exterior of the skin. As shown in

FIGS. **15** through **17**, mouth **27** of sheath **25** is advanced along the defined extrication channel **26** and expanded by pulling the polyvinyl pull tab which is not shown. As shown in FIGS. **18** through **24**, guide struts **150** are enveloped by snaring sheath **25** and may be removed from subcutaneous cavity through extrication channel **26**.

In one preferred practice of the invention as depicted in FIGS. **6** through **27** and using the apparatus shown therein, apparatus **200** includes a support conduit designated generally **202** and axially elongating skin cutting means **204** having a cutting blade **205** which is insertable through support conduit **202** as illustrated generally in FIG. **6**. Skin cutting means **204** and particularly cutting blade **205** to make a suitable incision in the skin, preferably in the human breast designated generally **246** in FIG. **24** where the skin is designated **224** in the drawing figures including FIG. **6** and FIG. **24**. The incision is made to provide access to a target tissue mass designated generally **228** in the drawings which has been previously identified preferably using x-ray mammographic techniques as being dangerous and hence to be removed.

Once a skin incision, designated generally **248** in the drawings, has been made by skin cutting means **204** and appropriate use of cutting blade **205** thereof, skin cutting means **204** is preferably withdrawn axially through support conduit **202**, moving to the left in FIG. **6**, and support means designated generally **207** and having a plurality of support members designated generally **206** is inserted axially through support conduit **202** and into the sub-cutaneous tissue **226** of the breast as indicated generally in FIG. **7**, with the direction of travel of support means **207** indicated generally by arrow **A** in FIG. **7**.

As support members **206** of support means **207** are inserted into the sub-cutaneous tissue **226**, support members expand **206** radially due to influence of resilient spring means **210**, illustrated in dotted lines in FIG. **8** and forming a portion of support means **207** to a position where support members **206** define a conical penumbra enveloping target tissue mass **228**. The conical penumbra **208** defines planes of incision for removal of target tissue mass **228** and a medically advisable amount of surrounding sub-cutaneous healthy tissue **226**.

As support members **206** radially diverge one from another due to the influence of resilient spring means **210**, remote tips **209** of support members **206** define a circle which in turn defines the base of conical penumbra **208**. Remaining, proximate ends of support members **206** are pivotally connected to a supporting shaft, not numbered in the drawings, for pivoting rotation thereabout in response to spring **210**.

Once support members **206** have been deployed, into the position illustrated in FIG. **8**, the target tissue mass is well within the conical penumbra defined by support members **206**.

A pair of tissue cutting wire loops **214** are positioned about the bases of support members **206**, as illustrated generally in FIG. **9**, and are supported by and emerge from respective support catheters **212**, also illustrated in FIG. **9**. Support catheters **212** are sufficiently rigid that when force is applied in the axial direction to support catheters **212** is indicated by arrows **B** and **B'** in FIG. **9**, support catheters **212** move to the right in FIG. **9** advancing tissue cutting wire loops **214** along the outer periphery of support members **204** as depicted generally in FIG. **10**.

As support catheters **212** are moved to the right in FIGS. **9** and **10**, additional lengths of tissue cutting wires **214** is

supplied through support catheters **212** so that tissue cutting wires **214**, which are in the form of loops about the exterior surfaces of support members **206** as illustrated in FIG. **10**, can enlarge as the circumference of the conical penumbra, measured about the slant surface of the conical penumbra defined by support members **206** as illustrated in FIG. **10**, increases.

Support catheters **212** are urged to the right in FIG. **10** until tissue cutting wire loops **214** pass the remote tips **209** of support members **206** and define a pair of essentially coincident and in any event concentric circles forming the base of conical penumbra **208**.

Once tissue cutting wire loops **214** have reached this position due to movement of support catheters **212**, the wire forming tissue cutting wire loops **214** are drawn to the left, through respective support catheters **212**. This causes the respective tissue cutting wire loops **214** each to cinch together as the wires are withdrawn as indicated generally by arrows C, C' in FIG. **11**. As the tissue cutting wires are drawn to the left in FIG. **11** through respective support catheters **212**, the wire loops each cinch together thereby cutting circular incisions through the sub-cutaneous tissue; this action is illustrated generally in FIG. **11** where the respective tissue cutting wire loops are shown partially, but not completely, cinched. Two wire loops are preferable, for symmetrical application of force.

Once tissue cutting wire loops **214** have been completely cinched and the wires withdrawn to the position illustrated in FIG. **12** by continually drawing the respective tissue cutting wires **214** in the directions indicated by arrows D, D' in FIG. **12**, the conical penumbra **208** defines planes of incision created by action of tissue cutting wire loops **214** where those planes of incision are shown in dotted lines in FIG. **12**. Note that two dotted lines are shown at the extreme right of FIG. **12** to indicate that two circular planar incisions created by action of respective tissue cutting wire loops **214**. Desirably, these two circular planar incisions are essentially congruent one with another.

Once tissue cutting wire loops **214** have been completely withdrawn into the position illustrated in FIG. **12**, a suitable tissue containment bag structure **216** is advanced outwardly of support conduit **202**, around the outer periphery of support means **207** and particularly support members **206**. Tissue containment bag **216** preferably has a pair of drawstrings **218**, which may be metal, suture material, suitable plastic monofilaments and the like, which are sewn or threaded into tissue containment bag **216** proximate the vertical right-hand margin thereof appearing in FIG. **13**. Drawstrings **218** have extremity portions **219** illustrated in FIG. **13**.

Once tissue containment bag **216** has been advanced so that its margin **217** has traveled inwardly with respect to the breast past the remote tips **209** of members **206**, to the position generally corresponding to the base of conical penumbra **208**, drawstring extremities **219** are pulled to the right in FIGS. **13** and **14**, thereby causing looped drawstrings **218**, **218'** to close margin **217** of bag **216**, causing margin **217** to circularly gather as shown in FIG. **14**.

Once margin **217** of bag **216** has been circularly gathered thereby effectively closing bag **216** about the target tissue mass **228** of interest, an expandable sheath **230** is advanced through the interior of support conduit **202** about tissue containment bag **216** with expandable sheath **230** moving in the direction indicated by arrow F in FIG. **15**. Expandable sheath **230** has a pleated expandable portion **231**, which is resilient and seeks to expand radially outwardly to relieve

internal stresses such that upon expandable portion **231** reaching terminus **203** of support conduit **202** which is within sub-cutaneous tissue **226**, expandable portion **231** expands radially into the configuration illustrated generally in FIG. **16**. Expandable portion **231** of sheath **230** is preferably pleated, as depicted in FIG. **17**.

Expandable sheath **230** and particularly expandable portion **231** thereof provides support in the form of radially inwardly directed force on tissue containment bag **216** as bag **216** with target tissue mass **228** enveloped therein is pulled to the left in FIGS. **16**, **19** and **20** as indicated generally by arrows G in FIG. **19** and arrow H in FIG. **20**. The radially inward force provided on tissue containment bag **216** and target tissue mass **228** contained therein by expandable sheath **230**, as tissue containment bag **216** is pulled to the left in FIG. **19**, compresses tissue mass **228** into a smaller volume and essentially squashes tissue mass **228** into a longitudinally elongated form for passage through support conduit **202**. Application of the radial force to tissue mass **228** reduces the transverse cross-sectional dimension of tissue mass **228** to at least the diameter of support conduit **202** as tissue containment bag **216** is drawn through the funnel-shaped expandable portion **231** of sheath **230** and into the interior of support conduit **202**.

Once bag **216** and tissue mass **228** contained therein have been removed from the sub-cutaneous tissue, expandable sheath **230** may be removed by pulling it in the direction indicated by arrow H in FIG. **20**.

Optionally, while expandable sheath **230** is in position and perhaps only part way removed from the resected area of interest, a medicament bag **232** may be inserted into the resected area through the interior of support conduit **202** and through expandable sheath **230**, as indicated in FIG. **21**. This may provide means for supplying radioactive gas to provide radiation therapy to the resected area. Additionally, a radiographic marker depicted as **236** may be implanted into the resected area of interest, using the balloon or otherwise while expandable sheath **230** remains in the area of the resection. As an additional option while expandable sheath remains in position thereby maintaining a void in the resected area of the sub-cutaneous tissue, liquid medication indicated schematically as **234** in FIG. **22** may be supplied to the resected area. In such case expandable sheath maintaining the resected tissue in a spaced-apart condition facilitates application of the liquid medication to all parts of the resected volume.

Utilizing the method and apparatus as described hereinabove results in a small, tunnel like incision approaching the skin of the breast with a larger, resected mass being removed therefrom; the resulting internal incision is depicted **244** in FIG. **24**.

Support members **206** preferably have metallic tips to provide radiopaque characteristics as indicated by **230** in FIG. **23** and may also have metallic or other radiopaque marker bands indicated as **248** in FIG. **23**. Central portions **242** of support members **206** are preferably radiolucent as indicated by the stippling in FIG. **23**.

In FIGS. **28** through **30** the cutting wire and bag are connected by hook and rod structure as illustrated. Alternatively the wire can be cryogenic, e.g. eject cryogenic material therefrom, or eject a chemical therefrom for chemical ablation.

I claim the following:

1. Apparatus for excision of a sub-cutaneous target tissue mass through a cutaneous incision smaller than maximum transverse dimension of the tissue mass excised, comprising

## 11

- a. an axially elongated member including cutaneous tissue piercing means at one end;
- b. means connected to said elongated member and being radially expandable relative thereto for cutting a circumferential swath of tissue internally of the cutting means of a radius greater than maximum transverse dimension of said elongated member and greater than maximum transverse cross-sectional dimension of said target tissue mass to separate said target tissue mass from surrounding tissue for excision thereof through said incision.
2. Apparatus of claim 1 further comprising:
  - a. expandable aseptic shield means concentric with said elongated member, axially slidably advanceable over said cutting means when in the radially expanded configuration to collectably bag said target tissue mass detached from a patient by said circumferential swath cutting for aseptic removal in an axial direction together with said elongated member through said incision resulting from entry of said cutaneous tissue piercing means.
3. Apparatus of claim 2 further comprising:
  - a. a sheath axially slidably concentric with said elongated member, connected to first ends of said cutting means for expanding said cutting means from generally linear and axial orientation to a curved basket-like orientation by axial movement relative to said elongated member.
4. Apparatus of claim 2 wherein second ends of said cutting means are connected to said elongated means proximate said tissue piercing means.
5. Apparatus of claim 2 wherein said aseptic shield means is a flexible membrane.
6. Apparatus of claim 2 further comprising drawstring means for closing said shield about said cutting means and any target tissue mass contained therewithin.
7. Apparatus of claim 1 further comprising
  - a. means for electrically heating said cutting means for cauterizingly cutting to detach the target tissue mass from surrounding tissue.
8. Apparatus of claim 2 further comprising
  - a. means for electrically energizing said cutting means for coagulating tissue around said target tissue mass during cutting.
9. Apparatus of claim 1 further comprising
  - a. means for rotating said cutting means.
10. The apparatus of claim 1, further comprising an expandable collection member distally movable between a first position within the elongate member and a second position extending from the elongate member to remove said target tissue mass, the collection member movable independently of movement of the cutting means.
11. A method for excision of a sub-cutaneous target tissue mass through a cutaneous incision smaller than maximum transverse dimension of the tissue mass excised, comprising:
  - a. advancing tissue piercing means towards a patient to create an incision in the patient's skin;
  - b. slidably advancing cutting means through said incision and into sub-cutaneous tissue until in position to radially expand said cutting means and cut a circumferential swath around said target tissue mass larger than said incision;
  - c. cutting a circumferential swath around said target tissue mass thereby separating said target tissue mass from said surrounding tissue;
  - d. slidably advancing flexible aseptic containment means over said separated target tissue mass to a position of closure around said target tissue mass;

## 12

- e. withdrawing said flexible aseptic containment means with said target tissue mass aseptically contained there-within through said incision.
12. The method of claim 11 further comprising collapsing said cutting means after cutting said swath.
13. The method of claim 11 further comprising fluoroscopically guiding said tissue piercing means through said incision and into sub-cutaneous tissue until said cutting means is in position to cut a circumferential swath around said target tissue mass.
14. The method of claim 11 further comprising ultrasonographically guiding said tissue piercing means through said incision and into sub-cutaneous tissue until said cutting means is in position to cut a circumferential swath around said target tissue mass.
15. The method of claim 11 further comprising x-ray mammographically guiding said tissue piercing means through said incision and into sub-cutaneous tissue until said cutting means is in position to cut a circumferential swath around said target tissue mass.
16. The method of claim 11 further comprising computer-aided tomographically guiding said tissue piercing means through said incision and into sub-cutaneous tissue until said cutting means is in position to cut a circumferential swath around said target tissue mass.
17. A surgical apparatus for cutting a tissue mass comprising:
  - an elongated housing having a distal portion;
  - a rotatable shaft positioned in the elongated housing;
  - and a plurality of flexible electrocautery cutting blades extending from the housing, the plurality of cutting blades being radially expandable from a first position defining a first diameter to a second position defining a second larger diameter, the plurality of cutting blades being rotatable and transmitting electrical energy to the tissue mass to cut the tissue mass.
18. The apparatus of claim 17, wherein the shaft is manually rotated.
19. The apparatus of claim 17, wherein the shaft is rotated by a power source.
20. The apparatus of claim 17, further comprising a membrane advanceable with respect to the cutting blade to collect the cut tissue mass.
21. The apparatus of claim 17, further comprising a drawstring operatively associated with the membrane to close the membrane about the cut tissue.
22. The apparatus of claim 17, wherein the movement of the shaft moves the cutting blades to the radially expanded position.
23. The apparatus of claim 22, wherein movement of the shaft in a distal direction moves the cutting blades to the radially expanded position.
24. The apparatus of claim 17, wherein the flexible blades form a circular array in the second position.
25. The apparatus of claim 24, wherein the flexible blades are parallel in the first position.
26. A surgical apparatus for cutting a tissue mass comprising:
  - an elongated housing having a distal portion;
  - a rotatable shaft positioned in the elongated housing;
  - a plurality of cutting blades extending from the housing, the plurality of cutting blades being radially expandable from a first position defining a first diameter to a second position defining a second larger diameter to cut the tissue mass; and
  - a membrane advanceable with respect to the cutting blades to remove the cut tissue.

## 13

27. The apparatus of claim 26, further comprising a drawstring operatively associated with the membrane to close the membrane about the cut tissue.

28. A surgical apparatus for cutting a tissue mass comprising:

an elongated housing having a distal portion and a tissue penetrating member at the distal portion for penetrating tissue to access the tissue mass;

an actuation member positioned in the elongated housing;

a plurality of cutting blades extending from the housing, the plurality of cutting blades connected to a distal portion of the housing and being radially expandable from a first position defining a first diameter to a second position defining a second larger diameter to cut the tissue mass, the plurality of cutting blades being radially expandable in response to actuation of the actuation member.

29. The apparatus of claim 28, wherein the cutting blades are electrocautery blades to electrocauterize tissue.

30. The apparatus of claim 29, further comprising a shaft rotatably mounted within the elongated housing to rotate the cutting blades in their second position to cut tissue.

31. The apparatus of claim 30, wherein the plurality of cutting blades form a circular array in the second position.

32. The surgical apparatus of claim 30, wherein the tissue is cut internal of the cutting blades.

33. A surgical apparatus for cutting a tissue mass via application of electrical energy to tissue comprising an elongated housing, the elongated housing having a distal portion and a first transverse dimension, and a cutting member radially extendable with respect to the housing, the cutting member being rotatable to separate the target tissue mass from surrounding tissue thereby cutting a swath of tissue having a transverse dimension greater than the first transverse dimension of the elongated housing, the cutting member being connectable to an electrical power source to transmit electrical energy to the tissue to cut the tissue mass.

34. The apparatus of claim 33, further comprising a rotatable shaft positioned in the elongated housing, wherein the cutting member is rotated by rotation of the shaft.

35. The apparatus of claim 34, wherein the shaft is manually rotated.

36. The apparatus of claim 34, wherein the shaft is rotated by a power source.

37. The apparatus of claim 33, wherein the distal portion of the elongated housing is configured to pierce tissue.

38. The apparatus of claim 33, further comprising a membrane advanceable with respect to the cutting member to collect the cut tissue mass.

39. The apparatus of claim 33, further comprising a plurality of cutting members rotatable to cut the swath of tissue.

40. The apparatus of claim 33, further comprising a slidable member positioned in the elongated housing wherein movement of the slidable member moves the cutting member to the radially extended position.

41. The apparatus of claim 33, wherein the cutting member is parallel to the longitudinal axis of the housing in a retracted position.

42. The surgical apparatus of claim 33, wherein the transmission of electrical energy via the cutting member cuts the tissue mass internal of the cutting member.

43. A surgical apparatus for cutting a tissue mass comprising an elongated housing configured to penetrate tissue, and means for cutting a circumferential swath of tissue to separate the tissue mass from surrounding tissue, the cutting means connected to an electrical power source and radially

## 14

extendable from a first position to a second position further spaced from the housing, the cutting means applying electrical energy to tissue and being rotatable to cut the circumferential swath of tissue internal of the cutting means.

44. The surgical apparatus of claim 43, further comprising means to rotate the cutting means.

45. The surgical apparatus of claim 43, further comprising a membrane advanceable with respect to the cutting means to remove the tissue.

46. The surgical apparatus of claim 43, further comprising a slidable member positioned in the elongated housing wherein axial movement of the slidable member radially extends the cutting means.

47. The apparatus of claim 43, wherein the cutting means comprises a plurality of cutting blades forming a circular array in the second position.

48. The apparatus of claim 43, further comprising an expandable member advanceable distally with respect to the housing to remove the cut swath of tissue.

49. The apparatus of claim 48, wherein the expandable member is distally movable between a first position within the elongated housing and a second position extending from the elongated housing, the expandable member movable independently of movement of the cutting means between the first and second positions.

50. The apparatus of claim 49, further comprising tissue penetrating means extending distally from the elongated housing.

51. The apparatus of claim 43, wherein the elongated housing is configured with a pointed piercing member to penetrate tissue.

52. A method of cutting a circumferential swath of tissue comprising:

a) providing an elongated housing having a longitudinal axis and a first transverse dimension, the housing extending through an incision of a first dimension;

b) extending at least one cutting member radially with respect to the housing;

c) applying electrical energy to the cutting member to apply electrical energy to the tissue; and

d) rotating the cutting member about the longitudinal axis of the housing to cut a circumferential swath of tissue having a radius greater than the first transverse dimension of the elongated housing and cutting a periphery having a dimension larger than the first dimension.

53. The method of claim 52, further comprising the step of advancing a membrane with respect to the at least one cutting member for removal of the cut swath of tissue.

54. The apparatus of claim 52, further comprising the steps of:

providing an expandable collection member; and

advancing the expandable collection member from a position within the housing to expand the collection member, wherein the step of advancing the collection member occurs after the step of rotating the cutting member.

55. A surgical apparatus for cutting a tissue mass via application of electrical energy to tissue comprising an elongated housing, the elongated housing having a distal portion and a first transverse dimension, and a cutting member radially extendable with respect to the housing, the cutting member being rotatable to separate the target tissue mass from surrounding tissue thereby cutting a swath of

**15**

tissue having a transverse dimension greater than the first transverse dimension of the elongated housing, the cutting member being connectable to an electrical power source to transmit electrical energy to the tissue to cut the tissue mass, and an expandable collection member advanceable distally to remove the cut swath of tissue.

**56.** The apparatus of claim **55**, wherein the expandable member is distally movable between a first position within

**16**

the elongated housing and a second position extending from the elongated housing.

**57.** The apparatus of claim **56**, further comprising a tissue piercing element extending distally from the elongated housing.

\* \* \* \* \*

专利名称(译)	乳房手术方法和设备		
公开(公告)号	<a href="#">US6589252</a>	公开(公告)日	2003-07-08
申请号	US09/838722	申请日	2001-04-19
申请(专利权)人(译)	REX MEDICAL		
当前申请(专利权)人(译)	REX MEDICAL		
[标]发明人	MCGUCKIN JR JAMES F		
发明人	MCGUCKIN, JR., JAMES F.		
IPC分类号	A61B17/32 A61B10/00 A61B17/22 A61B18/14 A61B18/20 A61B18/22 A61B19/00 A61B17/00 A61B17/02 A61B10/02 A61B17/24		
CPC分类号	A61B10/0266 A61B17/221 A61B17/320016 A61B17/32056 A61B10/0041 A61B17/0218 A61B17/320725 A61B18/14 A61B18/1482 A61B19/38 A61B19/54 A61B2017/00287 A61B2017/00796 A61B2017/008 A61B2017/2212 A61B2017/32004 A61B2017/320072 A61B2018/1407 A61B2018/2238 A61B90/39 A61B90/40 A61B2017/320074		
优先权	60/053664 1997-07-24 US		
其他公开文献	US20020019640A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

一种用于切割组织块的外科手术设备，包括具有远端部分的细长壳体，位于细长壳体中的可旋转轴，以及从壳体延伸的多个柔性电烙切割刀片，其中多个切割刀片可从径向扩展。第一位置将第一直径限定为第二较大直径，并且刀片可旋转并传递电能以切割组织块。

