



US 20080275452A1


(19) **United States**(12) **Patent Application Publication**
Lang et al.(10) **Pub. No.: US 2008/0275452 A1**(43) **Pub. Date: Nov. 6, 2008**(54) **SURGICAL CUTTING GUIDE**(75) Inventors: **Philipp Lang**, Lexington, MA (US); **Wolfgang Fitz**, Sherborn, MA (US); **Daniel Steines**, Palo Alto, CA (US); **Raymond A. Bojarski**, Attleboro, MA (US)Correspondence Address:
BROMBERG & SUNSTEIN LLP
125 SUMMER STREET
BOSTON, MA 02110-1618 (US)(73) Assignee: **CONFORMIS, INC.**, Burlington, MA (US)(21) Appl. No.: **12/139,324**(22) Filed: **Jun. 13, 2008****Related U.S. Application Data**

(63) Continuation-in-part of application No. 11/671,745, filed on Feb. 6, 2007, which is a continuation-in-part of application No. 11/002,573, filed on Dec. 2, 2004, which is a continuation-in-part of application No. 10/724,010, filed on Nov. 25, 2003, which is a continuation-in-part of application No. 10/305,652, filed on Nov. 27, 2002, which is a continuation-in-part of application No. 10/160,667, filed on May 28, 2002, said application No. 11/671,745 is a continuation-in-part of application No. 10/728,731, filed on Dec. 4, 2003, said application No. 11/671,745 is a continuation-in-part of application No. 10/681,750, filed on Oct. 7, 2003.

(60) Provisional application No. 60/943,726, filed on Jun. 13, 2007, provisional application No. 60/765,592, filed on Feb. 6, 2006, provisional application No. 60/785,168, filed on Mar. 23, 2006, provisional application No. 60/788,339, filed on Mar. 31, 2006, provisional application No. 60/293,488, filed on May 25, 2001, provisional application No. 60/363,527, filed on Mar. 12, 2002, provisional application No. 60/380,695, filed on May 14, 2002, provisional application No. 60/380,692, filed on May 14, 2002, provisional application No. 60/431,176, filed on Dec. 4, 2002, provisional application No. 60/467,686, filed on May 2, 2003, provisional application No. 60/416,601, filed on Oct. 7, 2002.

Publication Classification(51) **Int. Cl.**
A61B 17/56 (2006.01)(52) **U.S. Cl.** **606/88; 606/87**(57) **ABSTRACT**

The present invention is directed to a surgical cutting guide for guiding a surgical instrument along a cutting path located on a biological tissue. The surgical guide includes a contact surface that conforms to a surface associated with the tissue and at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a second direction along a cutting path across the surface of the tissue. The guide further contains a stop for restricting movement of the surgical instrument in the second direction along the cutting path. The stop is based at least, in part, on patient specific information.

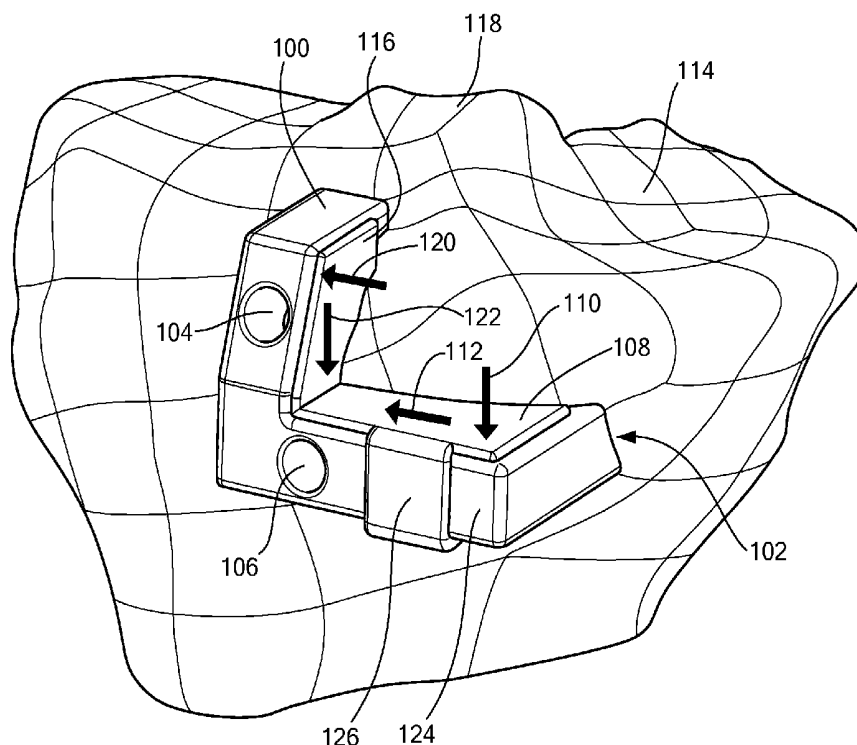

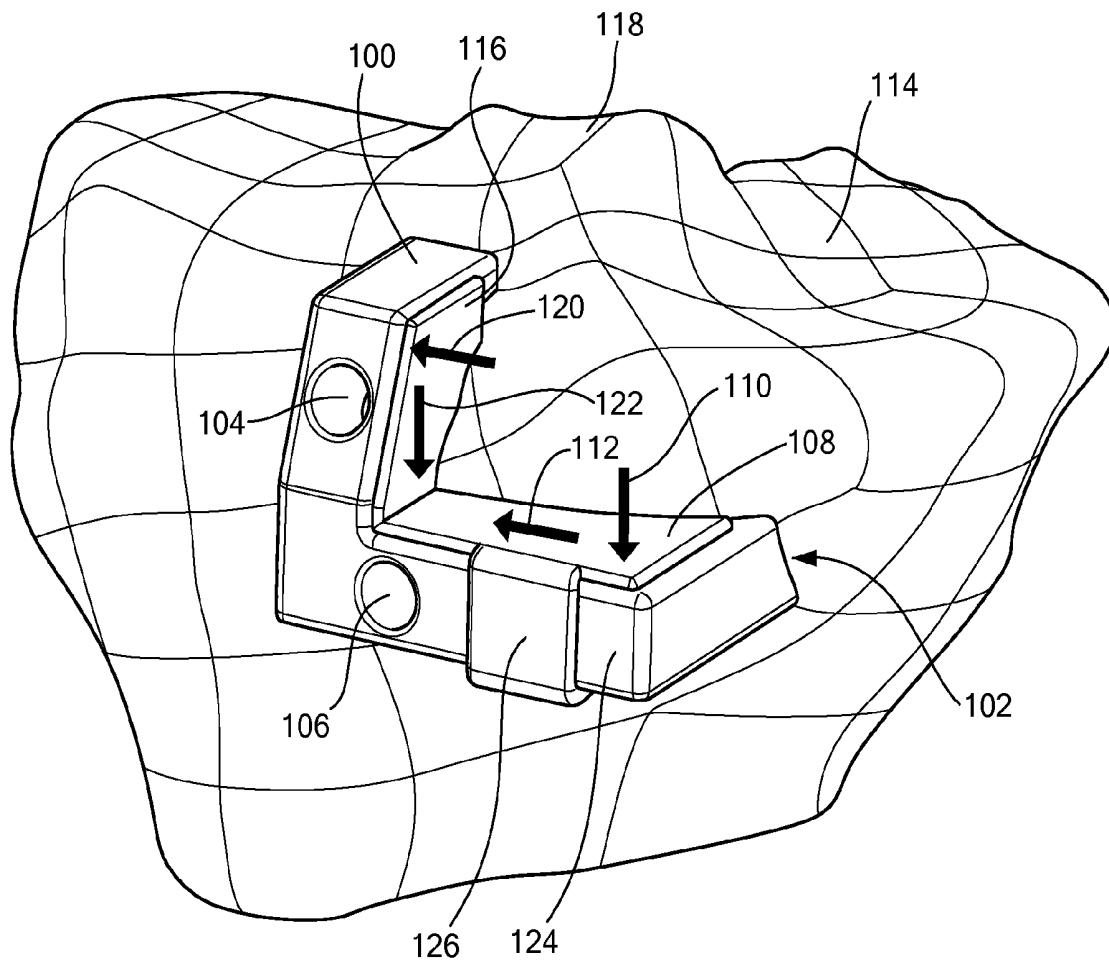


FIG. 1

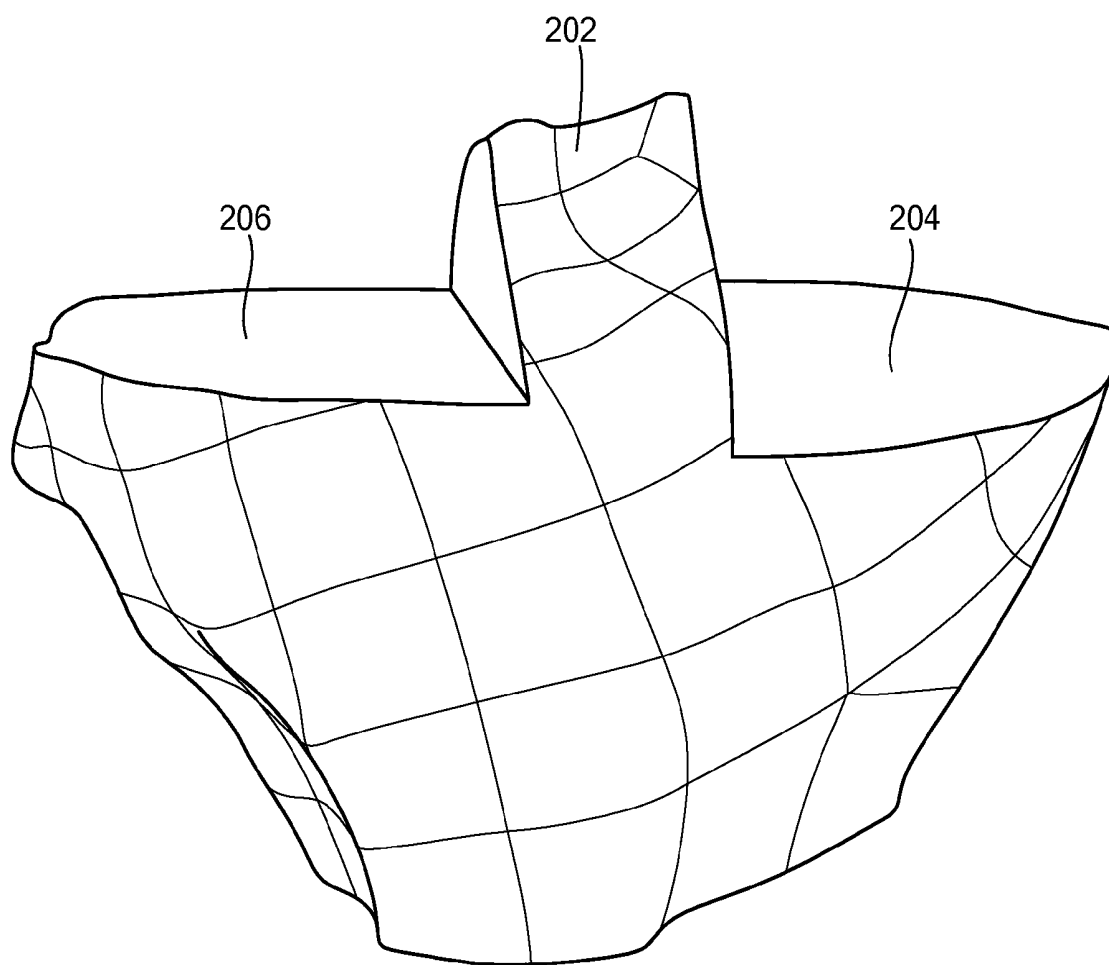


FIG. 2

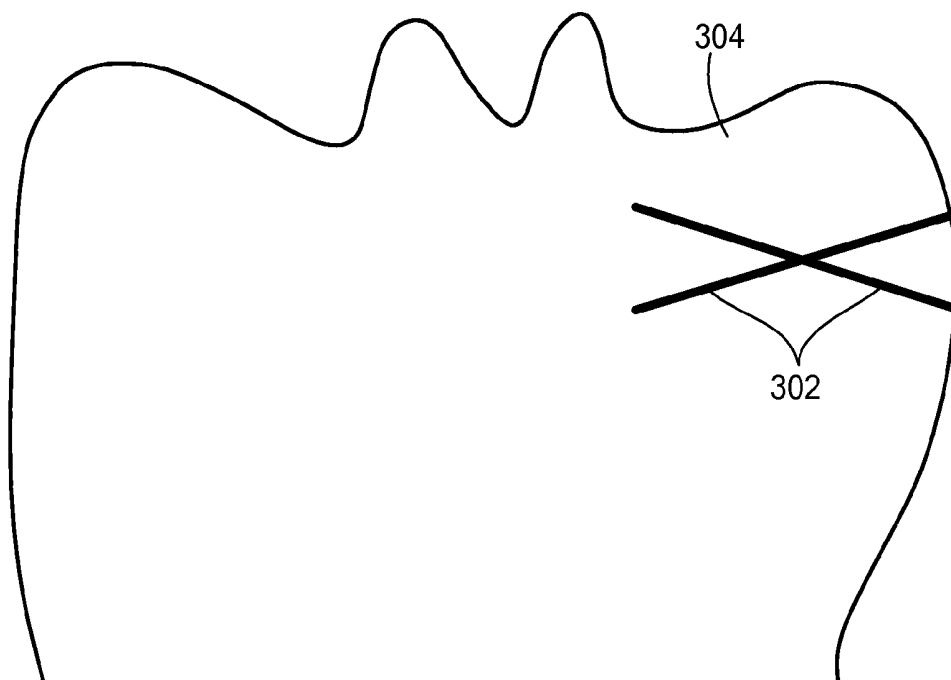


FIG. 3

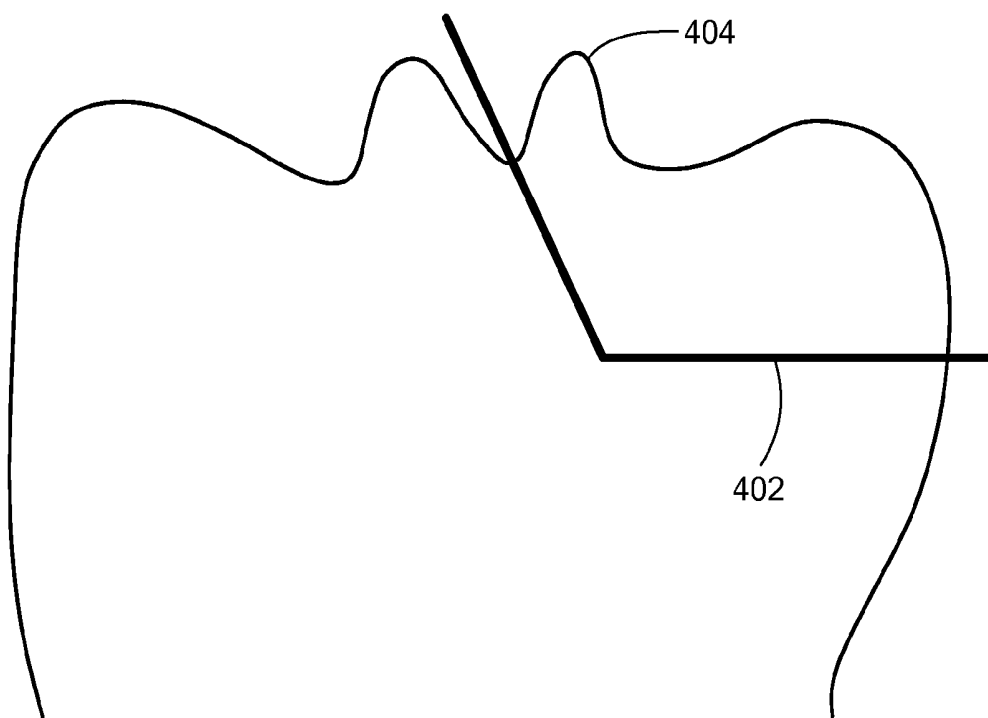


FIG. 4

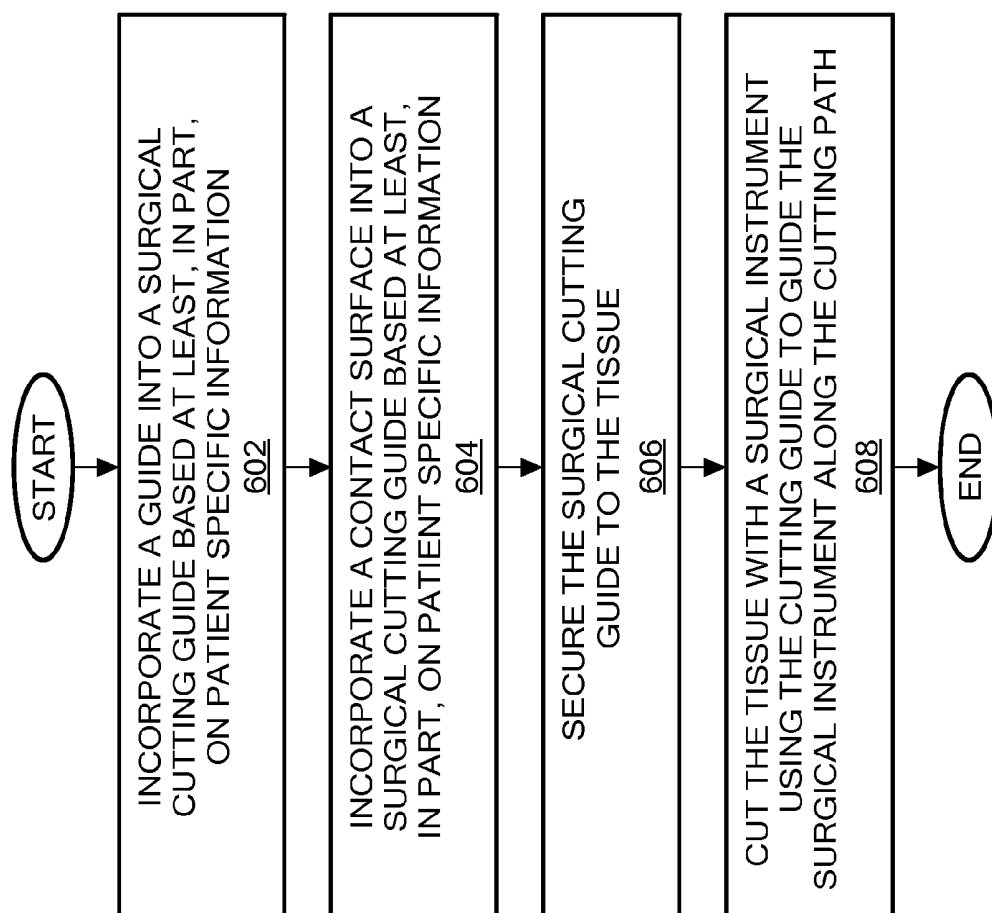


FIG. 6

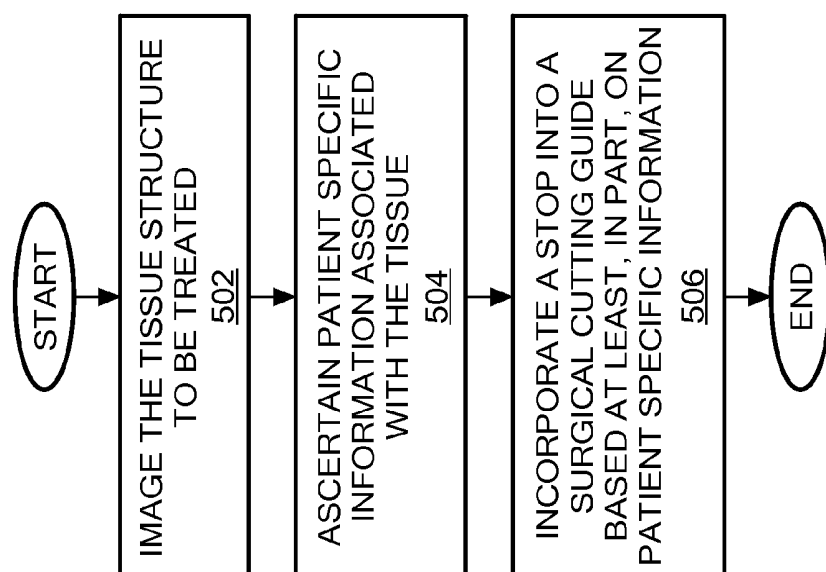


FIG. 5

SURGICAL CUTTING GUIDE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Application Ser. No. 60/943,726, entitled "SURGICAL CUTTING GUIDE" filed Jun. 13, 2007, which application is incorporated herein by reference in its entirety.

[0002] The present application is also a continuation-in-part of U.S. application Ser. No. 11/671,745 entitled "PATIENT SELECTABLE JOINT ARTHROPLASTY DEVICES AND SURGICAL TOOLS" filed Feb. 6, 2007, which in turn claims the benefit of: U.S. Application Ser. No. 60/765,592 entitled "SURGICAL TOOLS FOR PERFORMING JOINT ARTHROPLASTY" filed Feb. 6, 2006; U.S. Application Ser. No. 60/785,168 entitled "SURGICAL TOOLS FOR PERFORMING JOINT ARTHROPLASTY" filed Mar. 23, 2006; and U.S. Application Ser. No. 60/788,339 entitled "SURGICAL TOOLS FOR PERFORMING JOINT ARTHROPLASTY" filed Mar. 31, 2006.

[0003] U.S. application Ser. No. 11/671,745 is also a continuation-in-part of U.S. application Ser. No. 11/002,573 entitled "SURGICAL TOOLS FACILITATING INCREASED ACCURACY, SPEED AND SIMPLICITY IN PERFORMING JOINT ARTHROPLASTY" filed Dec. 2, 2004, which is a continuation-in-part of U.S. application Ser. No. 10/724,010 for "PATIENT SELECTABLE JOINT ARTHROPLASTY DEVICES AND SURGICAL TOOLS FACILITATING INCREASED ACCURACY, SPEED AND SIMPLICITY IN PERFORMING TOTAL AND PARTIAL JOINT ARTHROPLASTY" filed Nov. 25, 2003, which is a continuation-in-part of U.S. application Ser. No. 10/305,652 entitled "METHODS AND COMPOSITIONS FOR ARTICULAR REPAIR" filed Nov. 27, 2002, which is a continuation-in-part of U.S. application Ser. No. 10/160,667 entitled "METHODS AND COMPOSITIONS FOR ARTICULAR RESURFACING" filed May 28, 2002, which in turn claims the benefit of: U.S. Application Ser. No. 60/293,488 entitled "METHODS TO IMPROVE CARTILAGE REPAIR SYSTEMS" filed May 25, 2001; U.S. Ser. No. 60/363,527 entitled "NOVEL DEVICES FOR CARTILAGE REPAIR" filed Mar. 12, 2002; U.S. Application Ser. No. 60/380,695 entitled "METHODS AND COMPOSITIONS FOR CARTILAGE REPAIR" filed May 14, 2002; and U.S. Application Ser. No. 60/380,692 "METHODS FOR JOINT REPAIR" filed May 14, 2002.

[0004] U.S. application Ser. No. 11/671,745 is also a continuation-in-part of U.S. application Ser. No. 10/728,731 entitled "FUSION OF MULTIPLE IMAGING PLANES FOR ISOTROPIC IMAGING IN MRI AND QUANTITATIVE IMAGE ANALYSIS USING ISOTROPIC OR NEAR-ISOTROPIC IMAGING" filed Dec. 4, 2003, which claims the benefit of U.S. Application Ser. No. 60/431,176 entitled "FUSION OF MULTIPLE IMAGING PLANES FOR ISOTROPIC IMAGING IN MRI AND QUANTITATIVE IMAGE ANALYSIS USING ISOTROPIC OR NEAR ISOTROPIC IMAGING" filed Dec. 4, 2002.

[0005] U.S. application Ser. No. 11/671,745 is also a continuation-in-part of U.S. application Ser. No. 10/681,750 entitled "MINIMALLY INVASIVE JOINT IMPLANT WITH 3-DIMENSIONAL GEOMETRY MATCHING THE ARTICULAR SURFACES" filed Oct. 7, 2003, which claims the benefit of: U.S. Application Ser. No. 60/467,686 entitled "JOINT IMPLANTS" filed May 2, 2003 and U.S. Application Ser. No. 60/416,601 entitled "MINIMALLY INVASIVE JOINT IMPLANT WITH 3-DIMENSIONAL GEOMETRY MATCHING THE ARTICULAR SURFACES" filed Oct. 7, 2002.

[0006] Each of the above-described applications are hereby incorporated by reference in their entireties.

TECHNICAL FIELD

[0007] The present invention relates to surgical tools, and more particularly, to surgical tools such as surgical cutting guides.

BACKGROUND ART

[0008] When performing cuts with blades, saws, or other surgical instruments during surgical interventions, surgeons typically have good control of the surgical instrument with regard to direction and depth of tissue penetration. However, sometimes a surgical instrument may slip, be deflected, or stray from its intended cutting path. When a surgical instrument strays from its indented cutting path, it may inadvertently injure or cut other tissues.

[0009] For example, in knee arthroplasty, a surgeon may intend to preserve one or more tibial spines. When performing a horizontal tibial cut, the surgeon typically guides the blade in an anteroposterior direction. The surgeon guides the blade path so as to stay clear of the tibial spines. However, if the surgeon accidentally misdirects the instrument or if the instrument is deflected from its intended path, the blade path may extend into the tibial spines or other local tissues. This unintended cut of the tibial spines may result in the loss of ligament stability.

[0010] Deviation of the surgical instrument from its intended cutting path may also have harmful effects when performing surgical interventions in other parts of the body. For example, in the spine, deviation of a surgical instrument may result in neural damage or damage to bony or disc structures. In the hip, deviation of an instrument from the cutting path may potentially result in neurovascular damage or damage to bony and ligamentous structures. In a shoulder, deviation of the instrument path may potentially result in neurovascular or muscular damage.

[0011] Deviation from the cutting path may also lead to other unintended consequences. For example, failure to follow a cutting path may later result in misalignment or poor positioning of an implant. A poor fit for an implant may result in complete failure of the implant or other complications.

SUMMARY OF THE INVENTION

[0012] Embodiments of the present invention are directed to preventing unintended and inadvertent cuts to tissues during surgical interventions. In one embodiment of the invention, a surgical cutting guide is used to prevent unintended and inadvertent cuts. The surgical cutting guide includes a contact surface that conforms to a surface associated with a biological tissue and at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a second direction along a cutting path across the surface of the tissue. The guide further includes a stop for restricting movement of the surgical instrument in the second direction along the cutting path. The stop is based at least, in part, on patient specific information.

[0013] In some embodiments, the guide may be configured to abut the tissue and the abutment of the guide and tissue defines at least part of the cutting path of the surgical instrument. The stop may also be configured to abut the tissue.

[0014] Each of the stop, the guide, and the contact surface may have several configurations. For example, the stop may be configured to contact a cutting surface of the surgical instrument. The surgical instrument may be a blade or a saw. The stop may also be perpendicular to a cut plane defined by the guide. The guide may be one of a slot, an aperture, and a cutting plane. The placement, location, orientation, and shape of the stop may be based at least, in part, on patient specific information. The contact surface may be a mirror image of an uncut surface of the tissue. Also, the contact surface may have a plurality of concavities and/or a plurality of convexities. The contact surface may also be based at least, in part, on patient specific information. The contact surface may be made to conform to a variety of tissues, for example, the tissue may be one of a joint, an articular surface, a spine, a structure adjacent to one of a joint, an articular surface, and a spine.

[0015] In some exemplary embodiments of the invention, the patient specific information may be based on an image of the tissue. The images may be one of a CT image, a spiral CT image, an MRI image, an ultrasound image, a digital tomography image, and an optical coherence tomograph. In other embodiments, the patient specific information is based at least, in part, on intra-operative measurement of the tissue.

[0016] In some embodiments of the present invention, the stop may protect the tibial spines. In a more particular embodiment, the guide guides movement of the surgical instrument towards the tibial spines and the stop prevents the surgical instrument from cutting the tibial spines. In other embodiments, the stop protects one of a ligament, a vessel, a nerve, a muscle, a bony structure, and a cartilaginous structure. Further embodiments of the present invention may be put to use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

[0017] In another embodiment of the present invention, the surgical cutting guide includes a surface that is a mirror image of a joint, a spine, or a structure adjacent to a joint or spine. The surgical cutting guide further includes a guide or a guide aperture that directs movement of a surgical instrument along a predetermined path. A stop prevents the surgical instrument from deviating from the predetermined path. The location of said stop may be based, at least in part, on patient specific information.

[0018] In further related embodiments of the invention, the stop may protect one or more tibial spines. The guide or guide aperture may direct movement of the surgical instrument towards the tibial spine, wherein the stop keeps the surgical instrument clear of the tibial spine. The guide or guide aperture may direct movement of a saw and/or blade. The surgical cutting guide may be used in a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, or a spinous process. The surface may have a plurality of concavities and/or a plurality of convexities. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0019] In accordance with another embodiment of the invention, a surgical tool for a knee joint includes a portion that is a mirror image of a joint, a spine, and/or a structure adjacent to a joint or a spine. The surgical tool further includes a guide or a guide aperture that directs movement of a surgical instrument along a predetermined path. A stop inhibits the surgical instrument from deviating from the predetermined path, wherein said stop protects a tibial spine.

[0020] In accordance with related embodiments of the invention, the surgical tool may be used for a total knee arthroplasty or a partial knee arthroplasty. The position of the stop may be based, at least in part, on patient specific information. The guide or guide aperture may direct movement of the surgical instrument towards the tibial spine, wherein the stop keeps the surgical instrument clear of the tibial spine. The guide or guide aperture may direct movement of a saw and/or blade. The surface may have a plurality of concavities and/or a plurality of convexities. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0021] In accordance with another embodiment of the invention, a cutting guide includes a portion that is a mirror image of a joint, a spine, and/or a structure adjacent to a joint or a spine. The cutting guide further includes a guide or a guide aperture for directing movement of a surgical instrument along a predetermined path. A stop prevents a surgical instrument from deviating from the predetermined path, where the stop may protect a ligament, a vessel, a nerve, a muscle, a bony structure, and/or a cartilaginous structure.

[0022] In accordance with related embodiments of the invention, the surgical tool may be used in a total knee arthroplasty or a partial knee arthroplasty. The position of the stop may be based, at least in part, on patient specific information. The guide and/or guide aperture may direct movement of the surgical instrument towards the ligament, vessel, nerve, muscle, bony structure, and/or cartilaginous structure, but the stop may keep the surgical instrument clear of the ligament, vessel, nerve, muscle, bony structure, and/or cartilaginous structure. The guide or guide aperture may direct movement of one of a saw and a blade. The portion may be a surface having a plurality of concavities and a plurality of convexities. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0023] In accordance with another embodiment of the invention, a cutting guide includes a portion that is a mirror image of a joint, a spine, and/or a structure adjacent to the joint or spine. The cutting guide further includes a guide or a guide aperture that directs movement of a surgical instrument along a predetermined path. A stop inhibits the surgical instrument from deviating from the predetermined path. The stop is integrated into said cutting guide.

[0024] In accordance with related embodiments of the invention, the position of the stop is based, at least in part, on patient specific information. The stop may protect the tibial spines. The guide or guide aperture may direct movement of the surgical instrument towards the tibial spines, wherein the stop keeps the surgical instrument clear of the tibial spines. The guide or guide aperture may direct movement of a saw and/or blade. The surgical cutting guide may be used in a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, or a spinous process. The surface may have a plurality of concavities and/or a plurality of convexities. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0025] In accordance with another embodiment of the invention, a cutting guide includes a portion that is a mirror image of a joint, a spine, and/or a structure adjacent to the joint or spine. The cutting guide further includes a guide or a guide aperture that directs movement of a surgical instrument along a predetermined path. A stop inhibits the surgical

instrument from deviating from the predetermined path. The stop is attached to said cutting guide.

[0026] In accordance with related embodiments of the invention, the position of the stop is based, at least in part, on patient specific information. The stop may protect the tibial spine. The guide or guide aperture may direct movement of the surgical instrument towards the tibial spine, wherein the stop keeps the surgical instrument clear of the tibial spine. The guide or guide aperture may direct movement of a saw and/or blade. The surgical cutting guide may be used in a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, or a spinous process. The surface may have a plurality of concavities and/or a plurality of convexities. The attachment may be via a block or a linkage. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0027] In accordance with another embodiment of the invention, a cutting guide includes a portion that is a mirror image of a joint, a spine, and/or a structure adjacent to the joint or spine. The cutting guide further includes a guide or a guide aperture that directs movement of a surgical instrument along a predetermined path. A stop inhibits the surgical instrument from deviating from the predetermined path. The position, orientation or shape of the stop is derived using patient specific anatomic information.

[0028] In accordance with related embodiments of the invention, the position, orientation, or shape of said stop may allow for intra-operative adjustments. The stop may protect the tibial spine. The guide or guide aperture may direct movement of the surgical instrument towards the tibial spine, wherein the stop keeps the surgical instrument clear of the tibial spine. The guide or guide aperture may direct movement of a saw and/or blade. The cutting guide may be used in a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, or a spinous process. The surface may have a plurality of concavities and/or a plurality of convexities. The stop may be perpendicular to a cut plane defined by the at least one of a guide and a guide aperture.

[0029] In accordance with another embodiment of the invention, a surgical cutting guide includes a surface that is a mirror image of at least one of a joint, a spine, and a structure adjacent to one of a joint and a spine. The surgical cutting guide further includes at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path. The position or shape or orientation of the at least one of a guide and a guide aperture is based on patient specific information and provides for at least one of a predetermined cut angulation and a predetermined cut height.

[0030] In accordance with related embodiments of the invention, the surgical tool may further include a stop for inhibiting the surgical instrument from deviating from the predetermined path. The position of the stop may be based, at least in part, on patient specific information. The stop may protect the tibial spine. At least one of a guide and a guide aperture may direct movement of the surgical instrument towards the tibial spine, but the stop may keep the surgical instrument clear of the tibial spine. The at least one of a guide and a guide aperture may be used to direct movement of a saw or a blade with regard to, for example, a knee, a hip, an ankle,

a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, or a spinous process.

[0031] In accordance with related embodiments of the above-described embodiments of the invention, the patient specific information may be based, at least in part, on an intra-operative measurement of the joint, the spine, or the structure adjacent to the joint and the spine. Alternatively, or in combination with the intra-operative measurement, the patient specific information may be based on an image of the joint, the spine, or the structure adjacent to the joint and the spine. The image may be a CT image, a spiral CT image, an MRI image, an ultrasound image, a digital tomosynthesis image, and an optical coherence tomograph.

[0032] In accordance with another embodiment of the invention, a surgical tool includes a template having at least one a guide for directing movement of a surgical instrument along a predetermined path. At least one insert is attached to the guide or guide aperture. The at least one insert protects the template from the surgical instrument.

[0033] In accordance with related embodiments of the invention, the template may be made of plastic, and the insert is made of metal. The template may be a mold or a rapid prototype. The insert may be removably attached to the template. The insert may snap onto the template.

[0034] Embodiments of the present invention are also directed to a method for guiding a surgical instrument. The method includes providing a surgical cutting guide having a contact surface that conforms to a surface associated with a biological tissue and at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a second direction along the cutting path across the surface of the tissue. Providing the surgical guide further includes ascertaining patient specific information associated with the tissue and incorporating a stop into the guide for restricting movement of the surgical instrument in the second direction along the cutting path. The stop is based at least, in part, on patient specific information.

[0035] The method may further include securing the cutting guide to the tissue and cutting the tissue by using the cutting guide to guide the surgical instrument along the cutting path. The cutting guide may be secured to the guide by using anchor screws. In one embodiment of the method, the tissue may be cut so that a cutting surface of the surgical instrument contacts the stop. A blade and/or a saw may be used to cut the tissue.

[0036] The method may include several configurations of the surgical cutting guide. For example, the guide and/or the stop may be configured to abut the surface of the tissue. The guide may also be configured into a slot, an aperture, and/or a cutting plane. The placement, location, orientation, and shape of the stop may be based at least, in part, on patient specific information. For example, in one embodiment the stop may be configured to be perpendicular to a cut plane defined by the guide.

[0037] The contact surface may be configured so that at least a portion of the contact surface is a mirror image of an uncut surface of the tissue. The contact surface may also be based at least, in part, on patient specific information. The contact surface may further include a plurality of concavities and a plurality of convexities.

[0038] In some embodiments of the method, the patient specific information may be ascertained through imaging the

tissue. Imaging may be accomplished by CT imaging, CT spiral imaging, MRI imaging, ultrasound imaging, digital tomosynthesis, and/or optical coherence tomography. In other embodiments of the method, patient specific information may be ascertained through intra-operative measuring.

[0039] Embodiments of the method may be applied to a variety of tissues, for example, the tissue may be one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine. Embodiments of the method may also be put to use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

[0040] In another embodiment of the surgical cutting guide, the cutting guide includes a contact surface that conforms to a surface associated with the tissue and at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a fifth direction along a cutting path into the tissue. The cutting guide further includes a stop for restricting movement of the surgical instrument in a second direction. The stop is based at least, in part, on patient specific information. In some embodiments, this guide may be configured to abut the tissue and the abutment of the guide and tissue defines at least part of the cutting path of the surgical instrument. The stop may also be configured to abut the tissue.

[0041] Each of the stop, the guide, and the contact surface may have several configurations. For example, the stop may be configured to contact a cutting surface of the surgical instrument. The surgical instrument may be a blade or a saw. The stop may also be perpendicular to a cut plane defined by the guide. The guide may be one of a slot, an aperture, and a cutting plane. The placement, location, orientation, and shape of the stop may be based at least, in part, on patient specific information. The contact surface may be a mirror image of an uncut surface of the tissue. Also, the contact surface may have a plurality of concavities and/or a plurality of convexities. The contact surface may also be based at least, in part, on patient specific information. The contact surface may be made to conform to a variety of tissues, for example, the tissue may be one of a joint, an articular surface, a spine, a structure adjacent to one of a joint, an articular surface, and a spine.

[0042] In some exemplary embodiments of the invention, the patient specific information may be based on an image of the tissue. The images may be one of a CT image, a spiral CT image, an MRI image, an ultrasound image, a digital tomosynthesis image, and an optical coherence tomograph. In other embodiments, the patient specific information is based at least, in part, on intra-operative measurement of the tissue.

[0043] In some embodiments of the present invention, the stop may protect the tibial spines. In a more particular embodiment, the guide guides movement of the surgical instrument towards the tibial spines and the stop prevents the surgical instrument from cutting the tibial spines. In other embodiments, the stop protects one of a ligament, a vessel, a nerve, a muscle, a bony structure, and a cartilaginous structure. Further embodiments of the present invention may be put to use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

[0044] In another embodiment of the method for guiding a surgical instrument, the method includes providing a surgical cutting guide having a contact surface that conforms to a surface associated with a tissue and at least one guide for

restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a fifth direction along the cutting path into the tissue. Providing the surgical guide further includes ascertaining patient specific information associated with the tissue and incorporating a stop into the guide for restricting movement of the surgical instrument in the second direction. The stop is based at least, in part, on patient specific information. The method may further include securing the cutting guide to the tissue and cutting the tissue by using the cutting guide to guide the surgical instrument along the cutting path. The cutting guide may be secured to the guide by using anchor screws. In one embodiment of the method, the tissue may be cut so that a cutting surface of the surgical instrument contacts the stop. A blade and/or a saw may be used to cut the tissue.

[0045] The method may include several configurations of the surgical cutting guide. For example, the guide and/or the stop may be configured to abut the surface of the tissue. The guide may also be configured into a slot, an aperture, and/or a cutting plane. The placement, location, orientation, and shape of the stop may be based at least, in part, on patient specific information. For example, in one embodiment the stop may be configured to be perpendicular to a cut plane defined by the guide.

[0046] The contact surface may be configured so that at least a portion of the contact surface is a mirror image of an uncut surface of the tissue. The contact surface may also be based at least, in part, on patient specific information. The contact surface may further include a plurality of concavities and a plurality of convexities.

[0047] In some embodiments of the method, the patient specific information may be ascertained through imaging the tissue. Imaging may be accomplished by CT imaging, CT spiral imaging, MRI imaging, ultrasound imaging, digital tomosynthesis, and/or optical coherence tomography. In other embodiments of the method, patient specific information may be ascertained through intra-operative measuring.

[0048] Embodiments of the method may be applied to a variety of tissues, for example, the tissue may be one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine. Embodiments of the method may also be put to use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

BRIEF DESCRIPTION OF THE DRAWINGS

[0049] The foregoing features of the invention will be more readily understood by reference to the following detailed description, taken with reference to the accompanying drawings, in which:

[0050] FIG. 1 is an isometric view of a patient specific surgical tool, in accordance with one embodiment of the invention;

[0051] FIG. 2 depicts exemplary medial and lateral cuts made to the tibial plateau while preserving the tibial spines, in accordance with one embodiment of the invention;

[0052] FIG. 3 depicts exemplary angular cuts on the tibial plateau;

[0053] FIG. 4 depicts a tibial plateau with an exemplary cut plane that fails to preserve at least a portion of the tibial spines;

[0054] FIG. 5 depicts an example of a method for guiding a surgical instrument, in accordance with one embodiment of invention; and

[0055] FIG. 6 depicts further examples of a method for guiding a surgical instrument, in accordance with one embodiment of the invention.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

[0056] Illustrative embodiments of the present invention are directed to a patient specific surgical cutting guide. FIG. 1 is an isometric view of a patient specific surgical cutting guide **100**, in accordance with one embodiment of the invention. More particularly, the exemplary surgical cutting guide **100** shown in FIG. 1 is a patient specific cutting guide (also referred to in the art as a jig or template) that may be used, for example, in performing a knee arthroplasty. In other embodiments, the surgical guide **100** may be used in performing operations elsewhere in the body, such as a joint, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and/or a spinous process.

[0057] The surgical cutting guide **100** includes a contact surface **102** that conforms to at least a portion of a surface of a biological tissue to be treated or the structures adjacent to the tissue, as described in U.S. application Ser. No. 11/671,745, incorporated herein by reference in its entirety. In preferred embodiments, the contact surface **102** conforms to a substantially uncut portion of a surface of a biological tissue to be treated or the structures adjacent to the tissue. When in use, the contact surface **102** of the cutting guide **100** is placed in contact with the tissue and/or structures adjacent to the tissue. The conforming structure of the contact surface **102** helps ensure proper positioning and orientation of the cutting guide **100**. The contact surface **102** may be used to contact a variety of different tissues. For example, the tissue may be, without limitation, at least one of an articular surface, cartilage, subchondral bone and/or other tissue surface and shape. In some embodiments the contact surface **102** may be a "mirror image" or "negative" of the surface of the tissue. Yet, in other embodiments, the contact surface **102** may only have portions that conform to the surface of the tissue. The contact surface **102** may be, without limitation, a surface with one or more concavities and/or one or more convexities. For example, the contact surface **102** may have, without limitation, a single convexity; a plurality of convexities; a single concavity; a plurality of concavities; or at least one convexity and at least one concavity.

[0058] In order to fix the contact surface **102** to the tissue, the surgical cutting guide **100** may contain drill bushing holes **104** and **106**. These drill bushing holes **104**, **106** allow the cutting guide **100** to be anchored to the tissue and/or adjacent structures by using anchoring screws or drill pins inserted through the drill bushing holes **104**, **106**. In various embodiments, the drill bushing holes **104**, **106** include metal inserts (or other hard material) to prevent degradation of the cutting guide when drilling. Other attachment mechanisms known in the art may be used to fix the contact surface **102** to the tissue.

[0059] Patient specific information may advantageously be used to ensure that the contact surface **102** properly conforms to the surface of the tissue. Patient specific information includes, but is not limited to one or more intra-operative measurements and/or one or more electronic images. Images and measurements of the surface of the tissue provide object

coordinates that define the surface and shape of the tissue. The electronic images of the tissue may be from, without limitation, a CT image, a spiral CT image, an MRI image, an ultrasound scan, digital tomosynthesis, or optical coherence tomography. The object coordinates may be utilized to shape a portion of the cutting guide **100**. For example, once the patient specific information is ascertained, rapid prototyping or other manufacturing techniques may be used to adapt the contact surface **102** to the patient's particular tissue structure. In various embodiments, a mold may be made to form the contact surface **102** to the particular tissue structure of the patient. Alternatively, the patient specific information may be used to select a pre-made guide or template that has a good fit with a patient's particular tissue structure.

[0060] The surgical cutting guide **100** includes at least one guide **108** for restricting movement of the surgical instrument in a first direction **110** and allowing movement of the surgical instrument in a second direction **112** along a cutting path across the surface of the tissue. The guide **108** defines at least a portion of the cutting path of the surgical instrument along the surface of the tissue. The cutting path may be predetermined based upon the patient specific information and the type of surgical intervention being performed. In one embodiment, as depicted in FIG. 1, the guide **108** is a simple cutting plane. But the guide **108** may also be formed from one or more cutting planes, apertures, slots, and/or holes to accommodate surgical instruments such as drills, reamers, curettes, k-wires, screws and saws. Moreover, a single cutting guide **100** may include a plurality of guides **108**. The guide **108** or plurality of guides **108** may be positioned and/or adjusted based on the patient specific information to form a predetermined instrument cutting path for a desired surgical intervention.

[0061] During a knee arthroplasty, the guides **108** may direct horizontal medial **206** and lateral **204** cuts of the tibia plateau **114**, as depicted (before and after) in FIG. 1 and FIG. 2. Yet, in another embodiment, the guides **108** may provide for angular cuts rather than horizontal or near horizontal cuts. FIG. 3 shows exemplary angular cuts **302** on the tibial plateau **304**. The angulation of the cut may be, without limitation, anterior to posterior and/or lateral to medial. The position or placement of the horizontal or angular guide **108** on the surgical cutting guide **100** relative to the contact surface **102** may be patient specific, and, for example, may control, among other dimensions, the cut height on the tibial plateau.

[0062] As depicted in FIG. 1, the guide **108** may be configured to abut the surface of the tissue. In other words, at least a portion of an edge of the guide **108** may be in contact with the surface of the tissue. The abutment of the guide against the surface of the tissue may define a portion of the cutting path across the surface of the tissue. Yet, in other embodiments, the guide **108** may not be configured to contact the surface of the tissue and is, instead, set back from the surface of the tissue.

[0063] The cutting guide **100** also includes a stop **116** for restricting movement of the surgical instrument in the second direction along the cutting path. The stop **116** is used to prevent a surgical instrument from deviating from its intended path and ensures that the instrument will stay clear of tissue structures to be preserved. A single cutting guide may contain a plurality of stops **116**. The stop **116** may be used to protect a variety of structures such as ligaments, vessels, nerves, muscles, bony structures, and cartilaginous structures. For example, in a knee arthroplasty, the patient specific surgical cutting guide **100** may include a guide **108** for directing a

horizontal or near horizontal cut of the tibial plateau 114. In accordance with one aspect of the invention, FIG. 2 depicts exemplary medial 204 and lateral 206 cuts made to the tibial plateau 114 with properly preserved tibial spines 202. Whereas FIG. 3 depicts a tibial plateau showing a cut plane 302 that fails to preserve a portion of the tibial spines 304. In order to preserve the one or more tibial spines, the cutting guide 100 may include a medial stop 116 and/or a lateral stop 116. The stops 116 may be substantially perpendicular to the intended cutting plane defined by the guide 108 such as the stop 116 depicted in FIG. 1. In other embodiments, the stop 116 may be at other angles relative to the intended cutting plane, such as at 60, 70, or 80 degrees. Like the guide 108, the stop 116 may be configured to abut the surface of the tissue, or the stop 116 may be configured to be set back from the surface of the tissue. In various embodiments of the invention, the stop 116 may have a straight, curved, and/or complex surface. The stop 116 may have one or more convexities and/or concavities. Any shape known in the art is possible for the stop 116.

[0064] The placement, location, orientation, and shape of the stop 116 may be determined based on the surface of the tissue, the tissue structures to be preserved, and the type of surgical intervention to be performed. For example, during a knee arthroplasty, the guide 108 may direct the movement of the surgical instrument in a horizontal cut of the tibial plateau 114. However, an over extension of the horizontal cut of the tibial plateau may result in undercutting the tibial spines and the attached anterior and/or posterior cruciate ligaments of the knee. To solve this problem, the stop 116, as depicted in FIG. 1, is designed so that a horizontal cut into the tibial plateau 114 will stay clear of the tibial spines 118. The stop 116 prevents the cutting surface of the surgical instrument, such as a saw or blade, from extending too far into the tibial plateau 114 and undercutting the tibial spines 118. The stop 116 prevents over extension of the surgical instrument by coming into mechanical contact with the surgical instrument and thus prevents any further progression of the surgical instrument into the tibial spines 118. The guide 108 and the stop 116 work together to guide the movement of the surgical instrument towards the tibial spines 118, while at the same time keeping the surgical instrument clear of the tibial spines 118.

[0065] In another embodiment, as depicted in FIG. 1, the stop 116 may effectively be used as a guide by restricting the movement of the surgical tool in a third direction 120 and allowing the movement of the surgical instrument in a fourth direction 122 along the cutting path across the surface of the tissue. The guide 108 may effectively be used as a stop by restricting the movement of the surgical instrument in the fourth direction 122 along the cutting path.

[0066] In another embodiment of the present invention, an oscillating saw may be used to cut the tissue. In such an embodiment, the guide 108 of the surgical cutting guide 100 may restrict movement of the saw in a first direction 110 and may allow movement of the saw in a fifth direction into the tissue. A stop 116 may restrict movement of the saw in a second direction 112.

[0067] The placement, location, orientation, and shape of both the guide 108 and the stop 116 may be determined based on patient specific information. For example, patient specific information in the form of imaging data, which may be, without limitation, a CT image, a spiral CT image, an MRI image, an ultrasound scan, digital tomosynthesis, or optical

coherence tomograph may be utilized to identify tissue structures that need to be preserved. The identification of tissue structures may be performed automatically or with the help of an operator. The guide 108 and the stop 116 may then be designed to ensure that the surgical instrument and its cutting path will stay clear of the tissue structure to be preserved. Intra-operative measurement of the tissue structure is another form of patient specific information that may be used to define the placement, location, orientation, and shape of the guide 108 and/or the stop 116.

[0068] Once the placement, location, orientation, and shape of the guide 108 and the stop 116 is determined, there are several ways to incorporate them into the cutting guide 100. In one embodiment the contact surface 102, the guide 108 and the stop 116 may be made of the same material. In such an embodiment, the contact surface 102, the guide 108, and the stop 116 may be molded or rapid prototyped as a single unitary structure. In another embodiment, the guide 108 and stop 116 may be integrated into the cutting guide 100. For example, the guide 108 and stop 116 may be machined into the cutting guide 100. However, in a preferred embodiment, the guide 108 and the stop 116 are made from hard materials, such as metal, in order to prevent the surgical instrument from penetrating and degrading the cutting guide 100. In such an embodiment, the guide 108 and stop 116 may be attached to the cutting guide 100 in an appropriate location and orientation. FIG. 1 depicts such an embodiment. The cutting guide 100 includes a template 124 that includes contact surface 102. The template 124 may be made from a material such as a plastic. The template 124 may be made from a mold or through rapid prototyping based on patient specific information. An insert 126 may be secured onto the template 124. As depicted in FIG. 1, the insert forms both the guide 108 and the stop 116. But in other embodiments separate inserts 126 may form each of the stop 116 and the guide 108. The insert 126 may be made from a hard material, such as metal, in order to protect the template 124 from the cutting surface of the surgical tool. The insert 126 may be removably attached to the template through the use of clips, pins, and/or anchor screws. In another embodiment, the guide 108 and stop 116 may be attached to the cutting guide 100 via a block or a linkage as described in U.S. application Ser. No. 11/671,745, incorporated herein by reference in its entirety.

[0069] In another embodiment, the guide 108 and/or stop 116 are incorporated into the cutting guide in such way that intra-operative adjustments may be made to the position, orientation and/or shape of the guide 108 or stop 116. A pivot, space, ratchet or jack like mechanism may be used, without limitation, to adjust the guide 108 or stop 116. For example, the stop 116 may be capable of sliding along the cutting guide 100 and, then, locking into place at the appropriate position. Such intra-operative adjustments may be performed, without limitation, to ensure optimal ligament balancing.

[0070] FIG. 5 depicts an example of a method for guiding the surgical instrument. The method may include imaging the tissue structure to be treated 502. Imaging of the tissue may be accomplished as described above through CT imaging, spiral CT imaging, MRI imaging, ultrasound scanning, digital tomosynthesis, or optical coherence tomography. Once the tissue is imaged, patient specific information is ascertained based upon the image 504. In another embodiment the patient specific information may be ascertained from intra-operative measurements of the tissue. Once the patient specific information is ascertained, the stop 116 may be incorporated into

the surgical cutting guide **100** based at least, in part, on the patient specific information **506**. The placement, location, orientation, and shape of the stop **116** on the cutting guide **100** may be determined based upon the surface of the tissue, the tissue structures to be preserved, the type of surgical intervention to be performed, and/or the cutting path of the surgical instrument. As depicted in FIG. 6, the placement, location, orientation, and shape of the guide **108** may also be determined based upon similar considerations and patient specific information **602**. The structure of the conforming contact surface **102** may also be determined based at least, in part, on the ascertained patient specific information **604**. The stop **116**, the guide **108**, and the contact surface **102** may be incorporated onto the cutting guide **100** as attachments to the cutting guide **100**, as integral to the cutting guide **100**, and/or as a single unitary structure. As discussed above, the stop **116**, the guide **108**, and the contact surface **102** may be molded or rapid prototyped as a single unitary structure. In another embodiment, the stop **116** may be attached onto a pre-made cutting guide **100** or template **124** that has a good fit with a patient's particular tissue structure. In yet another embodiment, the stop **116**, guide **108**, or contact surface **102** may be integrated into the guide through a machining process.

[0071] Once the surgical cutting guide is provided, the surgical guide **100** may be secured to the tissue **606**. The conforming contact surface **102** of the surgical cutting guide **100** is placed on the mating surface of the tissue and/or adjacent tissue structures. The surgical cutting guide **100** may be secured to the tissue using the bushing holes **104**, **106** and anchor screws. The surgical cutting guide **100** may also be secured to the tissue using surgical glue, bone cement, or any other appropriate fastening means. Once the surgical cutting guide **100** is secured to the tissue, the tissue may be cut with the surgical instrument using the cutting guide **100** to guide the surgical instrument along the cutting path **608**. The at least one guide **108** restricts the movement of the surgical instrument in the first direction **110**, but allows the movement of the surgical instrument in the second direction **112** along the cutting path across the surface of the tissue. The stop **116** restricts the movement of the surgical instrument in the second direction **112** along the cutting path. The stop **116** restricts movement of the surgical instrument in the second direction **112** by coming in contact with the surgical instrument, and more particularly, the cutting surface of the surgical instrument. After the cut is complete, the cutting guide **100** may be removed or left inside the body post-operatively depending on the particular type of surgical intervention.

[0072] The described embodiments of the invention are intended to be merely exemplary and numerous variations and modifications will be apparent to those skilled in the art. All such variations and modifications are intended to be within the scope of the present invention as defined in the appended claims.

What is claimed is:

1. A surgical cutting guide for guiding a surgical instrument along a cutting path located on a biological tissue, the cutting guide comprising:

a contact surface that conforms to a surface associated with the tissue;

at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a second direction along a cutting path across the surface of the tissue; and

a stop for restricting movement of the surgical instrument in the second direction along the cutting path, wherein the stop is based at least, in part, on patient specific information.

2. A surgical cutting guide according to claim 1, wherein the guide is configured to abut the tissue and the abutment of the guide and tissue defines at least part of the cutting path of the surgical instrument.

3. A surgical cutting guide according to claim 1, wherein the stop is configured to abut the tissue.

4. A surgical cutting guide according to claim 1, wherein the stop is configured to contact a cutting surface of the surgical instrument.

5. A surgical guide according to claim 1, wherein at least a portion of the contact surface is a mirror image of an uncut surface of the tissue.

6. A surgical cutting guide according to claim 1, wherein the biological tissue is one of a joint, an articular surface, a spine, a structure adjacent to one of a joint, an articular surface, and a spine.

7. A surgical cutting guide according to claim 1, wherein the contact surface is based at least, in part, on patient specific information.

8. A surgical cutting guide according to claim 1, wherein the patient specific information is based at least, in part, on intra-operative measurement of the tissue.

9. A surgical cutting guide according to claim 1, wherein the patient specific information is based on an image of the tissue.

10. A surgical cutting guide according to claim 9, wherein the image is one of a CT image, a spiral CT image, an MRI image, an ultrasound image, a digital tomosynthesis image, and an optical coherence tomograph.

11. A surgical cutting guide according to claim 1, wherein the guide is one of a slot, an aperture, and a cutting plane.

12. A surgical cutting guide according to claim 1, wherein one of a placement, location, orientation, and shape of the stop is based at least, in part, on patient specific information.

13. A surgical cutting guide according to claim 1, wherein the stop protects at least one of a ligament, a vessel, a nerve, a muscle, a bony structure, and a cartilaginous structure.

14. A surgical cutting guide according to claim 1, wherein the stop protects tibial spines.

15. A surgical cutting guide according to claim 14, wherein the at least one guide guides movement of the surgical instrument towards the tibial spines and wherein the stop prevents the surgical instrument from cutting the tibial spines.

16. A surgical cutting guide according to claim 1, wherein the surgical instrument is one of a blade or a saw.

17. A surgical cutting guide according to claim 1 for use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

18. A surgical cutting guide according to claim 1, wherein the contact surface has a plurality of concavities and a plurality of convexities.

19. A surgical cutting guide according to claim 1, wherein the stop is perpendicular to a cut plane defined by the at least one guide.

20. A method for guiding a surgical instrument, the method comprising:

providing a surgical cutting guide having a contact surface that conforms to a surface associated with a tissue and at least one guide for restricting movement of a surgical

instrument in a first direction and for allowing the movement of the surgical instrument in a second direction along the cutting path across the surface of the tissue, wherein providing the surgical guide includes: ascertaining patient specific information associated with the tissue; and
incorporating a stop into the guide for restricting movement of the surgical instrument in the second direction along the cutting path, wherein the stop is based at least, in part, on patient specific information.

21. A method according to claim **20**, further comprising securing the cutting guide to the tissue.

22. A method according to claim **22**, further comprising cutting the tissue by using the cutting guide to guide the surgical instrument along the cutting path.

23. A method according to claim **20**, further comprising configuring the at least one guide to abut the surface of the tissue.

24. A method according to claim **20**, further comprising configuring the stop to abut the surface of the tissue.

25. A method according to claim **22**, further comprising cutting the tissue so that a cutting surface of the surgical instrument contacts the stop.

26. A method according to claim **20**, further comprising configuring the contact surface so that at least a portion of the contact surface is a mirror image of an uncut surface of the tissue.

27. A method according to claim **20**, wherein the tissue is one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine.

28. A method according to claim **20**, further comprising configuring the contact surface, based at least, in part, on patient specific information.

29. A method according to claim **20**, further comprising configuring one of a placement, location, orientation, and shape of the stop based at least, in part, on patient specific information.

30. A method according to claim **20**, further comprising intra-operative measuring of the tissue in order to ascertain patient specific information.

31. A method according to claim **20**, further comprising imaging the tissue in order to ascertain patient specific information.

32. A method according to claim **31**, wherein the imaging is one of CT imaging, CT spiral imaging, MRI imaging, ultrasound imaging, digital tomosynthesis, and optical coherence tomography.

33. A method according to claim **20**, further comprising configuring the guide into one of a slot, an aperture, and a cutting plane.

34. A method according to claim **22**, further comprising using one of a blade and a saw to cut the tissue.

35. A method according to claim **20** for use in one of a knee, a hip, an ankle, a foot, a shoulder, an elbow, a wrist, a hand, a spine, a vertebral endplate, a skull, a pedicle, a posterior element, and a spinous process.

36. A method according to claim **20**, further comprising configuring the contact surface with a plurality of concavities and a plurality of convexities.

37. A method according to claim **20**, further comprising configuring the stop to be perpendicular to a cut plane defined by the at least one guide.

38. A method according to claim **20**, the cutting guide is secured to the tissue using anchoring screws.

39. A surgical cutting guide comprising:

a surface that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop that prevents the surgical instrument from deviating from the predetermined path, wherein location of the stop is based at least, in part, on patient specific information.

40. A surgical tool comprising:

a portion that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop for inhibiting the surgical instrument from deviating from the predetermined path.

41. A surgical tool for a knee joint, the surgical tool comprising:

a portion that is a mirror image of one of a joint, an articular surface, a spine, and a structure adjacent to a joint, an articular surface, or a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop that prevents the surgical instrument from deviating from the predetermined path, wherein the stop protects a tibial spine.

42. The surgical tool of claim **41**, wherein the surgical tool is used for a total knee arthroplasty.

43. The surgical tool of claim **41**, wherein the surgical tool is used for a partial knee arthroplasty.

44. The surgical tool according to claim **41**, wherein the position of the stop is based at least, in part, on patient specific information.

45. A cutting guide comprising:

a portion that is a mirror image of one of a joint, an articular surface, a spine, and a structure adjacent to a joint, an articular surface, or a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop that prevents a surgical instrument from deviating from the predetermined path, wherein the stop protects at least one of a ligament, a vessel, a nerve, a muscle, a bony structure, and a cartilaginous structure.

46. The cutting guide of claim **45**, wherein the surgical tool is used for a total knee arthroplasty.

47. The cutting guide of claim **45**, wherein the surgical tool is used for a partial knee arthroplasty.

48. A cutting guide comprising:

a portion that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop for preventing the surgical instrument from deviating from the predetermined path, wherein the stop is integrated into the cutting guide.

- 49.** A cutting guide comprising:
 a portion that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;
 at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and
 a stop for preventing the surgical instrument from deviating from the predetermined path, wherein the stop is attached to the cutting guide.
- 50.** The cutting guide according to claim 49, wherein the attachment is via a block.
- 51.** The cutting guide according to claim 49, wherein the attachment of the stop is via a linkage.
- 52.** A cutting guide comprising:
 a portion that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;
 at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path;
 a stop for preventing the surgical instrument from deviating from the predetermined path, wherein one of a position or orientation or shape of the stop is derived using patient specific information.
- 53.** The cutting guide according to claim 52, wherein one of a position or orientation or shape of the stop allows for intra-operative adjustments.
- 54.** A surgical tool comprising:
 a template that includes at least one guide for directing movement of a surgical instrument along a predetermined path; and
 at least one insert attached to the at least one of a guide and a guide aperture, the at least one insert for protecting the template from the surgical instrument.
- 55.** The surgical tool according to claim 54, wherein the template is made of plastic, and wherein the insert is made of metal.
- 56.** The surgical tool according to claim 54, wherein the template includes a mold.
- 57.** The surgical tool according to claim 54, wherein the template is a rapid prototype.
- 58.** The surgical tool according to claim 54, wherein the insert is removably attached to the template.
- 59.** The surgical tool according to claim 54, wherein the insert snaps onto the template.
- 60.** A surgical cutting guide comprising:
 a surface that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;
 at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predeter-

mined path, wherein the position or shape or orientation of the at least one of a guide and a guide aperture is based on patient specific information and provides for at least one of a predetermined cut angulation and a predetermined cut height.

61. The surgical tool according to claim 60, further including a stop for inhibiting the surgical instrument from deviating from the predetermined path.

62. The surgical tool according to claim 60, wherein the position of the stop is based at least, in part, on patient specific information.

63. A surgical cutting guide comprising:

a surface that is a mirror image of at least one of a joint, an articular surface, a spine, and a structure adjacent to one of a joint, an articular surface, and a spine;

at least one of a guide and a guide aperture for directing movement of a surgical instrument along a predetermined path; and

a stop that prevents the surgical instrument from deviating from the predetermined path, wherein at least one of the shape, location, and orientation of the stop is based at least, in part, on an image that includes a tissue structure to be preserved, such that the stop prevents the surgical from damaging the tissue structure.

64. A surgical cutting guide for guiding a surgical instrument along a cutting path located on a biological tissue, the cutting guide comprising:

a contact surface that conforms to a surface associated with the tissue;

at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a fifth direction along a cutting path into the tissue; and

a stop for restricting movement of the surgical instrument in a second direction, wherein the stop is based at least, in part, on patient specific information.

65. A method for guiding a surgical instrument, the method comprising:

providing a surgical cutting guide having a contact surface that conforms to a surface associated with a tissue and at least one guide for restricting movement of a surgical instrument in a first direction and for allowing the movement of the surgical instrument in a fifth direction along the cutting path into the tissue, wherein providing the surgical guide includes:

ascertaining patient specific information associated with the tissue; and

incorporating a stop into the guide for restricting movement of the surgical instrument in the second direction, wherein the stop is based at least, in part, on patient specific information.

* * * * *

专利名称(译)	手术切割指南		
公开(公告)号	US20080275452A1	公开(公告)日	2008-11-06
申请号	US12/139324	申请日	2008-06-13
[标]申请(专利权)人(译)	康福美斯公司		
申请(专利权)人(译)	CONFORMIS INC.		
当前申请(专利权)人(译)	CONFORMIS INC.		
[标]发明人	LANG PHILIPP FITZ WOLFGANG STEINES DANIEL BOJARSKI RAYMOND A		
发明人	LANG, PHILIPP FITZ, WOLFGANG STEINES, DANIEL BOJARSKI, RAYMOND A.		
IPC分类号	A61B17/56		
CPC分类号	A61B5/103 A61B5/4528 A61B17/15 A61B17/157 A61B2019/304 A61B19/50 A61B2017/00526 A61B2019/303 A61B17/1764 A61B34/10 A61B2090/033 A61B2090/034		
优先权	60/943726 2007-06-13 US 60/788339 2006-03-31 US 60/785168 2006-03-23 US 60/431176 2002-12-04 US 60/293488 2001-05-25 US 60/363527 2002-03-12 US 60/380692 2002-05-14 US 60/380695 2002-05-14 US 60/765592 2006-02-06 US 60/416601 2002-10-07 US 60/467686 2003-05-02 US		
其他公开文献	US8951260		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及一种外科切割导向器，用于沿着位于生物组织上的切割路径引导外科器械。手术引导件包括与组织相关联的表面一致的接触表面和至少一个用于限制外科器械在第一方向上的移动并且用于允许外科器械沿着切割路径在第二方向上移动的引导件组织表面。引导件还包括用于限制手术器械沿着切割路径在第二方向上移动的止动件。该停止至少部分地基于患者特定信息。

