



US 20150250493A1

(19) **United States**(12) **Patent Application Publication**
Umar(10) **Pub. No.: US 2015/0250493 A1**(43) **Pub. Date: Sep. 10, 2015**(54) **FOLLICLE PUNCH FOR USE WITH CURLED FOLLICLES**(52) **U.S. CL.**
CPC ... *A61B 17/32053* (2013.01); *A61B 17/32068* (2013.01); *A61B 2017/00752* (2013.01)(71) Applicant: **Sanusi UMAR MD, (US)**(72) Inventor: **Sanusi Umar, Redondo Beach, CA (US)**(21) Appl. No.: **14/387,984**(22) PCT Filed: **Nov. 26, 2013**(86) PCT No.: **PCT/US2013/071991**

§ 371 (c)(1),


(2) Date: **Sep. 25, 2014****Related U.S. Application Data**

(60) Provisional application No. 61/729,733, filed on Nov. 26, 2012, provisional application No. 61/874,664, filed on Sep. 6, 2013.

Publication Classification(51) **Int. Cl.**
A61B 17/3205 (2006.01)
A61B 17/32 (2006.01)(57) **ABSTRACT**

A punch that is particularly useful for removing curled hair follicles from a donor site comprises a generally tubular body disposed about a generally longitudinal axis and having a distal cutting end region terminating distally in a plurality of distally-extending circumferentially disposed, generally prong-like members carrying distally diverging cutting edges and separated by follicle-accommodating slits. In practice, the punch is oriented during the extraction process at the donor site so that the curled hair root passes into, and is spared from the advancing cutting edge by, a slit as the punch is inserted into and penetrates the tissue. The punch may then rotated slightly so that the cutting edges cut most of the tissue surrounding the follicle without making damaging contact with the follicle. It may be noted that a rotary motion may not be necessary and, if rotation is desired, it may be in one direction or be in the form of an oscillatory rotary movement, depending on characteristics of the donor site and targeted follicle.



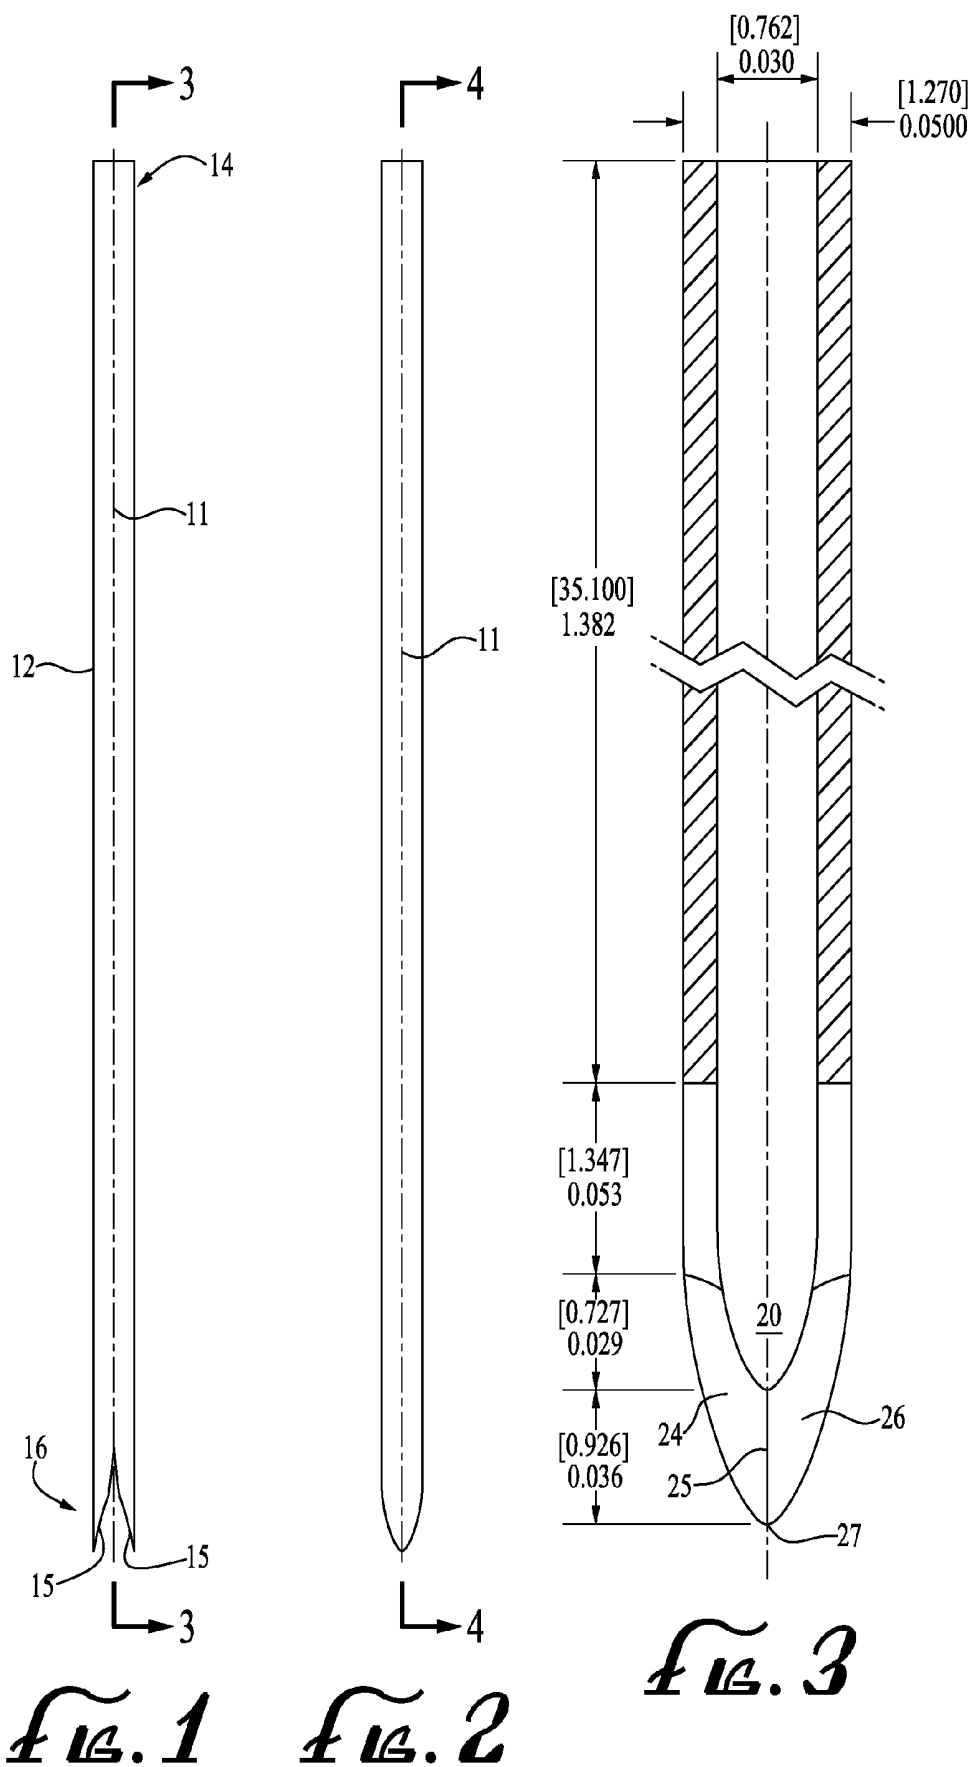

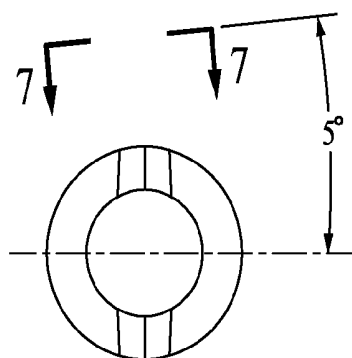


FIG. 6



FIG. 7

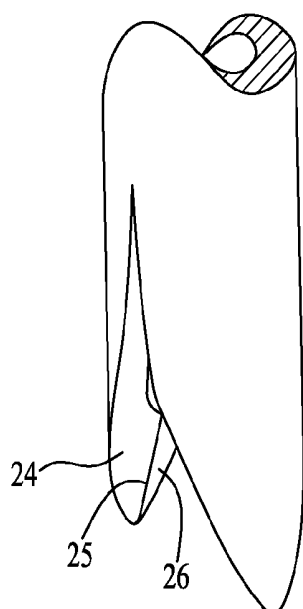


FIG. 8

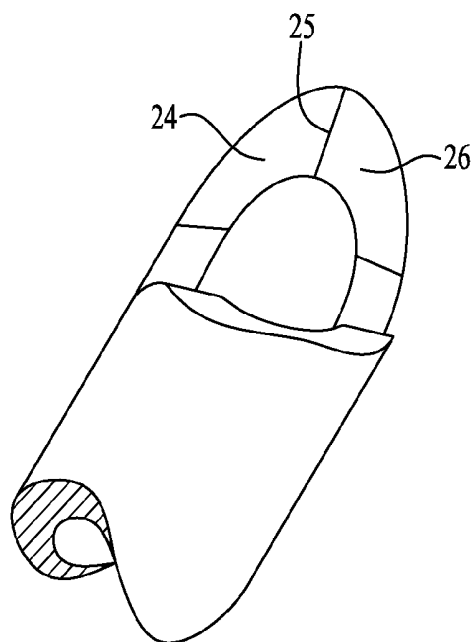


FIG. 9

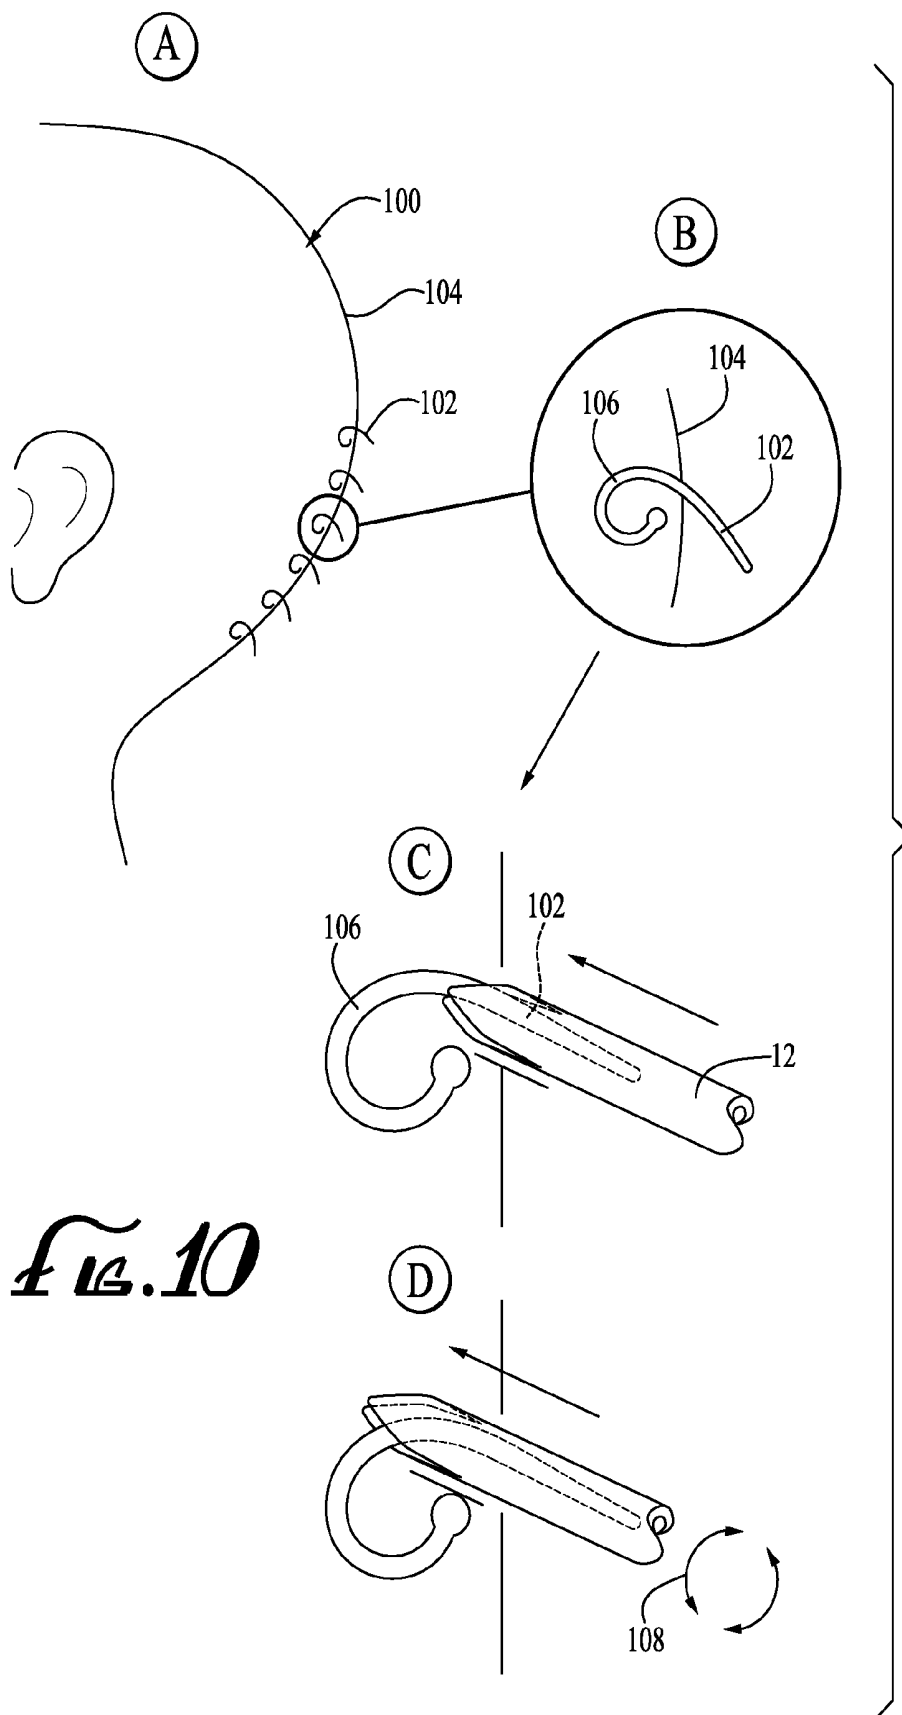


Fig. 10

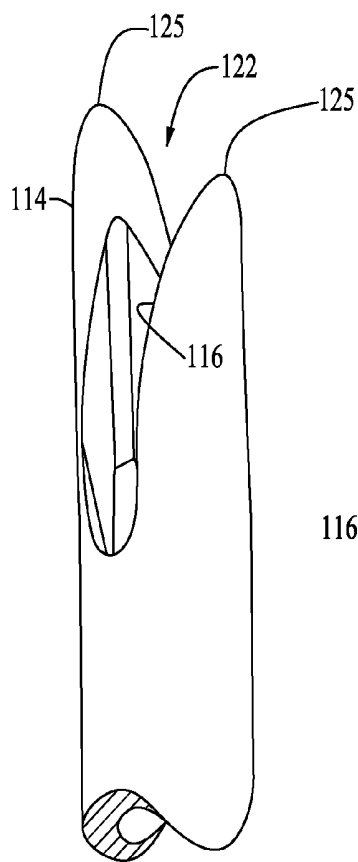


Fig. 11A

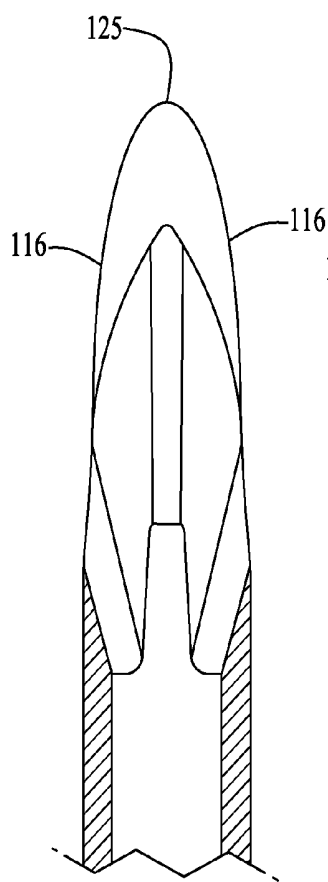


Fig. 11B

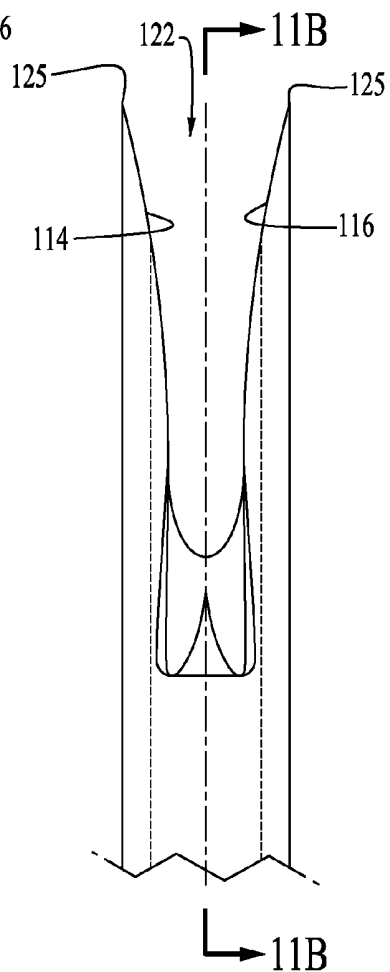


Fig. 11C

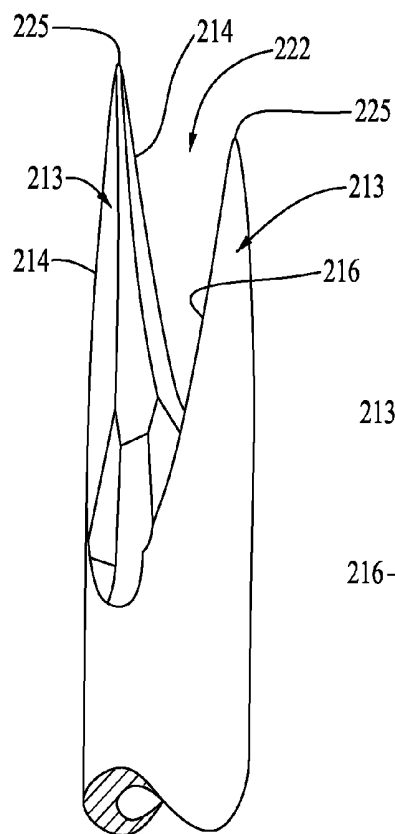


Fig. 12A

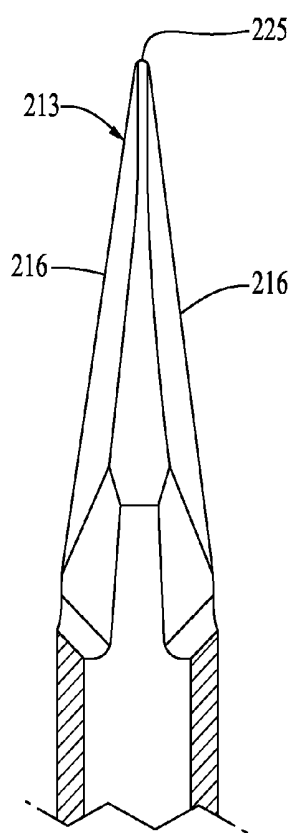


Fig. 12B

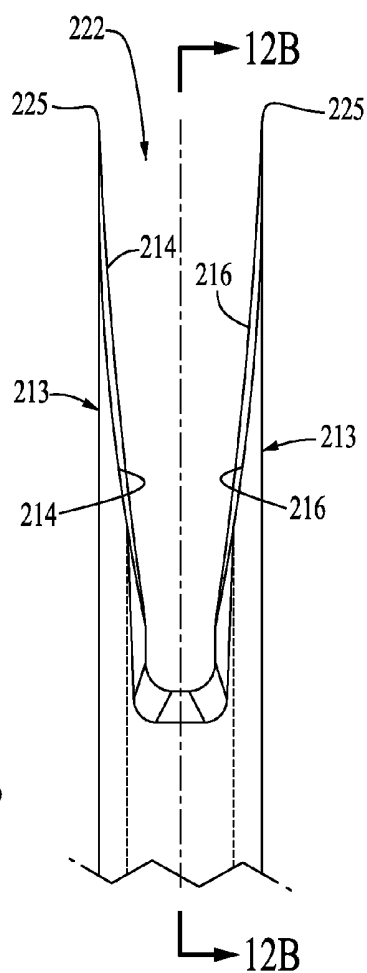


Fig. 12C

FOLLICLE PUNCH FOR USE WITH CURLED FOLLICLES

FIELD OF THE INVENTION

[0001] This invention relates to surgical instruments and, more particularly, to a punch for extracting hair follicles from the skin.

BACKGROUND OF THE INVENTION

[0002] Hair transplantation is a surgical technique that involves moving skin containing hair follicles from one part of the body (the donor site) to bald or balding parts (the recipient site).

[0003] Hair naturally grows in follicles that contain groupings of 1 to 4 hairs, and transplant techniques typically move the 1-4 hair “follicular units” from the donor site to the recipient site.

[0004] The follicles of hair are typically removed from the donor site using punches of between 0.7 mm and 1.25 mm in diameter. The punches are tubular bodies having a skin-contacting cutting edge, and are typically mounted in a tool that causes the punch to rotate as the punch is brought into contact with the donor site. Hair follicles are very easily damaged during the removal process, and damaged follicles are unlikely to be successfully transplanted.

[0005] Curled follicles are extremely susceptible to damage by follicle punches and are therefore particularly difficult to extract for successful transplantation. Such follicles are curled beneath the skin and are easily cut and/or damaged by the advancing cutting edge of conventional punches as the punch penetrates the donor site's tissue.

SUMMARY OF THE INVENTION

[0006] A punch that is particularly useful for removing curled hair follicles from a donor site comprises a generally tubular body disposed about a generally longitudinal axis and having a distal cutting end region terminating distally in a plurality of distally-extending circumferentially disposed, generally prong-like members carrying distally diverging cutting edges and separated by follicle-accommodating slits. In practice, the punch is oriented during the extraction process at the donor site so that the curled hair root passes into, and is spared from the advancing cutting edge by, a slit as the punch is inserted into and penetrates the tissue. The punch may then rotated slightly so that the cutting edges cut most of the tissue surrounding the follicle without making damaging contact with the follicle. It may be noted that a rotary motion may not be necessary and, if rotation is desired, it may be in one direction or be in the form of an oscillatory rotary movement, depending on characteristics of the donor site and targeted follicle.

[0007] The foregoing insertion process may be performed manually or under machine or computer control, and with or without the aid of an ultrasonic transducer coupled to punch to impart a vibratory cutting force against the tissue. In addition, a mechanism for automatically rotating the punch may be employed, and may accordingly be coupled to the ultrasonic transducer if one is used.

[0008] These and further details of the invention will be apparent to those of ordinary skill in the art from reading a description of the currently preferred embodiment of the invention described below, of which the drawing forms a part.

DESCRIPTION OF THE DRAWING

[0009] FIG. 1 is a front elevation view of a punch for removing hair follicles that is constructed in accordance with the invention;

[0010] FIG. 2 is a side elevation view of a punch of FIG. 1;

[0011] FIG. 3 is a longitudinal section view of the punch of FIG. 1, taken along line 3-3 in FIG. 1;

[0012] FIG. 4 is a longitudinal section view of the punch of FIG. 1, taken along line 4-4 in FIG. 2;

[0013] FIG. 5 is an enlarged fragmentary view of the portion of the punch illustrated within the line 5 of FIG. 4;

[0014] FIG. 6 is a bottom plan view of the punch of FIG. 2;

[0015] FIG. 7 is a fragmentary view in perspective of the cutting end region of the punch oriented per line 7-7 in FIG. 6 illustrated in FIG. 1;

[0016] FIG. 8 is an oblique fragmentary elevation view of the cutting end region of the punch of FIG. 1;

[0017] FIG. 9 is an oblique bottom view of the cutting end region of the punch of FIG. 1;

[0018] FIG. 10 is a schematic illustration of the preferred methodology for extracting a curled follicle in accordance with the invention;

[0019] FIGS. 11A is a right front oblique view, in schematic, of an alternative embodiment of a punch for removing hair follicles that is constructed in accordance with the invention;

[0020] FIG. 11B is a longitudinal sectional view of the punch of FIG. 11A, taken along line 11B-11B in FIG. 11C;

[0021] FIG. 11C is a front elevation view, in schematic, of the punch of FIG. 11A,

[0022] FIGS. 12A is a right front oblique view, in schematic, of a second alternative embodiment of a punch for removing hair follicles that is constructed in accordance with the invention;

[0023] FIG. 12B is a longitudinal sectional view of the punch of FIG. 12A, taken along line 12B-12B in FIG. 12C; and

[0024] FIG. 12C is a front elevation view, in schematic, of the punch of FIG. 12A.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0025] Referring to FIGS. 1-9, a preferred punch for extracting curled follicles is illustrated as comprising a generally tubular body 12 extending from a proximal end 14 to a skin-contacting distal end 16 about a generally central longitudinal axis 11. The currently preferred dimensions of the punch are displayed in the Figures in both inches (unbracketed) and millimeters (bracketed), said currently preferred dimensions being part of this Detailed Description.

[0026] The punch's generally tubular body 12 has a distal cutting end region terminating distally in a plurality of distally-extending circumferentially disposed, generally prong-like members 13 carrying distally diverging cutting edges 15 and separated follicle-accommodating slits 22. The currently preferred number of members 13 is two because a pair of such members currently appears to provide the appropriate amount of cutting around the follicle together with sufficient slit width to safely accommodate entry and protection of the follicle during the extraction process.

[0027] As illustrated in the Figures, each of the preferred prong-like members 13 has a generally convex outer surface and a generally concave inner surface substantially the same

as that of the tubular body. As also illustrated in the Figures, each of the prong-like members also has a beveled cutting surface **24**, **26** terminating at a cutting edge, with the bevel preferably being on the inside of the punch so that it terminates at a cutting edge on the punch's outer diameter. However, the formation of bevels on the outer surface of the punch is also possible, although not preferred, and is within the scope of the invention. It may be noted that it is currently believed that the cutting edge portion illustrated in FIG. 3 as 1.653 mm in length may be as long as approximately 4 mm or so, and that the follicle-accommodating slit **22** should preferably be approximately 2 mm-4 mm longer than the cutting edge portion.

[0028] The bevels **24**, **26** are preferably created by grinding cutting edges outwardly from the interiors of the members **13** to produce sharp cutting edges. However, the bevels can also be formed by laser cutting, waterjet or abrasivejet cutting, chemical molding, and/or other manufacturing processes without departing from the scope of the invention.

[0029] The bevels **24**, **26** preferably interface at an apex of the prong-like member to provide a sharp, point-like, leading tip **25** which makes the initial penetration into the tissue that surrounds the targeted follicle, while the widening, generally semi-elliptical profiles of the prong-like members **13** cut more of the surrounding tissue as the punch is urged distally into the site. The leading tip can alternatively be a sharp rounded tip without departing from the scope of the invention.

[0030] The distal end region of the punch may be further provided with generally circumferentially-extending notch having a generally concave shape that generally circumscribes the punch's outer surface. The notch preferably extends 1-2 mm proximally from a location closely adjacent the tip of the punch. The generally concave shape serves two purposes. First, its preferred size and shape results in a wound with everted edges; as the punch enters the tissue surrounding the targeted follicle, the tissue outward of the cut expands against the concavity as it is passed by the cutting edge. When the punch is subsequently withdrawn, the tissue resumes its consequently everted shape. Second, the generally concave shape and preferred sharpening from the inside of the punch results in a cutting force that is outwardly directed away from the follicle and tissue to be extracted, decreasing the risk of damage to the follicle.

[0031] Alternatively, the punch can be provided with a flared distal end having a diameter that has a diverging inner diameter and diverging outer diameter along the last 1 mm or so, with the flared end region resulting in a preferred gap of approximately 1.25 mm between opposing tips. Gaps of great or lesser spacing may be utilized as well, depending on the subject's hair and follicle dimensions without departing from the scope of the invention.

[0032] In one preferred configuration, the shape and dimensions of the slit **22** are, as best illustrated in FIGS. 4 and 5, a general inverted "V" profile having a relatively distal segment and a relatively proximal segment **22a** that is more steeply tapered than the distal segment **22b**. The more steeply tapered interior of the relatively proximal segment provides a slit length and width that accommodates the follicle as the punch penetrates the surrounding tissue, in order to spare the follicle from being cut; the less tapered distal segment of the slit results in adequate spacing of the cutting edges of adjacent prong-like members **13** from the follicle's root structure so that the cutting yields a viable implant. Although the same taper could be used for both segments, it is preferable not to

do so since a generally uniformly steep taper (such as that of the preferred distal segment) would add unnecessary length to the punch to achieve the needed spacing between the prongs, while a generally uniformly shallow taper (such as that of the preferred distal segment) would fail to provide the slit length needed.

[0033] The cutting edge of the punch, which preferably extends from its leading tip to the beginning of the steeply tapered portion of the slit (i.e., the interface of the proximal and distal slit segments), may be smooth or include one or more serrations. If serrations are included, it is currently preferable that there be one or two serrations, with rounded edges, although the use of sharply angled edges would not depart from the scope of the invention.

[0034] FIG. 10 schematically illustrates (at "A") a subject's head **100** having a plurality of hairs **102** protruding from the skin **104**. A hair **102** and its curled, subcutaneously-located follicle **106** is schematically illustrated in magnified form at "B".

[0035] As next schematically illustrated with greater magnification at "C", the preferred punch is inserted into the skin at the donor site in such a way that the hair enters the punch's interior while the follicle **106** passes uncut through the slit **22**. As further illustrated at "D", the punch is advanced past the follicle, which remains undamaged by the cutting edges of the punch by passing through the slit. Once the punch has penetrated sufficiently, it can be partially rotated back and forth if desired, as schematically illustrated by the arrows, resulting in an arcuate cut in the tissue substantially circumscribing the curled follicle, while the follicle itself is spared by its clearance within the slit and isolation from the cutting edges. The intact hair follicle is then removed from the donor site for subsequent transfer to the recipient site.

[0036] To penetrate the skin, the punch could be manually pressed proximally by hand. Currently, it is believed that the use of an ultrasonic transducer to apply rapid, incremental, proximally-directed cutting force pulses to the tissue via the punch offers a more precisely controllable methodology for penetrating the tissue while the punch is positioned at the donor site and oriented so as to accommodate the follicle within the slit.

[0037] Turning to FIGS. 11A-C, a second currently preferred configuration of a follicle punch is illustrated with its currently preferred dimensions in mm. It should be noted that the interior surfaces of the punch are smooth; the apparent facets illustrated in FIGS. 11A and 11B are computer-generated "tangent" lines connoting a change in surface direction only.

[0038] The punch illustrated in FIGS. 11A-C comprises a pair of distally-extending circumferentially disposed, generally prong-like members **113** carrying distally diverging cutting edges **114**, **116** and separated by a generally U-shaped follicle-accommodating slit **122**. The cutting edge of each prong-like member is again preferably formed from the inside of the punch by grinding cutting edges outwardly from the interior region of the members. However, as noted earlier, the cutting edges can also be formed by laser cutting, waterjet or abrasivejet cutting, chemical molding, and/or other manufacturing processed without departing from the scope of the invention. The leading tips **125** of the punch illustrated in FIGS. 11A-C are sharp rounded tips that make the initial penetration into the skin and tissue surrounding the targeted follicle.

[0039] To minimize the risk of the follicle being cut during the extraction process, the formation of the cutting edges may be limited to the first 0.060 inches (1.52 mm) or so from the distal tip **125** of the punch, so that the cutting edges pass the follicle during insertion of the punch at the donor site and any subsequent contact between the punch and follicle is not with a cutting edge. The cutting edge may however extend the entire length, or a different length, of the slits.

[0040] The gap between the prong-like members of the punch illustrated in FIGS. **11A-C** is preferably 0.02-0.03 inches (0.51-0.76 mm) wide. It preferably extends proximally from the distal tip of the punch for about 0.12 to 0.16 inches (3.05-4.06 mm)

[0041] Turning to FIG. **12A-C**, another preferred variation of the punch is illustrated, wherein the punch comprises a pair of distally-extending circumferentially disposed generally prong-like members **213** that carry distally-diverging cutting edges **214**, **216** separated by a generally U-shaped follicle-accommodating slit. The leading tips **225** of the members **213** are sharp pointed tips. Each cutting edge **214**, **216** is preferably formed from the inside of the punch by grinding cutting edges outwardly from the interior region of the prong-like members. However, as noted earlier, the cutting edges can also be formed by laser cutting, waterjet or abrasivejet cutting, chemical molding, and/or other manufacturing processed without departing from the scope of the invention. To minimize the risk of the follicle being cut during the extraction process, the formation of the cutting edges may be limited to the first 0.060 inches (1.52 mm) or so from the distal tip of the punch, so that the cutting edges pass the follicle during insertion of the punch at the donor site and any subsequent contact between the punch and follicle is not with a cutting edge. The cutting edge may however extend the entire length, or a different length, of the gap.

[0042] The gap between the prong-like members of the punch illustrated in FIGS. **12A-C** is preferably 0.03 inches (0.076 mm) wide, and preferably extends proximally from the distal tip of the punch for about 0.16 inches (4.06 mm)

[0043] As with FIGS. **11A-B**, it should be noted that the interior surfaces of the punch illustrated in FIGS. **12A-B** are smooth, and that the apparent facets are computer-generated “tangent” lines connoting a change in surface direction only.

[0044] Regardless of the specific version of follicle punch utilized, the inclusion of an ultrasonic transducer coupled to the punch and selectively operable to enhance the cutting operation is desirable. The transducer is mounted within a handpiece to which the punch is attached in a manner analogous to the transducer, handpiece and scaler tip of an ultrasonic dental scaler. The punch may be further mounted for reciprocating pivoting movement within the handpiece so as to move in such manner with or without ultrasonic vibratory movement. Likewise, the configuration may be such that ultrasonic vibratory movement can be generated with or without the pivoting movement.

[0045] In practice, it has been found that an adjustable degree of longitudinally reciprocating ultrasonic movement is desirable in that the appropriate degree of movement is a function of the subject’s skin thickness and tissue, with higher settings being suitable when cutting through thicker skin or scar tissue for example. The use of the ultrasonic movement permits the surgeon or other operator of the equipment to better use his/her “fine motor” muscle movement to more precisely make the required incisions with greater sensitivity and finesse.

[0046] Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as will be defined by appended claims.

1. A follicle punch, configured to remove a follicle with an initial penetration into skin comprising:

a tubular body disposed about a longitudinal axis and having a distal cutting end region terminating distally in a pair of distally-extending, circumferentially disposed, prong-like members carrying distally diverging cutting edges separated by follicle-accommodating slits.

2. The follicle punch of claim 1 wherein each of the prong-like members include a beveled cutting surface terminating at a cutting edge.

3. The follicle punch of claim 2 wherein a bevel is formed on an inside surface of the tubular body.

4. The follicle punch of claim 3 wherein the cutting edge formed by the beveled cutting surface is at an outer diameter of the follicle punch.

5. The follicle punch of claim 1 wherein the prong-like members are arranged to terminate in respective cutting edges having a longitudinal length consisting of a range between 1.65 mm and 4 mm.

6. The follicle punch of claim 5 wherein the follicle-accommodating slits are 2 mm to 4 mm longer than the cutting edges.

7. The follicle punch of claim 1 wherein the follicle-accommodating slits are 2 mm to 4 mm longer than a cutting edge of each prong-like member.

8. The follicle punch of claim 1 wherein the prong-like members are arranged to respectively terminate distally in a sharp, point-like, leading tip which makes the initial penetration into tissue surrounding the follicle.

9. The follicle punch of claim 1 wherein the prong-like members are arranged to respectively terminate distally in a sharp rounded leading tip which makes the initial penetration into tissue surrounding the follicle.

10. (canceled)

11. (canceled)

12. The follicle punch of claim 1 wherein the follicle-accommodating slits each have a inverted “V” profile.

13. The follicle punch of claim 12 wherein the inverted “V” profile consists of a relatively distal segment and a proximal segment that is more steeply tapered than the distal cutting end region.

14. The follicle punch of claim 13 wherein a cutting edge of each prong-like member extends from its leading tip to the proximal segment.

15. The follicle punch of claim 1 wherein the cutting edges have one or more serrations.

16. The follicle punch of claim 1 wherein the follicle-accommodating slits each have a generally inverted “U” shape.

17. The follicle punch of claim 1 wherein the prong-like members are arranged to respectively terminate distally in a leading tip which makes the initial penetration into tissue surrounding the follicle, and the cutting edges extend proximally from tips of the prong-like members and next to the follicle-accommodating slits, the follicle-accommodating slits being longer than the cutting edges by a distance sufficient to enable the cutting edges to pass the follicle during insertion of the follicle punch at a donor site so that any subsequent contact between the follicle punch and follicle

caused by a rotational movement of the follicle punch about said longitudinal axis and is not with a cutting edge.

18. The follicle punch of claim **1** including a handpiece coupled to the follicle punch for enabling the follicle punch to be controllably manipulated by a user in removal of a hair follicle from a targeted donor site, and an ultrasonic transducer within the handpiece and coupled to the follicle punch and selectively operable by the user to induce ultrasonic movement in the follicle punch to enhance the cutting to controllably cut the skin and tissue around the targeted donor site.

19. The follicle punch of claim **18** wherein the ultrasonic movement is generally axial.

20. The follicle punch of claim **1** wherein the prong-like members are arranged to terminate distally in respective leading tips that make the initial penetration into tissue surrounding the follicle, and a distal end region of the follicle punch comprising the prong-like members is flared.

21. A follicle punch, configured to remove a follicle with an initial penetration into skin comprising:

a tubular body disposed about a longitudinal axis and having a distal cutting end region terminating distally in a pair of distally-extending, circumferentially disposed, prong-like members carrying distally diverging cutting edges separated by follicle-accommodating slits

wherein the prong-like members are arranged to terminate distally in respective leading tips that make the initial penetration into tissue surrounding the follicle, and a distal end region of the follicle punch includes a circumferentially-extending notch having a concave shape that circumscribes an outer surface of the follicle punch.

22. The follicle punch of claim **20** wherein the circumferentially-extending notch extends proximally 1-2 mm from tips of the prong-like members.

* * * * *

专利名称(译)	Follicle Punch适用于卷曲的毛囊		
公开(公告)号	US20150250493A1	公开(公告)日	2015-09-10
申请号	US14/387984	申请日	2013-11-26
[标]申请(专利权)人(译)	UMAR MD SANUSI		
申请(专利权)人(译)	UMAR MD , SANUSI		
当前申请(专利权)人(译)	奥马尔SANUSI		
[标]发明人	UMAR SANUSI		
发明人	UMAR, SANUSI		
IPC分类号	A61B17/3205 A61B17/32		
CPC分类号	A61B17/32053 A61B2017/00752 A61B17/320068 A61B17/3468 A61B2017/320098 A61F2/10 F04C2270/0421		
优先权	61/874664 2013-09-06 US 61/729733 2012-11-26 US		
其他公开文献	US9987038		
外部链接	Espacenet USPTO		

摘要(译)

特别适用于从供体部位移除卷曲毛囊的冲头包括大致管状的主体，该主体围绕大致纵向轴线设置，并且具有远端切割端部区域，所述远端切割端部区域在多个向远侧延伸的周向设置的，通常为叉状的构件中向远端终止。携带远端发散的切割边缘并由容纳卵泡的狭缝分开。在实践中，冲头在供体部位的提取过程中被定向，使得当冲头插入并穿透组织时，卷曲的发根进入并通过狭缝从前进的切割边缘中剔除。然后，冲头可以稍微旋转，使得切割边缘切割毛囊周围的大部分组织，而不会与毛囊形成破坏性接触。可以注意到，旋转运动可能不是必需的，并且如果需要旋转，它可以在一个方向上或者是振荡旋转运动的形式，这取决于供体部位和目标卵泡的特征。

