


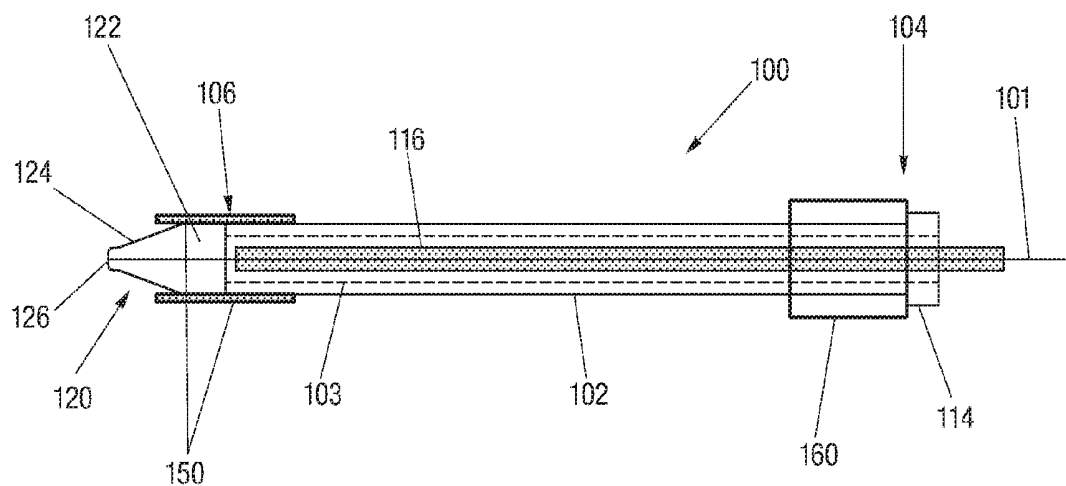

US 20190076161A1

(19) **United States**(12) **Patent Application Publication**  
**Chin et al.**(10) **Pub. No.: US 2019/0076161 A1**(43) **Pub. Date: Mar. 14, 2019**(54) **UNITARY ENDOSCOPIC VESSEL  
HARVESTING DEVICES**(71) Applicant: **Saphena Medical, Inc.**, West  
Bridgewater, MA (US)(72) Inventors: **Albert K. Chin**, Palo Alto, CA (US);  
**Mark J. Orphanos**, Foxboro, MA  
(US); **Michael Barenboym**, Cambridge,  
MA (US)(21) Appl. No.: **16/185,215**(22) Filed: **Nov. 9, 2018****Related U.S. Application Data**(60) Continuation of application No. 15/287,084, filed on  
Oct. 6, 2016, which is a division of application No.  
14/190,873, filed on Feb. 26, 2014, now Pat. No.  
9,498,246.(60) Provisional application No. 61/833,814, filed on Jun.  
11, 2013, provisional application No. 61/782,034,  
filed on Mar. 14, 2013.**Publication Classification**(51) **Int. Cl.**  
**A61B 17/3205** (2006.01)  
**A61B 17/00** (2006.01)**A61B 17/34** (2006.01)**A61B 17/32** (2006.01)**A61B 18/14** (2006.01)**A61B 18/00** (2006.01)**A61B 17/3201** (2006.01)(52) **U.S. Cl.**CPC .... **A61B 17/3205** (2013.01); **A61B 17/00008**  
(2013.01); **A61B 17/32053** (2013.01); **A61B**  
**17/3417** (2013.01); **A61B 17/320016**  
(2013.01); **A61B 17/32002** (2013.01); **A61B**  
**2017/00778** (2013.01); **A61B 2017/00907**  
(2013.01); **A61B 2018/00601** (2013.01); **A61B**  
**2017/00969** (2013.01); **A61B 2018/00404**  
(2013.01); **A61B 2018/0063** (2013.01); **A61B**  
**17/3201** (2013.01); **A61B 18/148** (2013.01)(57) **ABSTRACT**

Unitary endoscopic vessel harvesting devices are disclosed. In some embodiments, such devices comprise an elongated body having a proximal end and a distal end, a tip disposed at the distal end of the elongated body; and a cutting unit having a first cutting portion and a second cutting portion, the first cutting portion and the second cutting portion being moveable in a longitudinal direction relative to the elongated body to capture a blood vessel between the first cutting portion and the second cutting portion, and being rotatable relative to one another circumferentially about the tip to cut the captured blood vessel.



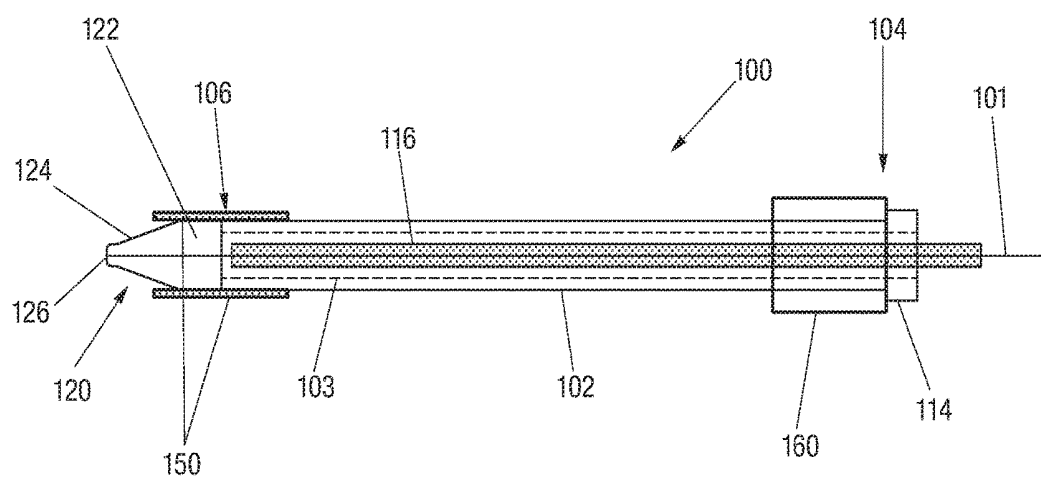


FIG. 1A

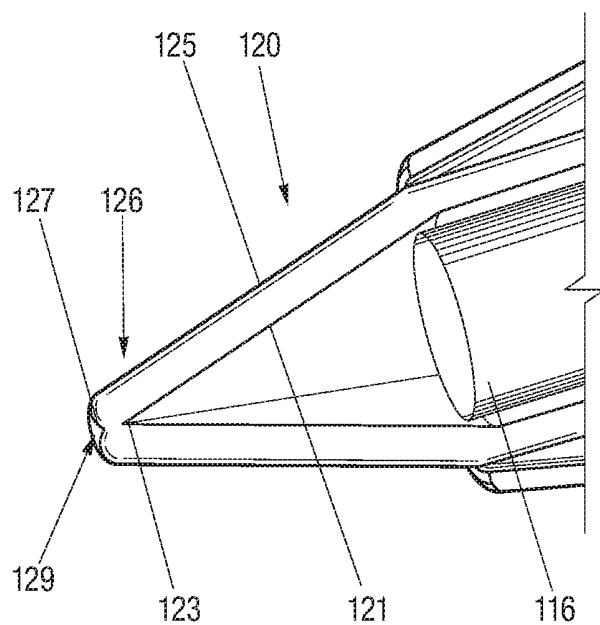


FIG. 1B

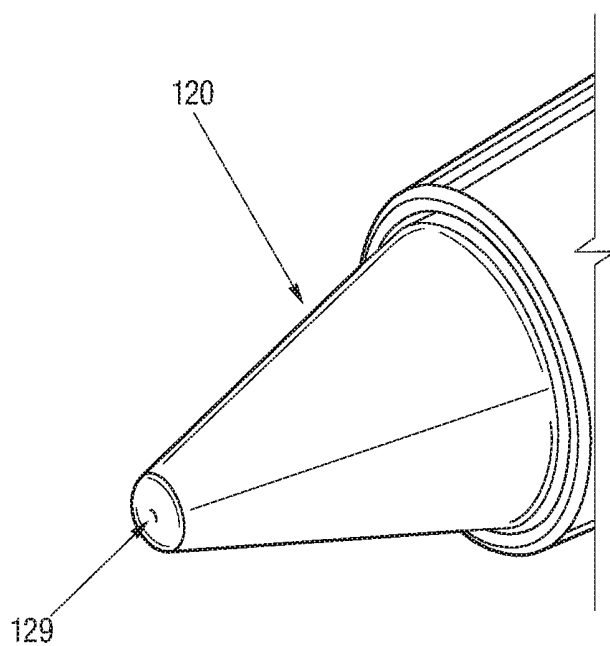


FIG. 1C

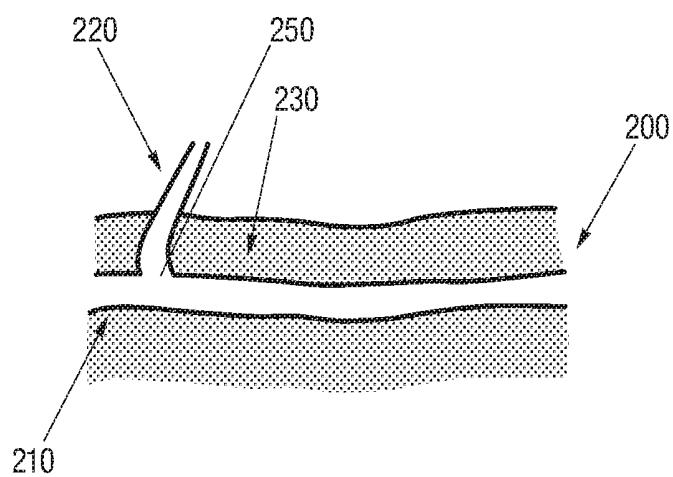


FIG. 2A

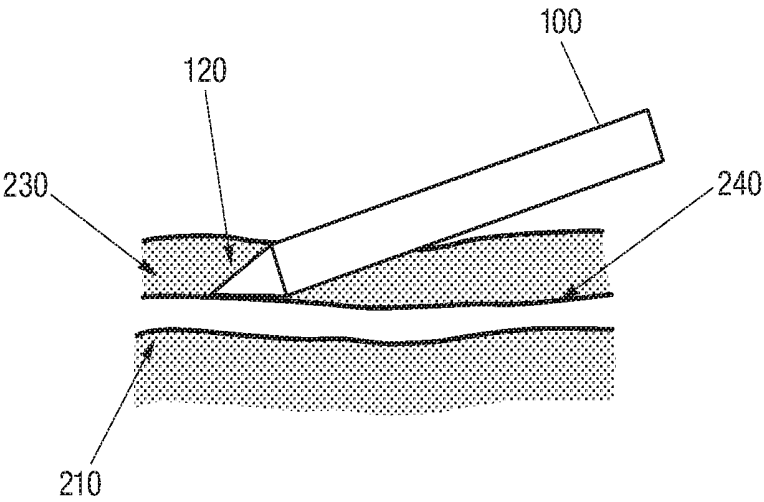


FIG. 2B

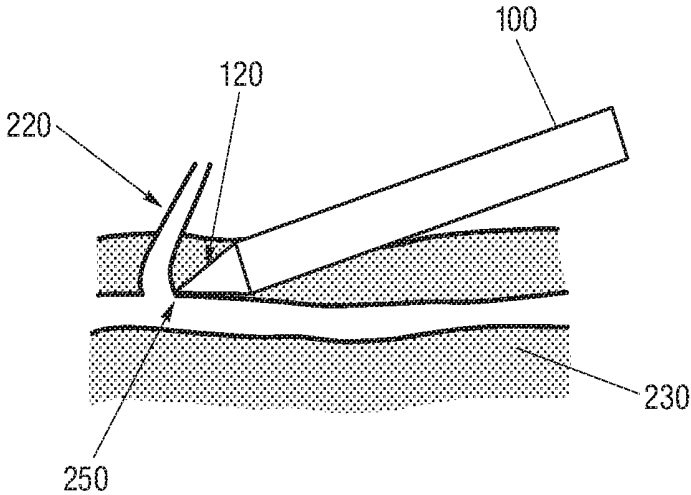


FIG. 2C

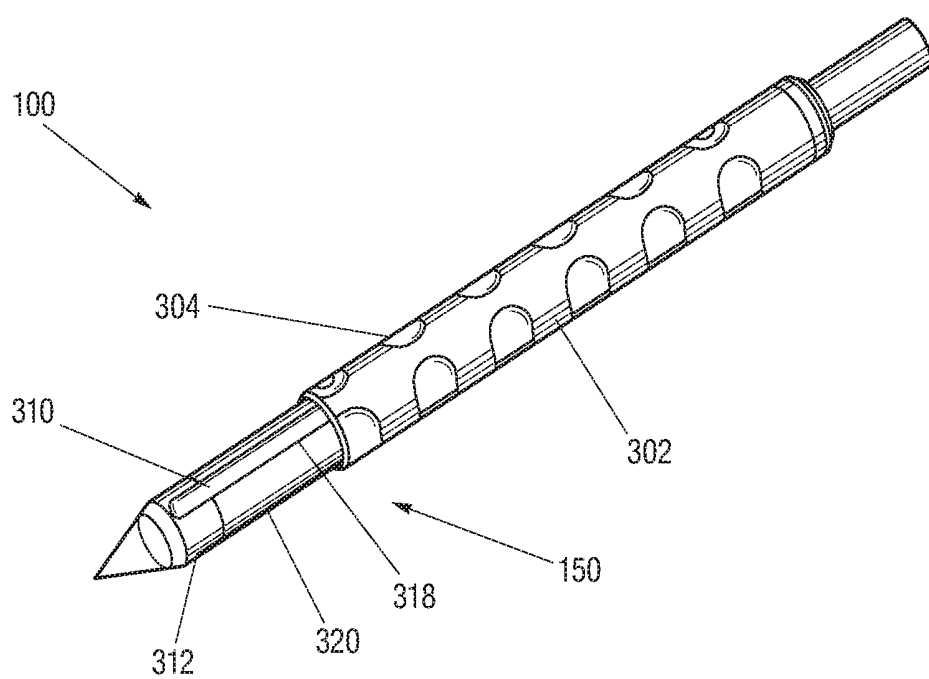


FIG. 3A

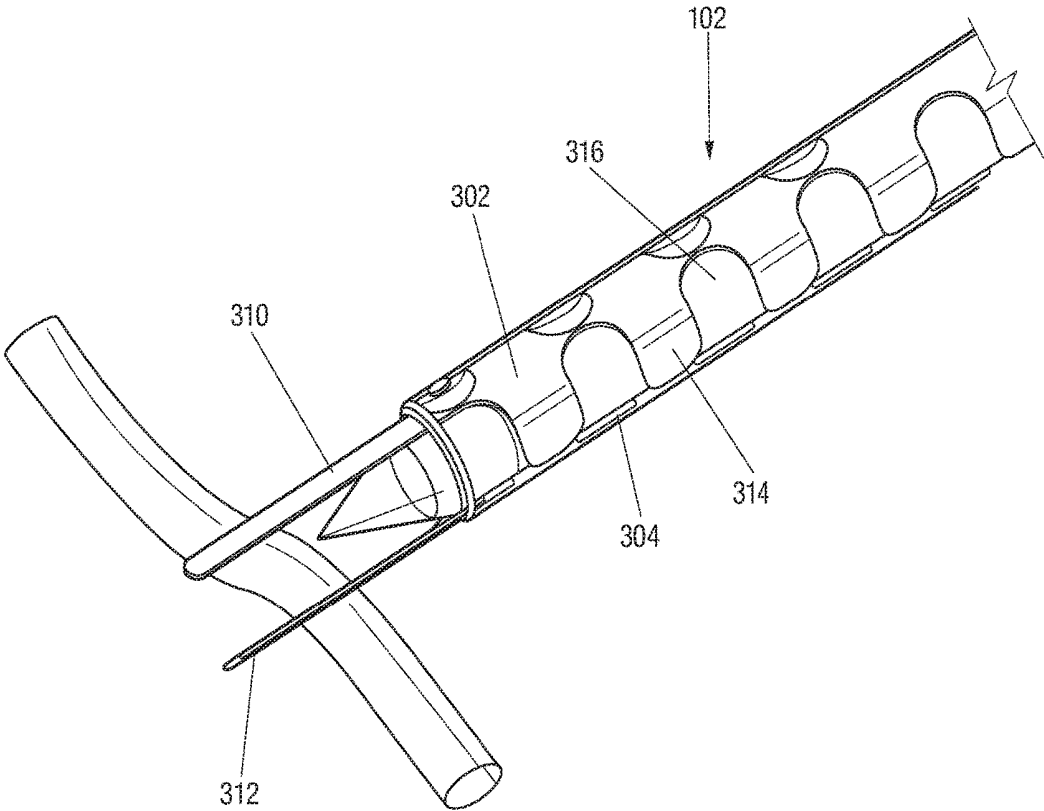


FIG. 3B



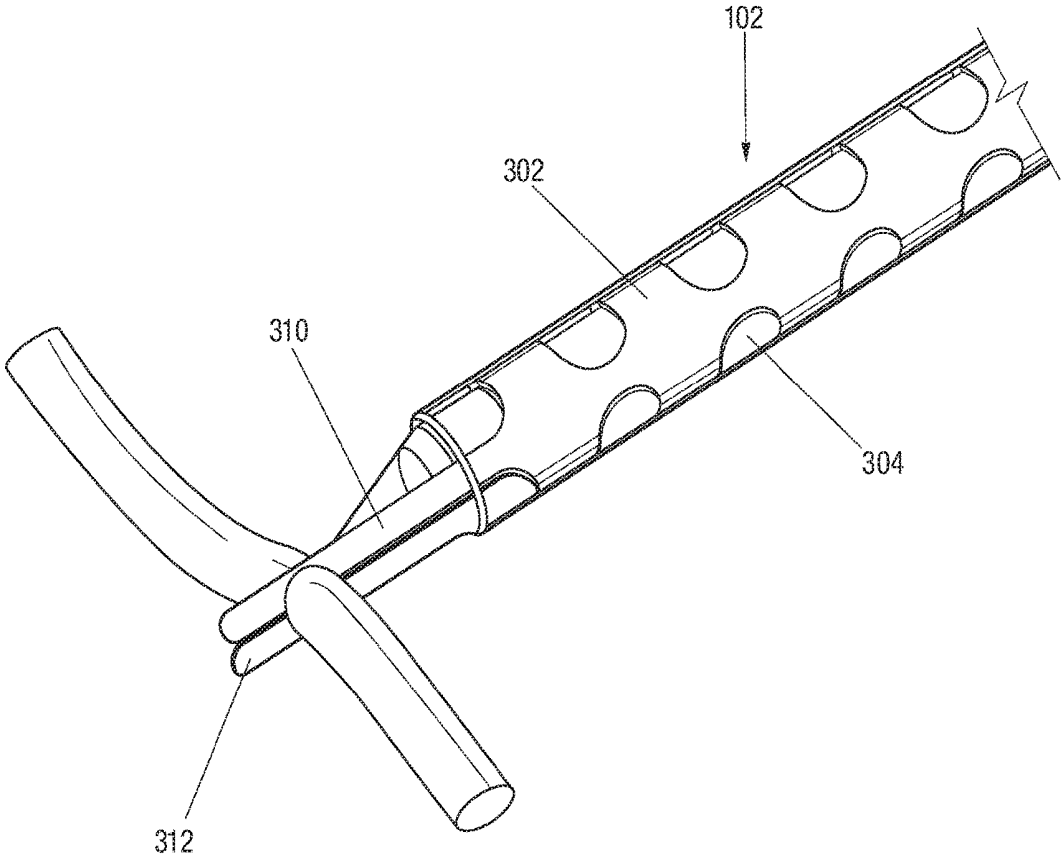


FIG. 3C

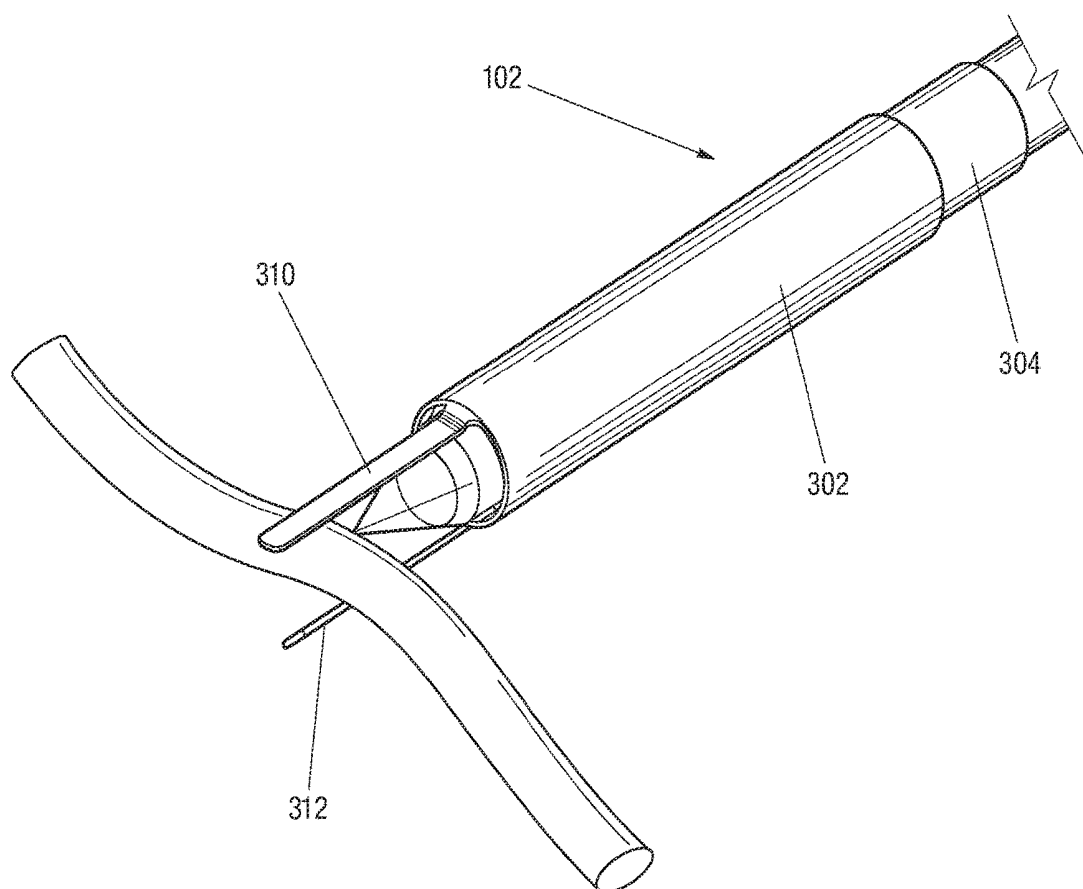


FIG. 4A

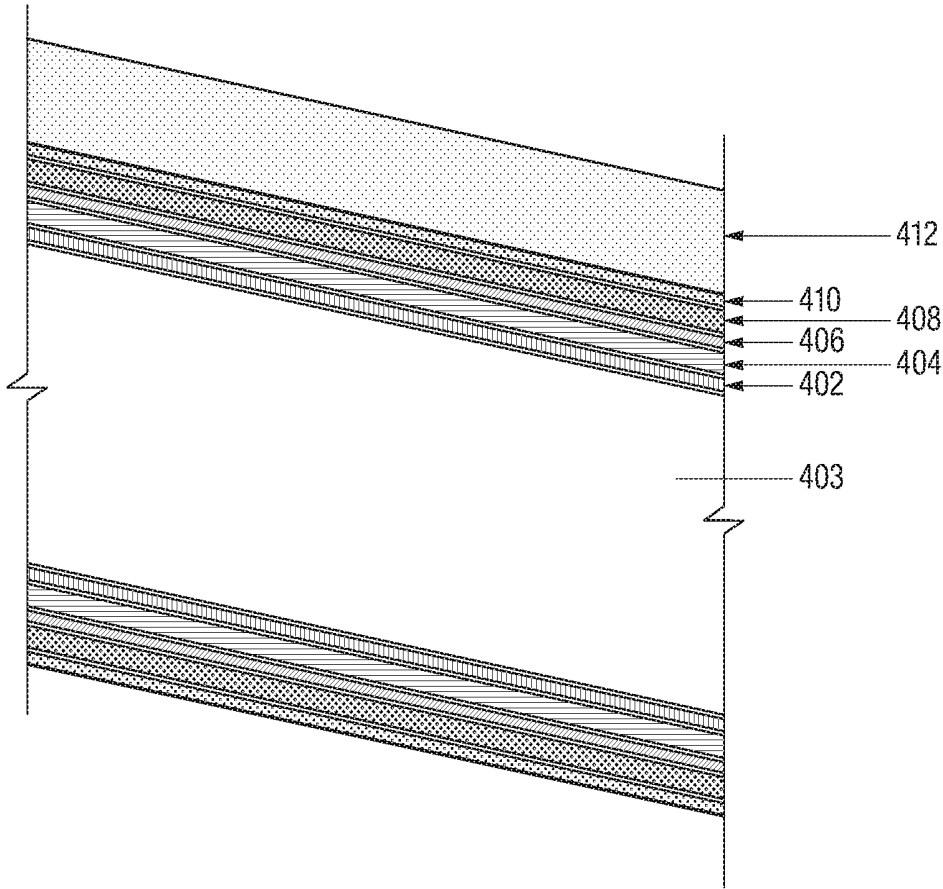


FIG. 4B

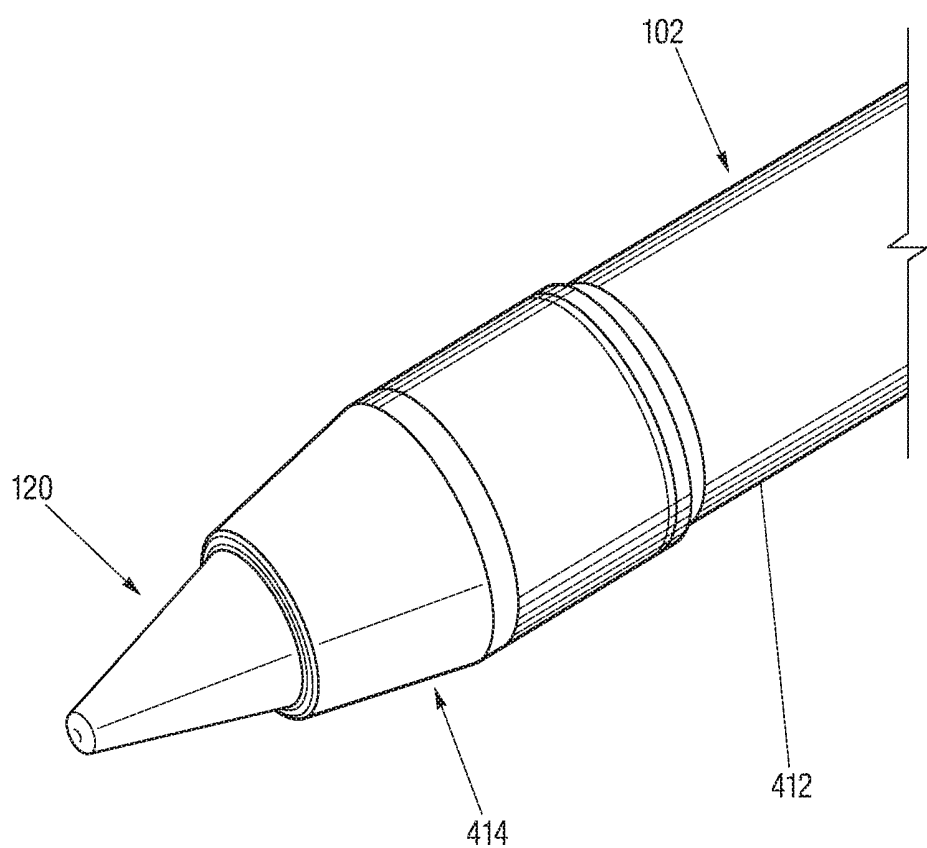


FIG. 4C

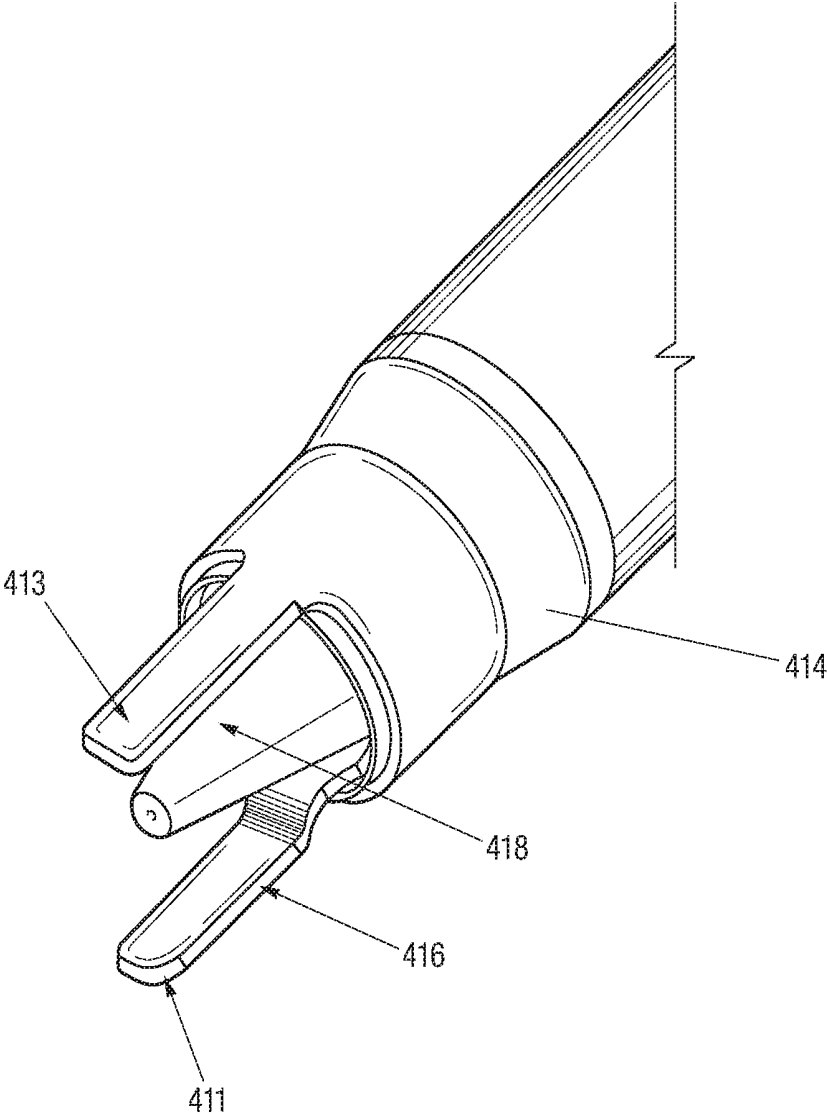


FIG. 4D

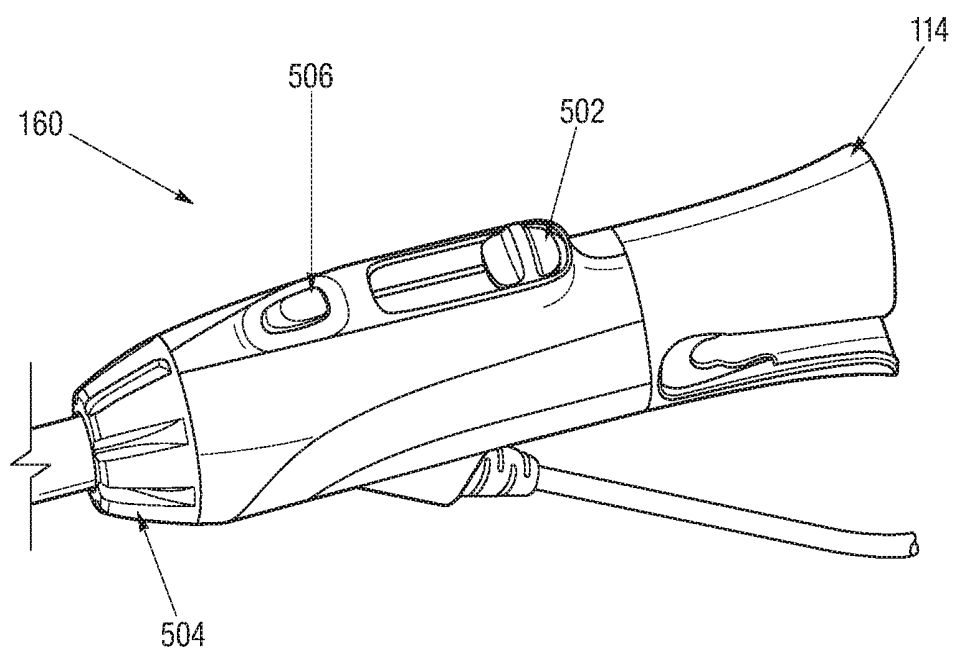


FIG. 5

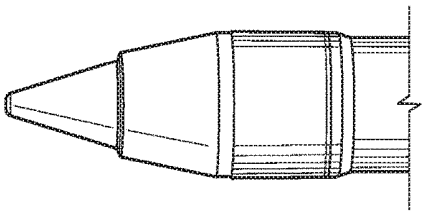


FIG. 6A

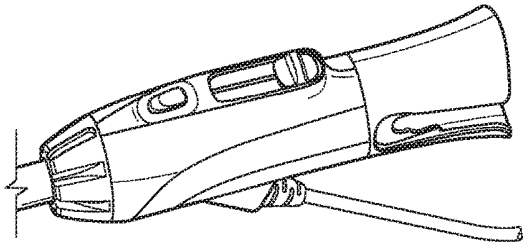


FIG. 6B

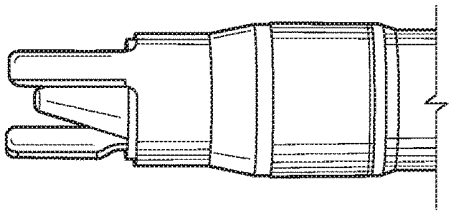


FIG. 6C

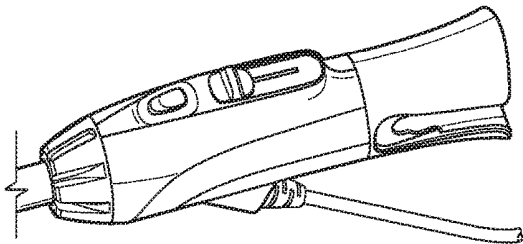


FIG. 6D

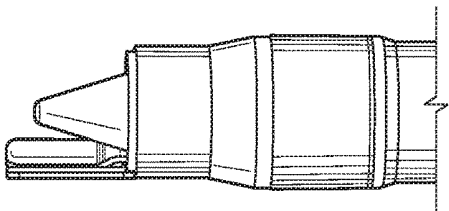


FIG. 6E

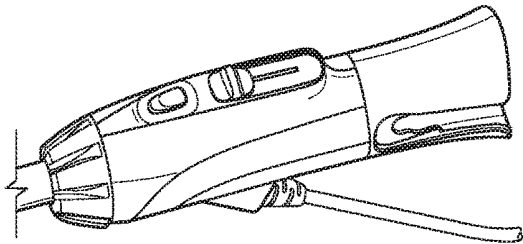


FIG. 6F

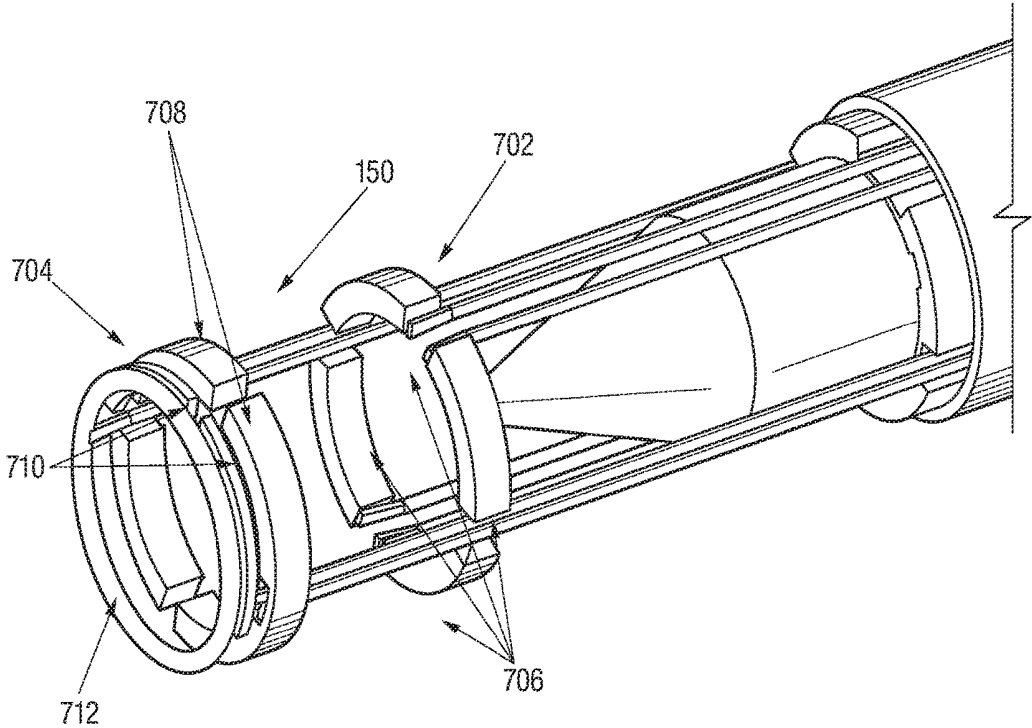


FIG. 7A



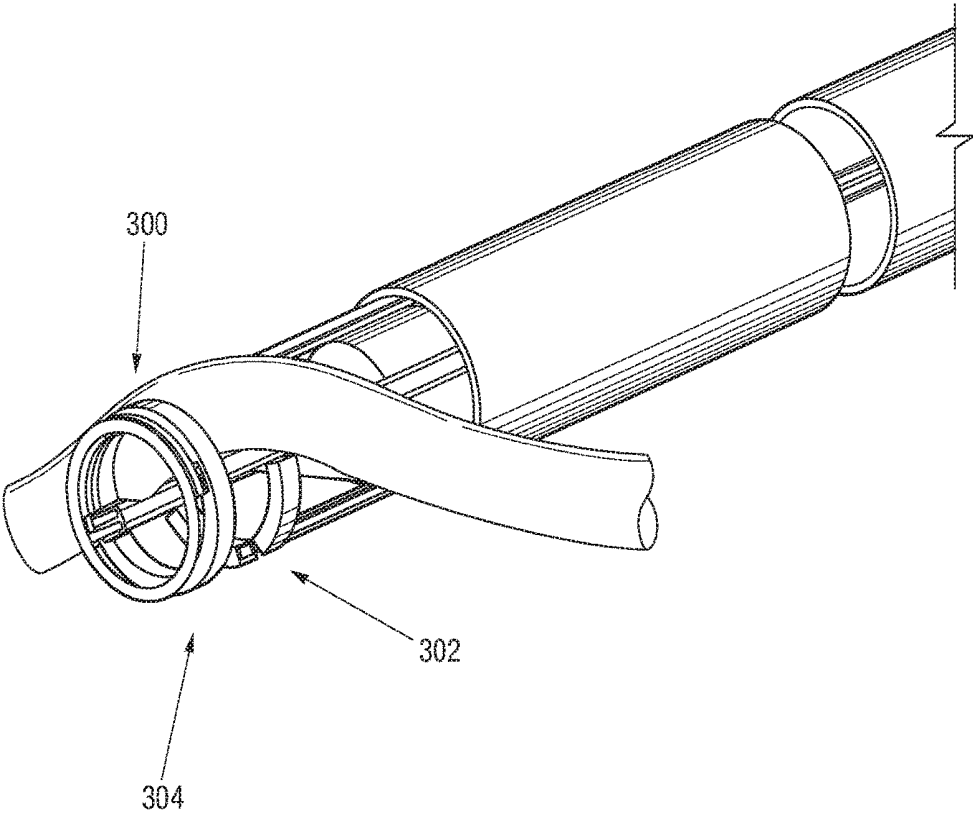


FIG. 7B

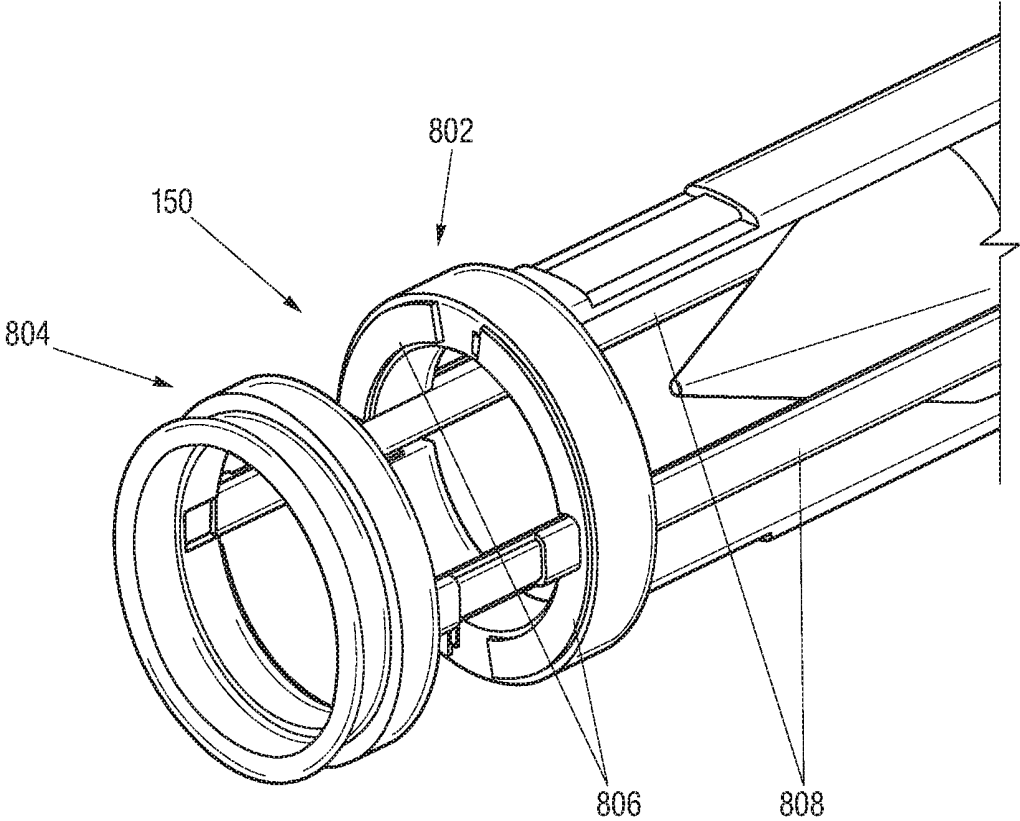


FIG. 8

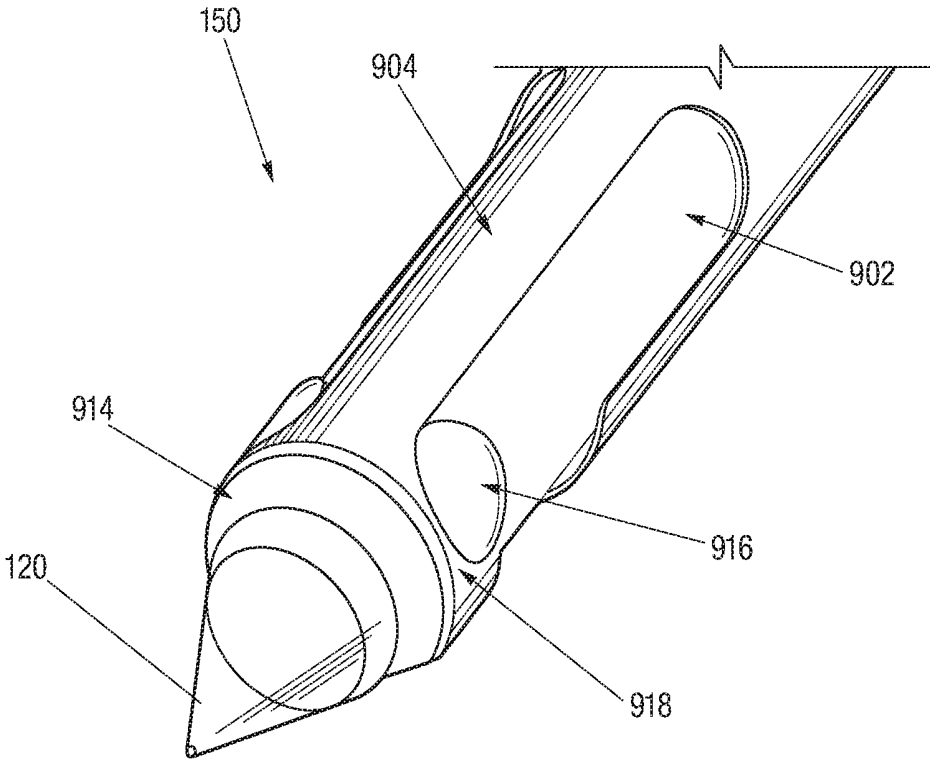
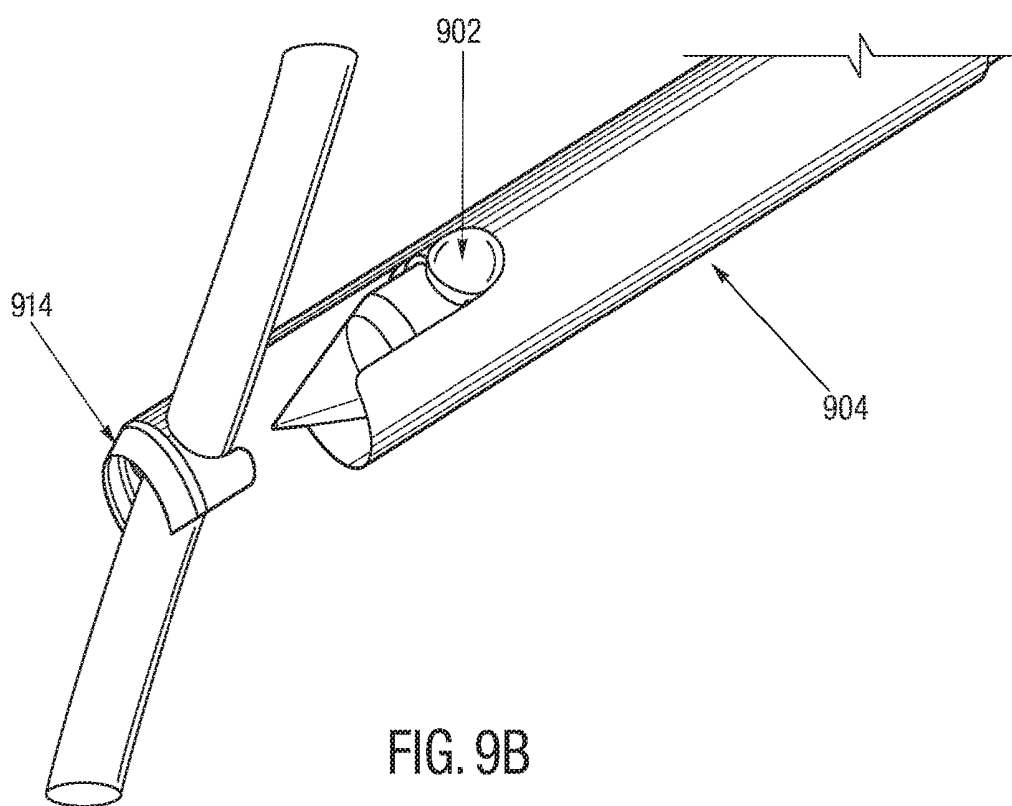


FIG. 9A



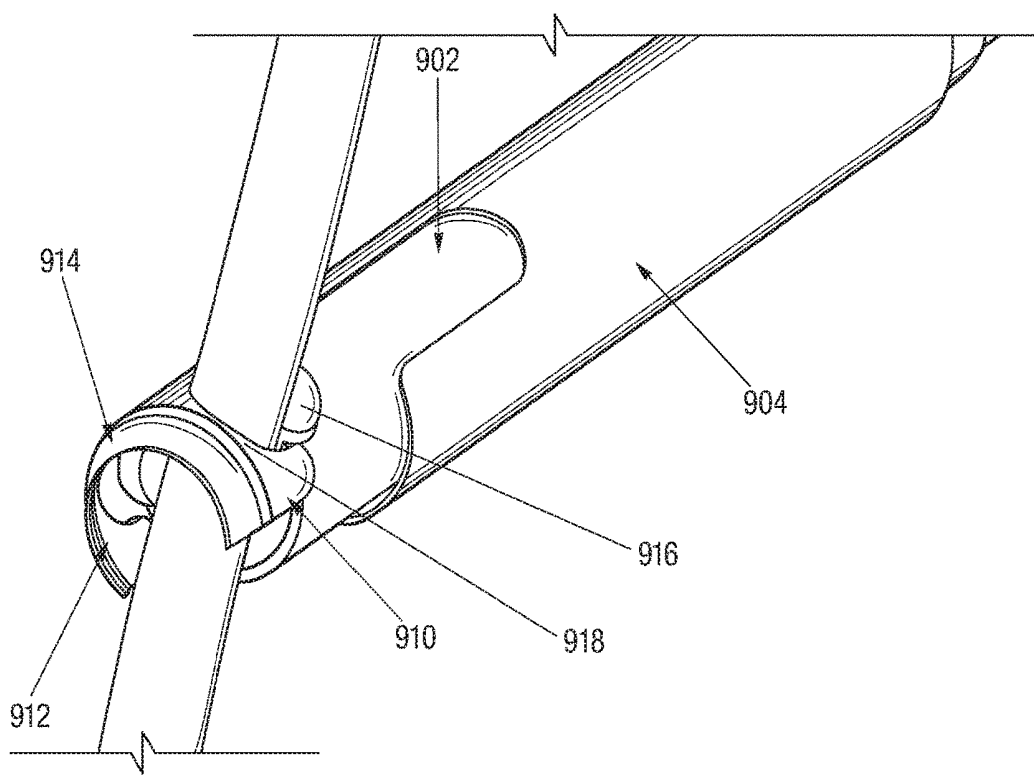


FIG. 9C

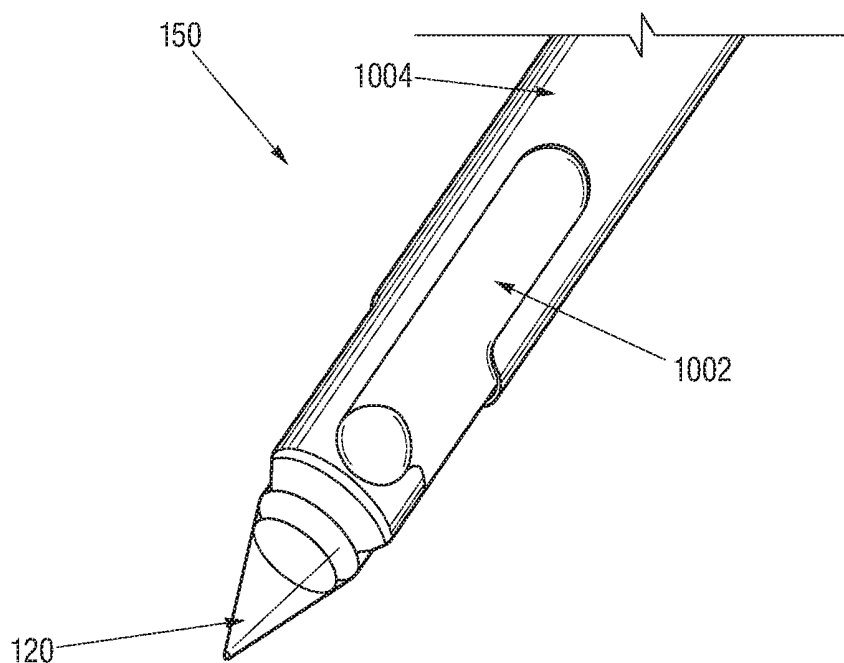


FIG. 10A

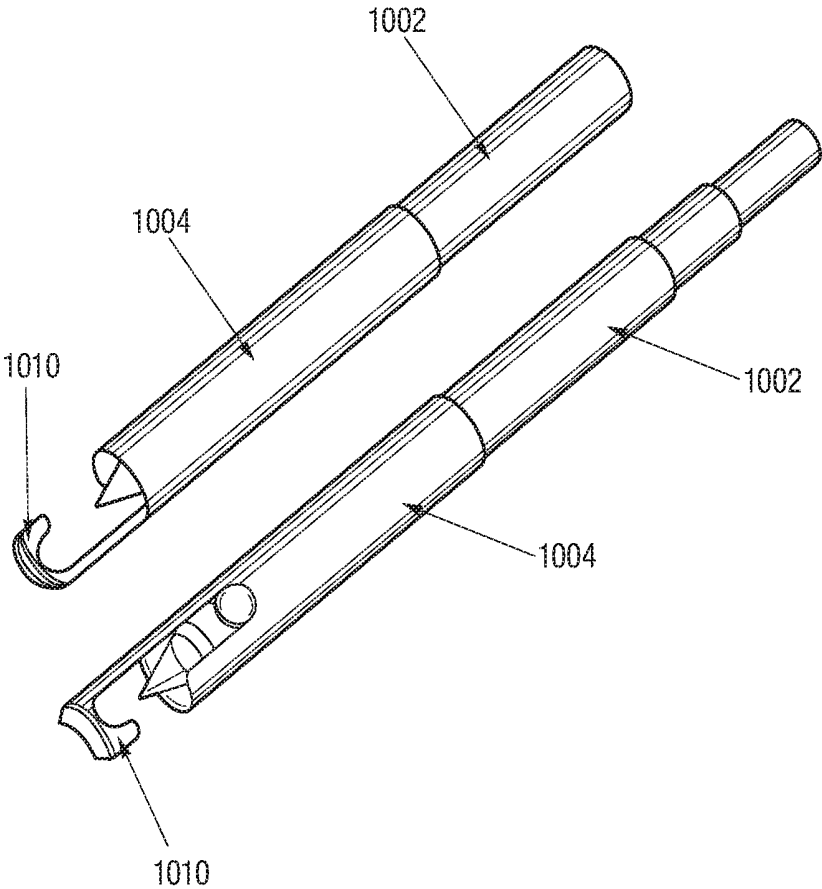


FIG. 10B

## UNITARY ENDOSCOPIC VESSEL HARVESTING DEVICES

### RELATED APPLICATIONS

[0001] This application is a continuation patent application of U.S. patent application Ser. No. 15/287,084, filed Oct. 6, 2016, which is a divisional patent application of U.S. patent application Ser. No. 14/190,873, filed Feb. 26, 2014, which claims priority to and the benefit of U.S. Provisional Application No. 61/782,034, filed Mar. 14, 2013 and U.S. Provisional Application No. 61/833,814, filed Jun. 11, 2013, each of which is incorporated herein by reference in its entirety.

### TECHNICAL FIELD

[0002] The presently disclosed embodiments relate to endoscopic cannulas and methods of their use.

### BACKGROUND

[0003] Vessel harvesting is a surgical technique that is commonly used in conjunction with coronary artery bypass surgery. During a bypass surgery, blood is rerouted to bypass blocked arteries to restore and improve blood flow and oxygen to the heart. The blood may be rerouted using a bypass graft, where one end of the by-pass graft is attached to a blood source upstream of the blocked area and the other end is attached downstream of the blocked area, creating a “conduit” channel or new blood flow connection bypassing the blocked area. Commonly, a surgeon will remove or “harvest” healthy blood vessels from another part of the body to create the bypass graft. The success of coronary artery bypass graft surgery may be influenced by the quality of the conduit and how it is handled or treated during the vessel harvest and preparation steps prior to grafting.

[0004] Vessel harvesting methods involve selecting a vessel, traditionally, the great saphenous vein in the leg or the radial artery in the arm to be used as a bypass conduit sealing off and cutting smaller blood vessels that branch off the main vessel conduit and harvesting the main conduit from the body. This practice does not harm the remaining blood vessel network, which heals and maintains sufficient blood flow to the extremities, allowing the patient to return to normal function without noticeable effects.

[0005] Minimally invasive technique for vessel harvesting is known as endoscopic vessel harvesting, a procedure that requires only small incisions. While the endoscopic vessel harvesting procedure is an improvement over a traditional “open” procedure that required a single, long incision from groin to ankle, the endoscopic procedure is still cumbersome and difficult. In particular, current endoscopic harvesting systems require multiple tools, which increases the potential for injury to the bypass conduit as well as increases the duration of the procedure. Accordingly, improvements in systems and methods for endoscopic vessel harvesting are still needed.

### SUMMARY

[0006] Unitary endoscopic vessel harvesting devices are disclosed. In some embodiments, such devices comprise an elongated body having a proximal end and a distal end, a tip disposed at the distal end of the elongated body; and a cutting unit having a first cutting portion and a second cutting portion, the first cutting portion and the second

cutting portion being moveable in a longitudinal direction relative to the elongated body to capture a blood vessel between the first cutting portion and the second cutting portion, and being rotatable relative to one another circumferentially about the tip to cut the captured blood vessel.

[0007] In some embodiments, a surgical device of the present disclosure comprise an elongated body having a central axis extending between a proximal end and a distal end and a tip disposed at the distal end of the elongated body. In some embodiments, the tip may include an internal apex; an indented external apex at a distal end of the tip, wherein the internal apex and the external apex are co-linear with the central axis of the elongated body. The surgical device may further include a cutting unit disposed about the tip and moveable in longitudinal direction along the elongated body to capture a blood vessel and to cut the blood vessel.

[0008] In some embodiments, the present disclosure provides a method for harvesting a blood vessel, the method includes a step of advancing a cannula having a dissection tip disposed at a distal tip of an elongated body along a main vessel to separate the main vessel and its branch vessels from the surrounding tissue. The method further includes a step of moving a first cutting portion and a second cutting portion in a distal direction from a position proximally of the dissection tip to capture a blood vessel between the first and second cutting portions and rotating at least one of the first cutting portion and the second cutting portion circumferentially about the tip toward one another to cut the captured blood vessel.

### BRIEF DESCRIPTION OF DRAWINGS

[0009] The presently disclosed embodiments will be further explained with reference to the attached drawings, wherein like structures are referred to by like numerals throughout the several views. The drawings shown are not necessarily to scale, with emphasis instead generally being placed upon illustrating the principles of the presently disclosed embodiments.

[0010] FIG. 1A illustrates a side view of an embodiment of an endoscopic cannula of the present disclosure.

[0011] FIG. 1B and FIG. 1C illustrate an embodiment of a dissection tip of the present disclosure having an indent at the distal tip.

[0012] FIG. 2A, FIG. 2B and FIG. 2C illustrate a dissection procedure using an endoscopic cannula of the present disclosure.

[0013] FIG. 3A, FIG. 3B and FIG. 3C illustrate an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.

[0014] FIG. 4A, FIG. 4B, FIG. 4C, and FIG. 4D illustrate an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.

[0015] FIG. 5 illustrates an embodiment of a control handle suitable for use with an endoscopic cannula of the present disclosure.

[0016] FIG. 6A, FIG. 6B, FIG. 6C, FIG. 6D, FIG. 6E and FIG. 6F illustrate an embodiment of an endoscopic cannula of the present disclosure in operation being controlled by the control handle of FIG. 5.

[0017] FIG. 7A and FIG. 7B illustrate an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.

[0018] FIG. 8 illustrates an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.



[0019] FIG. 9A, FIG. 9B and FIG. 9C illustrate an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.

[0020] FIG. 10A and FIG. 10B illustrate an embodiment of a cutting unit of an endoscopic cannula of the present disclosure.

[0021] While the above-identified drawings set forth presently disclosed embodiments, other embodiments are also contemplated, as noted in the discussion. This disclosure presents illustrative embodiments by way of representation and not limitation. Numerous other modifications and embodiments can be devised by those skilled in the art which fall within the scope and spirit of the principles of the presently disclosed embodiments.

#### DETAILED DESCRIPTION

[0022] The present disclosure provides a unitary device for endoscopic vessel harvesting. Present systems for endoscopic vessel harvesting contain multiple components. Typically, an endoscopic dissection device is used to isolate the main vessel from the surrounding connective tissue by dissecting the main vessel from surrounding connective tissue. An endoscopic cannula is then used to introduce yet another device, an endoscopic tributary sealing instrument, to seal and sever side branches. Once the side branches are sealed, yet another device is used to harvest a section of the main vessel to be used as a bypass graft. The unitary devices of the present disclosure combine the dissection function, the tributary sealing and severing function, and, optionally, main vessel sealing and severing function, which can result in decreased vessel manipulation and improvement in ease of the procedure. The devices of the present disclosure may also be used to extract the sealed and severed main vessel from the patient.

[0023] Decreased vessel manipulation may decrease the potential for injury to the graft. Repeated vessel contact with multiple passes of harvesting instrumentation increases potential vessel injury. A unitary device such as the device of the present disclosure may dissect, i.e., separate the main vessel, from surrounding tissue, cauterize and transect the tributaries and the main vessel as the device is advanced, and the vessel may be harvested with a single passage of the device, rather than multiple device insertions and retractions. Such a device with a decreased diameter may be used for dissection as well as tributary ligation; graft trauma should be decreased. The relative smaller diameter of the present device can also facilitate harvesting of more tortuous vessels; for example, the internal mammary artery.

[0024] Referring to FIG. 1A, an endoscopic cannula 100 of the present disclosure includes an elongated body 102 having a proximal end 104 and a distal end 106, terminating with a dissection tip 120. The cannula 100 further includes an cutting unit 150 disposed about the distal end 106 for sealing and cutting a blood vessel and a control handle 160 for controlling the cutting unit 150.

[0025] In some embodiments, the elongated body 102 is configured for passing extravascularly through an entry incision to a vessel harvesting site. To aid in navigating the elongated body 102 to a site of harvesting, the elongated body 102 may be sufficiently rigid axially along its length. To provide the elongated body 102 with such characteristic, in an embodiment, the elongated body 102 may be made from a biocompatible material, such as, plastic material, elastomeric material, metallic material, shape memory mate-

rial, composite material or any other materials that has the desired characteristics. To the extent desired, the elongated body 102 may be provided with some flexibility to move radially or laterally from side to side depending on the application.

[0026] In some embodiments, the elongated body 102 of the cannula 100 may be solid. In other embodiments, the endoscopic cannula 100 may include one or more lumen with lumena that accommodate advancing instruments or materials therethrough. In some embodiments, the endoscopic cannula 100 may include an endoscopic lumen 103 through which an endoscope 116 may be advanced for visualizing procedures performed using the cannula 100. The endoscopic cannula 100 may include an adapter 114 at the proximal end 104 for advancing the endoscope 116 into the endoscopic cannula 100. Additional lumens of the cannula 100 are described below.

[0027] In some embodiments, the endoscopic cannula 100 may include a dissection tip 120 disposed at or about the distal end 106 of the endoscopic cannula 100. The viewing tip of the endoscope may be positioned inside the dissection tip 120. In some embodiments, the dissection tip 120 may include an inner cavity in fluid communication with the endoscopic lumen 103 to enable the endoscope 116 to be advanced into the dissection tip 120. In some embodiments, a chip-on-a-tip type of an endoscope may be integrated inside the dissection tip 120. The tip 120 may also be transparent to allow for endoscopic viewing through the tip 120 of the procedures performed using the cannula 100. The dissection tip 120 in some embodiments, may be provided with any shape as long as it facilitates endoscopic viewing therethrough, and allows for necessary control during tissue dissecting, i.e. separation. In some embodiments, the dissection tip may be generally conical.

[0028] In some embodiments, the dissection tip 120 may include a generally flat shoulder 122, and a tapered section 124 which terminates in blunt end 126 for atraumatic separation of a vessel segment, being harvested from surrounding tissue, while minimizing or preventing tearing or puncturing of nearby vessels or tissue as the endoscopic cannula 100 is navigated along the vessel segment. Although illustrated as being blunt, it should of course be understood that, to the extent desired, the end 126 of the dissection tip 120 may be made relatively pointed to enhance advancement of the cannula 100.

[0029] In reference to FIG. 1B and FIG. 1C, in some embodiments, the dissection tip 120 may be cone shaped, and may be shaped at its distal end in a manner so as to minimize the negative effects of visual distortion or blinding at the center of the endoscopic view field when viewing through an endoscope inserted into the cannula 100, with a light source and camera system. Internal surface 121 of the dissection tip 120 may be tapered, with a relatively constant slope toward the distal end 126 of the dissection tip 120, terminating at an internal apex 123, which may be a sharp point, as shown in FIG. 1C. External surface 125 of the dissection tip 120 may also be tapered with a constant slope toward the distal end 126 of the dissection tip 120; however, at the distal end 126, a relatively rounded, blunt end may be formed to minimize tissue damage during dissection. As illustrated, at the distal end, the external surface 125 of the dissection tip 120 may be folded back on itself in a proximal direction to then terminate at an external apex 127, maintaining the blunt exterior surface and forming an indent in

the distal end of the dissection tip **120**. Both the internal apex **123** and the external apex **127** may be collinear with the central longitudinal axis of the cannula **100** and, thus, in some embodiments, the endoscope **116**. In other words, the centers of the internal apex **123** and the external apex **127** are located on the central longitudinal axis of the cannula **100**. By providing an apex on each of the internal surface **121** and the external surface **125** of the dissection tip **120** that are also collinear with the axis of the endoscope **116**, those surfaces perpendicular to the light path (which is parallel to the endoscope axis) may be eliminated, which then may eliminate light refraction from the perpendicular surface back into the camera and, thus, may minimize or eliminate the visual distortion or blinding when viewing through the endoscope **116** with a light source and camera system.

[0030] To reduce likelihood of trauma during the dissection process, in some embodiments, the dissection tip **120** may be radially pliable, flexible or deformable so that the dissection tip may deflect slightly under exertion of force applied to the dissection tip **120**. In some embodiments, the dissection tip **120** is radially compressible so that the walls of the dissection tip **120** can deform under exertion of force normal to the tip surface. To that end, the dissection tip **120** may be formed from thin wall plastic material to enable the dissection tip to flex under load. Suitable materials include, but are not limited to, polycarbonate, polyethylene terephthalate glycol-modified (PETG), polyethylene terephthalate (PET) and other materials that provide enough optical clarity while allowing the dissection tip to flex under load. At the same time, the dissection tip **120** may be provided with sufficient column strength in axial or longitudinal direction to allow dissection of the vessel from the surrounding connective tissue.

[0031] In reference to FIGS. 2A-2C, blood vessels used in bypass grafting (e.g. greater saphenous vein or radial artery), lie in the subcutaneous space, beneath the surface of the skin. The vessel **200** is composed of a main trunk **210**, and branch vessels **220** that emanate from the vessel trunk **210**, as shown in FIG. 2A. The vessel **200** and its branches **210** are encased in subcutaneous fatty connective tissue **230**, and need to be dissected free of the surrounding fatty connective tissue **230** before the main vessel **200** may be harvested. The subcutaneous fat **230** is softer than skin, muscle, fascia or other connective tissues. Although adherent to the vessel **200**, the fatty connective tissue **230** forms an interface **240** with the vessel **200** that may be cleanly dissected; that is, there is a natural dissection plane between the outer layer of the vessel **200** (the adventitia), and the surrounding subcutaneous fat **230**.

[0032] FIG. 2B illustrates dissection of the main trunk **210** of the vessel **200** with the dissection tip **120** along the natural dissection plane, with the dissection tip **120** advanced along the adventitial surface of the vessel **200**. Isolation of the vessel **200** from surrounding fatty connective tissue **230** along this plane, typically, does not require high dissection forces. In some embodiments, the dissection tip may **120** be provided with sufficient column strength to dissect the vessel **200** from the surrounding tissue **230** along the natural dissection plane between them.

[0033] On the other hand, as is illustrated in FIG. 2C, as the dissection tip **120** approaches a branch vessel **220**, the dissection tip **120** may catch the branch vessel **220** at a junction **250** between the branch vessel **220** and the main

vessel **200**. Application of excessive force with the dissection tip **220** may avulse the branch vessel and sever it from the trunk vessel, or may otherwise cause damage to the main vessel **200**. To that end, in some embodiments, the dissection tip **120** is provided with sufficient column strength to dissect the vessel **200** from the surrounding tissue **230** along the natural dissection plane between them, while being sufficiently pliable to deform or deflect from the branch vessel **220** with the application of increased force, to decrease the potential of trauma to the graft vessel during dissection around branch vessels. It should of course be understood that the rigidity of the dissection tip **120** may be varied from fully flexible to semi-rigid to rigid, in accordance with requirements of the procedure.

[0034] The cannula **100** may further include one or more end-effectors for cauterizing or sealing and cutting a blood vessel, either a branch vessel or the main vessel.

[0035] In reference to FIG. 3A, in some embodiments, the cutting unit **150** of the cannula **100** may include a first cutting member **302** and a second cutting member **304**, each having a cutting portion **310**, **312** extending from their respective distal ends.

[0036] The first cutting member **302** and the second cutting member **304** may be moveable in a longitudinal direction relative to the elongated body **102** of the cannula **100**. In this manner, the cutting portions **310**, **312** may be moved from an initial, retracted position during the dissection, in which the cutting portions **310**, **312** are retracted substantially proximally of the dissection tip **120** not to interfere with the dissection, to an operational or extended position for sealing and cutting, in which the cutting portions **310**, **312** may be advanced distally for the user to see the cutting portions and to provide enough capture length for the vessel. In some embodiments, the cutting portions **310**, **312** may at least partially extend beyond the dissection tip **120** to capture a blood vessel the cutting portions **310**, **312**. In addition, in some embodiments, the first cutting member **302** and the second cutting member **304** may be rotatable relative to one another. In this manner, the cutting portions **310**, **312** may be moved from an open position when the cutting portions **310**, **312** are apart or spaced away from one another to capture a blood vessel therebetween, as shown in FIG. 3B, to a closed position when the cutting portions **310**, **312** are brought towards one another around the dissection tip **120** to seal and cut the blood vessel, as shown in FIG. 3C. In some embodiments, the first cutting member **302** and the second cutting member **304** are configured so both cutting portions **310**, **312** can be rotated circumferentially about the dissection tip **120** toward one another in both clockwise and counterclockwise direction depending on the location of the blood vessel to be captured between the cutting portions **310**, **312**. Such bi-directional, circumferential movement of the cutting portions **310**, **312** may allow the user to operate on blood vessels on all sides of the cannula **100** to save time and reduce cannula manipulation during the procedure as the user does not need to be concerned about the orientation and position of the cannula **100** in relation to the blood vessel. In addition, it may reduce the potential for the cutting portions to twist the side branches, thereby exerting traction on the blood vessel and consequent damage to the graft. The bi-directional movement may also be more-intuitive to the user and eliminates the need to remember which side is the active side for cautery and cutting. In other embodiments, one of the cutting portions **310**, **312** may be stationary and

the other one may rotate in both clockwise and counter-clockwise toward the stationary cutting portion for easier manipulation and visualization of the cutting portions **310**, **312**. Of course, the stationary cutting portion may also be moved to a desired orientation by moving the cannula **100**.

[0037] The cutting portions of the cutting members **302**, **304** may generally be elliptical or blade-like with a rounded distal tip, but any other shape that enables the cutting and sealing of a blood vessel may also be used. To facilitate sealing of the blood vessel, one or both of the cutting portions **310**, **312** may be energized, when needed, using various sources of energy, including, but not limited to, resistive heating, ultrasound heating, and bipolar or monopolar RF energy. In some embodiments, the electrodes can be controlled independently of one another. In some embodiments, the cutting portions **310**, **312** may be made from a material such as metal that would enable the cutting portions **310**, **312** themselves to be energized. Additionally or alternatively, energizing elements, such as metal wires, may be disposed on the cutting portions **310**, **312**. When energized, the energizing elements may be brought in contact with the blood vessel by the cutting portions **310**, **312** to seal the blood vessel. In some embodiments, one or both of the cutting members **310**, **312** may include protrusions for use as spot cautery. In some embodiments, one or both of the cutting members **310**, **312** may have a sharpened, thin edge for concentrated application of energy to the blood vessel. Such concentrated energy application may require less energy to be applied to the side branch, thereby minimizing extension of cauterizing energy from the side branch towards the main trunk of the blood vessel, and thus eliminating potential trauma to the blood vessel.

[0038] To facilitate cutting of the blood vessel subsequent to sealing of the blood vessel, in some embodiments, one of the opposing edges **318**, **320** of the cutting portions **310**, **312** between which cutting occurs may have a leveled face while the other one may be a sharpened, thin or pointed so that the tissue is not cut in a scissor-like motion but with a thin edge against a flat surface. To that end, in some embodiments, both edges of the cutting members **310** may be sharpened edges, while both edges of the cutting portion **312** may be flat, or vice versa. Alternatively, the cutting portions **310**, **312** may have one sharp edge or blade edge and one flat edge with the sharp edge of one cutting portion facing the flat edge of the other cutting portion. It should be noted that in some embodiments, the blood vessel may be both sealed and cut using energy, as described above. It should of course be understood that, in some embodiments, the opposing edges the opposing edges **318**, **320** of the cutting portions **310**, **312** may both be sharpened so the tissue is cut in a scissor-like manner.

[0039] As shown in FIG. 3B and FIG. 3C, in some embodiments, the cutting members **302**, **304** may be substantially u-shaped and disposed in the same plane relative to the cannula body **102**. In some embodiments, the cutting members **302**, **304** may include respective cutouts and fingers **314**, **316** along the edges to enable circumferential movement of the cutting members **302**, **304** relative to one another.

[0040] In reference to FIG. 4A and FIG. 4B, in some embodiments, the cutting members **302**, **304** may be substantially tubular and be disposed in different planes of the cannula body **102**. As shown in FIG. 4A, in some embodiments, the cutting member **304** may be concentrically dis-

posed inside within the cutting member **302**. Referring to FIG. 4B, in some embodiments, the elongated body **102** of the cannula **100** may be constructed of a series of coaxial tubes, both metal and plastic, that may act as the structural main shaft, the electrical conductive and insulative paths, and the end-effectors, i.e. cutting portions **310**, **312**. In some embodiments, there may be three plastic sheaths acting as electrical insulators and mechanical bearing surfaces sandwiched in between two metal conductive tubes for the entire length of the device. The innermost layer may be the inner sheath **402** (plastic) defining an internal lumen **403**. The inner sheath **402** may be followed outwardly by the inner electrode tube **404** (metal), middle sheath **406** (plastic), outer electrode tube **408** (metal) and outer sheath **410** (plastic), and finally a shrink jacket **412**. In some embodiments, instead of three plastic sheaths, the electrical insulation may be provided using non-conductive coatings or similar means. For example, in some embodiments, the electrodes **404**, **408** may be coated with polyvinylidene fluoride (PVDF), but other non-conductive coating may also be used.

[0041] The inner electrode tube **404** and the outer electrode tube **408** may be used to form the first cutting member **302** and the second cutting member **304**, with the cutting portions **310**, **312** being formed at the distal ends of the inner electrode tube **404** and the outer electrode tube **408**. To enable the cutting portions **310**, **312** to capture, seal and cut blood vessels, the inner electrode tube **404** and the outer electrode tube **408** may be slidable in the longitudinal direction relative to the cannula **100** and rotatable relative to one another. Further, because the cutting portions **310**, **312** are formed from the inner electrode tube **404** and the outer electrode tube **408**, the cutting portions **310**, **312** can be easily energized through the inner electrode **404** and the outer electrode **408**. In some embodiments, the cutting portion formed from the inner electrode tube **404** (i.e. inner cutting portion **411**) may be bent out of the plane of the inner electrode **404** to enable it to rotate along the same axis and be co-radial with the cutting portion formed in the outer electrode **408** (i.e. outer cutting portion **413**). In some embodiments, the inner cutting portion **411** may have a flat face **416** on either side of the inner cutting portion, while the outer cutting portion **413** may have a sharpened or blade edge **418** on both sides, or vice versa. In other embodiments, as described above, each cutting portion **411**, **413** may have one sharpened edge and one flat edge, with the flat edge of one cutting portion facing the sharpened edge of the other cutting portion.

[0042] In reference to FIG. 4C, in some embodiments, the dissection tip **120** may be connected to the inner sheath **402** to enable the advancement of the endoscope **116** into the dissection tip through the internal lumen **403**. A sleeve **414**, or transition, may be used to protect tissue from damage during dissection by smoothing the geometry between the dissection tip **120** and the cannula body **102**. The distal end of the sleeve **414** may be left unattached to the dissection tip **120** to allow the cutting portions **312**, **314** to be advanced distally through the sleeve **414**, as shown in FIG. 4D. In some embodiments, the sleeve **414** may be made of a flexible material so during dissection the sleeve **414** would comply with the dissection tip creating a smooth transition and also a tight seal to prevent tissue or bodily fluids from entering the cannula **100**. On the other hand, a flexible sleeve would be able to deflect and expand to allow the cutting

portions 312, 314 to be advanced out distally through the sleeve 414. In some embodiments, the surface of the sleeve may be coated with a lubricious substance to make the extension of the cutting portions 312, 314 through the sleeve 414 easier and smoother by decreasing friction between the cutting portions 312, 314 and the sleeve 414. The thin-walled shrink tube 412 may be placed over the outer surface of the cannula body for aesthetic purposes and to assist in securing the transition.

[0043] FIG. 5 illustrates an embodiment of the control handle 160 for controlling the cutting members 310, 312. In some embodiments, the control handle 160 may include a translation control 502 for advancing and retracting the cutting members 310, 312. The control handle further includes a rotation control 504 for rotating the cutting members with respect to one another. Finally, the control handle 160 includes an energy control 506 for supplying energy (such as bipolar RF energy) to the cutting portions 310, 312. The adapter 114 may be located at the proximal end of the control handle 500 for advancing the endoscope 116 into the endoscopic cannula 100.

[0044] In operation, an initial incision may be made in conventional manner to expose the target vessel (e.g., the saphenous vein). The cannula 100 may be inserted into the incision and guided to the target vessel. In some embodiments, the cannula 100 may include a smooth tubular sheath around the elongated body 102 for sealing the cannula 102 within the port through which the cannula 102 is introduced into the patient. The cannula 100 may then be advanced substantially along the target vessel to dissect the target vessel from the surrounding tissue. In some embodiments, the cannula 100 may be introduced through a sealable port used to seal the incision to allow insufflation of the space created by the dissection of the target vessel from surrounding tissues.

[0045] As the cannula 100 is being advanced, the cutting portions 310, 312 of the cutting elements 302, 304 may be kept in a retracted position so not to interfere with tissue dissection until a branch vessel is encountered. At that point, the cutting portions 310, 312 may be advanced beyond the dissection tip 120, as described above, to capture, seal and cut the branch vessel.

[0046] In reference to FIGS. 6A-6F, in some embodiments using the control handle 160, the cutting portions 310, 312 may be moved from a retracted position, as shown in FIGS. 6A-6B, in the distal direction beyond the dissection tip 120 by advancing the translational control 504 on the handle to its distal position, as shown in FIGS. 6C-6D. The cutting portions 310, 312 may be advanced out together and enter into the field of view of the endoscope in the dissection tip 120. Next, the cutting portions 310, 312 may be rotated with respect to one another using the rotation control 504, as shown in FIGS. 6E-6F, for sealing and cutting the branch vessel. The cutting portions 310, 312 may be rotated around the dissection tip 120 in a circular arc motion. The endoscopic cannula 100 may be positioned such that the target branch vessel may lay across one of the cutting portions 310, 312, regardless of orientation of the branch vessel in relation to the main blood vessel to be harvested. The endoscopic cannula 100 may be designed such that the user can place the endoscopic cannula 100 and the cutting portions 310, 312 as far away from the target main vessel as possible to avoid injury to the main vessel. Once in position, the user may rotate one of the cutting portions 310, 312 toward the other

one until the branch vessel is captured. If positioned properly, the rotation is preferably always away from the main vessel, thus increasing and further maximizing the potential negative effects of lateral thermal spread. Next, when the branch vessel is positioned in between the cutting portions 310, 312, the user may depresses the energy control 508 button to transfer the energy into the tributary to seal the vessel. After sealing is complete and the energy control button 508 is released, the user may continue to advance the rotation control 504 until the cutting portions 310, 312 transect the branch vessel. The user may then retract the cutting portions 312, 314 with the translation control 502 and advance the device to the next branch vessel until all tributaries have been successfully ligated and transected.

[0047] After the branch vessel has been hemostatically severed, the cannula 100 may be advanced forward until the next branch vessel is encountered, at which point the branch vessel may be sealed and severed using the cutting unit 300. Once all branch vessels along a desired length of the target vessel have been sealed and severed, the cannula 100 may be used to seal and cut the target vessel according to procedure similar to the procedure used to cut and seal the branch vessels. Alternatively, the cannula 100 may be withdrawn, and another surgical device may be used to seal and cut the main vessel.

[0048] In some embodiments, the cannula 100 of the present disclosure may allow vessel sealing and cutting to be performed in a small cavity. Accordingly, when using the cannula 100 of the present disclosure there may not be a need to maintain the perivascular cavity in an expanded state and thus the procedure may be performed without gas insufflation of the perivascular cavity. In operation, the transparent dissection tip 120 can deflect a vessel to one side, so that the members of the cutting unit can capture the vessel, while maintaining visualization of all components in a collapsed tissue tunnel. Vessel harvesting in a small or collapsed cavity may be useful in anatomic situations characterized by vessel tortuosity, such as the internal mammary artery and vein. Harvesting without gas insufflation may also be beneficial to the graft. The carbonic acid environment of a cavity maintained by carbon dioxide gas insufflation may be detrimental to the graft vessel. A lower pH atmosphere surrounding the vessel may alter the cellular viability of the graft, potentially leading to early graft failure. Positive pressure produced by gas insufflation may also collapse the vessel, causing hemostasis, and may increase the potential for intraluminal clot formation. Presence of intraluminal clot may cause graft thrombosis and early graft failure.

[0049] In reference to FIG. 7A and FIG. 7B, the cutting unit 150 may include a first member 702 and a second member 704. In some embodiments, the first member 702 and second member 704 may be translatable relative to the dissection tip 120 from a proximal position, during the dissection, to a more distal position to capture, seal and cut the blood vessel. Moreover, the first member 702 and second member 704 may also be moveable relative to one another so the first member 702 and second member 704 can be space away from one another capture a blood vessel therebetween and then may be compressed against one another to seal and cut the blood vessel. To permit such movements of the first member 702 and second member 704, in some embodiments, the first member 702 and second member 704 may be mounted on one or more actuating rods for advancing and retracting. It should, of course, be understood that

other mechanisms for translating the first member 702 and second member 704 relative to the dissection tip 120 and one another may be employed.

[0050] The first member 702 may include four circumferentially-disposed proximal electrode segments 706 for bipolar RF cutting. The proximal electrode segments may be connected by 0.020" conductor. The second member 704 may include two circumferentially-disposed distal electrode segments 708 for bipolar RF cutting. The distal electrode segments may be connected by 0.020" conductor. In addition, the second member 704 may include two segments 710 for resistive heat cautery 706 disposed distally of the distal electrode segments, and a distal ring electrode 712 for monopolar cautery. The actuating rods may be employed to energize the electrodes 706-712.

[0051] In reference to FIG. 8, in some embodiments, the cutting unit 150 may include a first member 802 and a second member 804. The first member 802 and the second member 804 are translatable relative to the dissection tip and one another, as described above. In this embodiment of the cutting unit 150, the three electrodes 708, 710, and 712 of the second member 704 (see FIGS. 7A and 7B) are combined into one solid ring. In bipolar mode the only one side of the ring may work with active proximal segment. In monopolar mode, the entire ring may work with outside returned electrode. In some embodiments, two large cross-section conductors may also replace four electrode segments, two for RF cutting and two for resistive heat cautery, which may increase rigidity of the distal structure.

[0052] Moreover, the four electrodes 706 of the first member 702 can also be combined into two hemispheric electrodes 806, which can be individually controlled. In this manner, only two larger cross-section conductors 808 may be used instead of four small ones, as in the cutting unit illustrated in FIGS. 7A and 7B. Rigidity of the proximal structure may also increase by combining the four electrodes into two.

[0053] In reference to FIG. 9A, in some embodiments, the cutting unit 150 may include a first member 902 having a proximal electrode 916 for bipolar RF cutting. The cutting unit 150 may also include a second member 904 having a distal electrode 918 for bipolar RF cutting. The cutting unit 150 may further include an electrode 914 for monopolar spot cautery disposed over the dissection tip 120. In some embodiments, the first member 902 and the second member 904 may be made of a conductive material, with optional coating, and the electrodes 914, 916, 918 may be energized through the cutting member 902, 904.

[0054] In reference to FIG. 9B and FIG. 9C, in some embodiments, the first member 902 and the second member 904 may be tubular, with the first member 902 slidably disposed relative to the second member 904 to enable the first member 902 and the second member 904 to be biased relative to one another in a longitudinal direction. In some embodiments, the first member 902 and the second member 904 may be move in a distal direction between an inactive position proximal of the dissection tip 120, as shown in FIG. 9A, and an active position in the field of view of the endoscope, as shown in FIG. 9B and FIG. 9C, for capturing, cutting and sealing the blood vessel.

[0055] The second member 904 may include one or more hooks 906 at a distal region of the second member 904. The hook 906 may be configured to capture the branch vessel, as shown in FIG. 9B. In some embodiments, the second

member 904 may include two hooks 910 and 912, in a spaced relation to one another, so that the branch vessel may be contacted, at a minimum, by one of the hooks.

[0056] In operation, the cannula 100 may be advanced to a vessel with the first member 902 and the second member 904 of the cutting unit 150 positioned proximally to the dissection tip 120. As the vessel is encountered, as shown in FIG. 9B, first, the second member 904 may be extended in the distal direction to capture the branch vessel by the hook of the second member 904. Spot cautery may also be performed in this position, as desired, by a spot cautery electrode 914. Next, the first member 902 may be advanced to pinch the branch vessel between the electrodes 916, 918 of the first member 902 and the second member 904, and the RF current may be turned on for sealing and cutting the branch vessel captured in the cutting unit 150.

[0057] FIG. 10A and FIG. 10B illustrate yet another embodiment of the cutting unit 150 having a first member 1002 and a second member 1004. In comparison to the embodiment of the cutting unit shown in FIGS. 9A-9C, the second member 1004 may include only a single hook 1010 on one side of the second member 1004, as compared to two hooks 910, 912 on the second member 904. Removing one of hooks may improve visualization of the procedure by the endoscope 116 disposed within the cannula 100. Otherwise, the structure and operations of this embodiment of the cutting unit 150 may similar to those of the embodiment of the cutting unit 150 disclosed in FIGS. 9A-9C.

[0058] It should be noted while preferred types of energy for various electrodes are indicated in the present disclosure, all electrodes can be energized using various sources of energy, including, but not limited to, resistive heating, ultrasound heating, and bipolar or monopolar RF energy. In some embodiments, the electrodes can be controlled independently of one another. It should also be noted that, when appropriate, the electrodes may be insulated with an insulating coating or insulating sheath.

[0059] All patents, patent applications, and published references cited herein are hereby incorporated by reference in their entirety. It should be emphasized that the above-described embodiments of the present disclosure are merely possible examples of implementations, merely set forth for a clear understanding of the principles of the disclosure. Many variations and modifications may be made to the above-described embodiment(s) without departing substantially from the spirit and principles of the disclosure. It will be appreciated that several of the above-disclosed and other features and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. All such modifications and variations are intended to be included herein within the scope of this disclosure, as fall within the scope of the appended claims.

What is claimed is:

1. A method for harvesting a blood vessel comprising:  
advancing, towards a blood vessel, a cannula having a cutting unit disposed at a distal end of an elongated body;  
moving the cutting unit in a distal direction relative to the elongated body to capture a blood vessel; and  
operating a control handle to energize the cutting unit to perform at least one of sealing and cutting the blood vessel.

2. The method of claim 1 wherein the step of operating the control handle to energize the cutting unit includes depressing an energy control button on the control handle to supply energy to the cutting unit.

3. The method of claim 2, wherein the energy supplied to the cutting unit includes at least one of bipolar RF energy, monopolar RF energy, resistive heating and ultrasound heating.

4. The method of claim 2, wherein the cutting unit includes a sharpened, thin edge for concentrated application of the energy to the blood vessel.

5. The method of claim 1, wherein the cutting unit includes at least one electrode for bipolar RF cutting or sealing, at least one electrode or protrusion for monopolar spot cautery, or a combination thereof.

6. The method of claim 5, including two or more electrodes, wherein each of the two or more electrodes can be controlled independently of one another by operation of the control handle.

7. The method of claim 5, wherein the cutting unit includes at least one member configured to be moved in the distal direction by operation of the handle, and wherein the at least one electrode is positioned on the at least one member.

8. The method of claim 1, wherein the control handle is coupled to the cannula.

9. The method of claim 1 wherein the step of moving includes operating a translational control on the control handle for advancing and retracting the cutting unit.

10. The method of claim 1,

wherein the cutting unit includes a first cutting portion and a second cutting portion, the first cutting portion and the second cutting portion being rotatable relative to one another circumferentially, and

wherein the control handle includes a rotation control for rotating the first cutting portion and the second cutting portion with respect to one another.

11. The method of claim 1, wherein the cannula includes dissection tip disposed at the distal end of the elongated body to separate the main vessel and its branch vessels from the surrounding tissue.

12. The method of claim 11,

wherein the dissection tip includes an inner cavity terminating at an internal apex and an indented external apex at a distal end of the dissection tip, and

wherein the internal apex and the external apex are co-linear with the central axis of the elongated body.

13. A method for delivering bipolar energy to a tissue, comprising:

providing a device having one or more electrodes for delivering bipolar energy to a tissue and a control handle for controlling the supply of energy to the electrodes;

advancing the device to position the one or more electrodes adjacent to the tissue; and

operating the control handle to energize the one or more electrodes for delivery of bipolar energy into the tissue.

14. The method of claim 13, wherein the step of operating the control handle includes depressing an energy control button on the control handle to energize the one or more electrodes.

15. The method of claim 13, wherein the one or more electrodes are configured to deliver bipolar energy into the tissue for one or a combination of cutting, sealing, and cauterizing the tissue.

16. The method of claim 13, including two or more electrodes, wherein each of the two or more electrodes can be controlled independently of one another by operation of the control handle.

17. The method of claim 13, further including at least one of:

operating a translational control on the control handle for advancing and retracting the one or more electrodes; and

operating a rotation control on the control handle for rotating the one or more electrodes.

18. A device for delivering bipolar energy to a tissue, comprising:

a body having a distal end and a proximal end;

one or more electrodes positioned at or near the distal end and configured for delivering bipolar energy to a tissue; and

a control handle positioned at or near the proximal end and operable for energizing the one or more electrodes for delivery of bipolar energy into the tissue.

19. The device of claim 18, wherein the control handle includes an energy control button on the control handle operable for energizing the one or more electrodes.

20. The device of claim 18, wherein the one or more electrodes are configured to deliver bipolar energy into the tissue for one or a combination of cutting, sealing, and cauterizing the tissue.

21. The device of claim 18, including two or more electrodes, wherein each of the two or more electrodes can be controlled independently of one another by operation of the control handle.

22. The device of claim 18, further including at least one of:

a translational control on the control handle operable for advancing and retracting the one or more electrodes; and

a rotation control on the control handle operable for rotating the one or more electrodes.

\* \* \* \* \*

专利名称(译)	单一内窥镜血管收获装置		
公开(公告)号	<a href="#">US20190076161A1</a>	公开(公告)日	2019-03-14
申请号	US16/185215	申请日	2018-11-09
申请(专利权)人(译)	隐静脉MEDICAL , INC.		
当前申请(专利权)人(译)	隐静脉MEDICAL , INC.		
[标]发明人	CHIN ALBERT K ORPHANOS MARK J BARENBOYM MICHAEL		
发明人	CHIN, ALBERT K. ORPHANOS, MARK J. BARENBOYM, MICHAEL		
IPC分类号	A61B17/3205 A61B17/00 A61B17/34 A61B17/32 A61B18/14 A61B17/3201 A61B18/00		
CPC分类号	A61B2018/00404 A61B17/3205 A61B17/00008 A61B2017/00907 A61B17/3417 A61B2018/00601 A61B17/3201 A61B2017/00778 A61B17/32053 A61B17/320016 A61B2018/0063 A61B18/148 A61B17/32002 A61B2017/00969		
优先权	61/833814 2013-06-11 US 61/782034 2013-03-14 US		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

公开了一体式内窥镜血管收获装置。在一些实施例中，这种装置包括具有近端和远端的细长主体，尖端设置在细长主体的远端；切割单元具有第一切割部分和第二切割部分，第一切割部分和第二切割部分可相对于细长体在纵向方向上移动，以捕获第一切割部分和第二切割部分之间的血管并且可围绕尖端沿周向相对于彼此旋转，以切割捕获的血管。

