



US008469979B2

(12) **United States Patent**
Olson

(10) **Patent No.:** **US 8,469,979 B2**
(45) **Date of Patent:** ***Jun. 25, 2013**

(54) **HIGH CAPACITY DEBULKING CATHETER
WITH DISTAL DRIVEN CUTTING WHEEL**

(75) Inventor: **William John Olson**, Menlo Park, CA
(US)

(73) Assignee: **Covidien LP**, Mansfield, MA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **13/239,820**

(22) Filed: **Sep. 22, 2011**

(65) **Prior Publication Data**

US 2012/0016395 A1 Jan. 19, 2012

Related U.S. Application Data

(63) Continuation of application No. 11/934,680, filed on
Nov. 2, 2007, now Pat. No. 8,052,704.

(51) **Int. Cl.**
A61B 17/22 (2006.01)

(52) **U.S. Cl.**
USPC **606/159**; 606/170; 600/439

(58) **Field of Classification Search**
USPC 606/155, 159, 170, 167, 171, 180,
606/198, 186; 600/459, 564, 164.01, 508
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,481,078 A 1/1924 Albertson
2,178,790 A 11/1939 Henry

2,701,559 A	2/1955	Cooper
2,850,007 A	9/1958	Lingley
3,064,651 A	11/1960	Henderson
3,082,805 A	3/1963	Royce
3,320,957 A	5/1967	Sokolik
3,614,953 A	10/1971	Moss
3,683,891 A	8/1972	Eskridge et al.
3,705,577 A	12/1972	Sierra
3,732,858 A	5/1973	Banko
3,749,085 A	7/1973	Wilson et al.
3,800,783 A	4/1974	Jamshidi
3,815,604 A	6/1974	O'Malley et al.
3,831,585 A	8/1974	Brondy et al.
3,837,345 A	9/1974	Matar
3,845,375 A	10/1974	Stiebel
3,937,222 A	2/1976	Banko
3,945,375 A	3/1976	Banko
3,976,077 A	8/1976	Kerfoot, Jr.
3,995,619 A	12/1976	Glatzer

(Continued)

FOREIGN PATENT DOCUMENTS

CA	2000621	4/1990
DE	3732236 C1	12/1988

(Continued)

OTHER PUBLICATIONS

Jul. 19, 2011 Communication in European Application No.
04760155.4 (5 pages).

(Continued)


Primary Examiner — Tuan V Nguyen

(74) *Attorney, Agent, or Firm* — Alana T. Bergman, Esq.

(57) **ABSTRACT**

An atherectomy catheter with a rotary cutting element is
provided. The catheter collects plaque shavings in a hollow
collection chamber. The catheter includes a drive shaft con-
nected between a source of rotational power and the distal
side of the cutting element, no part of the drive shaft being
contained within the collection chamber.

15 Claims, 5 Drawing Sheets

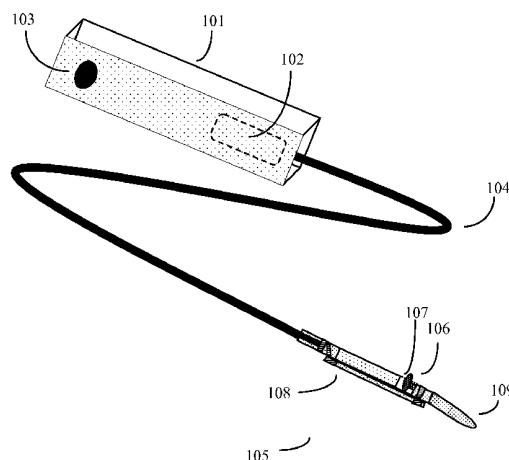

U.S. PATENT DOCUMENTS					
4,007,732 A	2/1977	Kvavle et al.	4,954,338 A	9/1990	Mattox
4,020,847 A	5/1977	Clark, III	4,957,482 A	9/1990	Shiber
4,030,503 A	6/1977	Clark, III	4,966,604 A	10/1990	Reiss
4,034,744 A	7/1977	Goldberg	4,973,409 A	11/1990	Cook
4,038,985 A	8/1977	Chiulli	4,979,939 A	12/1990	Shiber
4,112,708 A	9/1978	Fukuda	4,979,951 A	12/1990	Simpson
4,177,797 A	12/1979	Baylis et al.	4,986,807 A	1/1991	Farr
4,210,146 A	7/1980	Banko	4,990,134 A	2/1991	Auth
4,273,128 A	6/1981	Lary	4,994,067 A	2/1991	Summers
4,306,562 A	12/1981	Osborne	4,997,435 A	3/1991	Demeter
4,306,570 A	12/1981	Matthews	5,000,185 A	3/1991	Yock
4,349,032 A	9/1982	Koyata	5,002,553 A	3/1991	Shiber
4,368,730 A	1/1983	Sharrock	5,003,918 A	4/1991	Olson et al.
4,424,045 A	1/1984	Kulischenko et al.	5,007,896 A	4/1991	Shiber
4,436,091 A	3/1984	Banko	5,009,659 A	4/1991	Hamlin et al.
4,445,509 A	5/1984	Auth	5,019,088 A	5/1991	Farr
4,490,139 A	12/1984	Huizenga et al.	5,024,234 A	6/1991	Leary et al.
4,494,057 A	1/1985	Hotta	5,024,651 A	6/1991	Shiber
4,512,344 A	4/1985	Barber	5,026,384 A	6/1991	Farr et al.
4,589,412 A	5/1986	Kensey	5,029,588 A	7/1991	Yock et al.
4,603,694 A	8/1986	Wheeler	5,030,201 A	7/1991	Palestrant
4,620,547 A	11/1986	Boebel	5,047,040 A	9/1991	Simpson et al.
4,631,052 A	12/1986	Kensey	5,049,124 A	9/1991	Bales, Jr.
4,646,719 A	3/1987	Neuman et al.	5,053,044 A	10/1991	Mueller et al.
4,646,736 A	3/1987	Auth	5,054,492 A	10/1991	Scribner et al.
4,646,738 A	3/1987	Trott	5,064,435 A	11/1991	Porter
4,649,919 A	3/1987	Thimsen et al.	5,071,425 A	12/1991	Gifford et al.
4,653,496 A	3/1987	Bundy et al.	5,074,841 A	12/1991	Ademovic et al.
4,664,112 A	5/1987	Kensey et al.	5,077,506 A	12/1991	Krause et al.
4,669,469 A	6/1987	Gifford, III et al.	5,078,722 A	1/1992	Stevens
4,679,558 A	7/1987	Kensey et al.	5,078,723 A	1/1992	Stevens
4,686,982 A	8/1987	Nash	5,084,010 A	1/1992	Plaia et al.
4,692,141 A	9/1987	Mahurkar	5,085,662 A	2/1992	Willard
4,696,298 A	9/1987	Higgins et al.	5,087,265 A	2/1992	Summers
4,696,667 A	9/1987	Masch	5,092,839 A	3/1992	Kipperman
4,705,038 A	11/1987	Sjostrom	5,092,873 A	3/1992	Simpson et al.
4,706,671 A	11/1987	Weinrib	5,095,911 A	3/1992	Pomeranz
4,728,319 A	3/1988	Masch	5,100,423 A	3/1992	Fearnott
4,729,763 A	3/1988	Henrie	5,100,424 A	3/1992	Jang et al.
4,730,616 A	3/1988	Frisbie et al.	5,100,426 A	3/1992	Nixon
4,732,154 A	3/1988	Shiber	5,110,822 A	5/1992	Sherba et al.
4,733,622 A	3/1988	DeSatnick et al.	5,112,345 A	5/1992	Farr
4,745,919 A	5/1988	Bundey et al.	5,114,399 A	5/1992	Kovalcheck
4,747,406 A	5/1988	Nash	5,115,814 A	5/1992	Griffith et al.
4,747,821 A	5/1988	Kensey et al.	5,120,323 A	6/1992	Shockey et al.
4,749,376 A	6/1988	Kensey et al.	5,127,902 A	7/1992	Fischell
4,754,755 A	7/1988	Husted	5,127,917 A	7/1992	Niederhauser et al.
4,757,819 A	7/1988	Yokoi et al.	5,135,531 A	8/1992	Shiber
4,765,332 A	8/1988	Fischell et al.	5,154,705 A	10/1992	Fleischhacker et al.
4,771,774 A	9/1988	Simpson et al.	5,154,724 A	10/1992	Andrews
4,781,186 A	11/1988	Simpson et al.	5,165,421 A	11/1992	Fleischhacker et al.
4,784,636 A	11/1988	Rydell	5,176,693 A	1/1993	Pannek, Jr.
4,790,812 A	12/1988	Hawkins, Jr. et al.	5,178,625 A	1/1993	Groshong
4,794,931 A	1/1989	Yock	5,181,920 A	1/1993	Mueller et al.
4,817,613 A	4/1989	Jaraczewski et al.	5,183,432 A	2/1993	Noguchi
4,819,634 A	4/1989	Shiber	5,190,528 A	3/1993	Fonger et al.
4,819,635 A	4/1989	Shapiro	5,192,291 A	3/1993	Pannek, Jr.
4,838,268 A	6/1989	Keith et al.	5,195,956 A	3/1993	Stockmeier
4,842,579 A	6/1989	Shiber	5,211,651 A	5/1993	Reger et al.
4,844,064 A	7/1989	Thimsen et al.	5,217,474 A	6/1993	Zacca et al.
4,848,343 A	7/1989	Wallsten et al.	5,222,966 A	6/1993	Perkins et al.
4,850,957 A	7/1989	Summers	5,224,488 A	7/1993	Neuffer
4,857,046 A	8/1989	Stevens et al.	5,224,945 A	7/1993	Pannek, Jr.
4,867,157 A	9/1989	McGurk-Burleson et al.	5,224,949 A	7/1993	Gomringer et al.
4,870,953 A	10/1989	DonMichael et al.	5,226,909 A	7/1993	Evans et al.
4,883,458 A	11/1989	Shiber	5,226,910 A	7/1993	Kajiyama et al.
4,886,061 A	12/1989	Fischell et al.	5,234,451 A	8/1993	Osypka
4,886,490 A	12/1989	Shiber	5,242,460 A	9/1993	Klein et al.
4,887,613 A	12/1989	Farr et al.	5,242,461 A	9/1993	Kortenbach et al.
4,894,051 A	1/1990	Shiber	5,250,059 A	10/1993	Andreas et al.
4,899,757 A	2/1990	Pope, Jr. et al.	5,250,065 A	10/1993	Clement et al.
4,919,133 A	4/1990	Chiang	5,263,928 A	11/1993	Trauthen et al.
4,923,462 A	5/1990	Stevens	5,263,959 A	11/1993	Fischell
4,926,858 A	5/1990	Gifford, III et al.	5,267,955 A	12/1993	Hanson
4,928,693 A	5/1990	Goodin et al.	5,267,982 A	12/1993	Sylvanowicz
4,936,987 A	6/1990	Persinski et al.	5,269,793 A	12/1993	Simpson et al.
RE33,258 E	7/1990	Onik et al.	5,273,526 A	12/1993	Dance et al.
4,950,238 A	8/1990	Sullivan	5,282,484 A	2/1994	Reger
			5,284,486 A	2/1994	Kotula et al.

Figure 5A





Figure 5B

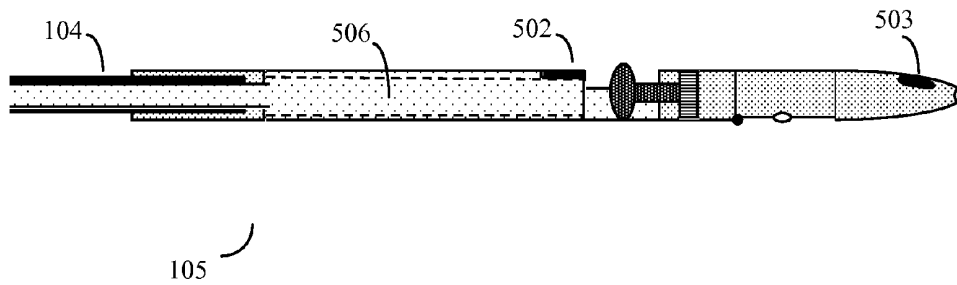

HIGH CAPACITY DEBULKING CATHETER WITH DISTAL DRIVEN CUTTING WHEEL

CROSS-REFERENCES TO RELATED APPLICATION

This application is a continuation of U.S. patent application Ser. No. 11/934,680, filed Nov. 2, 2007, now U.S. Pat. No. 8,052,704 B2, issued Nov. 8, 2011, the contents of which are hereby incorporated by reference herein.

BACKGROUND OF THE INVENTION

Restriction of blood circulation due to the atherosclerotic build up of plaque in arteries is the source of much morbidity and mortality. Plaque deposits in cardiac arteries can result in angina and myocardial infarction. Plaque deposits in peripheral arteries of the limbs can result in peripheral artery disease (PAD).

PAD affects about 20% of the population over 70, and in more severe forms (which afflict about 2 million people in the US) can lead to non-healing ulcers, infection, and eventually loss of limb due to amputation. Most people die within two years of such amputations.

Although many techniques, such as stenting and balloon angioplasty, have been developed to help restore circulation to plaque occluded cardiac arteries, these methods tend to be less effective for peripheral arteries. Stents, although well suited to low-mobility cardiac arteries, tend to either restenose or frequently break in peripheral limb arteries because these arteries are subjected to greater movement and mechanical stress. Balloon angioplasty, which stretches the artery walls while it compresses and redistributes plaque, tends to cause greater and typically less acceptable amount of artery wall damage when it is used with peripheral arteries. Additionally, since angioplasty simply redistributes plaque rather than actually removing plaque, in the higher mobility peripheral arteries, the redistributed plaque tends to relatively quickly distribute itself back into an unacceptable configuration again.

From the surgical perspective, one of the most ideal ways to treat arteries blocked by plaque is to remove the plaque from the inside of the artery using an atherectomy catheter. Such catheters, which come in a variety of different designs, can be introduced into the body at a convenient location and threaded inside the artery to the plaque occluded target region (which can usually be determined exactly using fluoroscopy and appropriate radio opaque contrast dyes). Once they are at the correct region, atherectomy catheters then surgically remove the occluding plaque.

Many different types of atherectomy catheter devices have been proposed, including catheters with rotating burrs (Boston Scientific Rotablator), lasers to photo-dissolve tissue (Spectrametrics Laser Catheter), and cutter-balloon catheters (Guidant AtheroCath). All have certain drawbacks, however, such as difficulty in traversing through small and tortuous arteries to get to the plaque occluded target zone or zones.

One of the biggest problems plaguing prior art atherectomy catheters is the problem of gracefully handing the shaved plaque remnants. Some designs, such as the Rotablator, make no attempt at all to handle the liberated plaque fragments, and instead let the fragments migrate through the circulation. This can cause many problems, because the liberated plaque remnants can be thrombogenic, and can end up causing downstream occlusions. Other catheter designs attempt to reduce this problem by capturing the plaque shavings and safely removing them from the body. Capturing the plaque shavings

also makes the samples available for pathologic and medical diagnostic examination, and may give important information as to the root causes behind the plaque build-up in the first place.

More recent atherectomy catheters, such as the Fox Hollow SilverHawk articulated rotating blade atherectomy catheter, have been designed to address such issues. The SilverHawk catheter (exemplified by U.S. patent application Ser. Nos. 10/027,418; 10/288,559; 10/896,747; and others) uses a unique rotating blade, window, and hinged hollow nose design, which can be controlled to either assume a straight position or an angled (drooped) position.

To use the SilverHawk atherectomy catheter, the operator will usually first insert a guide wire to the proper location, attach the SilverHawk to the guidewire, and introduce the SilverHawk through a convenient artery port, often located near the groin region. The operator maneuvers the SilverHawk device to the appropriate region of plaque, keeping the SilverHawk moveable angle nose in a straight configuration. Once at the target zone, the operator then bends or adjusts the angle of the SilverHawk's hollow nose. The nose contacts the artery wall opposite the plaque target, exerting pressure. Through the laws of physics, this generates an opposing pressure that in turn presses or "urges" the catheter's window and cutter against the target plaque region.

The operator will then spin-up the cutter, and move the catheter across the target zone. The rotary cutter cuts a thin strip of plaque, which is directed, by the motion of the cutter and the device's geometry, into the device's hollow nose cone. The cuttings stay in the nose cone, where they can eventually be removed from the body and analyzed.

The SilverHawk atherectomy catheter represented a significant advance in the state of the art, because it enabled substantially longer regions (often several centimeters or more) of plaque to be shaved for each pass of the catheter over a region. An additional advantage was that the catheter could be rotated; exposing the window and the rotating blade to another region, and a target region of plaque could thus be shaved multiple times, allowing precise control over the amount and geometry of the plaque reduction process.

Although the SilverHawk catheter demonstrated the utility of this type of approach, further improvements were still desirable. In particular, the available plaque storage space in the device's hollow nose cone was limited, and improvements in trimming partially attached plaque shavings were also desirable.

The one problem with such prior art designs was that whenever the nose cone filled with plaque, the catheter needed to be pulled from the body, cleaned, and then laboriously rethreaded back to the correct location in the target zone again. This tended to significantly prolong the length and effort required for many medical procedures, and thus was undesirable to both physician and patient alike. Methods to reduce this burden were thus highly desirable.

Atherectomy design engineers face some formidable design challenges, however. In order to navigate the narrow and tortuous arteries, veins and other lumens of the body, such catheters must have extremely small diameters, usually on the order of 1 to 3 millimeters (3-9 French). At the same time, the devices must be flexible enough to be threaded through such arteries, yet have sections that are rigid enough to accomplish the required positioning, cutting, and plaque storage functions.

Due to these many design constraints, mechanical designs that might be relatively simple to execute with larger diameter devices become very problematic at such extremely small diameters. Additional constraints, such as the need to use

biocompatible materials, the need for extremely high reliability, and the need for accommodate a wide variety of different plaque targets in different patients make the design of such devices quite challenging.

BRIEF SUMMARY OF THE INVENTION

The present invention is an improved atherectomy catheter designed to overcome some of the limited plaque carrying capacity associated with prior art catheter designs. The present invention accomplishes this goal by departing from the conventional proximally driven rotary cutter designs employed by prior art atherectomy catheters, and instead teaches a novel, distally driven (or circumference driven) rotary cutter design.

Such distally (or circumference) driven designs are very non-intuitive, which is one of the reasons why prior art ignored or taught against such designs. Distally driven rotating cutter catheters require a break in the power transmission drive that links a proximal motor (usually located in a catheter handle outside of the body) with a circular cutter (located in the distal head of the catheter). Thus distally driven designs tend to require either a complex bypass-gear arrangement to communicate power to the rotary cutter from a direction away from the natural proximal direction of the drive motor, or alternatively require an entirely different rotary (torque) source, such as a miniaturized motors located in a distal location in the device's nose cone.

The present art teaches that such non-intuitive distal or circumference driven designs, although more complex, can have the unexpected advantage of now allowing plaque shavings to be stored in the larger volume hollow catheter body, rather than the limited catheter nose space. In some embodiments, even hollow tube of the catheter may be used for still more additional storage space.

This new design substantially increases the ability of the catheter to hold plaque shavings. This in turn translates into a direct benefit to both physicians and patients. The improved catheter can be operated for an appreciably longer period of time (i.e. clear substantially more plaque) before the operator needs to withdraw the catheter from the body for cleaning. This makes plaque procedures quicker, cheaper, more effective, (because more plaque can now be removed without undue hardship) and less stressful to patients and physicians. It also encourages more complete and careful plaque removal. A second advantage is that distal driven designs can also give the catheter an improved ability to trim dangling portions of plaque residue that are still hanging to artery walls.

In an alternative embodiment of the present invention, sensors may also be added to the design to help the operator properly position the device and also properly orient the cutting window of the device.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows an overview of the device

FIG. 2A shows a detail of the device's indirect distal driven rotating blade configuration

FIG. 2B shows a detail of the device's swiveling nose cone design.

FIG. 3 shows how the device cuts plaque in an artery.

FIG. 4 shows how the device can interact with a guide wire.

FIG. 5A shows an alternative device embodiment employing a distal electric motor or turbine to drive the cutting wheel.

FIG. 5B shows an alternative device embodiment employing sensors to monitor the status of the artery and plaque near the device's cutting wheel.

DETAILED DESCRIPTION OF THE INVENTION

The present art is normally intended for use with human patients, as well as various veterinary applications. For simplicity, this combined human or animal use will be referred to as use in mammals, although of course such devices could also be used in appropriate non-mammal animals such as birds, reptiles, and amphibians, etc., as appropriate.

It should also be understood that although the examples of cutting unwanted plaque deposits in arteries are used throughout this disclosure, the actual invention may be used for a broader variety of applications, including removing tumors, getting biopsies, etc. in arteries, veins, and any other tubular or roughly tubular body lumen.

For brevity, non proximally driven rotating cutter catheters will usually be referred to in the specification as distal driven designs. However it should be understood that wherever appropriate, alternative non-proximally driven designs such as circumference driven designs are also included in this general description.

Nomenclature: The handle end of the catheter is the proximal location, and the nose cone tip of the catheter is the distal location.

FIG. 1 shows an overview of the device. The device typically consists of an operator handle (101) which remains outside the body. The handle may optionally contain a battery, and a motor (102) which may provides torque for a rotary cutter, and additionally one or more optional control switches (103). The catheter also has a long narrow tube (shaft) (104), and the cutting atherectomy head (105). The catheter tube or shaft (104) will typically consist of a flexible tube, which is often hollow and capable of passing a guide wire, as well as optionally other materials such as drugs and contrast materials, control wires, drive shafts, sensors, sensor fibers or wires, ultrasonic signals, and the like.

In some embodiments, the hollow tube may contain a shaft or hollow shaft capable of transmitting torque from a motor mounted in the handle (102) to a rotary cutter (106) mounted in the atherectomy head. This rotary cutter (106) will usually be exposed to the outside environment through a window (107). The relative positions of the rotary cutter (106) and the window (107) may optionally be controlled by the operator, and optionally the cutter may be moved relative to the window edge to open or close the window (exposing or hiding the circular cutter) under operator control.

Torque may be communicated to the rotary cutter (106) by a variety of means so long as these means to not obscure either the window or the hollow space in the tube on the side of the catheter proximal to the window. Some of these torque (rotary motion) imparting means include indirect, off-axis, mechanical gearing or other means (108). In other embodiments, the catheter tube (104) may transmit electrical power, pressure, or chemicals capable of driving an electric motor, turbine, or chemical motor which can be mounted in the atherectomy head.

The head will also usually contain a flexible or moveable nose cone region or nose region (109), which in some embodiments may be connected to the rigid body of the head by one or more hinge pins or other means. This flexible nose-cone region will be capable of being deformed by the operator from a straight to a bent position so that the nose, by pressing against one wall of a body lumen, will generate an opposite force that will tend to move the cutter (106) and

window (107) against an opposite wall of a body lumen, thus enabling the cutter to cut material from selected zones of a body lumen under operator control.

The catheter's nose (109) usually has a tapered or conical atraumatic design intended to allow the catheter head to easily migrate through arteries. It may be composed of softer materials, and may additionally have an internal coiled spring or other means to allow the tip to bend somewhat as needed to migrate through torturous arteries and other body lumen structures.

FIG. 2A shows a close-up of the cutting atherectomy head (105). The head will typically consist of a hollow body (201) connected to the catheter tube (104), and a tapered nose, (109) usually connected to the front (distal portion) of the hollow body by at least one hinge (202). The head (105) will additionally consist of at least a window (107) and rotating cutting wheel (106). The unit may also optionally have holes or ports (203), (204), (205) and appropriate inner hollow spaces for accommodating an optional guide wire. This optional guide wire helps the operator thread the catheter head through torturous arteries or other body lumens, and will be discussed in more detail in FIG. 4.

As previously discussed, prior art atherectomy catheter designs taught proximally driven rotating cutting wheel designs. That is, the rotating wheel would (106) would under previous art have been directly coupled to a drive shaft coming from catheter tube (104) by a coupling mechanism aligned with the axis of wheel (106).

The prior art proximal-drive teaching had certain advantages. It was compatible with simple and robust designs, and also minimized the cross-section (width) of the catheter head, which was again desirable because this helped the head migrate through torturous artery channels. The prior art proximal drive design also allowed large amounts of torque to be communicated through the drive shaft to the cutting wheel by rotation, and also allowed the relative angle of the cutting wheel to be adjusted in the catheter head by transverse motion of the rotating shaft relative to the outer catheter sheath. Thus an operator could, by transverse motion of the catheter's inner rotating shaft, both communicate rotation to the cutting head, and also adjust the cutting head's relative orientation to catheter head windows (opening and closing the window, for example) or alternatively, in fixed window designs, adjust the angle of the cutting head or control to what extent the cutting head protrudes out through a catheter window.

However, as previously discussed, the prior art proximal design had one big drawback. The drawback was that proximal drive rotary shaft and coupling mechanism occupied essentially all of the hollow space (206) in the inside of the catheter head (i.e. proximal to the window (107) and cutter (106)). As a result, in prior art designs, the only space that was available to store cutter shavings (typically plaque shavings) was in the hollow nosecone (109). Unfortunately this hollow nosecone, which needed to be tapered in order to pass easily through arteries, typically had very limited internal volume and storage capacity.

Examples of such proximally driven cutters that store plaque shavings in the distal side in a conical nose include the previously discussed SilverHawk device. As previously discussed, this prior art device, although very functional, filled up quickly with shavings. When this happened, the device had to be stopped, removed from the body, the contents of the nose removed, and then reinserted into the body and threaded to the correct region again. As previously discussed, this was undesirable because it extended the length of procedures, and was burdensome for the physician and patient.

As previously discussed, by departing from the mechanically simpler proximally driven designs of prior art, and instead moving to a mechanically more complex non-proximally driven design (such as a distally driven or circumference driven design), the substantially larger space (206) on the proximal side of the cutter wheel (106) can now be opened up and used to store plaque shavings. Although due to the higher complexity, previous designs taught away from such configurations, this more complex design is justified by the subsequent savings in catheter cleaning time and effort. Whereas earlier designs, due to limited nosecone plaque storage space (109), could potentially waste hours of physician and patient times through tedious multiple removal and cleaning steps, these wasted hours can now be reduced or eliminated. The additional time can be used to do a more complete job of plaque removal as needed.

Given the extremely small diameter available to catheters, however, this alternative design poses many challenges. Either the rotating cutting wheel needs to be coupled to its rotational power source by an indirect linkage, or alternatively the cutting wheel needs to be powered from the distal end.

Various types of indirect linkage are possible, and the present invention is not intended to be limited to any one means. In one embodiment of the invention, the mechanism may involve indirectly coupling the cutting wheel (106) to the torque or rotation transmitting catheter drive shaft from the catheter tube (104) by an indirect gearing means so that torque is transmitted from the drive shaft to the outer diameter of the cutting wheel from the distal direction.

In one example, a rotating drive shaft from the flexible catheter tube (104) turns a first axial aligned gear (210) which, through one or more transfer gears (211), transfers power to an off-axial drive shaft (212). This off-axial drive shaft (212), typically will be connected closely to the main body of the catheter head (201) by a coupling mechanism (not shown) that allows the drive shaft to rotate. Off-axial drive shaft (212) then transfers power to the rotating cutter (106) by a second gearing mechanism (213). Many other mechanisms are also possible, and these are discussed in more detail in FIG. 5.

A second advantage of the present invention's distal side driven design over the earlier proximal driven art is that the distal driven design allows the cutter wheel (106) to be mounted on a carriage mechanism (not shown) so that it can also be used to open and close the window (107) as directed by the operator. This can allow the cutter wheel to be gradually closed by the operator, so as to allow simultaneously shearing off and trapping any dangling plaque that still may be attached to the side of an artery wall.

As per the earlier SilverHawk catheter designs, usually, the angle of the present art catheter's nose (109), relative to the rest of the catheter head body (201), will be under the control of the operator so as to act to press the cutting wheel against the target plaque with the desired degree of pressure.

As per the earlier SilverHawk catheter design, plaque cutting can be facilitated by deflecting the cutting wheel (106) so that it protrudes slightly through the window (107). This way the exposed tip of the cutting wheel may freely shave away stiff regions of exposed plaque that might not otherwise bend to extend inside the catheter window. This deflection may be achieved by a cam mechanism (not shown). Cam mechanisms of this type were previously taught by application Ser. Nos. 10/896,741; 10/288,559; 10/027,418, the contents of which are incorporated herein by reference.

The rotating cutting wheel may have sharp edges composed of tungsten carbide and the like. In other configura-

tions, a wheel need not be used, and instead an alternate cutting device such as laser, radio frequency electrodes, ultrasonic vibrating knives, may be used. In still other configurations, a cutting wheel can have its cutting effectiveness enhanced by coupling its rotary cutting action with laser, radio frequency electrodes, ultrasonic vibration, and the like as needed.

Device dimensions: Typically the catheter cutting head (201) will have a diameter between about 1 to 2.2 millimeters. The cutting window (107) will typically have a length of about 1.2 to 2.5 millimeters. In embodiments where the cutting wheel contains a cam or other orientation control mechanism that allows the wheel to extend slightly outside the window, the wheel orientation control mechanism may allow the wheel to at least temporarily be locked into a position that allows the cutting outer edge of the wheel to extend about 0.025 to 0.64 mm outside the cutting window. This allows the operator to move the catheter head along the target region of plaque, and shave off a long thin portion of this plaque while doing so.

The cutting wheel (106) will typically have a diameter of about 1.14 mm, and may have a straight edge, a beveled edge (which allows removal of plaque without damaging the underlying artery lumen), or a fluted edge depending upon the needs of the specific application. Usually the cutting wheel will be mounted on a shuttle or cam mechanism to allow the operator to adjust the protrusion of the wheel from the window, or alternatively the angle of the wheel or even the location of the wheel relative to the window opening (causing the window to be open, partially closed, or fully closed by the wheel).

The cutting wheel will typically rotate at speeds appreciably faster than 100 rotations per minute (rpm), preferably about 8,000 rotations per minute (rpm).

The cutting edge of the blades may be optionally hardened by an appropriate coating, such as ME-92, tungsten carbide, or other suitable materials as taught by U.S. Pat. Nos. 4,771,774; 5,242,460; 5,312,425; 5,431,673; and 5,674,232, the contents of which are in herein by reference.

As previously discussed, the action of blade can be facilitated by ultrasonic vibration, laser cutting, radiofrequency electrodes, and the like. If this option is elected, appropriate mechanisms (i.e. a piezoelectric ultrasonic vibrator, laser diode or optical fiber, electrodes, etc.) may also be provided in the catheter head to drive the blade as needed. If the action of the ultrasonic, laser, or electrode cutter is sufficiently robust enough as to make it a spinning blade unnecessary, then the blade may either not be spun up, or the blade rotary mechanism may be omitted, or a non-rotating blade may be used.

In many embodiments, it will be useful to allow the location and orientation of the catheter head (201), nose (109), and cutting window/wheel region (106/107) to be identified by x-ray fluoroscopy by constructing these regions out of suitable combinations of translucent and radio opaque materials, thus, for example, enabling the region distal to the cutting head to be distinguished from the region proximal to the cutting head.

In addition to fluoroscopy localization, other modalities, such as light (optical) and sonic (ultrasonic) localization methods may also be used. Here orientation may be facilitated by running a fiber optic strand through the catheter (104) (not shown) to an appropriate location on the catheter head, and determining the location and orientation of the head by optical means. Alternatively an ultrasonic transducer or pickup may be incorporated into the catheter head.

Typically the flexible outer catheter tube (104) between the handle (101) and the head (105) will have a length between 50

cm and 200 cm, a diameter between 1 French (0.33 mm) and 12 French (4 mm), and will usually be between 3 French (1 mm) and 9 French (3 mm) in diameter. The catheter body will often be made from extruded organic polymers such as polyvinylchloride, polyurethane, polyester, polytetrafluoroethylene (PTFE), silicon rubber, or similar materials. The catheter body may be reinforced as needed with wires, coils, or filaments as needed to give the body additional strength and to control rigidity and pushability.

Portions of the catheter head (105) (distal region of the catheter) will often be rigid or partially rigid, and can be made from materials such as metals, hard plastics, composite materials, NiTi steel (optionally coated with titanium nitride, tantalum, ME-92® or diamonds. Usually stainless steel or platinum/iridium will be used. The length of the middle portion of the catheter head may often vary between about 5 to 35 mm (201), and will usually be between about 10 to 25 mm, however alternative lengths (longer or shorter) may also be used.

As previously discussed, the extreme distal end of the catheter head (the nose) (109) will usually be made to be both flexible and atraumatic so as to allow the catheter to be threaded through arteries, veins, or other body lumens with maximum ease and minimum trauma. Because, in this design, the nose is no longer used to store plaque, this nose design may be optimized to accommodate the distal drive mechanism and also optimized to allow easy passage of the catheter through arteries. In some cases, the distal tip will have an inner coil construction to maximize flexibility. The distance between the rigid part of the catheter head and the distal end tip of the flexible catheter nose will typically be between 10 and 30 mm, but may vary as needs dictate.

FIG. 2B shows the catheter head with the catheter nose cone (109) in the angled, drooped or bent configuration. Typically this nose angle will be adjustable by the operator, either through a cam mechanism (not shown) coupled through the catheter tube (104) to the operator handle (101), or through selection of materials with appropriate rigidity/elasticity and bendability so that the operator may adjust the nose angle to an appropriate level by pulling or pushing on the catheter handle (101) and tube (104).

FIG. 2B shows that in this configuration, nose cone (109) is bent relative to body (201). This bending is a simple way to effectively increase the cross sectional area of the catheter, and is used to force the cutting edge of the catheter against the appropriate target zone. In the confines of a narrow body lumen such as an artery, nose cone (109) is deflected until it contacts a body lumen wall (i.e. the opposite wall of the artery). This pushes (or "urges") cutting window (107) and cutter (106) in the opposite direction. If appropriately directed, this will push, force, or urge the cutter against the appropriate target zone (usually a region of the artery occluded or partially occluded with plaque). Once the cutter is in proper position, with the correct amount of "force" or "push" dialed in by the angle of the nose deflection, the catheter can then be moved by the operator, shaving away unwanted plaque material.

FIG. 3 shows a diagram of the catheter head of the present invention cutting plaque (301) from an artery wall (302). In this configuration, the catheter's nose (109) has been deflected at enough of an angle to contact the opposite artery wall (303). The cutting wheel (106) has been forced up against the plaque (301) and has already cut away a section of this plaque (304). A dangling region of plaque (305) is entering the hollow catheter body (206) through the window (107). Here, the operator controls the speed and extent of plaque removal by using control (101) to partially retract the catheter head over the plaque by pulling on catheter tube (104), while

wheel (106) is spinning and exposed to the plaque through window (107). Excess plaque (306) is stored in the hollow region of the catheter head (206). The drawing is not to scale, in actuality; the available storage space (206) will typically be substantially larger than the storage space of nosecone (109).

Often, it may be advantageous to use a guidewire as a type of monorail to quickly direct catheters to the correct target zones. Usually such guidewires will have diameters between about 0.010" and 0.032", usually around 0.014. When this option is desired, the catheter may be designed to be compatible with guidewire use.

FIG. 4 shows one possible way in which the catheter of the present invention may work with a guide wire. In this example, guidewire (401) is threaded up through hollow catheter tube (104). In order to allow the head's cutting mechanism to operate freely and without risk of entanglement from a guide wire, it may be useful to have the guide wire exit from the main catheter tube through a first proximal exit port on the head (203), thus skipping the storage area (206) window (107) and plaque cutting (106) regions of the head. In this configuration, the guide wire would then typically reenter the nose cone (109) at opening (204), travel through the nose end of the head for a short distance, and then finally exit the head again through a third exit port or opening (205), often located near the tip of the catheter's nose (109) at the extreme distal end of the catheter

In some embodiments, it may also be desirable to protect the portion or portions of the guidewire that is briefly external to the catheter head (402) by a guidewire tube/lumen or a telescoping guidewire tube/lumen (403). Such guidewire protection lumens may have a length between about 2 and 14 cm, or even longer as needed to accommodate longer heads with higher plaque storage volumes. This telescoping guidewire lumen protects both the guidewire and the patient's artery linings from inadvertent excessive pressure while the catheter head traverses narrow arteries, and also insures that the guidewire never comes into contact with window (107) or cutter (106).

In some embodiments, the telescoping guidewire lumen may serve a secondary purpose by also acting as a means to transmit torque (212) from a rotating shaft in the catheter tube (104) to the cutting wheel (106) as previously shown and discussed in FIG. 2A. This dual-action role (guidewire protection/torque transmission) helps to minimize the cross section area of the catheter head when an off-axis drive mechanism is used.

In still another embodiment, lumen (403)/drive shaft (212) can consist of one or more nested hollow tubes so that an inner tube may rotate and conduct torque to drive wheel (106), yet the outer part of the lumen may be substantially stationary as to avoid tangling with a body lumen. The guide wire may still progress through the hollow inner core of this nested structure.

Many other combinations of drive mechanisms, catheter configurations, and sensor configurations are also possible, and some of these are shown in FIGS. 5A and 5B.

As shown in FIG. 5A, the rotary cutter (106) does not necessarily have to be coupled to a rotating shaft of any sort from catheter tube (104). Rather, the rotary cutter may be adequately driven from the distal end of the catheter by means of a small electric motor or turbine (501). This motor or turbine may in turn derive power from catheter tube (104) and in some embodiments handle (101) as well by appropriate wires or miniature pressure or chemical tubes (not shown) progressing up catheter tube (104).

As shown in FIG. 5B, in some embodiments, the catheter head (105) may additionally have various imaging or posi-

tional sensors, such as ultrasound transducer arrays, optical fibers, coherence tomography devices, infrared sensors, directional ultrasonic sensors, etc. mounted on the catheter head or nose region (502), (503). In one embodiment, the orientation of the sensor or sensors may be directed by the operator to give information as to the status of the plaque and/or artery of or other body lumen that is facing the cutting window of the catheter. This can allow the operator to determine if the catheter is in the proper orientation relative to its intended target. Examples of such sensors were described in more detail in application Ser. No. 10/421,980, the contents of which are incorporated herein by reference.

FIG. 5B also shows yet another embodiment in which the plaque storage container (506) is extended to now also include some of the hollow core of the catheter tube itself (104). With this configuration, handle (101) may be hooked up to a suction or cleaning device, as needed, to give the catheter a near infinite ability to accommodate plaque shavings. With this configuration, the catheter need never be removed from the body until the complete plaque removal task is accomplished.

What is claimed is:

1. A catheter for removing tissue comprising:

an elongate body having a proximal end and a distal end and a tubular side wall having an outer surface defining an outer dimension of the elongate body and an inner surface defining a lumen, the elongate body having a distal portion with a window in the side wall, the lumen proximally adjacent the window comprising a material collection chamber;

a rotational tissue cutting element disposed at least partially within the lumen of the elongate body, the tissue cutting element having a distal side and a proximal side, the tissue cutting element having an axis of rotation that extends through the material collection chamber;

a source of rotational power; and

a drive shaft connected between the source of rotational power and the distal side of the rotational tissue cutting element, no portion of the drive shaft being contained within the material collection chamber, such that the material collection chamber is substantially open for collection of tissue.

2. The catheter of claim 1, wherein the source of rotational power is positioned within the elongate body at a location distal to the tissue cutting element.

3. The catheter of claim 1, further comprising a handle connected at the proximal end of the elongate body, the source of rotational power being contained within the handle.

4. The catheter of claim 1, in which the source of rotational power is one of a mechanical coupling to a rotating shaft, an electric motor, a pressure powered turbine, or a chemical powered turbine.

5. The catheter of claim 2, wherein the drive shaft includes a proximal portion having an axis of rotation that generally coincides with the axis of rotation of the tissue cutting element and a distal portion having an axis of rotation that is radially off-set from the axis of rotation of the tissue cutting element and from the axis of rotation of the proximal portion.

6. The catheter of claim 5, further comprising a first gear element connected to transfer torque from the proximal portion of the drive shaft to the distal portion of the drive shaft.

7. The catheter of claim 6, further comprising a second gear element connected to transfer torque from the distal portion of the drive shaft to the distal side of the tissue cutting element.

8. The catheter of claim 1, wherein the drive shaft has first and second ends positioned within the elongate body distal of the rotational tissue cutting element.

9. The catheter of claim 1, wherein the elongate body further comprises a deflectable nose region, and a mechanism to allow an operator to deflect the nose region against a body lumen, thereby pushing the window and the rotatable tissue cutting element against an opposite wall of the body lumen, allowing the rotatable cutter to cut material from said body lumen.

10. The catheter of claim 1, wherein the elongate body contains openings for receiving a guidewire.

11. The catheter of claim 1, wherein the distal portion of the elongate body further comprises an RF electrode, a laser, or an ultrasound emitter.

12. The catheter of claim 1, wherein the distal portion of the elongate body further comprises an imaging device.

13. The catheter of claim 12, in which the imaging device is selected from the group consisting of ultrasound transducer arrays, optical fibers, and coherence tomography devices.

14. The catheter of claim 1, further comprising a source of ultrasonic vibration operatively coupled to the rotatable tissue cutting element, the source of ultrasonic vibration being configured to ultrasonically vibrate the rotatable tissue cutting element.

15. The catheter of claim 14, wherein the source of ultrasonic vibration is a piezoelectric ultrasonic vibrator.

* * * * *

5,285,795 A	2/1994	Ryan et al.	5,527,325 A	6/1996	Conley et al.
5,295,493 A	3/1994	Radisch, Jr.	5,531,685 A	7/1996	Hemmer et al.
5,300,085 A	4/1994	Yock	5,531,690 A	7/1996	Solar
5,306,294 A	4/1994	Winston et al.	5,531,700 A	7/1996	Moore et al.
5,308,354 A	5/1994	Zacca et al.	5,540,707 A	7/1996	Ressemann et al.
5,312,425 A	5/1994	Evans et al.	5,549,601 A	8/1996	McIntyre et al.
5,312,427 A	5/1994	Shturman	5,554,163 A	9/1996	Shturman
5,314,438 A	5/1994	Shturman	5,556,408 A	9/1996	Farhat
5,318,032 A	6/1994	Lonsbury et al.	5,558,093 A	9/1996	Pomeranz
5,318,528 A	6/1994	Heaven et al.	5,562,726 A	10/1996	Chuter
5,318,576 A	6/1994	Plassche, Jr. et al.	5,562,728 A	10/1996	Lazarus et al.
5,321,501 A	6/1994	Swanson et al.	5,569,275 A	10/1996	Kotula et al.
5,322,508 A	6/1994	Viera	5,569,276 A	10/1996	Jang et al.
5,350,390 A	9/1994	Sher	5,569,277 A	10/1996	Evans et al.
5,356,418 A	10/1994	Shturman	5,569,279 A	10/1996	Rainin
5,358,472 A	10/1994	Vance et al.	5,570,693 A	11/1996	Jang et al.
5,358,485 A	10/1994	Vance et al.	5,571,122 A	11/1996	Kelly et al.
5,360,432 A	11/1994	Shturman	5,571,130 A	11/1996	Simpson et al.
5,366,463 A	11/1994	Ryan	5,575,817 A	11/1996	Martin
5,368,035 A	11/1994	Hamm et al.	5,584,842 A	12/1996	Fogarty et al.
5,370,609 A	12/1994	Drasler et al.	5,584,843 A	12/1996	Wulfman et al.
5,370,651 A	12/1994	Summers	5,609,605 A	3/1997	Marshall et al.
5,372,601 A	12/1994	Lary	5,618,293 A	4/1997	Sample et al.
5,372,602 A	12/1994	Burke	5,620,447 A	4/1997	Smith et al.
5,373,619 A	12/1994	Fleischhacker et al.	5,624,457 A	4/1997	Farley et al.
5,373,849 A	12/1994	Maroney et al.	5,626,562 A	5/1997	Castro
5,377,682 A	1/1995	Ueno et al.	5,626,576 A	5/1997	Janssen
5,378,234 A	1/1995	Hammerslag et al.	5,628,761 A	5/1997	Rizik
5,383,460 A	1/1995	Jang et al.	5,632,754 A	5/1997	Farley et al.
5,395,311 A	3/1995	Andrews	5,632,755 A	5/1997	Nordgren et al.
5,395,313 A	3/1995	Naves et al.	5,634,464 A	6/1997	Jang et al.
5,395,335 A	3/1995	Jang	5,643,296 A	7/1997	Hundertmark et al.
5,397,345 A	3/1995	Lazarus	5,643,298 A	7/1997	Nordgren et al.
5,402,790 A	4/1995	Jang et al.	5,649,941 A	7/1997	Lary
5,403,334 A	4/1995	Evans et al.	5,660,180 A	8/1997	Malinowski et al.
5,409,454 A	4/1995	Fischell et al.	5,662,671 A	9/1997	Barbut et al.
5,413,107 A	5/1995	Oakley et al.	5,665,098 A	9/1997	Kelly et al.
5,419,774 A	5/1995	Willard et al.	5,669,920 A	9/1997	Conley et al.
5,423,740 A	6/1995	Sullivan	5,674,232 A	10/1997	Halliburton
5,423,799 A	6/1995	Shiu	5,676,696 A	10/1997	Marcade
5,423,838 A	6/1995	Willard	5,676,697 A	10/1997	McDonald
5,423,846 A	6/1995	Fischell	5,681,336 A	10/1997	Clement et al.
5,427,107 A	6/1995	Milo et al.	5,682,897 A	11/1997	Pomeranz
5,429,136 A	7/1995	Milo et al.	5,683,449 A	11/1997	Marcade
5,431,673 A	7/1995	Summers et al.	5,683,453 A	11/1997	Palmaz
5,441,510 A	8/1995	Simpson et al.	5,688,234 A	11/1997	Frisbie
5,443,446 A	8/1995	Shturman	5,695,506 A	12/1997	Pike
5,443,497 A	8/1995	Venbrux	5,695,507 A	12/1997	Auth et al.
5,444,078 A	8/1995	Yu et al.	5,697,944 A	12/1997	Lary
5,445,155 A	8/1995	Sieben	5,700,240 A	12/1997	Barwick, Jr. et al.
5,449,369 A	9/1995	Imran	5,700,687 A	12/1997	Finn
5,451,233 A	9/1995	Yock	5,707,350 A	1/1998	Krause et al.
5,454,809 A	10/1995	Janssen	5,707,376 A	1/1998	Kavteladze et al.
5,456,667 A	10/1995	Ham et al.	5,707,383 A	1/1998	Bays et al.
5,456,689 A	10/1995	Kresch et al.	5,709,698 A	1/1998	Adams et al.
5,458,585 A	10/1995	Salmon et al.	5,713,913 A	2/1998	Lary et al.
5,459,570 A	10/1995	Swanson et al.	5,715,825 A	2/1998	Crowley
5,464,016 A	11/1995	Nicholas et al.	5,716,410 A	2/1998	Wang et al.
5,470,415 A	11/1995	Perkins et al.	5,720,735 A	2/1998	Dorros
5,485,042 A	1/1996	Burke et al.	5,724,977 A	3/1998	Yock et al.
5,485,840 A	1/1996	Bauman	5,728,123 A	3/1998	Lemelson et al.
5,487,729 A	1/1996	Avellanet et al.	5,733,296 A	3/1998	Rogers et al.
5,489,295 A	2/1996	Piplani et al.	5,735,816 A	4/1998	Lieber et al.
5,491,524 A	2/1996	Hellmuth et al.	5,741,270 A	4/1998	Hansen et al.
5,496,267 A	3/1996	Drasler et al.	5,766,192 A	6/1998	Zacca
5,501,694 A	3/1996	Ressemann et al.	5,772,674 A	6/1998	Nakhjavan
5,503,155 A	4/1996	Salmon et al.	5,775,327 A	7/1998	Randolph et al.
5,505,210 A	4/1996	Clement	5,776,114 A	7/1998	Frantzen et al.
5,507,292 A	4/1996	Jang et al.	5,776,153 A	7/1998	Rees
5,507,760 A	4/1996	Wynne et al.	5,779,643 A	7/1998	Lum et al.
5,507,761 A	4/1996	Duer	5,779,673 A	7/1998	Roth et al.
5,507,795 A	4/1996	Chiang et al.	5,779,721 A	7/1998	Nash
5,512,044 A	4/1996	Duer	5,779,722 A	7/1998	Shturman et al.
5,514,115 A	5/1996	Frantzen et al.	5,792,157 A	8/1998	Mische et al.
5,520,189 A	5/1996	Malinowski et al.	5,797,949 A	8/1998	Parodi
5,522,825 A	6/1996	Kropf et al.	5,799,655 A	9/1998	Jang et al.
5,522,880 A	6/1996	Barone et al.	5,807,329 A	9/1998	Gelman
5,527,292 A	6/1996	Adams et al.	5,810,867 A	9/1998	Zarbatany et al.
5,527,298 A	6/1996	Vance et al.	5,816,923 A	10/1998	Milo et al.

5,820,592	A	10/1998	Hammerslag	6,159,195	A	12/2000	Ha et al.
5,823,971	A	10/1998	Robinson et al.	6,159,225	A	12/2000	Makower
5,824,039	A	10/1998	Piplani et al.	6,165,127	A	12/2000	Crowley
5,824,055	A	10/1998	Spiridigliozzi et al.	6,179,859	B1	1/2001	Bates et al.
5,827,201	A	10/1998	Samson et al.	6,183,432	B1	2/2001	Milo
5,827,229	A	10/1998	Auth et al.	6,187,025	B1	2/2001	Machek
5,827,304	A	10/1998	Hart	6,190,353	B1	2/2001	Makower et al.
5,827,322	A	10/1998	Williams	6,191,862	B1	2/2001	Swanson et al.
5,830,224	A	11/1998	Cohn et al.	6,193,676	B1	2/2001	Winston et al.
5,836,957	A	11/1998	Schulz et al.	6,196,963	B1	3/2001	Williams
5,843,022	A	12/1998	Willard et al.	6,206,898	B1	3/2001	Honeycutt et al.
5,843,103	A	12/1998	Wulfman	6,217,527	B1	4/2001	Selmon et al.
5,843,161	A	12/1998	Solovay	6,217,549	B1	4/2001	Selmon et al.
5,855,563	A	1/1999	Kaplan et al.	6,217,595	B1	4/2001	Shturman et al.
5,865,748	A	2/1999	Co et al.	6,221,049	B1	4/2001	Selmon et al.
5,868,685	A	2/1999	Powell et al.	6,221,332	B1	4/2001	Thumm et al.
5,868,767	A	2/1999	Farley et al.	6,228,049	B1	5/2001	Schroeder et al.
5,871,536	A	2/1999	Lazarus	6,228,076	B1	5/2001	Winston et al.
5,873,882	A	2/1999	Straub et al.	6,231,546	B1	5/2001	Milo et al.
5,876,414	A	3/1999	Straub	6,231,549	B1	5/2001	Noecker et al.
5,879,397	A	3/1999	Kalberer et al.	6,235,000	B1	5/2001	Milo et al.
5,883,458	A	3/1999	Sumita et al.	6,238,405	B1	5/2001	Findlay, III et al.
5,888,201	A	3/1999	Stinson et al.	6,241,667	B1	6/2001	Vetter et al.
5,895,399	A	4/1999	Barbut et al.	6,241,744	B1	6/2001	Imran et al.
5,895,402	A	4/1999	Hundertmark et al.	6,245,012	B1	6/2001	Kleshinski
5,902,245	A	5/1999	Yock	6,258,052	B1	7/2001	Milo
5,910,150	A	6/1999	Saadat	6,263,236	B1	7/2001	Kasinkas et al.
5,911,734	A	6/1999	Tsugita et al.	6,264,611	B1	7/2001	Ishikawa et al.
5,916,210	A	6/1999	Winston	6,266,550	B1	7/2001	Selmon et al.
5,922,003	A	7/1999	Anctil et al.	6,277,138	B1	8/2001	Levinson et al.
5,935,108	A	8/1999	Katoh et al.	6,283,951	B1	9/2001	Flaherty et al.
5,938,645	A	8/1999	Gordon	6,283,983	B1	9/2001	Makower et al.
5,938,671	A	8/1999	Katoh et al.	6,299,622	B1	10/2001	Snow et al.
5,938,672	A	8/1999	Nash	6,299,623	B1	10/2001	Wulfman
5,941,869	A	8/1999	Patterson et al.	6,302,875	B1	10/2001	Makower et al.
5,947,985	A	9/1999	Imran	6,305,834	B1	10/2001	Schubert et al.
5,948,184	A	9/1999	Frantzen et al.	6,312,444	B1	11/2001	Barbut
5,951,480	A	9/1999	White et al.	6,319,242	B1	11/2001	Patterson et al.
5,951,482	A	9/1999	Winston et al.	6,319,275	B1	11/2001	Lashinski et al.
5,954,745	A	9/1999	Gertler et al.	6,330,884	B1	12/2001	Kim
5,968,064	A	10/1999	Selmon et al.	6,355,005	B1	3/2002	Powell et al.
5,972,019	A	10/1999	Engelson et al.	6,361,545	B1	3/2002	Macoviak et al.
5,985,397	A	11/1999	Witt et al.	6,375,615	B1	4/2002	Flaherty et al.
5,989,281	A	11/1999	Barbut et al.	6,383,195	B1	5/2002	Richard
5,997,557	A	12/1999	Barbut et al.	6,383,205	B1	5/2002	Samson et al.
6,001,112	A	12/1999	Taylor	6,394,976	B1	5/2002	Winston et al.
6,010,449	A	1/2000	Selmon et al.	6,398,798	B2	6/2002	Selmon et al.
6,010,522	A	1/2000	Barbut et al.	6,422,736	B1	7/2002	Antonaides et al.
6,013,072	A	1/2000	Winston et al.	6,423,081	B1	7/2002	Lee et al.
6,019,778	A	2/2000	Wislon et al.	6,425,870	B1	7/2002	Flesch
6,022,362	A	2/2000	Lee et al.	6,428,551	B1	8/2002	Hall et al.
6,027,450	A	2/2000	Brown et al.	6,428,552	B1	8/2002	Sparks
6,027,460	A	2/2000	Shturman	6,443,966	B1	9/2002	Shiu
6,027,514	A	2/2000	Stine et al.	6,445,939	B1	9/2002	Swanson et al.
6,032,673	A	3/2000	Savage et al.	6,447,525	B2	9/2002	Follmer et al.
6,036,646	A	3/2000	Barthe et al.	6,451,036	B1	9/2002	Heitzmann et al.
6,036,656	A	3/2000	Slater	6,454,779	B1	9/2002	Taylor
6,036,707	A	3/2000	Spaulding	6,475,226	B1	11/2002	Belef et al.
6,048,349	A	4/2000	Winston et al.	6,482,217	B1	11/2002	Pintor et al.
6,050,949	A	4/2000	White et al.	6,497,711	B1	12/2002	Plaia et al.
6,063,093	A	5/2000	Winston et al.	6,501,551	B1	12/2002	Tearney et al.
6,066,153	A	5/2000	Lev	6,520,975	B2	2/2003	Branco
6,068,603	A	5/2000	Suzuki	RE38,018	E	3/2003	Anctil et al.
6,068,638	A	5/2000	Makower	6,532,380	B1	3/2003	Close et al.
6,081,738	A	6/2000	Hinohara et al.	6,533,749	B1	3/2003	Mitusina et al.
RE36,764	E	7/2000	Zacca et al.	6,561,998	B1	5/2003	Roth et al.
6,095,990	A	8/2000	Parodi	6,565,588	B1	5/2003	Clement et al.
6,099,542	A	8/2000	Cohn et al.	6,569,177	B1	5/2003	Dillard et al.
6,106,515	A	8/2000	Winston et al.	6,592,526	B1	7/2003	Lenker
6,110,121	A	8/2000	Lenker	6,620,180	B1	9/2003	Bays et al.
6,120,515	A	9/2000	Rogers et al.	6,623,437	B2	9/2003	Hinchliffe et al.
6,120,516	A	9/2000	Selmon et al.	6,623,495	B2	9/2003	Findlay, III et al.
6,126,649	A	10/2000	VanTassel et al.	6,623,496	B2	9/2003	Snow et al.
6,129,734	A	10/2000	Shturman et al.	6,629,953	B1	10/2003	Boyd
6,134,003	A	10/2000	Tearney et al.	6,638,233	B2	10/2003	Corvi et al.
6,152,909	A	11/2000	Bagaoisan et al.	RE38,335	E	11/2003	Aust et al.
6,152,938	A	11/2000	Curry	6,652,505	B1	11/2003	Tsugita
6,156,046	A	12/2000	Passafaro et al.	6,652,548	B2	11/2003	Evans et al.
6,157,852	A	12/2000	Selmon et al.	6,656,195	B2	12/2003	Peters et al.

6,666,874	B2	12/2003	Heitzmann et al.	2007/0038061	A1	2/2007	Hueneekens et al.
6,682,543	B2	1/2004	Barbut et al.	2007/0049958	A1	3/2007	Adams
6,733,511	B2	5/2004	Hall et al.	2007/0135712	A1	6/2007	Maschke
6,740,103	B2	5/2004	Hall et al.	2007/0135886	A1	6/2007	Maschke
6,746,462	B1	6/2004	Selmon et al.	2007/0167824	A1	7/2007	Lee et al.
6,764,495	B2	7/2004	Lee et al.	2007/0225739	A1	9/2007	Pintor et al.
6,790,204	B2	9/2004	Zadno-Azizi et al.	2007/0265647	A1	11/2007	Bonnette et al.
6,790,215	B2	9/2004	Findlay, III et al.	2007/0276419	A1	11/2007	Rosenthal
6,818,001	B2	11/2004	Wulfman et al.	2008/0001643	A1	1/2008	Lee
6,830,577	B2	12/2004	Nash et al.	2008/0004644	A1	1/2008	To et al.
6,843,797	B2	1/2005	Nash et al.	2008/0004645	A1	1/2008	To et al.
6,849,068	B1	2/2005	Bagaoisan et al.	2008/0004646	A1	1/2008	To et al.
6,863,676	B2	3/2005	Lee et al.	2008/0004647	A1	1/2008	To et al.
6,911,026	B1	6/2005	Hall et al.	2008/0045986	A1	2/2008	To et al.
6,970,732	B2	11/2005	Winston et al.	2008/0051812	A1	2/2008	Schmitz et al.
6,997,934	B2	2/2006	Snow et al.	2008/0065124	A1	3/2008	Olson
7,153,315	B2	12/2006	Miller	2008/0065125	A1	3/2008	Olson
7,172,610	B2	2/2007	Heitzmann et al.	2008/0097403	A1	4/2008	Donaldson et al.
7,208,511	B2	4/2007	Williams et al.	2008/0125799	A1	5/2008	Adams
7,235,088	B2	6/2007	Pintor et al.	2008/0161840	A1	7/2008	Osiroff et al.
7,318,831	B2	1/2008	Alvarez et al.	2008/0177139	A1	7/2008	Courtney et al.
7,388,495	B2	6/2008	Fallin et al.	2008/0208227	A1	8/2008	Kadykowski et al.
7,479,148	B2	1/2009	Beaupre	2008/0249553	A1	10/2008	Gruber et al.
7,488,322	B2	2/2009	Brunnett et al.	2008/0312673	A1	12/2008	Viswanathan et al.
7,524,289	B2	4/2009	Lenker	2009/0012548	A1	1/2009	Thatcher et al.
7,603,166	B2	10/2009	Casscells, III et al.	2009/0018565	A1	1/2009	To et al.
7,708,749	B2	5/2010	Simpson et al.	2009/0018566	A1	1/2009	Escudero et al.
7,713,235	B2	5/2010	Torrance et al.	2009/0138031	A1	5/2009	Tsukernik et al.
7,713,279	B2	5/2010	Simpson et al.	2009/0187203	A1	7/2009	Corvi et al.
7,729,745	B2	6/2010	Maschke	2009/0216125	A1	8/2009	Lenker
7,734,332	B2	6/2010	Sher	2009/0216180	A1	8/2009	Lee et al.
7,753,852	B2	7/2010	Maschke	2009/0226063	A1	9/2009	Rangwala et al.
7,758,599	B2	7/2010	Snow et al.	2009/0234378	A1	9/2009	Escudero et al.
7,771,444	B2	8/2010	Patel et al.	2009/0270888	A1	10/2009	Patel et al.
7,887,556	B2	2/2011	Simpson et al.	2009/0275966	A1	11/2009	Mitusina
2001/0000041	A1	3/2001	Selmon et al.	2009/0299394	A1	12/2009	Simpson et al.
2001/0031784	A1	10/2001	Petersen et al.	2009/0306689	A1	12/2009	Welty et al.
2001/0031981	A1	10/2001	Evans et al.	2010/0030216	A1	2/2010	Arcenio
2001/0044622	A1	11/2001	Vardi et al.	2010/0049225	A1	2/2010	To et al.
2001/0049500	A1	12/2001	Van Tassel et al.	2010/0130996	A1	5/2010	Doud et al.
2002/0019644	A1	2/2002	Hastings et al.	2010/0198240	A1	8/2010	Simpson et al.
2002/0022788	A1	2/2002	Corvi et al.	2010/0241147	A1	9/2010	Maschke
2002/0058904	A1	5/2002	Boock et al.	2010/0280534	A1	11/2010	Sher
2002/0077373	A1	6/2002	Hudson	2010/0292721	A1	11/2010	Moberg
2002/0077642	A1	6/2002	Patel et al.	2010/0298850	A1	11/2010	Snow et al.
2002/0095141	A1	7/2002	Belef et al.	2010/0312263	A1	12/2010	Moberg et al.
2002/0103459	A1	8/2002	Sparks et al.	2011/0004107	A1	1/2011	Rosenthal et al.
2002/0177800	A1	11/2002	Bagaoisan et al.	2011/0022069	A1	1/2011	Mitusina
2002/0188307	A1	12/2002	Pintor et al.	2011/0040315	A1	2/2011	To et al.
2003/0018346	A1	1/2003	Follmer et al.	2011/0130777	A1	6/2011	Zhang et al.
2003/0023263	A1	1/2003	Krolik et al.	2011/0144673	A1	6/2011	Zhang et al.
2003/0093098	A1	5/2003	Heitzmann et al.				
2003/0120295	A1	6/2003	Simpson et al.				
2003/0125757	A1	7/2003	Patel et al.				
2003/0125758	A1	7/2003	Simpson et al.				
2003/0163126	A1	8/2003	West, Jr.				
2003/0199747	A1	10/2003	Michlitsch et al.				
2003/0206484	A1	11/2003	Childers et al.				
2003/0229369	A1	12/2003	Findlay, III et al.				
2004/0006358	A1	1/2004	Wulfman et al.				
2004/0049225	A1	3/2004	Denison				
2004/0167553	A1	8/2004	Simpson et al.				
2004/0167554	A1	8/2004	Simpson et al.				
2004/0193034	A1	9/2004	Wasicek et al.				
2004/0210245	A1	10/2004	Erickson et al.				
2005/0004585	A1	1/2005	Hall et al.				
2005/0004594	A1	1/2005	Nool et al.				
2005/0021063	A1	1/2005	Hall et al.				
2005/0042239	A1	2/2005	Lipiecki et al.				
2005/0090845	A1	4/2005	Boyd				
2005/0090849	A1	4/2005	Adams				
2005/0177068	A1	8/2005	Simpson				
2005/0216018	A1	9/2005	Sennett				
2005/0222596	A1	10/2005	Maschke				
2005/0222663	A1	10/2005	Simpson et al.				
2006/0015126	A1	1/2006	Sher				
2006/0235334	A1	10/2006	Corvi et al.				
2006/0259052	A1	11/2006	Pintor et al.				
2007/0010840	A1	1/2007	Rosenthal et al.				

FOREIGN PATENT DOCUMENTS

DE	8900059	U1	5/1989
DE	93 03 531	U1	7/1994
DE	44 44 166	A1	6/1996
DE	29722136	U1	5/1999
EP	0086048	A2	8/1983
EP	0 107 009	A2	5/1984
EP	0 229 620	A2	7/1987
EP	0291170	A1	11/1988
EP	0 302 701	A2	2/1989
EP	0330843	A1	9/1989
EP	0373927	A2	6/1990
EP	0421457	A1	4/1991
EP	0 431 752	A2	6/1991
EP	0448859	A2	10/1991
EP	0463798	A1	1/1992
EP	0 490 565	A1	6/1992
EP	0514810	A1	11/1992
EP	0 526 042	A1	2/1993
EP	0533320	A2	3/1993
EP	0 608 911	A1	8/1994
EP	0 608 912	A1	8/1994
EP	0 611 522	A1	8/1994
EP	0 648 414	B1	4/1995
EP	0657140	A1	6/1995
EP	0 680 695	B1	11/1998
EP	0 983 749	A2	3/2000

EP	1 767 159	A1	3/2007
EP	1 875 871	A2	1/2008
GB	2093353	A	9/1982
GB	2 115 829	A	9/1983
GB	2210965	A	6/1989
JP	2-206452	A	8/1990
JP	2271847	A	11/1990
JP	3186256	A	8/1991
JP	4200459	A	7/1992
JP	5042162	A	2/1993
JP	5056984	A	3/1993
JP	5184679	A	7/1993
JP	6269460	A	9/1994
JP	7075611	B	8/1995
SU	442795	A1	9/1974
SU	665908	A1	6/1979
WO	WO 8906517	A1	7/1989
WO	WO 92/07500	A2	5/1992
WO	WO 9313716	A1	7/1993
WO	WO 9313717	A1	7/1993
WO	WO 93/16642	A1	9/1993
WO	WO 9521576	A1	8/1995
WO	WO 9611648	A1	4/1996
WO	WO 9746164	A1	12/1997
WO	WO 9804199	A1	2/1998
WO	WO 9824372	A1	6/1998
WO	WO 99/39648	A1	8/1999
WO	WO 9952454	A1	10/1999
WO	WO 00/30531	A1	6/2000
WO	WO 00/54735	A1	9/2000
WO	WO 00/62913	A1	10/2000
WO	WO 00/63800	A1	11/2000
WO	WO 00/72955	A1	12/2000
WO	WO 01/15609	A1	3/2001
WO	WO 01/19444	A1	3/2001
WO	WO 0130433	A1	5/2001
WO	WO 01/43857	A1	6/2001
WO	WO 0143809	A1	6/2001
WO	WO 02/16017	A2	2/2002

WO	WO 02/45598	A2	6/2002
WO	WO 2006/058223	A2	6/2006
WO	WO 2006/066012	A2	6/2006

OTHER PUBLICATIONS

Translation of Aug. 15, 2007 mailed Japanese Patent Office Action, Application No. 1999-139033 (4 pages).
 Abstract of JP2206452A (1 page), 1990.
 Amplatz Coronary Catheters, posted: Feb. 25, 2009, [online], [retrieved on Mar. 29, 2011], retrieved from the Cardiophile MD using Internet website <URL:<http://cardiophile.org/2009/02/amplatzcoronary-catheter.html>> (3 pages).
 Judkins Left Coronary Catheter, posted: Feb. 19, 2009, [online], [retrieved on Mar. 29, 2011], retrieved from the Cardiophile MD using Internet website <URL:<http://cardiophile.org/2009/02/judkins-left-coronary-catheter.html>> (3 pages).
 Abstract of DE 44 44 166 A1 (1 page), 1996.
 Brezinski et al., "Optical Coherence Tomography for Optical Biopsy," *Circulation*, 93:1206-1213 (1996).
 Brezinski et al., "Assessing Atherosclerotic Plaque Morphology: Comparison of Optical Coherence Tomography and High Frequency Intravascular Ultrasound," *Heart*, 77:397-403 (1997).
 Huang et al., "Optical Coherence Tomography," *Science*, 254:1178-1181 (1991).
 International Search Report and Written Opinion of PCT Application No. PCT/US04/12600, dated Jun. 13, 2008, 8 pages total.
 International Search Report of PCT Application No. PCT/US04/12601, dated Jun. 30, 2005, 3 pages total.
 Mar. 27, 2009 Communication from the European Patent Office regarding EP Application No. 01 991 343.3 (7 pages).
 Apr. 6, 2010 European Supplementary Search Report in European Application No. 04760156.2 (3 pages).
 Sep. 21, 2010 International Search Report and Written Opinion for corresponding PCT Application No. PCT/US2010/032558 (14 pages).

Figure 1

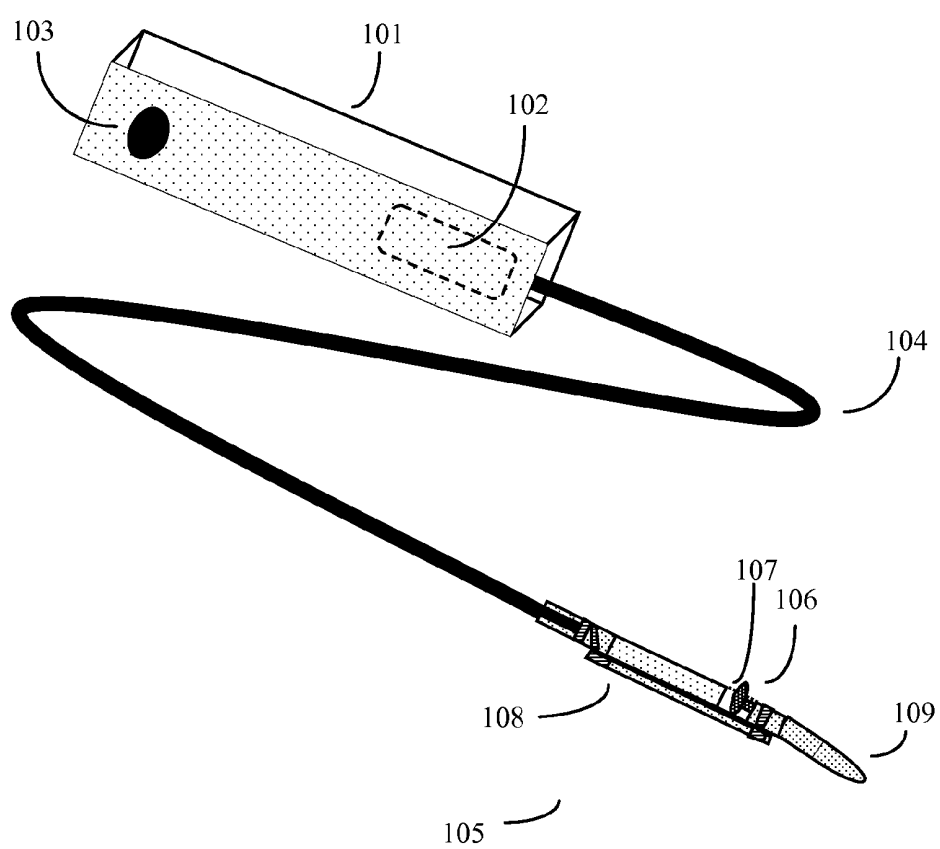


Figure 2A

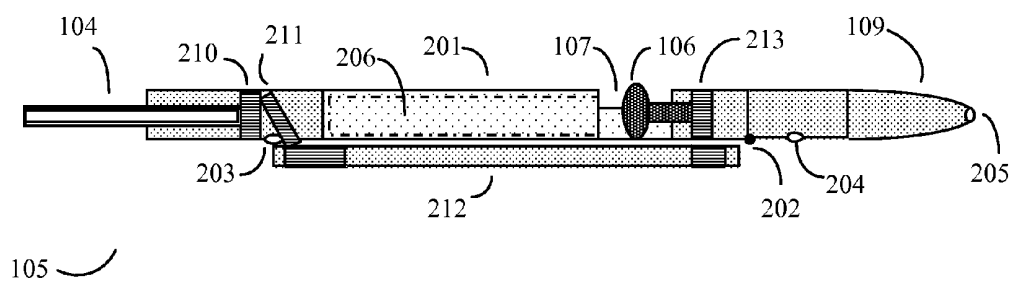


Figure 2B

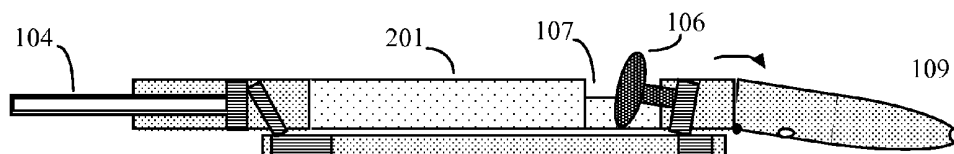


Figure 3


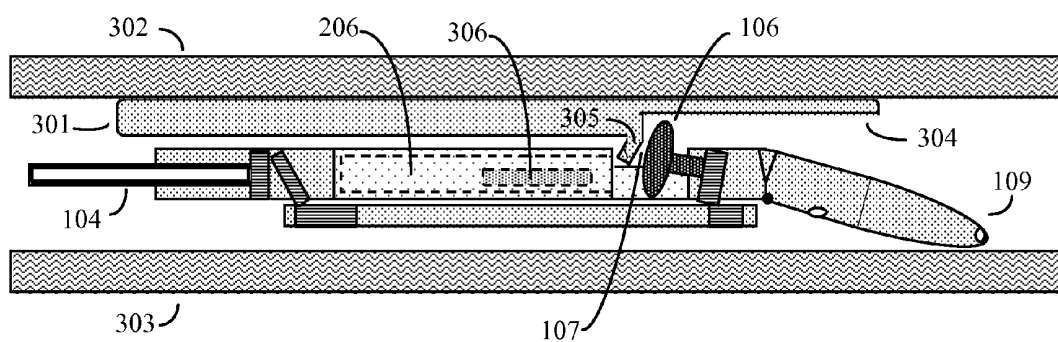


Figure 4

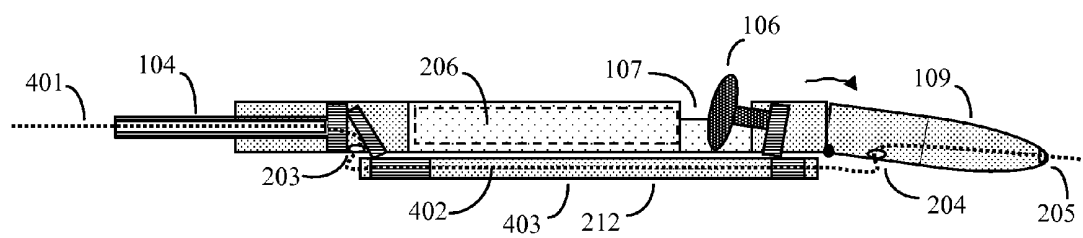

专利名称(译)	具有远端驱动切割轮的高容量减压导管		
公开(公告)号	US8469979	公开(公告)日	2013-06-25
申请号	US13/239820	申请日	2011-09-22
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	泰科医疗集团LP		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	OLSON WILLIAM JOHN		
发明人	OLSON, WILLIAM JOHN		
IPC分类号	A61B17/22 A61B17/00 A61B17/28 A61B17/32 A61B18/14		
CPC分类号	A61B17/320758 A61B17/320783 A61B2017/00685 A61B2017/2927 A61B2017/320032 A61B2017/320775 A61B2017/320791 A61B8/12 A61B17/2202 A61B17/320725		
审查员(译)	阮瞳V		
优先权	60/272273 2001-02-27 US 60/257704 2000-12-20 US 10/288559 2002-11-04 US		
其他公开文献	US20120016395A1		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种具有旋转切割元件的粥样斑块切除术导管。导管在中空收集室中收集牙菌斑。导管包括连接在旋转动力源和切割元件的远侧之间的驱动轴，驱动轴的任何部分都不包含在收集室内。

