



US009038688B2

(12) **United States Patent**
Maiorino et al.

(10) **Patent No.:** **US 9,038,688 B2**
(45) **Date of Patent:** **May 26, 2015**

(54) **SYSTEM AND METHOD FOR MAKING
TAPERED LOOPED SUTURE**

(75) Inventors: **Nicholas Maiorino**, Branford, CT (US);
Timothy Kosa, Hamden, CT (US);
Mark Buchter, Ansonia, CT (US);
Keith Kroeber, Portland, CT (US);
Richard Casey Hart, Clinton, CT (US);
Gary Suszynski, Woodbury, CT (US)

(73) Assignee: **Covidien LP**, Mansfield, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 414 days.

(21) Appl. No.: **13/480,614**

(22) Filed: **May 25, 2012**

(65) **Prior Publication Data**

US 2012/0267035 A1 Oct. 25, 2012

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/051,544, filed on Mar. 18, 2011, now abandoned, which is a continuation-in-part of application No. 12/751,456, filed on Mar. 31, 2010, now Pat. No. 8,590,588.

(60) Provisional application No. 61/173,719, filed on Apr. 29, 2009.

(51) **Int. Cl.**

B32B 37/00 (2006.01)

A61B 17/06 (2006.01)

A61B 17/32 (2006.01)

A61B 17/00 (2006.01)

(52) **U.S. Cl.**

CPC ... **A61B 17/06166** (2013.01); **A61B 17/320068** (2013.01); **A61B 2017/00526** (2013.01); **A61B 2017/0619** (2013.01)

(58) **Field of Classification Search**

CPC B61B 17/06166; B29C 65/08; B29C 66/9221; B29C 66/92211; B29C 66/924; B29C 66/9241
USPC 156/358, 378, 510, 515, 530, 538, 539, 156/580, 580.1, 580.2, 581
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,514,184 A	7/1950	Lower
3,311,110 A	3/1967	Sol et al.
3,513,848 A	5/1970	Winston et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP	0 444 777 A1	9/1991
EP	0 490 143 A2	6/1992

(Continued)

OTHER PUBLICATIONS

European Search Report EP 12195006.7.-2310 date of completion Jan. 30, 2013.

(Continued)


Primary Examiner — James Sells

(57)

ABSTRACT

An active anvil assembly for use in forming a looped suture is provided. The active anvil assembly includes an anvil member, a first sensor operably connected to the anvil member, and a control assembly. The first sensor is configured for measuring at least one of force, torque, and distance feedback. Also provided are systems and methods for forming a looped suture including an active anvil assembly.

16 Claims, 9 Drawing Sheets

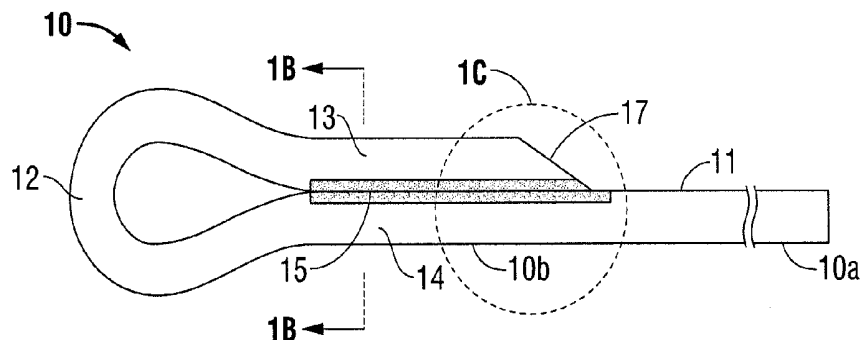

(56)

References Cited**U.S. PATENT DOCUMENTS**

3,657,056 A 4/1972 Winston et al.
 3,874,963 A 4/1975 Barger
 4,575,372 A 3/1986 Gundersen
 4,662,068 A 5/1987 Polonsky
 4,950,285 A 8/1990 Wilk
 5,059,212 A 10/1991 Kortoff
 5,110,381 A 5/1992 Heckard et al.
 5,226,535 A 7/1993 Rosdhy et al.
 5,259,846 A 11/1993 Granger et al.
 5,335,842 A 8/1994 Mostafazadeh
 5,383,905 A 1/1995 Golds et al.
 5,403,331 A 4/1995 Chesterfield et al.
 5,417,700 A 5/1995 Egan et al.
 5,658,408 A 8/1997 Frantz et al.
 5,746,856 A 5/1998 Hendershot et al.
 5,772,814 A 6/1998 Grewell
 5,820,011 A 10/1998 Ito et al.
 5,865,836 A 2/1999 Miller
 5,893,880 A 4/1999 Egan et al.
 6,077,277 A 6/2000 Mollenauer et al.
 6,089,438 A 7/2000 Suzuki
 6,174,324 B1 1/2001 Egan et al.
 6,217,591 B1 4/2001 Egan et al.
 6,286,746 B1 9/2001 Egan et al.
 6,296,659 B1 10/2001 Foersteer
 6,358,271 B1 3/2002 Egan et al.
 6,368,343 B1 4/2002 Bonutti et al.
 6,409,743 B1 6/2002 Fenton, Jr.
 6,423,088 B1 7/2002 Fenton, Jr.
 6,488,690 B1 12/2002 Morris et al.
 6,669,705 B2 12/2003 Westhaver et al.
 6,749,704 B2 6/2004 Boussu et al.
 6,767,426 B1 7/2004 Yamamoto
 6,797,088 B2 9/2004 Solinski
 7,090,111 B2 8/2006 Egan et al.
 7,429,266 B2 9/2008 Bonutti et al.
 7,438,210 B2 10/2008 Gale et al.
 7,533,791 B2 5/2009 Steiner et al.
 7,582,097 B2 9/2009 McRury et al.
 7,611,039 B2 11/2009 Hesse et al.
 7,775,413 B2 8/2010 Oblak et al.
 7,776,171 B2 8/2010 Lehto et al.
 7,810,541 B2 10/2010 Wild et al.
 7,819,158 B2 10/2010 Klinstein et al.
 2002/0011508 A1 1/2002 Egan et al.

2002/0029065 A1 3/2002 Shchervinsky
 2002/0116027 A1 8/2002 Egan et al.
 2003/0111157 A1* 6/2003 Ehlert et al. 156/73.1
 2004/0112547 A1 6/2004 Tamamoto
 2004/0122451 A1 6/2004 Wood
 2005/0165448 A1 7/2005 Egan et al.
 2005/0216058 A1 9/2005 Egan et al.
 2005/0241143 A1 11/2005 Mizuno et al.
 2006/0025858 A1 2/2006 Alameddine
 2006/0144902 A1 7/2006 Pochardt et al.
 2006/0149485 A1 7/2006 Oblak et al.
 2006/0259076 A1 11/2006 Burkhart et al.
 2007/0119535 A1 5/2007 Watanabe
 2008/0105385 A1 5/2008 Wild et al.
 2008/0110550 A1 5/2008 Lehto et al.
 2009/0133803 A1 5/2009 Lehto
 2009/0216269 A1 8/2009 Harrington et al.
 2009/0248070 A1 10/2009 Kosa et al.
 2009/0250171 A1 10/2009 Wieduwilt et al.
 2009/0259251 A1 10/2009 Cohen
 2010/0024956 A1 2/2010 Vogler
 2010/0043939 A1 2/2010 Heinimann et al.
 2010/0101707 A1 4/2010 Maiorino et al.
 2010/0276061 A1 11/2010 Oblak et al.
 2011/0180196 A1 7/2011 Hart et al.
 2012/0024482 A1 2/2012 Maiorino et al.

FOREIGN PATENT DOCUMENTS

EP 2 814 157 A1 5/2010
 FR 2729940 8/1996
 WO WO96/25109 8/1996
 WO WO99/26542 6/1999
 WO WO00/30550 A1 6/2000
 WO WO02/22025 A1 3/2002
 WO WO2005/087113 A1 9/2005

OTHER PUBLICATIONS

European Search Report EP 10 25 0847 date of completion Aug. 25, 2010.
 European Search Report EP 10 25 1270 date of completion Feb. 8, 2012.
 European Search Report EP 12163323.4 date of completion Jul. 25, 2012.
 International Search Report PCT/US2013/042340 dated Aug. 27, 2013.

* cited by examiner

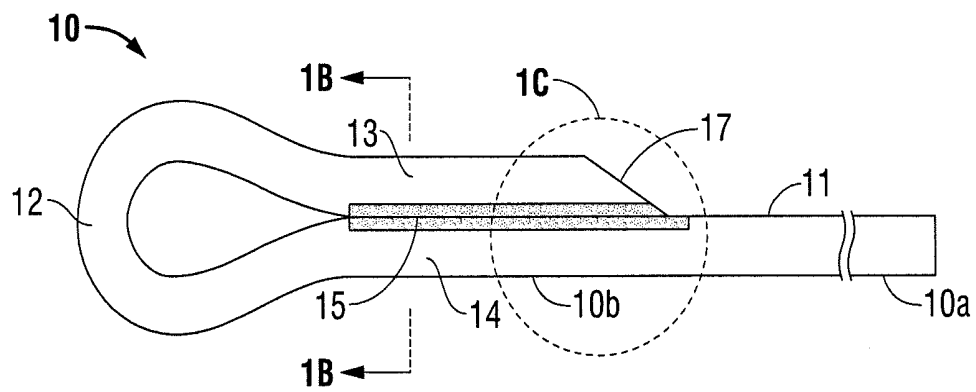


FIG. 1A




FIG. 1B

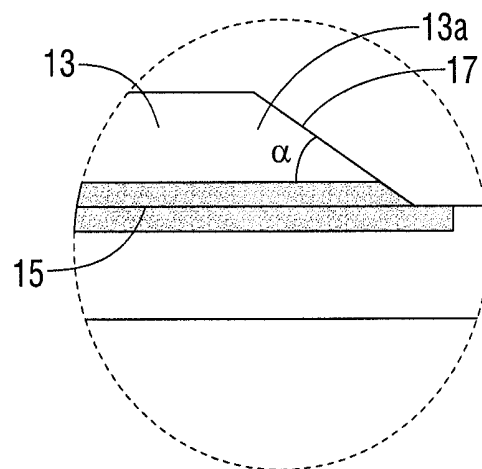


FIG. 1C

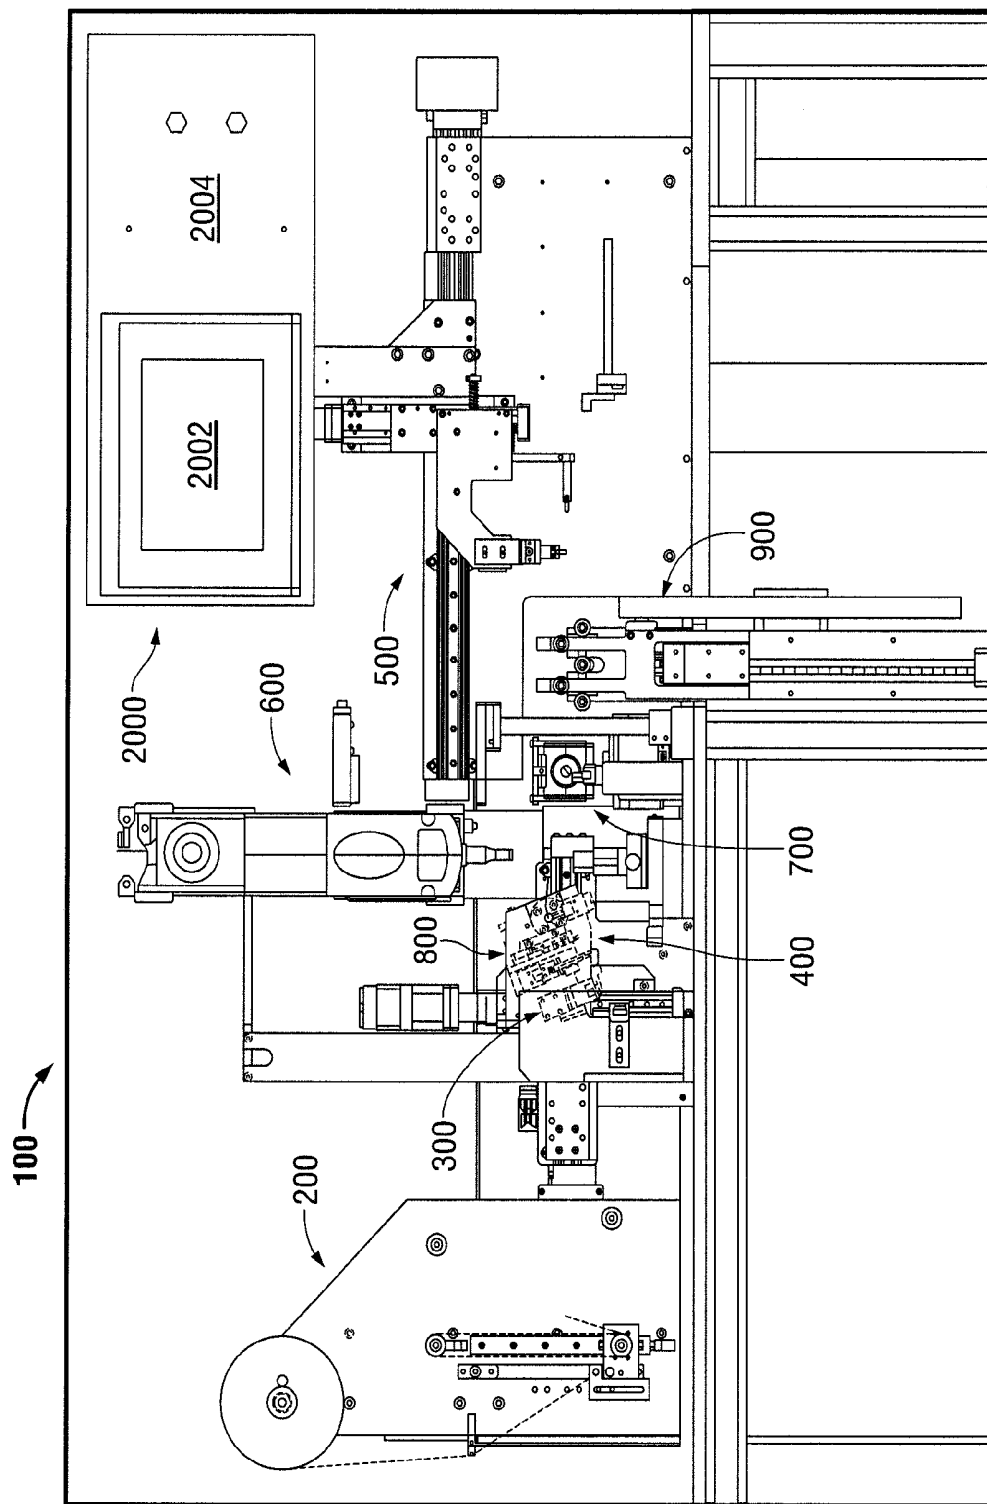


FIG. 2

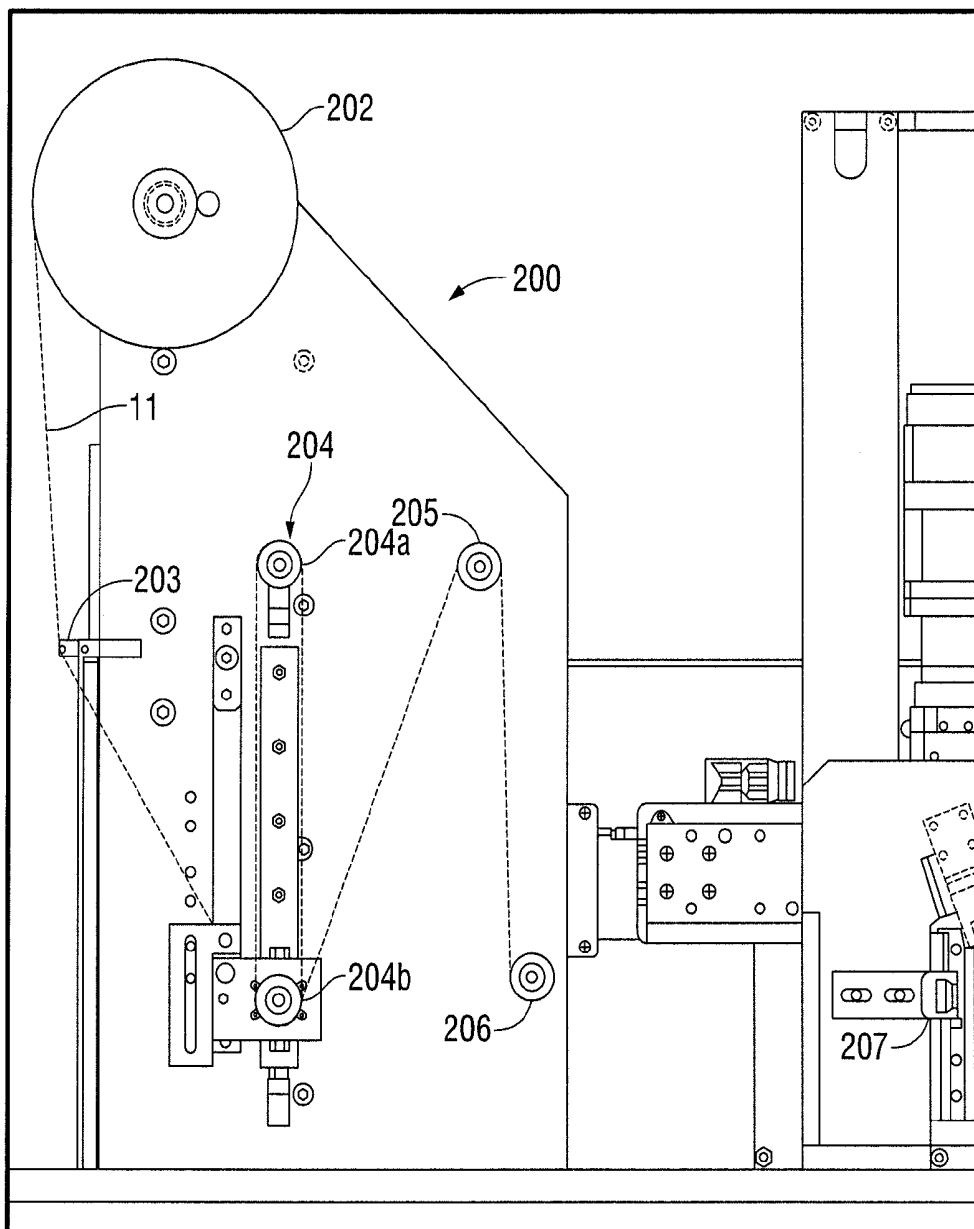


FIG. 3

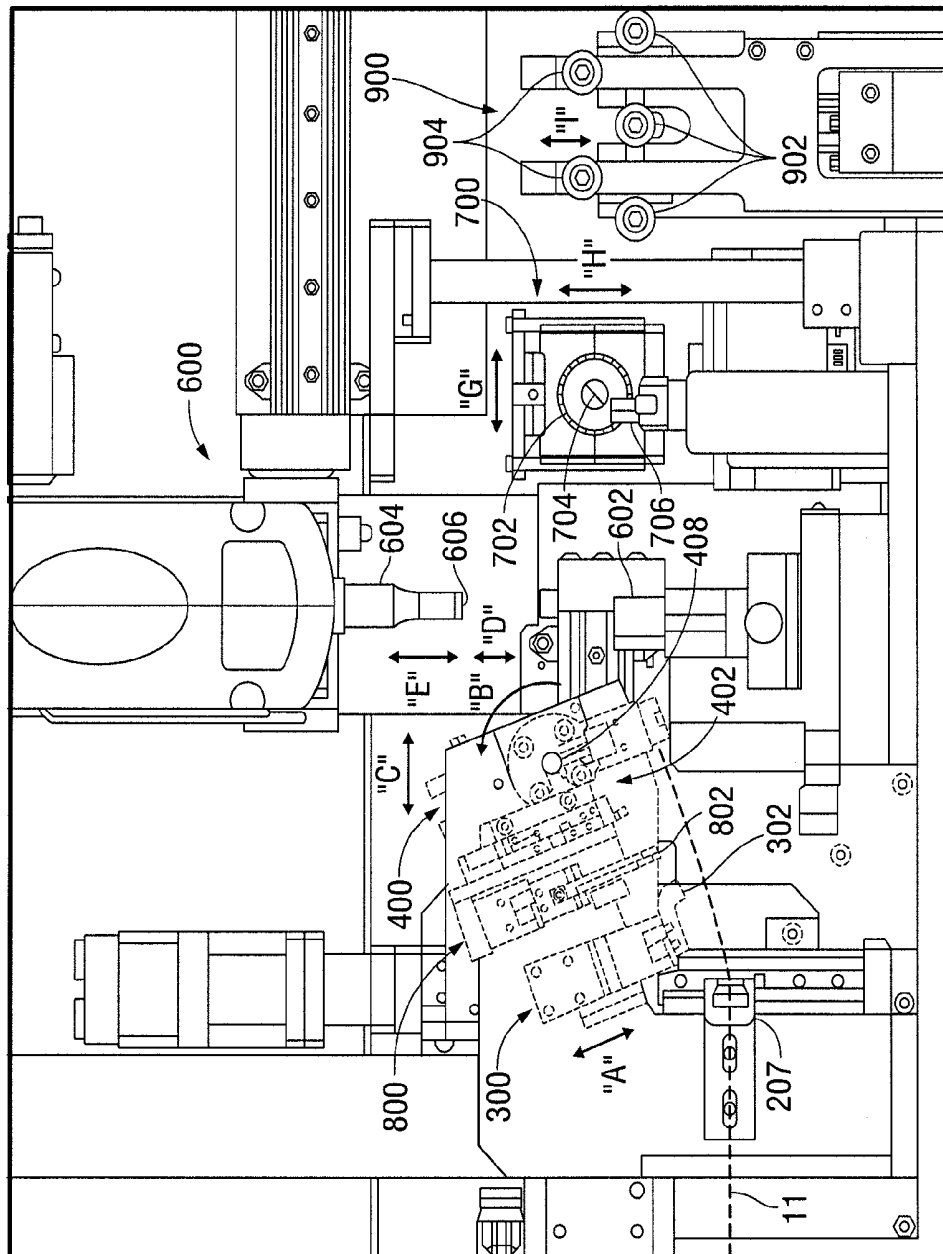


FIG. 4

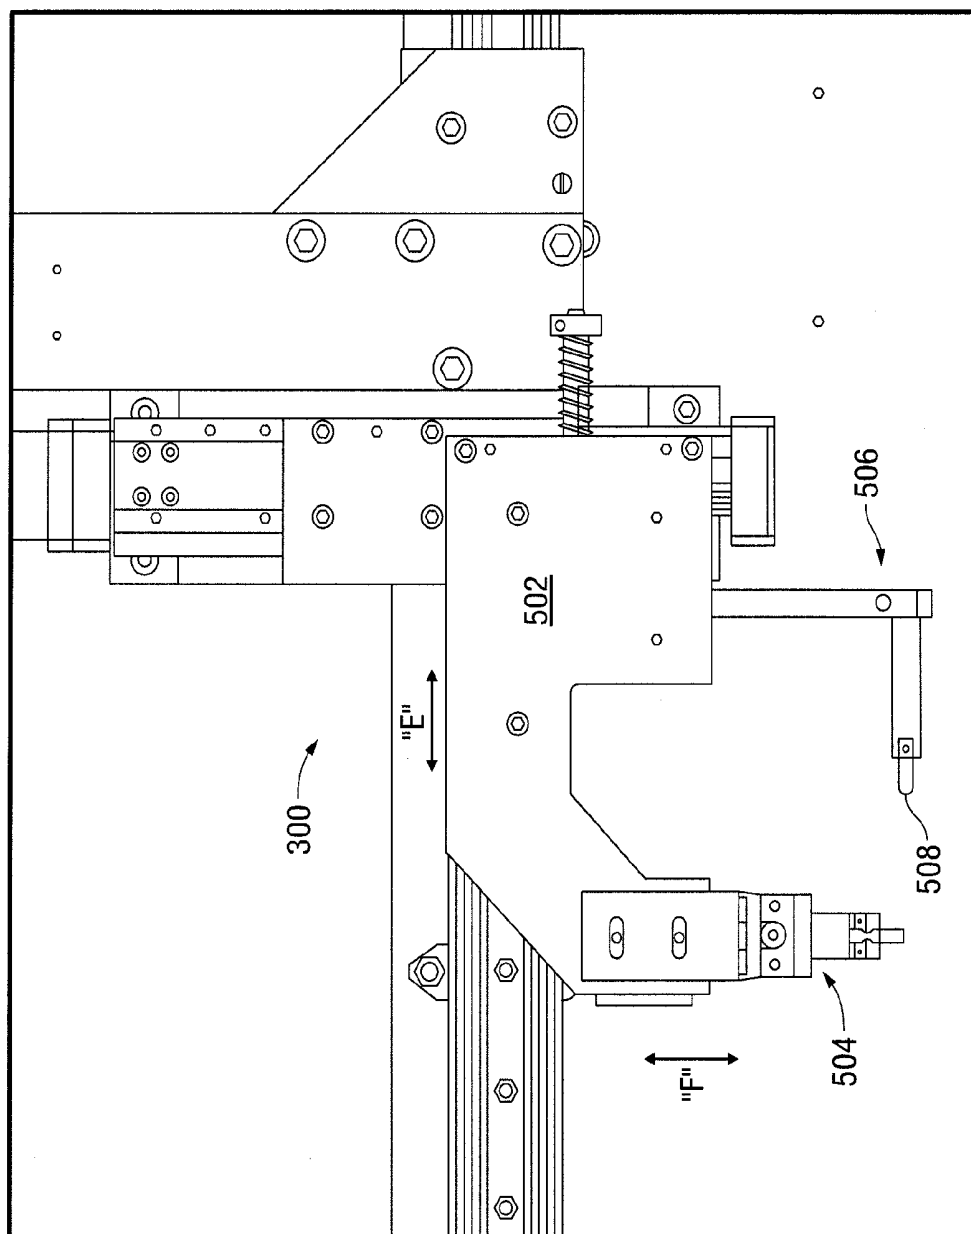


FIG. 5

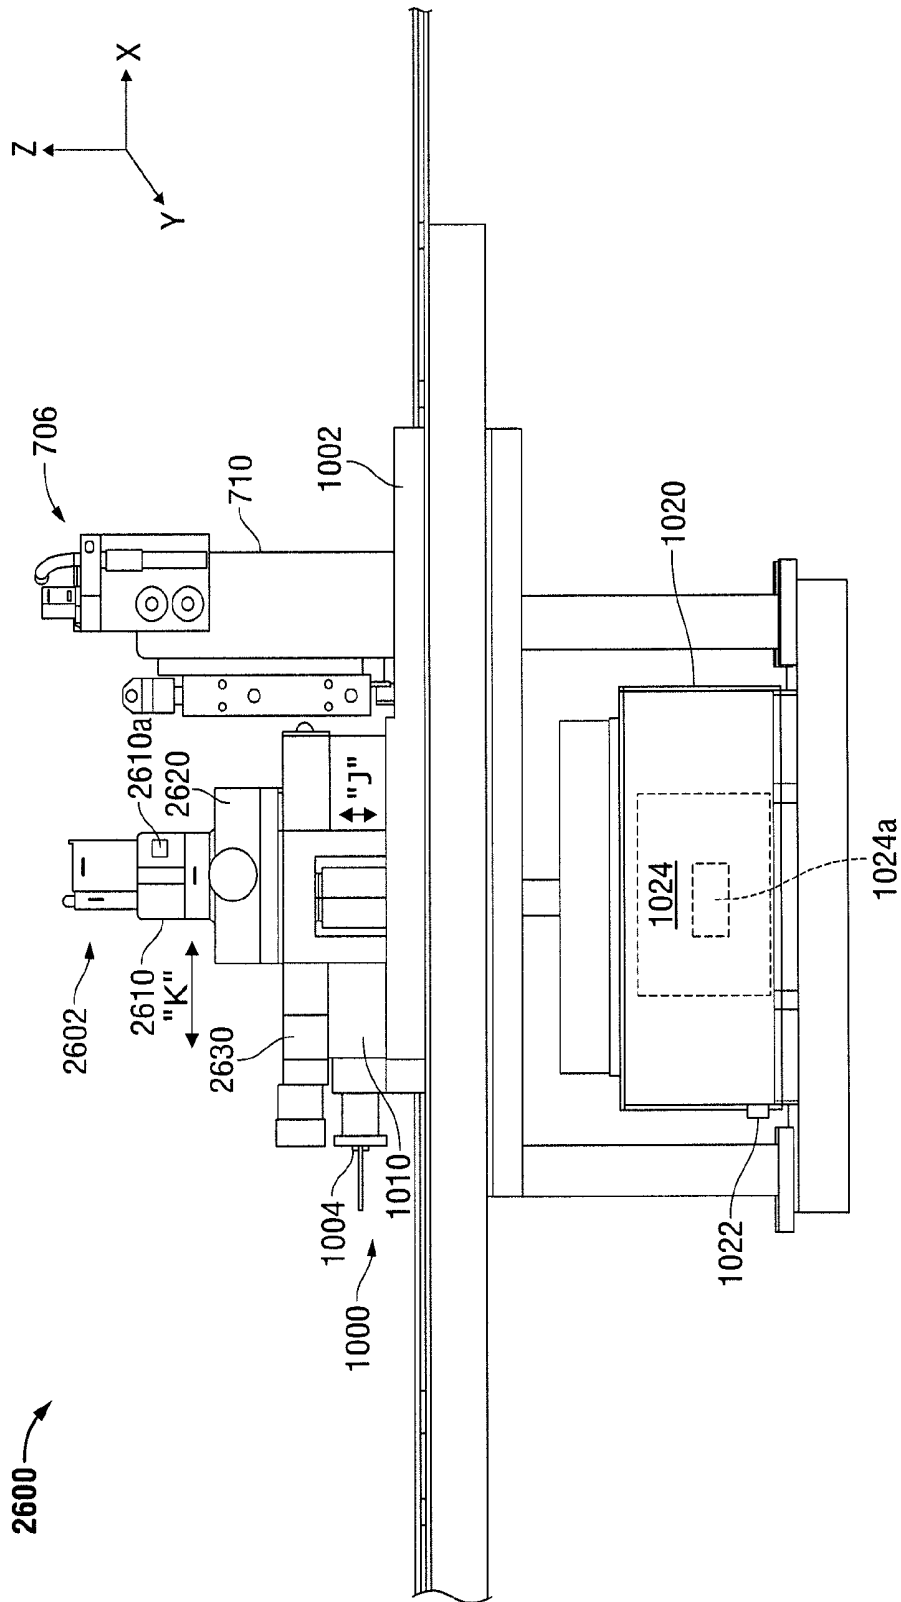
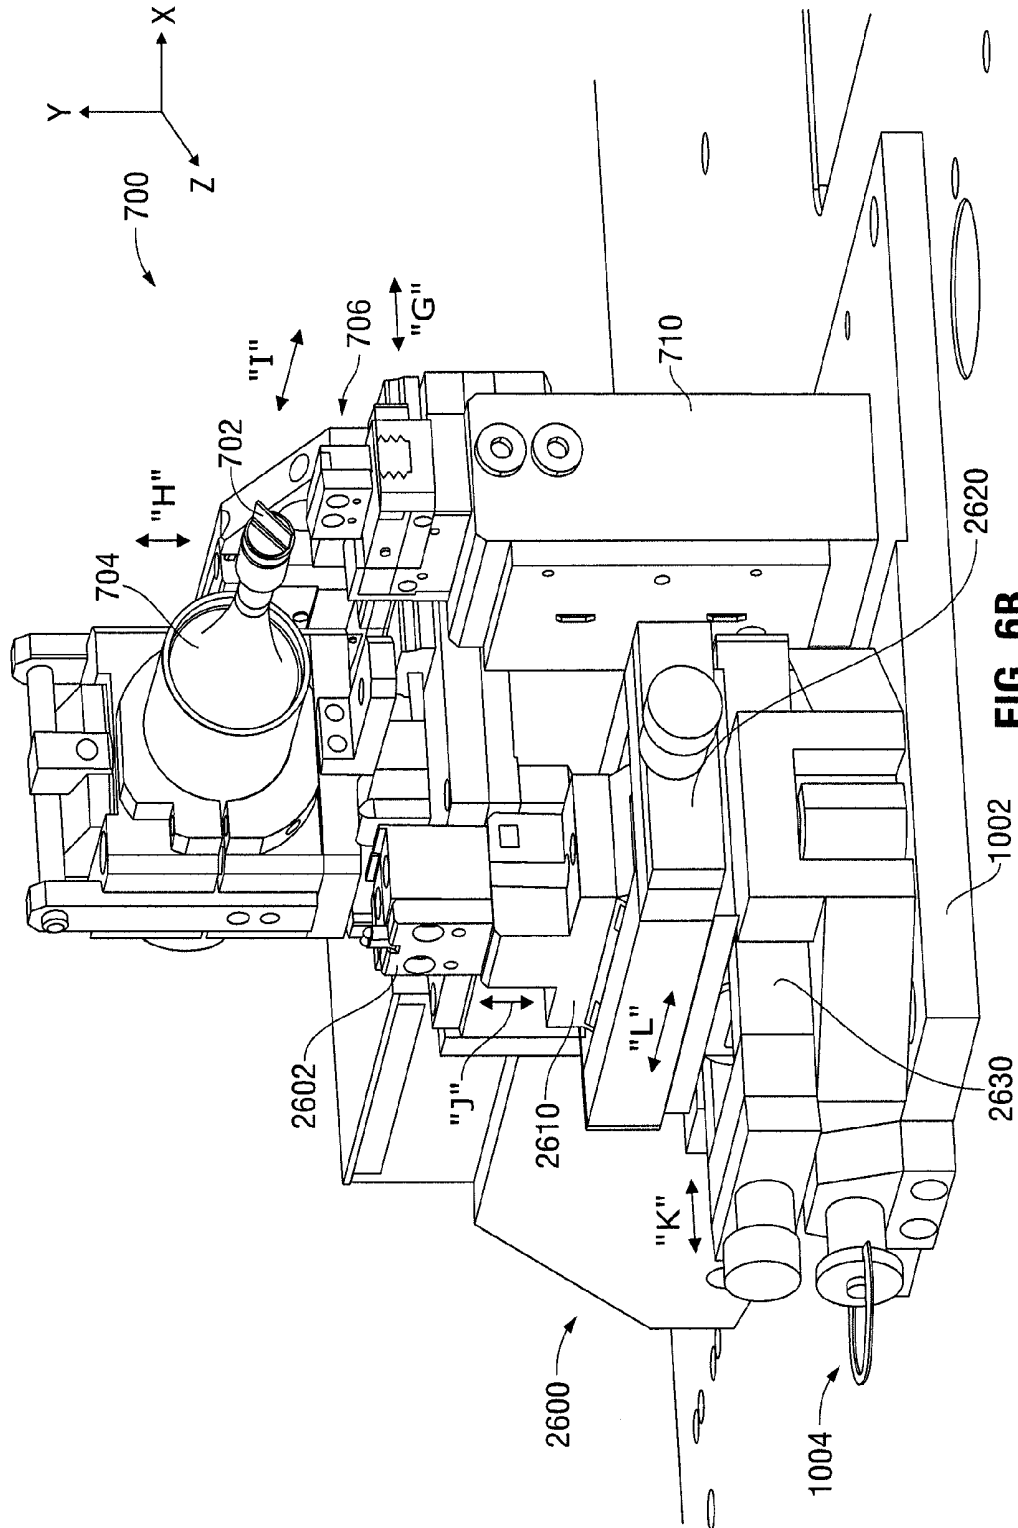


FIG. 6A



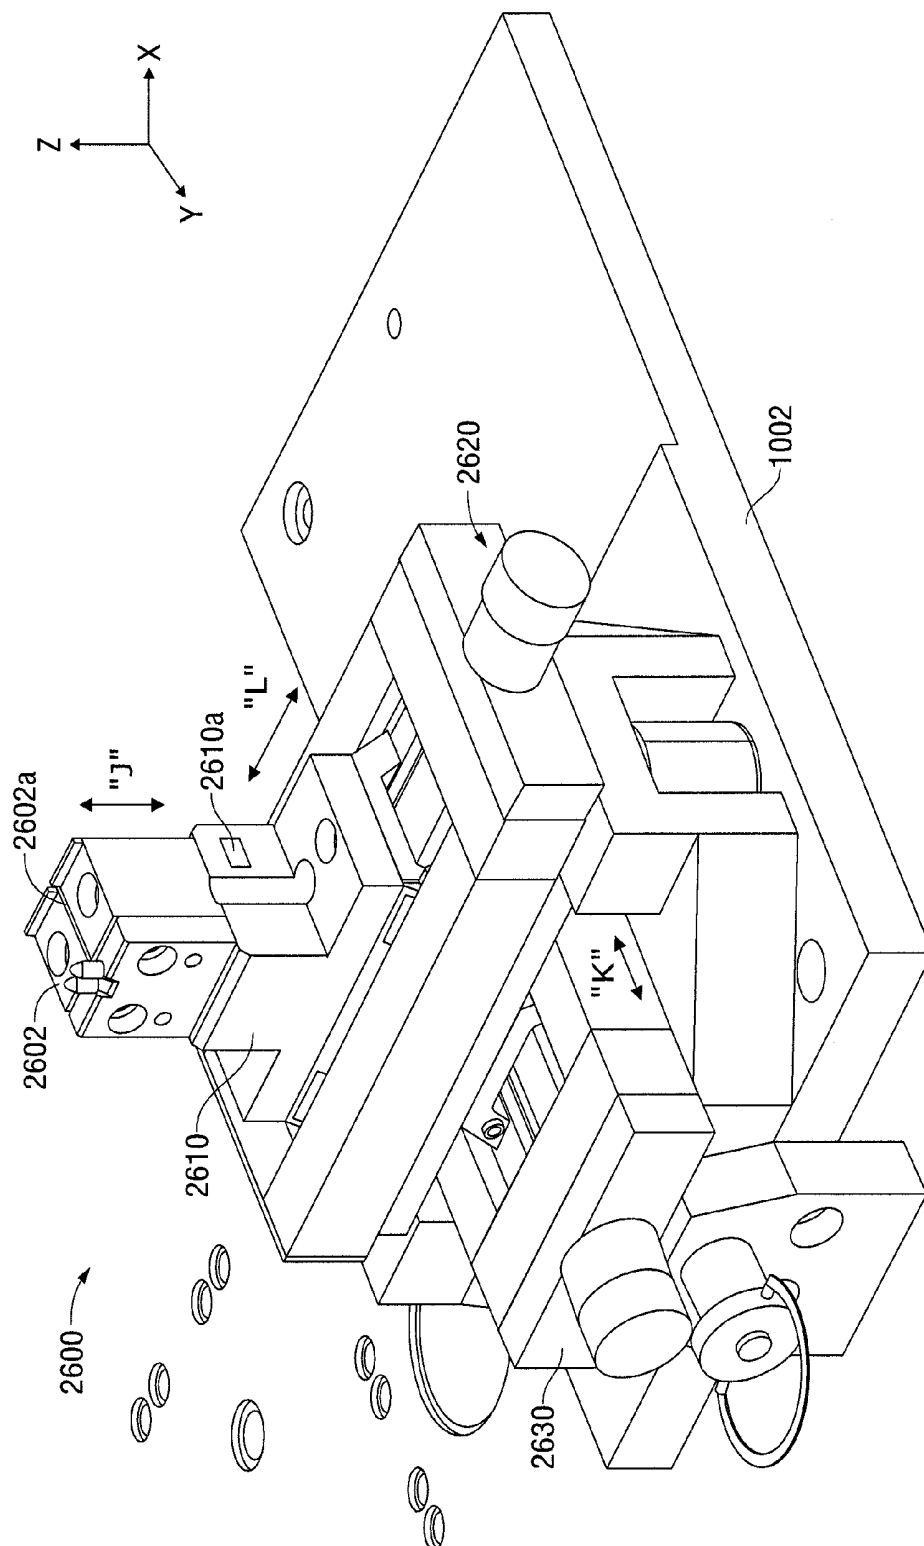


FIG. 6C

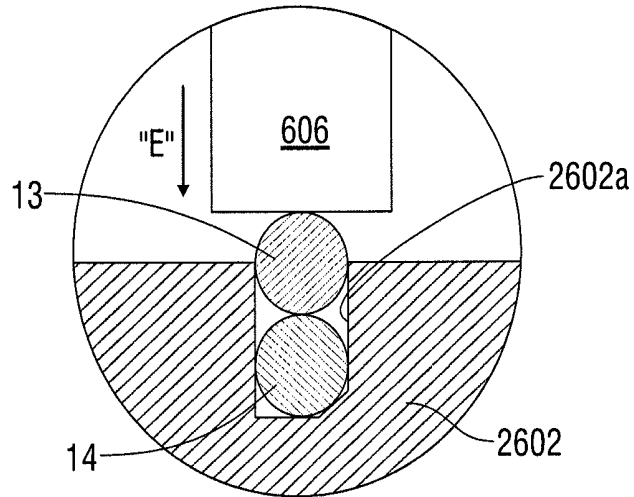


FIG. 7A

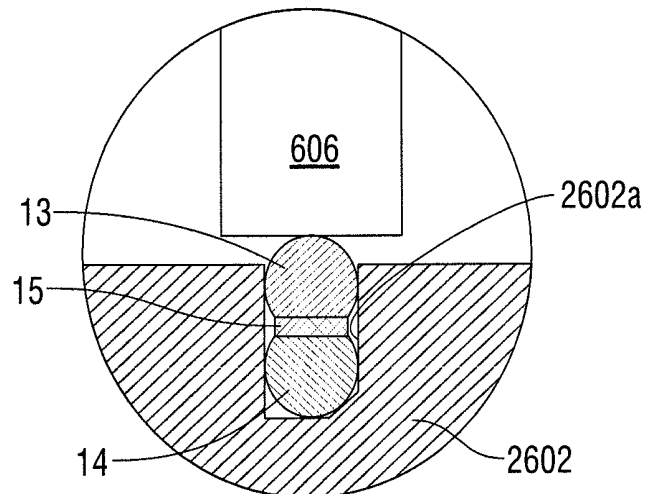


FIG. 7B

SYSTEM AND METHOD FOR MAKING TAPERED LOOPED SUTURE

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation-in-part of U.S. patent application Ser. No. 13/051,544, filed Mar. 18, 2011, now abandoned, which is a continuation-in-part of U.S. patent application Ser. No. 12/751,456, filed Mar. 31, 2010, U.S. Pat. No. 8,590,599 which claims benefit of and priority to U.S. Provisional Application Ser. No. 61/173,719, filed Apr. 29, 2009, the disclosures of which are incorporated by reference herein in their entirety.

BACKGROUND

1. Technical Field

The present disclosure relates to a system of forming a looped suture. More particularly, the present disclosure relates to an automated system of forming a looped suture having a tapered cut.

2. Background of Related Art

The forming of a loop in a suture is known, as are methods of forming the loop. A loop may be formed in a suture for a number of reasons. For example, during manufacture a loop may be formed in the suture to assist in further processing of the suture, e.g., for holding the suture as barbs are formed along the length thereof. Alternatively, a loop formed in a suture during manufacture may be used to secure the suture to tissue. In this manner, once the non-looped end of the suture is inserted through tissue, that end may be threaded through the loop to form a slip knot-like configuration that may be tied to secure tissue. In another application, a loop may be formed in a suture in place of a knot. This requires the use of a handheld instrument that may be brought into an operating room.

Therefore, it would be beneficial to have a system and method of forming a looped suture to include a taper cut.

SUMMARY

Accordingly, an active anvil assembly for use in forming a looped suture is disclosed. The active anvil assembly includes an anvil member, a first sensor operably connected to the anvil member, and a control assembly. The first sensor is configured for providing force feedback. The anvil member may be configured to operate with an ultrasonic welding horn to join a first length of a thread and a second length of the thread to form a loop in the thread. In particular, the loop may be formed at the distal end of the thread. In one embodiment, the anvil member includes a channel configured to selectively receive at least a portion of a first length of a thread.

The control assembly includes a motor which may be configured to move a mounting member in relation to the ultrasonic welding horn. The control assembly may be configured to vertically move the anvil member. In certain embodiments, the mounting member is configured to move the anvil member. The anvil member may be selectively movable in at least first and second directions relative to the ultrasonic welding horn. Further, the control assembly may be configured to move the mounting member in relation to a mounting base. The anvil member may be configured for approximation towards and away from the ultrasonic welding horn. The active anvil assembly may further include a first adjustable stage configured to translate laterally relative to the ultrasonic

welding horn and/or a second adjustable stage configured to translate forwards and backwards relative to the ultrasonic welding horn.

Also disclosed is system for forming a looped suture. The system includes an active anvil assembly configured for retaining the suture during welding of the loop and a trimming assembly for removing excess thread from the loop in the thread. The active anvil assembly includes an anvil member operably connected to a first sensor and a control assembly configured for movement of the anvil member. The system may further include one or more of a flipper gripping assembly configured for creating a loop in the thread, a carriage assembly configured for advancing the thread through the loop forming process, a cutter assembly for severing the thread upon completion of the loop forming process, a thread lengthening assembly configured for extending the length of the thread, and a monitoring assembly configured for monitoring the forming process.

Additionally, a method of forming a looped suture is disclosed. The method includes the step of providing a system including a welding assembly and a trimming assembly, wherein the welding assembly includes an ultrasonic welding horn and an active anvil assembly. The method further includes the steps of receiving a first length of thread adjacent a second length of thread between the ultrasonic welding horn and the active anvil assembly, approximating at least one of an anvil member of the active anvil assembly and the ultrasonic welding horn towards the other, activating the ultrasonic welding horn, joining the adjacent first and second lengths of thread, and approximating at least one of the anvil member and the ultrasonic welding horn away from the other of the ultrasonic welding horn and anvil member.

In one of the disclosed methods, at least one of the anvil member and the ultrasonic welding horn is approximated towards the other of the ultrasonic welding horn and anvil member until a predefined torque value is sensed by a sensor disposed in the active anvil assembly. In a second embodiment, at least one of the anvil member and the ultrasonic welding horn is approximated towards the other of the ultrasonic welding horn and anvil member until a predefined force value is sensed by a sensor disposed in the active anvil assembly. In a third embodiment, at least one of the anvil member and the ultrasonic welding horn is approximated towards the other of the ultrasonic welding horn and anvil member as a predefined distance is sensed. In a fourth embodiment, the anvil member and the ultrasonic welding horn is approximated towards the other of the ultrasonic welding horn and anvil member as a predefined force value is sensed.

The method of forming a looped suture may further include the steps of operably engaging the joined first and second lengths of thread with a gripping anvil of the trimming assembly, approximating at least one of the gripping anvil and an ultrasonic cutter towards the other of the ultrasonic cutter and the gripping anvil, removing excess thread from the joined first and second lengths of thread, and approximating the gripping anvil away from the ultrasonic cutter.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the disclosure and, together with a general description of the disclosure given above, and the detailed description of the embodiment(s) given below, serve to explain the principles of the disclosure, wherein:

FIG. 1A is a side view of a looped suture including a tapered portion;

3

FIG. 1B is a cross-sectional end view of the looped suture of FIG. 1B, taken along line 1B-1B;

FIG. 1C is an enlarged side view of FIG. 1A;

FIG. 2 is a side view of a tapered loop forming system of the present disclosure;

FIG. 3 is an enlarged side view of a suture supply assembly of the tapered loop forming system of FIG. 2;

FIG. 4 is an enlarged sectional side view of the tapered loop forming system of FIG. 2;

FIG. 5 is an enlarged side view of carriage assembly of the tapered loop forming system of FIG. 2;

FIG. 6A is an enlarged side view of embodiments of portions of the welding assembly and the trimming assembly of FIG. 2;

FIG. 6B is a perspective view of portions of the active anvil assembly and trimming assembly of FIG. 4;

FIG. 6C is a perspective view of portions of the active anvil assembly of FIGS. 6A and 6B;

FIG. 7A is an enlarged cross-sectional side view of welding assembly of the loop forming system of FIG. 2, in a partially activated position; and

FIG. 7B is an enlarged cross-sectional side view of the welding assembly of FIG. 7A, in a fully activated position.

DETAILED DESCRIPTION

A system and method for forming a looped suture including a tapered cut is described herein. Referring initially to FIG. 1A, a looped suture formed in accordance with the method of the present disclosure is shown generally as looped suture 10. Suture 10 is formed from a monofilament thread 11, however, it is envisioned that suture 10 may include braided threads, multifilament threads and other surgical fibers. Although shown having a circular cross-sectional geometry, the cross-sectional geometry of thread 11 may be of any suitable shape. For example, thread 11 may be round, elliptical, square, flat, triangular, octagonal, and rectangular. Thread 11 may be formed of degradable materials, non-degradable materials, and combinations thereof. Thread 11 may be formed using any technique within the purview of those skilled in the art, such as, for example, extrusion, molding and/or solvent casting.

With reference to FIGS. 1A-1C, looped suture 10 includes a loop 12 formed on a distal end 10b of the suture 10. Loop 12 forms a substantially teardrop shape and may be formed of any size. Although a substantially teardrop-shaped loop 12 is illustrated, other variations, such as circular, oval and spherical-shaped loops are envisioned. A first section 13 of monofilament thread 11 overlays a second section 14 of thread 11 to form loop 12. The adjacent surfaces of first and second sections 13, 14 form a joined segment or joint 15. As shown, joined segment 15 extends beyond first section 13 of thread 11. In this manner, first and second sections 13, 14 of thread 11 are less likely to separate or peel away from each other as looped suture 10 is pulled through tissue (not shown).

As will be described in further detail below, first and second sections 13, 14 of thread 11 are welded together to form joined section 15. In this manner, first and second sections 13, 14 of thread 11 are locally heated until each fuses to form joined segment 15. Various types of energy may be used to locally heat first and second sections 13, 14 to form joined segment 15, including, radiofrequency (RF), ultrasonic, laser, electrical arc discharge, and thermal. Alternatively, first and second sections 13, 14 of thread 11 may be joined using glue, epoxy or other adhesive.

With particular reference to FIG. 1C, a proximal end 13a of first section 13 is angled to form a tapered surface 17. Tapered

4

surface 17 angles downwardly towards proximal end 10a (FIG. 1A) of looped suture 10. Tapered surface 17 may form an angle between zero degrees (0°) and ninety degrees (90°), and preferably between about fifteen degrees (15°) to about sixty degrees (60°). Tapered surface 17 facilitates insertion of loop 12 into or through tissue. Tapered surface 17 may be formed prior to, during or following the joining of first and second sections 13, 14.

Although shown having a substantially planar taper, tapered surface 17 may include any number of configurations. For example, tapered surface 17 may be beveled, may include a laterally and longitudinally concave taper, may include a laterally and longitudinally convex taper, or may include any combination thereof. Tapered surface 17 may be selected depending on the tissue being sutured and/or the depth loop 12 is desired to be received within the tissue.

A system for forming loop 12 on distal end 10b of looped suture 10 will now be described with reference to FIGS. 2-7B, and is shown generally as tapered loop forming system 100. Although shown as being automated, it is envisioned that various components and/or process within tapered loop forming system 100 may manually completed. Referring initially to FIG. 2, system 100 includes a suture supply assembly 200, an initial gripping assembly 300, a flipper gripping assembly 400, a carriage assembly 500, a welding assembly 600, a trimming assembly 700, a cutter assembly 800, and may optionally include a thread lengthening assembly 900 and a monitoring assembly 2000.

With reference now to FIG. 3, supply assembly 200 is configured to provide thread 11 to initial gripping assembly 300. Supply assembly 200 includes a spool 202, a first guide member 203, a roller assembly 204, first and second rollers 205, 206 and a second guide member 207. First guide member 203 is configured to direct thread 11 from spool 202 to roller assembly 204. Roller assembly 204 includes a set of fixed rollers 204a and a set of adjustable rollers 204b. Roller assembly 204 is configured to receive thread 11 about fixed and adjustable rollers 204a, 204b a plurality of times. As shown, rollers 204a, 204b are configured to receive thread 11 thereabout four (4) times, however, roller assembly 204 may be configured to receive thread 11 thereabout more or less than four times. First and second rollers 205, 206 are positioned to direct thread 11 through second guide member 207. Although shown including supply assembly 200 for providing a continuous supply of thread 11 from spool 202, alternative supply assemblies are known and may be modified for use with system 100. For example, thread 11 may be provided in fixed or predetermined lengths rather than continuously from a spool. In this manner, the aspects of the present disclosure should not be read as limited to the supply assembly herein disclosed.

Turning now to FIG. 4, initial gripping assembly 300 includes an initial gripper 302 configured to selectively engage and selectively grasp thread 11 throughout the loop end forming process. Initial gripping assembly 300 translates on a diagonal, in the direction of arrows "A". During the looped end forming process, initial gripping assembly 300 is activated to grasp a proximal end of thread 11 when tension is applied to a distal end of thread 11 to prevent excess thread from being pulled from supply assembly 200. In this manner, initial gripping assembly 300 may include any device or apparatus capable of selectively grasping thread 11.

With reference still to FIG. 4, flipper gripping assembly 400 is configured to create loop 12 in thread 11. Gripping assembly 400 includes a rotating gripper 402 configured to selectively grasp a first end of thread 11. A mandrel 408 extends from rotating gripper 402 and includes a slot (not

shown) configured to receive a hook **508** from carriage assembly **500** (FIG. 5). Rotating gripper **402** is configured to rotate relative to mandrel **408**, in the direction of arrow “B”, to loop thread **11** around mandrel **408**. Flipper gripping assembly **400** is configured to move horizontally, in the direction of arrows “C”, and vertically, in the direction of arrows “D”.

With reference now to FIG. 5, carriage assembly **500** is configured to translate thread **11** through the loop forming process. Carriage assembly **500** includes a support member **502** having a tag end gripper **504** and a hook assembly **506**. A hook **508** extends from hook assembly **506** and is configured to receive thread **11** thereabout. Carriage assembly **500** optionally includes a tensioning cylinder (not shown) for tensioning thread **11** with a predetermined force to test the strength of weld **15** (FIG. 1B). Carriage assembly **500** is configured to move horizontally, in the direction of arrows “E”, and vertically, in the direction of arrows “F”.

With reference to FIGS. 4 and 6A-6C, welding assembly **600** is configured to weld joined segment **15** in thread **11** to form loop **12** (FIG. 1A). Welding assembly **600** includes an active anvil assembly **2600** configured for selective engagement with an ultrasonic welding horn **604**. In one embodiment, ultrasonic welding horn **604** may be manufactured by Branson Ultrasonics Corporation (Danbury, Conn.). The term ultrasonic as used herein includes high frequency vibrations which are applied to workpieces being held together to create a solid state weld. Further, it should be understood that the term “welding horn” as used herein includes any component which transmits the mechanical vibrations (of a converted electrical signal) to the parts to be welded, e.g., a thread or suture. Active anvil assembly **2600** includes an anvil member **2602**, a first sensor **2610a** and a control assembly **1020**.

With reference to FIGS. 7A and 7B, ultrasonic welding horn **604** includes a flat die **606** configured to engage first section **13** of thread **11** during the welding step. As shown, anvil member **2602** defines a channel **2602a** configured to receive the entire width of second section **14** and more than half the width of first section **13** of thread **11**. In an alternative embodiment, flat die **606** may include a channel or recess (not shown) for receiving at least a portion of first section **13** of thread **11** instead of or in addition to the channel **2602a** in the anvil member **2602**.

Turning to FIGS. 6A-6C, the active anvil assembly **2600** will be described in greater detail. As described hereinabove, the active anvil assembly **2600** includes an anvil member **2602** and a first sensor **2610a** which is operably connected to the anvil member **2602**. The first sensor **2610a** is incorporated within the anvil base **2610** and the first sensor **2610a** interacts with and provides feedback to a control assembly **1020** (later described), effecting movement of the active anvil assembly **2600** during the loop forming process. First sensor **2610a** is operably connected to the anvil member **2602** and may be configured to measure force, torque, distance and/or other conditions within active anvil assembly **2600**. In particular, first sensor **2610a** is configured to provide force feedback to active anvil assembly **2600**. First sensor **2610a** is disposed above first and second adjustable stages, **2620** and **2630**, respectively. Either or both of anvil member **2602** and adjustable stages **2620**, **2630**, may be configured for movement in one or more directions prior to, during, or following the respective joining and trimming processes.

With particular reference to FIG. 6B, anvil base **2610** operably engages first adjustable stage **2620** and is configured to be selectively positioned relative thereto, as indicated by arrows “L.” As shown in the drawings, first adjustable stage **2620** is configured to move the anvil base **2610** in a forward/

backward or front/back direction. First adjustable stage **2620** operably engages second adjustable stage **2630** and is configured to be selectively positioned relative thereto, as indicated by arrows “K.” As shown in drawings, second adjustable stage **2630** is configured to move anvil base **2610** in a lateral or side to side direction. Second adjustable stage **2630** operably engages a mounting member **1010** of mounting assembly **1000**. It should be noted that although the adjustable stages **2620** and **2630** provided herein are described as part of the active anvil assembly **2600**, it is envisioned that the adjustable stages **2620** and **2630** may be provided as separate assemblies and/or may operate separately from anvil member **2602** and anvil base **2610**.

With particular reference to FIG. 6A, the active anvil assembly **2600** further includes a mounting assembly **1000**. Mounting assembly **1000** includes a mounting base **1002**, mounting member **1010**, and control assembly **1020**. The mounting member **1010** is configured to further move the anvil member **2602**. In particular, mounting member **1010** is operably engaged with mounting base **1002** and is configured to be raised and lowered relative to mounting base **1002**, as indicated by arrows “J” to raise and lower anvil member **2602** relative to ultrasonic welding horn **604**. As shown, mounting member **1010** is moved relative to mounting base **1002** by a control assembly **1020**. A locking pin **1004** is configured for selective engagement with mounting member **1010**. In particular, the locking pin **1004** is configured to prevent movement of mounting member **1010** relative to mounting base **1002**.

Control assembly **1020** includes a motor **1024** that is configured to cause the raising and lowering, in other words, the vertical movement of mounting member **1010** relative to base **1002** and relative to the ultrasonic welding horn **604**. Motor **1024** may include pneumatic or hydraulic cylinders, as shown, or any other mechanism suitable for selectively raising and/or lowering mounting member **1010** relative to base **1002**. In one embodiment, motor **1024** includes a commercially available Allen Bradley servo motor. Control assembly **1020** may further include a second sensor **1024a** for providing feedback, which may be used to position anvil member **2602** of active anvil assembly **2600** relative to ultrasonic welding horn **604** (FIG. 4). In particular, second sensor **1024a**, may be configured to measure force, torque, distance, and/or other conditions experienced by active anvil assembly **2600**. More specifically, second sensor **1024a** is configured to provide torque and/or distance feedback to active anvil assembly **2600**. Control assembly **1020** may also include one or more ports **1022** for selectively connecting control assembly **1020** with monitoring assembly **2000** (FIG. 2), a command station (not shown), a power source (not shown), and/or any other device or network (not shown).

With reference back to FIG. 6B, trimming assembly **700** is configured to cut tapered surface **17** of looped end portion **10**. Trimming assembly **700** includes a trimming blade **702**, which may be powered by an ultrasonic horn **704**. Trimming assembly **700** further includes a trim gripper **706** for gripping thread **11** as trimming blade **702** engages thread **11**. Trim gripper **706** is configured to move laterally or side to side, in the direction of arrows “G,” vertically or up and down, in the direction of arrows “H,” and front and back, in the direction of arrow “I.” Trim blade **702** is also configured to move laterally or side to side, vertically or up and down, and front and back, in the direction of arrows “G,” “H,” and “I.” The speed, path, and frequency at which ultrasonic horn **704** and/or trimming blade **702** move, may be adjusted to affect the configuration of tapered surface **17**. Further, trim blade **702** is configured to be advanced and retracted relative to trim gripper **706**. In one

embodiment, trimming blade **702** is configured to be rotated one-hundred and eighty degrees (180°) about its longitudinal axis such that both cutting surfaces thereof may be used. Although shown adapted for use as an ultrasonic cutter, trimming assembly **700** may be configured cut tapered surface **17** without the use of ultrasonic energy. In an alternate embodiment, a laser may be used to cut tapered surface **17**. Alternatively, trimming blade **702** may be heated to assist in the cutting of thread **11**.

With reference still to FIG. 6B, trimming assembly **700** further includes a trimming base **710** securely connected with base **1002** of mounting assembly **1000**. Base assembly **710** may be operably connected to control assembly **1022**, monitoring assembly **2000** (FIG. 2), a command station (not shown), a power source (not shown), and/or any other device or network (not shown).

With reference back to FIG. 4, cutter assembly **800** is configured to cut thread **11** upon completion of the looped end forming process. Cutter assembly **800** includes a cutting blade **802**. Cutter assembly **800** is configured to move parallel to initial gripper assembly **300**, in the direction of arrows "A". Cutter assembly **800** is configured to cut thread **11** once thread **11** has attained an appropriate length. Cutter assembly **800** may be configured to cut a straight or tapered end on a proximal end **10a** (FIG. 1A) of suture **10**.

With reference to FIGS. 2 and 4, lengthening assembly **900** is configured to increase the length of thread **11** prior to thread **11** being cut by cutter assembly **800**. As shown, lengthening assembly **900** includes a set of fixed rollers **902** and a set of adjustable rollers **904**. Although shown including three and two rollers, respectively, sets of fixed and adjustable rollers **902**, **904** may include any number of rollers. When thread **11** is received between fixed and adjustable rollers **902**, **904**, movement of adjustable rollers **904** relative to fixed rollers **902**, in the direction of arrows "I", causes thread **11** to lengthen. The greater the number of rollers **902**, **904**, the less relative movement between rollers **902**, **904** is necessary to lengthen thread **11**.

Monitoring assembly **2000** is configured to monitor the various steps of the looped end forming process. Monitoring assembly **2000** includes a screen **2002** and a control panel **2004**.

The operation of forming station **100** will now be described with reference to 2-6B. Thread **11** extends from spool **202** through first guide member **203** before being received about roller assembly **204**. Thread **11** is wrapped around fixed rollers **204a** and adjustable rollers **204b** of roller assembly **204** four times, and is then received about first and second rollers **205**, **206** before being received through second guide member **207**. The number of times thread **11** is wrapped around each rollers **204a**, **206** may vary depending on the size and/or composition of thread **11**.

With continued reference to FIGS. 2-6B, thread **11** extends through second guide member **207** where it is grasped by initial gripper **302** prior to being grasped by rotating gripper **402**. Initial grippers **302** then releases thread **11** and flipper gripping assembly **400** translates towards anvil member **2602** of active anvil assembly **2600** as carriage assembly **500** translates towards anvil member **2602** from the opposite direction. Flipper gripping assembly **400** and carriage assembly **500** are configured such that as carriage assembly **500** nears flipper gripping assembly **400**, hook **508** of hook assembly **506** is received in the slot (not shown) of mandrel **407**. Once hook **508** is received within the slot, rotating gripper **402** rotates, in the direction of arrow "B", to loop thread **11** about mandrel **407**. Flipper gripping assembly **400** and carriage assembly **500** then move to position first and second sections **13**, **14** of

thread **11** within channel **2602a** of anvil member **2602**. As carriage assembly **500** approximates away from flipper gripping assembly **400**, hook **508** extends from within the slot formed in mandrel **407** with thread **11** received thereabout.

In one embodiment, once first and second sections **13**, **14** of thread **11** are received with channel **2602a** of anvil member **2602**, ultrasonic horn **604** is activated and flat die **606** is approximated towards anvil member **2602**, in the direction of arrow "E". Engagement of flat welding die **606** with first section **13** of thread **11** causes first and second sections **13**, **14** to weld together to form joined segment **15** (FIG. 1B). Alternatively, ultrasonic horn **604** may be positioned relative to anvil member **2602** prior to activating ultrasonic horn **604**.

As discussed above with reference to FIGS. 6A and 6B, anvil member **2602** may instead, or additionally, be raised/lowered (arrows "J"), moved laterally (arrows "K") and/or moved front/back (arrows "L"), relative to ultrasonic horn **604** to position anvil member **2602** relative ultrasonic horn **604**. Ultrasonic horn **604** may be activated prior to, during or after positioning of anvil member **2602** relative to ultrasonic horn **604**. The positioning of anvil member **2602** may be accomplished using any number of methods. In each of the below disclosed methods, movement of anvil member **2602** is determined by the compressive force acting on first and second sections **13**, **14** of thread **11** and is not a function of the initial position of ultrasonic horn **604**. Additionally, in each of methods, ultrasonic horn **604** is not activated until anvil member **2602** is stationary.

In a first method, anvil member **2602** is moved relative to ultrasonic horn **604** until second sensor **1024a** in control assembly **1020** senses a predefined torque value, at which point, the movement of anvil member **2602** is stopped and ultrasonic horn **604** is activated. In a second method, movement of anvil member **2602** stops when a predefined torque value is achieved, and then anvil member **2602** is moved an additional user defined distance. In yet a third method, anvil member **2602** is moved until a force feedback provided by first sensor **2610a** of active assembly **2600** achieves a predefined set point, at which point, the movement of anvil member **2602** is stopped and ultrasonic horn **604** is activated. In a fourth method, movement of anvil member **2602** stops when a predefined force value, as measured by first sensor is achieved, and then anvil member **2602** is moved an additional user defined distance. The torque and/or force values and/or the additional user defined distance may vary depending on the size and type of thread being used and/or to effect different weld characteristics.

It is envisioned that ultrasonic horn **604** and anvil member **2602** may be moved simultaneously and/or individually to cause the forming of joined segment **15** and/or to effect the characteristics of joined segment **15** (FIG. 1A). Subsequent joining of first and second sections **13**, **14** of thread **11**, either or both of anvil member **2602** and ultrasonic horn **604** are approximated away from one another.

Once anvil member **2602** and ultrasonic horn **604** have been repositioned such that anvil member **2602** is spaced from ultrasonic horn **604**, tail end gripper **504** of carriage assembly **500** grips a tail end (distal end) of thread **11** and rotating gripper **402** releases thread **11**. Carriage assembly **500** then moves to position welded first and second section **13**, **14** of thread **11** within gripping anvil **706** of trimming assembly **700**. Gripping anvil **706** maintains thread **11** as trimming blade **704** of ultrasonic horn **702** is moved to cut tapered surface **17** (FIG. 1A) into first section **13** of thread **11**. Alternatively, and discussed above with reference to FIGS. 6A and 6B, during forming of cut tapered surface **17**, gripping anvil **706** may be raised/lowered (arrows "H"), moved later-

ally (arrows "G"), and/or moved front/back (arrows "I"), relative to trimming blade 702, to affect the characteristics of cut tapered surface 17 (FIG. 1A). Gripping anvil 706 then releases thread 11 and carriage assembly 500 continues to translate away from supply assembly 200 to extend the length of thread 11. It is envisioned that ultrasonic horn 702 and gripping anvil 706 may be moved simultaneously and/or individually to form cut tapered surface 17. Cutting assembly 900 is then activated to cut thread 11. Prior to the cutting of thread 11, tension is applied to loop 12 (FIG. 1A) of thread 11 by the tensioning cylinder (not shown) located within carriage assembly 500 to test the strength of weld 15. Optionally, thread 11 may engage lengthening assembly 800 to extend the length of thread 11 prior to cutting.

Although the illustrative embodiments of the present disclosure have been described herein with reference to the accompanying drawings, it is to be understood that the disclosure is not limited to those precise embodiments, and that various other changes and modifications may be effected therein by one skilled in the art without departing from the scope or spirit of the disclosure. For example, it is envisioned that system 100 may include more than one welding assembly 600 and/or trimming assembly 700 to produce more than one suture 10 per activation.

What is claimed is:

1. An active anvil assembly for use in forming a looped suture, the active anvil assembly comprising:

- an anvil member for supporting a length of thread;
- a first sensor operably connected to the anvil member;
- a first adjustable stage supporting the anvil member and selectively translatable in a first direction and in a second direction for positioning the anvil member;
- a second adjustable stage supporting the first adjustable stage and selectively translatable in a third direction and in a fourth direction for positioning the anvil member;
- a mounting member for selectively raising and lowering the anvil member; and
- a control assembly for actuating the mounting member to raise and lower the anvil member in response to feedback provided by the first sensor.

2. The active anvil assembly of claim 1, wherein the first sensor is configured to measure at least one of force, torque or distance.

3. The active anvil assembly of claim 1, wherein the anvil member is configured to operate with an ultrasonic welding horn to join a first length of the thread and a second length of the thread to form a loop in the thread.

4. The active anvil assembly of claim 3, wherein the loop is formed at a distal end of the thread.

5. The active anvil assembly of claim 3, wherein the control assembly includes a motor configured to move the mounting member in relation to the ultrasonic welding horn.

6. The active anvil assembly of claim 1, further including a mounting base, wherein the control assembly is configured to raise and lower the mounting member in relation to the mounting base.

7. The active anvil assembly of claim 3, wherein the first adjustable stage is configured to translate the anvil member forwards and backwards relative to the ultrasonic horn.

8. The active anvil assembly of claim 7, wherein the second adjustable stage is configured to translate the anvil member laterally relative to the ultrasonic horn.

9. The anvil assembly of claim 1, wherein the anvil member includes a channel configured to selectively receive at least a portion of the first length of thread.

10. A system for forming a looped suture, the system comprising:

a welding assembly for welding a first length of a thread to a second length of the thread to form a loop in the thread, the welding assembly including:

- an ultrasonic welding horn; and
- an active anvil assembly configured for retaining and positioning the first and second lengths of the thread during the welding of the loop in the thread, the active anvil assembly comprising an anvil member operably connected to a first sensor and a control assembly configured to move the anvil member relative to the ultrasonic welding horn; and,

a trimming assembly for selectively retaining the thread as excess thread is removed from the loop in the thread.

11. The system of claim 10, further comprising:

- a flipper gripping assembly for creating the loop in the thread;
- a carriage assembly for advancing the thread relative to the welding and trimming assemblies;
- a cutter assembly for severing the thread;
- a thread lengthening assembly for extending the length of the thread; and
- a monitoring assembly for monitoring the thread as the loop is formed and excess thread is cut from the loop.

12. The active anvil assembly of claim 1, wherein the anvil member defines a channel for receiving at least the length of the thread.

13. The system of claim 10, wherein the active anvil assembly includes a first adjustable stage supporting the anvil member and selectively translatable in a first direction and in a second direction for positioning the anvil member.

14. The system of claim 13, wherein the active anvil assembly include a second adjustable stage supporting the first adjustable stage and selectively translatable in a third direction and in a fourth direction for positioning the anvil member.

15. The system of claim 14, wherein the active anvil assembly includes a mounting member for selectively raising and lowering the anvil member.

16. The system of claim 15, wherein the active anvil assembly includes a control assembly for actuating the mounting member to raise and lower the anvil member in response to feedback provided by the first sensor.

专利名称(译)	用于制造锥形环状缝合线的系统和方法		
公开(公告)号	US9038688	公开(公告)日	2015-05-26
申请号	US13/480614	申请日	2012-05-25
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	泰科医疗集团LP		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	MAIORINO NICHOLAS KOSA TIMOTHY BUCHTER MARK KROEBER KEITH HART RICHARD CASEY SUSZYNSKI GARY		
发明人	MAIORINO, NICHOLAS KOSA, TIMOTHY BUCHTER, MARK KROEBER, KEITH HART, RICHARD CASEY SUSZYNSKI, GARY		
IPC分类号	B32B37/00 A61B17/00 A61B17/06 A61B17/32		
CPC分类号	A61B17/06166 A61B17/320068 A61B2017/00526 A61B2017/0619 B29C65/08 B29C66/1122 B29C66/69 B29C66/81431 B29C66/8242 B29C66/8322 B29C66/9221 B29C66/92211 B29C66/9261 B29C66/961 B29L2031/753 Y10T156/1313 Y10T156/1378		
审查员(译)	销, JAMES		
优先权	61/173719 2009-04-29 US		
其他公开文献	US20120267035A1		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于形成环状缝合线的活动砧座组件。主动砧座组件包括砧座构件，可操作地连接到砧座构件的第一传感器，以及控制组件。第一传感器配置用于测量力，扭矩和距离反馈中的至少一个。还提供了用于形成包括活动砧座组件的环状缝合线的系统和方法。

