



(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 153(4) EPC

(43) Date of publication:  
**08.07.2020 Bulletin 2020/28**

(51) Int Cl.:  
**A61B 17/32 (2006.01)**

(21) Application number: **18861547.0**

(86) International application number:  
**PCT/CN2018/100140**

(22) Date of filing: **12.08.2018**

(87) International publication number:  
**WO 2019/062348 (04.04.2019 Gazette 2019/14)**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**KH MA MD TN**

(72) Inventors:  
• **CAO, Qun**  
**Beijing 100083 (CN)**  
• **HU, Xiaoming**  
**Beijing 100083 (CN)**  
• **LI, Chunyuan**  
**Beijing 100083 (CN)**

(30) Priority: **29.09.2017 CN 201710908425**

(74) Representative: **Nevett, Duncan**  
**Reddie & Grose LLP**  
**The White Chapel Building**  
**10 Whitechapel High Street**  
**London E1 8QS (GB)**

(71) Applicant: **Beijing SMTP Technology Co., Ltd.**  
**Beijing 100083 (CN)**

(54) **ULTRASONIC BONE SCALPEL BIT**

(57) An ultrasonic osteotome bit, comprising a bit body (1), a bit bar (2) and a bit tip (3). One end of the bit bar (2) is connected to the bit tip (3), and the other end of the bit bar (2) is connected to the bit body (1). The bit tip (3) is of a cylindrical or substantially cylindrical structure with the cross section of a polygonal structure, and the bit tip (2) has at least two cutting faces of different cutting widths. The bit is provided with a liquid flow hole

(41), and the bit tip (3) is provided with a knurled structure that extends from a foremost end face of the bit tip (3) towards the bit bar (2) to form a file-type bit. The ultrasonic osteotome bit not only meets the requirement of a surgeon for the accuracy of bone cutting width, but also saves the time required to replace bits of different widths, thereby improving the surgical efficiency.

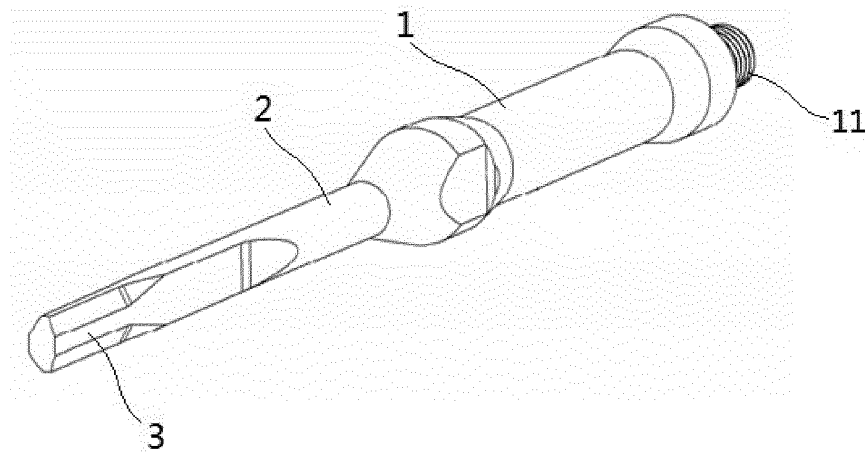


Fig. 1

## Description

### Technical Field

**[0001]** The present disclosure belongs to the field of surgical instruments, and in particular to an ultrasonic osteotome bit.

### Background Art

**[0002]** In an orthopedic ultrasound operation, a surgeon uses an ultrasonic osteotome to perform cutting, grinding or shaping on bones or other biological tissue and bionic tissues thereof (such as cartilages and bone cement).

**[0003]** In the existing ultrasonic osteotome, a tip portion, i.e., a bit tip, only has a single cutting width, such that when the surgeon needs to perform accurate large-width cutting, it can only be done by means of multiple reciprocating cutting or by replacing ultrasonic scalpel bits of different widths. It is difficult for the surgeon to accurately achieve the width of an incision due to reciprocating cutting, and the replacement of the ultrasonic scalpel bits with different widths takes a relatively long time, thus affecting the continuity of surgical operation by the surgeon and extending the time of operation to a certain extent.

### Summary

**[0004]** According to the present disclosure, an ultrasonic osteotome bit is designed, which solves the problem in the prior art of unsatisfactory effects in use due to the tip portion, i.e., the bit tip, of the ultrasonic osteotome only having a single cutting width.

**[0005]** In order to solve the above technical problem, the present disclosure provides an ultrasonic osteotome bit, comprising a bit bar, a bit body and a bit tip. One end of the bit bar is connected to the bit tip, and the other end of the bit bar is connected to the bit body. The bit tip is of a cylindrical or substantially cylindrical structure with a cross section of a polygonal structure, and the bit tip has at least two cutting faces with different cutting widths.

**[0006]** In the ultrasonic osteotome bit of the present disclosure, preferably, the polygonal structure is of a centrosymmetric structure, with all internal angles formed by adjacent sides of the polygonal structure being an obtuse angle.

**[0007]** In the ultrasonic osteotome bit of the present disclosure, preferably, the shortest distance among the distances between respective opposite sides of the polygonal structure is not equal to the longest distance among the distances between respective opposite sides of the polygonal structure, and the two opposite sides having the shortest distance are perpendicular to the two opposite sides having the longest distance, so that the bit tip has at least two accurate and easy-to-operate cutting widths.

**[0008]** In the ultrasonic osteotome bit of the present disclosure, preferably, the bit is provided with a liquid flow hole.

**[0009]** In the ultrasonic osteotome bit of the present disclosure, preferably, the liquid flow hole comprises a longitudinal central hole of the bit body and a drainage hole penetrating the tail end of the longitudinal central hole of the bit body, and the tail end of the longitudinal central hole of the bit body is located at a connecting end, connected to the bit bar, of the bit body.

**[0010]** In the ultrasonic osteotome bit of the present disclosure, preferably, the drainage hole vertically penetrates a tail end of the longitudinal central hole of the bit body.

**[0011]** In the ultrasonic osteotome bit of the present disclosure, preferably, the liquid flow hole comprises a longitudinal central through hole that penetrates the bit body and the bit bar and extends to the bit tip.

**[0012]** In the ultrasonic osteotome bit of the present disclosure, preferably, the bit tip is provided with a knurled structure that extends from a foremost end face of the bit tip towards the bit bar to form a file-type bit.

**[0013]** In the ultrasonic osteotome bit of the present disclosure, preferably, in the bit tip, the length of the knurled structure, on the cutting face with the minimum cutting width, extending towards the bit bar is greater than the length of the knurled structure, on the cutting face with the maximum cutting width, extending towards the bit bar.

**[0014]** In the ultrasonic osteotome bit of the present disclosure, preferably, the foremost end face of the bit tip is of a convex structure or a concave structure.

**[0015]** In the ultrasonic osteotome bit of the present disclosure, preferably, the bit bar is in transitional connection with the bit body through a bevel, the bit bar is in smooth transition with the bit tip, and the tail end of the bit body is provided with a threaded structure to connect with an ultrasonic device.

**[0016]** The ultrasonic osteotome bit has the beneficial effects as follows.

(1) The present disclosure solves the problem in the prior art of unsatisfactory effects in use due to the tip portion of the ultrasonic osteotome only having a single cutting width. It is particularly suitable for achieving accurate cutting on bone tissues or other biological tissues (such as cartilages) and their bionic tissues (such as bone cement) by means of ultrasonic vibration.

(2) The present disclosure not only meets the requirement of a surgeon for the accuracy of bone cutting width, but also saves the time required to replace bits of different widths, thereby improving the surgical efficiency.

(3) The present disclosure has a simple structure and long service life, is convenient for adjusting the cutting width of the bit, is easy to operate, and has wide adjustable range.

(4) In the present disclosure, a hollow liquid flow hole is machined inside the bit, the bit tip is machined into a file-type structure to reduce the contact area between the bit and the tissues during cutting and at the same time provide a flow path of a liquid flow to reduce the temperature of a cutting area. The hollow liquid flow hole inside the bit can also drain the debris of tissue cutting through the inner hole under negative pressure.

## Brief Description of the Drawings

### [0017]

Fig. 1 is a first operating state view of an ultrasonic osteotome bit according to a first embodiment of the present disclosure;

Fig. 2 is a second operating state view of the ultrasonic osteotome bit according to the first embodiment of the present disclosure;

Fig. 3 is a cross-sectional view of a bit tip of the ultrasonic osteotome bit according to the first embodiment of the present disclosure;

Fig. 4 is a first operating state view of an ultrasonic osteotome bit according to a second embodiment of the present disclosure;

Fig. 5 is a second operating state view of the ultrasonic osteotome bit according to the second embodiment of the present disclosure;

Fig. 6 is a schematic structural view of an ultrasonic osteotome bit according to a third embodiment of the present disclosure; and

Fig. 7 is a schematic structural view of an ultrasonic osteotome bit according to a fourth embodiment of the present disclosure.

Reference numerals:

[0018] 1 - bit body; 11 - connecting thread; 2 - bit bar; 3 - bit tip; 31 - foremost end face; 4 - liquid flow hole; 41 - drainage hole.

## Detailed Description of the Embodiments

[0019] The technical solution of the present disclosure will be clearly and completely described below in conjunction with the accompanying drawings, and obviously, the described embodiments are part of, not all of, the embodiments of the present disclosure. All other embodiments obtained by those of ordinary skill in the art based on the embodiments of the present disclosure without any creative effort shall fall within the scope of protection of the present disclosure.

[0020] In the description of the present disclosure, it should be noted that the orientation or positional relationship indicated by the terms "center", "upper", "lower", "left", "right", "vertical", "horizontal", "inner", "outer", etc. are based on the orientation or positional relationship

shown in the accompanying drawings and are intended to facilitate the description of the present disclosure and simplify the description only, rather than indicating or implying that the device or element referred to must have a particular orientation or be constructed and operated in a particular orientation, and will not to be interpreted as limiting the present disclosure. In addition, the terms "first", "second" and "third" are used for descriptive purposes only and should not be construed as indicating or implying relative importance.

[0021] In the description of the present disclosure, it should be noted that the terms "mounting", "connecting" and "connection" should be understood in a broad sense, and unless otherwise explicitly specified or defined, for example, it may be a fixed connection, a detachable connection or an integrated connection; may be a mechanical connection or an electrical connection; and may be a direct connection or an indirect connection through an intermediate medium, or may be a communication between the interior of two elements. For those of ordinary skill in the art, the specific meanings of the terms mentioned above in the present disclosure should be construed according to specific circumstances.

[0022] The present disclosure will be further described in detail below by specific embodiments and with reference to the accompanying drawings. Figs. 1 to 3 show an ultrasonic osteotome bit according to a first embodiment of the present disclosure. Fig. 1 is a first operating state view of an ultrasonic osteotome bit according to this embodiment, and Fig. 2 is a second operating state view of the ultrasonic osteotome bit according to this embodiment. As shown in Figs. 1 and 2, the ultrasonic osteotome bit according to the first embodiment of the present disclosure comprises a bit body 1, a bit bar 2 and a bit tip 3, with one end of the bit bar 2 being connected to the bit tip 3, and the other end of the bit bar 2 being connected to the bit body 1. The bit tip 3 is of a cylindrical or substantially cylindrical structure with the cross section of a polygonal structure, and the bit tip 3 has at least two cutting faces with different cutting widths to be in contact with a biological tissue, such as a bone. During operation, the cutting faces of the bit tip 3 may be selected by rotating the operating angle of the bit, thereby obtaining at least two different cutting widths. In this embodiment, a cylindrical face, or a lateral face of an substantially cylindrical structure, of the bit tip 3 constitutes at least two cutting faces with different cutting widths.

[0023] Fig. 3 is a cross-sectional view of the bit tip of the ultrasonic osteotome bit according to this embodiment. As shown in Fig. 3, the bit tip 3 has the cross section of a polygonal structure. Preferably, the polygonal structure is a centrosymmetric structure, with all internal angles formed by adjacent sides of the polygonal structure being an obtuse angle. In this embodiment, the polygonal structure is of a convex octagonal structure. When the diameter of the bit is increased, more than two cutting widths can be achieved by increasing the number of cross-sectional sides.

**[0024]** As shown in Fig. 3, the shortest distance among the distances between respective opposite sides of the polygonal structure is not equal to the longest distance among the distances between respective opposite sides of the polygonal structure, and the two opposite sides having the shortest distance are perpendicular to the two opposite sides having the longest distance, so that the bit tip has at least two cutting widths, so that the bit can have at least two accurate cutting widths when axially rotating for cutting, and the two accurate cutting widths are easy to choose so as to facilitate operation.

**[0025]** Figs. 1 and 2 show two typical operating states of the ultrasonic osteotome bit according to the first embodiment of the present disclosure. The ultrasonic osteotome bit in Fig. 2 is rotated by 90 degrees, relative to the ultrasonic osteotome bit in Fig. 1, along the axis of the bit to perform cutting. Fig. 3 is a cross-sectional view of the bit tip 3 perpendicular to the axis. When the ultrasonic osteotome bit is in the operating state shown in Fig. 1, its effective cutting width is represented by a in Fig. 3, and the effective cutting width is the shortest distance among the distances between respective opposite sides of the polygonal structure; and when the ultrasonic osteotome bit is in the operating state shown in Fig. 2, its effective cutting width is represented by b in Fig. 3, and the effective cutting width is the longest distance among the distances between respective opposite sides of the polygonal structure. As shown in Fig. 3, the effective cutting width a is not equal to the effective cutting width b, and the opposite sides having the effective cutting width a is perpendicular to the opposite sides having the effective cutting width b, so that the bit has two accurate cutting widths when axially rotating for cutting, and the accurate control of tissue cutting width can be achieved as long as the bit rotates 90 degrees. Of course, the ultrasonic osteotome bit may have any operating angle, and the cutting width of a biological tissue may be any value between the two accurate cutting widths. When the diameter of the bit is increased, more than two accurate cutting widths can be achieved by increasing the number of cross-sectional sides.

**[0026]** As shown in Figs. 1 and 2, the tail end of the bit body 1 is provided with a threaded structure 11 to be connected to an ultrasonic device. In this embodiment, the tail end of the bit body 1 is connected to an ultrasonic amplitude transformer. The threaded structure 11 may be an external threaded structure or an internal threaded structure. In this embodiment, an external threaded structure is used. One end of the bit bar 2 is connected to the bit body 1, and the bit bar 2 is in transitional connection with the bit body 1 through a bevel. The other end of the bit bar 2 is connected to the bit tip 3, and the bit bar 2 is in transitional connection with the bit tip 3. The ultrasonic osteotome bit may be of an one-piece structure or a multi-piece assembly structure. In this embodiment, the ultrasonic osteotome bit uses an one-piece structure.

**[0027]** Figs. 4 and 5 show an ultrasonic osteotome bit according to a second embodiment of the present dis-

closure. Fig. 4 is a first operating state view of an ultrasonic osteotome bit according to a second embodiment of the present disclosure; Fig. 5 is a second operating state view of the ultrasonic osteotome bit according to the second embodiment of the present disclosure. As shown in Figs. 4 and 5, the ultrasonic osteotome bit according to the second embodiment of the present disclosure has a structure substantially the same as the ultrasonic osteotome bit according to the first embodiment of the present disclosure, except that a liquid flow hole 4 is provided in the ultrasonic osteotome bit according to the second embodiment of the present disclosure. The liquid flow hole 4 comprises a longitudinal central hole of the bit body 1 and a drainage hole 41 penetrating the tail end of the longitudinal central hole of the bit body 1. The longitudinal drainage hole 41 transversely extends in a direction perpendicular to the axis of the bit body. The tail end of the longitudinal central hole of the bit body 1 is at a connecting end, connected to the bit bar 2, of the bit body 1. A liquid flow may be introduced into the bit bar 2 through the liquid flow hole 4 and flow to the bit tip 3 under gravity so as to reduce the temperature of a cutting area. In this embodiment, the drainage hole 41 vertically penetrates the tail end of the longitudinal central hole of the bit body 1.

**[0028]** Fig. 6 is a schematic structural view of an ultrasonic osteotome bit according to a third embodiment of the present disclosure. As shown in Fig. 6, the ultrasonic osteotome bit according to the third embodiment of the present disclosure has a structure substantially the same as the ultrasonic osteotome bit according to the second embodiment of the present disclosure, except that the ultrasonic osteotome bit in the third embodiment of the present disclosure is provided, at the bit tip 3, with a knurled structure that extends from a foremost end face 31 of the bit tip 3 to the bit bar 2 to form a file-type bit. The knurled structure can reduce the contact area between the ultrasonic osteotome and bone tissues, which increase the ultrasonic power density of the tissue surface and is also beneficial to allow the knurled structure to provide a liquid flow path to drain liquid to a surface of the cut tissue for cooling. The foremost end face 31 of the bit tip 3 is machined into a convex structure.

**[0029]** As shown in Fig. 6, in the ultrasonic osteotome bit according to the third embodiment of the present disclosure, in the bit tip 3, the length of the knurled structure, on the cutting face with the minimum cutting width, extending towards the bit bar 2 is greater than the length of the knurled structure, on the cutting face with the maximum cutting width, extending towards the bit bar 2.

**[0030]** Fig. 7 is a schematic structural view of an ultrasonic osteotome bit according to a fourth embodiment of the present disclosure. As shown in Fig. 7, the ultrasonic osteotome bit according to the fourth embodiment of the present disclosure has a structure substantially the same as the ultrasonic osteotome bit according to the third embodiment of the present disclosure, except that in the ultrasonic osteotome bit in the fourth embodiment of the

present disclosure, the liquid flow hole 4 penetrates the bit body 1 and the bit bar 2 and extends to the longitudinal central through hole of the bit tip 3. With such a design, a cooling liquid can be drained to reduce the temperature of the cutting area, and the debris of tissue cutting can be drawn out of the liquid flow hole under negative pressure so as to ensure the clear view of the surgical field. The foremost end face 31 of the bit tip 3 is machined into a concave structure.

**[0031]** The ultrasonic osteotome bit of the present disclosure can perform accurate cutting in multiple widths, which not only meets the requirement of a surgeon for the accuracy of bone cutting width, but also saves the time required to replace bits of different widths, thereby improving the surgical efficiency. The present disclosure has a simple structure and long service life, is convenient for adjusting the cutting width of the bit, is easy to operate, and has wide adjustable range.

**[0032]** Finally, it should be noted that the above various embodiments are merely used for illustrating rather than limiting the technical solutions of the present disclosure. Although the present disclosure has been described in detail with reference to the above various embodiments, those of ordinary skill in the art should understand that the technical solutions specified in the above various embodiments can still be modified, or some or all of the technical features therein can be equivalently substituted; and such modifications or substitutions do not make the essence of the corresponding technical solutions depart from the scope of the technical solutions of the various embodiments of the present disclosure.

## Claims

1. An ultrasonic osteotome bit, comprising a bit bar, a bit body and a bit tip, with one end of the bit bar being connected to the bit tip, and the other end of the bit bar being connected to the bit body, wherein the bit tip is of a cylindrical or substantially cylindrical structure with a cross section of a polygonal structure, and the bit tip has at least two cutting faces with different cutting widths.
2. The ultrasonic osteotome bit according to claim 1, wherein the polygonal structure is of a centrosymmetric structure, with all internal angles formed by adjacent sides of the polygonal structure being an obtuse angle.
3. The ultrasonic osteotome bit according to claim 2, wherein the shortest distance among the distances between respective opposite sides of the polygonal structure is not equal to the longest distance among the distances between respective opposite sides of the polygonal structure, and the two opposite sides having the shortest distance are perpendicular to the two

opposite sides having the longest distance, so that the bit tip has at least two cutting widths.

4. The ultrasonic osteotome bit according to claim 1, 2 or 3, wherein the bit is provided with a liquid flow hole.
5. The ultrasonic osteotome bit according to claim 4, wherein the liquid flow hole comprises a longitudinal central hole of the bit body and a drainage hole penetrating the tail end of the longitudinal central hole of the bit body, and the tail end of the longitudinal central hole of the bit body is located at a connecting end, connected to the bit bar, of the bit body.
6. The ultrasonic osteotome bit according to claim 4, wherein the liquid flow hole comprises a longitudinal central through hole that penetrates the bit bar and the bit body and extends to the bit tip.
7. The ultrasonic osteotome bit according to claim 1, 2, 3, 5 or 6, wherein the bit tip is provided with a knurled structure that extends from a foremost end face of the bit tip towards the bit bar to form a file-type bit.
8. The ultrasonic osteotome bit according to claim 7, wherein in the bit tip, the length of the knurled structure, on the cutting face with the minimum cutting width, extending towards the bit bar is greater than the length of the knurled structure, on the cutting face with the maximum cutting width, extending towards the bit bar.
9. The ultrasonic osteotome bit according to claim 1, 2, 3, 5, 6 or 8, wherein the foremost end face of the bit tip is of a convex structure or a concave structure.
10. The ultrasonic osteotome bit according to claim 1, 2, 3, 5, 6 or 8, wherein the bit bar is in transitional connection with the bit body through a bevel, the bit bar is in smooth transition with the bit tip, and the tail end of the bit body is provided with a threaded structure to connect with an ultrasonic device.

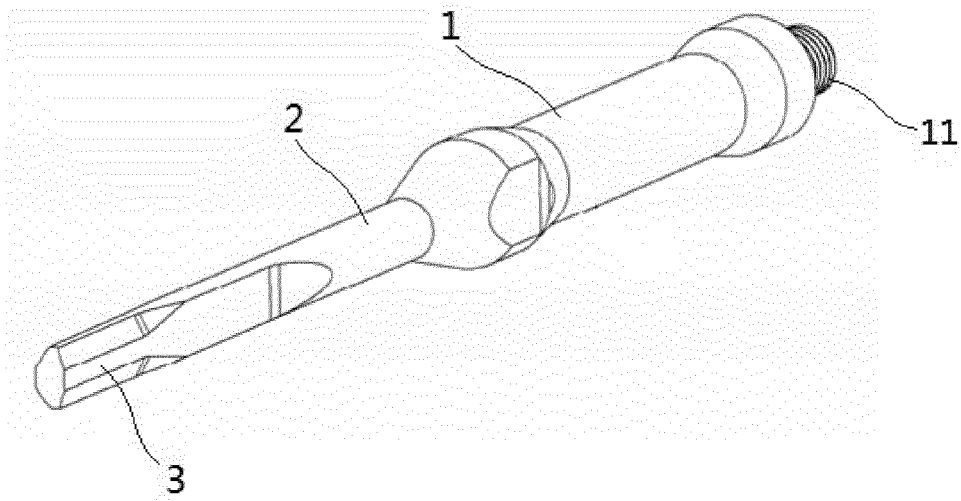


Fig. 1

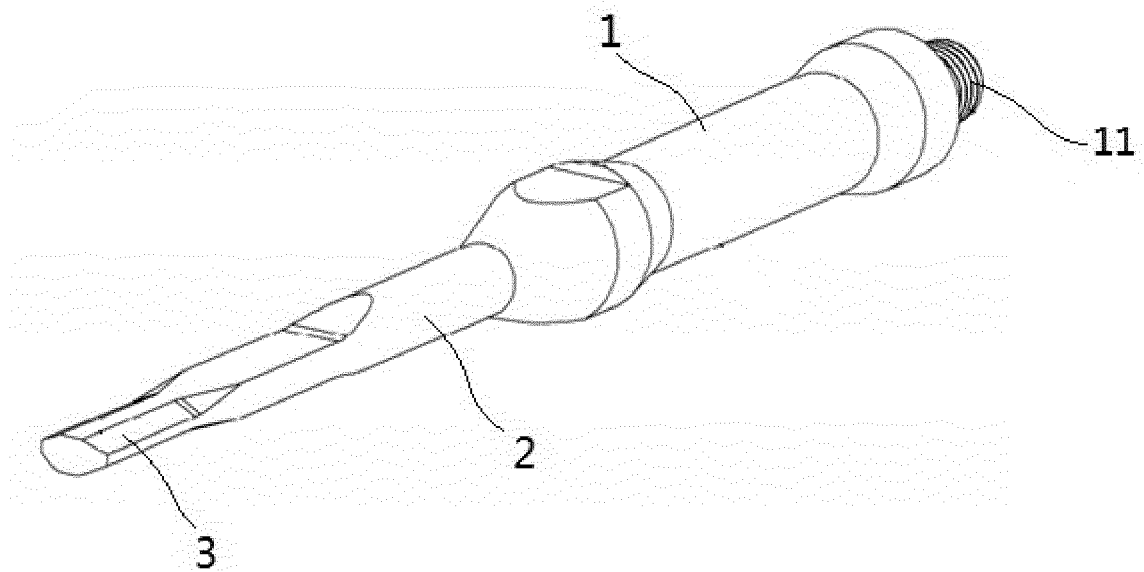


Fig. 2

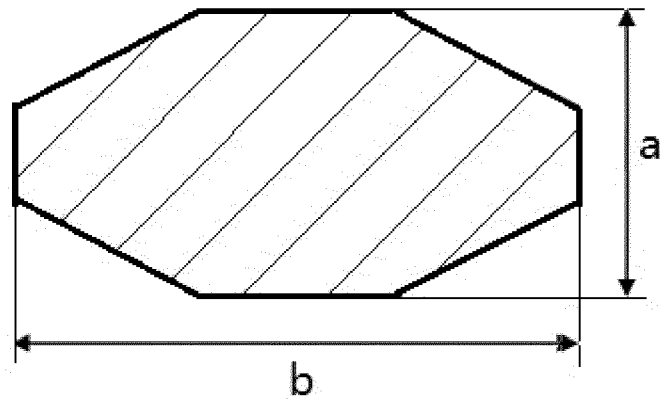


Fig. 3

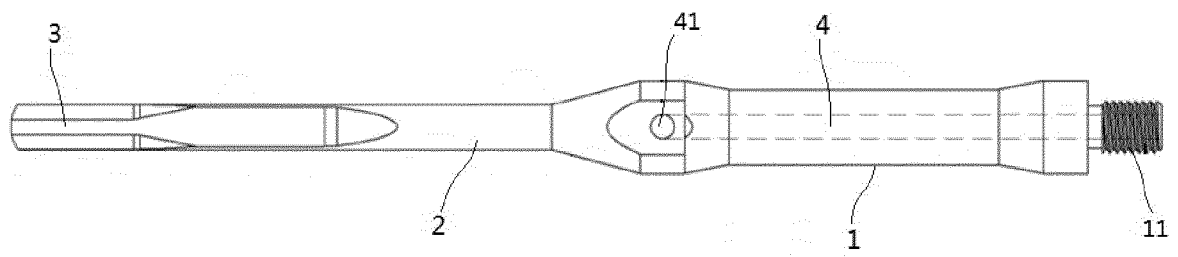


Fig. 4

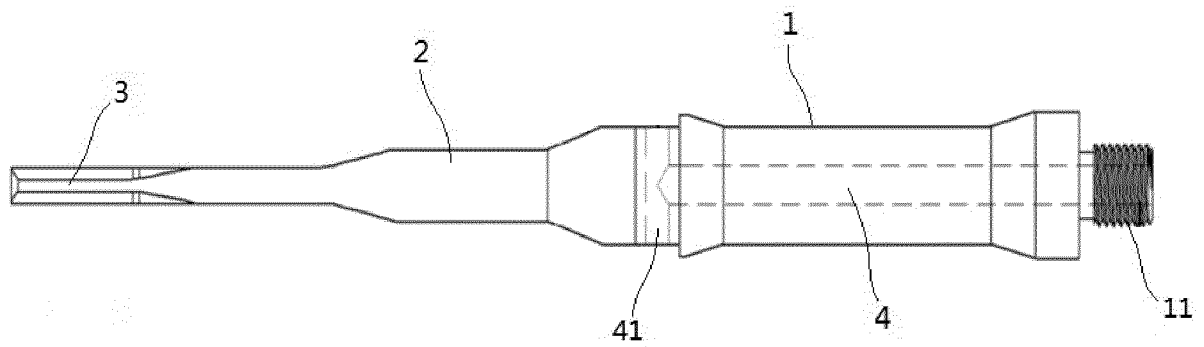


Fig. 5

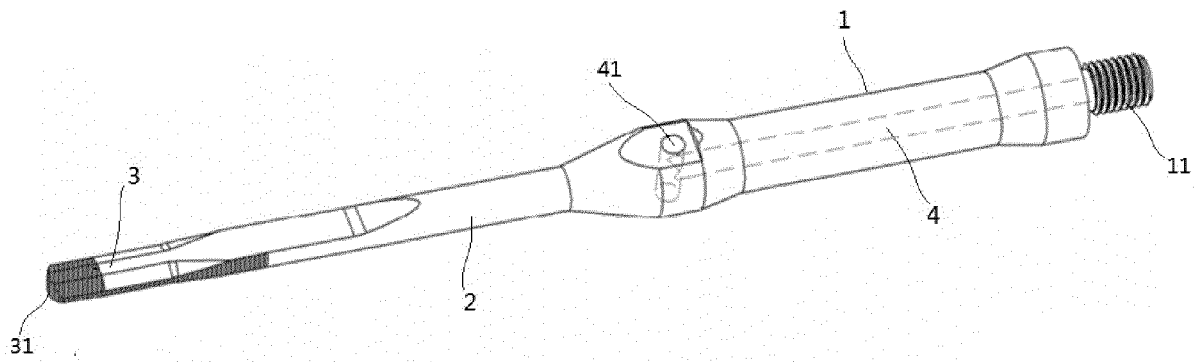


Fig. 6

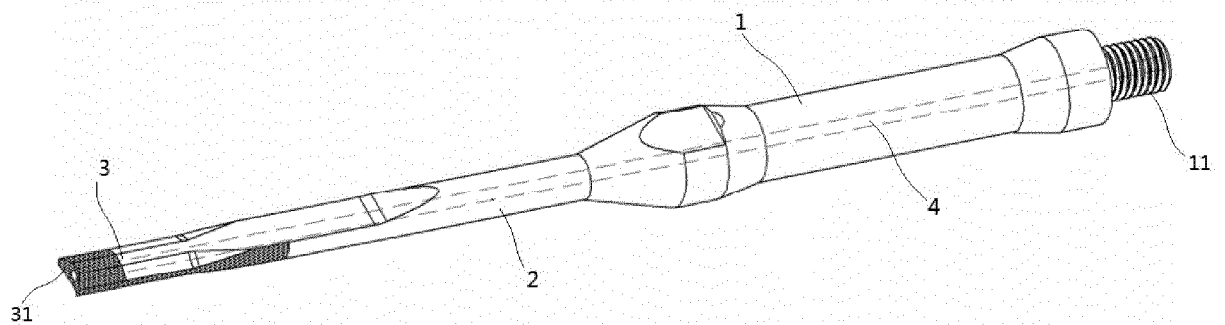


Fig. 7



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/100140

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> A61B 17/32(2006.01)i  According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) A61B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) CNABS, CNTXT, VEN, USTXT, WOTXT, EPTXT, CNKI: 超声, 振动, 刀, 切, 割, 宽, 面, +face+, cut+, ultraso+, wide,		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 104066392 A (ZADEH, H.H.) 24 September 2014 (2014-09-24) description, paragraphs [0018]-[0030], and figures 1A-1F	1-10
Y	US 2002156493 A1 (HOUSER, K.L. ET AL.) 24 October 2002 (2002-10-24) description, paragraphs [0025]-[0034], and figures 1-11	1-10
PX	CN 107582128 A (BEIJING SHUIMU TIANPENG MEDICAL TECHNOLOGY CO., LTD.) 16 January 2018 (2018-01-16) claims 1-10	1-10
A	CN 102143715 A (ETHICON ENDO-SURGERY, INC.) 03 August 2011 (2011-08-03) entire document	1-10
A	CN 104066389 A (MISONIX, INC.) 24 September 2014 (2014-09-24) entire document	1-10
A	US 2016374706 A1 (INTEGRA LIFESCIENCES IRELAND LTD.) 29 December 2016 (2016-12-29) entire document	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family	
Date of the actual completion of the international search	18 October 2018	Date of mailing of the international search report 25 October 2018
Name and mailing address of the ISA/CN State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088 China Facsimile No. (86-10)62019451	Authorized officer     Telephone No.	

Form PCT/ISA/210 (second sheet) (January 2015)

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2018/100140**

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
CN 104066392 A	24 September 2014	US 2013123774 A1 TW 1516245 B KR 20140105744 A WO 2013071170 A1 EP 2775944 A1 EP 2775944 A4 TW 201334755 A	16 May 2013 11 January 2016 02 September 2014 16 May 2013 17 September 2014 09 December 2015 01 September 2013
US 2002156493 A1	24 October 2002	EP 1138264 A1 US 6423082 B1 JP 2001309925 A DE 60128505 T2 JP 4330816 B2 AT 362733 T EP 1138264 B1 ES 2287080 T3 PT 1138264 E DE 60128505 D1 DK 1138264 T3	04 October 2001 23 July 2002 06 November 2001 31 January 2008 16 September 2009 15 June 2007 23 May 2007 16 December 2007 03 July 2007 05 July 2007 24 September 2007
CN 107582128 A	16 January 2018	None	
CN 102143715 A	03 August 2011	WO 2010027888 A1 EP 2334244 A1 AU 2009288258 A1 US 2010057118 A1 JP 2012501735 A JP 5539358 B2 CA 2734501 A1	11 March 2010 22 June 2011 11 March 2010 04 March 2010 26 January 2012 02 July 2014 11 March 2010
CN 104066389 A	24 September 2014	US 2013090660 A1 JP 2014533132 A US 2015045821 A1 US 8894673 B2 JP 6129855 B2 CN 104066389 B WO 2013052635 A2 CA 2851267 A1 EP 2763603 A2 US 9421028 B2 EP 2763603 A4	11 April 2013 11 December 2014 12 February 2015 25 November 2014 17 May 2017 14 November 2017 11 April 2013 11 April 2013 13 August 2014 23 August 2016 23 September 2015
US 2016374706 A1	29 December 2016	None	

Form PCT/ISA/210 (patent family annex) (January 2015)

专利名称(译)	超声骨标头		
公开(公告)号	<a href="#">EP3677201A4</a>	公开(公告)日	2020-10-28
申请号	EP2018861547	申请日	2018-08-12
[标]申请(专利权)人(译)	北京水木天蓬医疗技术有限公司		
申请(专利权)人(译)	北京SMTP科技有限公司		
当前申请(专利权)人(译)	北京SMTP科技有限公司		
[标]发明人	CAO QUN HU XIAOMING LI CHUNYUAN		
发明人	CAO, QUN HU, XIAOMING LI, CHUNYUAN		
IPC分类号	A61B17/32		
CPC分类号	A61B17/1604 A61B17/320068 A61B2017/32007 A61B2017/320072 A61B2017/320077 A61B17/1615 A61B17/1644 A61B2017/1651 A61B2017/320084 A61B2217/005 A61M1/0058		
优先权	201710908425.6 2017-09-29 CN		
其他公开文献	EP3677201A1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

一种超声骨刀,包括钻头本体(1),钻头杆(2)和钻头尖端(3)。钻头棒(2)的一端连接到钻头尖端(3),而钻头棒(2)的另一端连接到钻头本体(1)。刀头(3)是具有多边形结构的横截面的圆柱形或基本圆柱形的结构,并且刀头(2)具有至少两个不同切割宽度的切割面。钻头设置有液体流孔(41),并且钻头尖端(3)设置有滚花结构,该滚花结构从钻头尖端(3)的最前端面向钻头杆(2)延伸以形成文件类型位。超声骨刀不仅满足外科医生对切骨宽度精度的要求,而且节省了更换不同宽度的钻头所需的时间,从而提高了手术效率。