



US 20150263291A1

(19) **United States**(12) **Patent Application Publication****Jung et al.**(10) **Pub. No.: US 2015/0263291 A1**(43) **Pub. Date: Sep. 17, 2015**

(54) **COMPOUND FOR AN ORGANIC OPTOELECTRONIC DEVICE, ORGANIC LIGHT-EMITTING ELEMENT COMPRISING SAME, AND DISPLAY DEVICE COMPRISING THE ORGANIC LIGHT-EMITTING ELEMENT**

(71) Applicant: **CHEIL INDUSTRIES INC.**, Gumi-si
Gyeongsangbuk-do (KR)

(72) Inventors: **Sung-Hyun Jung**, Uiwang-si (KR);
Dong-Wan Ryu, Uiwang-si (KR);
Han-Il Lee, Uiwang-si (KR);
Young-Kyoung Jo, Uiwang-si (KR);
Mi-Young Chae, Uiwang-si (KR);
Dal-Ho Huh, Uiwang-si (KR); **Jin-Seok Hong**, Uiwang-si (KR)

(21) Appl. No.: **14/359,196**

(22) PCT Filed: **Dec. 21, 2012**

(86) PCT No.: **PCT/KR2012/011264**

§ 371 (c)(1),

(2) Date: **May 19, 2014**

(30) **Foreign Application Priority Data**

Dec. 23, 2011 (KR) 10-2011-0141437

Publication Classification

(51) **Int. Cl.**

H01L 51/00 (2006.01)

C09K 11/06 (2006.01)

C07D 513/10 (2006.01)

C07D 498/10 (2006.01)

(52) **U.S. Cl.**

CPC **H01L 51/0061** (2013.01); **C07D 498/10**
(2013.01); **C09K 11/06** (2013.01); **C07D**
513/10 (2013.01); **H01L 51/006** (2013.01);
H01L 51/0071 (2013.01); **H01L 51/0067**
(2013.01); **H01L 51/5024** (2013.01)

(57) **ABSTRACT**

Disclosed are a compound for an organic optoelectronic device, an organic light-emitting diode including the same, and a display device including the organic light emitting diode. The compound for an organic optoelectronic device represented by the following Chemical Formula ad-1 provides an organic light emitting diode having life-span characteristics due to excellent electrochemical and thermal stability, and high luminous efficiency at a low driving voltage.

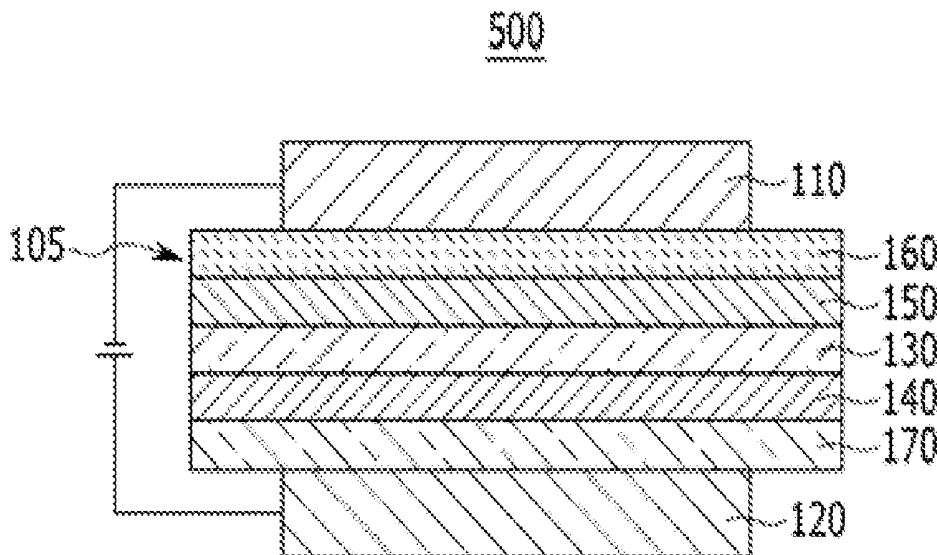


FIG. 1

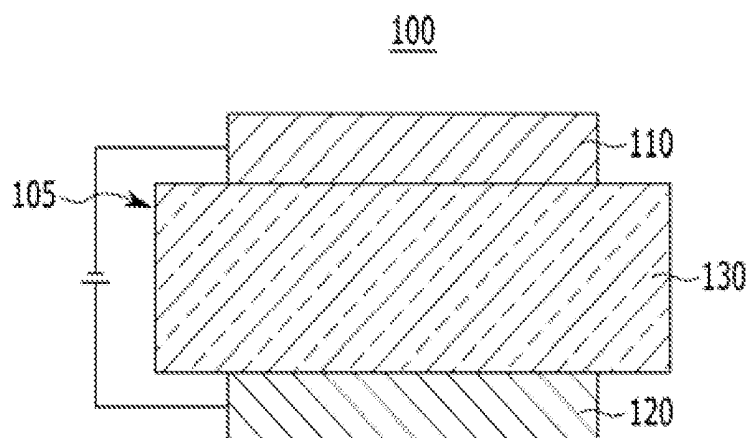


FIG. 2

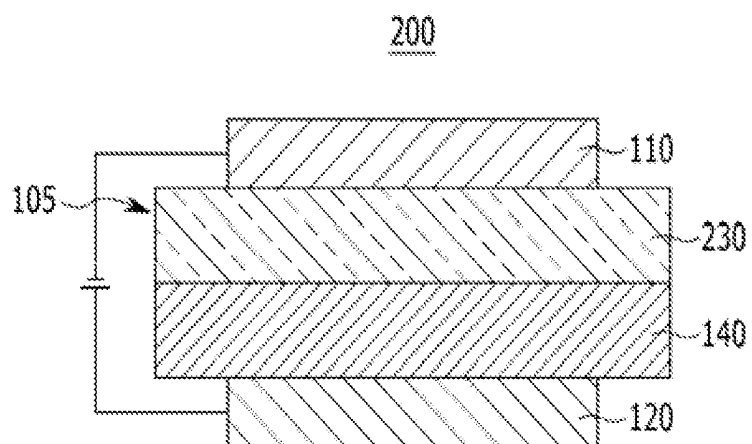


FIG. 3

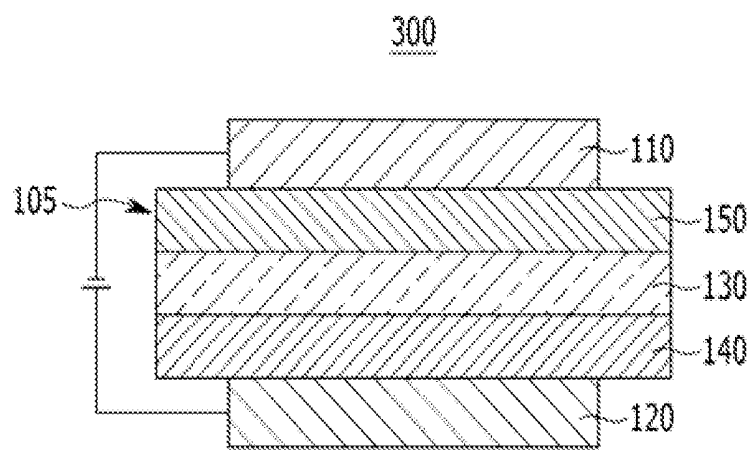


FIG. 4


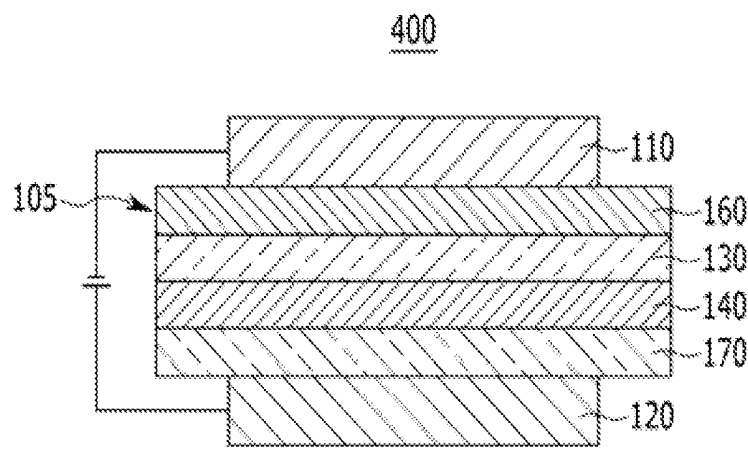


FIG. 5

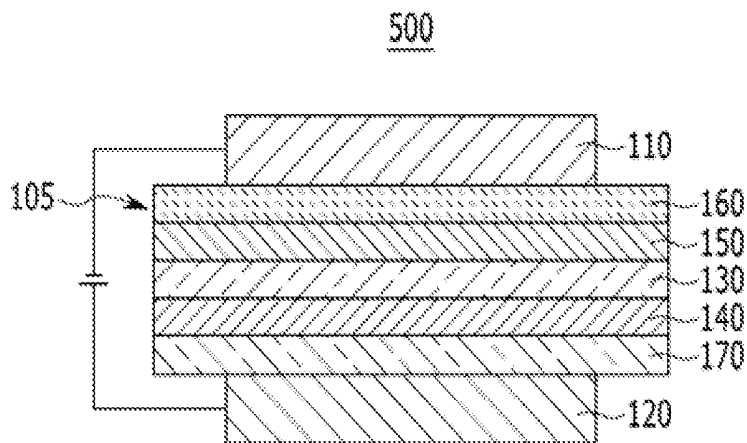

**COMPOUND FOR AN ORGANIC
OPTOELECTRONIC DEVICE, ORGANIC
LIGHT-EMITTING ELEMENT COMPRISING
SAME, AND DISPLAY DEVICE COMPRISING
THE ORGANIC LIGHT-EMITTING
ELEMENT**

TECHNICAL FIELD

[0001] A compound for an organic optoelectronic device being capable of providing an organic optoelectronic device having excellent life-span, efficiency, electrochemical stability, and thermal stability, an organic light emitting diode including the compound, and a display device including the organic light emitting diode are disclosed.

BACKGROUND ART

[0002] An organic optoelectronic device is a device requiring a charge exchange between an electrode and an organic material by using holes or electrons.

[0003] An organic optoelectronic device may be classified as follows in accordance with its driving principles. A first organic optoelectronic device is an electronic device driven as follows: excitons are generated in an organic material layer by photons from an external light source; the excitons are separated into electrons and holes; and the electrons and holes are transferred to different electrodes as a current source (a voltage source).

[0004] A second organic optoelectronic device is an electronic device driven as follows: a voltage or a current is applied to at least two electrodes to inject holes and/or electrons into an organic material semiconductor positioned at an interface of the electrodes, and the device is driven by the injected electrons and holes.

[0005] Examples of an organic optoelectronic device include an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic photoconductor drum, an organic transistor, and the like, which require a hole injecting or transport material, an electron injecting or transport material, or a light emitting material.

[0006] Particularly, an organic light emitting diode (OLED) has recently drawn attention due to an increase in demand for flat panel displays. In general, organic light emission refers to conversion of electrical energy into photoenergy.

[0007] Such an organic light emitting diode converts electrical energy into light by applying current to an organic light emitting material. It has a structure in which a functional organic material layer is interposed between an anode and a cathode. The organic material layer includes a multi-layer including different materials, for example a hole injection layer, a hole transport layer, an emission layer, an electron transport layer, and an electron injection layer, in order to improve efficiency and stability of an organic light emitting diode.

[0008] In such an organic light emitting diode, when a voltage is applied between an anode and a cathode, holes from the anode and electrons from the cathode are injected to an organic material layer and recombined to generate excitants

having high energy. The generated excitons generate light having certain wavelengths while shifting to a ground state.

[0009] Recently, it has become known that a phosphorescent light emitting material may be used for a light emitting material of an organic light emitting diode in addition to the fluorescent light emitting material. Such a phosphorescent material emits light by transporting the electrons from a ground state to an excited state, non-radiative transiting of a singlet exciton to a triplet exciton through intersystem crossing, and transiting a triplet exciton to a ground state to emit light.

[0010] As described above, in an organic light emitting diode, an organic material layer includes a light emitting material and a charge transport material for example a hole injection material, a hole transport material, an electron transport material, an electron injection material, and the like.

[0011] The light emitting material is classified as blue, green, and red light emitting materials according to emitted colors, and yellow and orange light emitting materials to emit colors approaching natural colors.

[0012] When one material is used as a light emitting material, a maximum light emitting wavelength is shifted to a long wavelength or color purity decreases because of interactions between molecules, or device efficiency decreases because of a light emitting quenching effect. Therefore, a host/dopant system is included as a light emitting material in order to improve color purity and increase luminous efficiency and stability through energy transfer.

[0013] In order to implement excellent performance of an organic light emitting diode, a material constituting an organic material layer, for example a hole injection material, a hole transport material, a light emitting material, an electron transport material, an electron injection material, and a light emitting material such as a host and/or a dopant, should be stable and have good efficiency. However, development of an organic material layer forming material for an organic light emitting diode has thus far not been satisfactory and thus there is a need for a novel material. This material development is also required for other organic optoelectronic devices.

[0014] The low molecular organic light emitting diode is manufactured as a thin film in a vacuum deposition method and can have good efficiency and life-span performance. A polymer organic light emitting diode is manufactured in an inkjet or spin coating method has an advantage of low initial cost and being large-sized.

[0015] Both low molecular organic light emitting and polymer organic light emitting diodes have an advantage of self-light emitting, high speed response, wide viewing angle, ultra-thin, high image quality, durability, large driving temperature range, and the like. In particular, they have good visibility due to self-light emitting characteristics compared with a conventional LCD (liquid crystal display) and have an advantage of decreasing thickness and weight of LCD up to a third, because they do not need a backlight.

[0016] In addition, since they have a response speed 1000 times faster than LCD, they can realize a perfect motion picture without after-image. Based on these advantages, they have been remarkably developed to have 80

times efficiency and more than 100 times lifespan since they come out for the first time in the late 1980s. Recently, they keep being rapidly larger such as a 40-inch organic light emitting diode panel.

[0017] They are simultaneously required to have improved luminous efficiency and life-span in order to be larger. Herein, their luminous efficiency need smooth combination between holes and electrons in an emission layer. However, since an organic material in general has slower electron mobility than hole mobility, it has a drawback of inefficient combination between holes and electrons. Accordingly, while increasing electron injection and mobility from a cathode and simultaneously preventing movement of holes is required.

[0018] In order to improve life-span, a material crystallization caused by Joule heats generated during device operating is required to be prevented. Accordingly, there has been a strong need for an organic compound having excellent electron injection and mobility, and high electrochemical stability.

DISCUSSION


Technical Problem

[0019] A compound for an organic optoelectronic device that may act as a hole injection and transport material or an electron injection and transport material, and also act as a light emitting host along with an appropriate dopant is provided.

[0020] An organic light emitting diode having excellent life-span, efficiency, driving voltage, electrochemical stability, and thermal stability and a display device including the same are provided.

Technical Solution

[0021] In one embodiment of the present invention, a compound for an organic optoelectronic device represented by the following Chemical Formula ad1 is provided.

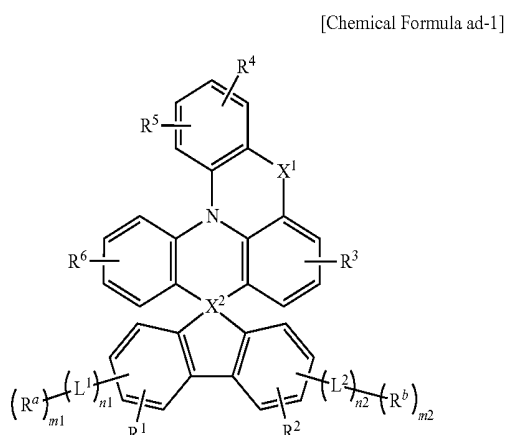

[0022] In the above Chemical Formula ad-1, X¹ is —O— or —S—, X² is —C— or —Si—, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group. L¹ and L² are independently a substituted or unsubstituted C₂ to C₁₀


alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₈ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₁ and m₂ are independently integers of 0 or 1, n₁ and n₂ are independently integers ranging from 0 to 3, and R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₈ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, R^a and R^b are each independently, hydrogen, deuterium, a substituted or unsubstituted silyl group, a substituted or unsubstituted C₄ to C₆₀ amine group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group.

[0023] At least one of the R^a and R^b may be a substituted or unsubstituted pyridine group, a substituted or unsubstituted pyrimidinyl group, or a substituted or unsubstituted triazinyl group.

[0024] At least one of the R^a and R^b may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, or a substituted of unsubstituted phenanthrenyl group.

[0025] The compound for an organic optoelectronic device may be represented by the following Chemical Formula 1.


[Chemical Formula 1]

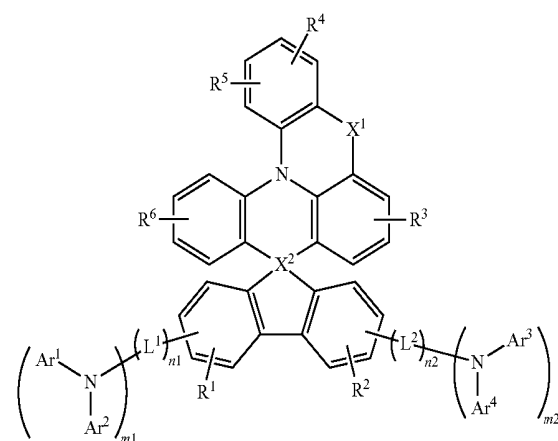

[0026] In the above Chemical Formula 1, X¹ is —O— or —S—, X² is —C— or —Si—, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L¹ and L² are independently a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₈ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1, n₁ and n₂ are independently integers ranging from 0 to 3, and R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group.

[0027] The compound for an organic optoelectronic device may be represented by the following Chemical Formula 2.


[Chemical Formula 2]

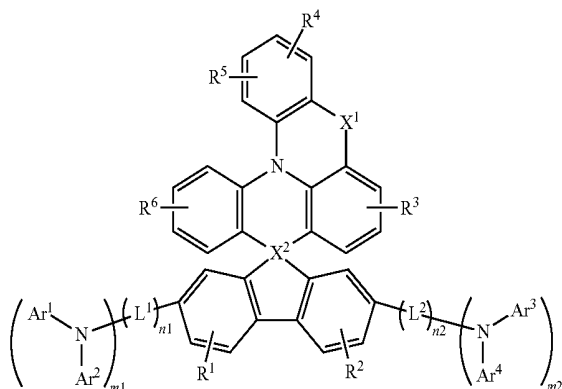

[0028] In the above Chemical Formula 2, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 to Ar^4 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L^1 and L^2 are independently a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C8 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 and m_2 are independently integers of 0 or 1, one of m_1 and m_2 is 1, n_1 and n_2 are independently integers ranging from 0 to 3, and R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0029] The compound for an organic optoelectronic device may be represented by the following Chemical formula 3.

[Chemical Formula 3]

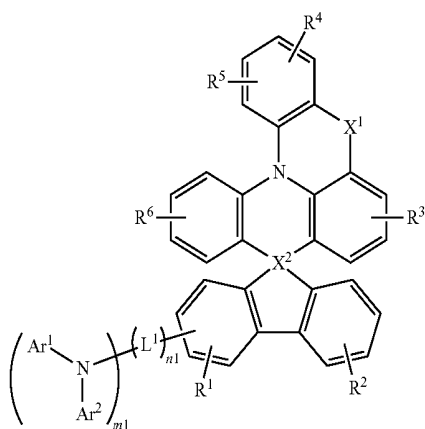


[0030] In the above Chemical Formula 3 X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 and Ar^2 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L^1 is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a

substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 is 1, n_1 is integers ranging from 0 to 3, and R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C8 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0031] The compound for an organic optoelectronic device may be represented by the following Chemical Formula 4.

[Chemical Formula 4]

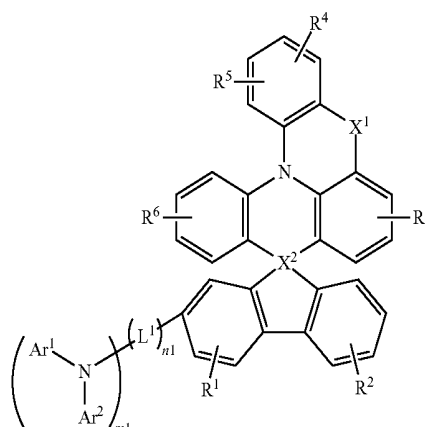

[0032] In the above Chemical Formula 4, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 and Ar^2 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroarylene group, V is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 is 1, n_1 is integers ranging from 0 to 3, and R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0033] The X^2 may be $—C—$.


[0034] The Ar^1 to Ar^4 may be independently a substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-terphenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or

unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted benzothiophenyl group, a substituted or unsubstituted benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinoliny group, a substituted or unsubstituted isoquinoliny group, a substituted or unsubstituted quinazoliny group, a substituted or unsubstituted quinoxaliny group, a substituted or unsubstituted naphthyridiny group, a substituted or unsubstituted benzoxaziny group, a substituted or unsubstituted benzthiaziny group, a substituted or unsubstituted acridiny group, a substituted or unsubstituted phenaziny group, a substituted or unsubstituted phenothiaziny group, a substituted or unsubstituted phenoxaziny group, or a combination thereof.


[0035] The compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae A-1 to A-26.

-continued


A-3

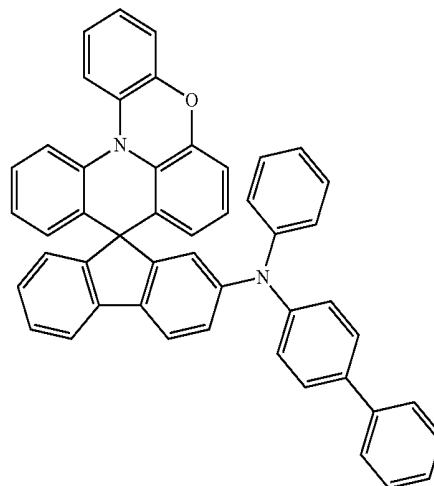


A-1

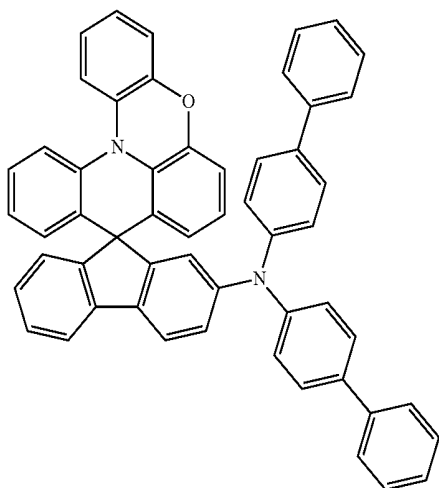


A-4

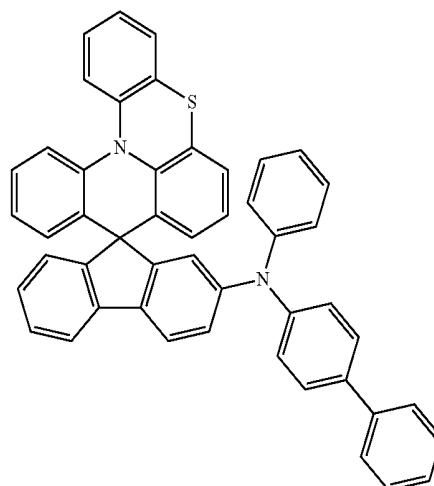


A-2

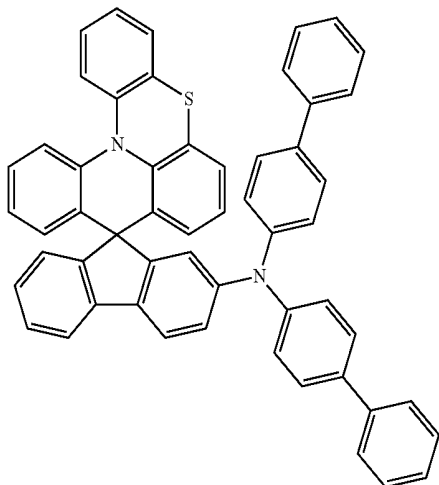

A-5

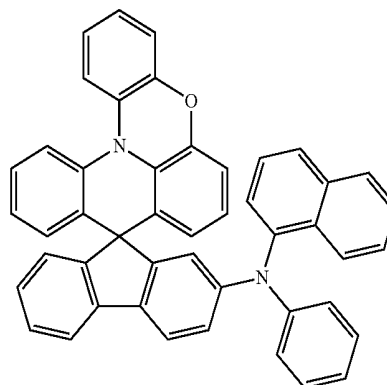


-continued

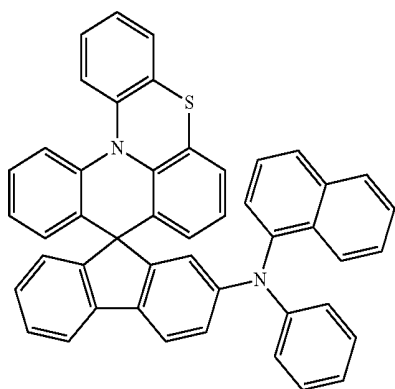


A-6


-continued

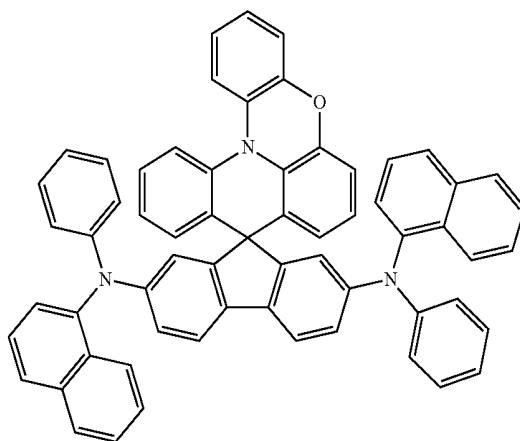


A-9

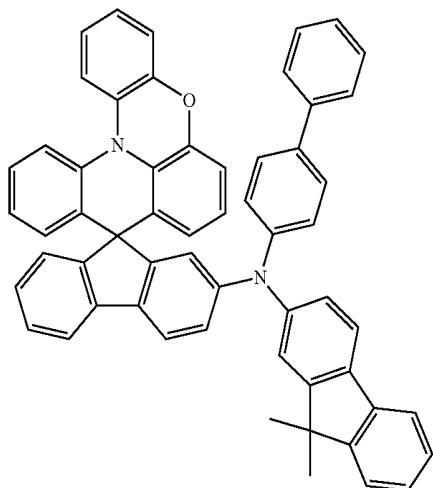


A-7

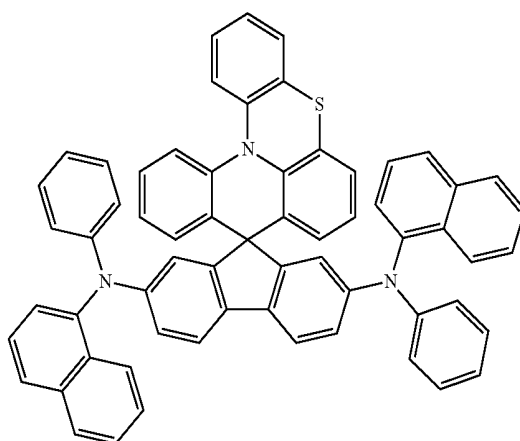

A-10

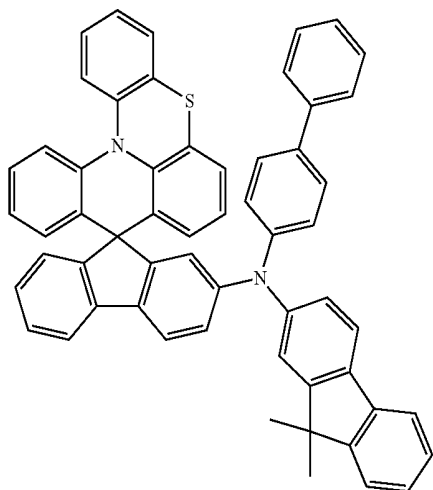


A-8

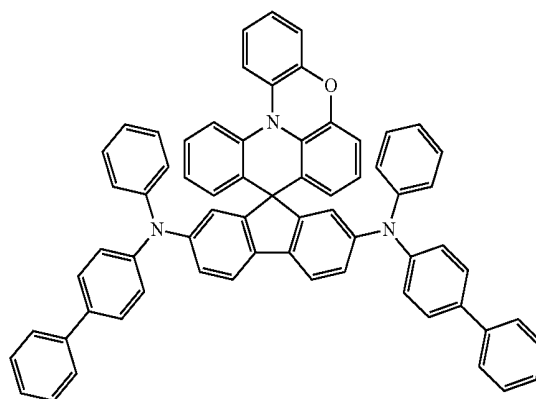

A-11


-continued

A-12

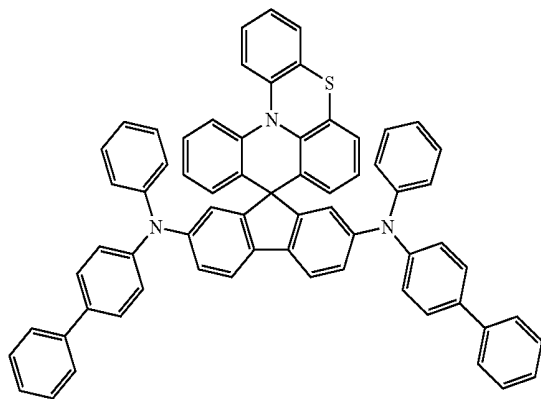


-continued


A-15

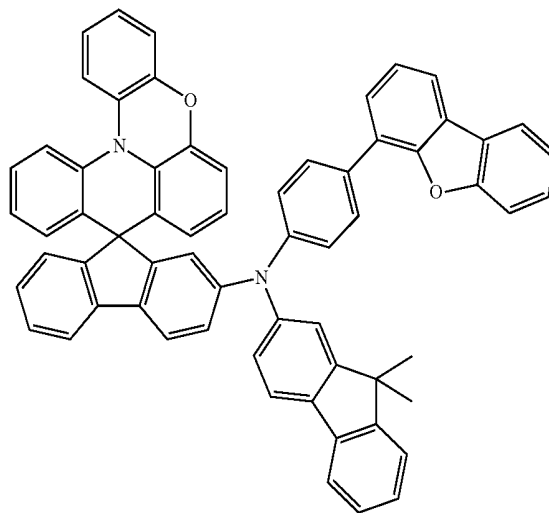


A-13

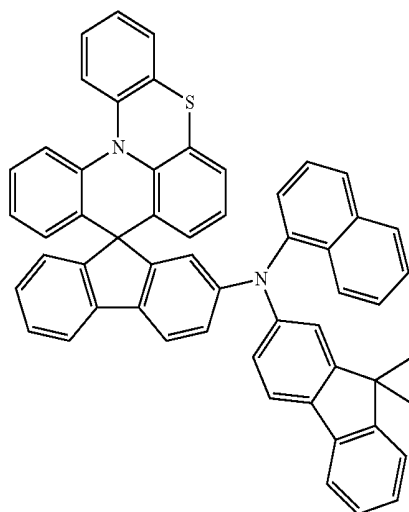


A-16

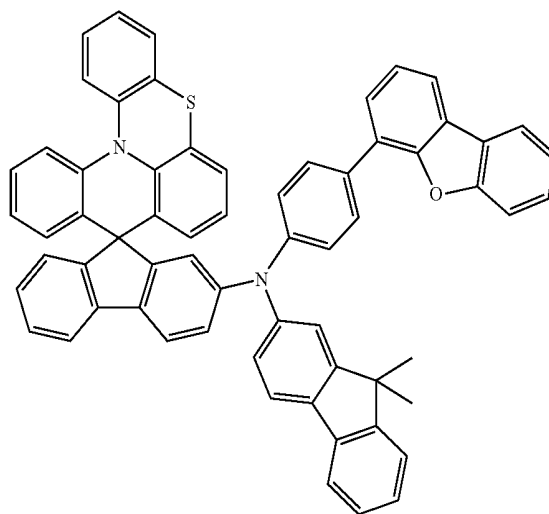

A-14

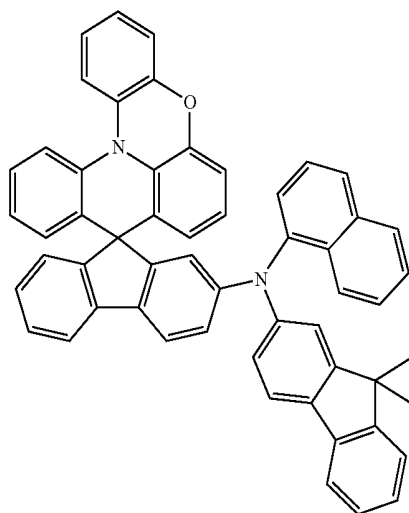


A-17

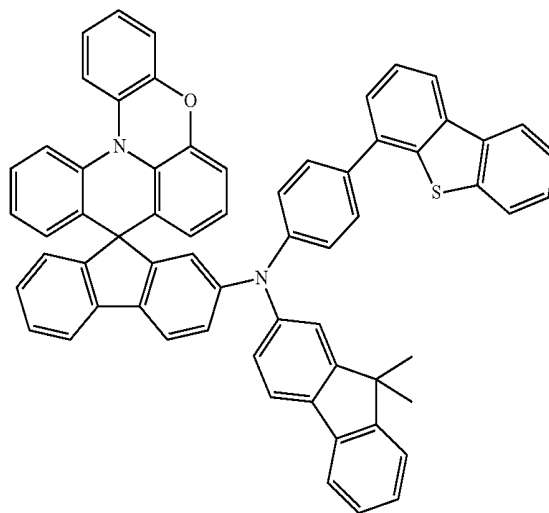


-continued

A-18

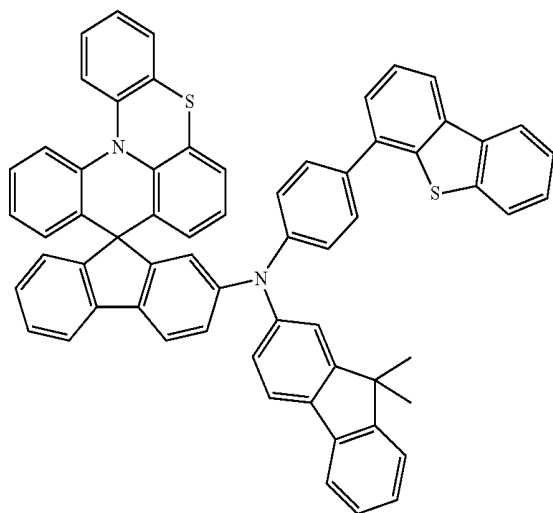


-continued


A-20

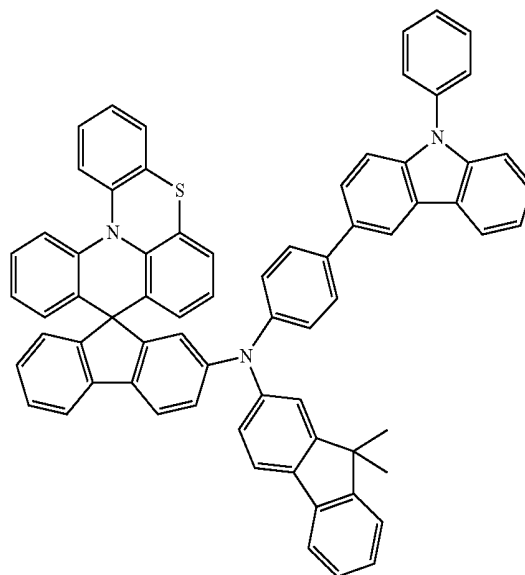

A-19

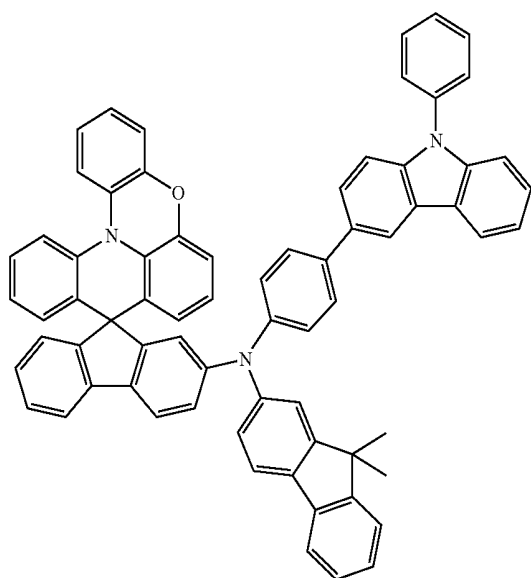


A-21

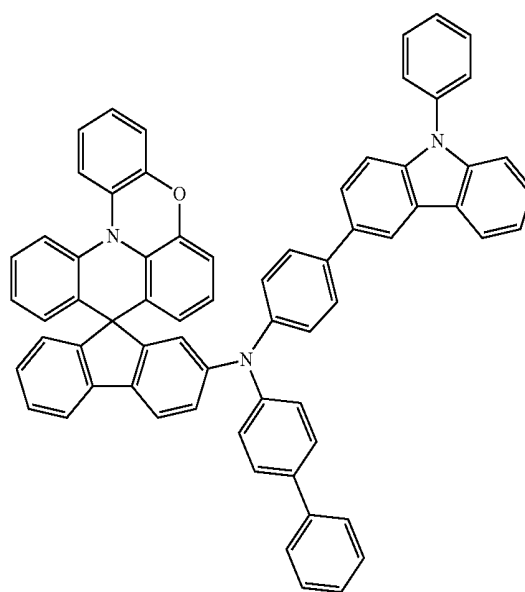


-continued

A-22

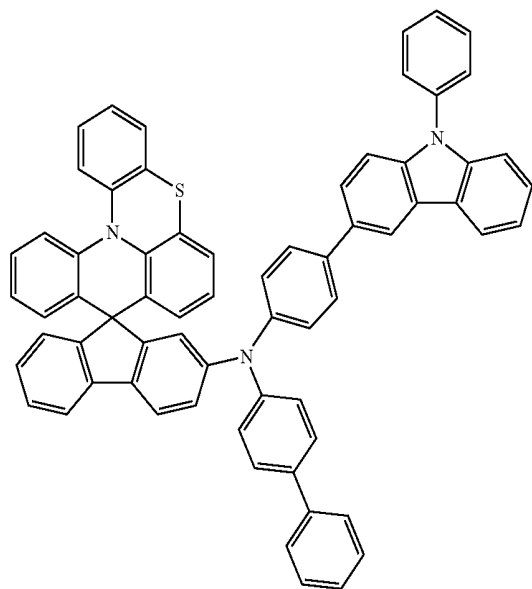


-continued


A-24

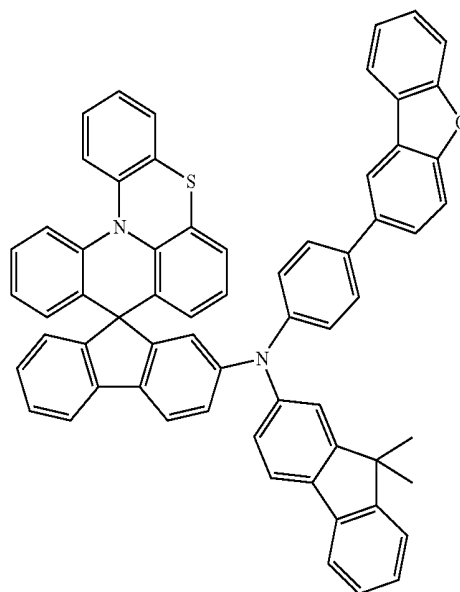

A-23

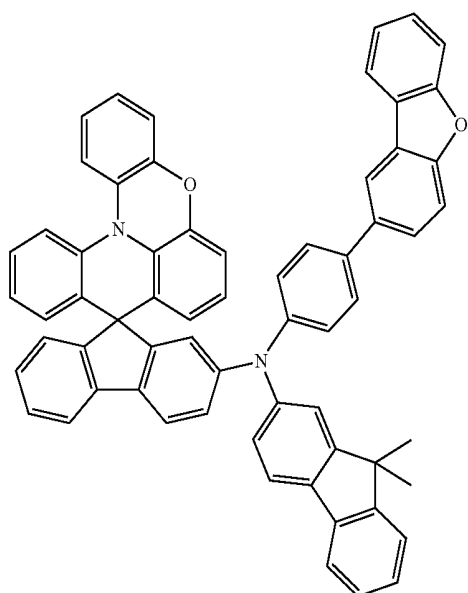


A-25

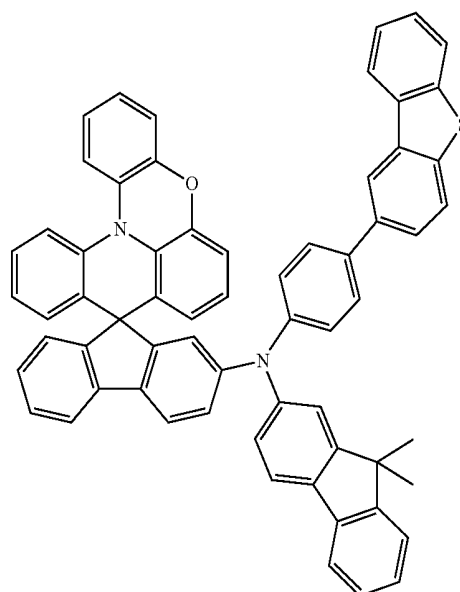


-continued

A-26

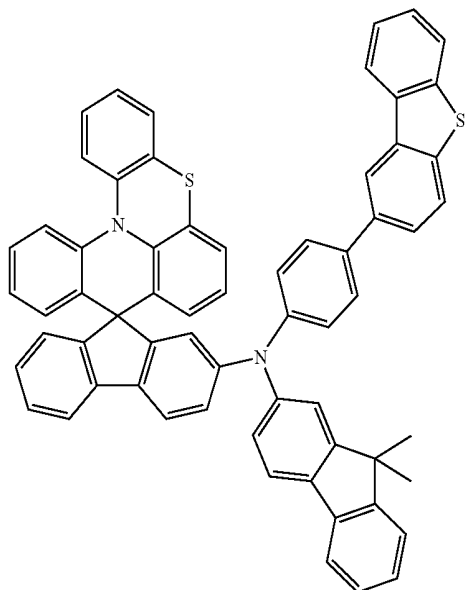


-continued

[B-3]

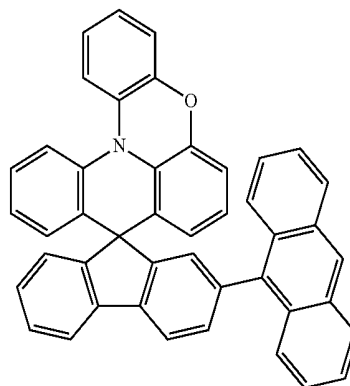


[B-4]




[0036] The compound for an organic optoelectronic device may be represented by one of the following Chemical formulae B-1 to 8-10.


[B-1]




[B-5]

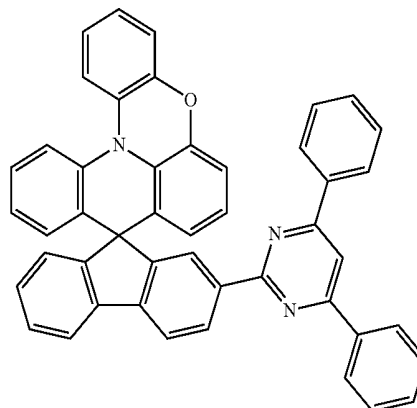


[B-2]

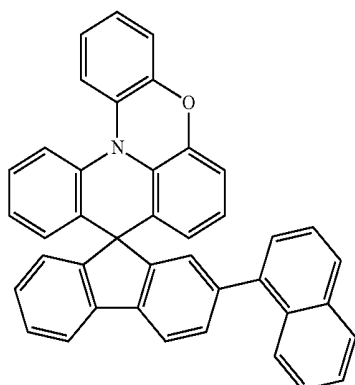


[B-6]

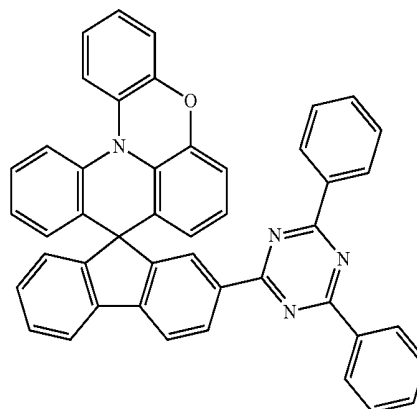


-continued

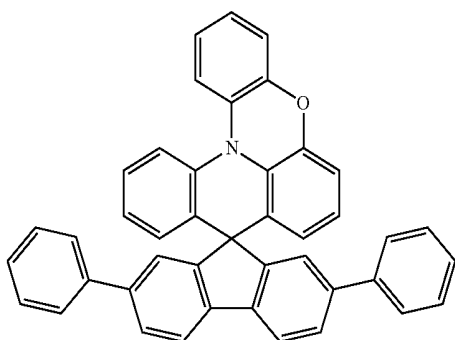


[B-7]

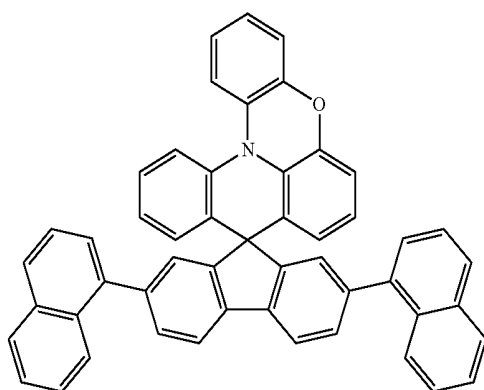

[B-8]

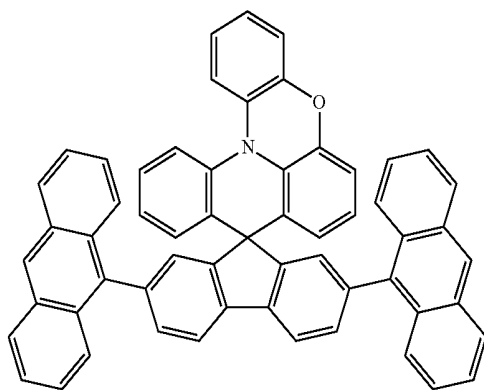

[B-9]

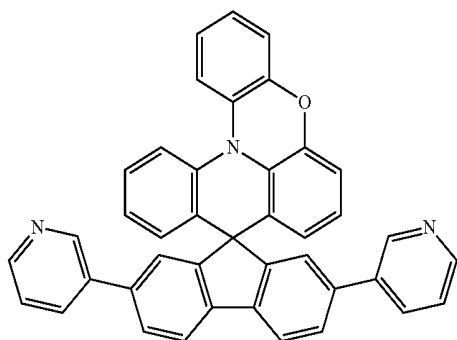

[B-10]

[0037] The compound for an organic optoelectronic device may have triplet exciton energy (T1) of greater than or equal to about 2.0 eV.

[0038] The organic optoelectronic device may be selected from an organic photoelectric device, an organic light emit-

ting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, and an organic memory device.

[0039] In another embodiment of the present invention, provided is an organic light emitting diode including an anode, a cathode, and at least one organic thin layer interposed between the anode and cathode, wherein at least one of the organic thin layers includes the above compound for an organic optoelectronic device.

[0040] The organic thin layer may be selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof.

[0041] The compound for an organic optoelectronic device may be included in a hole transport layer (HTL) or a hole injection layer (HIL).

[0042] The compound for an organic optoelectronic device may be included in an emission layer.

[0043] The compound for an organic optoelectronic device may be used as a phosphorescent or fluorescent host material in an emission layer.

Advantageous Effects

[0044] In yet another embodiment of the present invention, a display device including the above organic light emitting diode is provided.

[0045] A compound having high hole or electron transport properties, film stability, thermal stability, and high triplet exciton energy may be provided.

[0046] Such a compound may be used as a hole injection/transport material, host material, or electron injection/transport material of an emission layer. An organic optoelectronic device using the same has improved life-span characteristics, and high luminous efficiency at a low driving voltage due to excellent electrochemical and thermal stability.

DESCRIPTION OF DRAWINGS

[0047] FIGS. 1 to 5 are cross-sectional views showing organic light emitting diodes according to various embodiments of the present invention including the compound for an organic optoelectronic device according to one embodiment of the present invention.

<Description of Symbols>

100: organic light emitting diode	110: cathode
120: anode	105: organic thin film
130: emission layer	140: hole transport layer (HTL)
150: electron transport layer (ETL)	160: electron injection layer (EIL)
170: hole injection layer (HIL)	230: emission layer + electron transport layer (ETL)

BEST MODE

[0048] Hereinafter, embodiments of the present invention are described in detail. However, these embodiments are exemplary, and this disclosure is not limited thereto.

[0049] As used herein, when a definition is not otherwise provided, the term "substituted" refers to one substituted with a substituent selected from deuterium, a halogen, a hydroxy group, an amino group, a substituted or unsubstituted C1 to C30 amine group, a nitro group, a substituted or unsubstituted C3 to C40 silyl group, a C1 to C30 alkyl group, a C1 to C10

alkylsilyl group, a C3 to C30 cycloalkyl group, a C6 to C30 aryl group, a C1 to C20 alkoxy group, a fluoro group, a C1 to C10 trifluoroalkyl group such as a trifluoromethyl group and the like, or a cyano group, instead of at least one hydrogen of a substituent or a compound.

[0050] The two adjacent substituent selected from the substituted a halogen, hydroxy group, amino group, substituted or unsubstituted C1 to C20 amine group, nitro group, substituted or unsubstituted C3 to C40 silyl group, C1 to C30 alkyl group, C1 to C10 alkylsilyl group, C3 to C30 cycloalkyl group, C6 to C30 aryl group, C1 to C20 alkoxy group, fluoro group, C1 to C10 trifluoroalkyl group such as trifluoromethyl group, and the like, or cyano group may be fused to form a ring.

[0051] In the present specification, when specific definition is not otherwise provided, “hetero” refers to one including 1 to 3 hetero atoms selected from N, O, S, and P, and remaining carbons in one compound or substituent.

[0052] In the present specification, when a definition is not otherwise provided, the term “combination thereof” refers to at least two substituents bonded with each other by a linker, or at least two substituents condensed to each other.

[0053] In the present specification, when a definition is not otherwise provided, “alkyl group” refers to an aliphatic hydrocarbon group. The alkyl group may be “a saturated alkyl group” without any double bond or triple bond. The alkyl group may be branched, linear or cyclic.

[0054] The “alkenylene group” refers to a functional group of at least one carbon-carbon double bond of at least two carbons, and the “alkynylene group” refers to a functional group of at least one carbon-carbon triple bond of at least two carbons.

[0055] The alkyl group may be a C1 to C20 alkyl group. More specifically, the alkyl group may be a C1 to C10 alkyl group or a C1 to C6 alkyl group.

[0056] For example, a C1 to C4 alkyl group may have 1 to 4 carbon atoms in an alkyl chain which may be selected from methyl, ethyl, propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl, and t-butyl.

[0057] Specific examples of the alkyl group may be a methyl group, an ethyl group, a propyl group, an isopropyl group, a butyl group, an isobutyl group, a t-butyl group, a pentyl group, a hexyl group, a cyclopropyl group, a cyclobutyl group, a cyclopentyl group, a cyclohexyl group, and the like.

[0058] “Aromatic group” refers to a cyclic functional group where all elements have p-orbitals, and these p-orbitals forms conjugation. Specific examples are aryl group and a heteroaryl group.

[0059] “Aryl group” includes monocyclic or fused ring polycyclic (i.e., rings sharing adjacent pairs of carbon atoms) groups.

[0060] “Heteroaryl group” refers to aryl group including 1 to 3 hetero atoms selected from N, O, S, and P, and remaining carbons. When the heteroaryl group is a fused ring, each ring may include 1 to 3 hetero atoms.

[0061] As used herein, the carbazole-based derivative may refer to a substituted structure where a nitrogen atom of a substituted or unsubstituted carbazolyl group is substituted with a hetero atom or carbon except nitrogen. Specific examples may be dibenzofuran (a dibenzofuranyl group), dibenzothiophene (a dibenzothiophenyl group), fluorine (a fluorenyl group) and the like.

[0062] In the present specification, hole characteristics refer to characteristics that holes formed in the anode is easily injected into the emission layer and transported in the emission layer due to conductive characteristics according to HOMO level. Specifically, it is similar to electron-repelling characteristics.

[0063] Electron characteristics refer to characteristics that electron formed in the cathode is easily injected into the emission layer and transported in the emission layer due to conductive characteristics according to LUMO level. Specifically, it is similar to electron-withdrawing characteristics.

[0064] A compound for an organic optoelectronic device according to one embodiment of the present invention, for example, may have a core that phenoxazine and spiro-fluorene are formed as a fused ring.

[0065] Selectively, at least one aryl amine (or heteroaryl amine) may be combined with the core structure.


[0066] Accordingly, the core structure may be used as a light emitting material, a hole injection material, or a hole transport material for an organic optoelectronic device. In particular, the core structure may be appropriately used as a hole injection material or a hole transport material.

[0067] The compound for an organic optoelectronic device includes a core part and various substituents for a substituent for substituting the core part and thus may have various energy bandgaps.

[0068] When the compound having an appropriate energy level depending on a substituent is used for an organic optoelectronic device, the compound may reinforce hole transport capability or electron transport capability of the organic optoelectronic device, have excellent effects on efficiency and a driving voltage, and also, have excellent electrochemical and thermal stability and thus, improve life-span characteristics during operation of the organic optoelectronic device.

[0069] In one embodiment of the present invention, a compound for an organic optoelectronic device represented by the following Chemical Formula ad-1 is provided.

[Chemical Formula ad-1]

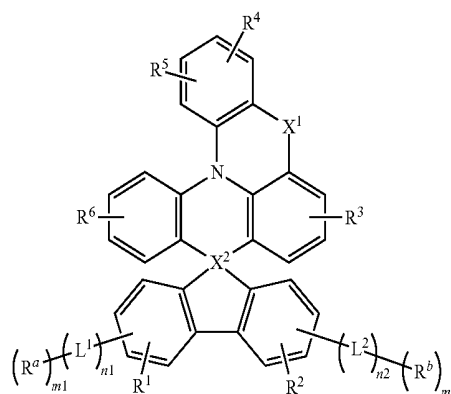


[0070] In the above Chemical Formula ad-1, X¹ is —O— or —S—, X² is —C— or —Si—, AR¹ to Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L¹ and L² are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to

C30 heteroarylene group, m_1 and m_2 are independently integers of 0 or 1, n_1 and n_2 are independently integers ranging from 0 to 3, R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, R^a and R^b are each independently, hydrogen, deuterium, a substituted or unsubstituted silyl group, a substituted or unsubstituted C4 to C60 amine group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.


[0071] At least one of the R^a and R^b may be a substituted or unsubstituted pyridinyl group, a substituted or unsubstituted pyrimidinyl group, or a substituted or unsubstituted triazinyl group. Herein, the substituent may additionally apply electron characteristics to the compound, and thus, the compound may have bipolar characteristics.

[0072] At least one of the R^a and R^b may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, or a substituted or unsubstituted phenanthrenyl group. However, it is not limited thereto.


[0073] The substituted or unsubstituted C4 to C60 amine group may be anyone of the following substituents. A linking group at the left of the following amine substituents indicates a linking position with the core.

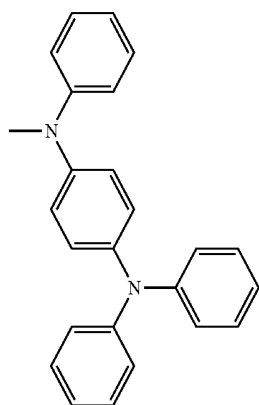

1

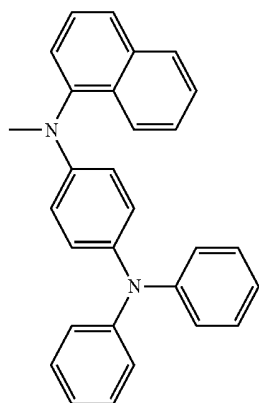


2

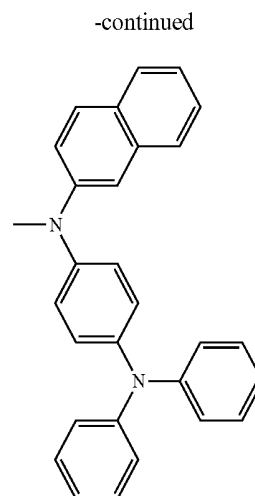


-continued

3

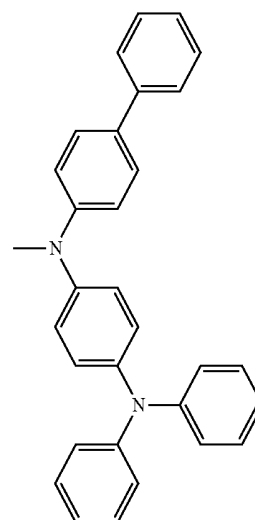


4

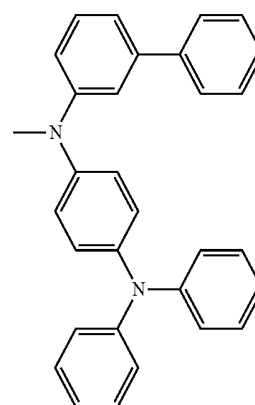


5

-continued

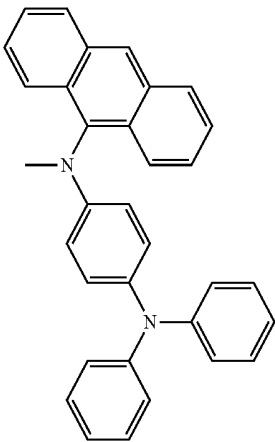


6

-continued

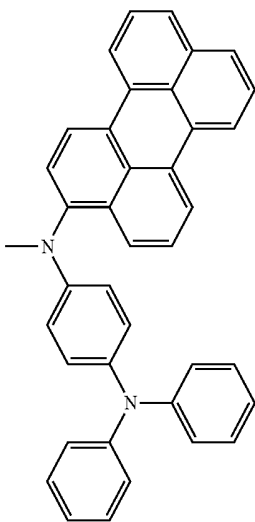


9


7

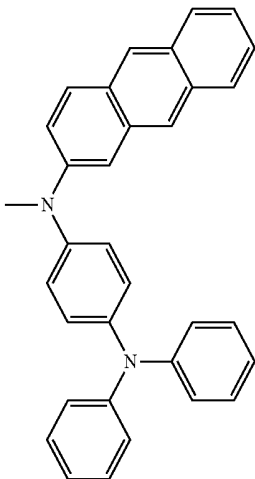


10

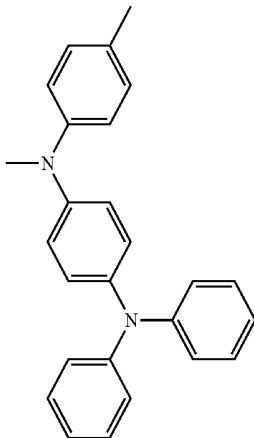


8

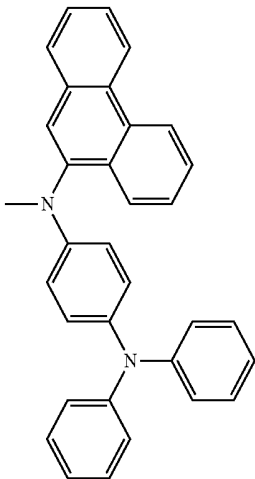

11

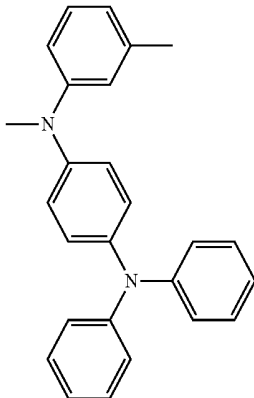


-continued

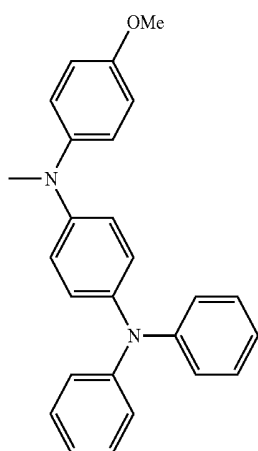


12


-continued

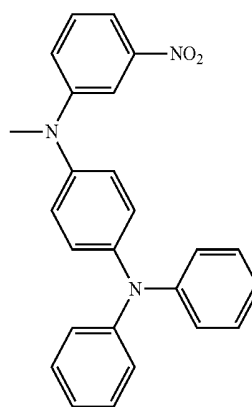


15

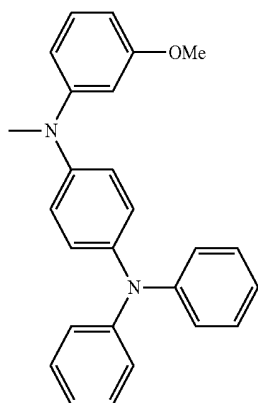


13

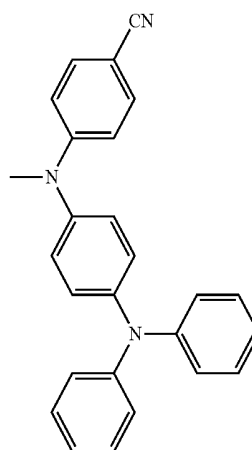

16

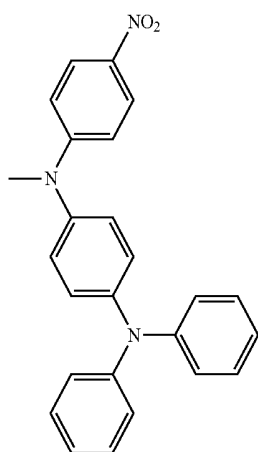


14

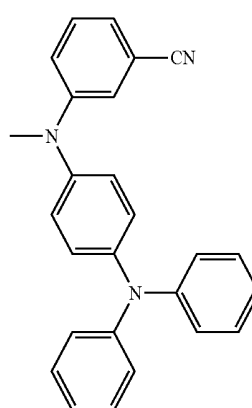


17

-continued

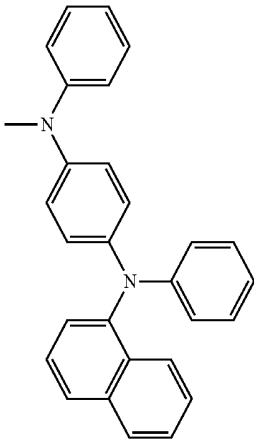


18


-continued

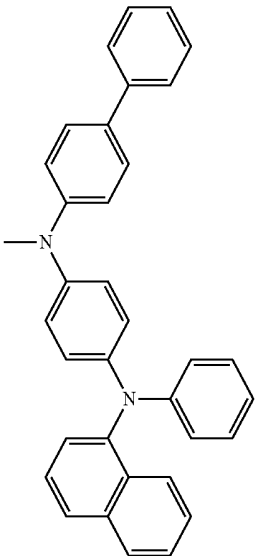


21

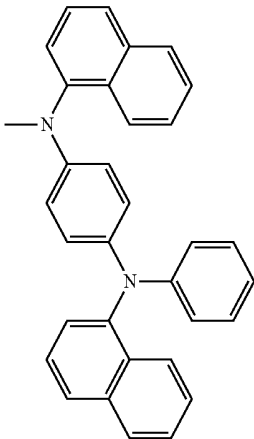


19

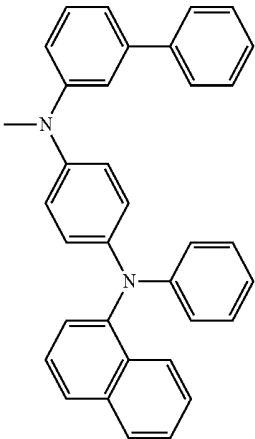

22

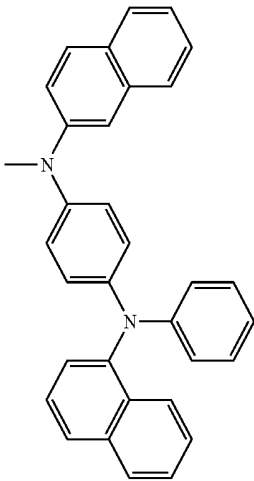


20

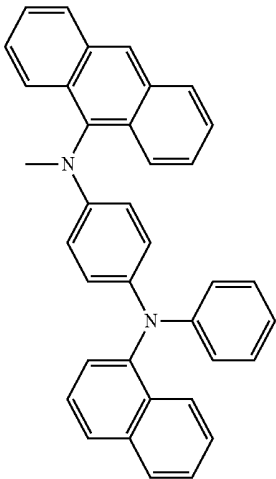


23

-continued




24

-continued

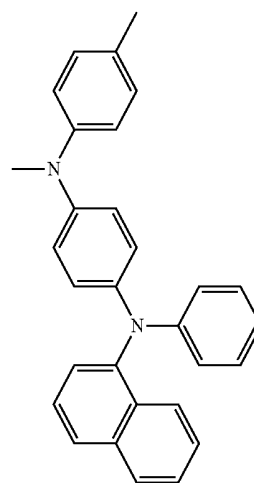


27



25

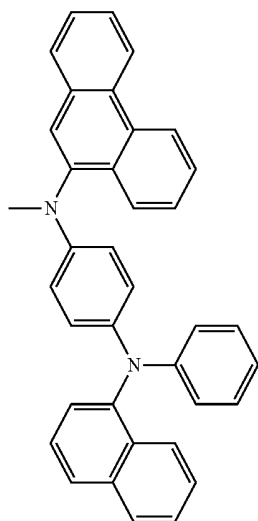

26

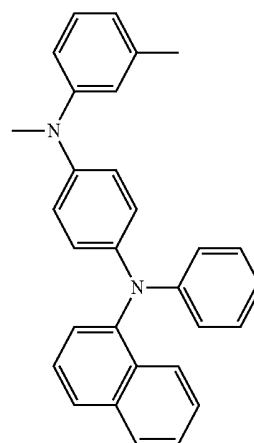


28

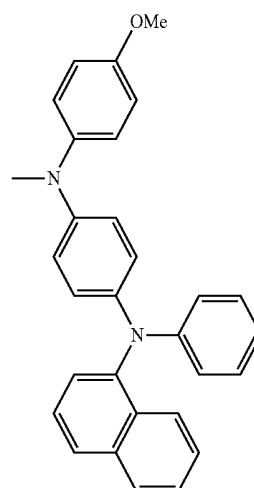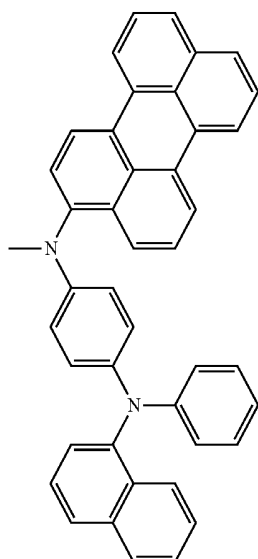


29

-continued

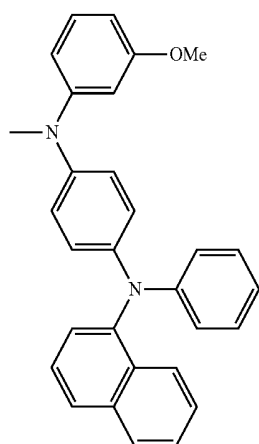


30

-continued

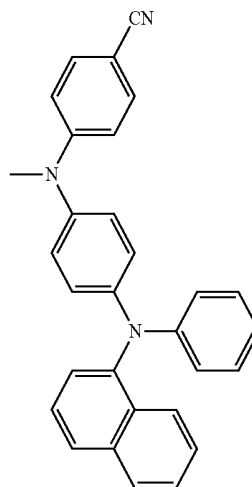


33


31

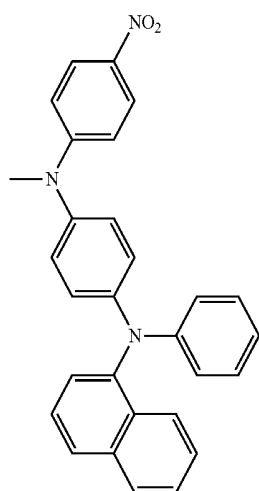


34

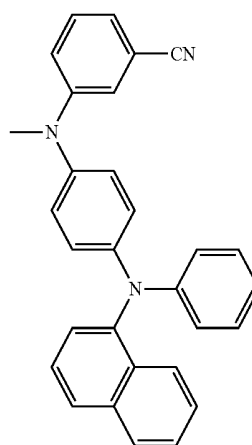


32

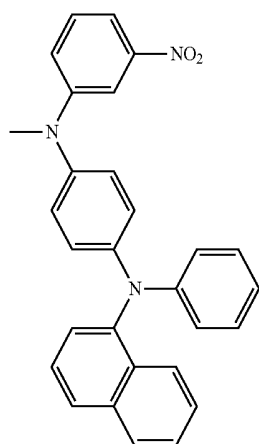

35




-continued

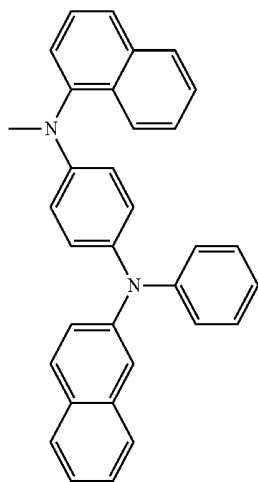


36


-continued

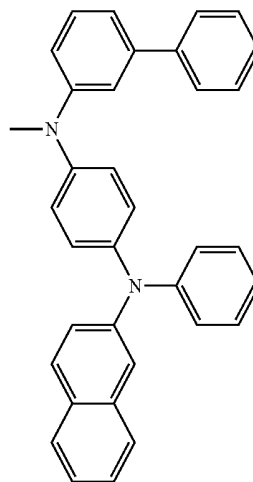


39

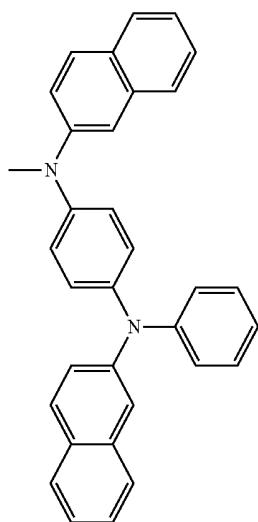


37

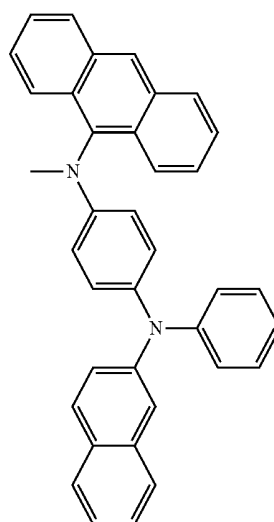

40

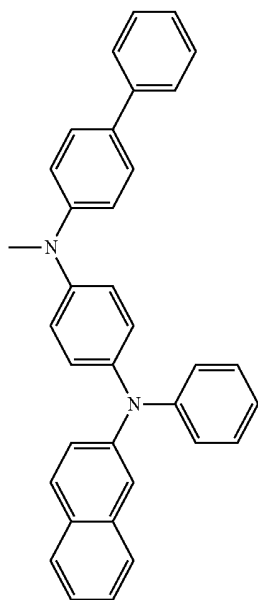


38

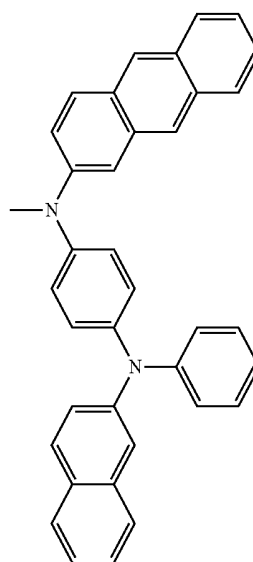


41


-continued

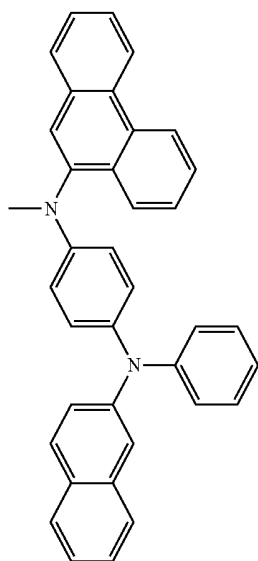

42

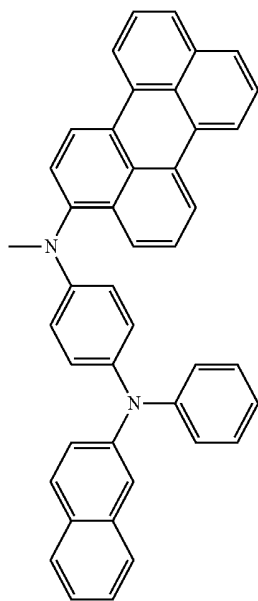


43

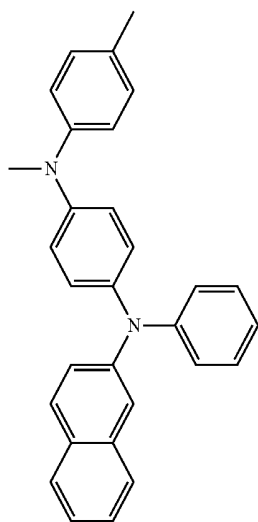


44


-continued

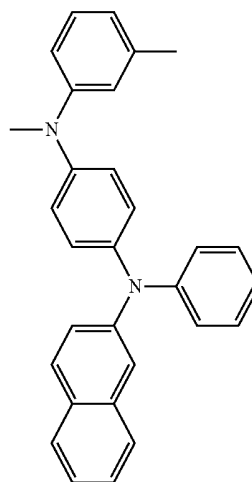

45

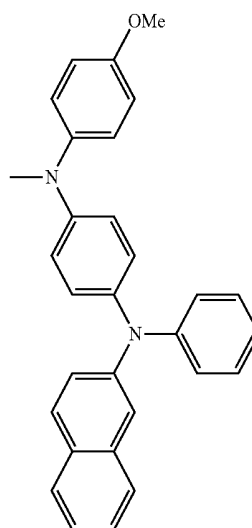


46




47

-continued

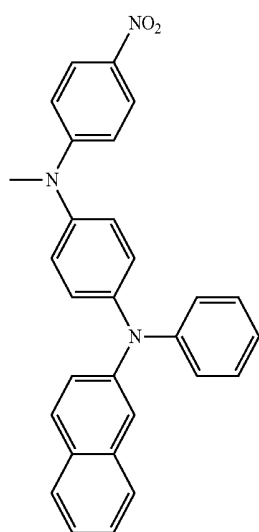


48


-continued

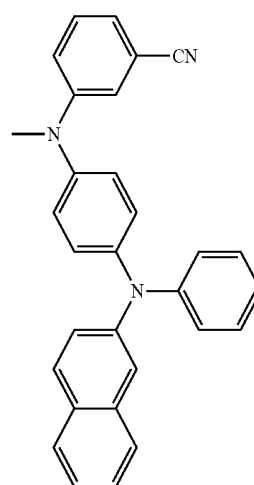


51

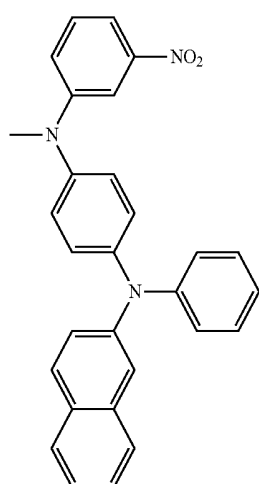


49

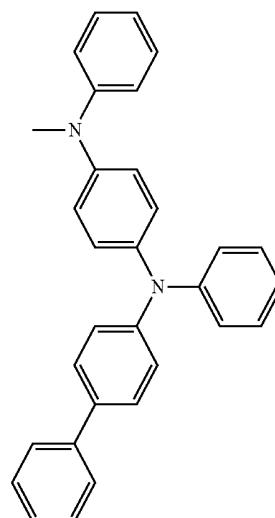

52

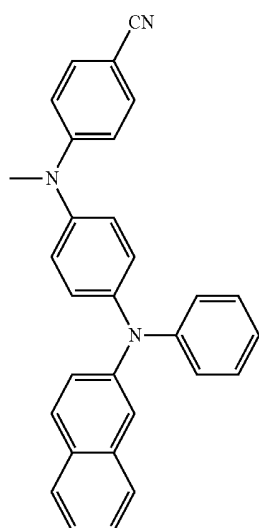


50

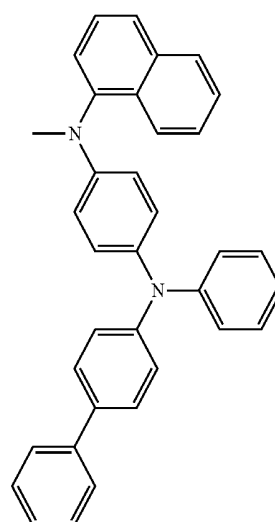


53

-continued

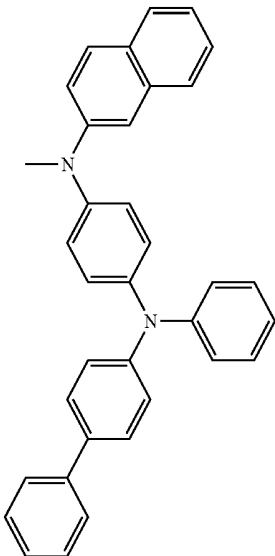


54

-continued

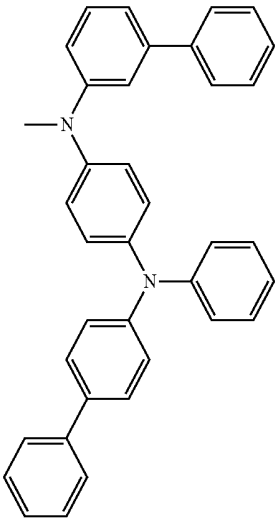


56

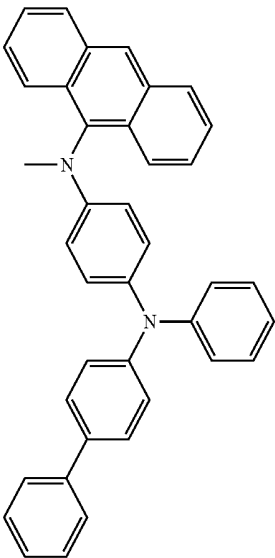


57


55

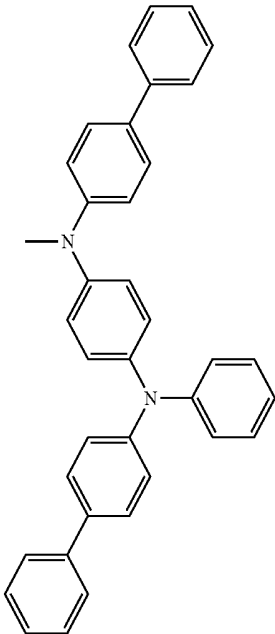

58

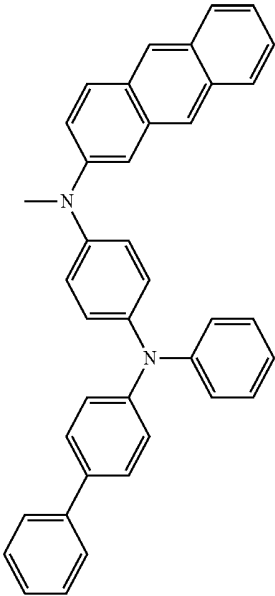


-continued

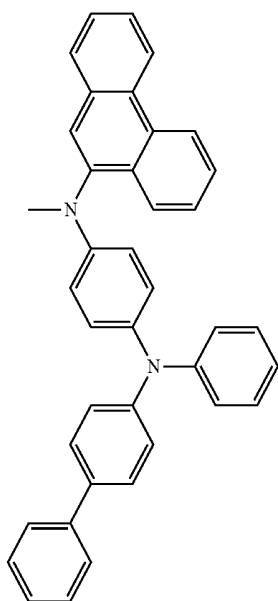


59


-continued

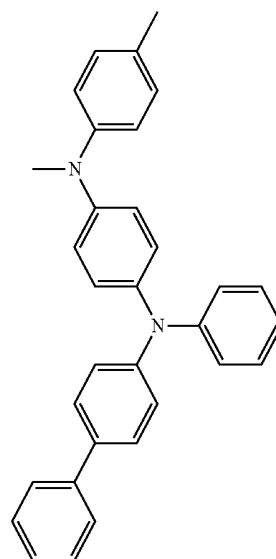


61

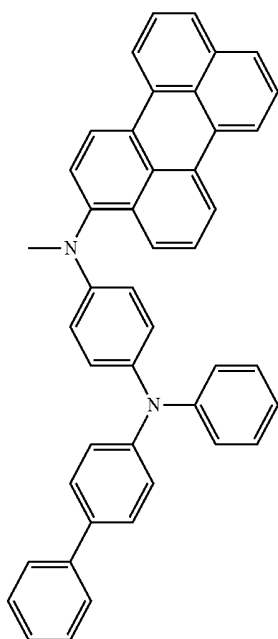

60

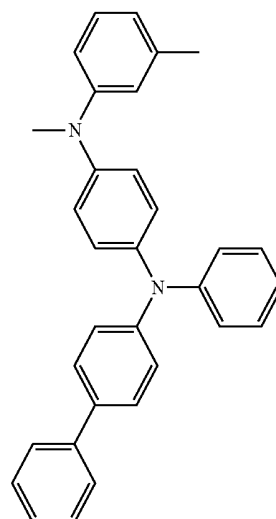


62

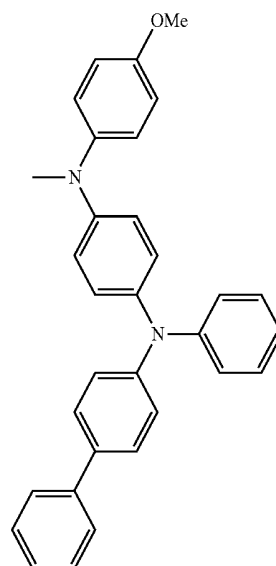


63

-continued

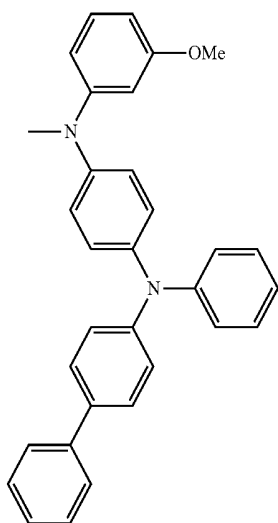


64


-continued

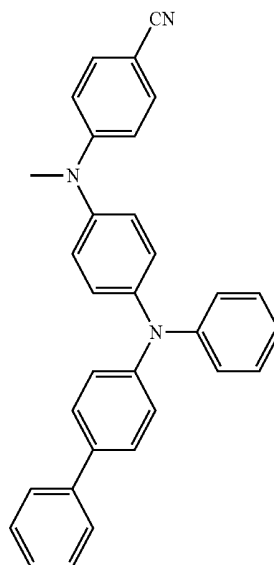


67

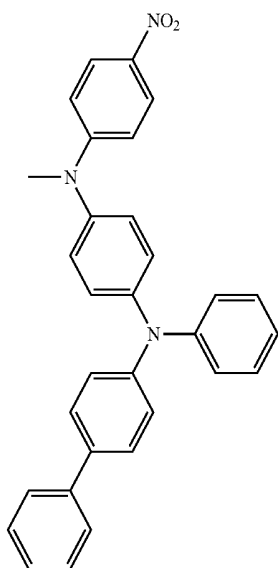


65

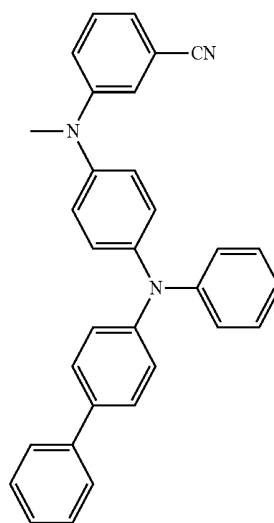

68

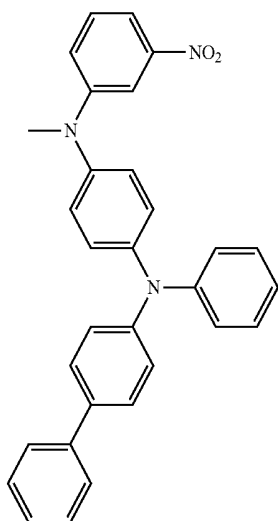


66

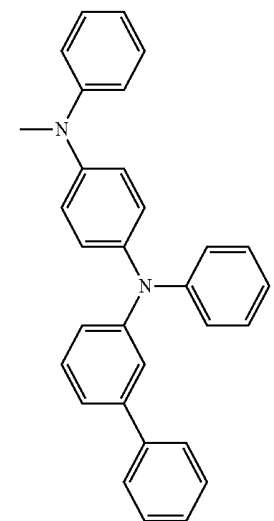


69

-continued

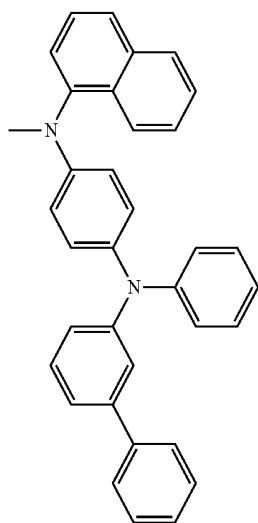


70

-continued

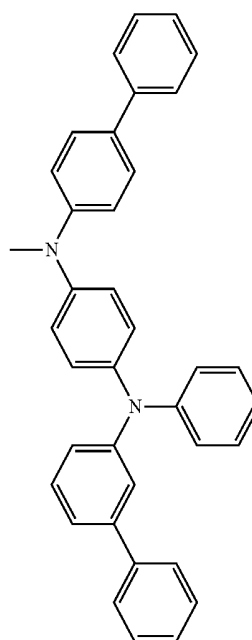


72


71

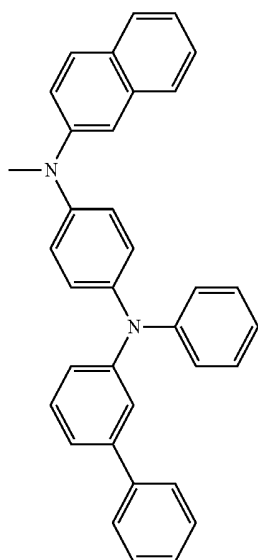

73

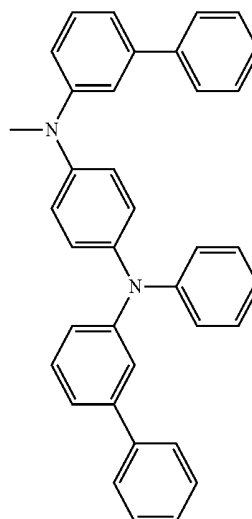


-continued

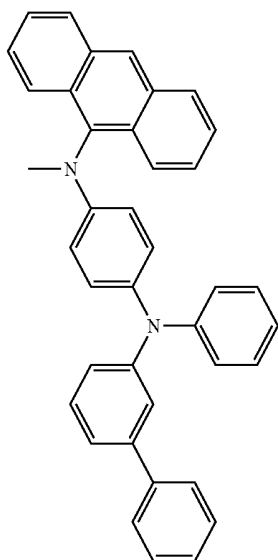


74

-continued

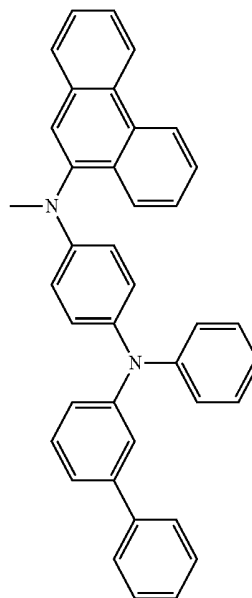


76


75

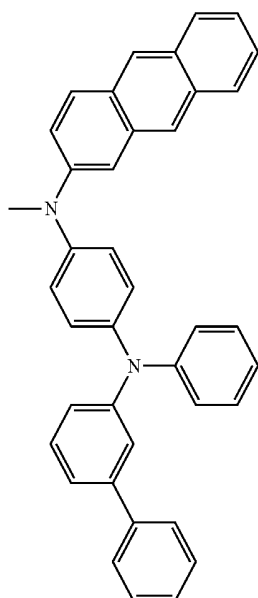

77

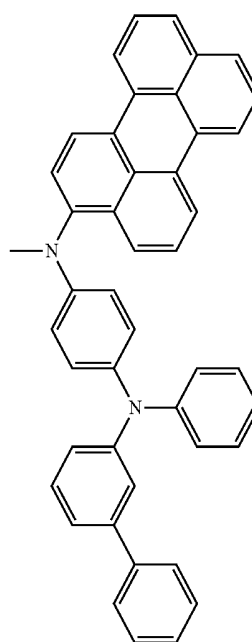


-continued

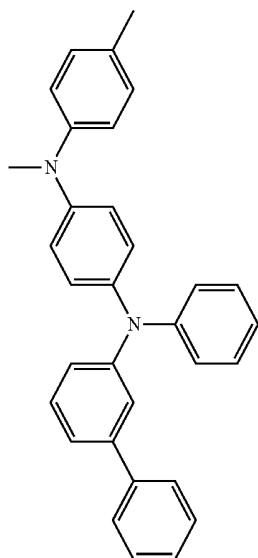


78


-continued

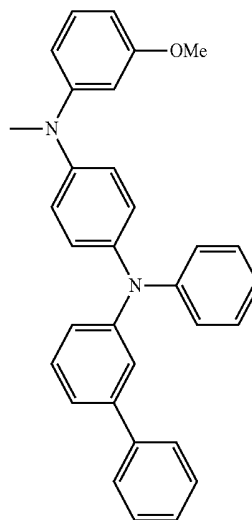


81




79

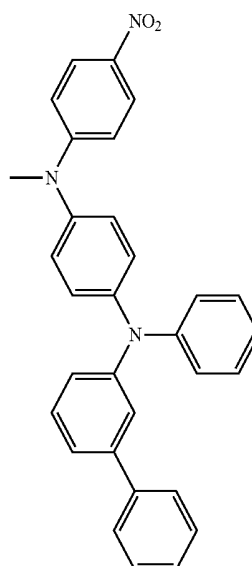

82

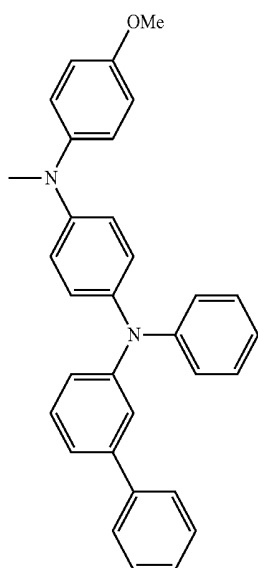


80

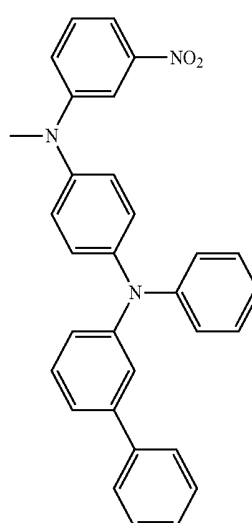


83

-continued

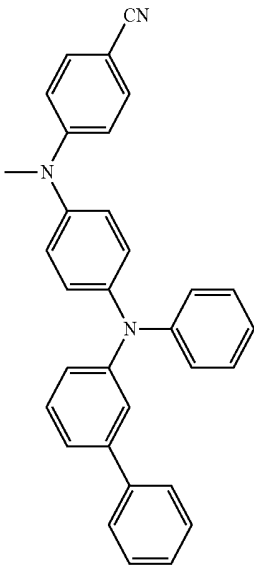


84


-continued

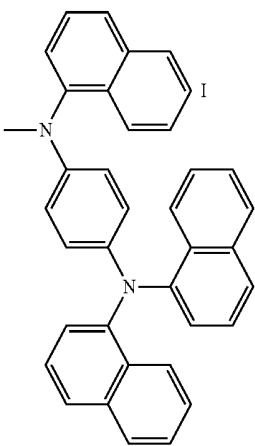


87

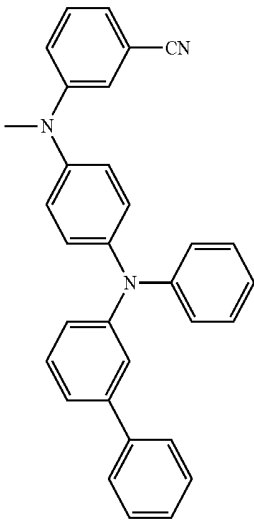


85

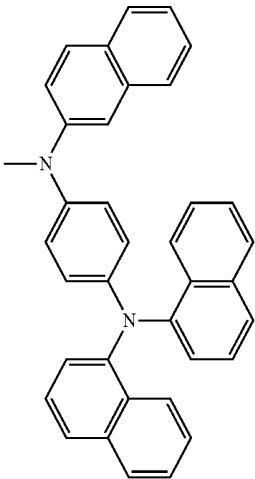

88

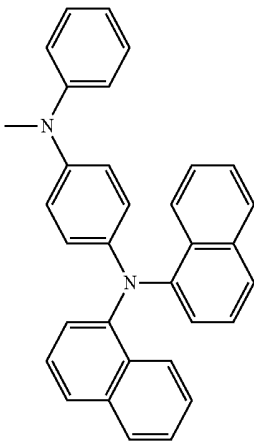


86

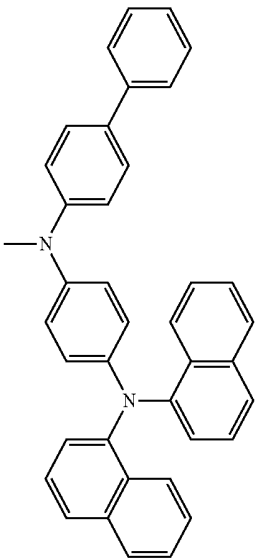


89

-continued

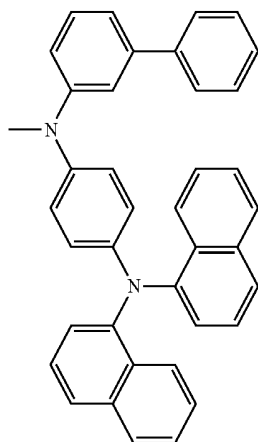


90

-continued

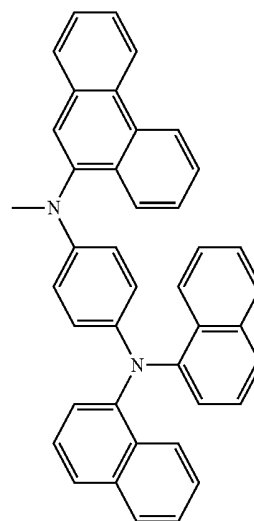


93


91

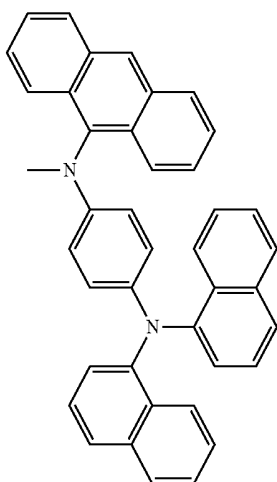


94

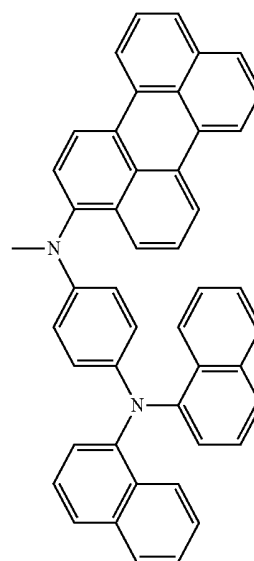


92

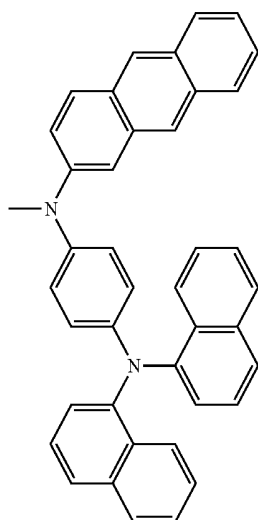

95

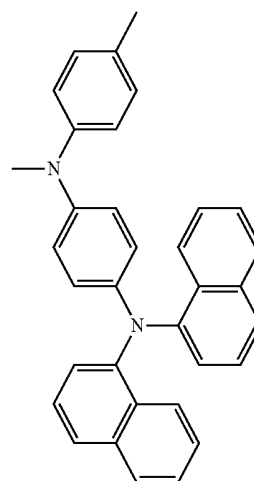


-continued

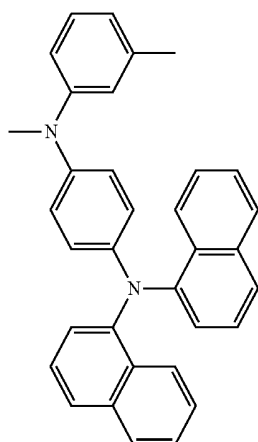


96

-continued

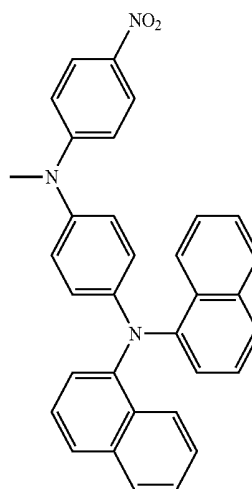


99


97

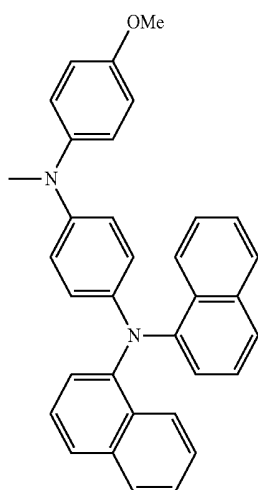


100

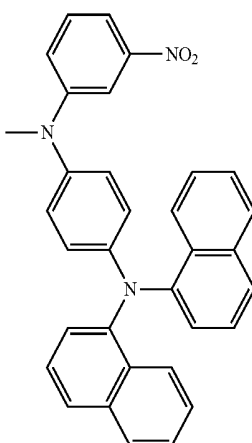


98

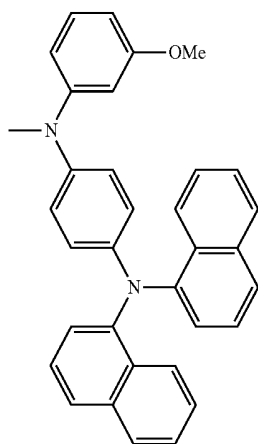

101

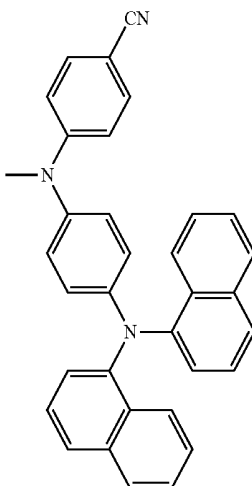


-continued

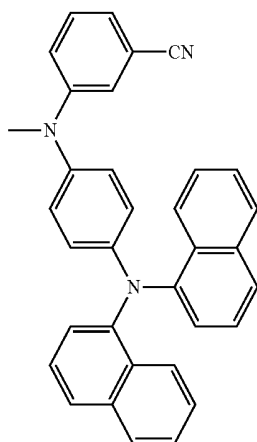


102


-continued

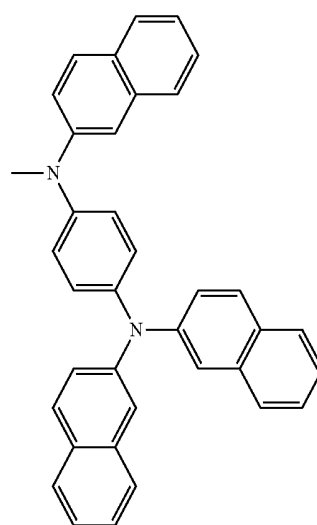


105

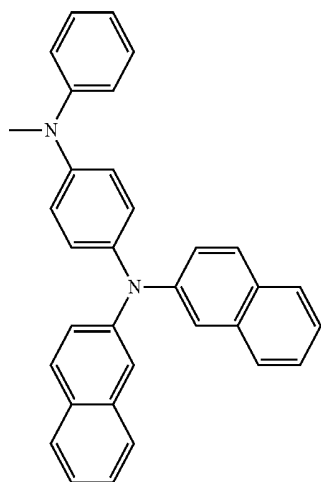


103

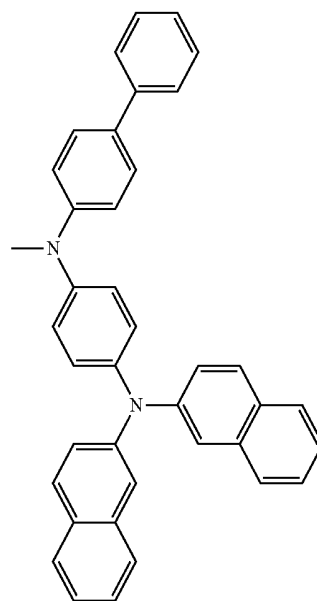

106

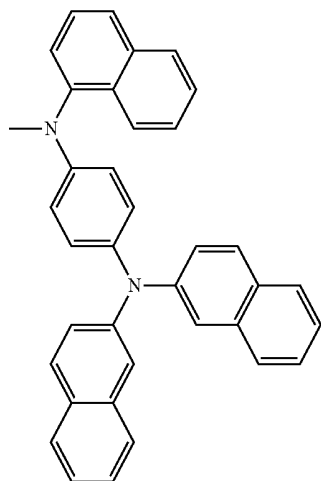


104

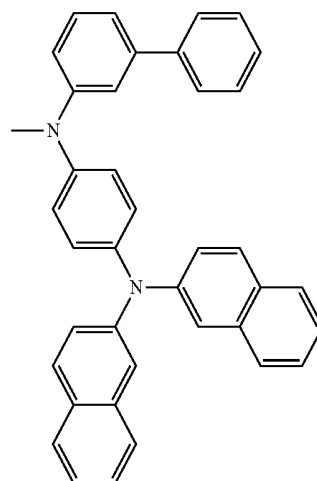


107

-continued

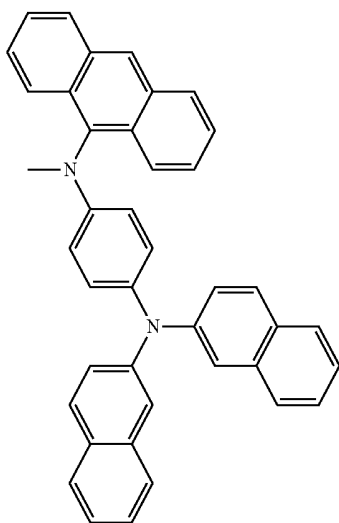


108

-continued

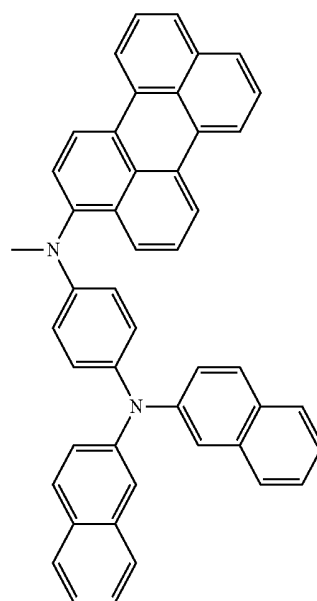


111


109

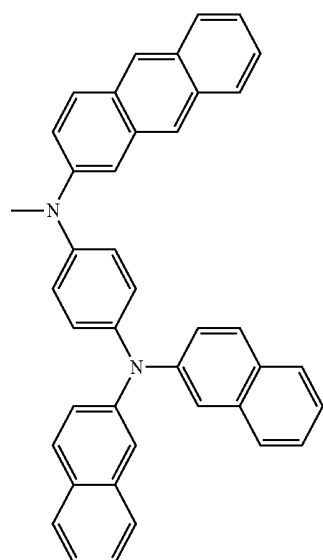

110

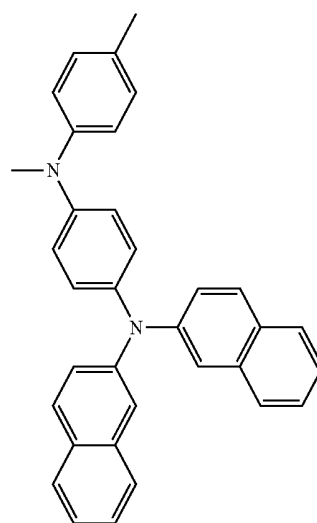


112

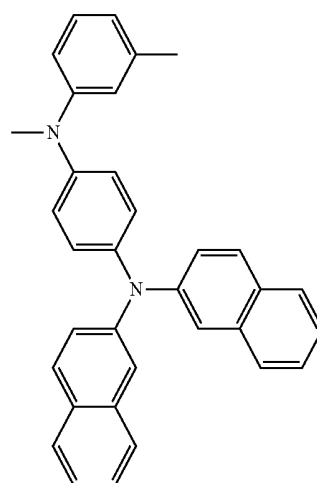


113


-continued

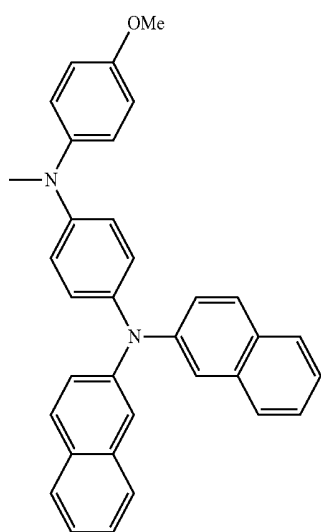


-continued

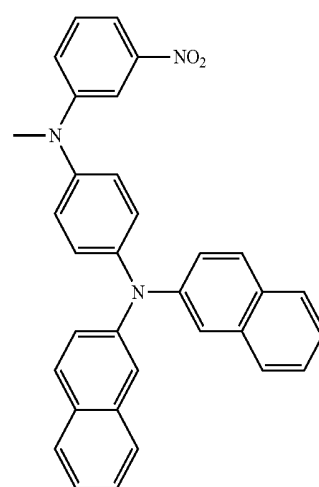


115

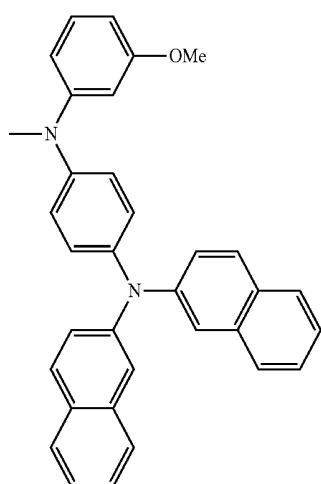


118

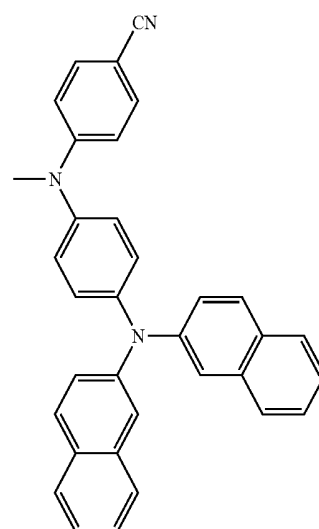


116

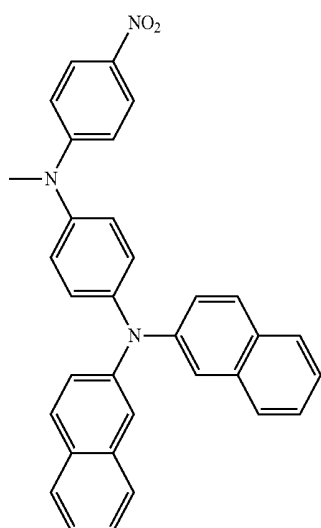


119

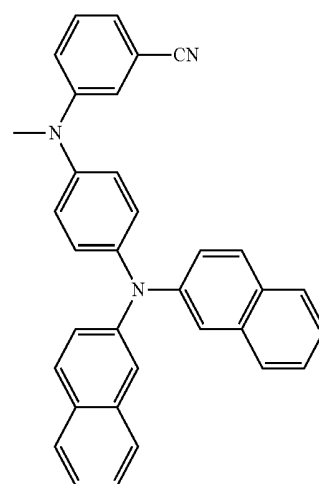


-continued

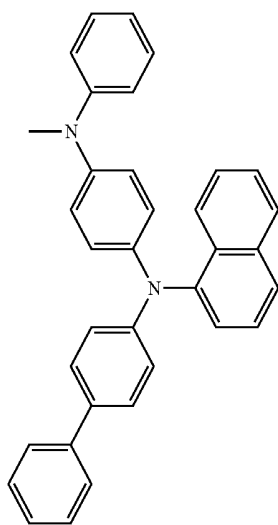

120

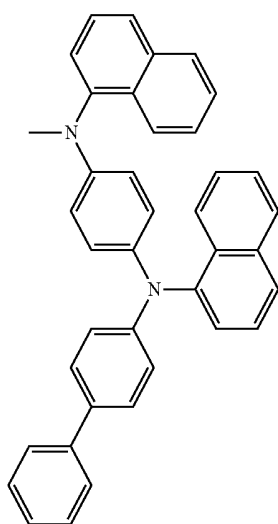


121

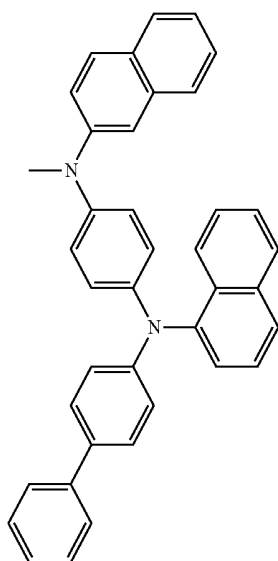


122

-continued

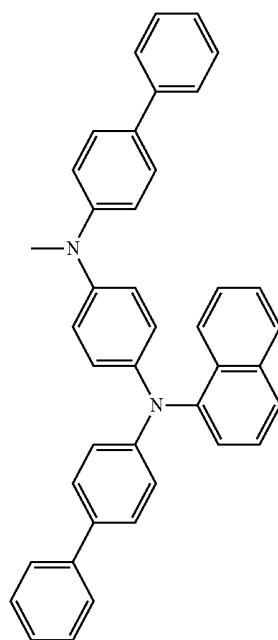


123

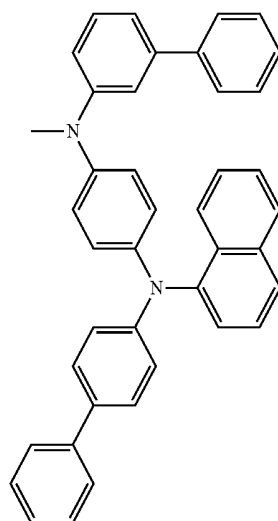


124

-continued

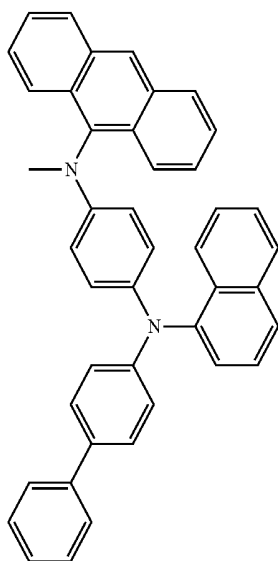


125


-continued

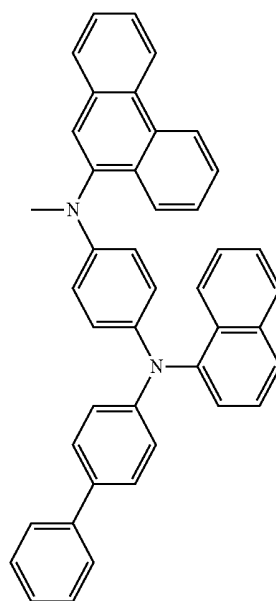

127

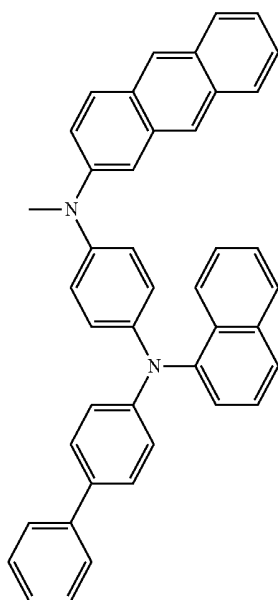


126

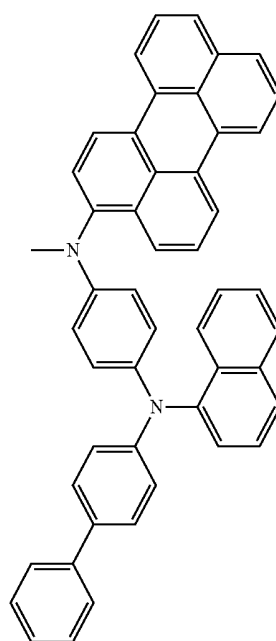


128

-continued

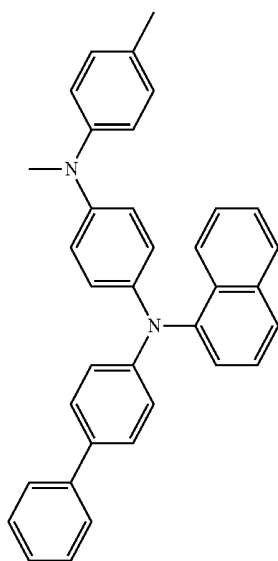


129


-continued

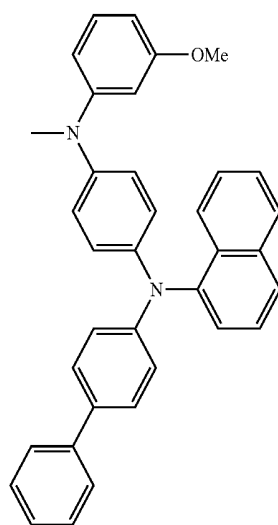


132

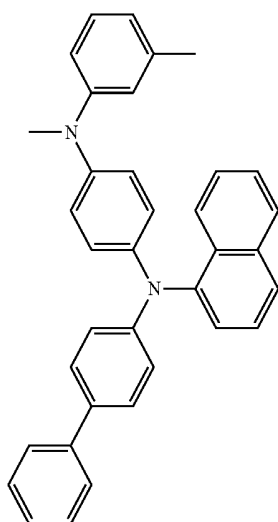


130

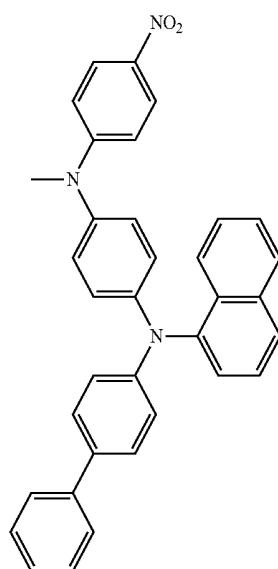

133



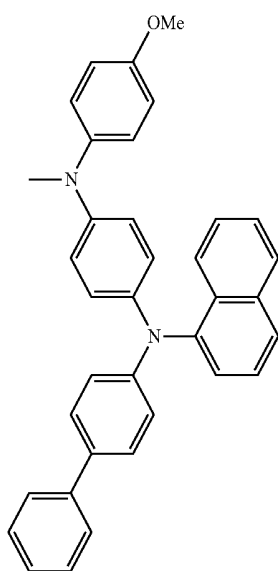


131



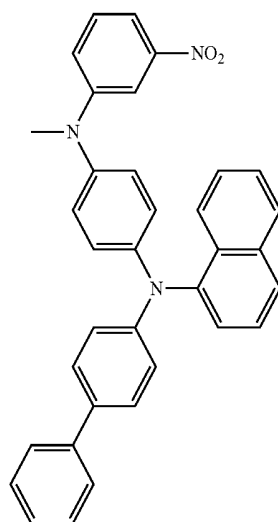


134


-continued

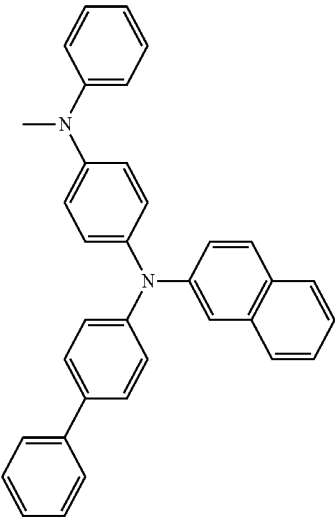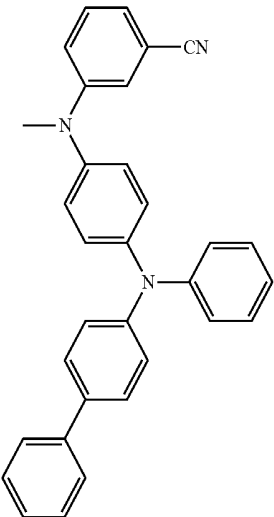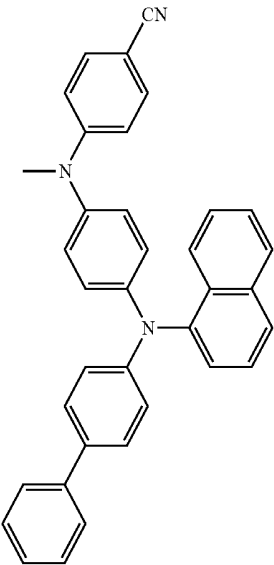


-continued

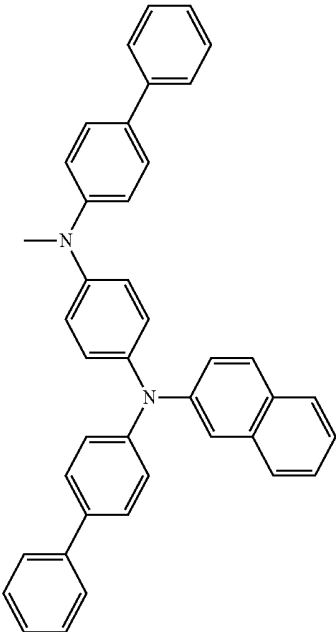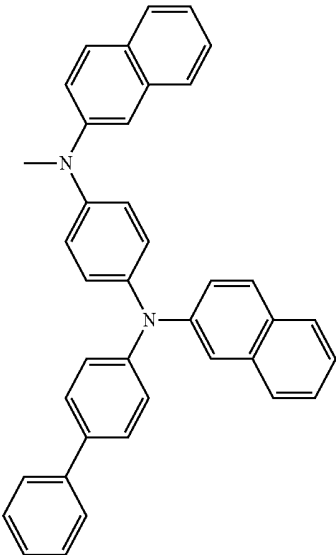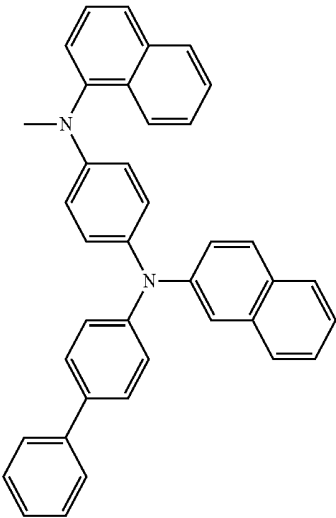


-continued

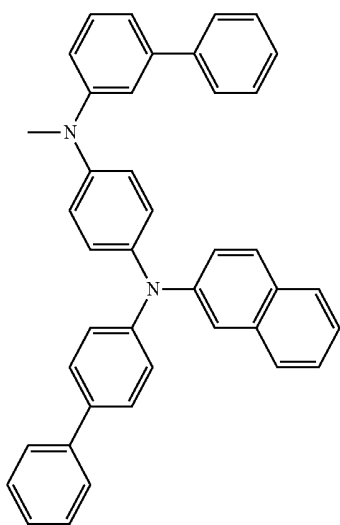

141

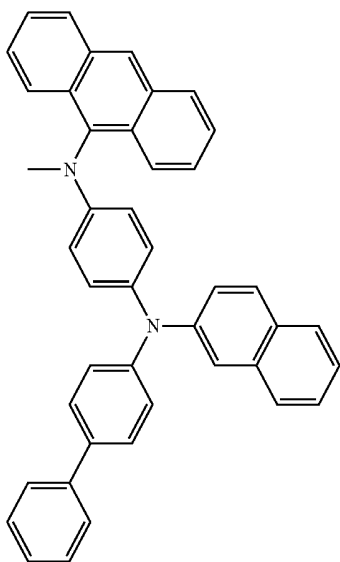


142

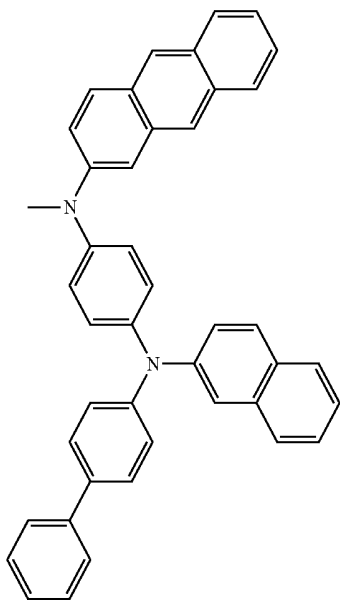


143

-continued

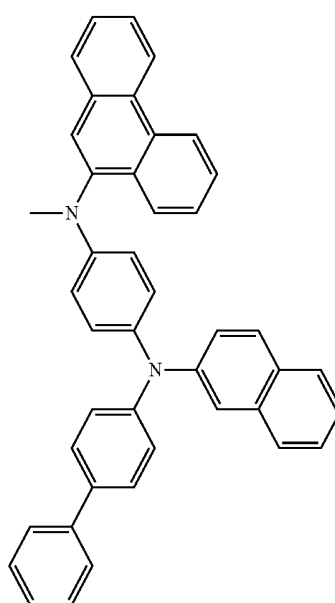


144

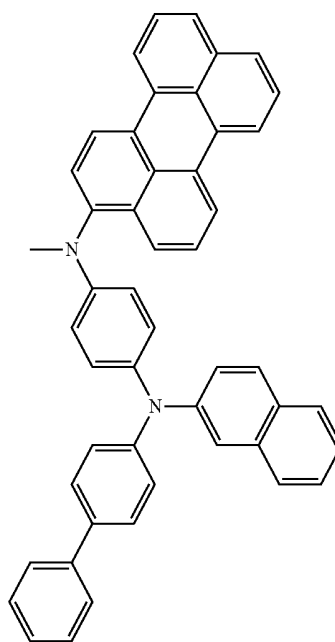


145

-continued

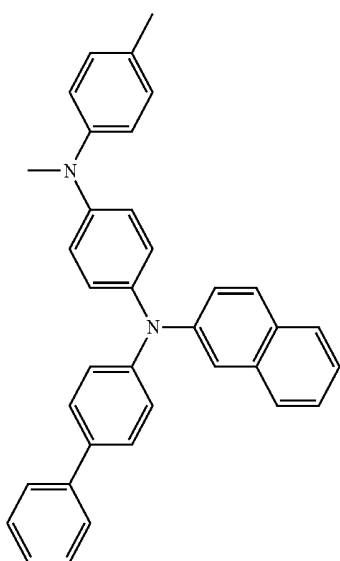


146


-continued

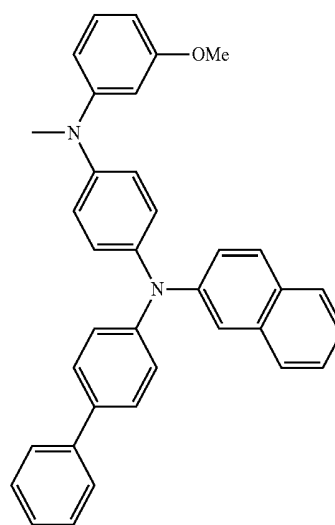


149

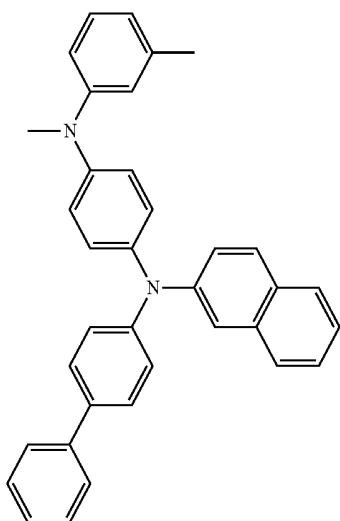


147

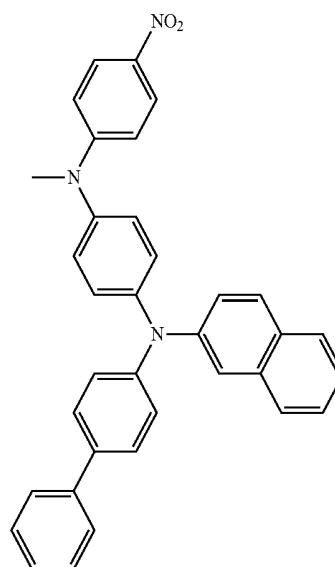

150

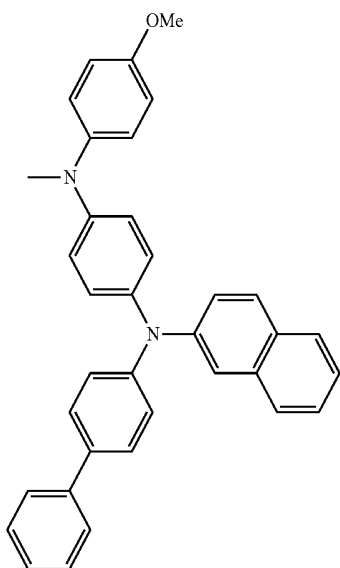


148

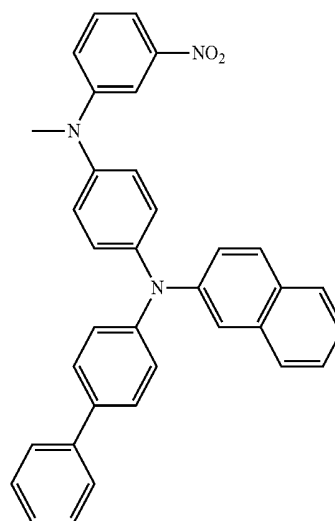


151


-continued

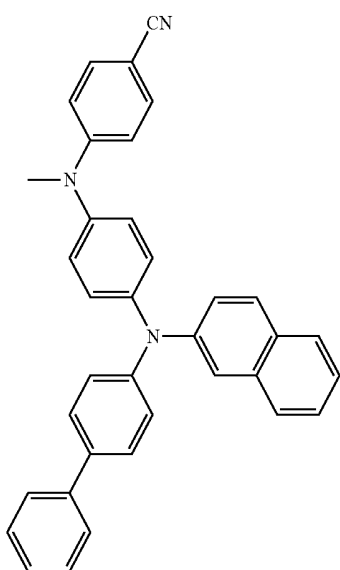

152

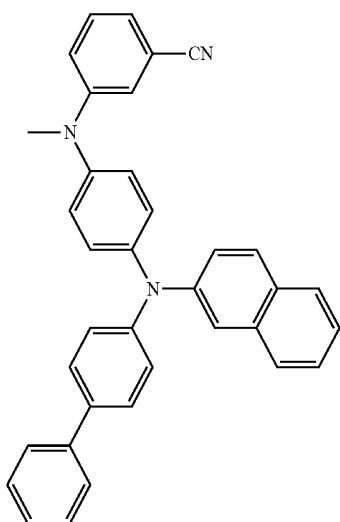


153

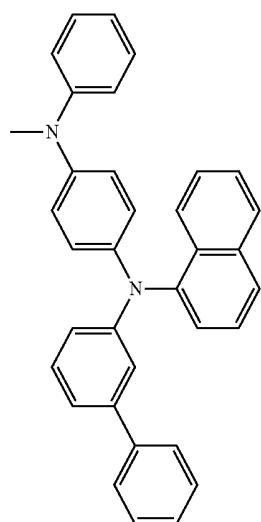


154


-continued

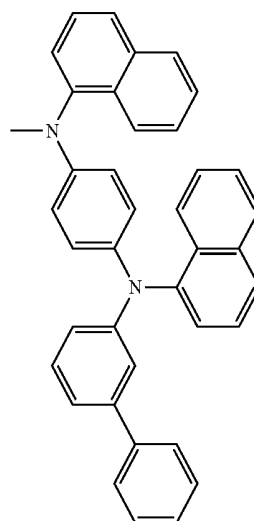

155

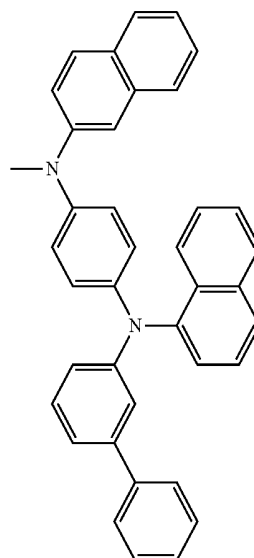


156

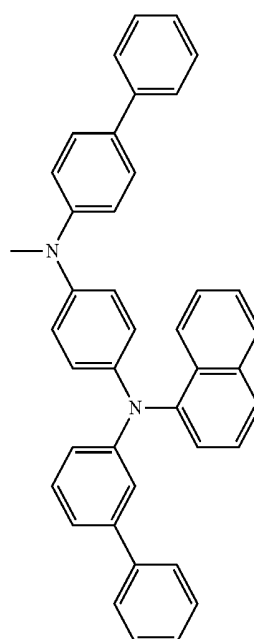


157


-continued

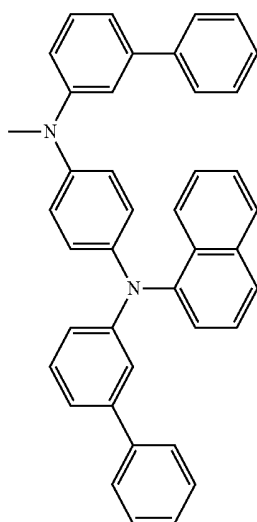

158

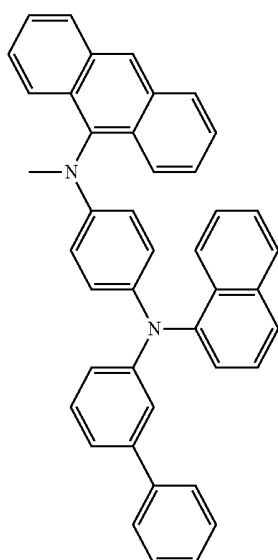


159

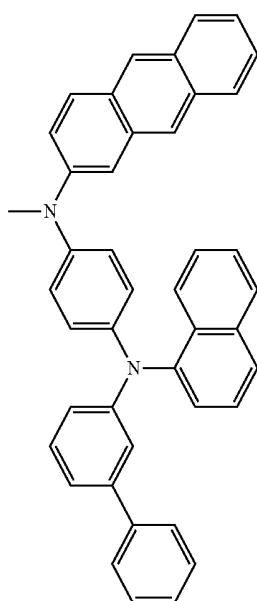


160

-continued

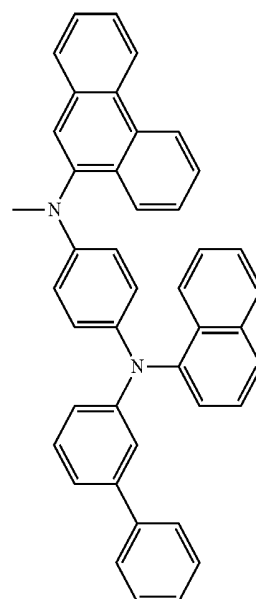


161

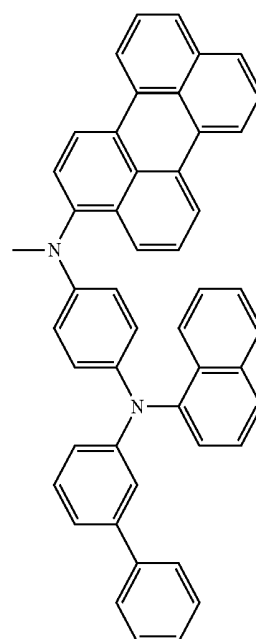


162

-continued

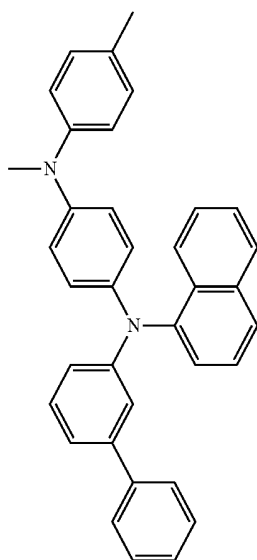


163


-continued

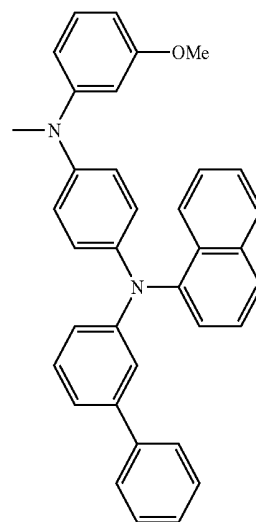


166

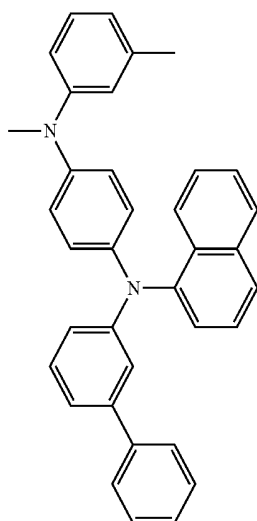


164

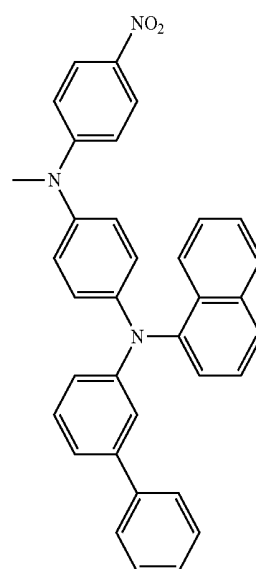

167

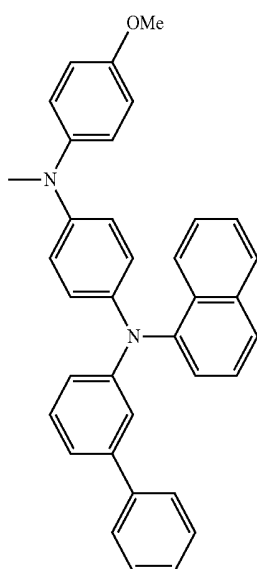


165

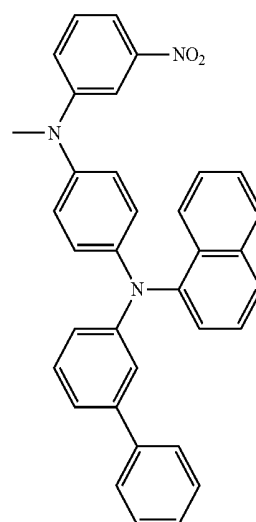


168


-continued

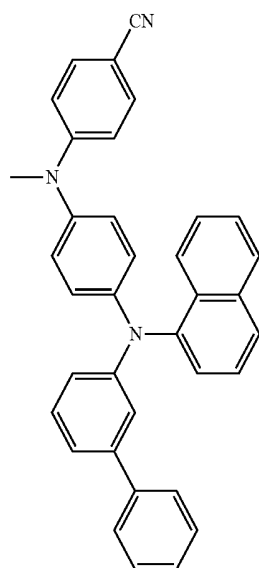

169

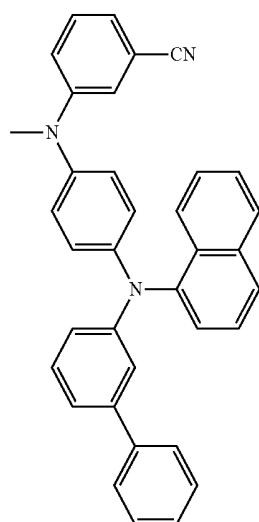


170

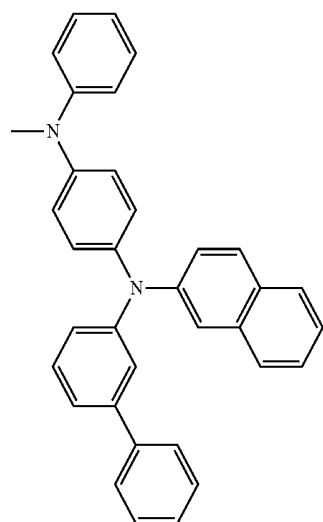


171


-continued

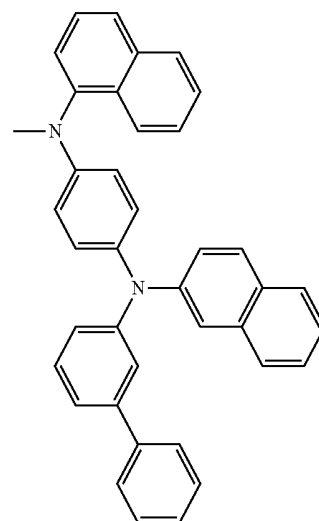

172

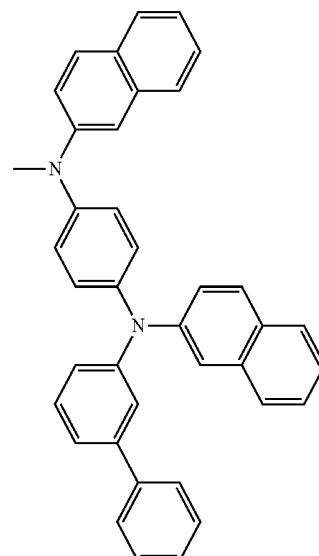


173

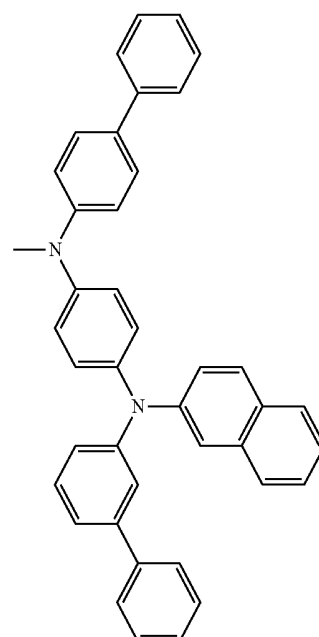


174

-continued

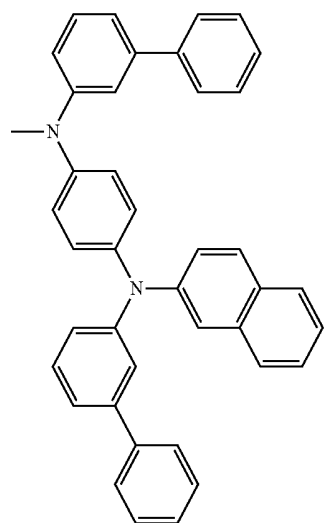


175

-continued

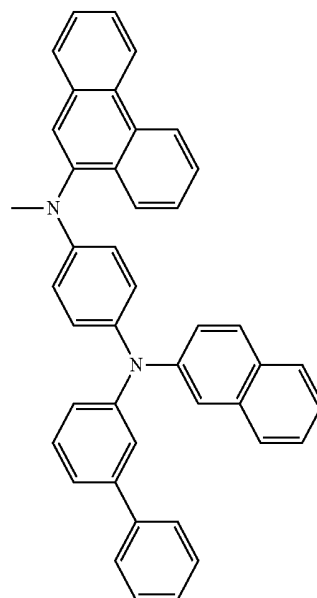


178


176

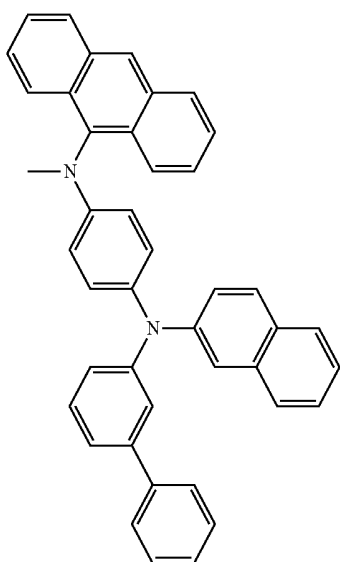


177

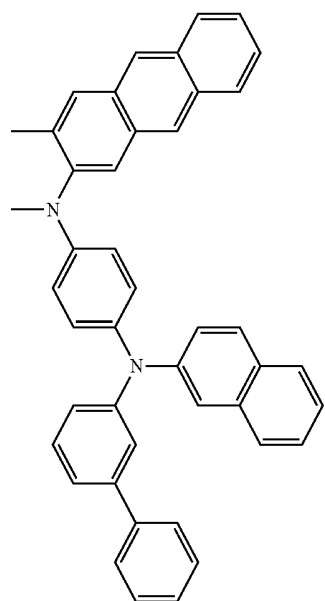

179

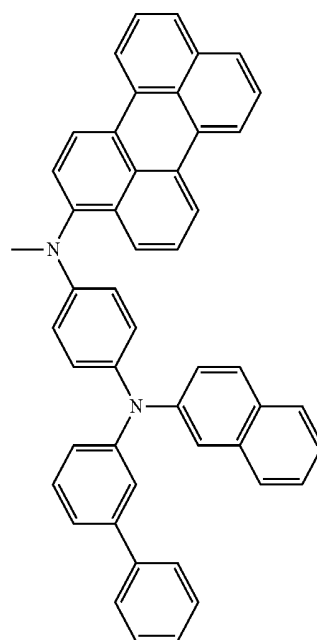


-continued

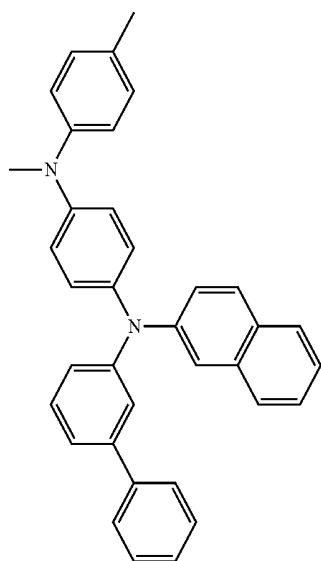


180


-continued

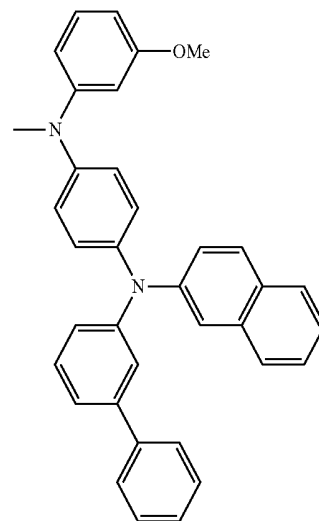


183

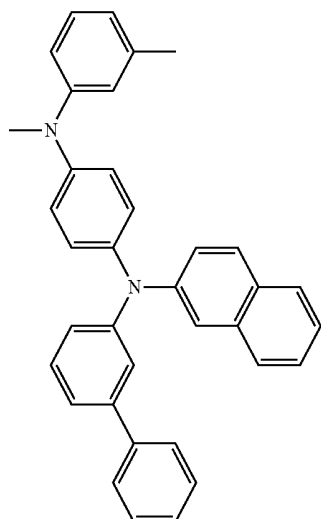


181

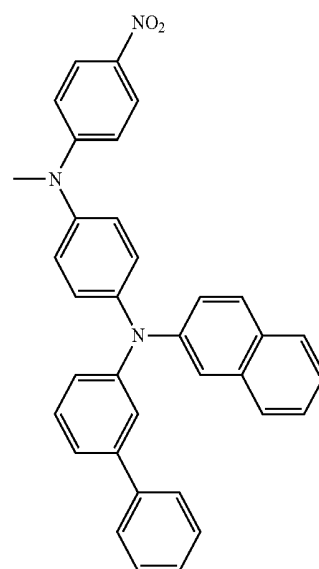

184

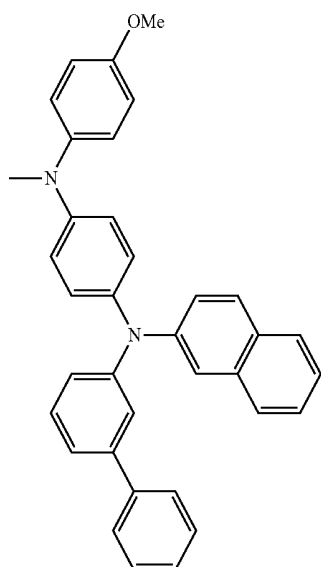


182

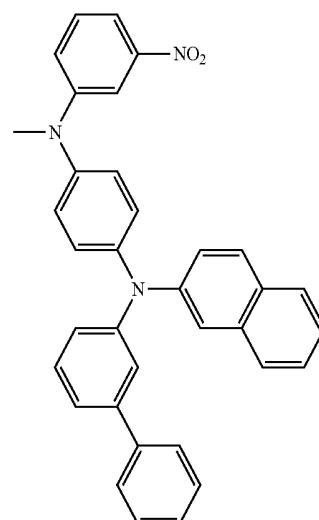

185

-continued

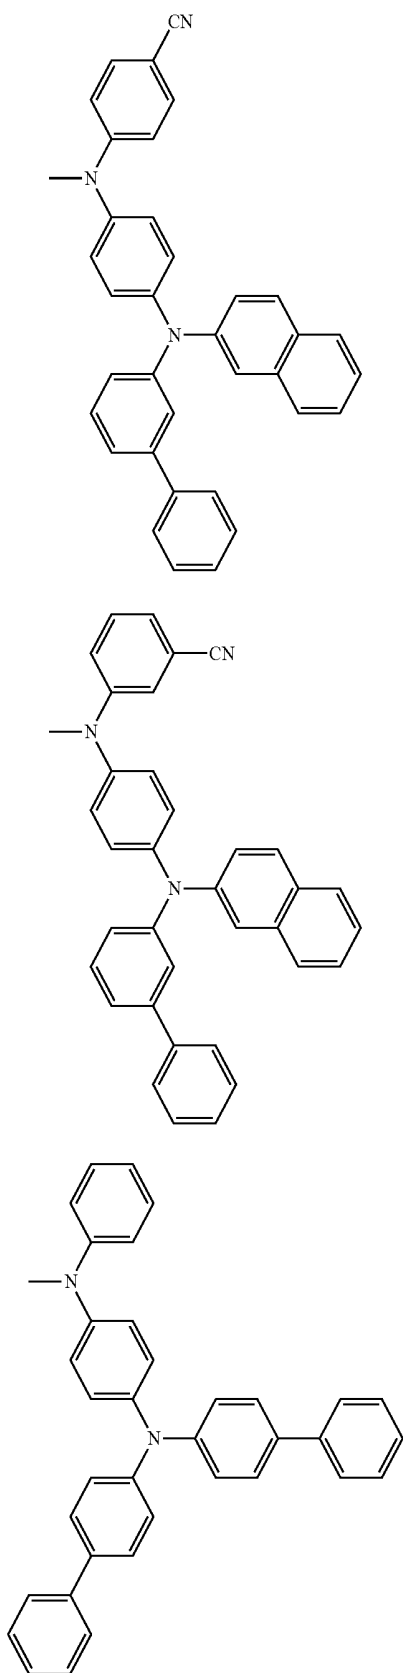


186

187

188

-continued

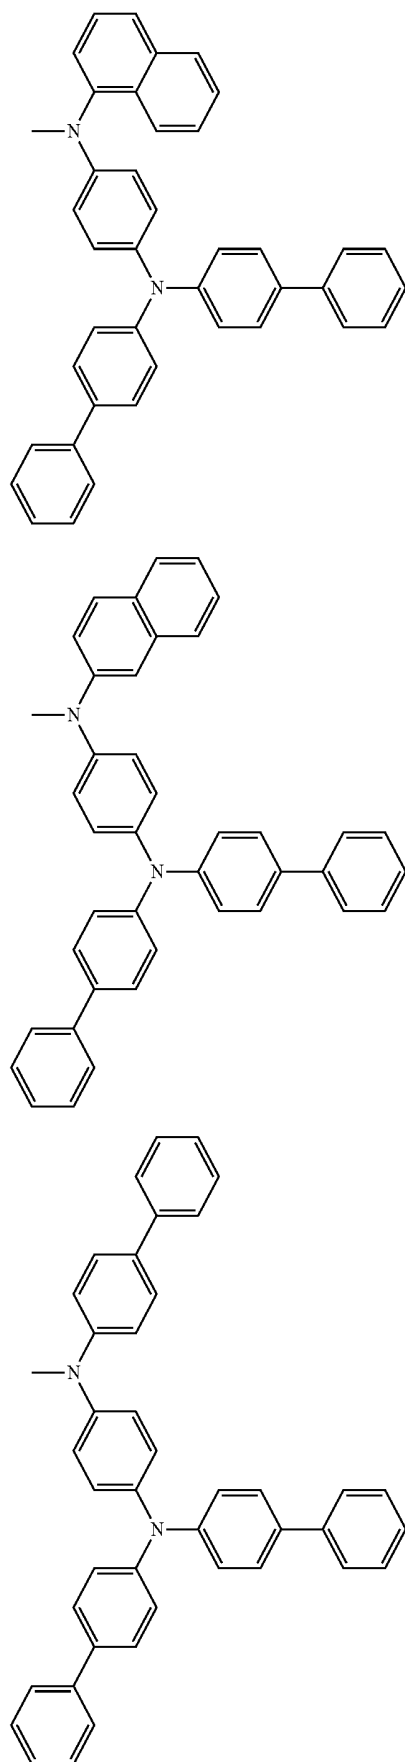


189

190


191

-continued

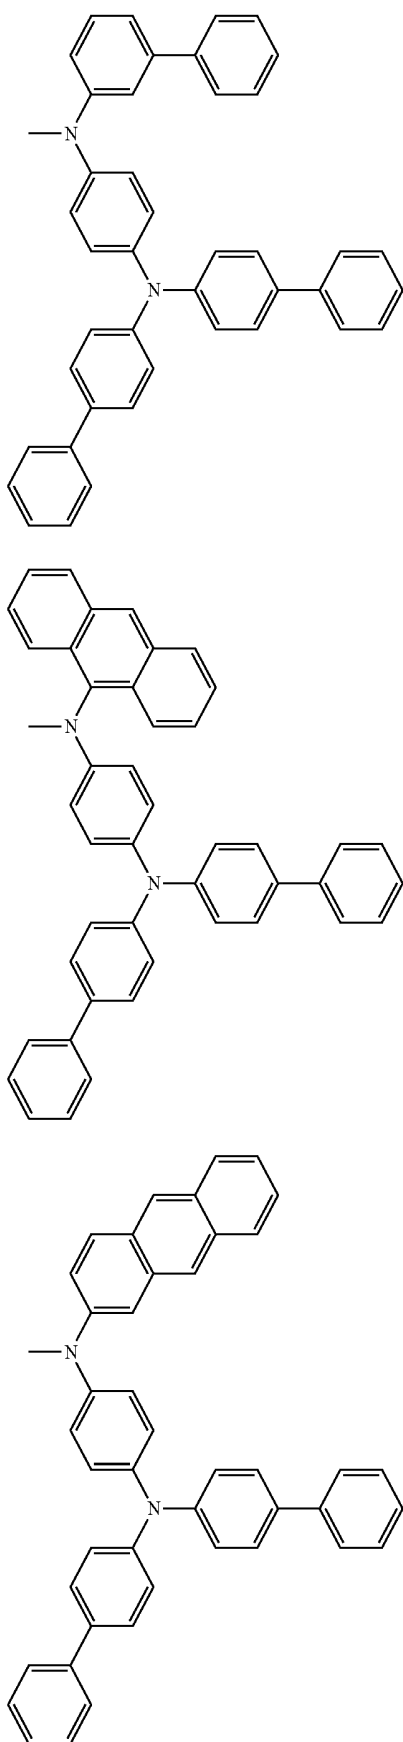

192


-continued

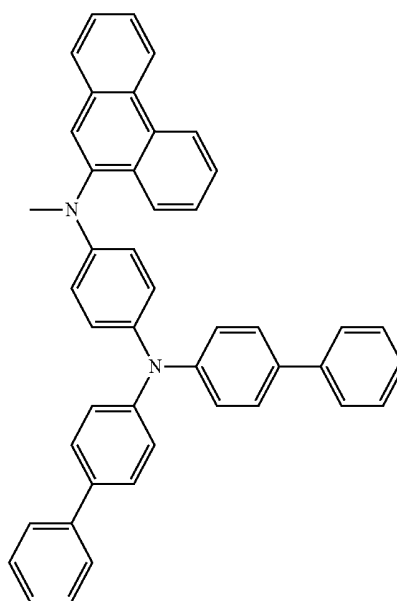

195


193

194

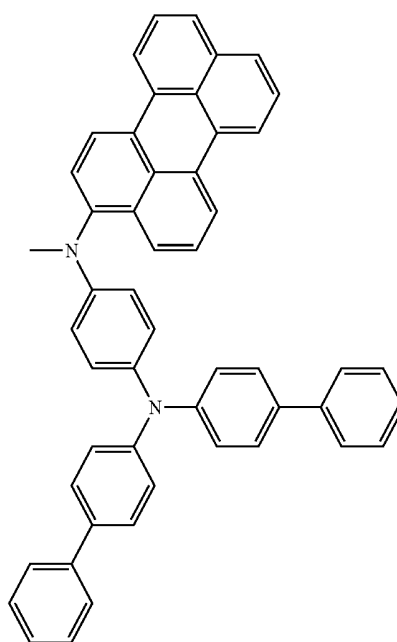


196

-continued

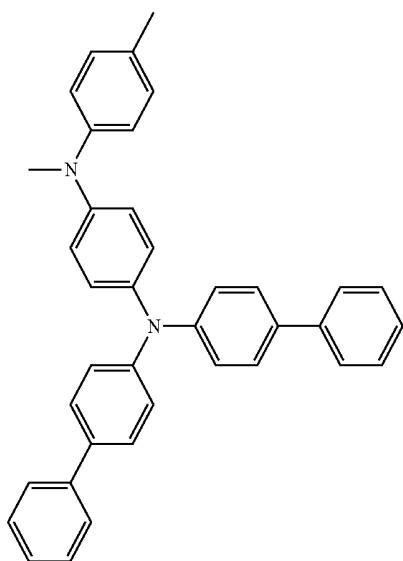


197


-continued

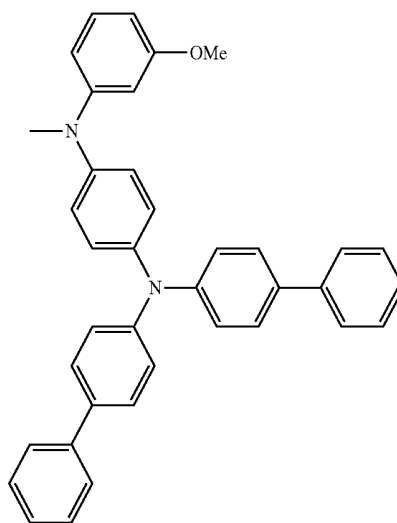


200

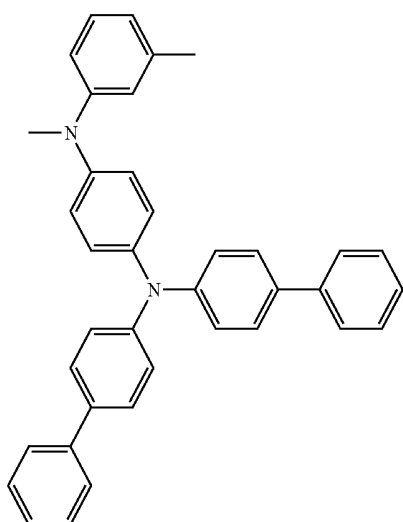


198

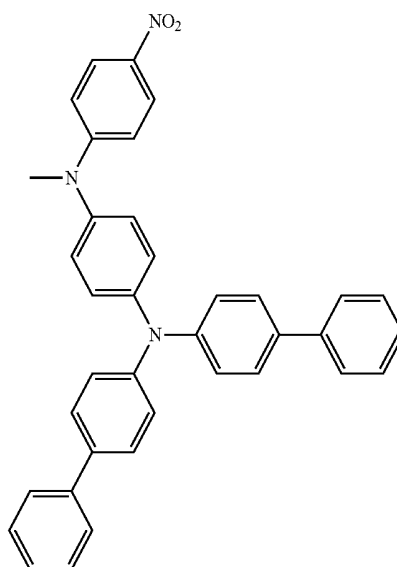

201



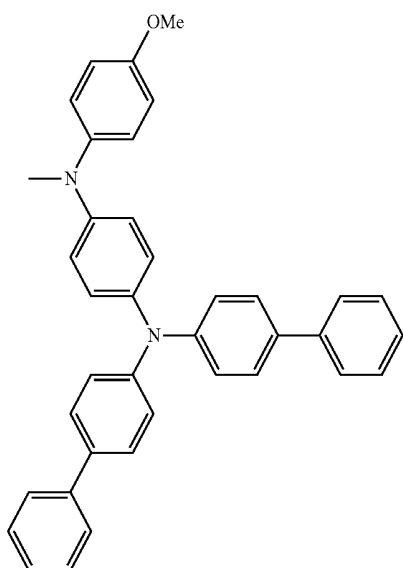


199



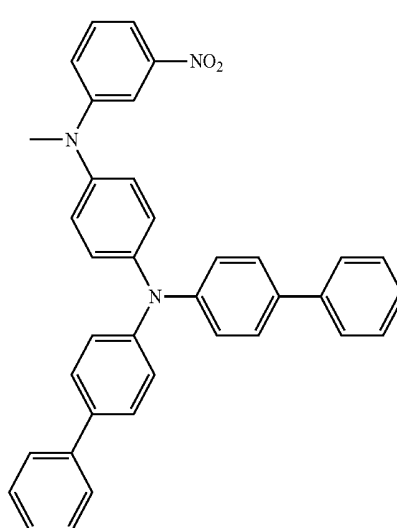


202


-continued

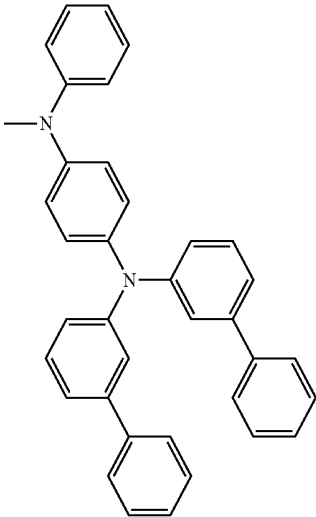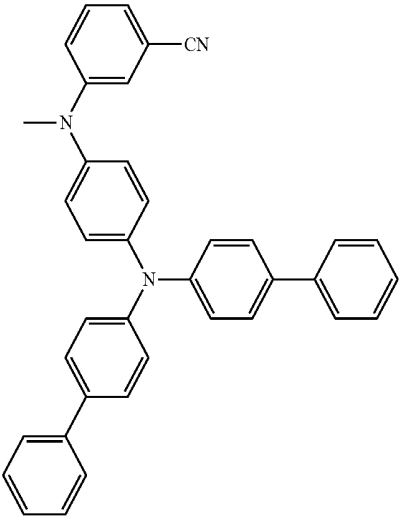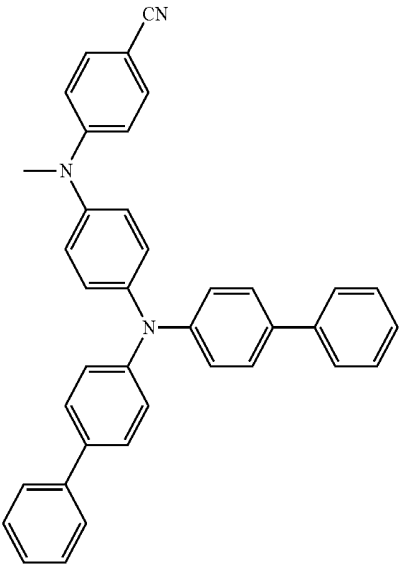

-continued

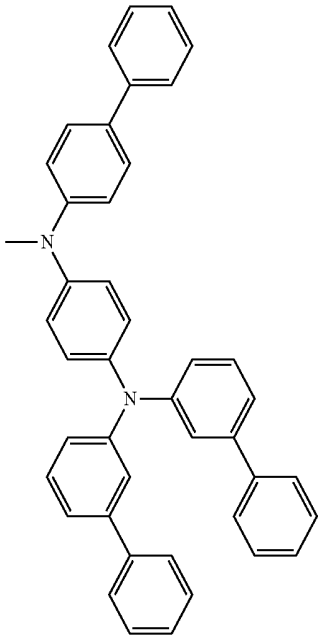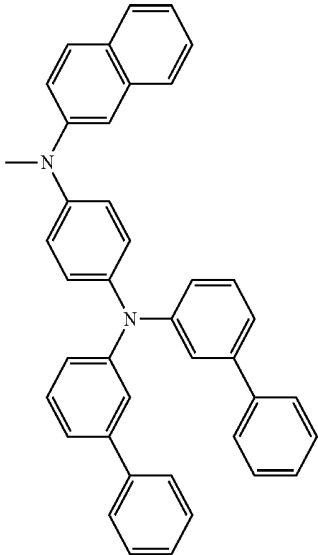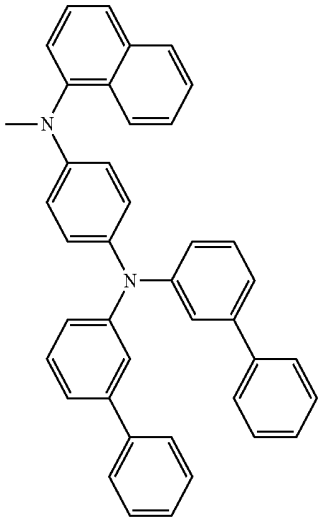


-continued

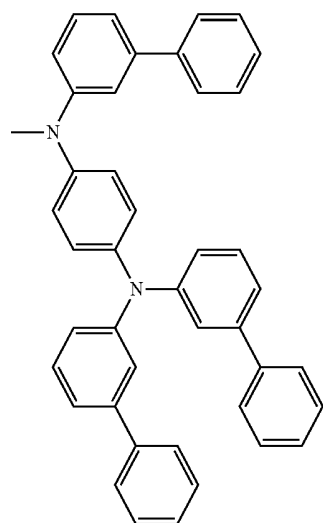


209


-continued

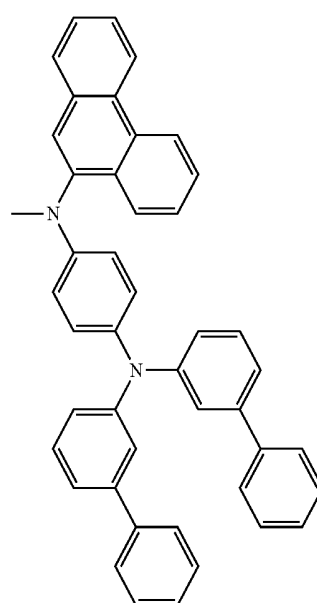


212

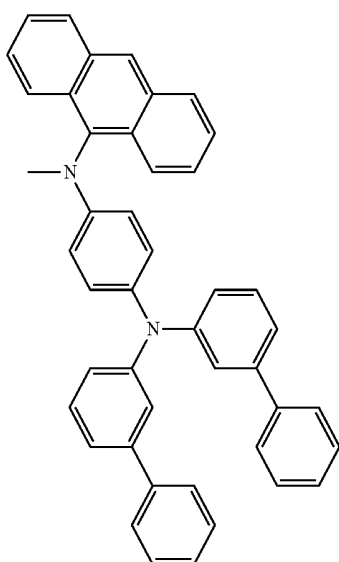

210

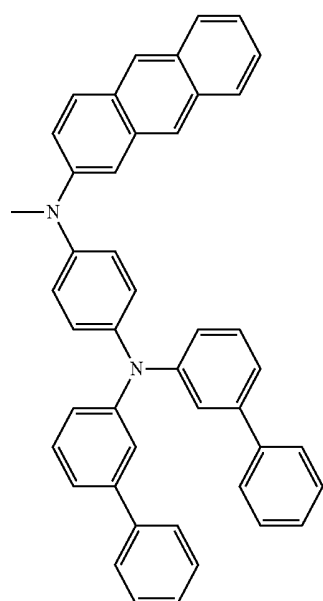


211

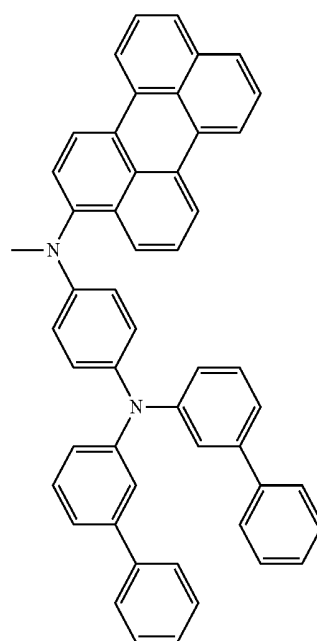


213

-continued

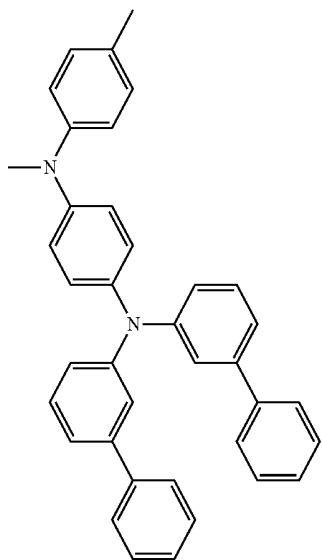


214


-continued

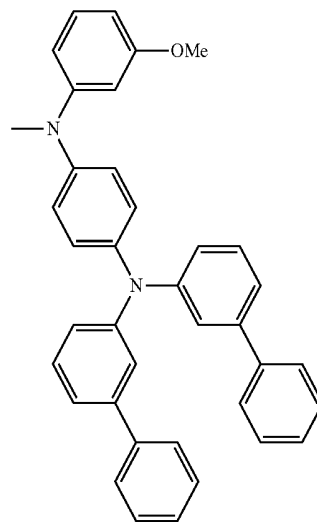


217

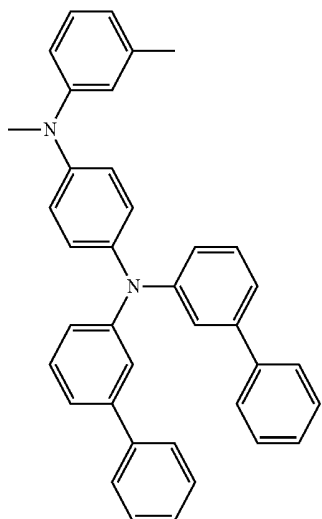


215

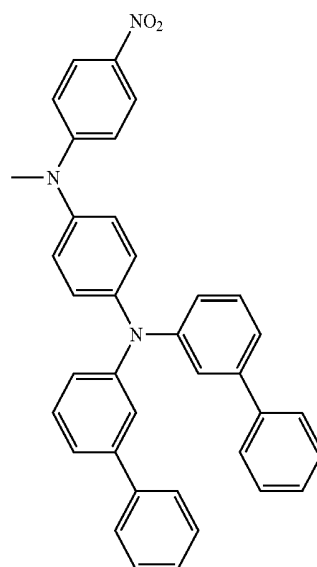

218

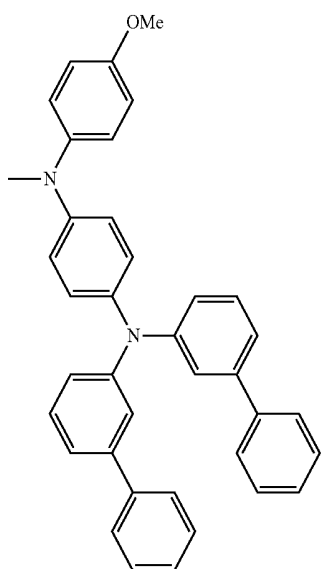


216

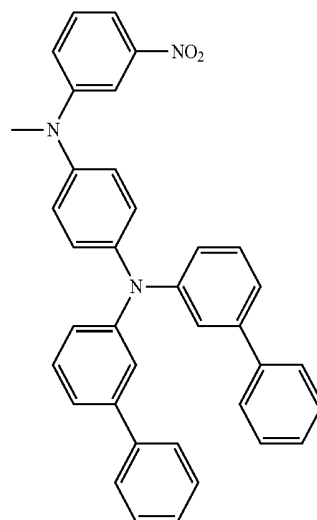


219

-continued

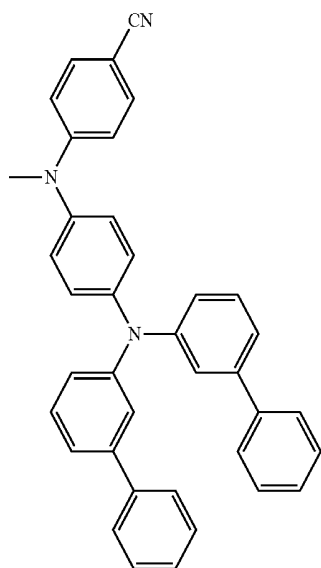


220


-continued

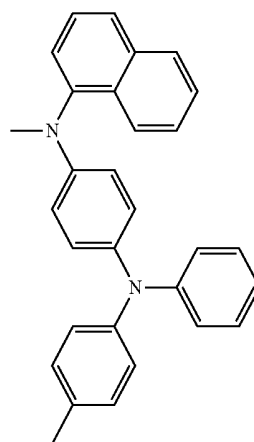


223

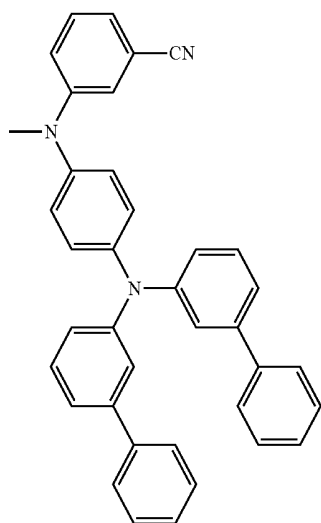


221

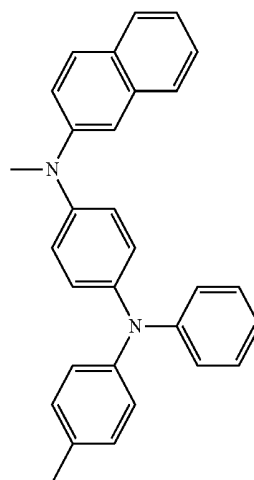

224

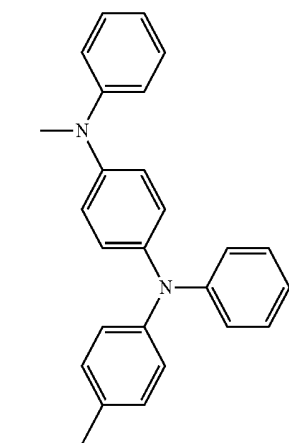


222

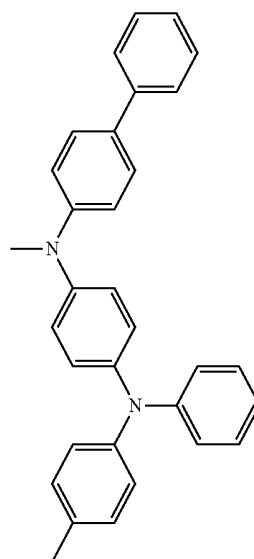


225

-continued

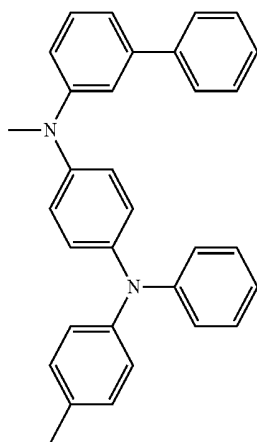


226

-continued

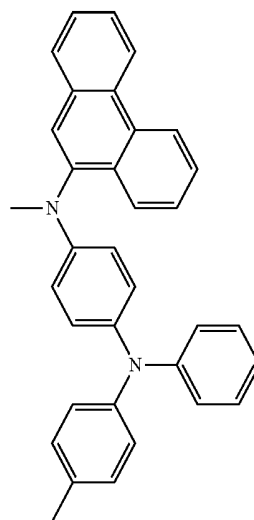


229


227

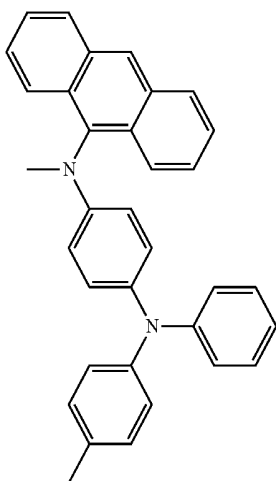


230

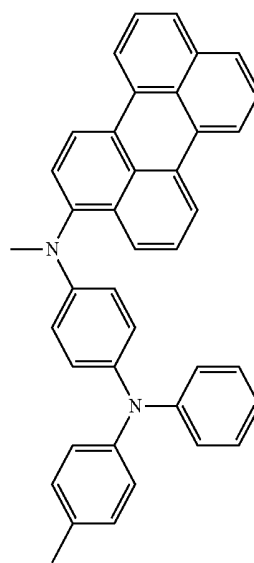


228

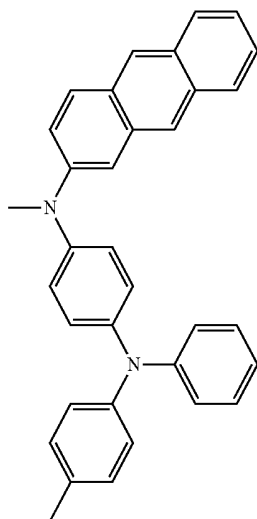

231

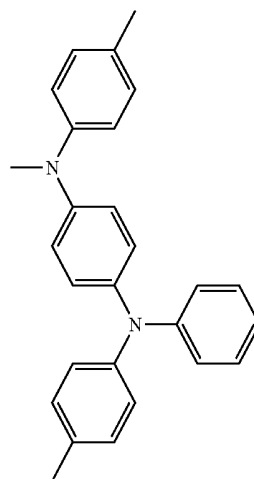


-continued

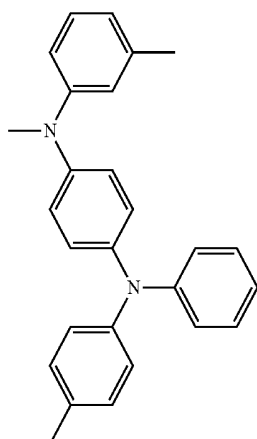


232


-continued

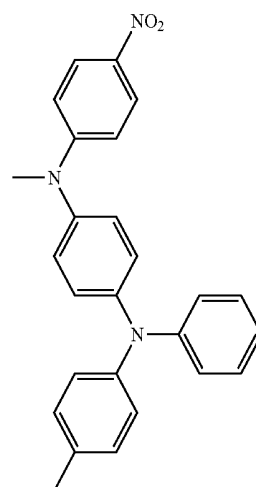


235

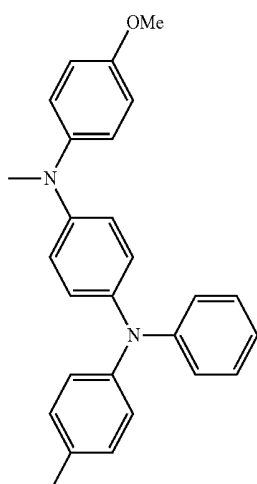


233

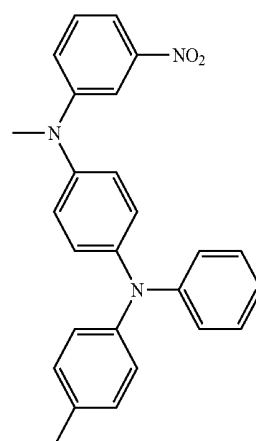

236

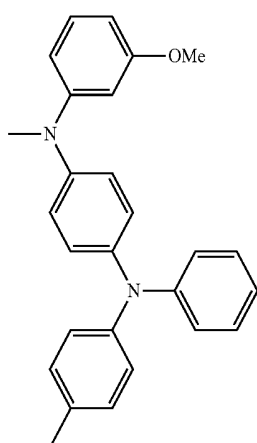


234

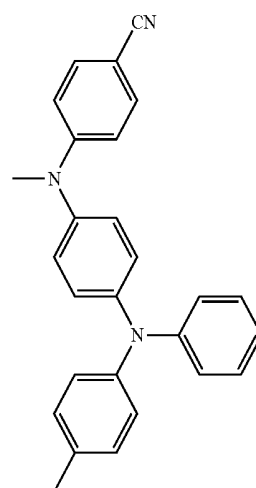


237

-continued

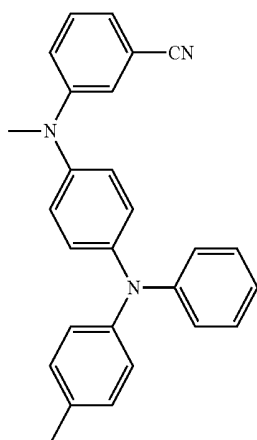


238


-continued

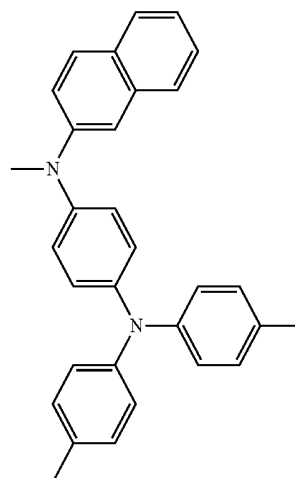


241

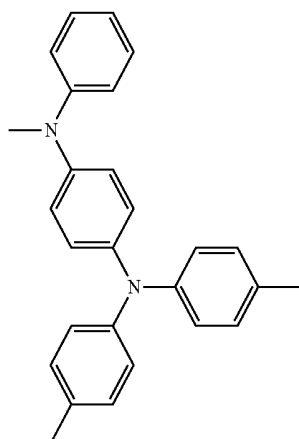


239

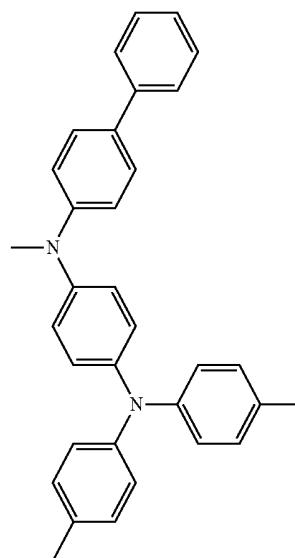

242

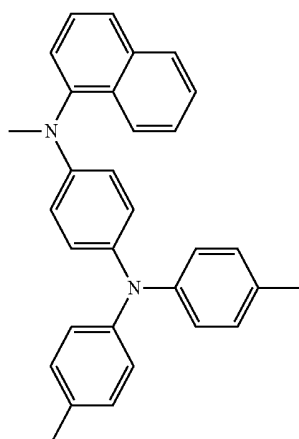


240

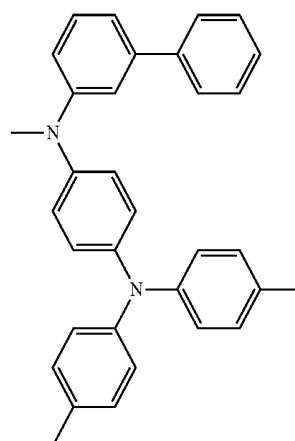


243

-continued

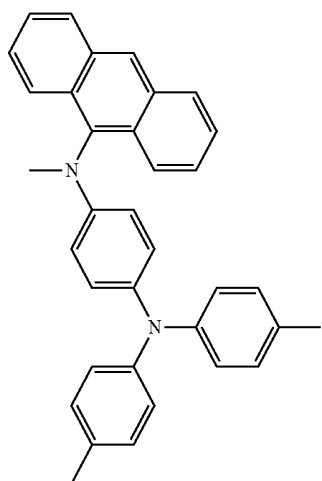


244


-continued

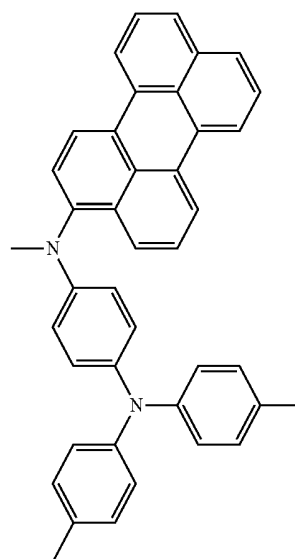


247

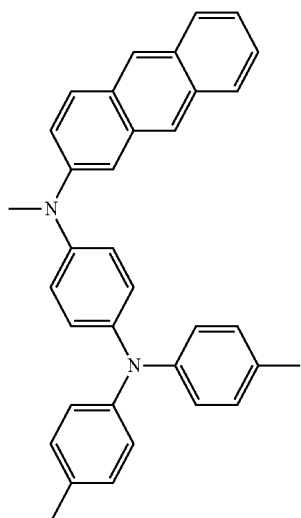


245

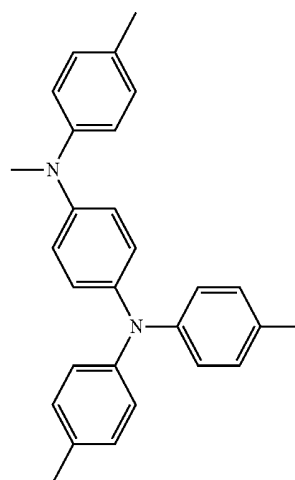

248

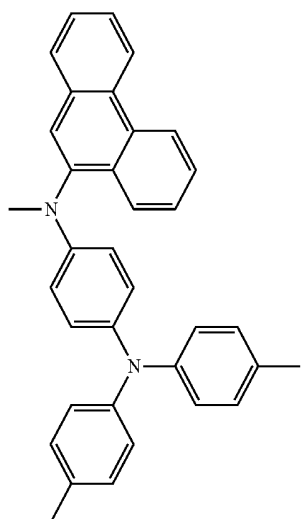


246

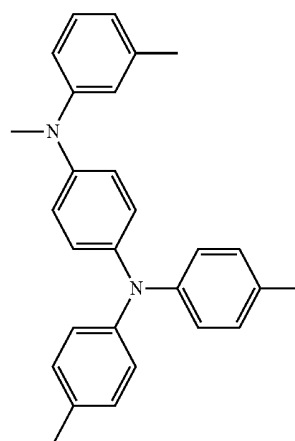


249


-continued

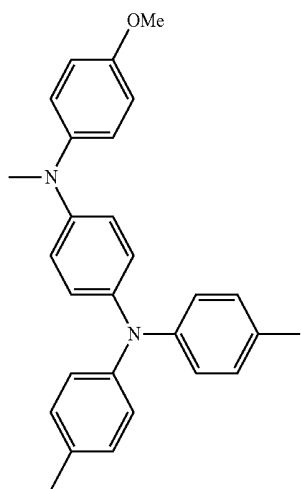


-continued

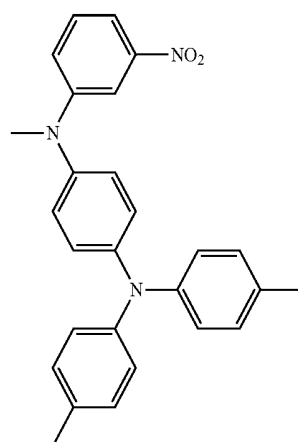


251

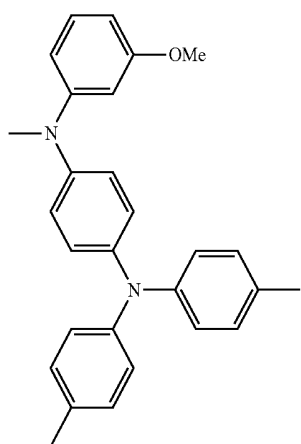


254

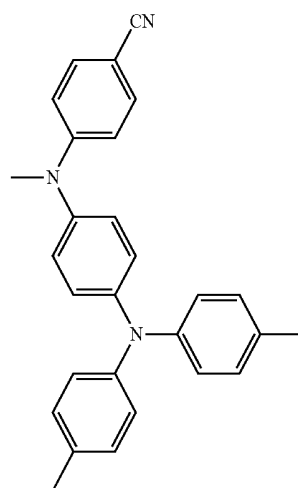




252

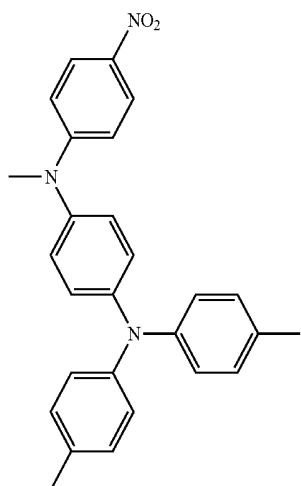




255

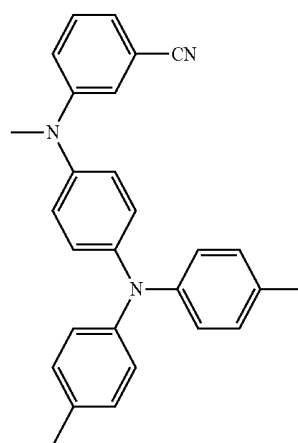


-continued

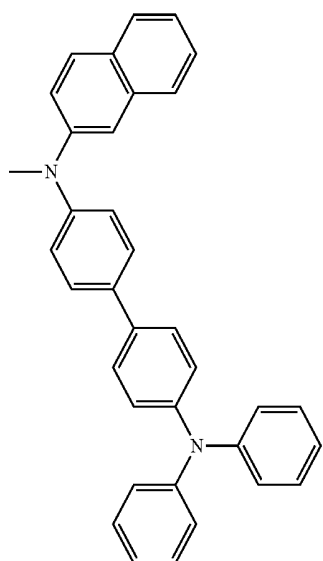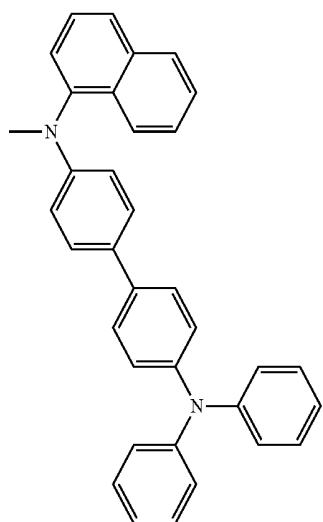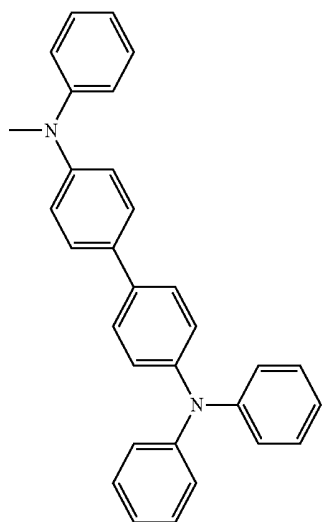


-continued

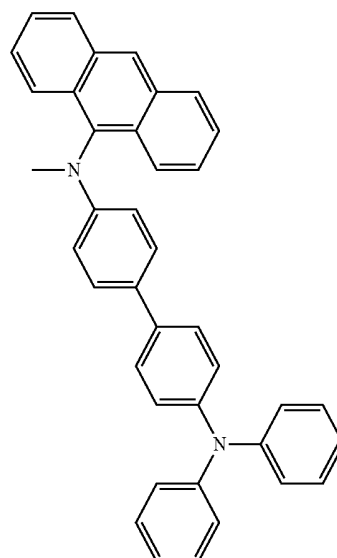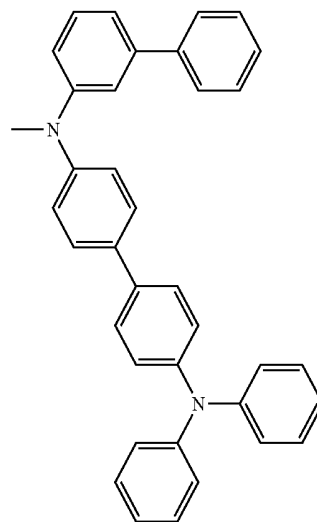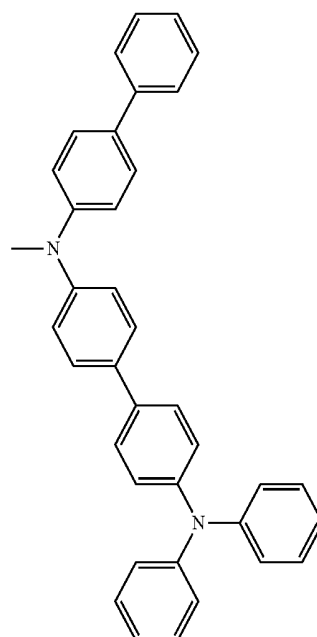

-continued


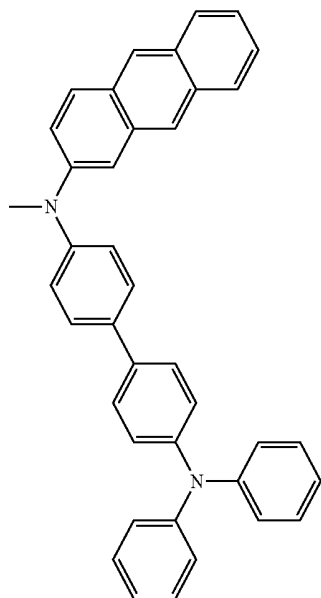


-continued

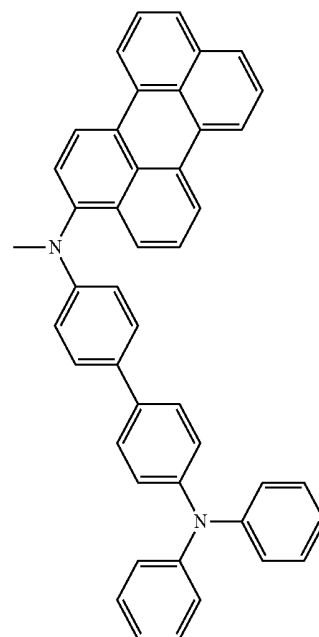


264

263


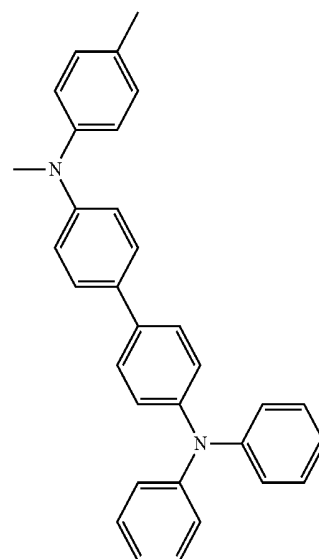
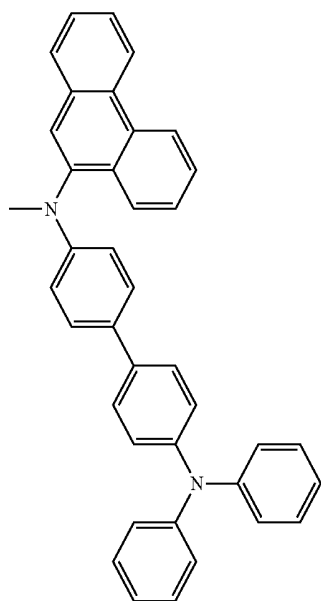


265




266

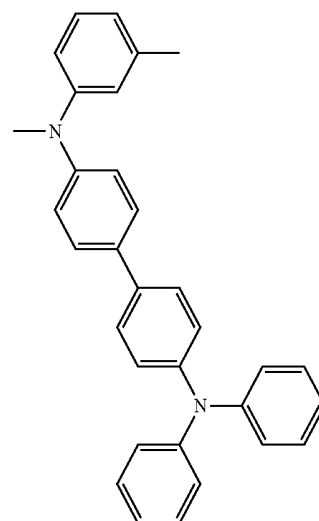


-continued

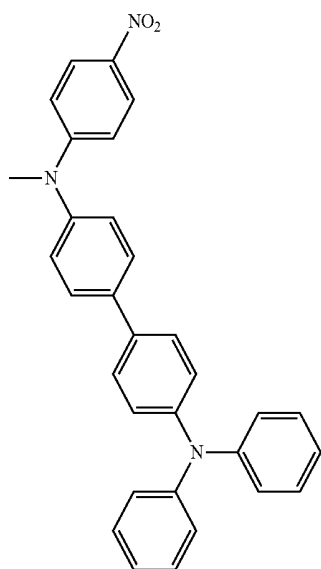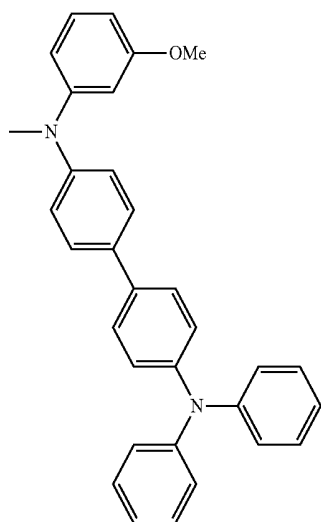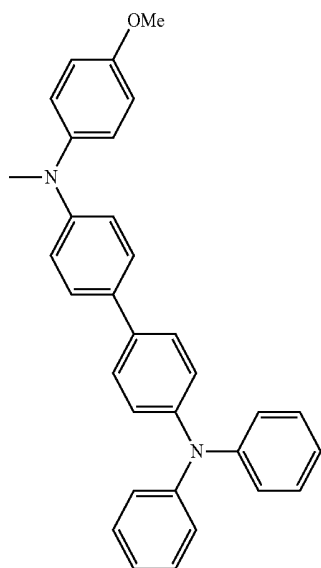

-continued

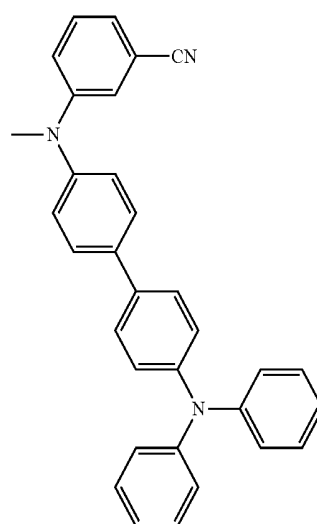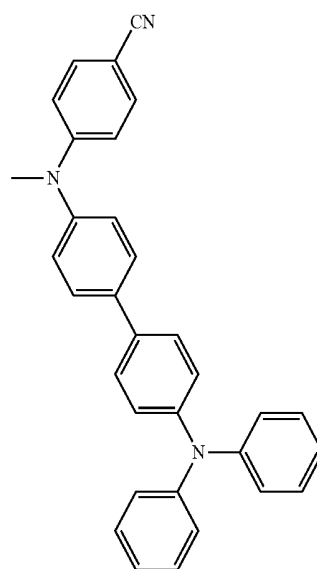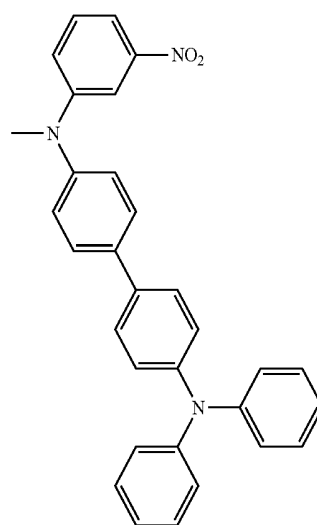


-continued

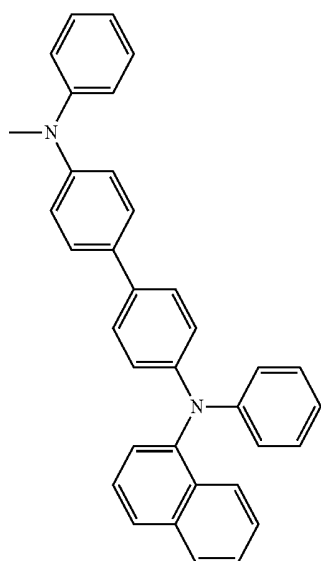


273

-continued

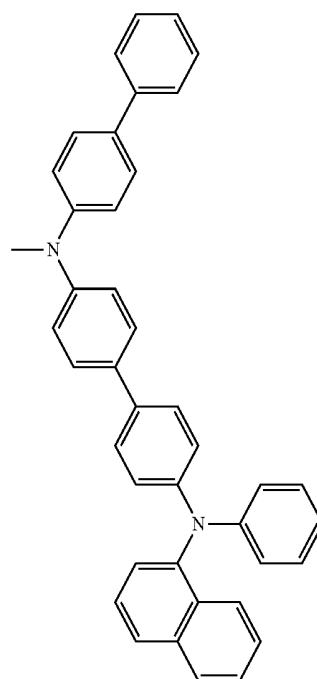


276


274

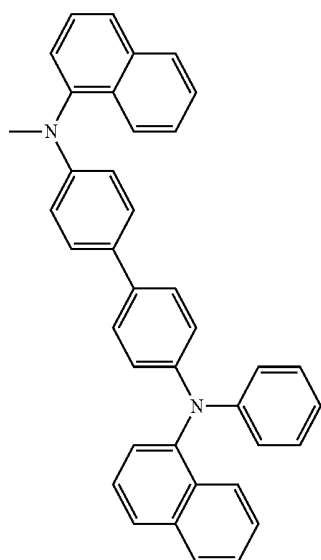

275

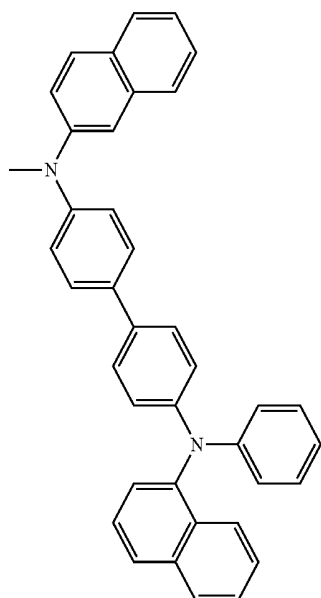


277

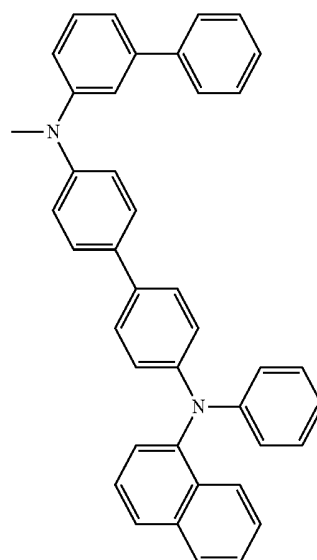


-continued

278

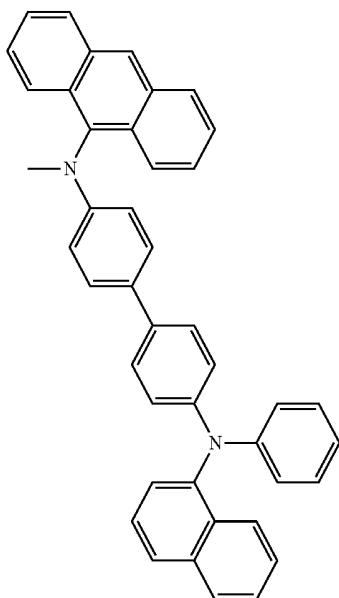


-continued


280

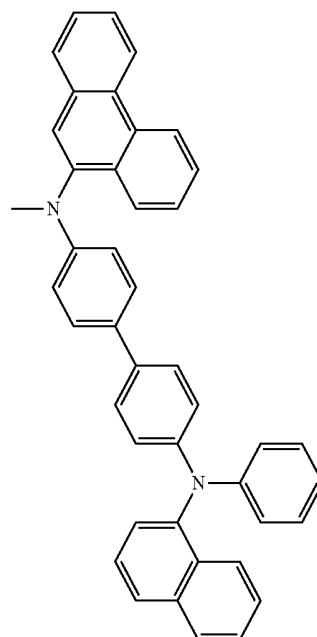


279

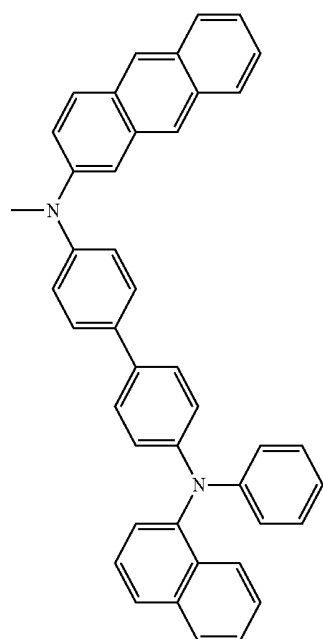

281

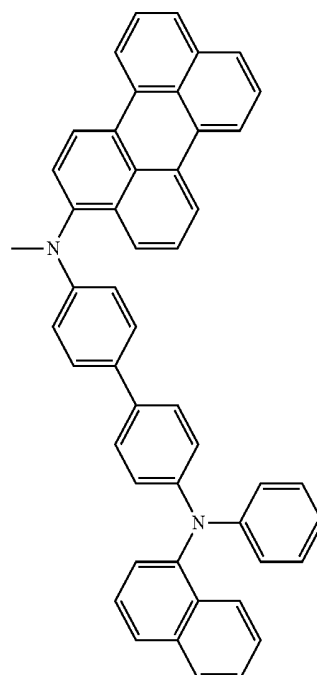


-continued

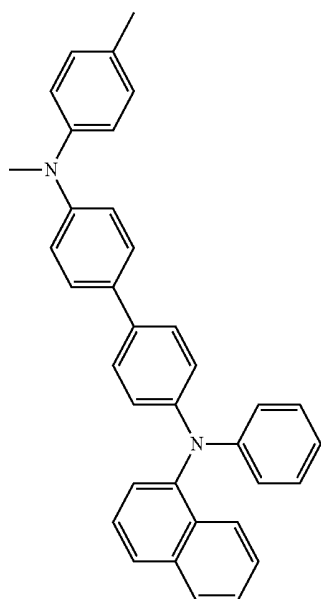


282


-continued

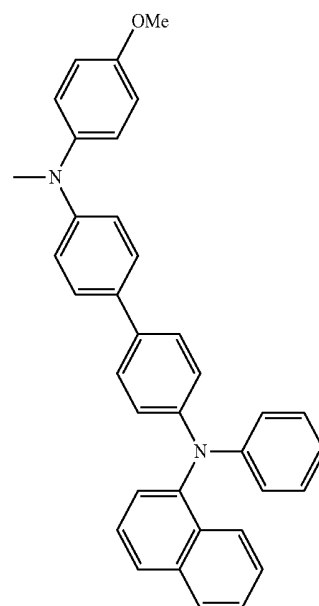

284

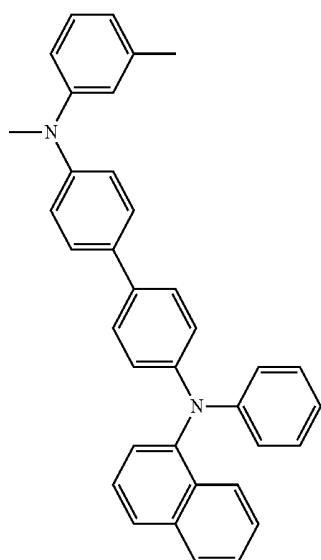


283




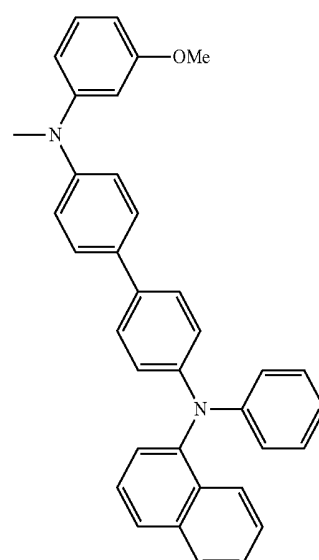


285


-continued

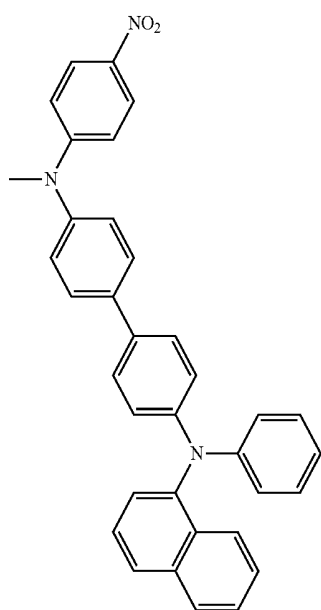

-continued

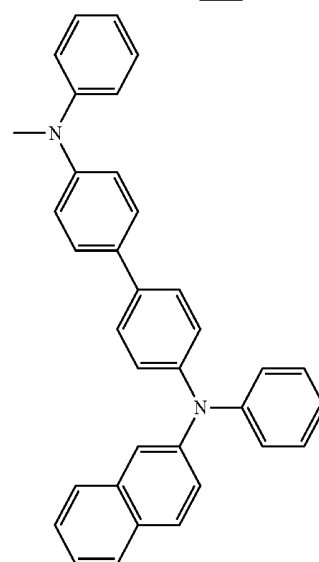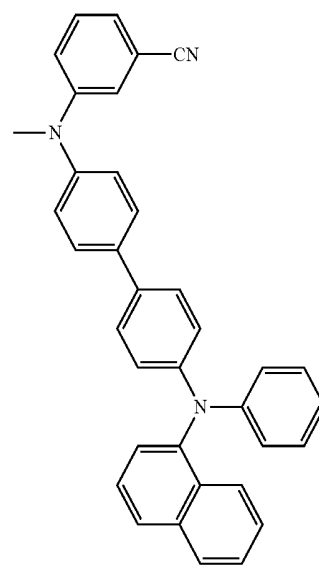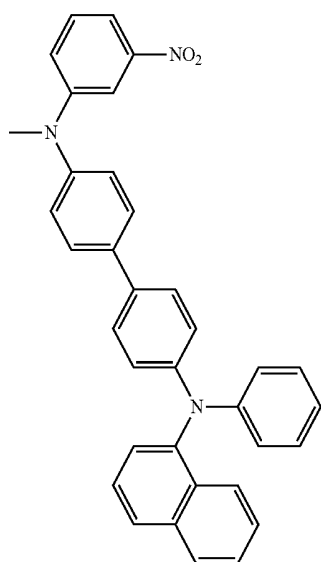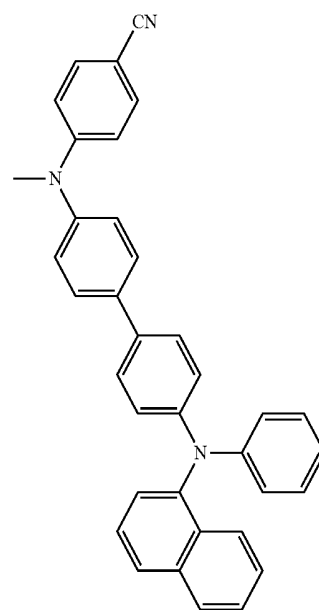


-continued

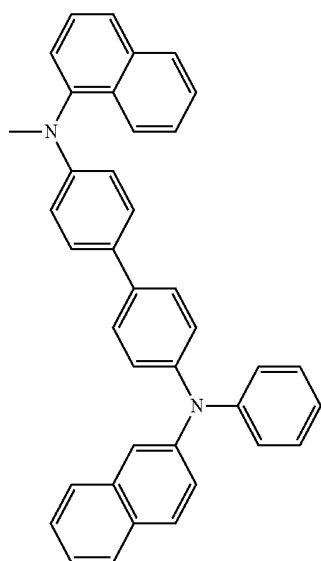


291


-continued

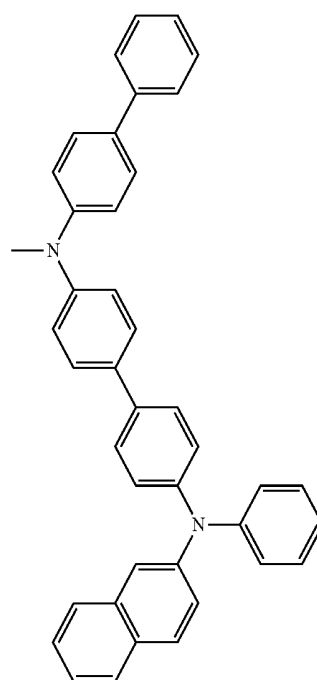

293

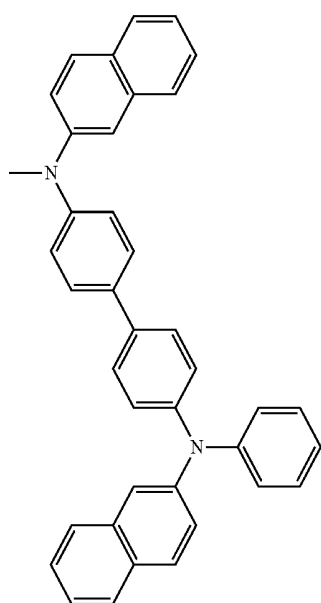


292

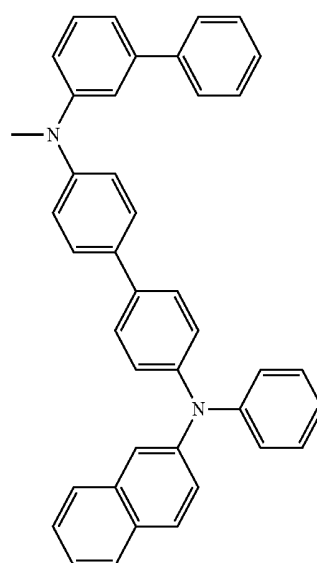

294


-continued

295

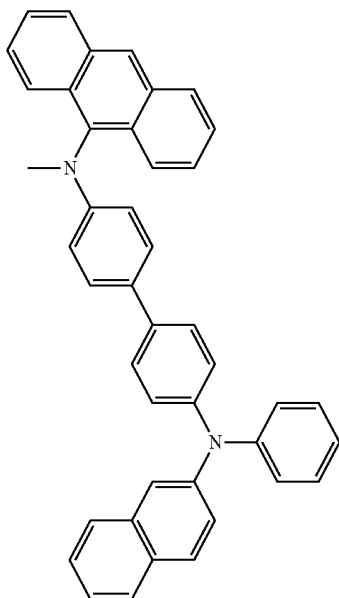


-continued


297

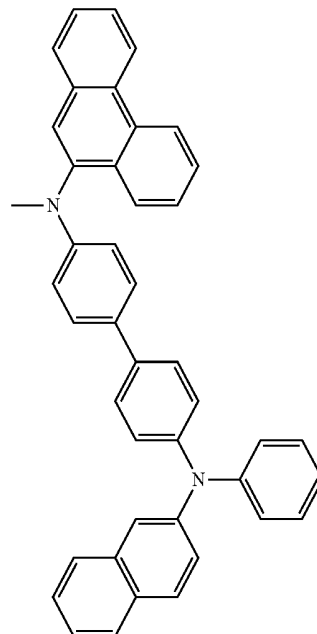

296

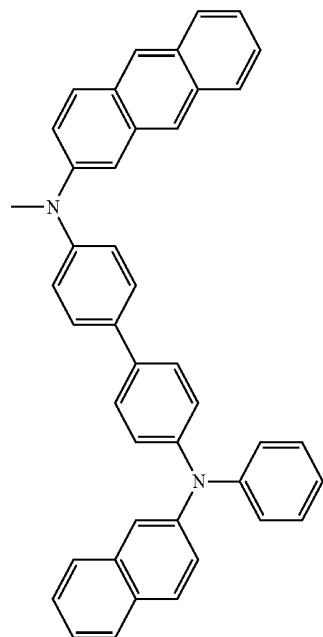


298

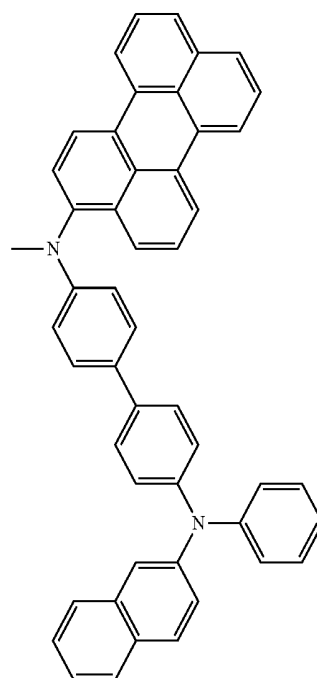


-continued

299

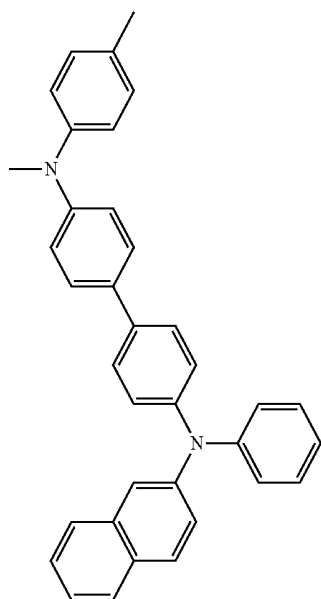


-continued


301

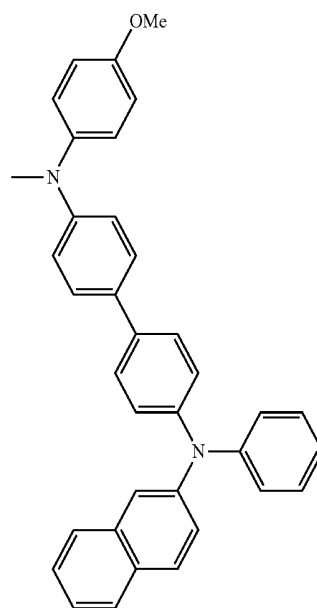

300

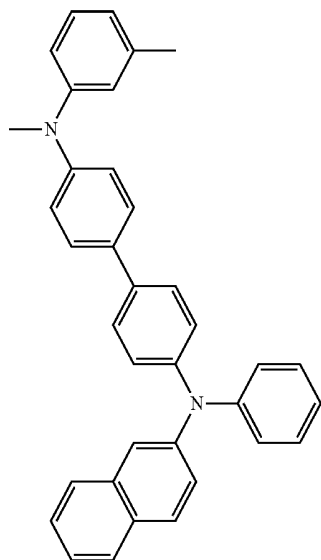


302

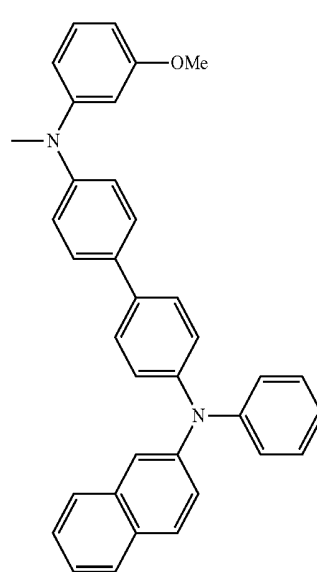


-continued


303

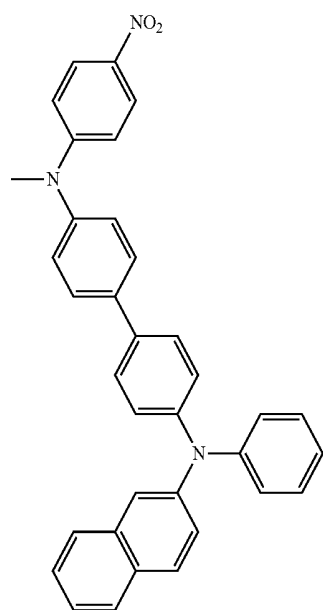


305

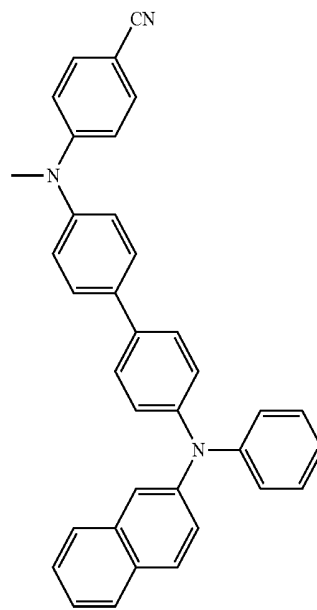


304

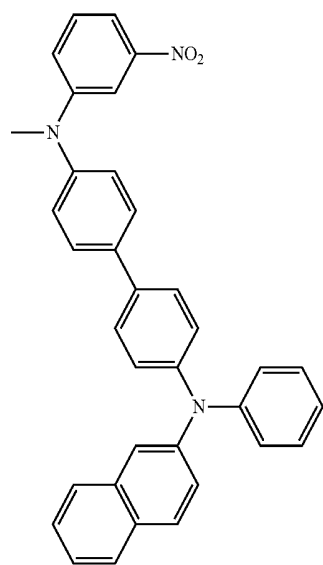




306

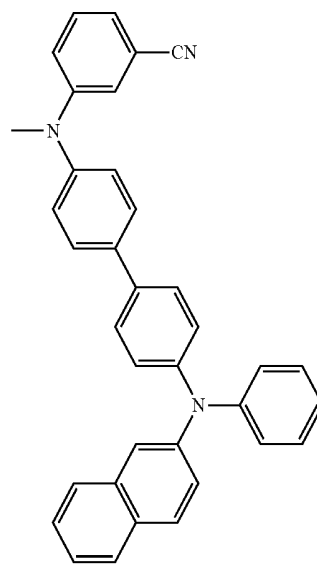


-continued

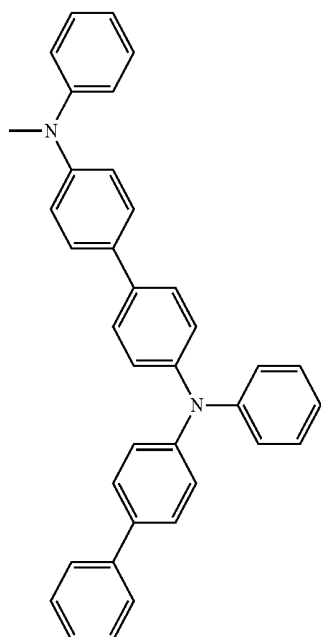

-continued

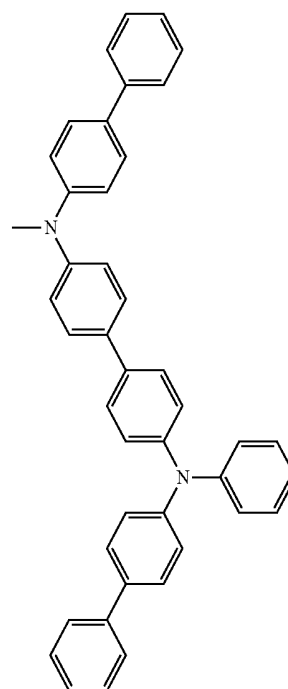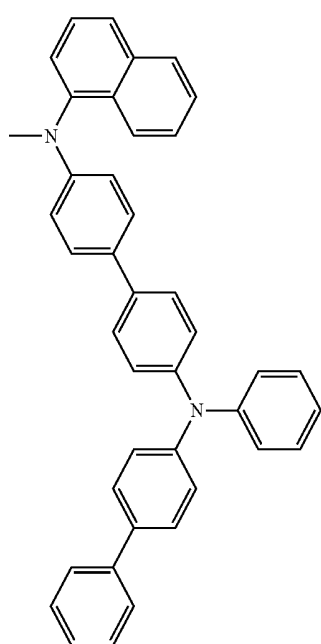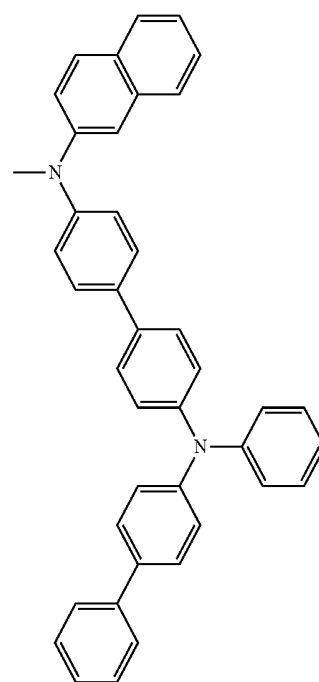


-continued

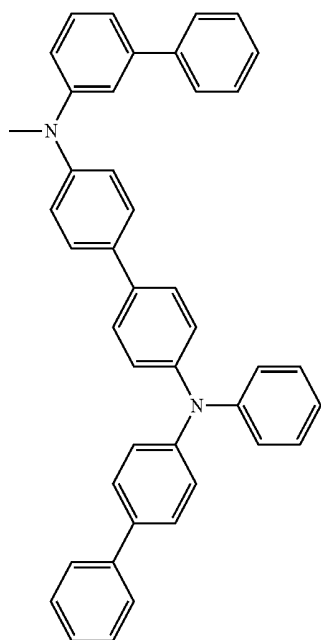


311


-continued

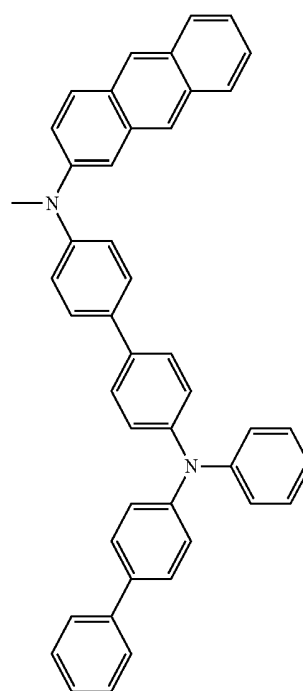

313

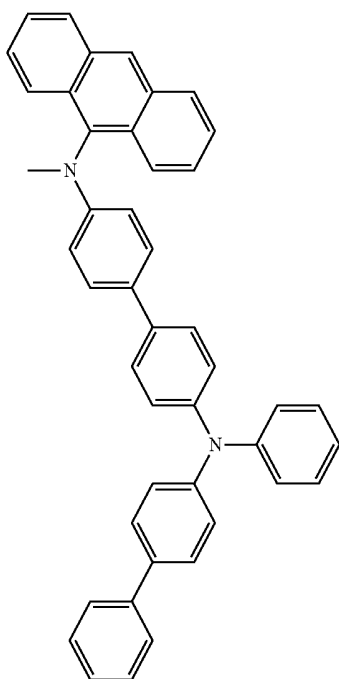


312

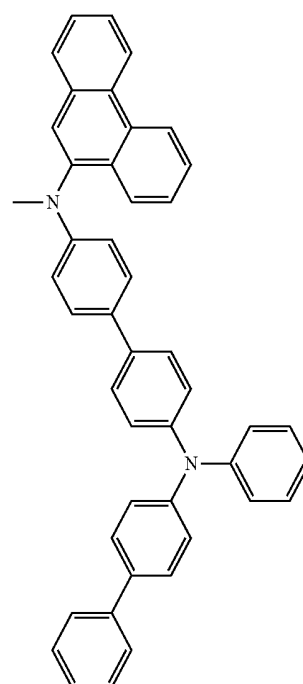


314


-continued

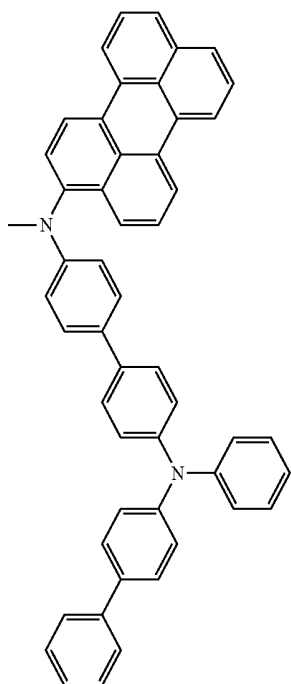


-continued

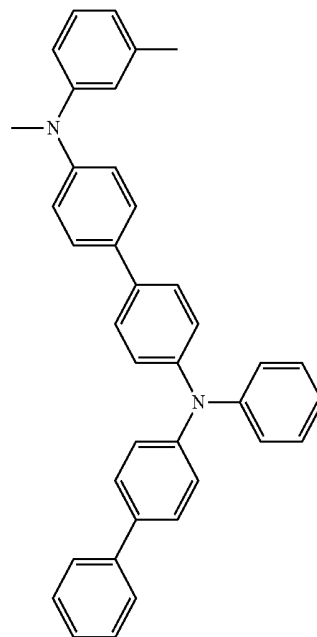


316

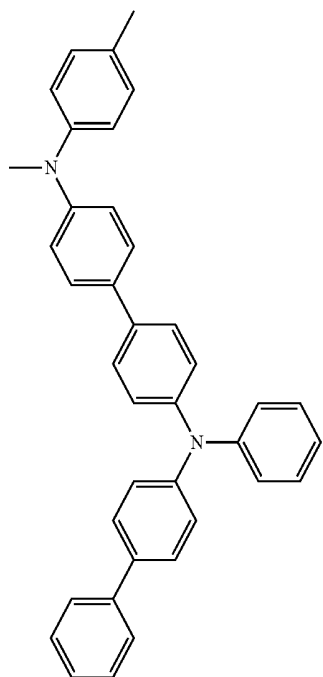


318

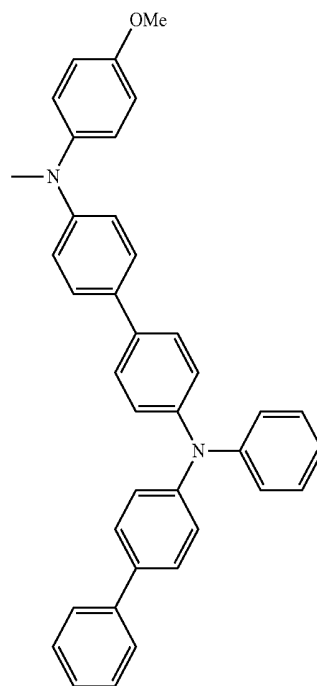


-continued

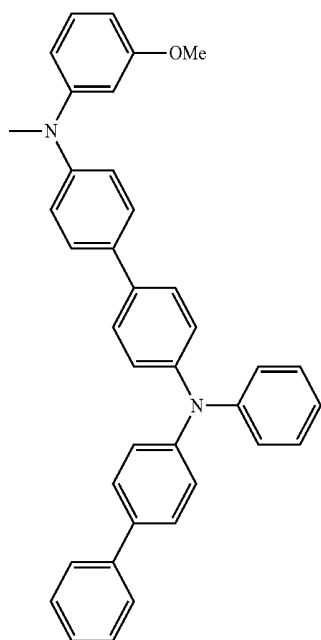


-continued

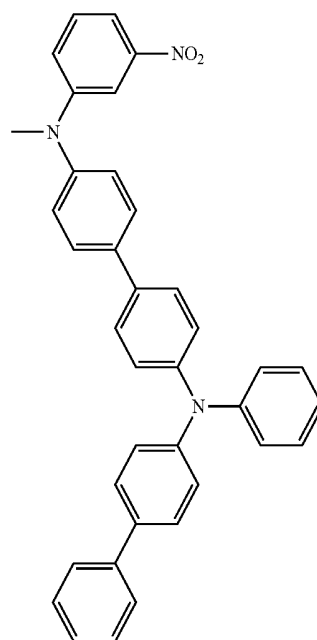


320

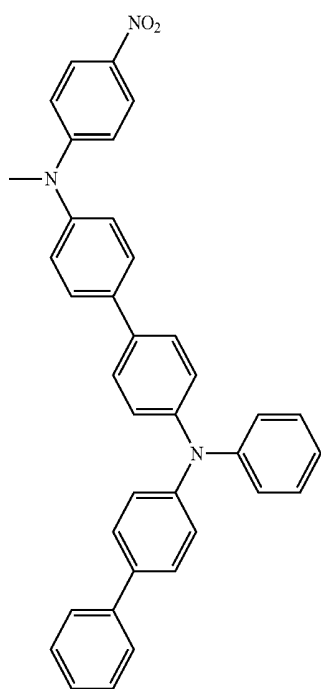


322

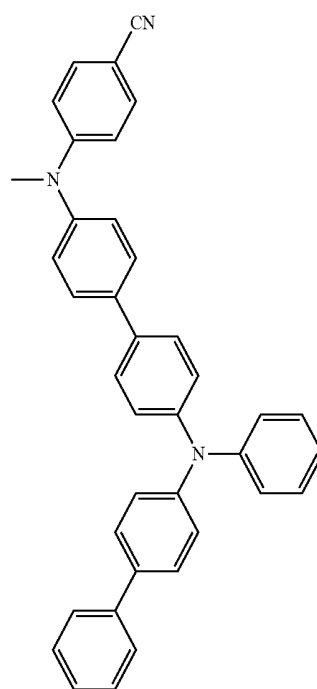


-continued

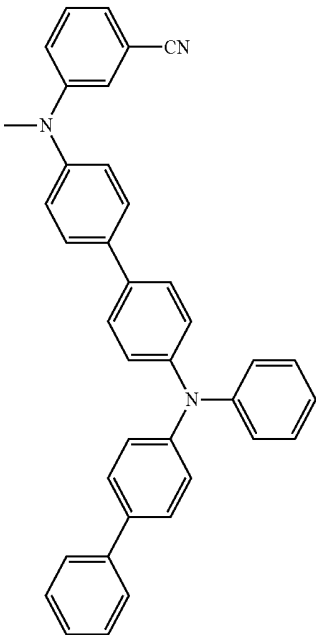


-continued

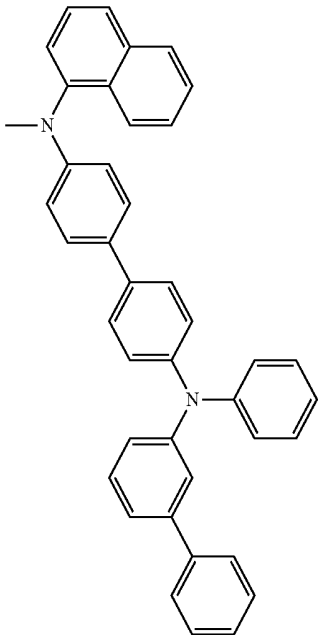


324

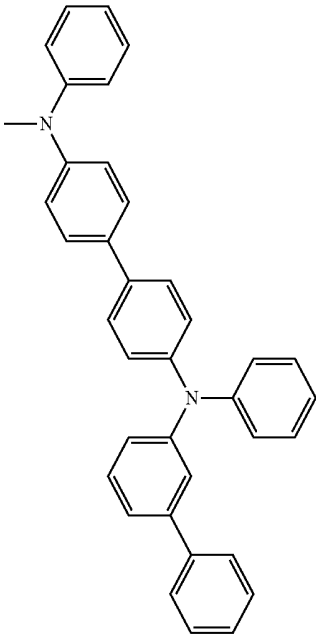

326

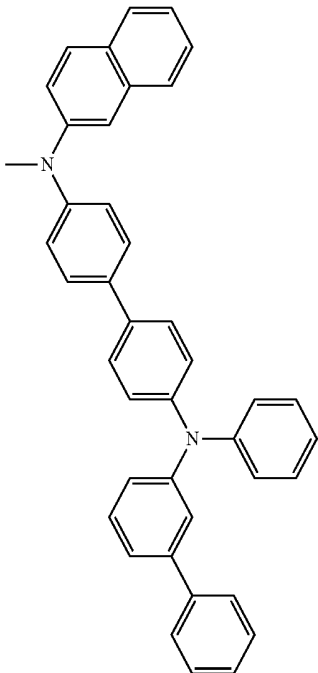


-continued

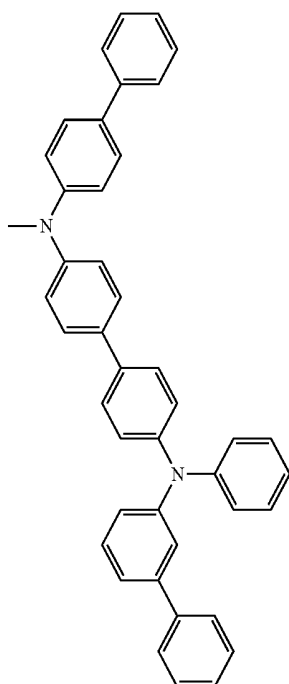


327


-continued

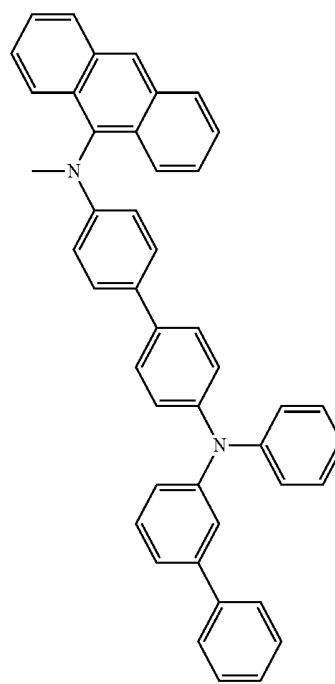

329

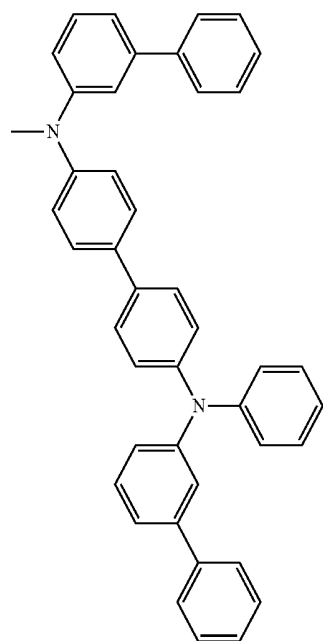


328

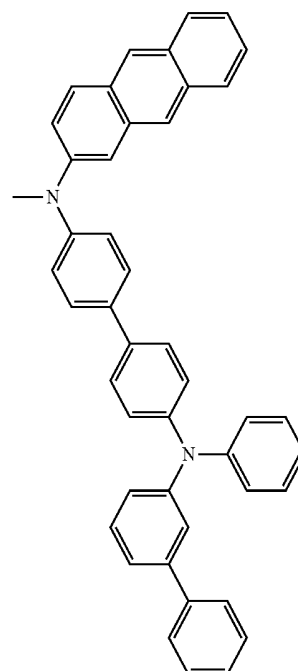


330

-continued

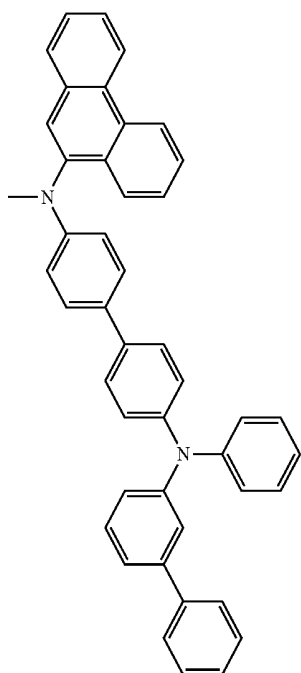


331


-continued

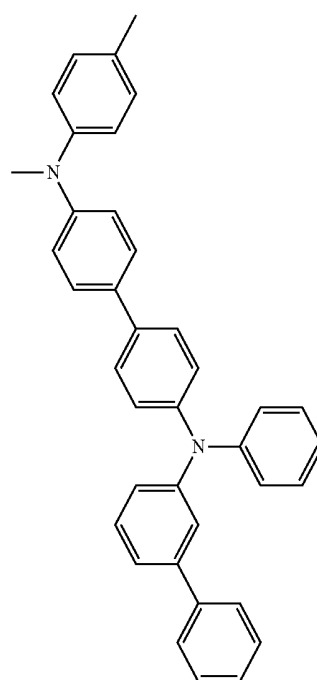

333

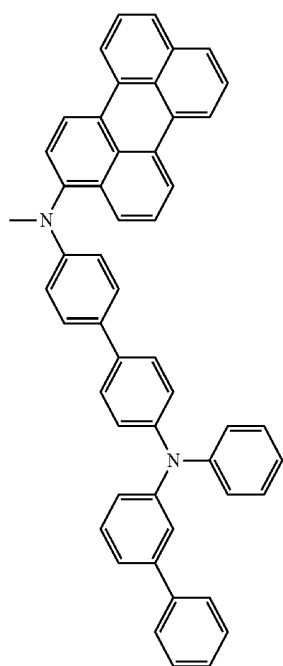


332

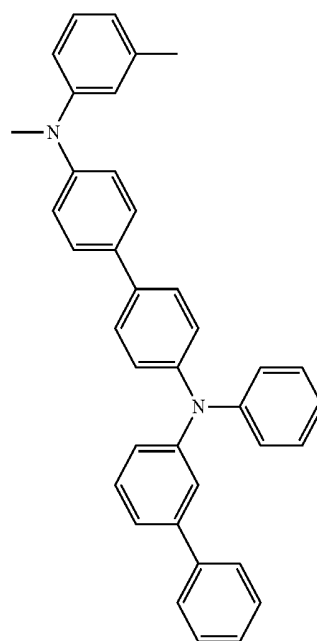


334


-continued

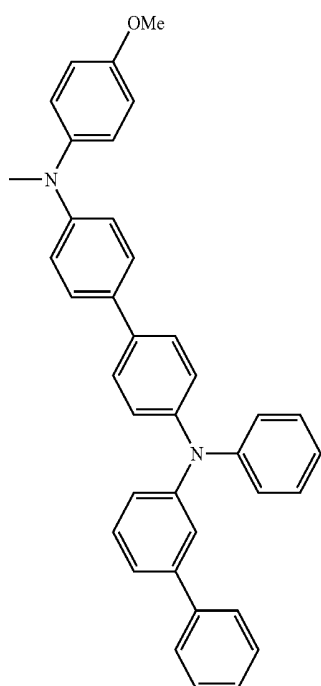


-continued

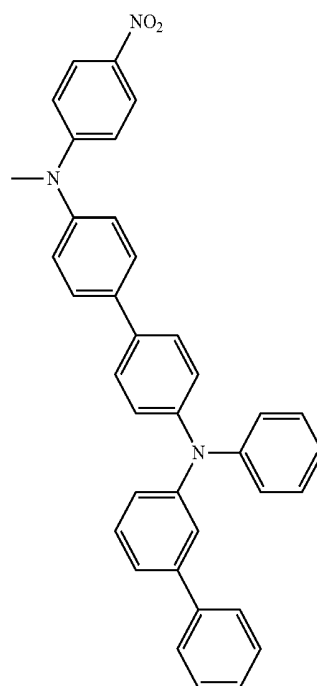


336

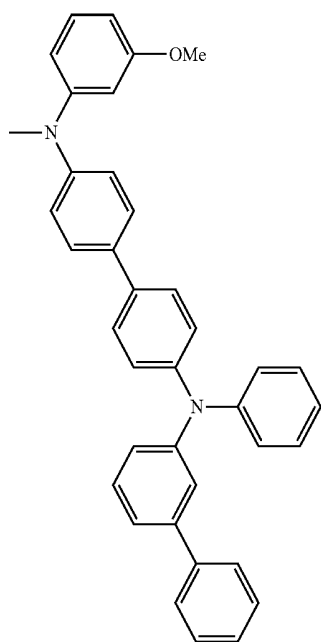


338

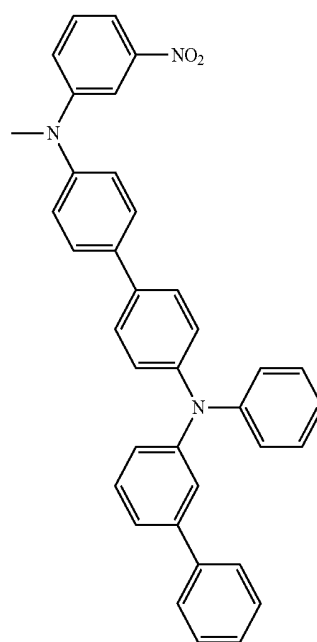

-continued


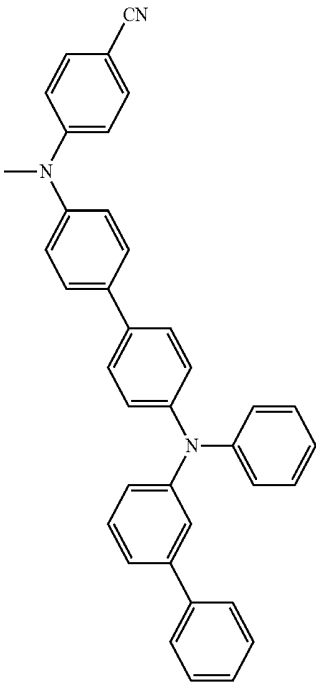


-continued

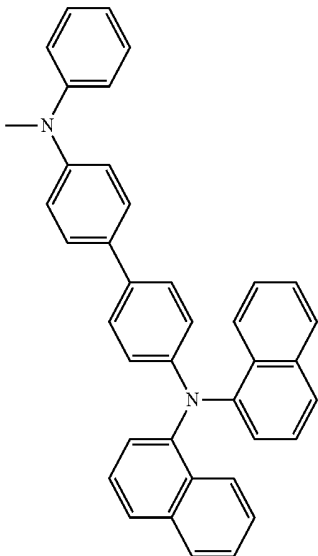

341


340

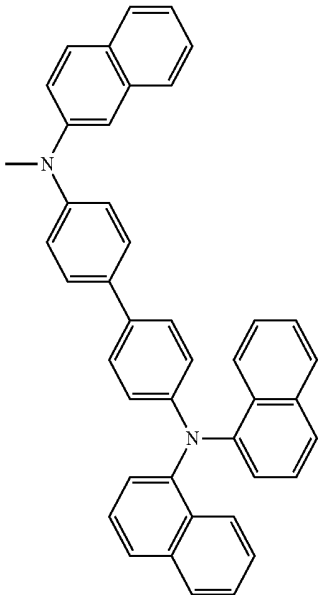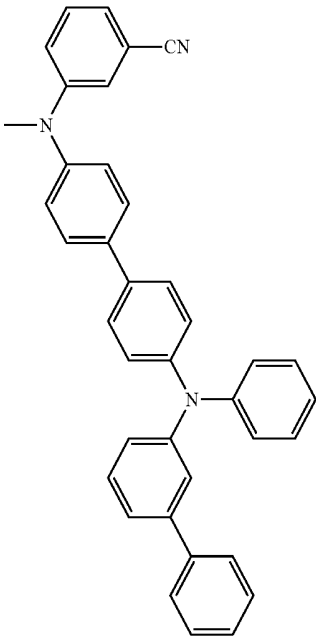



342

343




-continued

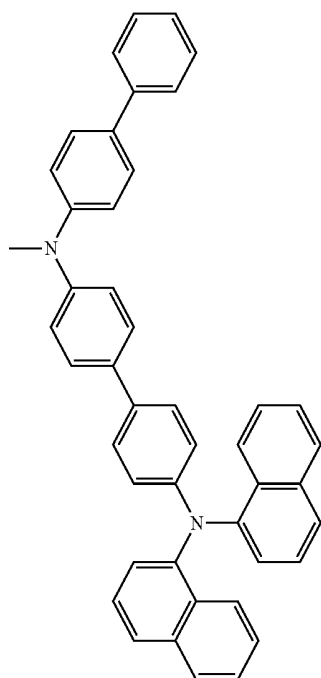

-continued

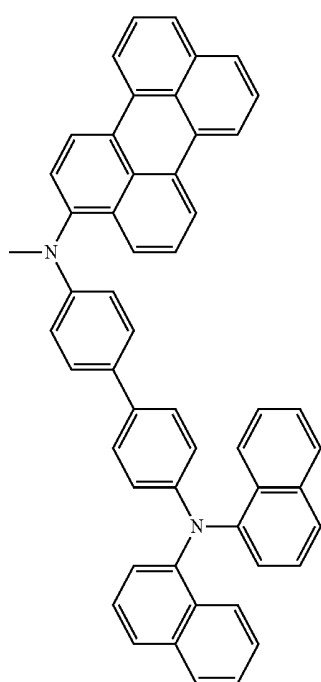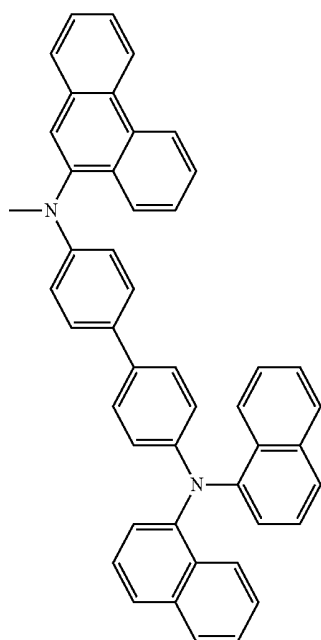


-continued

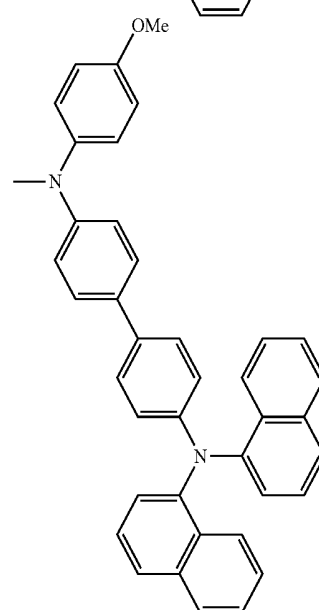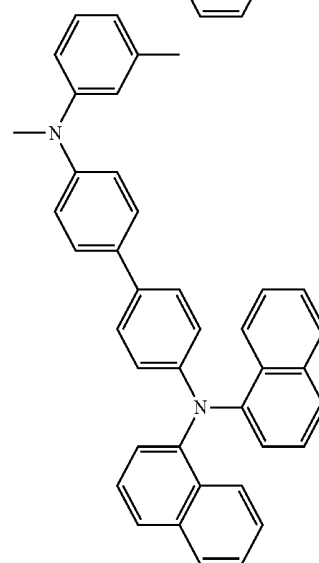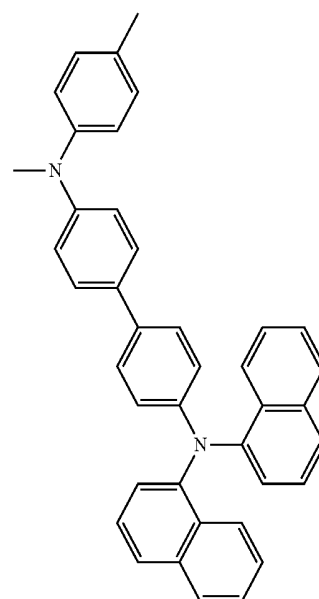


-continued


356

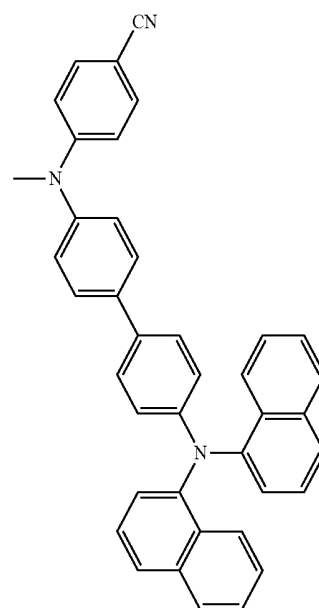


357

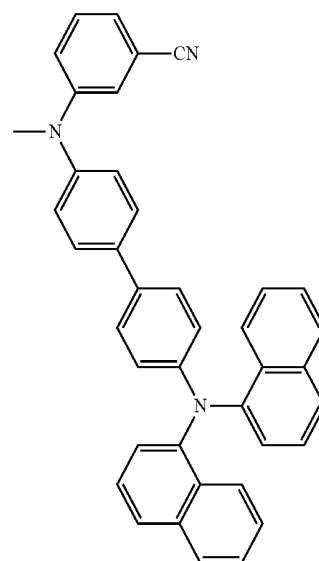


358

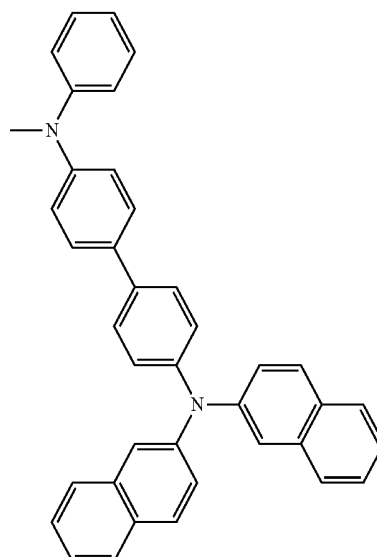


-continued

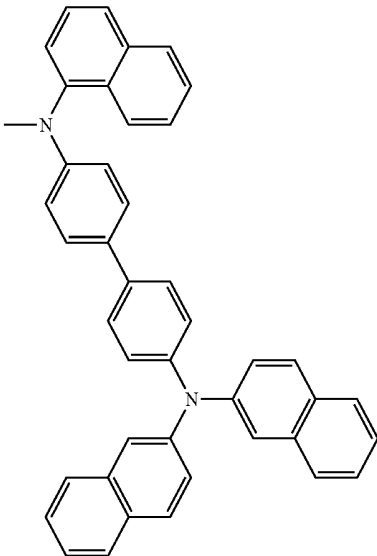


-continued

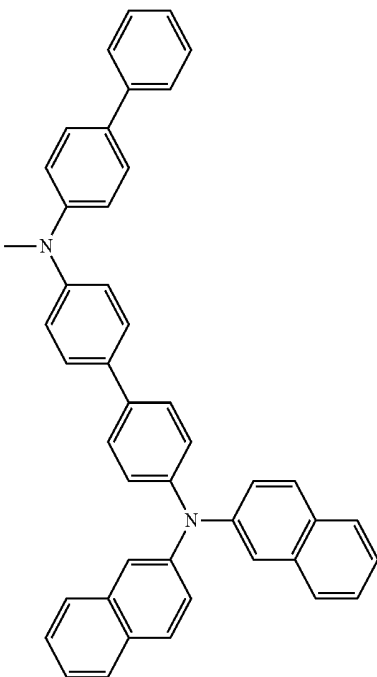


360

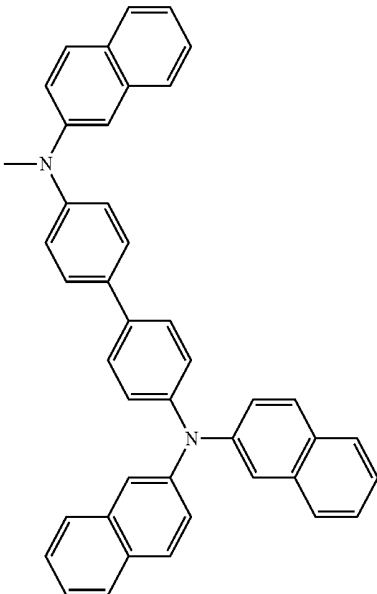


362

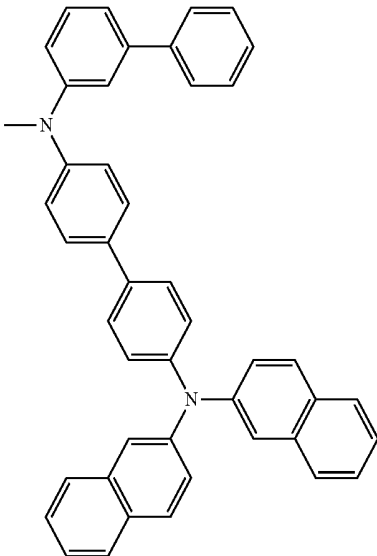


-continued

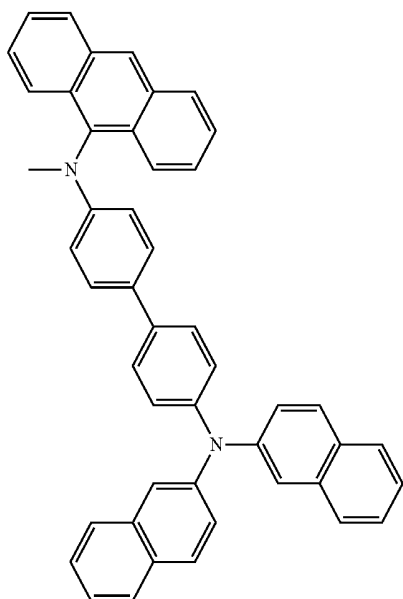


-continued

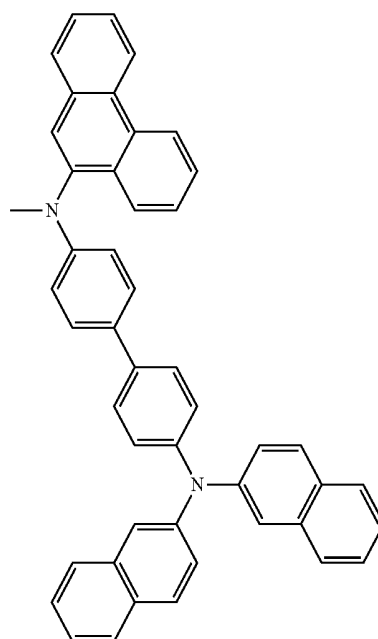


364

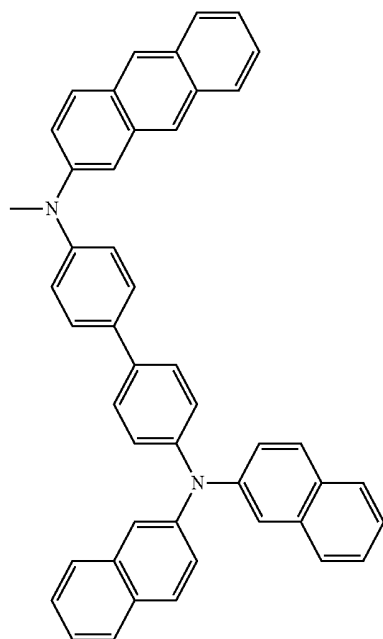


366

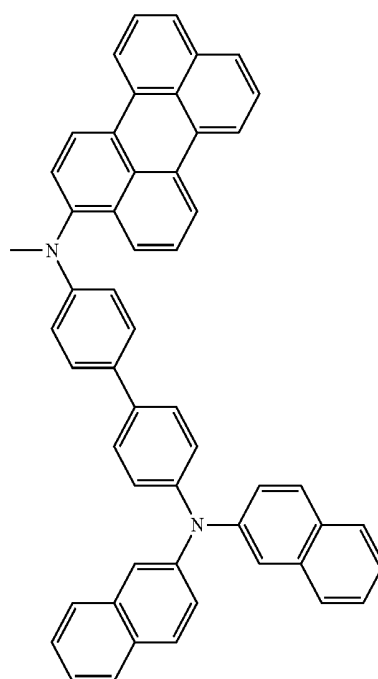


-continued

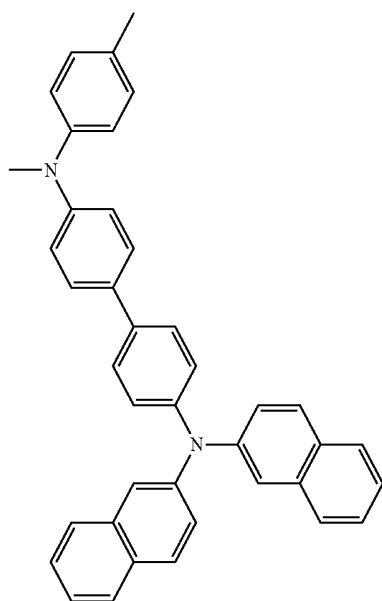


-continued

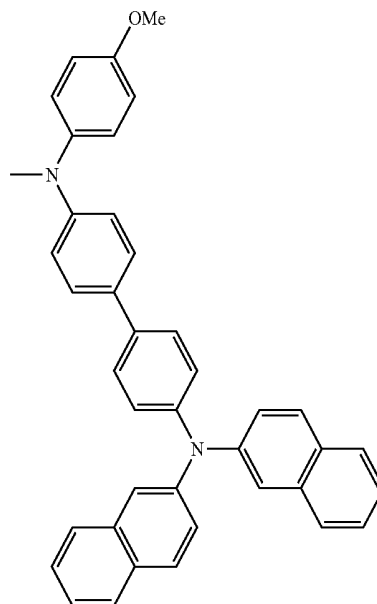


368

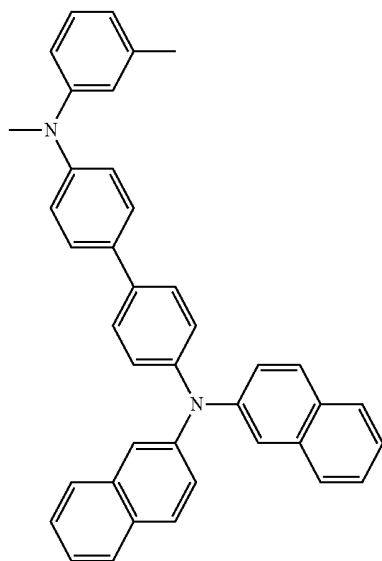


370

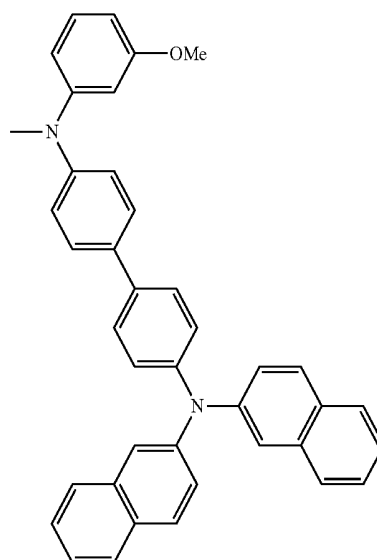


-continued

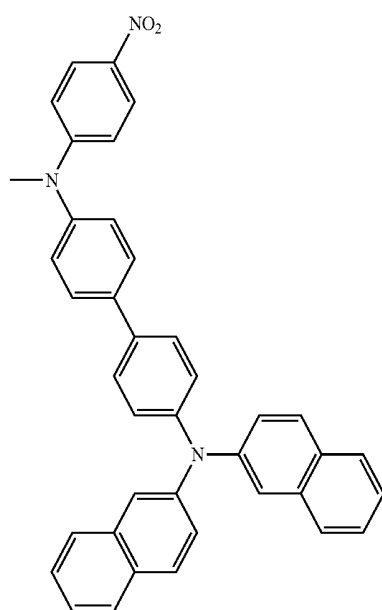


-continued

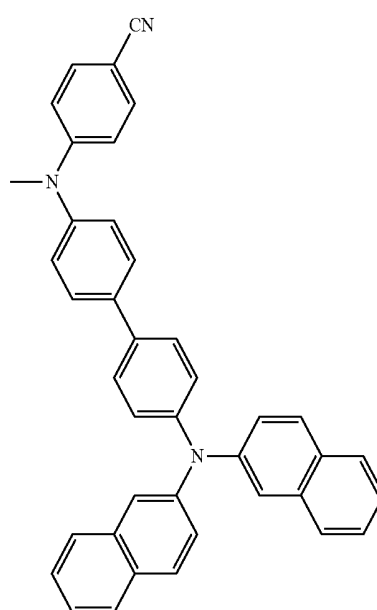


372

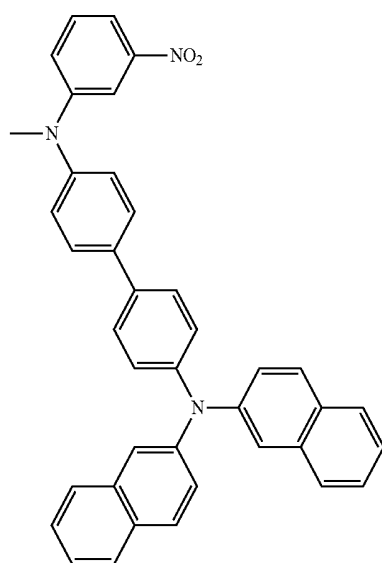


374

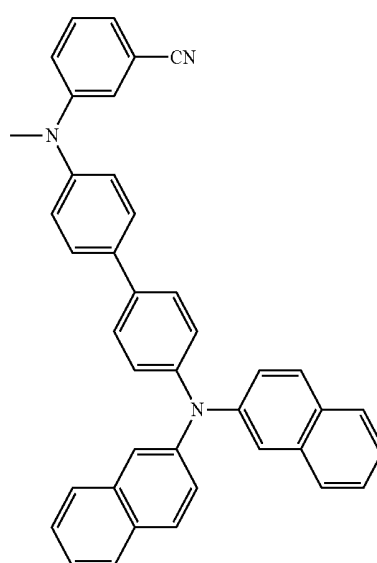


-continued

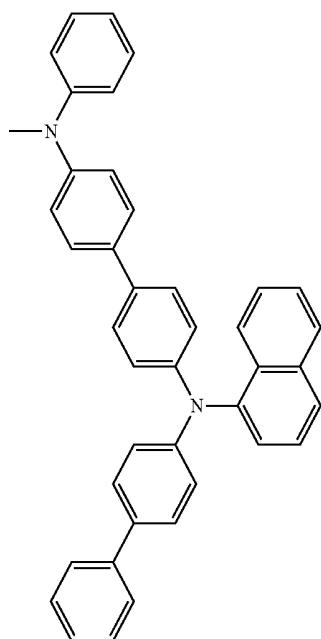


-continued

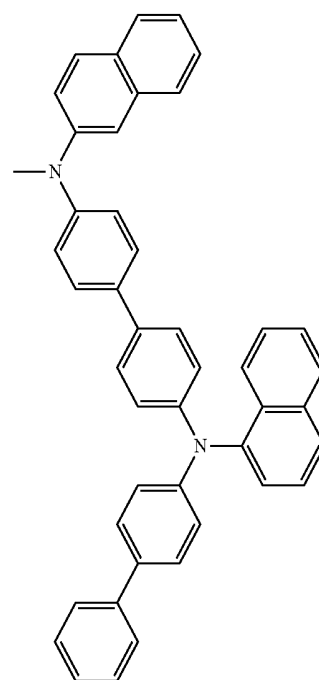


376

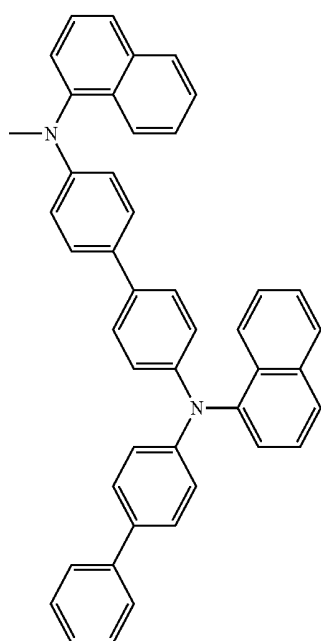

378

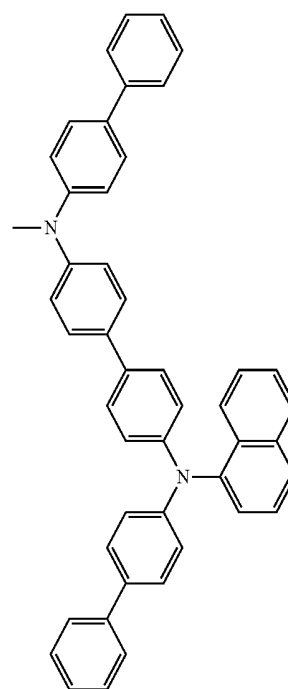


-continued

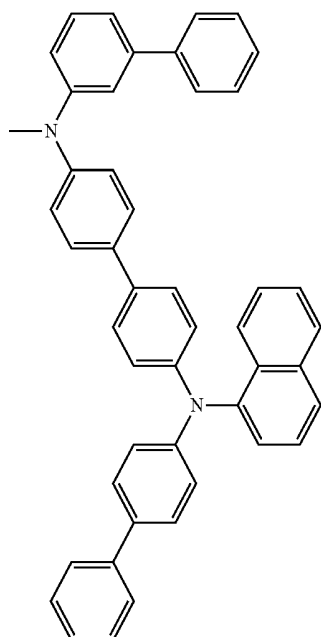


379


-continued

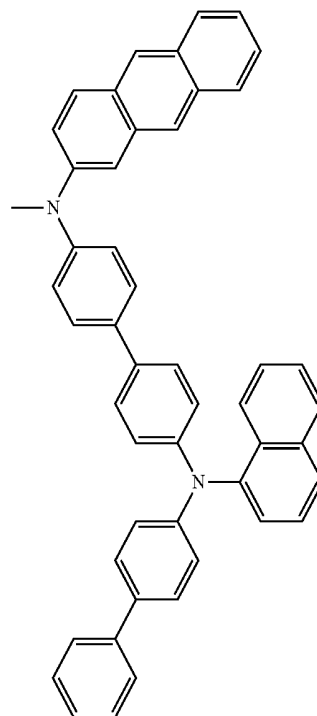

381

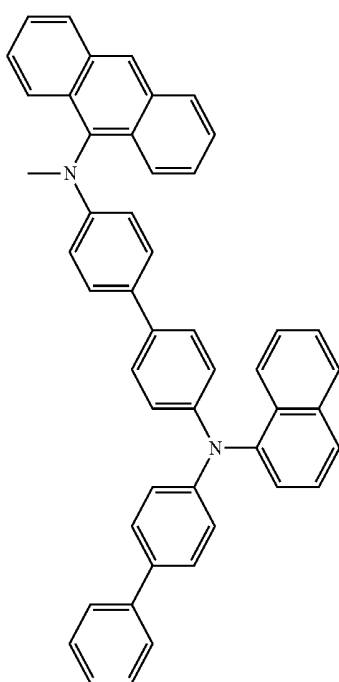


380

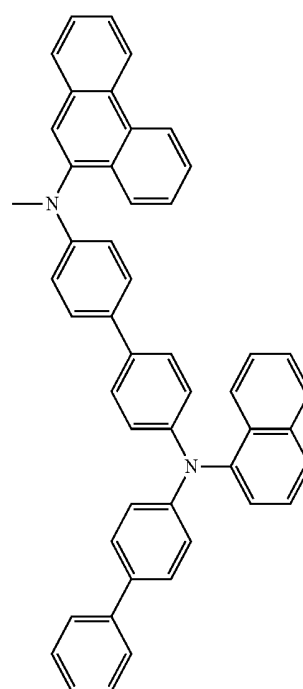


382

-continued

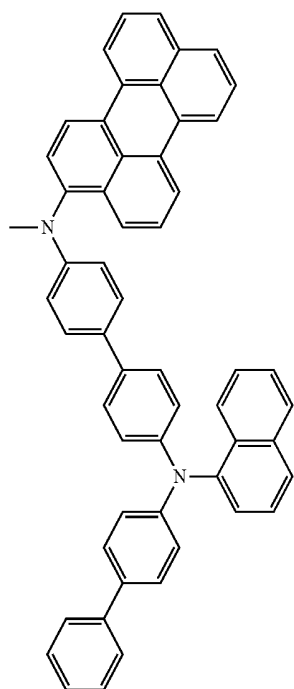


383


-continued

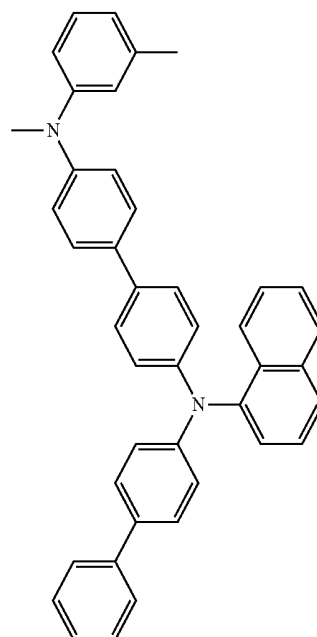

385

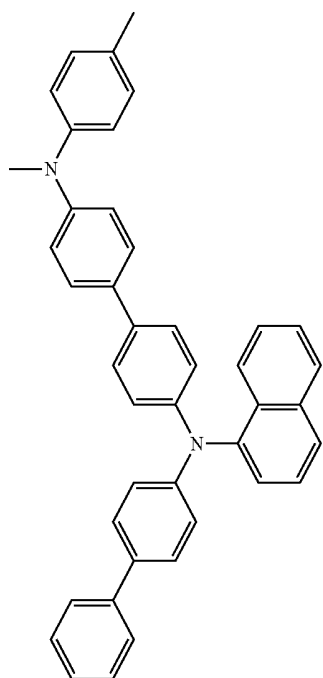


384

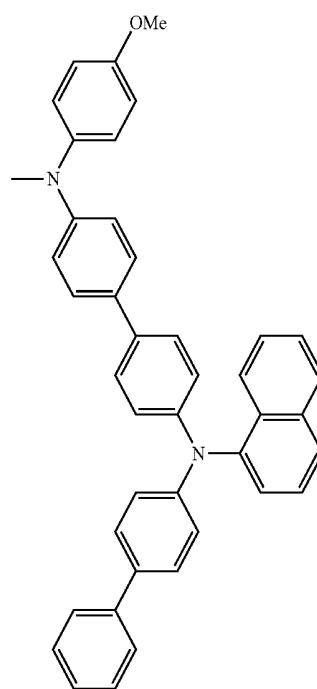


386

-continued

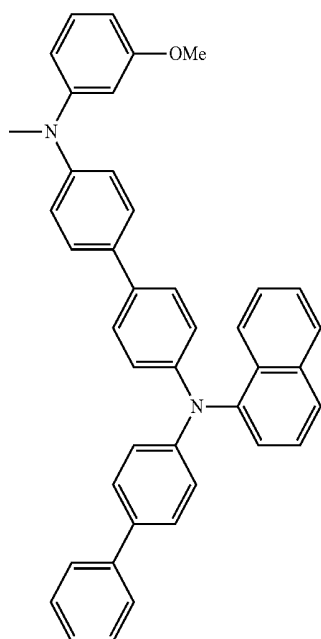


387


-continued

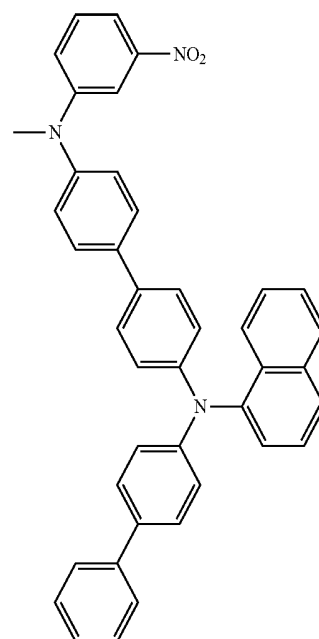

389

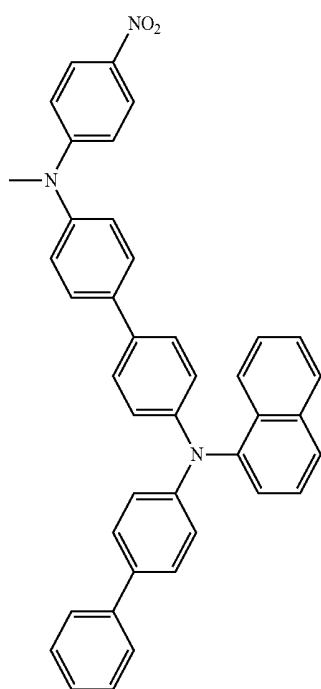


388



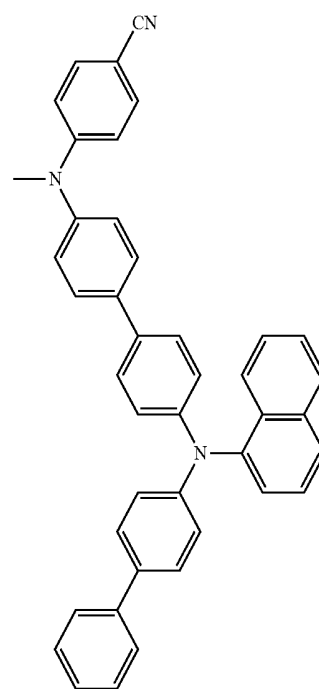


390


-continued

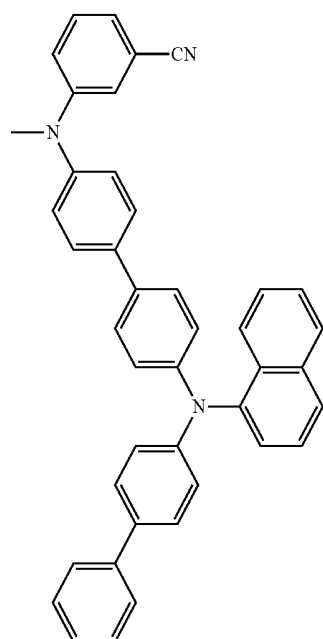


-continued

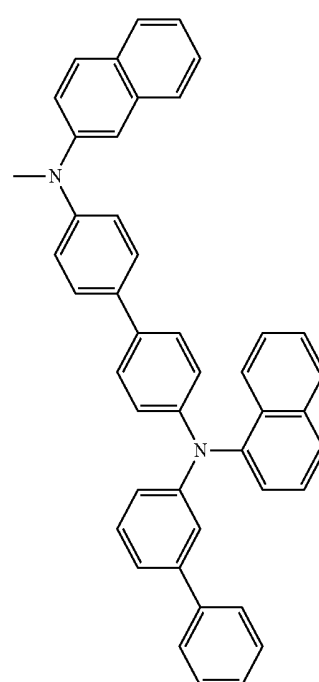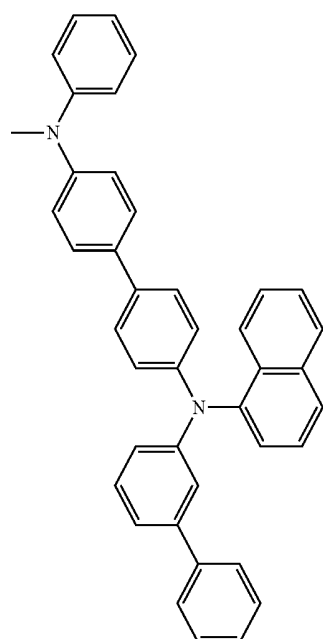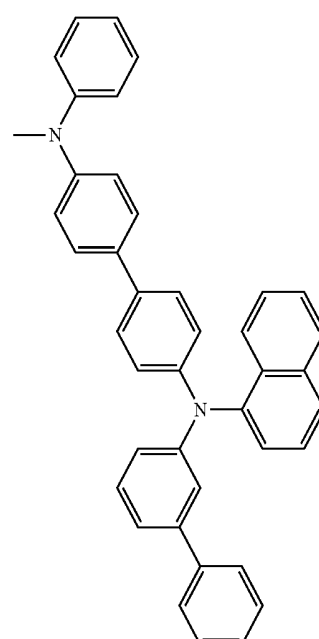

-continued

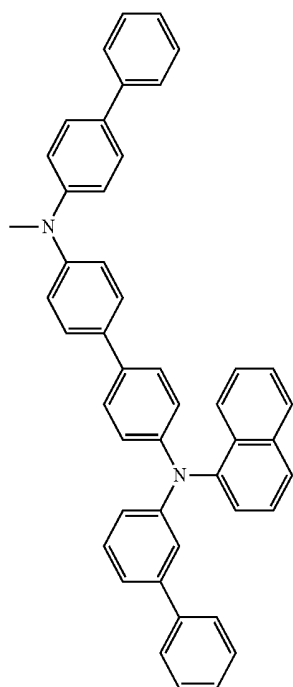


-continued

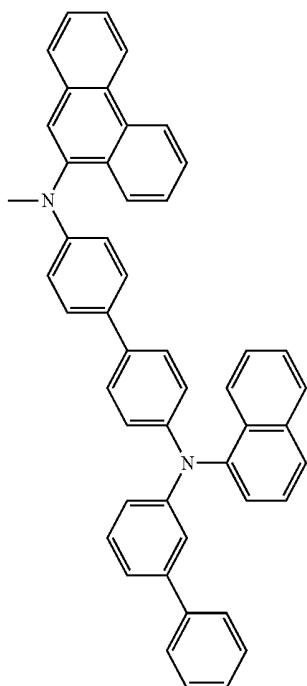


399

-continued

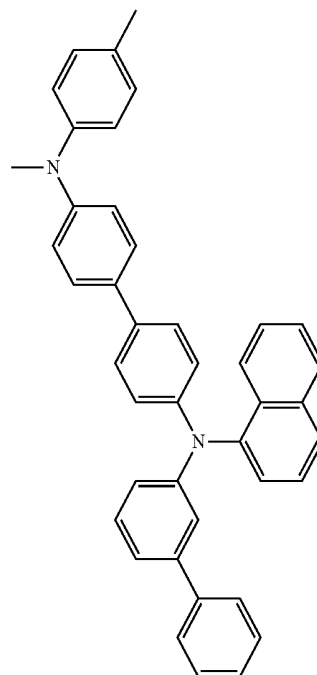


401


400

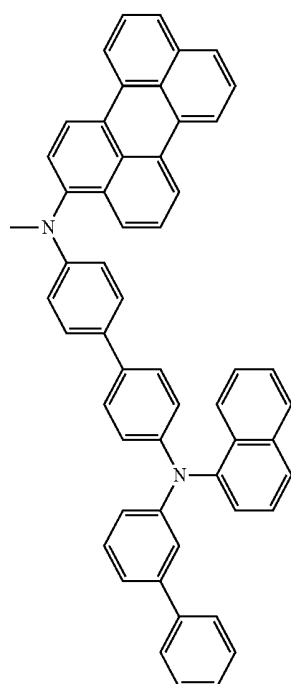


402

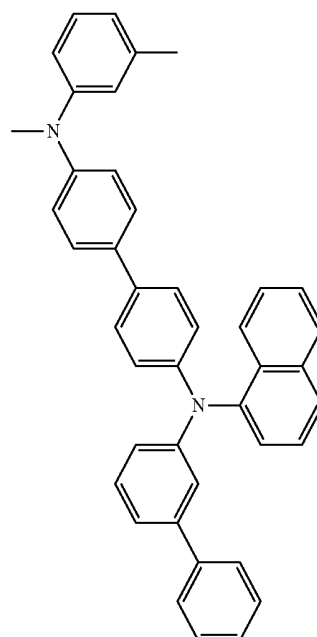


-continued

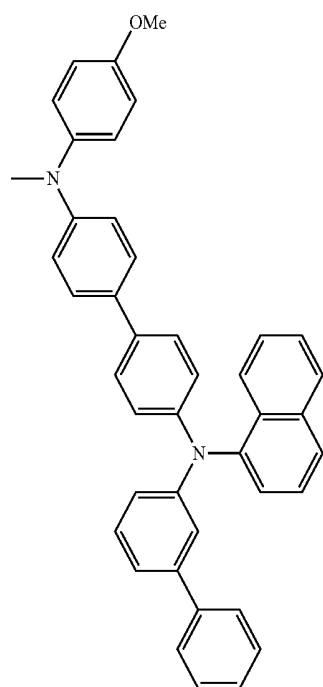


-continued

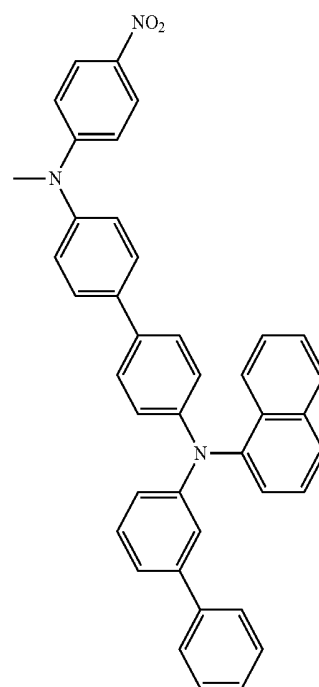


404

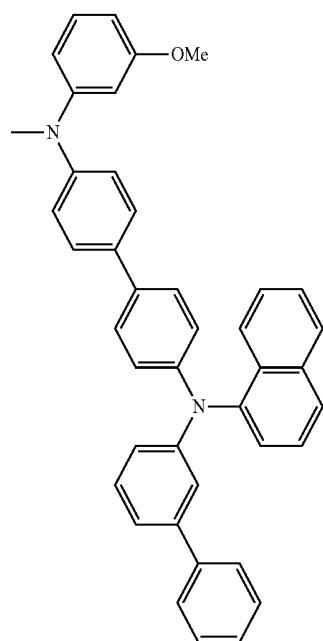




406

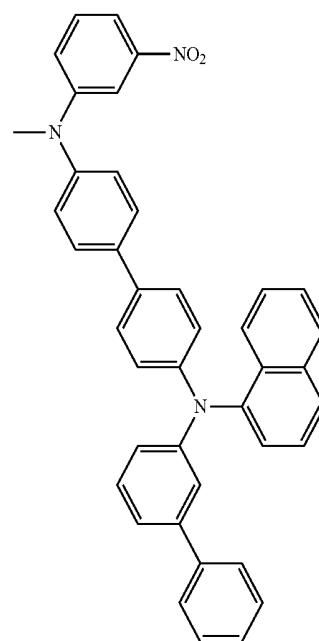


-continued

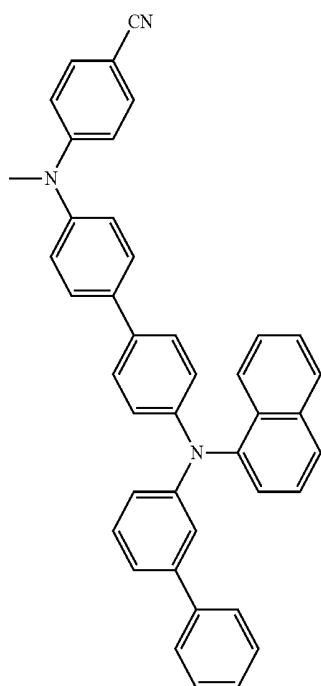

-continued

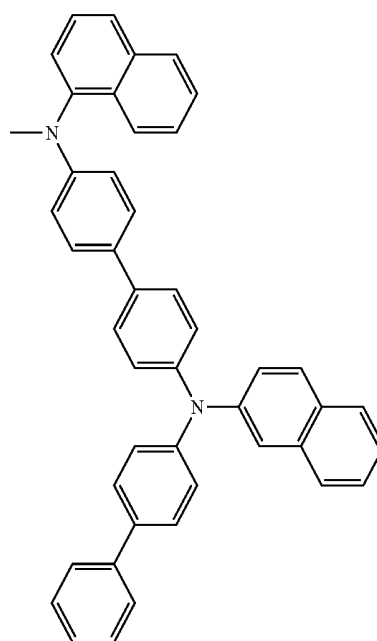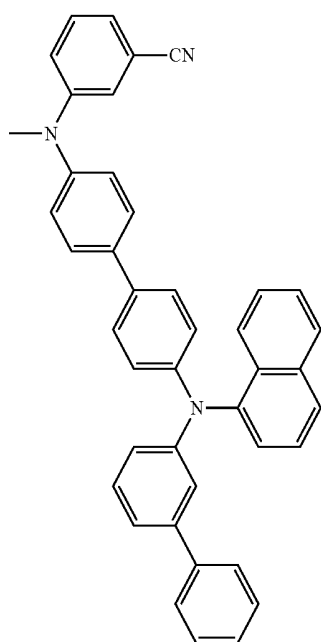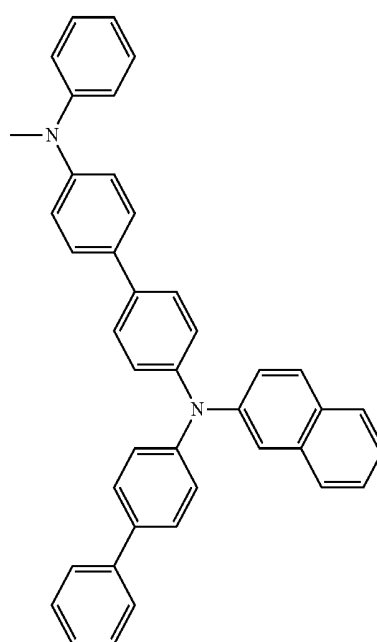


-continued

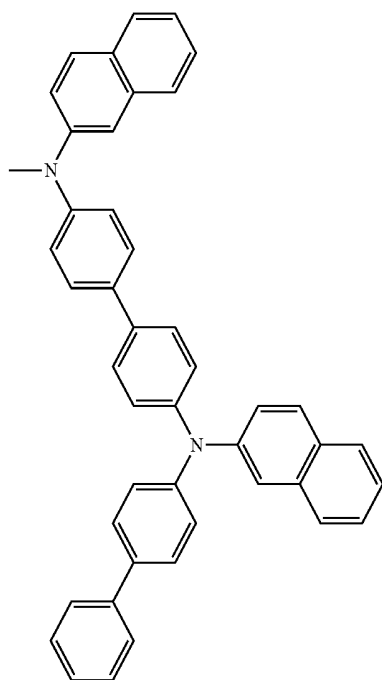


411


-continued

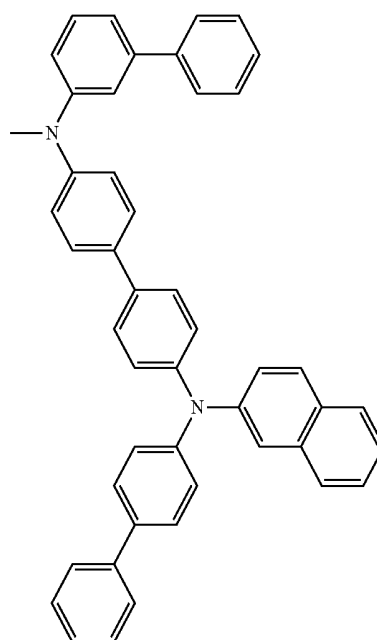

413

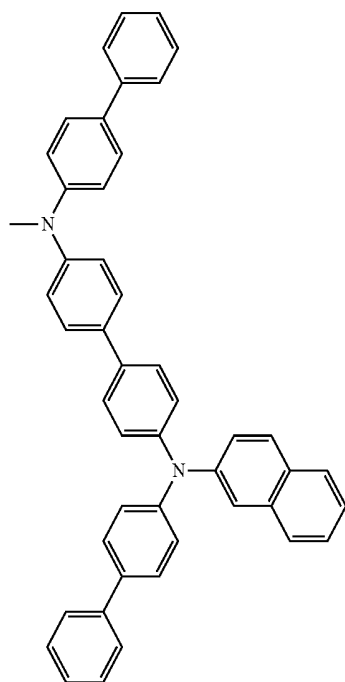


412



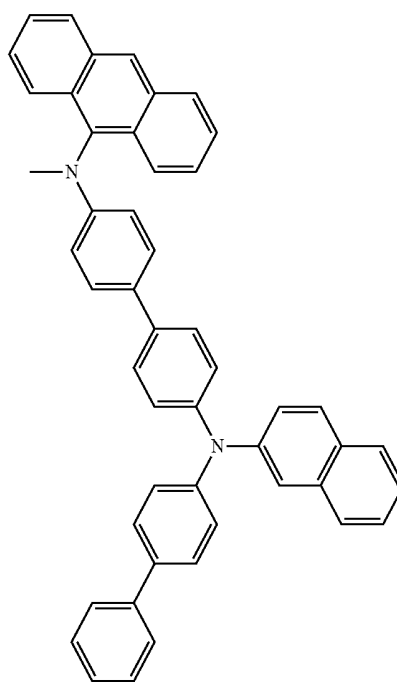


414


-continued

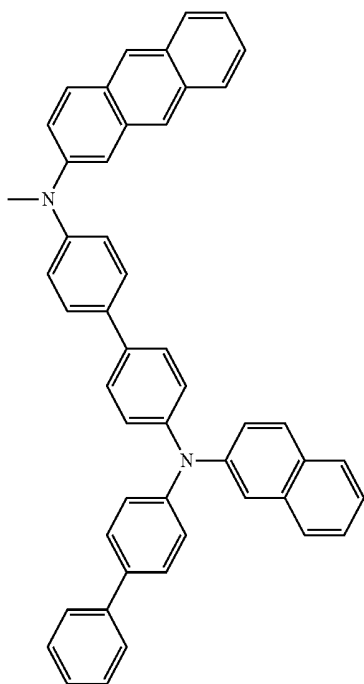


-continued

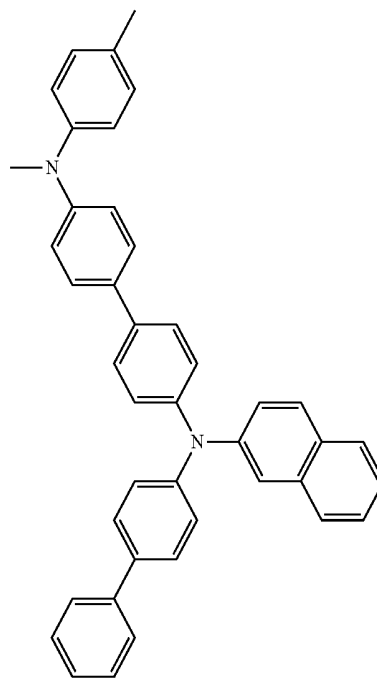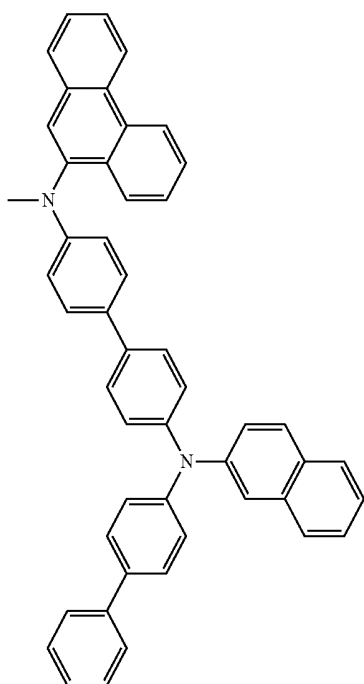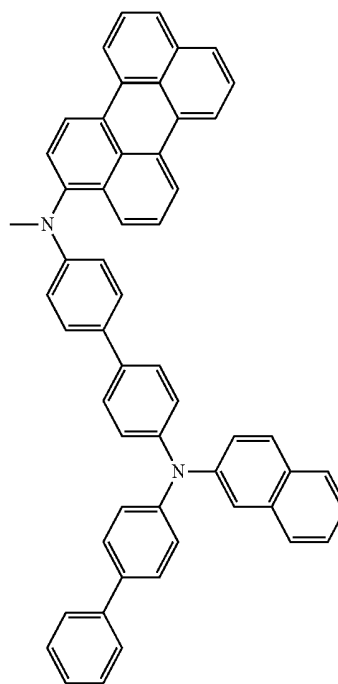


-continued

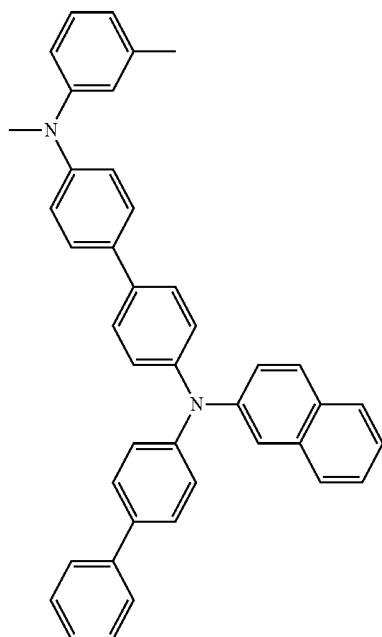


-continued

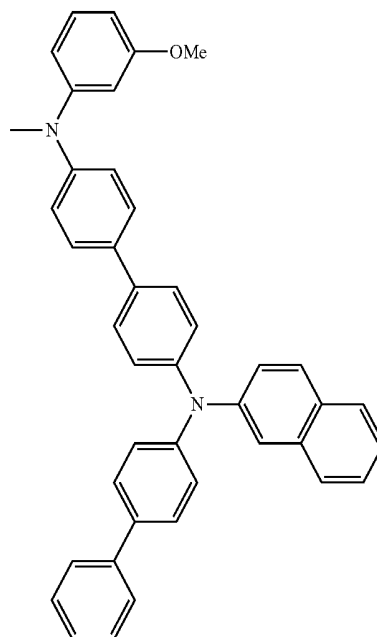


420

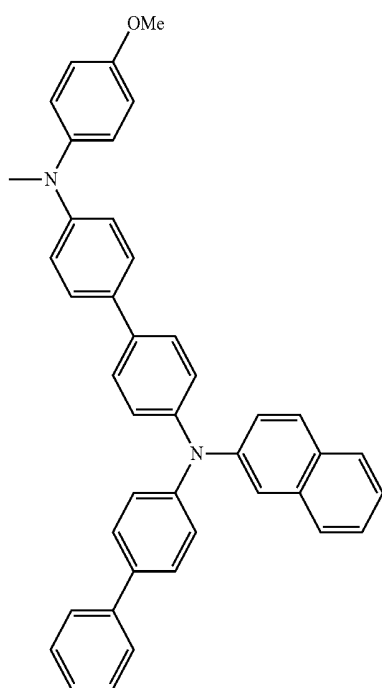


422

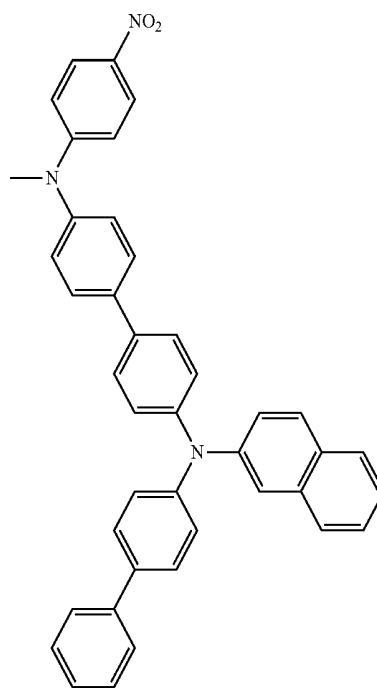


-continued

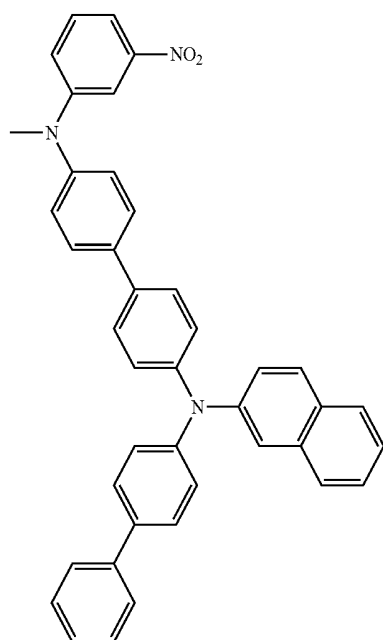


-continued

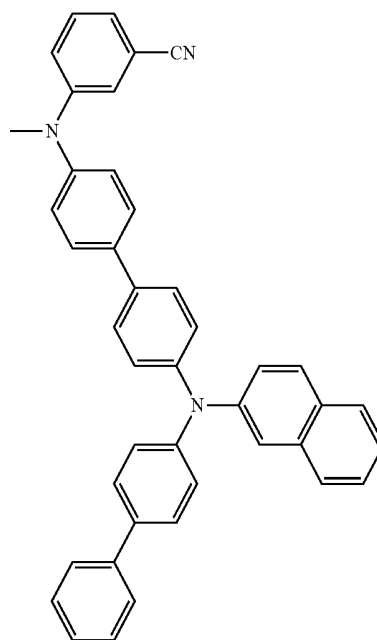


424

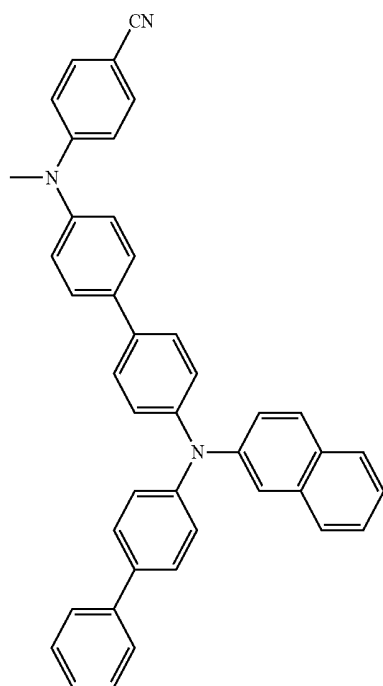

426

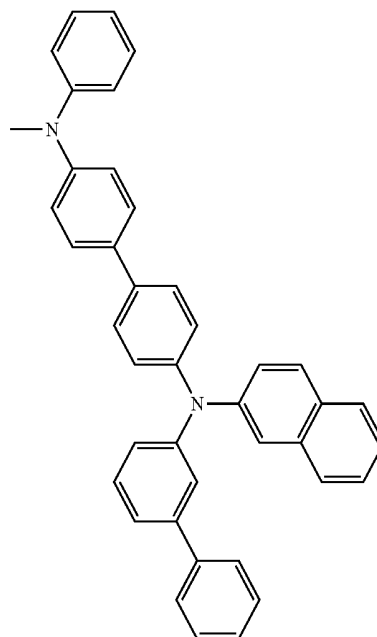


-continued

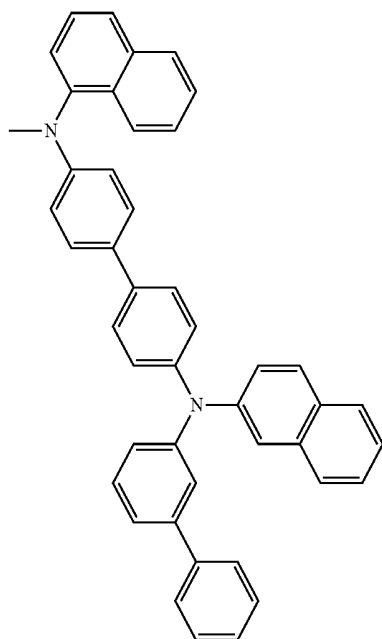


427

-continued

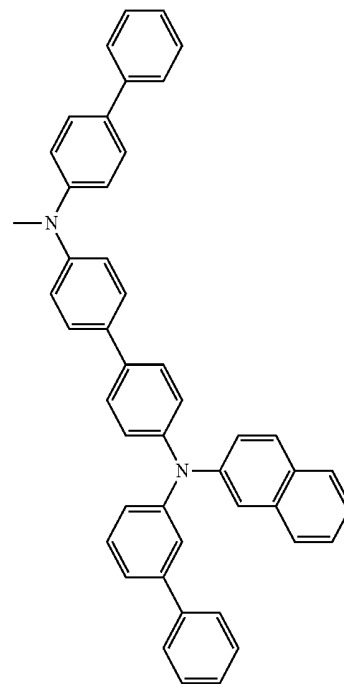


429


428

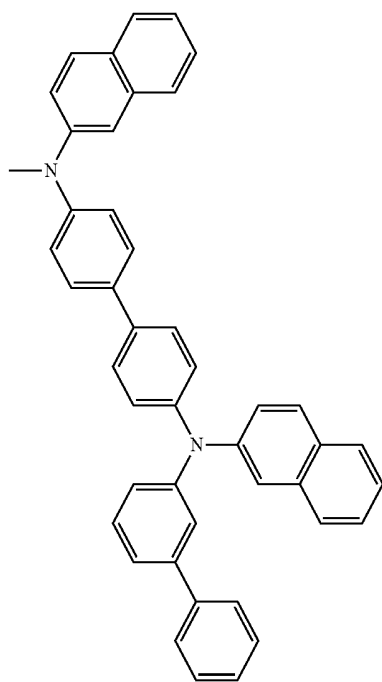




430

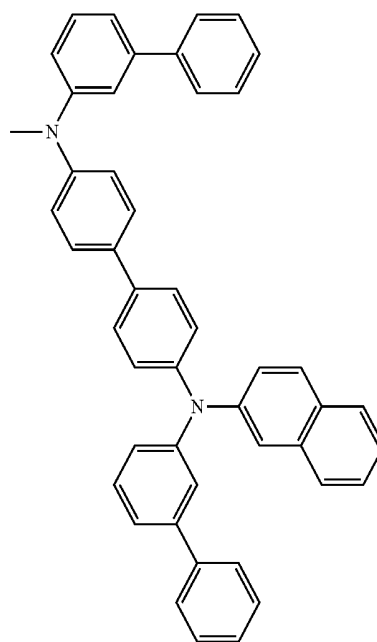


-continued

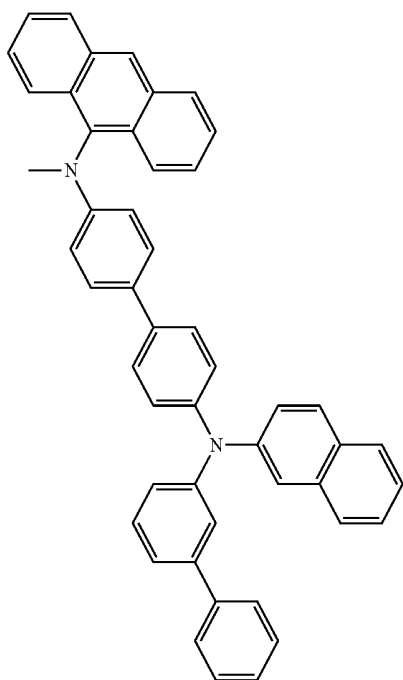


-continued

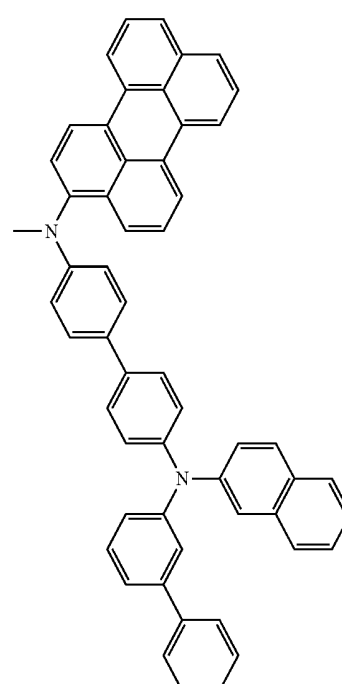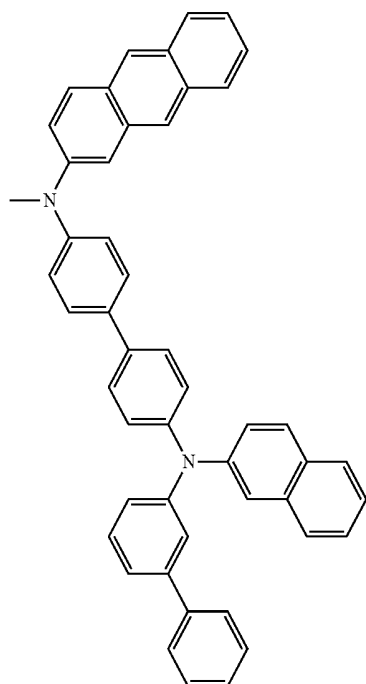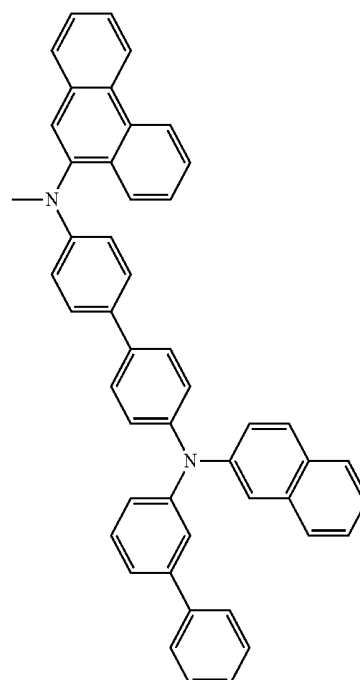


-continued

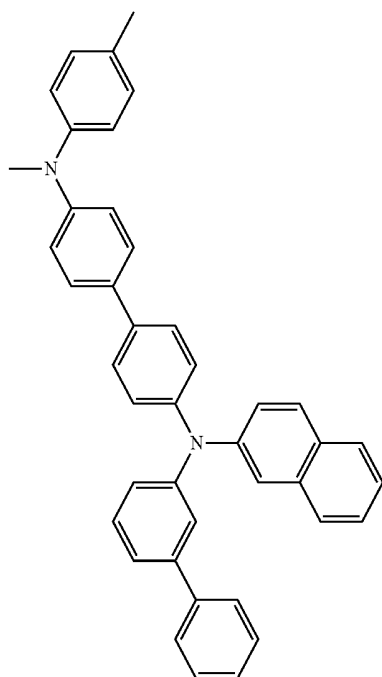


-continued

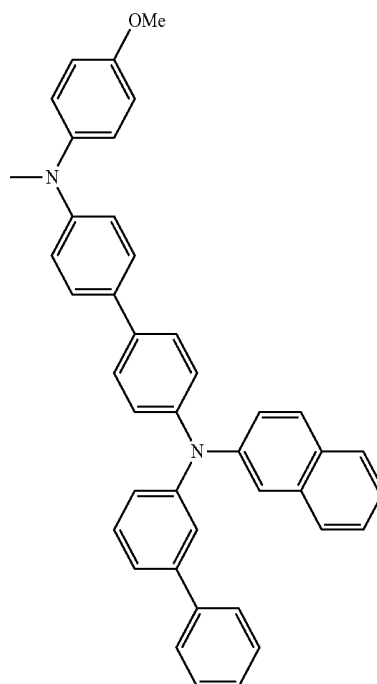


436

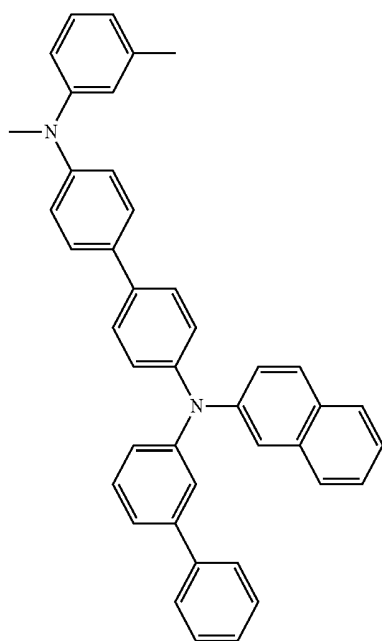


438

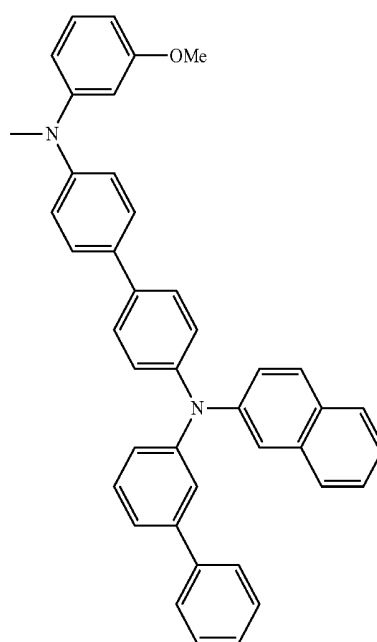


-continued

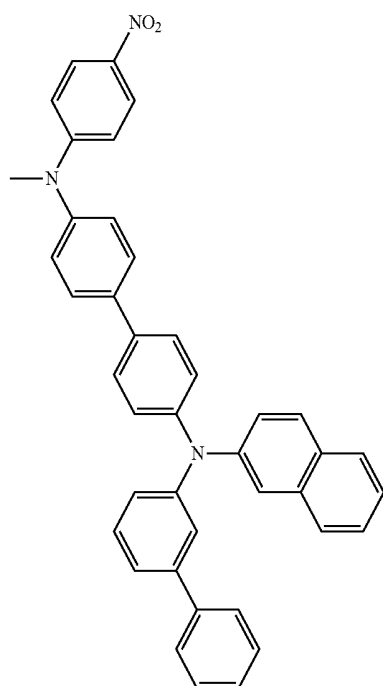


-continued

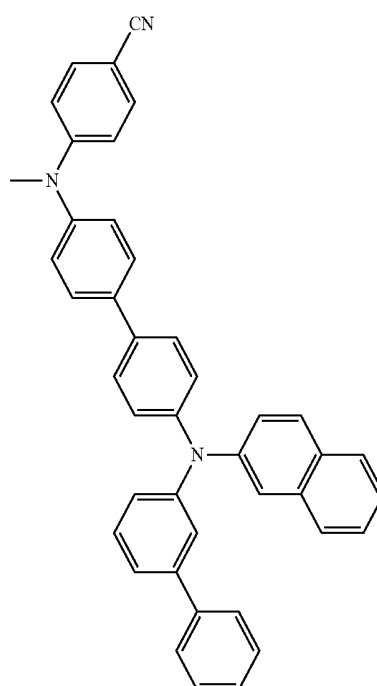

440

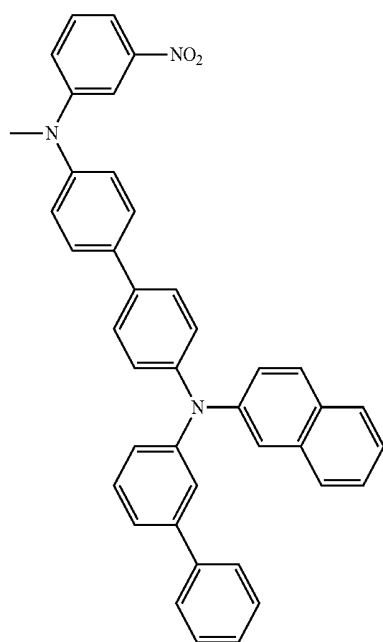


442

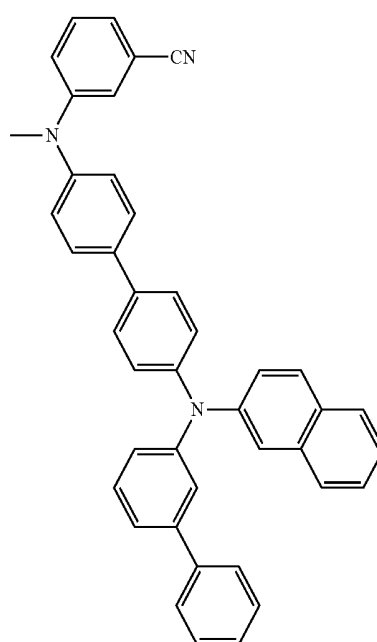


-continued

443

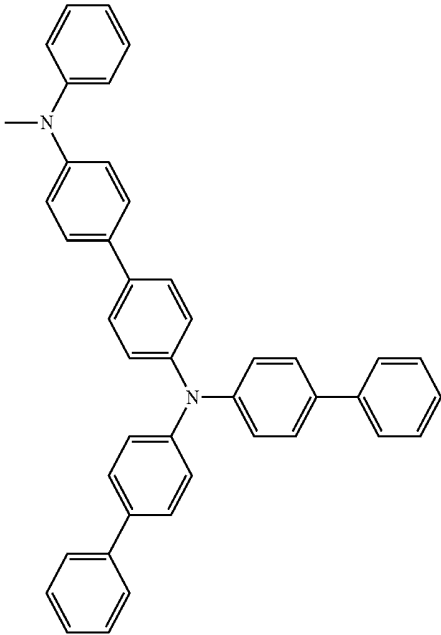


-continued


445

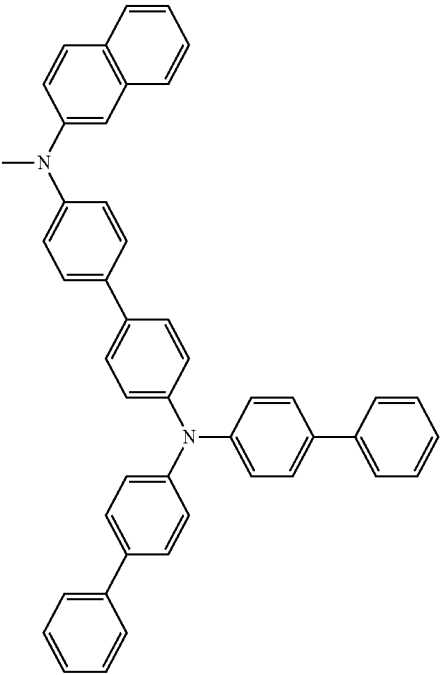


444

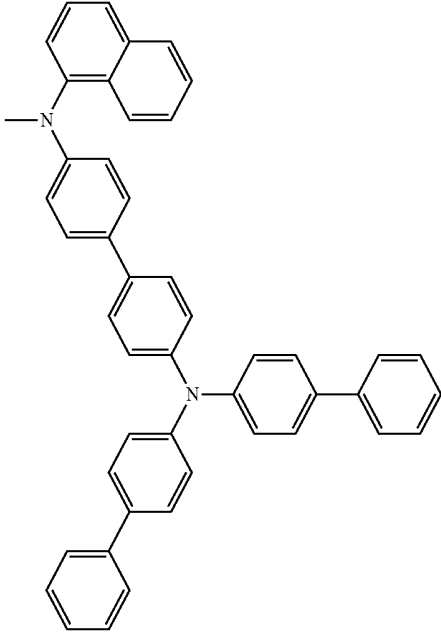

446

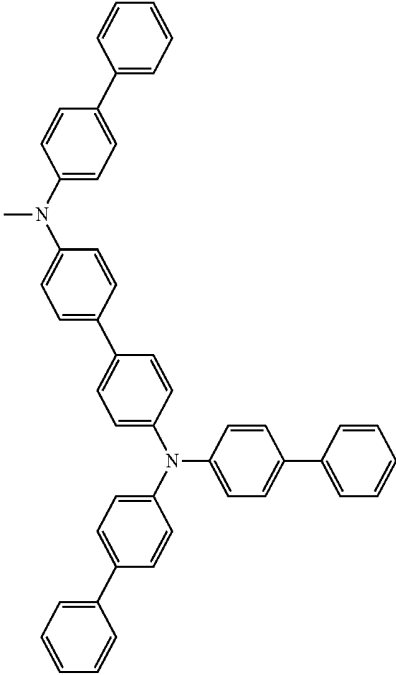


-continued

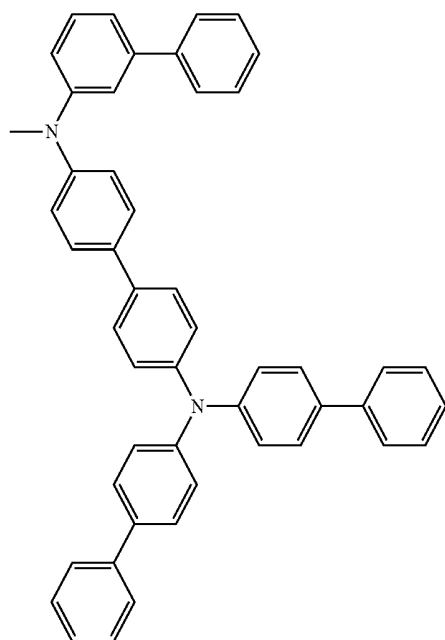


447

-continued

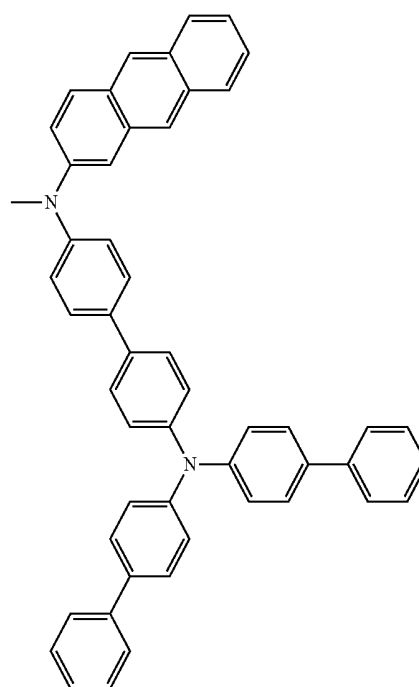


449


448

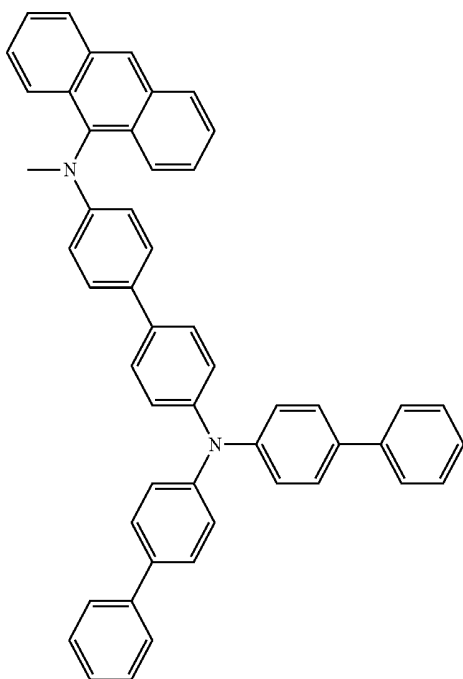

450

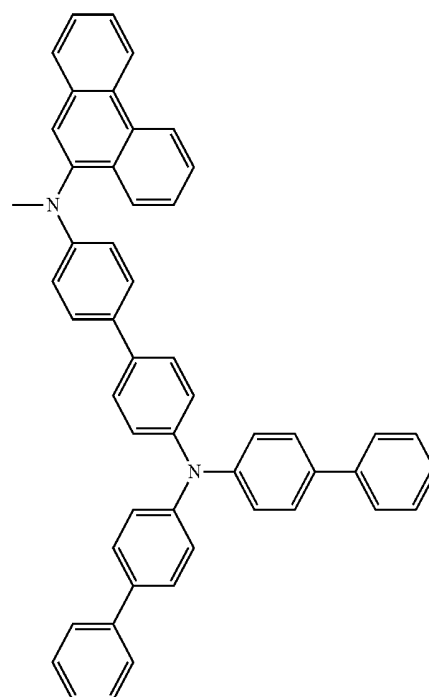


-continued

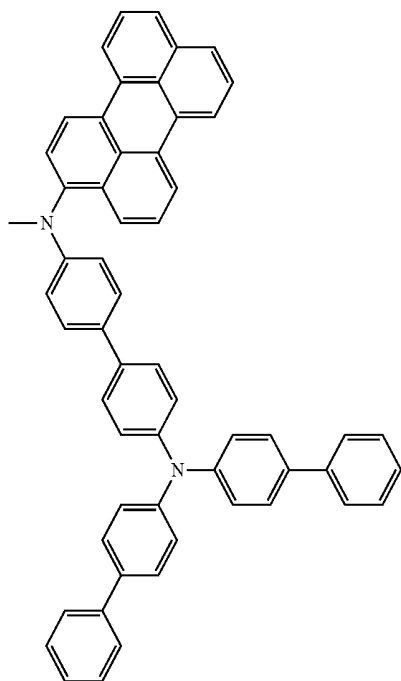


451


-continued

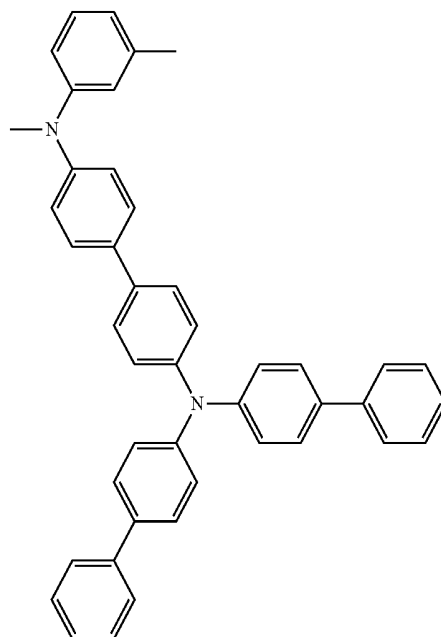

453

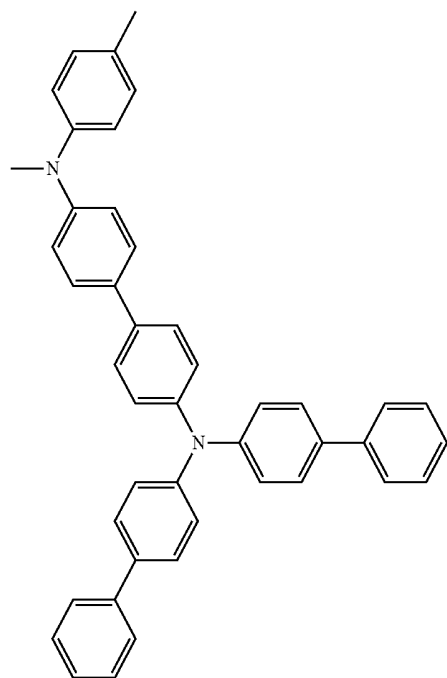


452

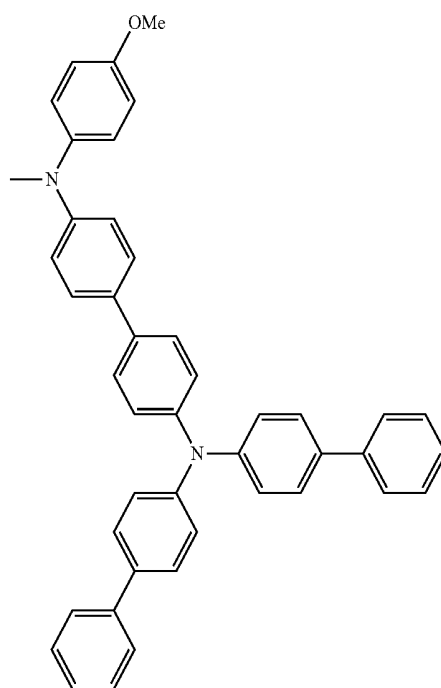


454


-continued

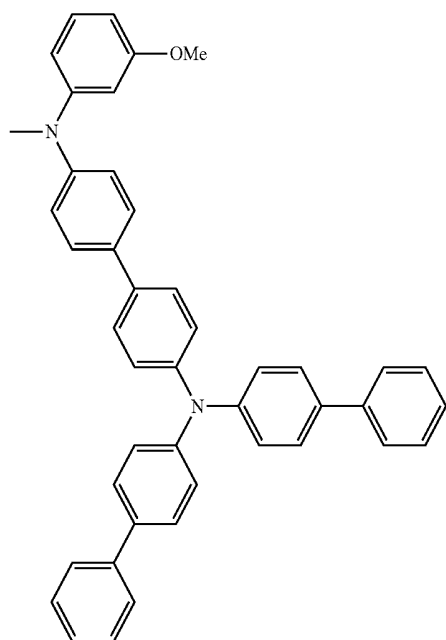


-continued

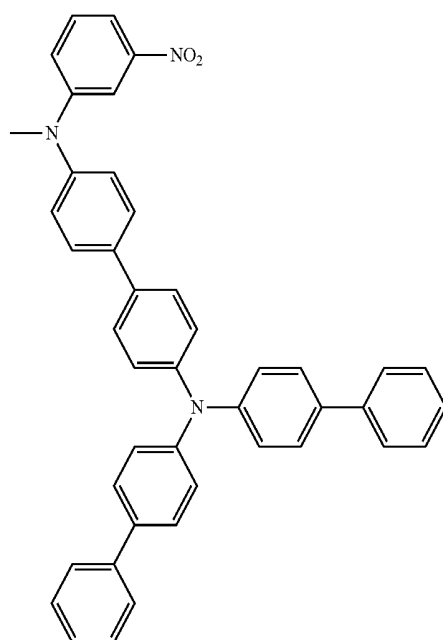


456

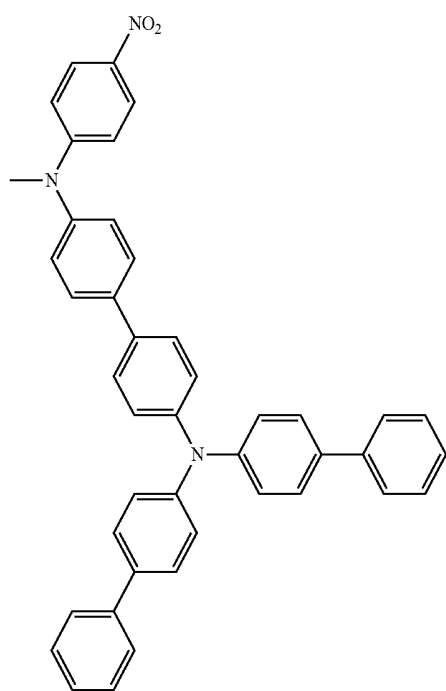


458

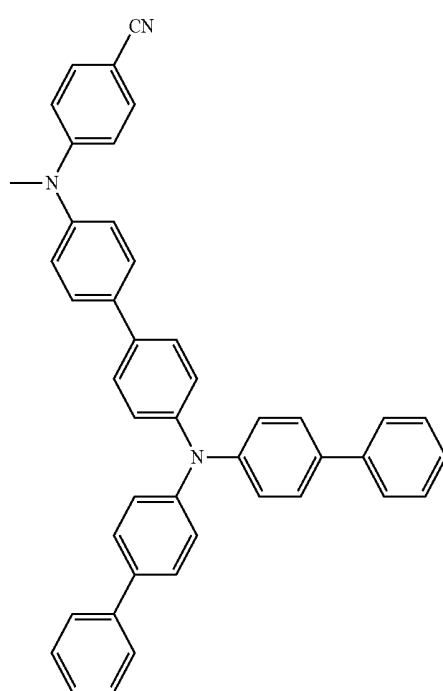


-continued

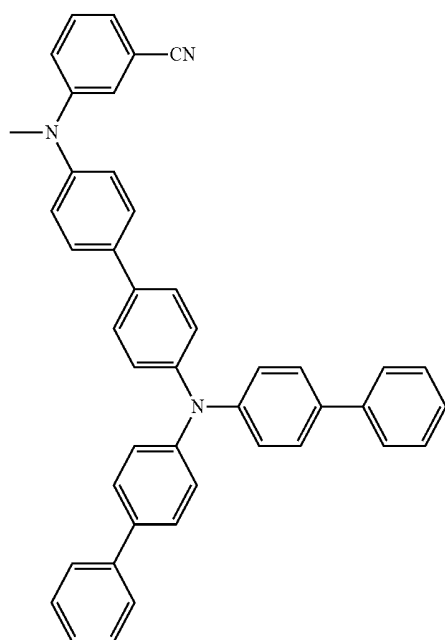


-continued

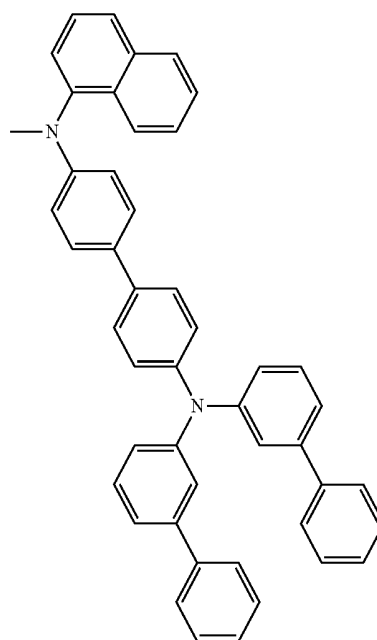


460

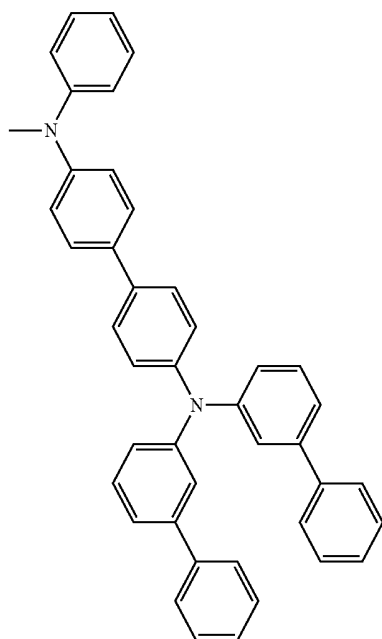

462

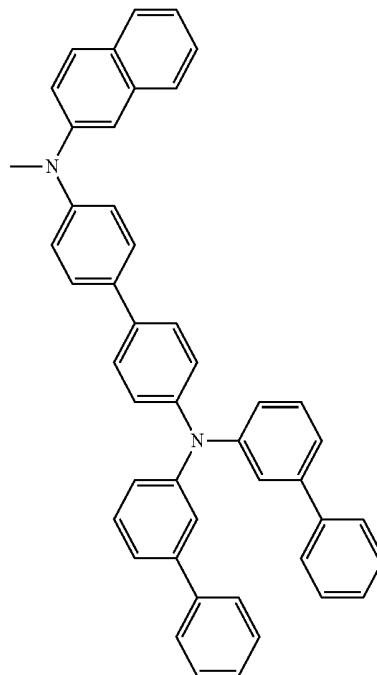


-continued

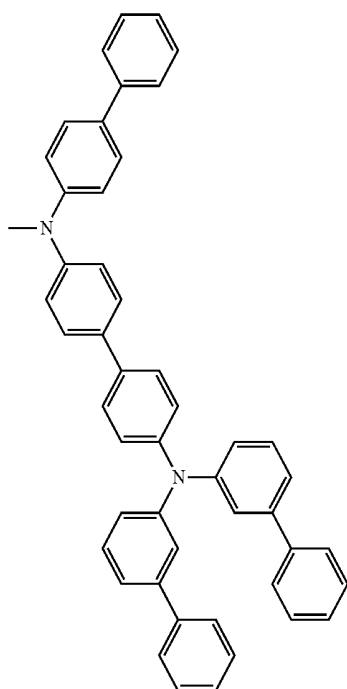


463


-continued

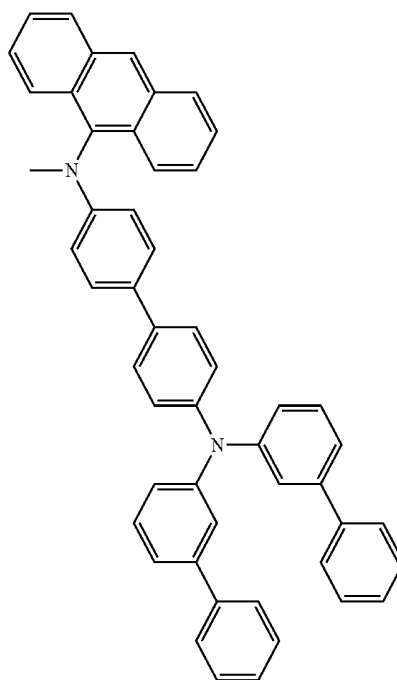

465

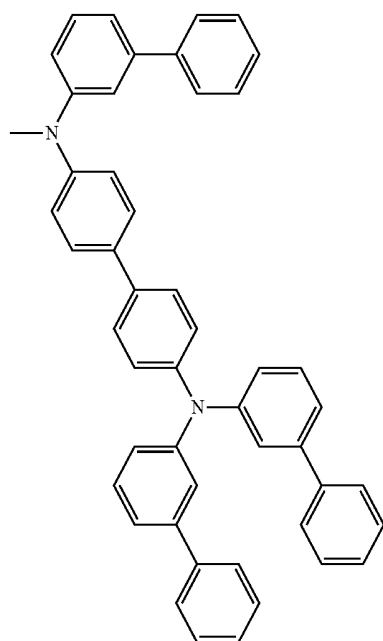


464

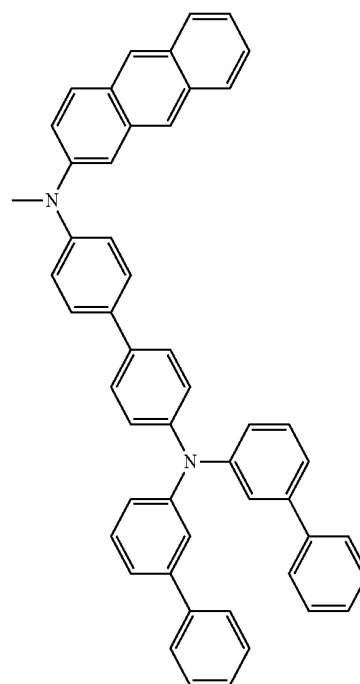


466


-continued

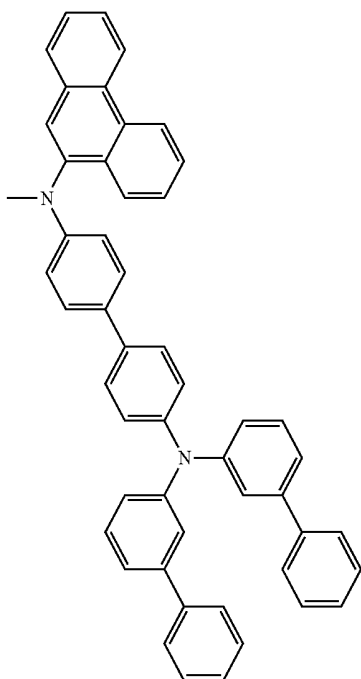


-continued

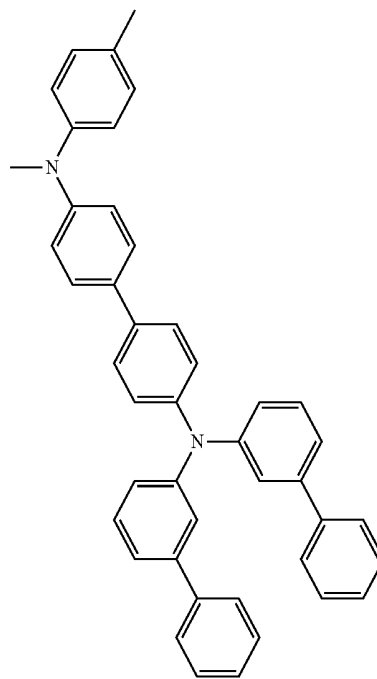


468

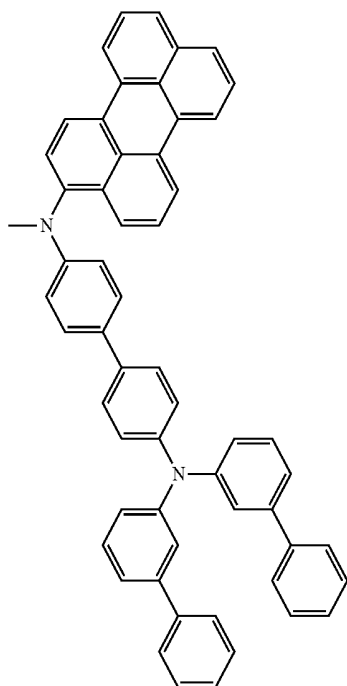




470

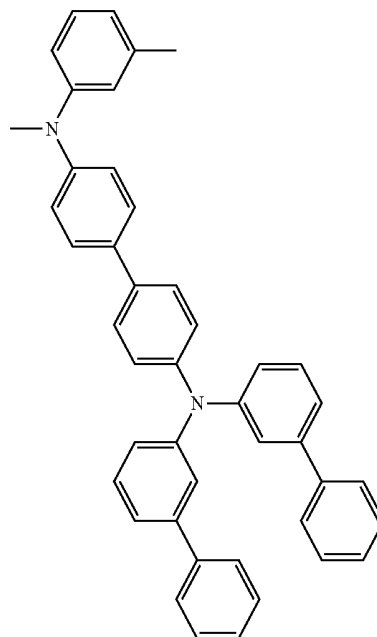



-continued

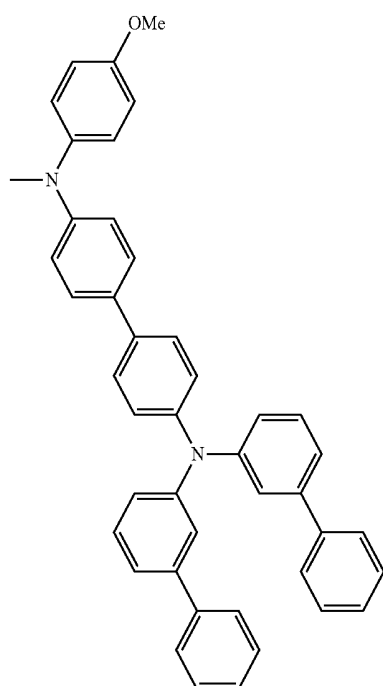

-continued

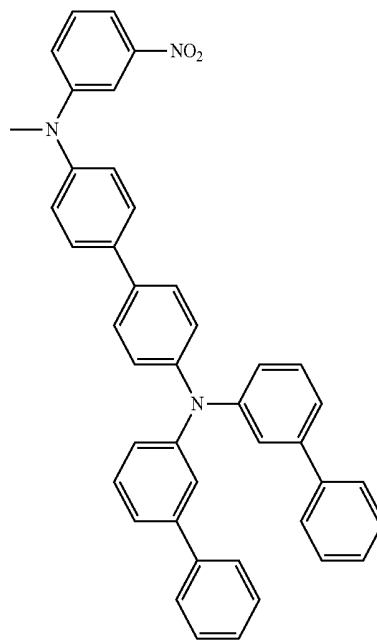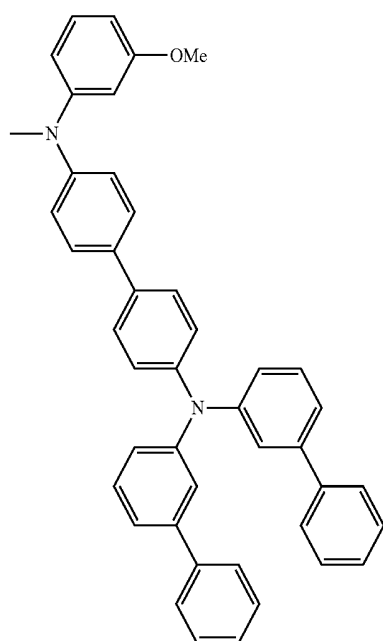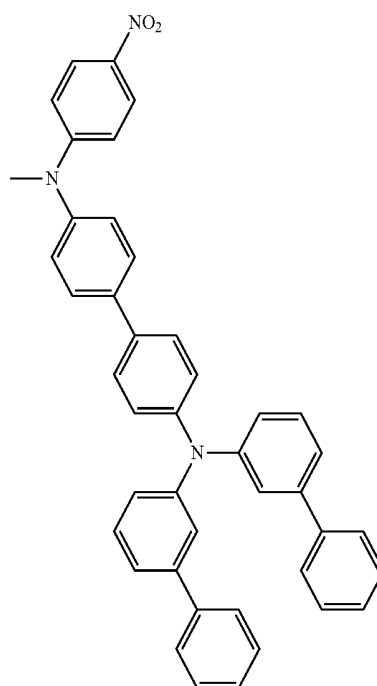


-continued

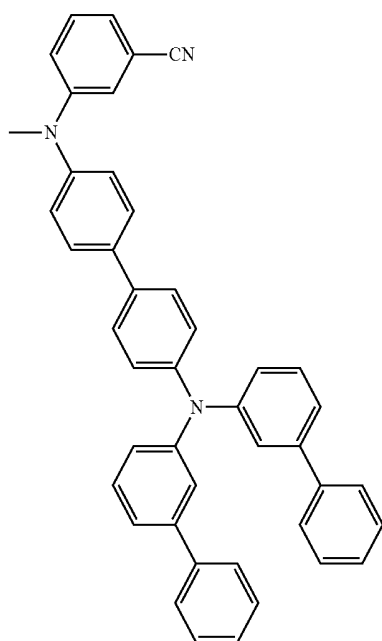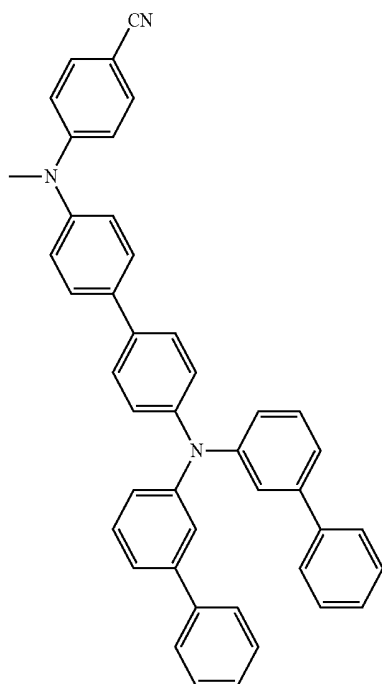

[0074] More specifically, the compound for an organic optoelectronic device may be represented by the following Chemical Formula 1.

475

[Chemical Formula 1]

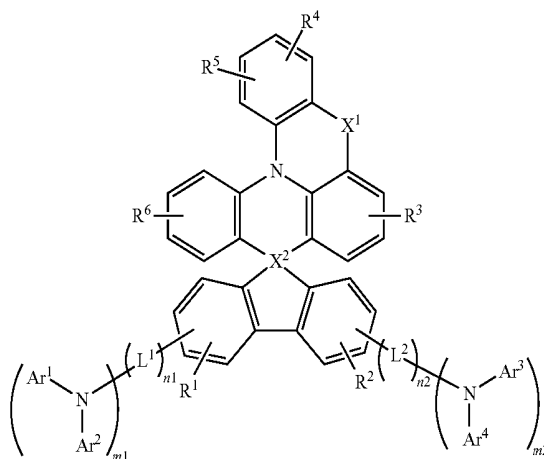

476

[0075] In the above Chemical Formula 1, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 to Ar^4 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group. L^1 and L^2 are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 arylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 and m_2 are independently integers of 0 or 1, one of m_1 and m_2 is 1, n_1 and n_2 are independently integers ranging from 0 to 3, R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0076] The X^1 may be $—O—$ or $—S—$. Since the X^1 has a polar group and thus, is able to interact with an electrode, charges may be easily injected.


[0077] When the arylamine group (or a heteroarylamine group) is combined with the core having a spiro structure, charge mobility may be increased, and thus, driving voltage of a device may be deteriorated.

[0078] In addition, the compound has steric hindrance and thus, may be suppressed from crystallization due to small interaction among molecules. Accordingly, a yield of manufacturing a device may be improved. In addition, life-span characteristics of the device may be improved.

[0079] Furthermore, the compound has a relatively large molecular weight and may be suppressed from decomposition during the deposition.

[0080] More specifically, the above Chemical Formula 1 may be represented by the following Chemical Formula 2. When an aryl amine group (or a heteroaryl amine group) is positioned as shown in the following Chemical formula 2, the compound may be easily synthesized.


[Chemical Formula 2]

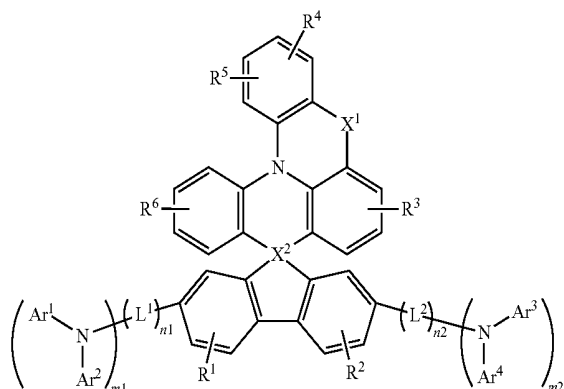

[0081] In the above Chemical Formula 2, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 to Ar^4 are independently a substituted or unsubstituted C8 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L^1 and L^2 are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 and m_2 are independently integers of 0 or 1, one of m_1 and m_2 is 1, n_1 and n_2 are independently integers ranging from 0 to 3, R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0082] More specifically the compound for an organic optoelectronic device may be represented by the following Chemical Formula 3.

[Chemical Formula 3]

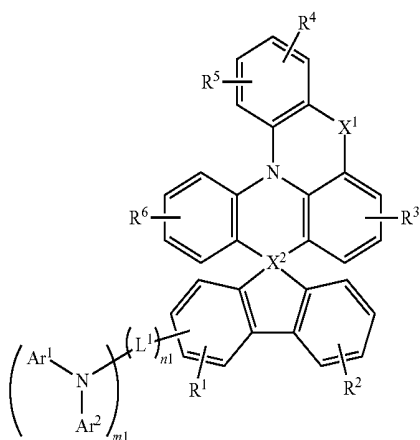


[0083] In the above Chemical formula 3, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 and Ar^2 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L^1 is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a

substituted or unsubstituted C8 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 is 1, n_1 is integers ranging from 0 to 3, R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0084] More specifically, the compound for an organic optoelectronic device may be represented by the following Chemical Formula 4.

[Chemical Formula 4]

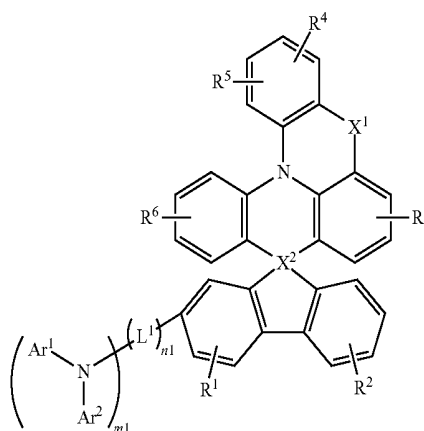

[0085] In the above Chemical Formula 4, X^1 is $—O—$ or $—S—$, X^2 is $—C—$ or $—Si—$, Ar^1 and Ar^2 are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L^1 is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m_1 is 1, n_1 is integers ranging from 0 to 3, R^1 to R^6 are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0086] The L^1 and L^2 may be selectively adjusted to determine the entire conjugation length of the compound, and thereby HOMO, LUMO energy band may be adjusted.

[0087] Specific examples of the L^1 and L^2 may be a substituted or unsubstituted phenylene group, a substituted or unsubstituted biphenylene group, a substituted or unsubstituted terphenylene group, a substituted or unsubstituted naphthylene group, a substituted or unsubstituted anthracenylene group, a substituted or unsubstituted phenanthrylene group, a substituted or unsubstituted pyrenylene group, a substituted or unsubstituted fluorenylene group, a thiophenylene group, a furan group, and the like.

[0088] The Ar^1 to Ar^4 may be independently a substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-ter-

phenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted beozothiophenyl group, a substituted or unsubstituted benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinoliny group, a substituted or unsubstituted isoquinoliny group, a substituted or unsubstituted quinazolinyl group, a substituted or unsubstituted quinoxaliny group, a substituted or unsubstituted naphthyridinyl group, a substituted or unsubstituted benzoxazinyl group, a substituted or unsubstituted benzthiazinyl group, a substituted or unsubstituted acridinyl group, a substituted or unsubstituted phenazinyl group, a substituted or unsubstituted phenothiazinyl group, a substituted or unsubstituted phenoxazinyl group, or a combination thereof, but is not limited thereto.


[0089] The compound for an organic optoelectronic device may have light emission, hole or electron characteristics; film stability; thermal stability; and high triplet exciton energy (T1) due to the substituent.

[0090] The X^2 may be $-C-$. Herein, since upper and lower molecules in the center of C are not in the same plane, energy band may be adjusted.


[0091] More specifically, the compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae A-1 to A-28, but is not limited thereto.

-continued

A-2


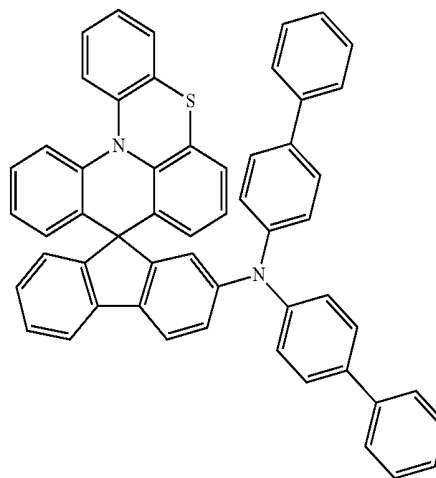


A-3

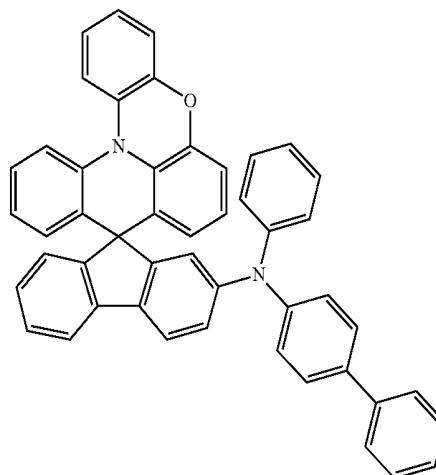


A-4

A-1

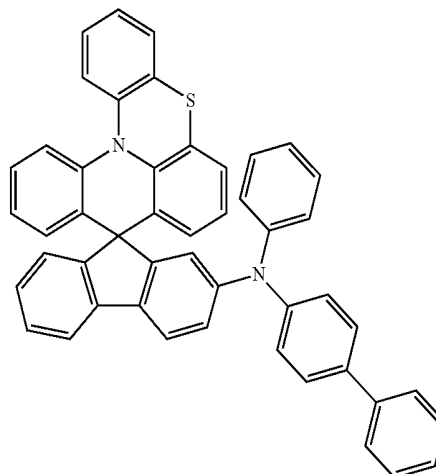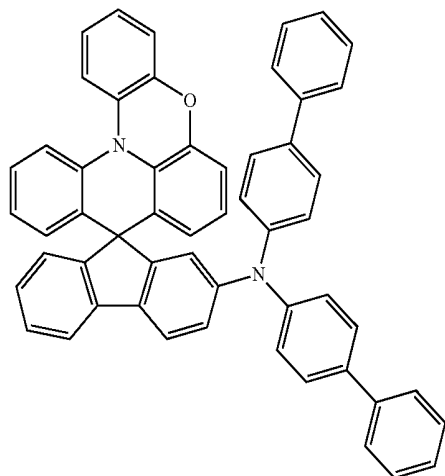


-continued

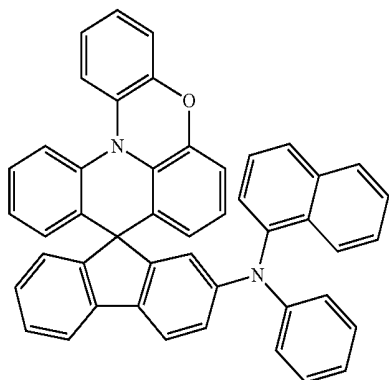


A-5


-continued

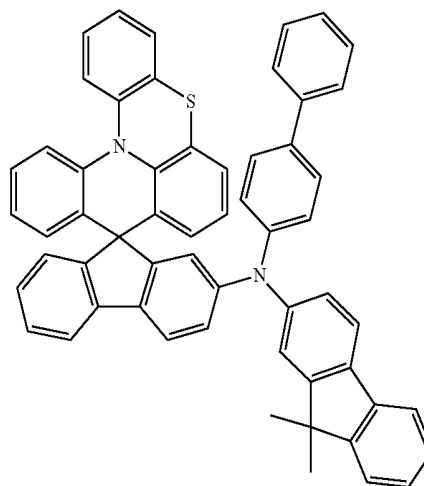


A-8

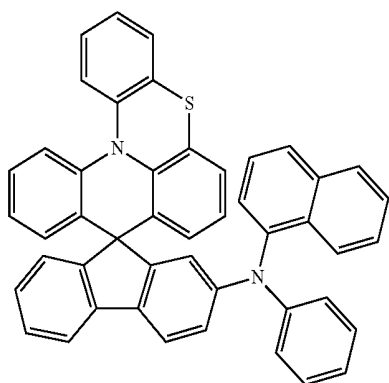


A-6

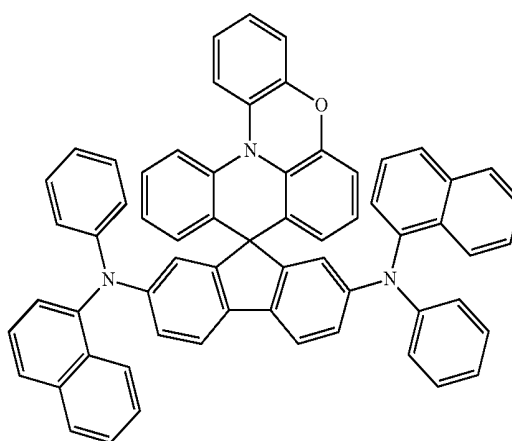

A-9

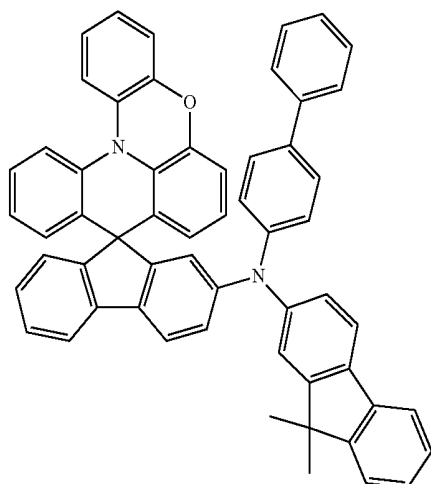


A-7

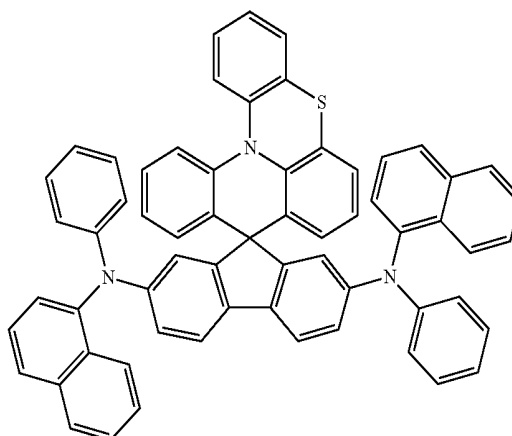

A-10


-continued

A-11

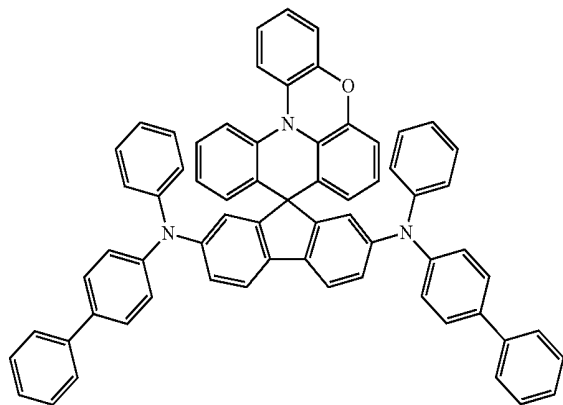



-continued

A-14

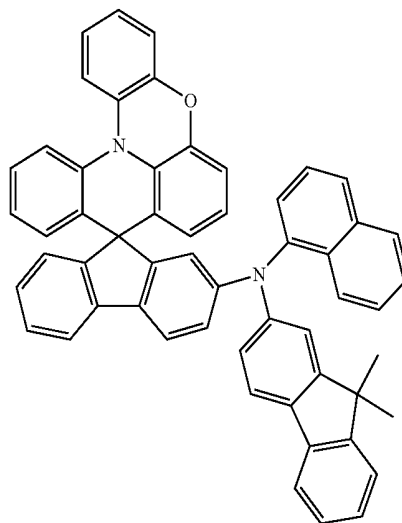



A-15

A-12

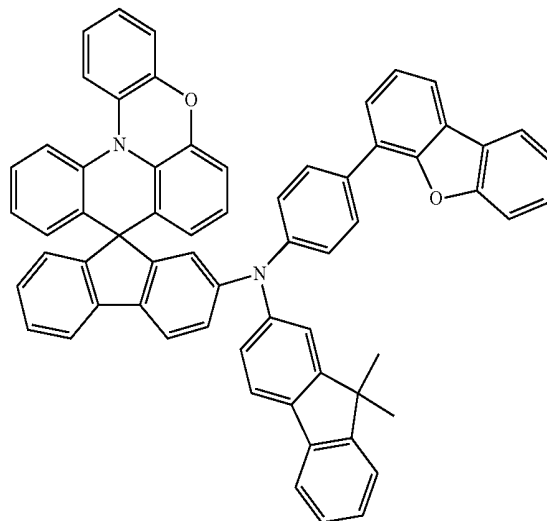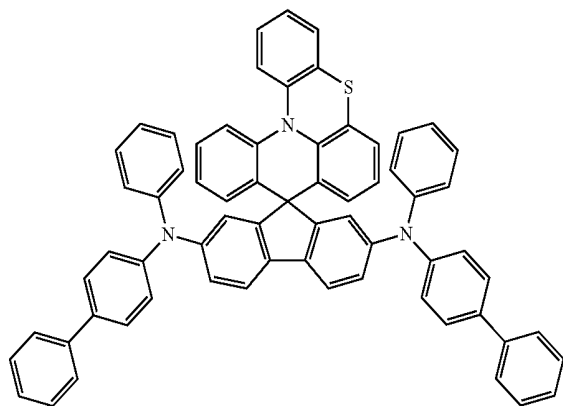


A-16

A-13

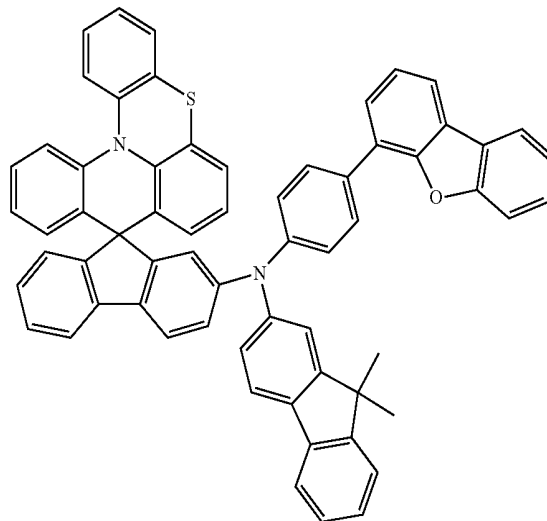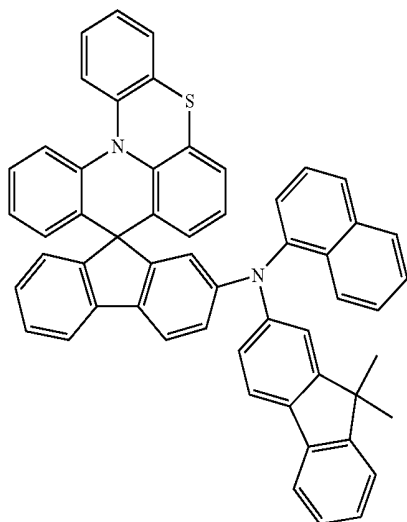


-continued


A-17

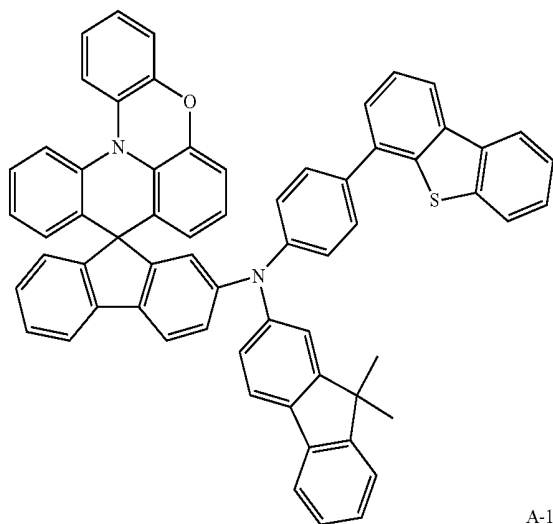

A-18

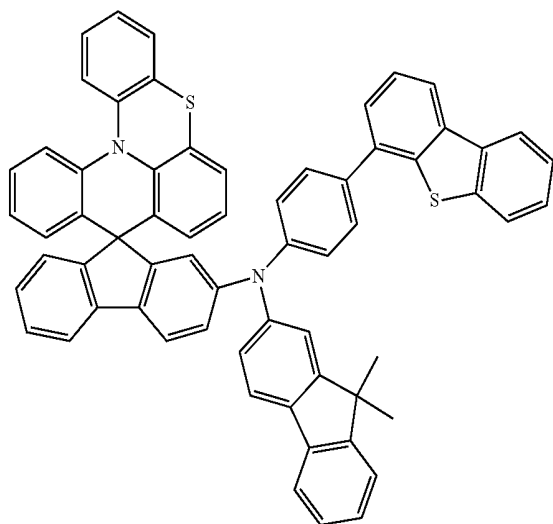


A-19

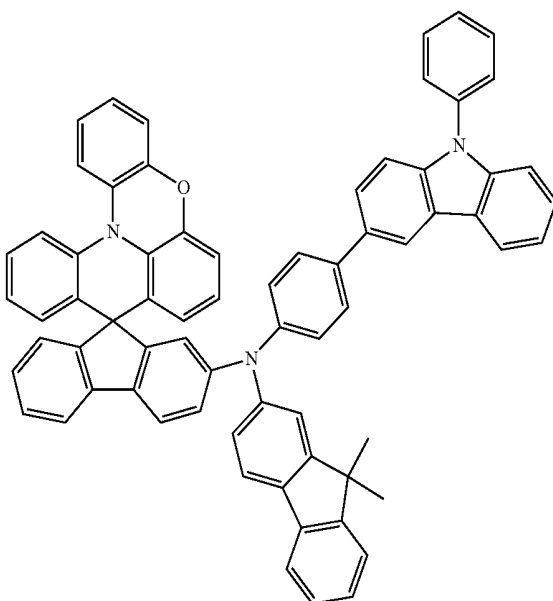


-continued

A-20

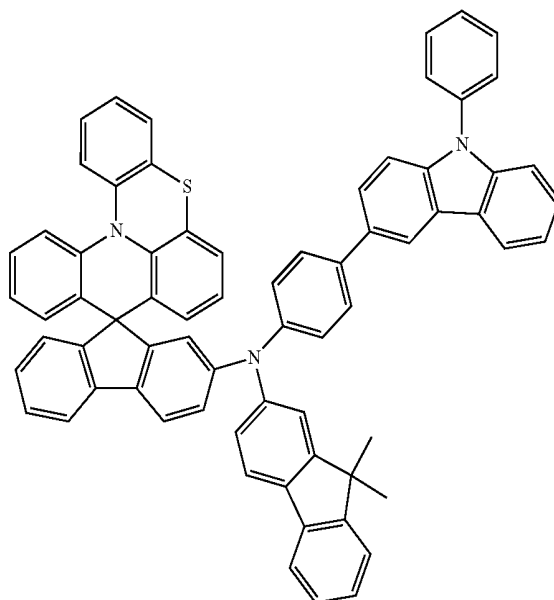


A-21

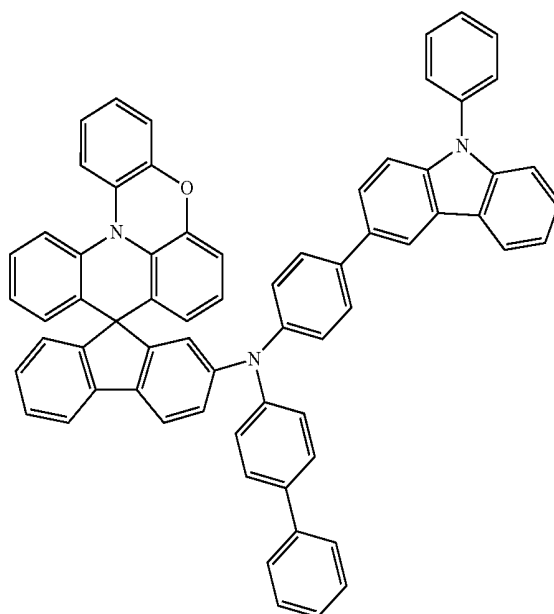


-continued

A-22

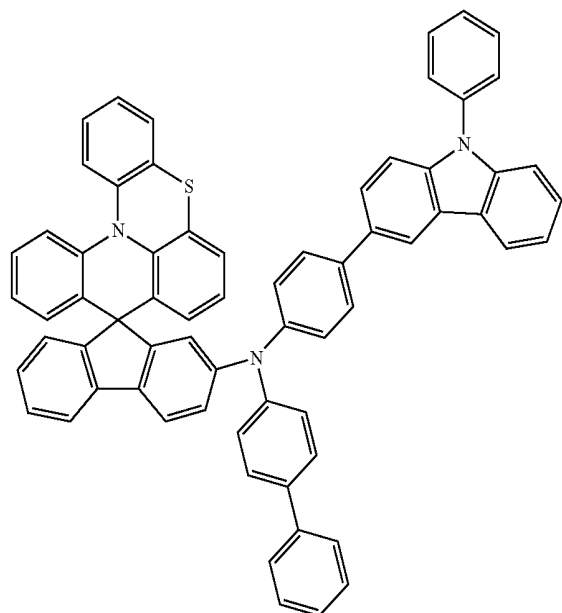


-continued


A-24

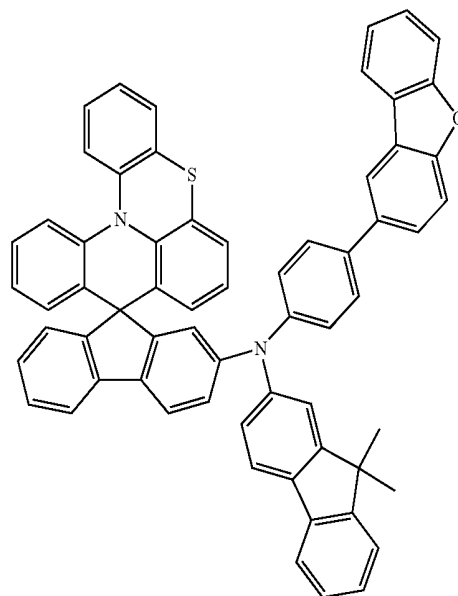

A-23

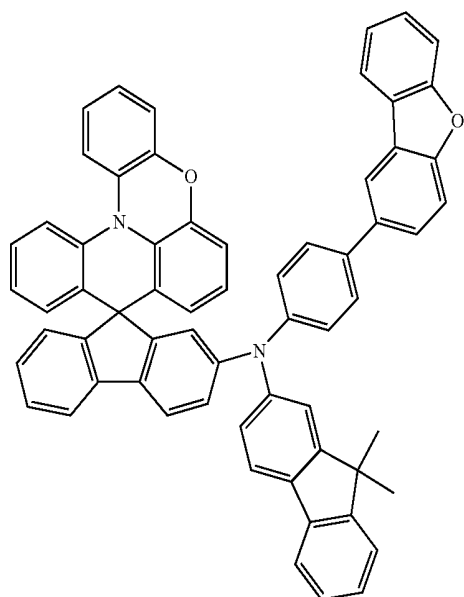


A-25

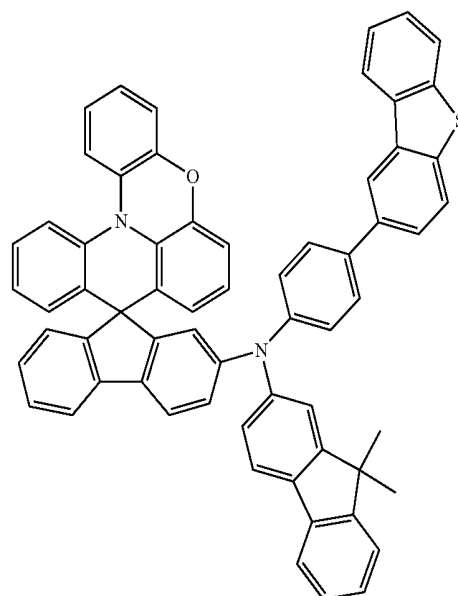


-continued

A-26

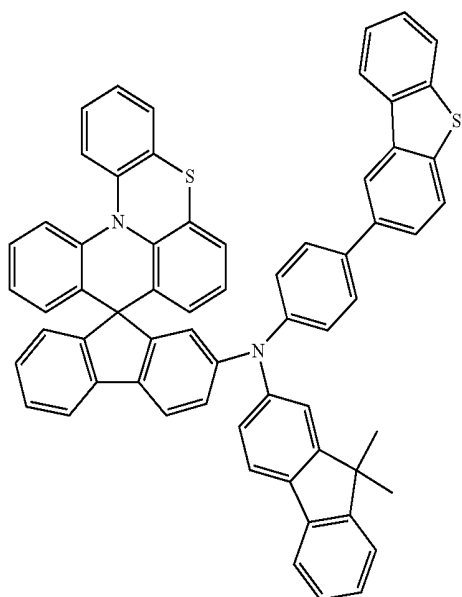


-continued

[B-3]

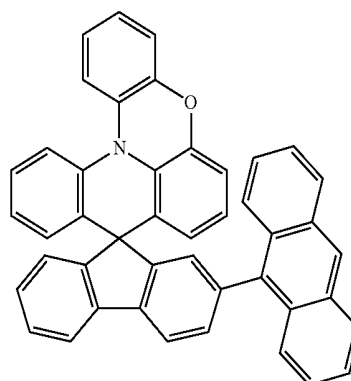


[B-4]




[0092] More specifically, the compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae B-1 to B-10, but is not limited thereto.


[B-1]




[B-5]

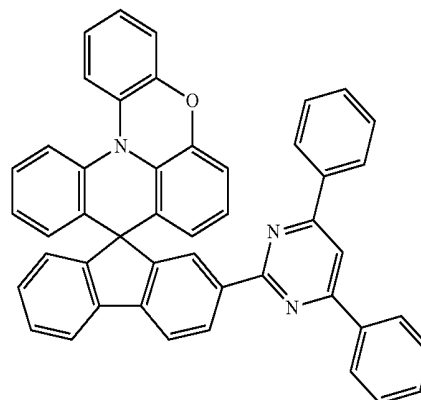


[B-2]

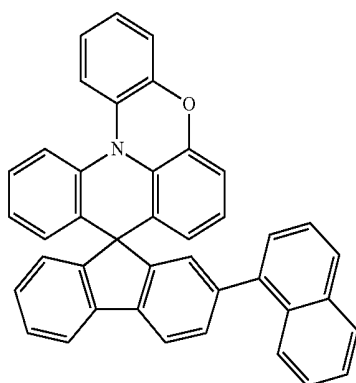


[B-6]

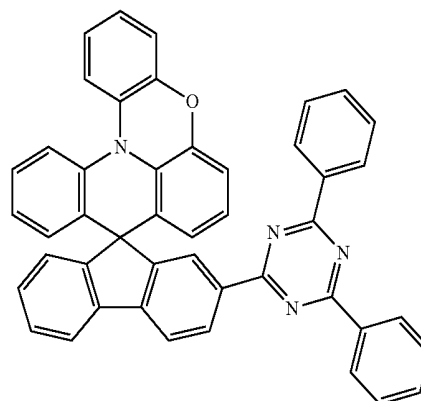


-continued

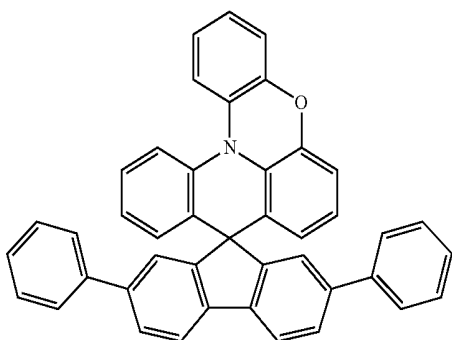


[B-7]

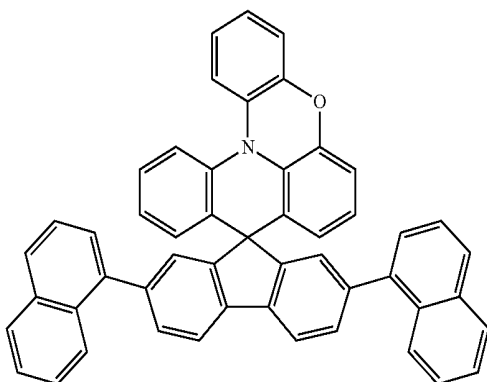

[B-8]

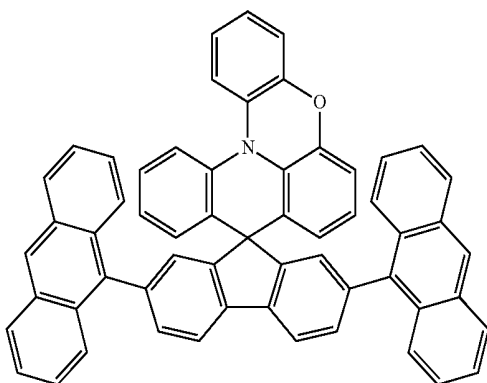

[B-9]

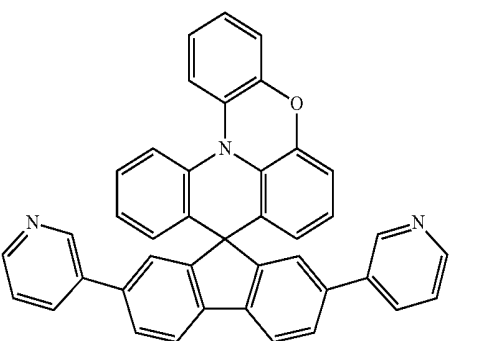

[B-10]

[0093] When the above compound according to one embodiment of the present invention requires both electron and hole characteristics, the functional group having electron

characteristics may be introduced to effectively improve life-span of an organic light emitting diode, and decreasing its driving voltage.

[0094] The above compound for an organic optoelectronic device according to one embodiment of the present invention shows a maximum light emitting wavelength in a range of about 320 to about 500 nm, high triplet exciton energy (T1) of greater than equal to about 2.0 eV and specifically, about 2.0 to about 4.0 eV and thus, has an advantage of increasing luminous efficiency of a dopant by well transporting charges of a host having high triplet exciton energy to the dopant and decreasing a driving voltage by freely adjusting HOMO and LUMO energy levels of a material and accordingly, may be used as a host material or a charge transport material.

[0095] In addition, the compound for an organic optoelectronic device has optical and electrical activity and thus, may be used as a non-linear optical material, an electrode material, an electrochromic material, an optical switch, a sensor, a module, a wave guide, an organic transistor, a laser, an optical absorbing material, a dielectric material and a material for a separation membrane and the like.

[0096] The compound for an organic optoelectronic device including the above compounds has a glass transition temperature of greater than or equal to about 90° C. and a thermal decomposition temperature of greater than or equal to about 400° C., indicating improved thermal stability. Thereby, it is possible to produce an organic optoelectronic device having a high efficiency.

[0097] The compound for an organic optoelectronic device including the above compounds may play a role for emitting light or injecting and/or transporting electrons, and also act as a light emitting host with an appropriate dopant. In other words, the compound for an organic optoelectronic device may be used as a phosphorescent or fluorescent host material, a blue light emitting dopant material, or an electron transport material.

[0098] The compound for an organic optoelectronic device according to one embodiment of the present invention is used for an organic thin layer, and it may improve the life-span characteristics, efficiency characteristics, electrochemical stability, and thermal stability of an organic optoelectronic device and decrease the driving voltage.

[0099] Therefore, according to another embodiment, an organic optoelectronic device that includes the compound for an organic optoelectronic device is provided. The organic optoelectronic device may include an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, an organic memory device, and the like. For example, the compound for an organic optoelectronic device according to one embodiment may be included in an electrode or an electrode buffer layer. In the organic solar cell to improve the quantum efficiency, and it may be used as an electrode material for a gate, a source-drain electrode, or the like in the organic transistor.

[0100] Hereinafter, an organic light emitting diode is specifically described.

[0101] An organic light emitting diode according to another embodiment of the present invention includes an anode, a cathode, and at least one or more organic thin layer between the anode and the cathode, and at least one of the organic thin layers may include the compound for an organic optoelectronic device according to one embodiment of the present invention.

[0102] The organic thin layer including the compound for an organic optoelectronic device may include a layer selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof. The at least one layer includes the compound for an organic optoelectronic device according to one embodiment. Particularly, the compound for an organic optoelectronic device according to one embodiment may be included in an electron transport layer or electron injection layer. In addition, when the compound for an organic optoelectronic device is included in the emission layer, the compound for an organic optoelectronic device may be included as a phosphorescent or fluorescent host, and particularly, as a fluorescent blue dopant material.

[0103] FIGS. 1 to 5 are cross-sectional views showing organic light emitting diodes including the compound for an organic optoelectronic device according to one embodiment of the present invention.

[0104] Referring to FIGS. 1 to 6, organic light emitting diodes 100, 200, 300, 400, and 500 according to one embodiment include at least one organic thin layer 105 interposed between an anode 120 and a cathode 110.

[0105] The anode 120 includes an anode material having a large work function to help hole injection into an organic thin layer. Specific examples of the anode material include: a metal such as nickel, platinum, vanadium, chromium, copper, zinc, and gold, or alloys thereof; a metal oxide such as zinc oxide, indium oxide, indium tin oxide (ITO), and indium zinc oxide (IZO); a combined metal and oxide such as ZnO:Al or SnO₂:Sb or a conductive polymer such as poly(3-methylthiophene), poly[3,4-(ethylene-1,2-dioxy)thiophene] (PEDT), polypyrrole, and polyaniline, but is not limited thereto. It is preferable to include a transparent electrode including indium tin oxide (ITO) as an anode.

[0106] The cathode 110 includes a cathode material having a small work function to help electron injection into an organic thin layer. Specific examples of the cathode material include: a metal such as magnesium, calcium, sodium, potassium, titanium, indium, yttrium, lithium, gadolinium, aluminum, silver, tin, and lead, or alloys thereof; or a multi-layered material such as LiF/Al, Liq/Al, LiO₂/Al, LiF/Ca, LiF/Al, and BaF₂/Ca, but is not limited thereto. It is preferable to include a metal electrode including aluminum as a cathode.

[0107] First, referring to FIG. 1, the organic light emitting diode 100 includes an organic thin layer 105 including only an emission layer 130.

[0108] Referring to FIG. 2, a double-layered organic light emitting diode 200 includes an organic thin layer 105 including an emission layer 230 including an electron transport layer (ETL), and a hole transport layer (HTL) 140. As shown in FIG. 2, the organic thin layer 106 includes a double layer of the emission layer 230 and hole transport layer (HTL) 140. The emission layer 130 also functions as an electron transport layer (ETL), and the hole transport layer (HTL) 140 layer has an excellent binding property with a transparent electrode such as ITO or an excellent hole transport capability.

[0109] Referring to FIG. 3, a three-layered organic light emitting diode 300 includes an organic thin layer 105 including an electron transport layer (ETL) 150, an emission layer 130, and a hole transport layer (HTL) 140. The emission layer 130 is independently installed, and layers having an excellent electron transport capability or an excellent hole transport capability are separately stacked.

[0110] As shown in FIG. 4, a four-layered organic light emitting diode 400 includes an organic thin layer 105 including an electron injection layer (EIL) 160, an emission layer 130, a hole transport layer (HTL) 140, and a hole injection layer (HIL) 170 for adherence with the cathode of ITO.

[0111] As shown in FIG. 5, a five-layered organic light emitting diode 500 includes an organic thin layer 105 including an electron transport layer (ETL) 150, an emission layer 130, a hole transport layer (HTL) 140, and a hole injection layer (HIL) 170, and further includes an electron injection layer (EIL) 160 to achieve a low voltage.

[0112] In FIGS. 1 to 5, the organic thin layer 105 including at least one selected from the group consisting of an electron transport layer (ETL) 150, an electron injection layer (EIL) 160, emission layers 130 and 230, a hole transport layer (HTL) 140, a hole injection layer (HIL) 170, and combinations thereof includes the compound for an organic optoelectronic device. The compound for an organic optoelectronic device may be used for an electron transport layer (ETL) 150 including the electron transport layer (ETL) 150 or electron injection layer (EIL) 160. When it is used for the electron transport layer (ETL), it is possible to provide an organic light emitting diode having a more simple structure because it does not require an additional hole blocking layer (not shown).

[0113] Furthermore, when the compound for an organic optoelectronic device is included in the emission layers 130 and 230, the compound for an organic optoelectronic device may be included as a phosphorescent or fluorescent host or a fluorescent blue dopant.

[0114] The organic light emitting diode may be manufactured by forming an anode on a substrate; forming an organic thin layer in accordance with a dry coating method such as evaporation, sputtering, plasma plating, and ion plating or a wet coating method such as spin coating, dipping, and low coating; and providing a cathode thereon.

[0115] Another embodiment of the present invention provides a display device including: the light emitting diode according to the above embodiment.

Mode for the Invention

[0116] Hereinafter, embodiments are illustrated in more detail with reference to examples. These examples, however, should not in any sense be interpreted as limiting the scope of the present invention.


Preparation of Compound for Organic Optoelectronic Device

EXAMPLE 1

Preparation of Compound A-1

[0117] A compound represented by the above Chemical Formula A-1 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 1.

[Reaction Scheme 1]

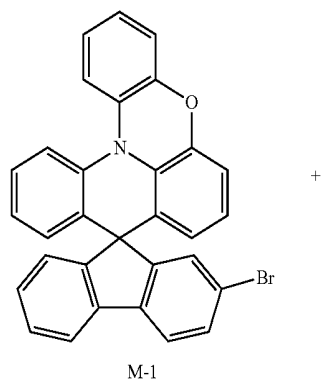

tylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.48 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.







[0119] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 8.6 g (76.4%) of a desired compound A-1 as a white solid.

EXAMPLE 2


Synthesis of Compound A-2

[0120] A compound represented by the above Chemical Formula A-2 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 2.

[Reaction Scheme 2]

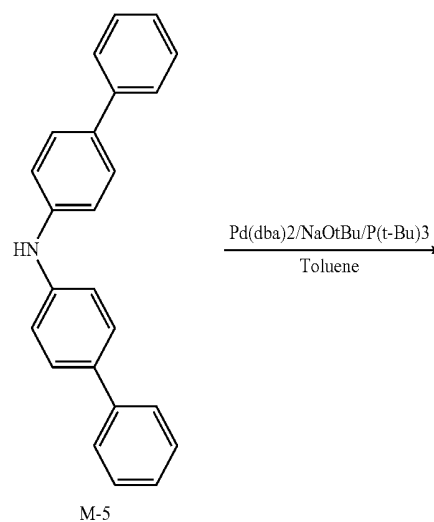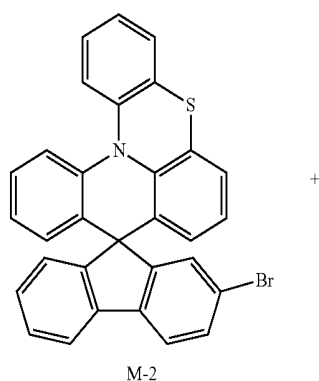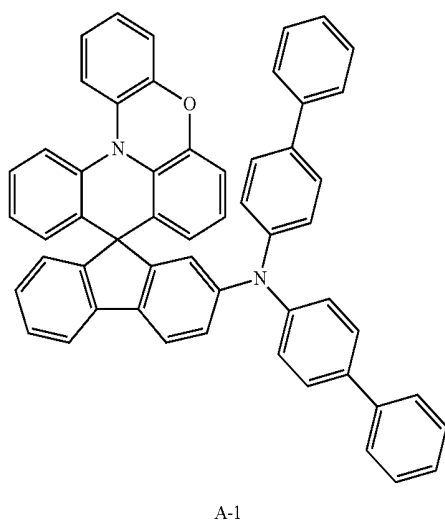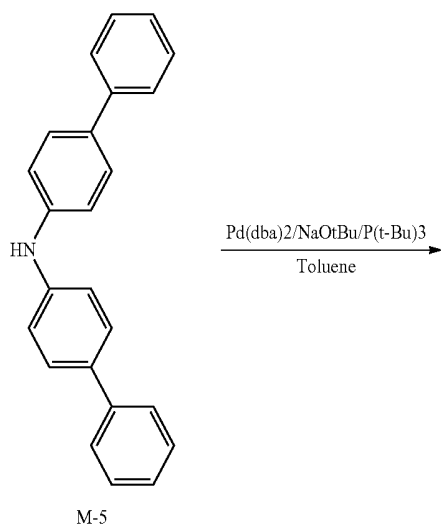

[0118] 8.36 g (16.71 mmol) of an intermediate M-1, 4.88 g (15.99 mmol) of an intermediate M-5, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-bu-

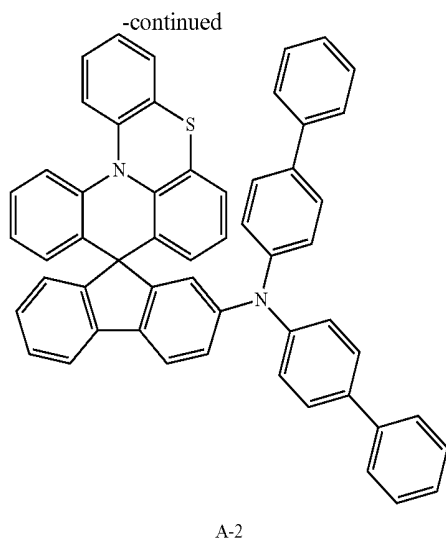

[0121] 8.83 g (16.71 mmol) of an intermediate M-2, 4.88 g (15.19 mmol) of an intermediate M-5, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.99 g (0.46 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.40 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.




[0122] When the reaction was complete, the resultant was extracted with toluene and distilled water, and an organic layer obtained therefrom was dried with anhydrous magnesium sulfate, filtered, and concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 8.4 g (73%) of a desired compound A-2 as a white solid.

EXAMPLE 3

Synthesis of Compound A-3

[0123] A compound represented by the above Chemical Formula A-3 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 3.

[Reaction Scheme 3]

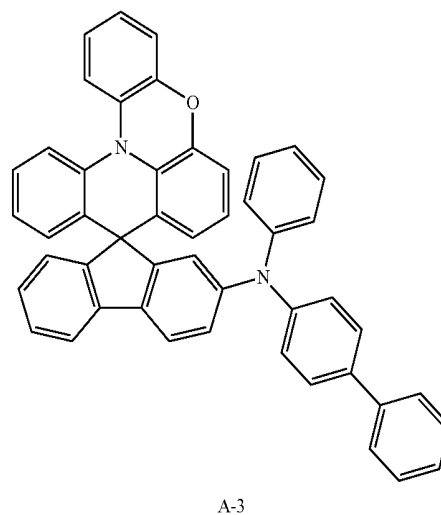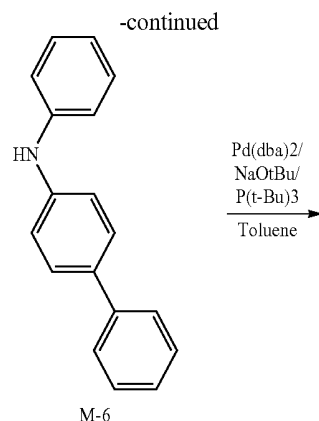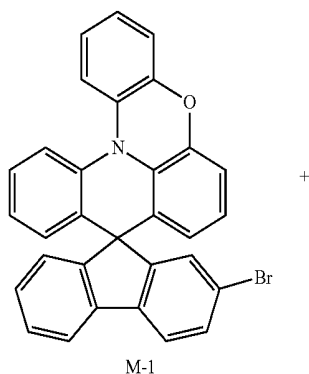

[0124] 8.36 g (16.71 mmol) of an intermediate M-1, 3.72 g (15.19 mmol) of an intermediate M-6, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.46 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.


[0125] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 7.9 g (78.2%) of a desired compound A-3 as a white solid.

EXAMPLE 4

Synthesis of Compound A-4

[0126] A compound represented by the above Chemical Formula A-4 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 4.

[Reaction Scheme 4]

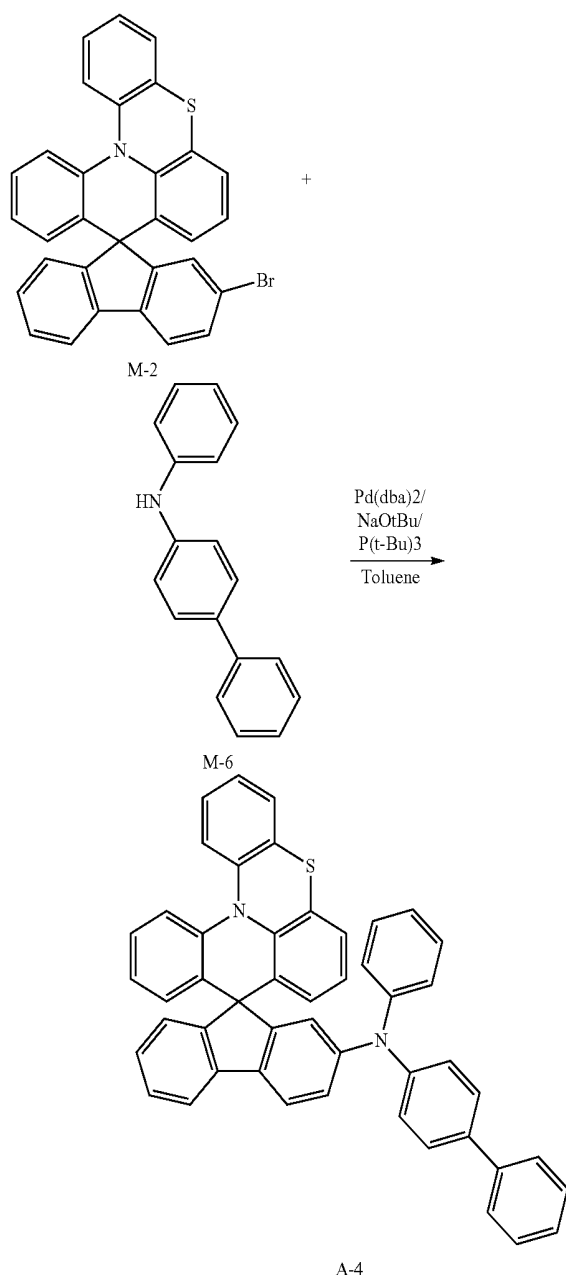

[0127] 8.63 g (16.71 mmol) of an intermediate M-2, 3.72 g (15.19 mmol) of an intermediate M-6, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.46 mmol) of Pd(dba)₂ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.


[0128] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was obtained through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 8.1 g (78.3 %) of a desired compound A-4 as a white solid.

EXAMPLE 5

Synthesis of Compound A-5

[0129] A compound represented by the above Chemical Formula A-5 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 5.

[Reaction Scheme 5]

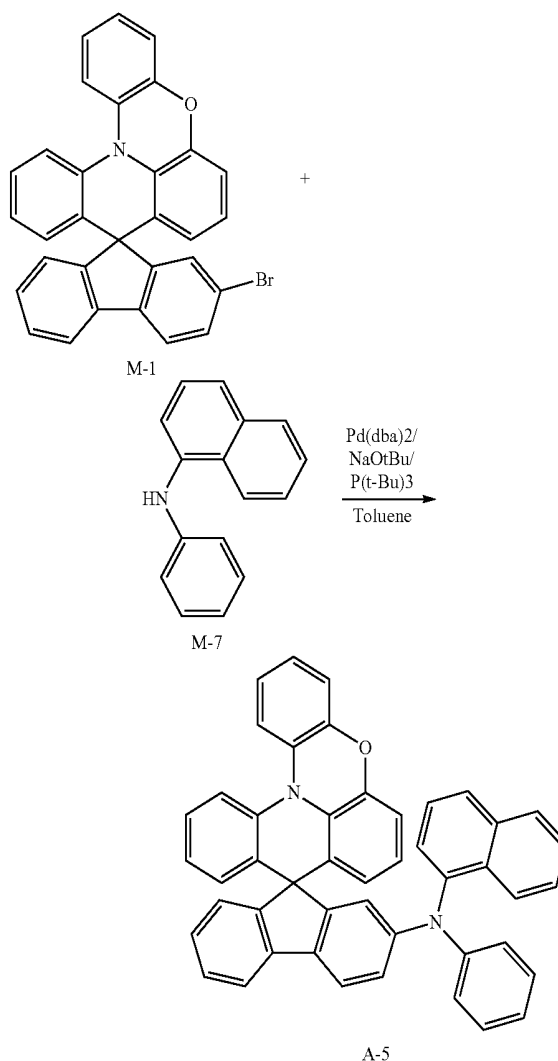

[0130] 8.36 g (18.71 mmol) of an intermediate 3.33 g (15.19 mmol) of an intermediate M-7, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.48 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.46 mmol) of Pd(dba)₂ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.

[0131] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using


a normal hexane/dichloromethane mixed solvent, obtaining 7.8 g (80.4 %) of a desired compound A-5 as a white solid.

EXAMPLE 6

Synthesis of Compound A-6

[0132] A compound represented by the above Chemical Formula A-6 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 6.

[Reaction Scheme 6]

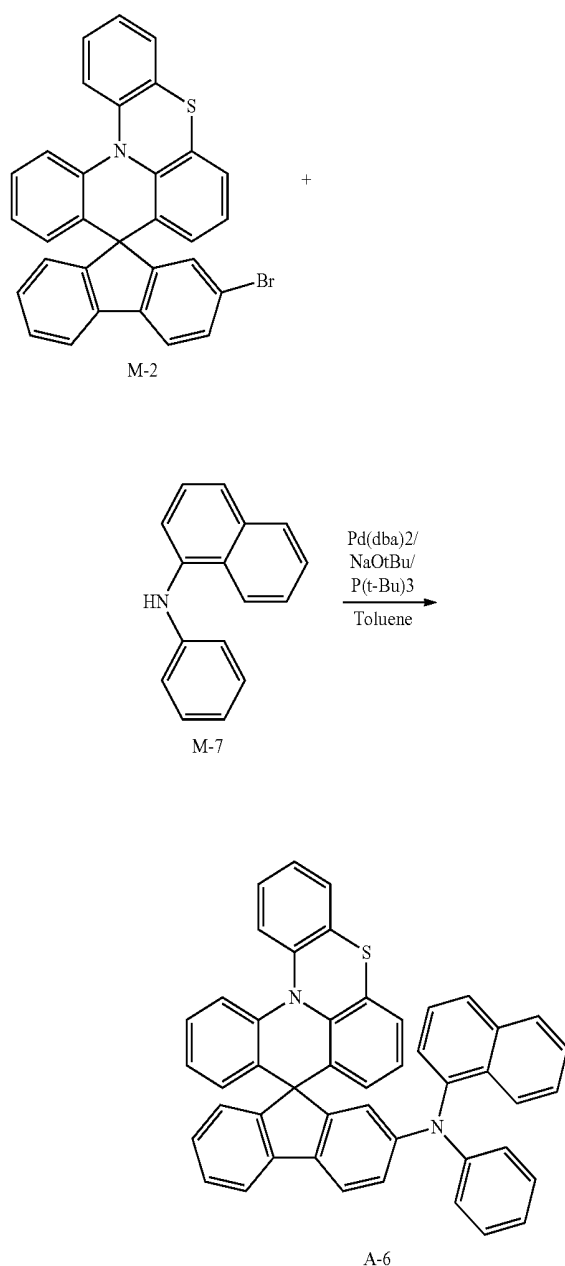

[0133] 8.63 g, (16.71 mmol) of an intermediate M-2, 3.33 g (15.19 mmol) of an intermediate M-7, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-bu-

tylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.46 mmol) of Pd(dba)₂ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.


[0134] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 7.6 g (70.3 %) of a desired compound A-6.


EXAMPLE 7

Synthesis of Compound A-7

[0135] A compound represented by the above Chemical Formula A-7 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 7.

[Reaction Scheme 7]

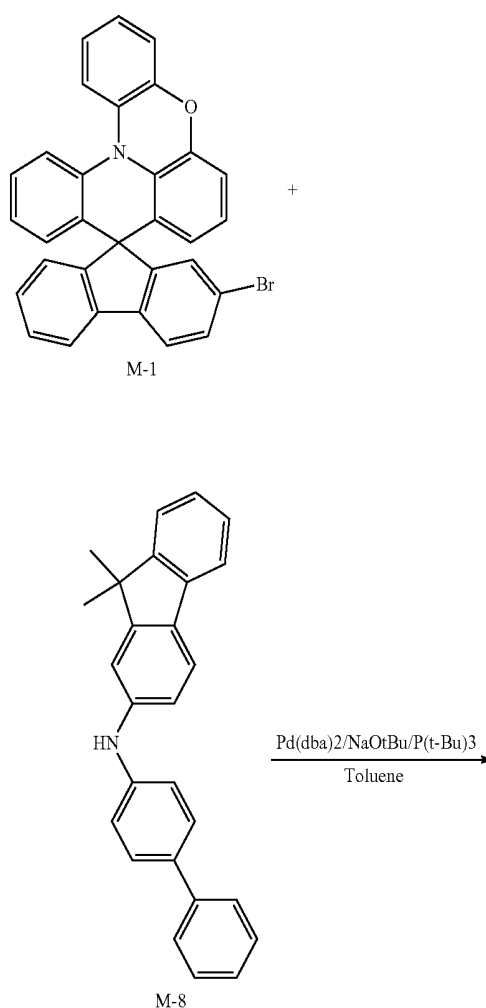

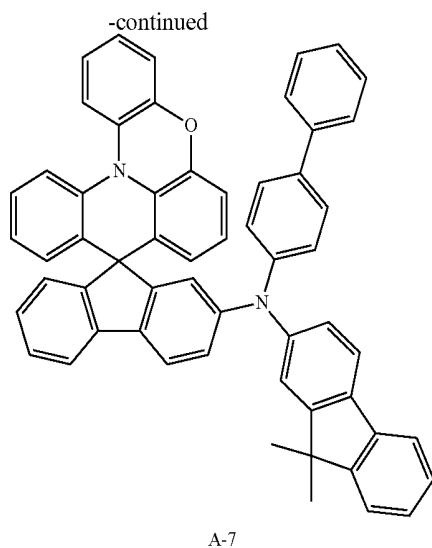

[0136] 8.36 g (16.71 mmol) of an intermediate 5.49 g (15.19 mmol) of an intermediate M-8, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.48 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.




[0137] When the reaction was complete, the resultant was extracted with toluene and distilled water, and an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 8.8 g (74.2 %) of a desired compound A-7 as a white solid.

EXAMPLE 8

Synthesis of Compound A-8

[0138] A compound represented by the above Chemical Formula A-8 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 8.

[Reaction Scheme 8]

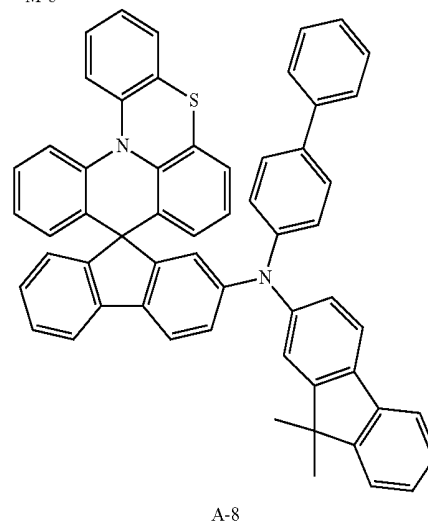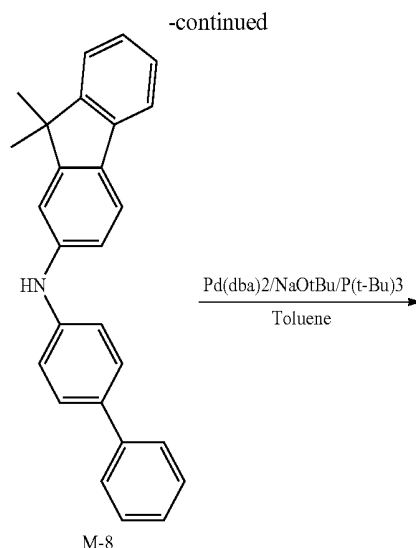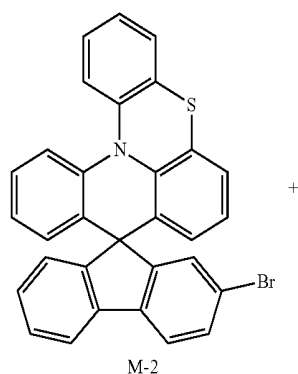

[0139] 8.63 g (16.71 mmol) of an intermediate M-2, 5.49 g (15.19 mmol) of an intermediate M-8, 4.82 g (50.13 mmol) of sodium t-butoxide, and 0.09 g (0.46 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.26 g (0.46 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.


[0140] When the reaction was complete, the resultant was extracted, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent obtaining 10.1 g (83.5%) of a desired compound A-8 as a white solid.

EXAMPLE 9

Synthesis of Compound A-9

[0141] A compound represented by the above Chemical Formula A-9 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 9.

[Reaction Scheme 9]

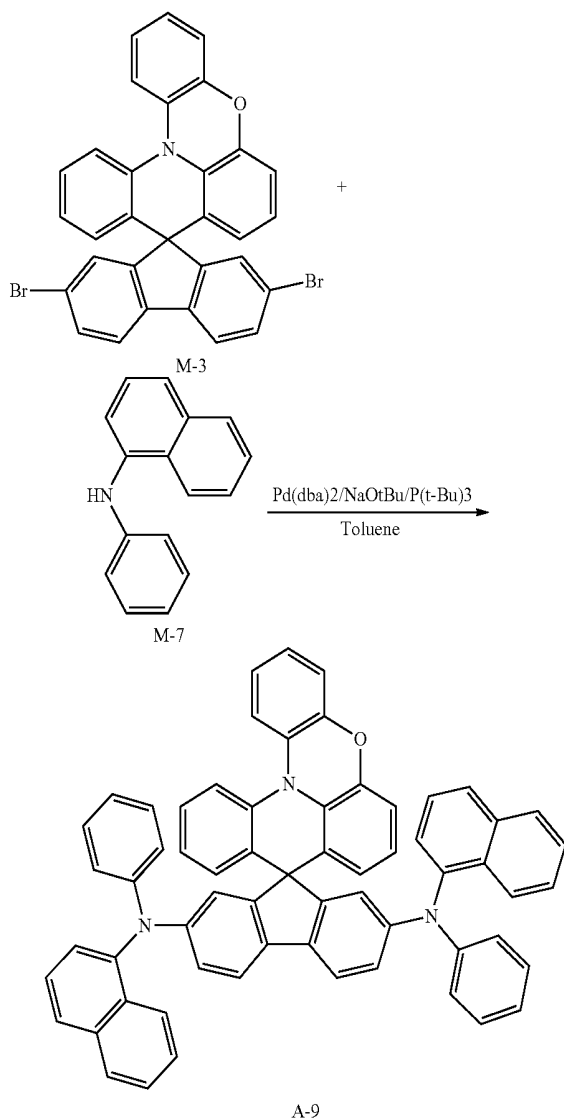

[0142] 8 g (13.81 mmol) of so intermediate M-3, 6.36 g (29 mmol) of an intermediate M-7, 9.64 g (100.26 mmol) of sodium t-butoxide, and 0.18 g (0.92 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.52 g (0.92 mmol) of Pd(dba)₂ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.

[0143] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 9.3 g (78.7%) of a desired compound A-9 as a white solid.


EXAMPLE 10

Synthesis of Compound A-10

[0144] A compound represented by the above Chemical Formula A-10 as specific examples of a compound for an

organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 10.

[Reaction Scheme10]

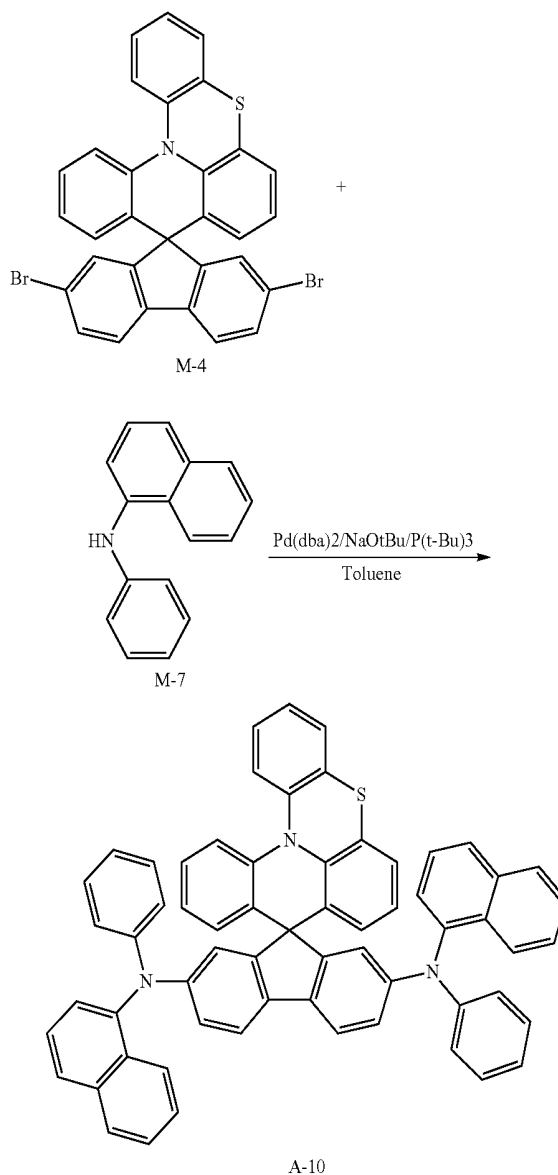

[0145] 8.22 g (13.81 mmol) of an intermediate M-4, 6.36 g (29 mmol) of an intermediate M-7, 9.64 g (100.26 mmol) of sodium t-butoxide, and 0.18 g (0.92 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.52 g (0.92 mmol) of Pd(dba)₂ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.

[0146] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using



a normal hexane/dichloromethane mixed solvent, obtaining 9.5 g (78.9%) of a desired compound A-10 as a white solid.

EXAMPLE 11

Synthesis of Compound A-11

[0147] A compound represented by the above Chemical Formula A-11 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 11.

[Reaction Scheme 11]

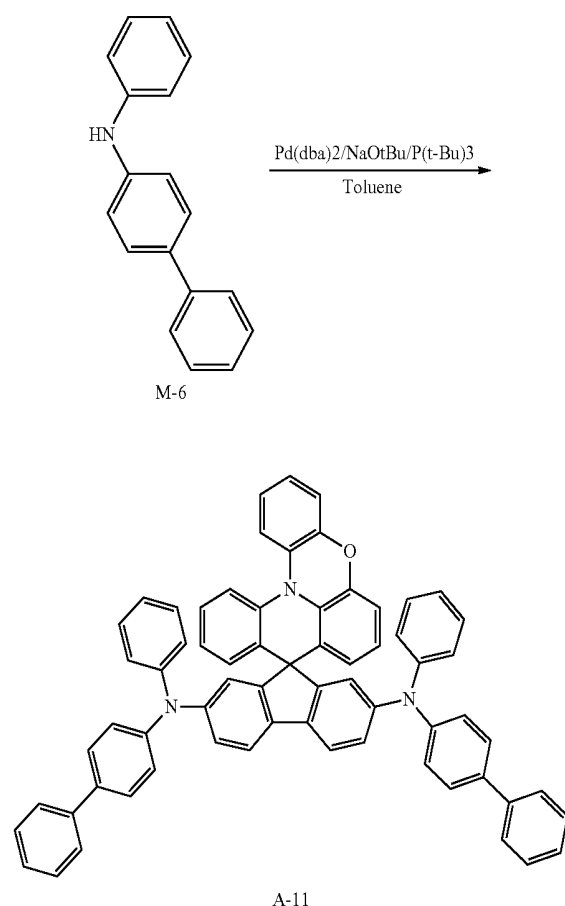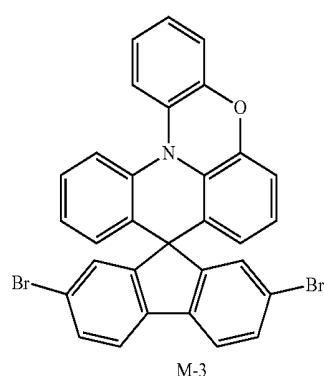

[0148] 8 g (13.01 mmol) of an intermediate M-3, 7.11 g (29 mmol) of an intermediate M-6, 9.64 g (100.26 mmol) of sodium t-butoxide, and 0.18 g (0.92 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.52 g (0.92 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.



[0149] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organ(c) layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 10.5 g (85%) of a desired compound A-11 as a white solid.


EXAMPLE 12

Synthesis of Compound A-12

[0150] A compound represented by the above Chemical Formula A-12 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 12.

[Reaction Scheme 12]

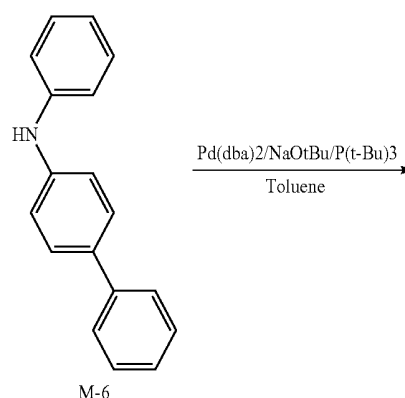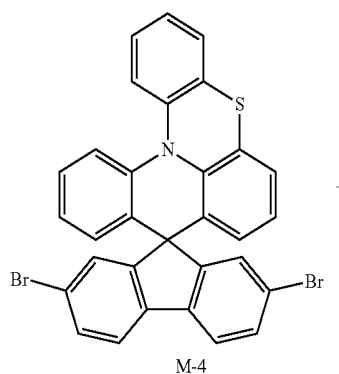

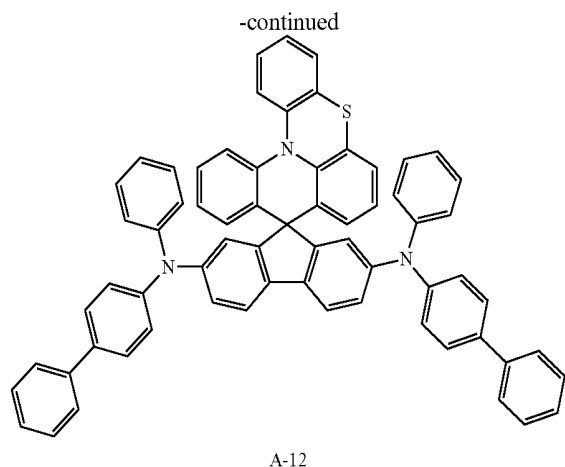



[0151] 8.22 g (13.81 mmol) of an intermediate M-4, 7.11 g (29 mmol) of an intermediate M-6, 9.64 g (100.26 mmol) of sodium t-butoxide, and 0.18 g (0.92 mmol) of tri-tert-butylphosphine were dissolved in 300 ml of toluene, 0.52 g (0.92 mmol) of $\text{Pd}(\text{dba})_2$ was added thereto, and the mixture was refluxed and agitated under a nitrogen atmosphere for 12 hours.

[0152] When the reaction was complete, the resultant was extracted with toluene and distilled water, an organic layer obtained therefrom was dried with anhydrous magnesium sulfate and filtered, and a filtered solution was concentrated under a reduced pressure. A product obtained therefrom was purified through silica gel column chromatography by using a normal hexane/dichloromethane a mixed solvent, obtaining 10.3 g (80.7 %) of a desired compound A-12 as a white solid.

EXAMPLE ad-1

Synthesis of Compound B-1

[0153] A compound represented by the above Chemical Formula B-1 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 13.

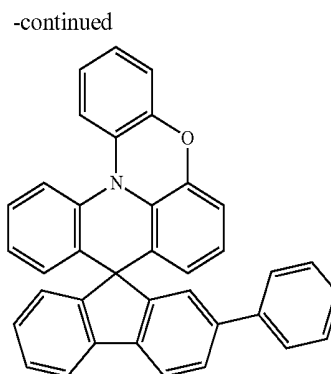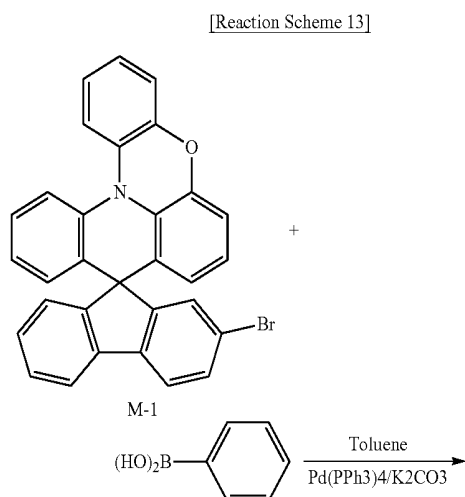


[0154] 8.36 g (16.71 mmol) of an intermediate M-1, 2.24 g (18.38 mmol) of phenylboronic acid, 1.27 g (1.1 mmol) of tetrakis-(triphenylphosphine)palladium, 6.08 g (44 mmol) of potassium carbonate, and 100 ml of water were suspended in 200 ml of toluene, and the suspended solution was heated and refluxed under a nitrogen atmosphere for 12 hours.


[0155] The reaction liquid was separated into two layers, an organic layer out of the two layers was washed with a sodium chloride saturated aqueous solution and dried with anhydrous sodium sulfate.

[0156] After distilling and removing an organic solvent therein was under a reduced pressure, its residue was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent obtaining 7.3 g (87.8 %) of a desired compound as a white solid.

[0157] A compound represented by the above Chemical Formula B-4 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 14.

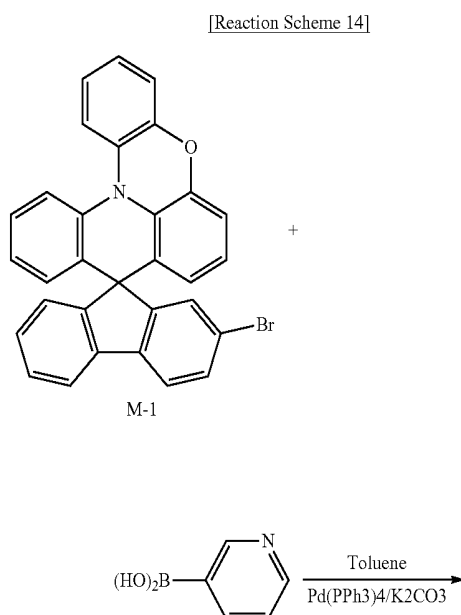

-continued




[0158] 8.36 g (16.71 mmol) of an intermediate M-1, 2.26 g (18.38 mmol) of 3-pyridine boronic acid, 1.27 g (1.1 mmol) of tetrakis-(triphenylphosphine)palladium, 6.08 g (44 mmol) of potassium carbonate, and 100 ml of water were suspended in 200 ml of toluene, and the suspended solution was heated and refluxed under a nitrogen atmosphere for 12 hours.

[0159] The reaction liquid was separated into two layers, and an organic layer out of the two layers was washed with a sodium chloride saturated aqueous solution and dried with anhydrous sodium sulfate.


[0160] After distilling and removing an organic solvent therein under a reduced pressure, a residue was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent obtaining 7.1 g (85.2 %) of a desired compound as a white solid.

[0161] A compound represented by the above Chemical Formula B-7 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 15.

[Reaction Scheme 15]

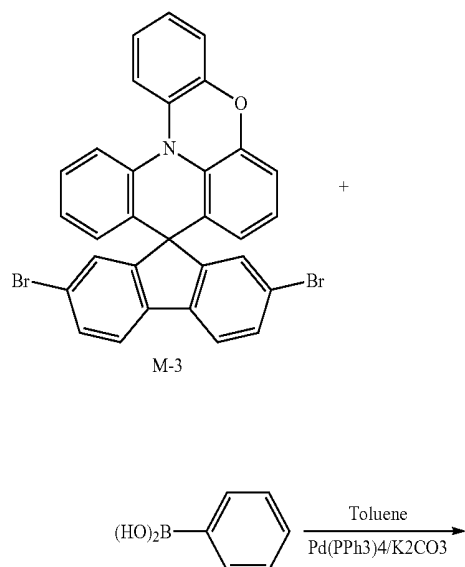

-continued

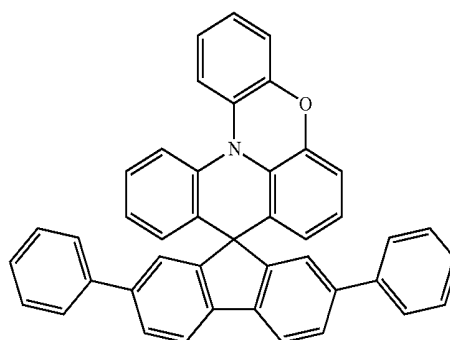

[0162] 8 g (13.81 mmol) of an intermediate, M-3, 3.53 g (29 mmol) of phenylboronic acid, 1.27 g (1.1 mmol) of tetrakis-(triphenylphosphine)palladium, 6.08 g (44 mmol) of potassium carbonate, and 100 ml of water were suspended in 200 ml of toluene, and the suspended solution was heated and refluxed under a nitrogen atmosphere for 12 hours.

[0163] The reaction liquid was separated into two layers, and an organic layer out of the two layers was washed with a sodium chloride saturated aqueous solution and dried with anhydrous sodium sulfate.


[0164] After distilling and removing an organic solvent under a reduced pressure, its residue was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 6.8 g (85.8%) of a desired compound as a white solid.


EXAMPLE ad-4

Synthesis of Compound B-10

[0165] A compound represented by the above Chemical Formula B-10 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 16.

[Reaction Scheme 16]

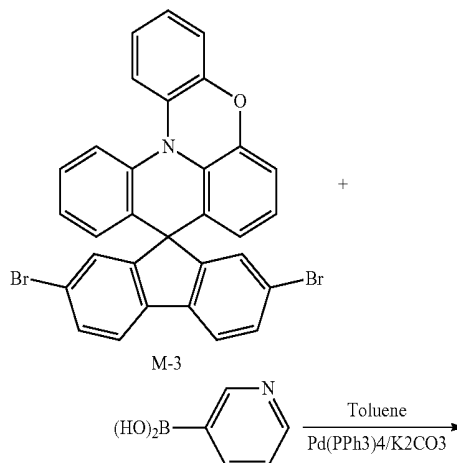

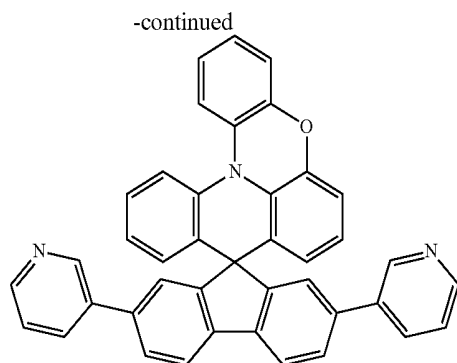

[0166] 8 g (13.81 mmol) of an intermediate M-3, 3.56 g (29 mmol) of phenylboronic acid, 1.27 g (1.1 mmol) of tetrakis-(triphenylphosphine)palladium, 6.08 g (44 mmol) of potassium carbonate, and 100 ml of water were suspended in 200 ml of toluene, and the suspended solution was heated and refluxed under a nitrogen atmosphere for 12 hours.

[0167] The reaction liquid was separated into two layers, and an organic layer out of the two layers was washed with a sodium chloride saturated aqueous solution and dried with anhydrous sodium sulfate.

[0168] After distilling and removing an organic solvent therein under a reduced pressure, its residue was purified through silica gel column chromatography by using a normal hexane/dichloromethane mixed solvent, obtaining 6.7 g (84.2%) of a desired compound as a white solid.

Manufacture of Organic Light Emitting Diode

EXAMPLE 13

[0169] A glass substrate coated with a 1500 Å-thick ITO (indium tin oxide) thin film was washed with distilled water and ultrasonic wave. When washed with distilled water, the coated substrate was ultrasonic wave-washed by using isopropyl alcohol acetone, methanol, and the like as a solvent and dried, moved to a plasma cleaner, washed by using oxygen plasma for 5 minutes, and moved to a vacuum depositor. This ITO transparent electrode was used as an anode, and a 600 Å-thick hole injection layer (HIL) was formed thereon by vacuum-depositing 4,4'-bis[N-[4-{N,N-bis(3-methylphenyl)amino}-phenyl]-N-phenylamino]biphenyl (DNTPD). Subsequently, the compound according to Example 1 was vacuum-deposited on the hole injection layer (HIL) to form a 300 Å-thick hole transport layer (HTL). On the hole transport layer (HTL), 9,10-di-(2-naphthyl)anthracene (ADN) as a host and 3 wt % of 2,5,7,11-tetra(tert-butyl)perylene (TBPe) as a dopant were vacuum-deposited to form a 250 Å-thick emission layer.

[0170] Subsequently, on the emission layer, Alq3 was vacuum-deposited to form a 250 Å-thick electron transport layer (ETL). On the electron transport layer (ETL), a cathode was formed by sequentially vacuum-depositing 10 Å-thick LiF and 1000 Å-thick Al, manufacturing an organic light emitting diode.

[0171] The organic light emitting diode has a structure of five-layered organic thin film layers and specifically,

[0172] a structure of Al 1000 Å/LiF 10 Å/Alq3 250 Å/EML[ADN:TBPe=97:3]250 Å/A-1 300 Å/DNTPD 600 Å/ITO 1500 Å.

EXAMPLE 14

[0173] An organic light emitting diode was manufactured according to the same method as Example 13 except for using the compound A-2 of Example 2 instead of the compound A-1 of Example 1.

EXAMPLE 15

[0174] An organic light emitting diode was manufactured according to the same method as Example 13 except for using the compound A-3 of Example 3 instead of the compound A-1 of Example 1.

EXAMPLE 16

[0175] An organic light emitting diode was manufactured according to the same method as Example 13 except for using the compound A-4 of Example 4 instead of the compound A-1 of Example 1.

COMPARATIVE EXAMPLE 1

[0176] An organic light emitting diode was manufactured according to the same method as Example 13 except for using NPB instead of the compound A-1 of Example 1.

Performance Measurement of Organic Light Emitting Diode

[0177] Current density change, luminance change, and luminous efficiency of each organic light emitting diode according to Examples 13 to 16 and Comparative Example 1 depending on a voltage were measured. Specific measurement methods are as follows, and the results are shown in the following Table 1.

[0178] (1) Measurement of Current Density Change Depending on Voltage Change

[0179] The obtained organic light emitting diodes were measured for current value flowing in the unit device while increasing the voltage from 0 V to 10 V using a current-voltage meter (Keithley 2400), and the measured current value was divided by area to provide the result.

[0180] (2) Measurement of Luminance Change Depending on Voltage Change

[0181] Luminance was measured by using a luminance meter (Minolta Cs-1000A), while the voltage of the organic light emitting diodes was increased from 0 V to 10 V.

[0182] (3) Measurement of Luminous Efficiency

[0183] The luminance current density, and voltage obtained from the (1) and (2) were used to calculate current efficiency (cd/A) at the same current density (10 mA/cm²).

TABLE 1

Device	HTL	Voltage (V)	EL color	Efficiency (cd/A)	Half-life life-span (h) @1000 cd/m ²
Example 13	A-1	6.2	Blue	6.0	1,500
Example 14	A-2	6.2	Blue	5.7	1,700
Example 15	A-3	6.1	Blue	5.9	2,000
Example 16	A-4	6.1	Blue	5.9	1,700
Comparative Example 1	NPB	7.1	Blue	4.9	1,250

[0184] The organic light emitting diodes according to Examples 13 to 16 showed decreased driving voltage and


improved luminance and efficiency compared with the organic light emitting diode according to Comparative Example 1.

[0185] Accordingly, an organic light emitting diode having excellent electron injection and electron transport capability and also a low voltage, high efficiency, high luminance, and a long lifespan may be manufactured.

[0186] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments. It is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims. Therefore, the aforementioned embodiments should be understood to be exemplary but not limiting the present invention in any way.

1. A compound for an organic optoelectronic device represented by the following Chemical Formula ad-1:

[Chemical Formula ad-1]

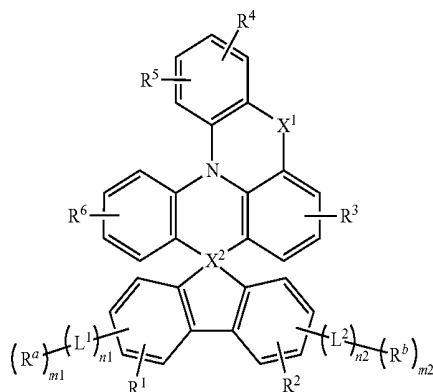

wherein in the above Chemical Formula ad-1,

X¹ is —O— or —S—,

X² is —C— or —Si—,

L¹ and L² are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m₁ and m₂ are independently integers of 0 or 1,

n₁ and n₂ are independently integers ranging from 0 to 3, R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, and

R^a and R^b are each independently, hydrogen, deuterium, a substituted or unsubstituted silyl group, a substituted or unsubstituted C4 to C60 amine group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.


2. The compound for an organic optoelectronic device of claim 1, wherein at least one of the R^a and R^b is a substituted or unsubstituted pyridinyl group, a substituted or unsubstituted pyrimidinyl group, or a substituted or unsubstituted triazinyl group.

3. The compound for an organic optoelectronic device of claim 1, wherein at least one of the R^a and R^b is a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted naphthyl

group, a substituted or unsubstituted anthracenyl group, or a substituted or unsubstituted phenanthrenyl group.

4. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 1:

[Chemical Formula 1]

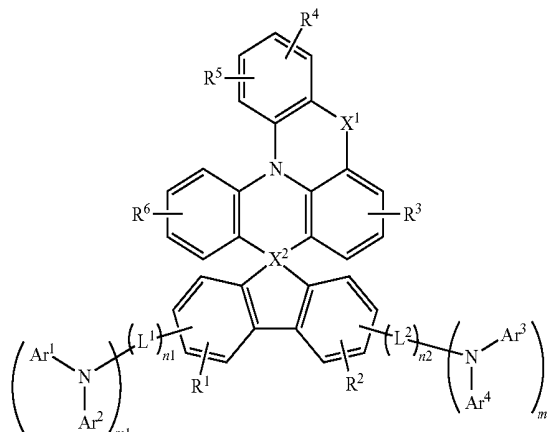

wherein in the above Chemical Formula 1,

X¹ is —O— or —S—,

X² is —C— or —Si—,

Ar¹ to Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,

L¹ and L² are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,


m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1,

n₁ and n₂ are independently integers ranging from 0 to 3, and

R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

5. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 2:

[Chemical Formula 2]

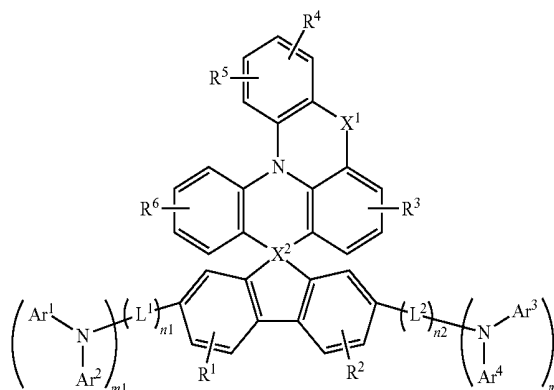

wherein in the above Chemical Formula 2,

X¹ is —O— or —S—,

X² is —C— or —Si—,

Ar¹ to Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,


L¹ and L² are independently a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m1 and m2 are independently integers of 0 or 1, one of m1 and m2 is 1,

n1 and n2 are independently integers ranging from 0 to 3, and

R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

6. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 3:

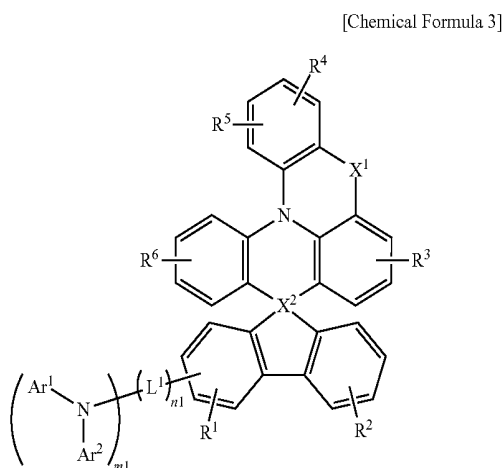

wherein in the above Chemical Formula 3,

X¹ is —O— or —S—,

X² is —C— or —Si—,

Ar¹ and Ar² are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,


L¹ is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m1 is 1,

n1 is an integer ranging from 0 to 3, and

R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

7. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 4:

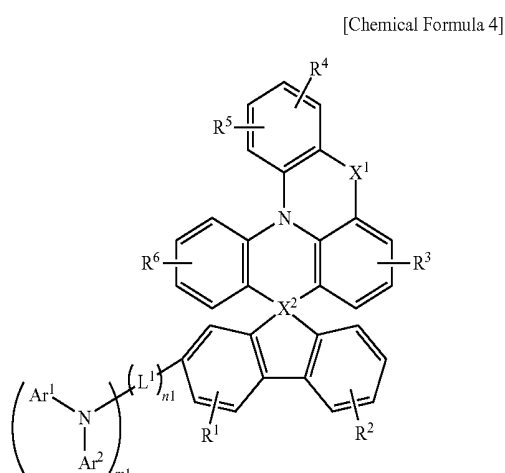

wherein in the above Chemical Formula 4,

X¹ is —O— or —S—,

X² is —C— or —Si—,

Ar¹ and Ar² are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,

L¹ is a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m1 is 1,

n1 is an integer ranging from 0 to 3, and






R¹ to R⁶ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

8. The compound for an organic optoelectronic device of claim 1, wherein the X² is —C—.


9. The compound for an organic optoelectronic device of claim 4, wherein the Ar¹ to Ar⁴ are independently a substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-terphenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted benzothiophenyl group, a substituted or unsubstituted

benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinolinyll group, a substituted or unsubstituted isoquinolinyll group, a substituted or unsubstituted quinazolinyll group, a substituted or unsubstituted quinoxalinyll group, a substituted or unsubstituted naphthyridinyll group, a substituted or unsubstituted benzoxazinyll group, a substituted or unsubstituted benzthiazinyll group, a substituted or unsubstituted acridinyll group, a substituted or unsubstituted phenazinyll group, a substituted or unsubstituted phenothiazinyll group, a substituted or unsubstituted phenoxazinyll group, or a combination thereof.

10. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by one of the following Chemical Formulae A-1 to A-26:

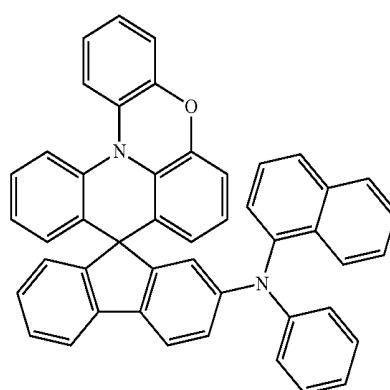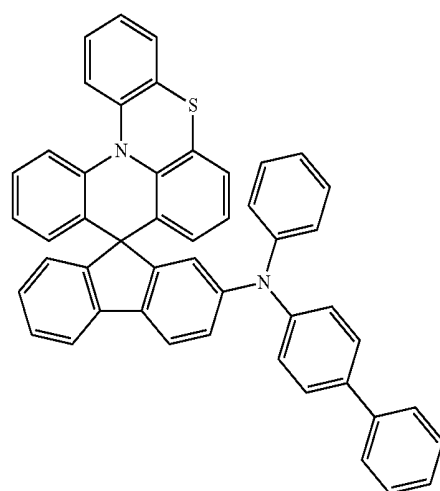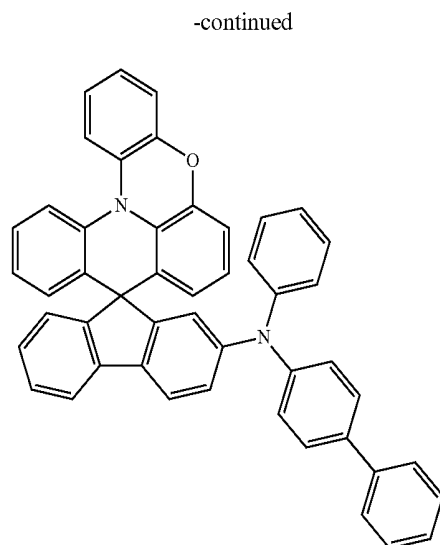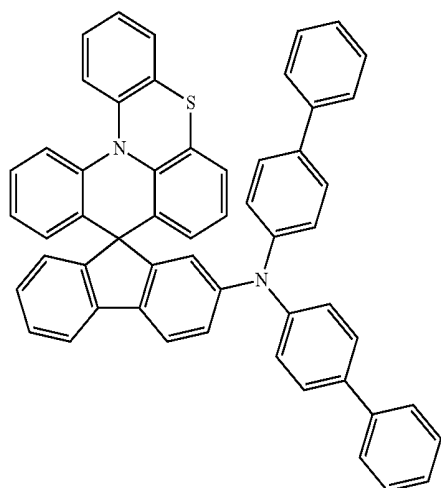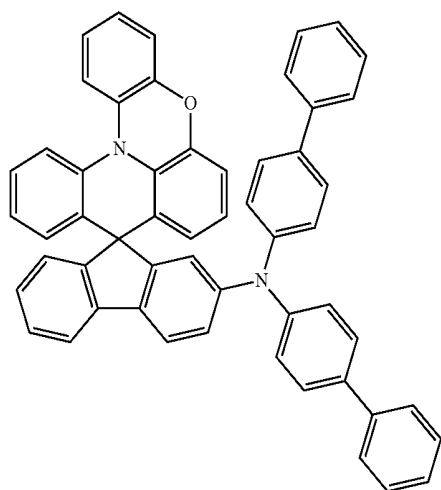


-continued

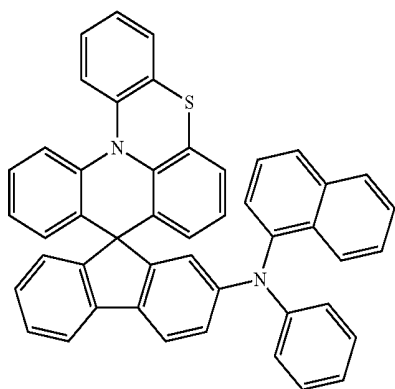


A-6

-continued

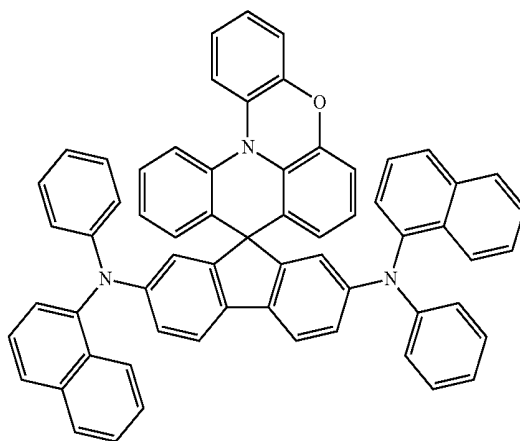


A-9

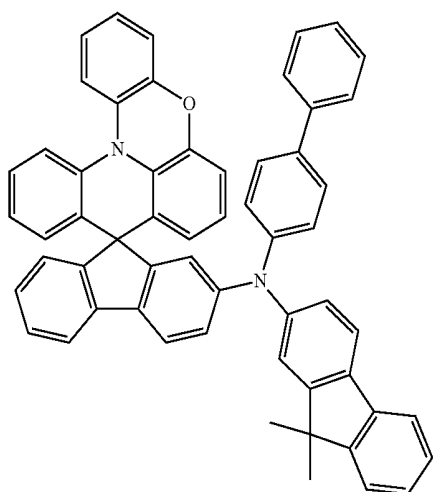



A-7

A-10

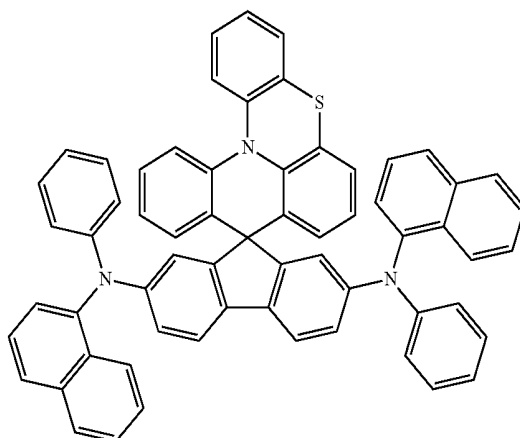


A-8

A-11

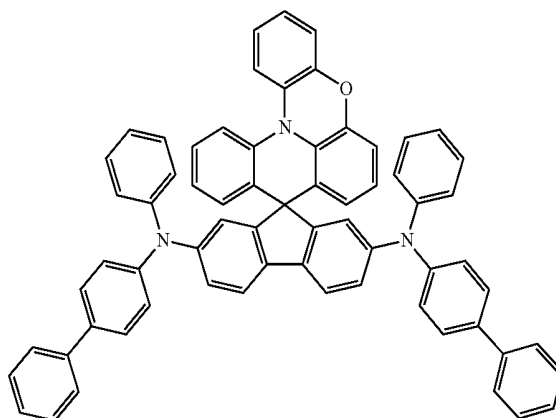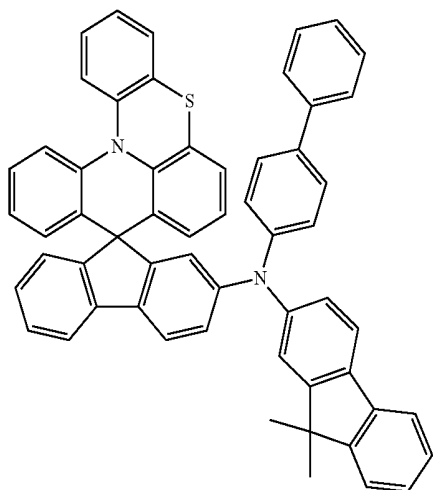


-continued

A-12

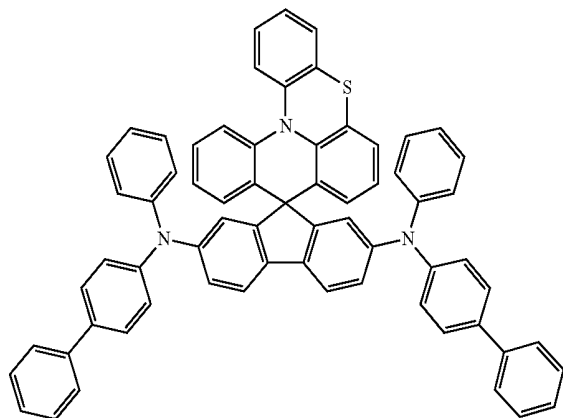


-continued


A-15

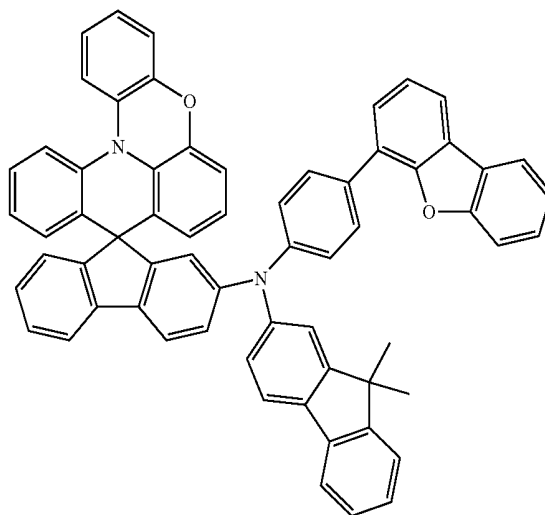

A-13


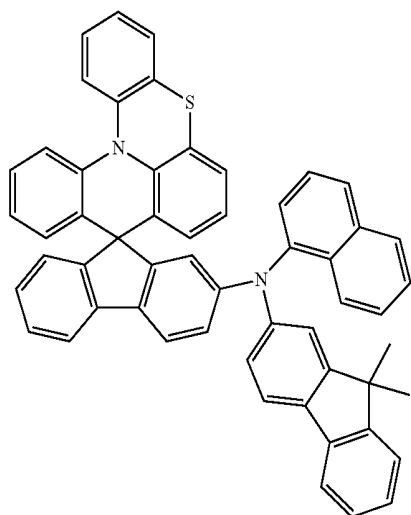


A-16

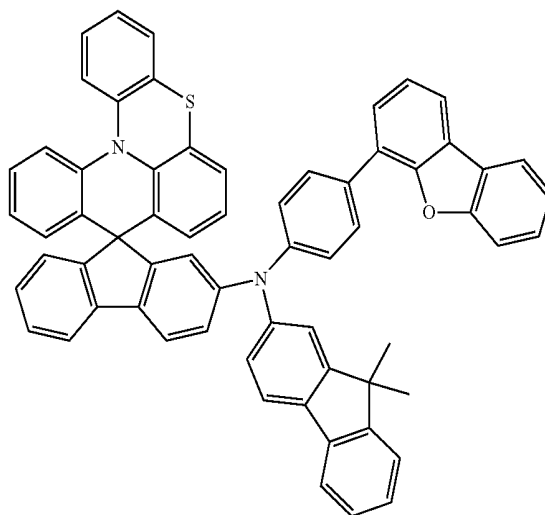


A-17

A-14

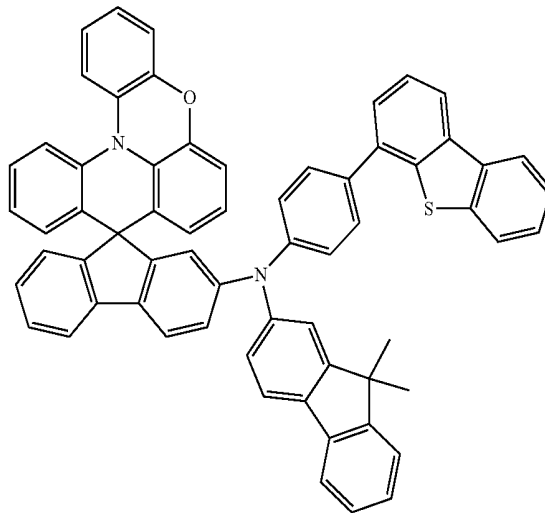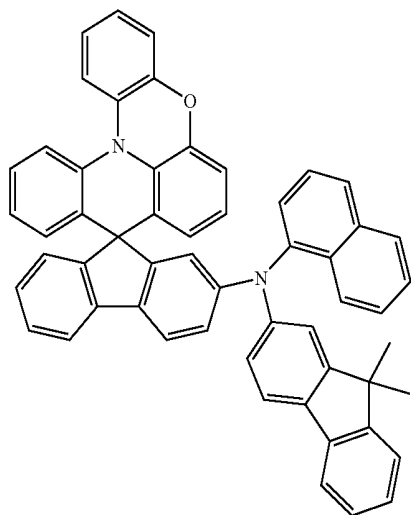


-continued

A-18

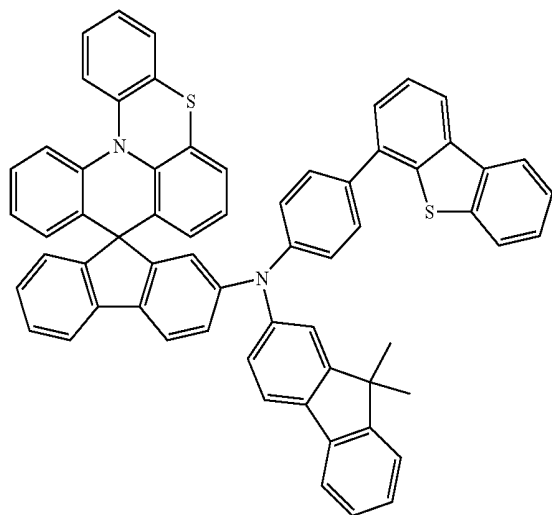


-continued


A-20

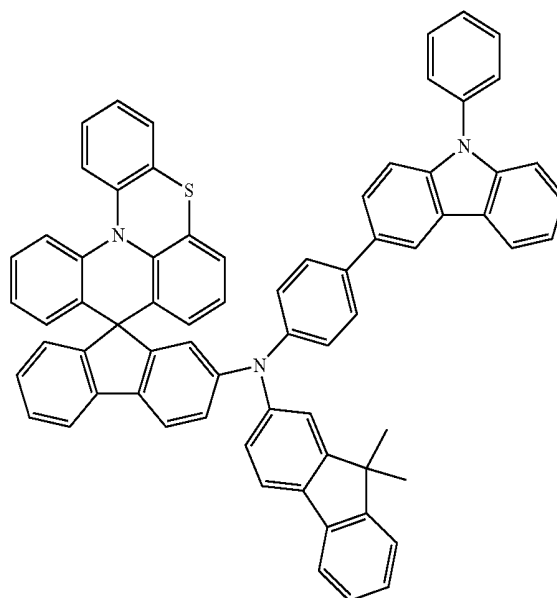

A-19

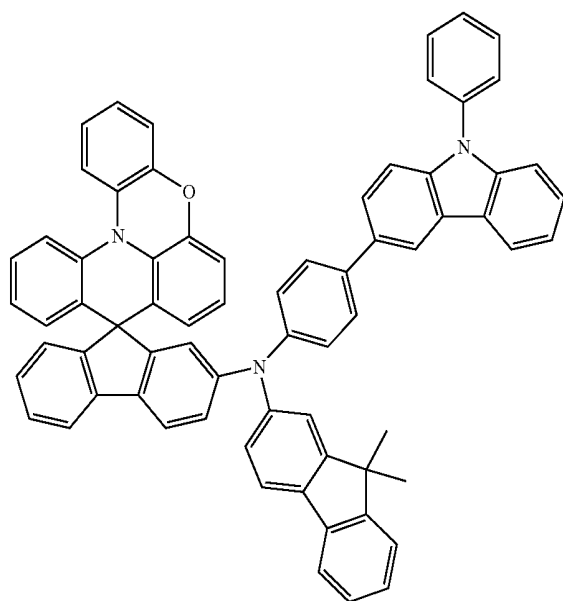


A-21

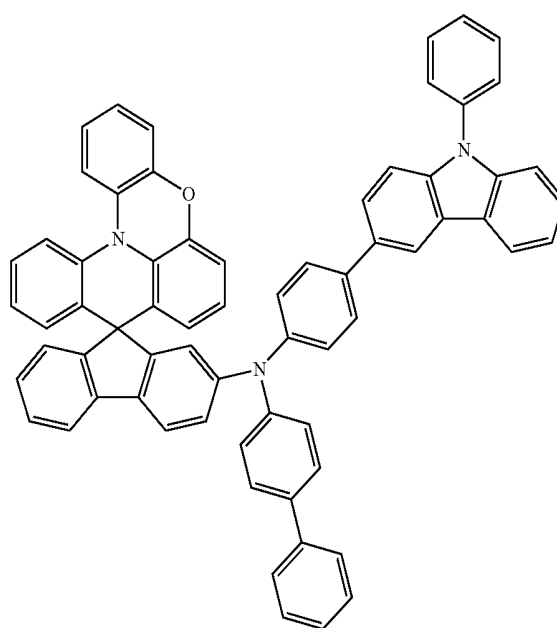


-continued

A-22

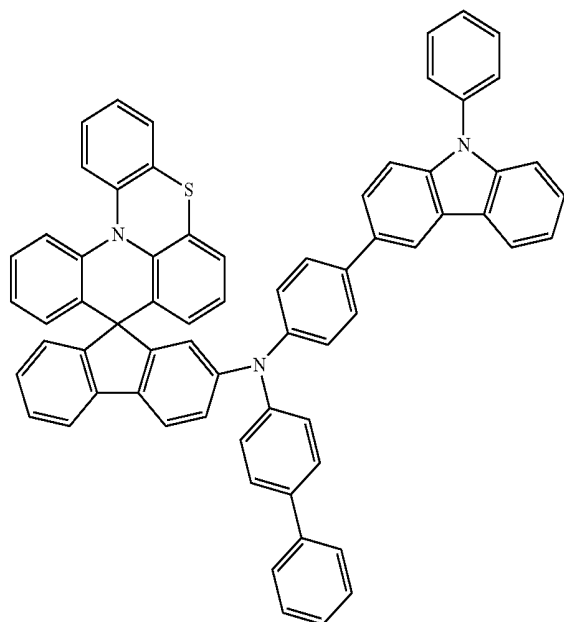


-continued


A-24

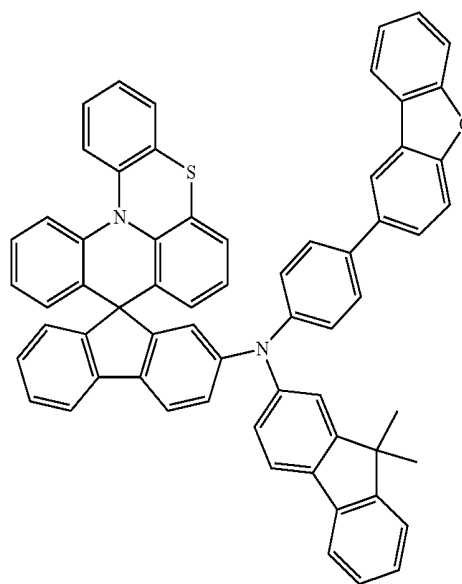

A-23

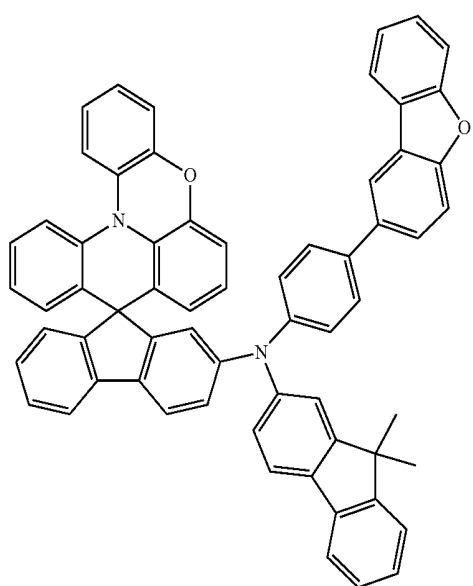


A-25

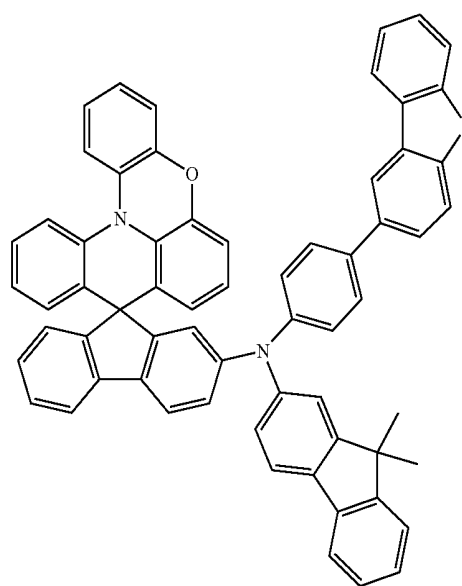


-continued

A-26

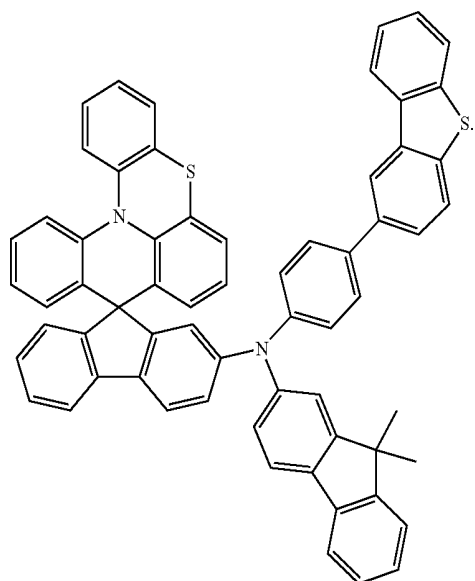


-continued

[B-3]

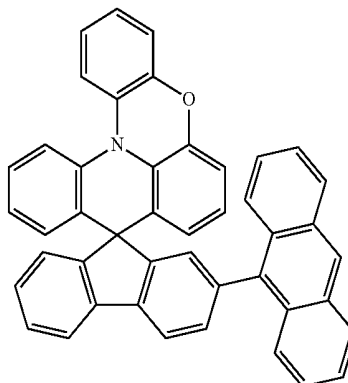


[B-4]




11. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by one of the following Chemical Formulae B-1 to B-10:


[B-1]




[B-5]

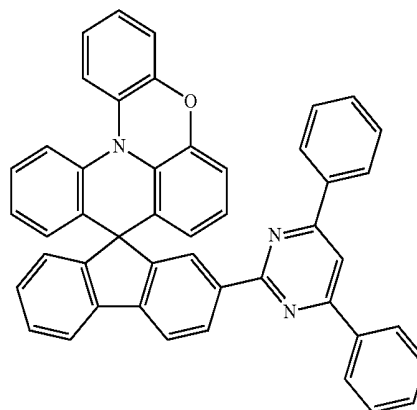

[B-2]

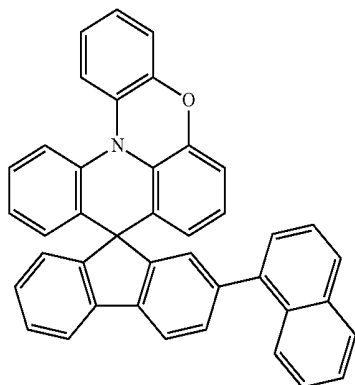


[B-6]

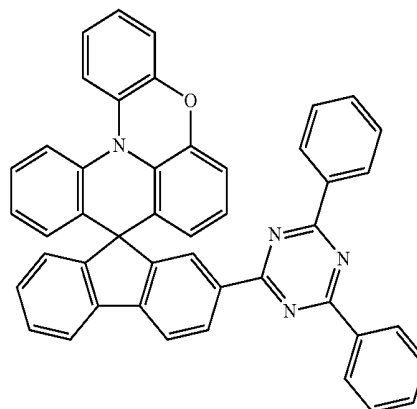


-continued

[B-7]

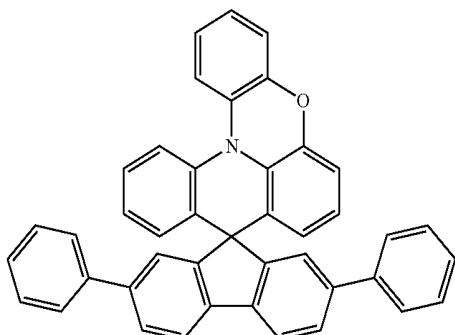


-continued


[B-10]

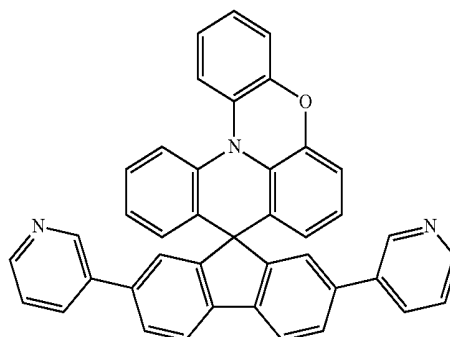

[B-8]

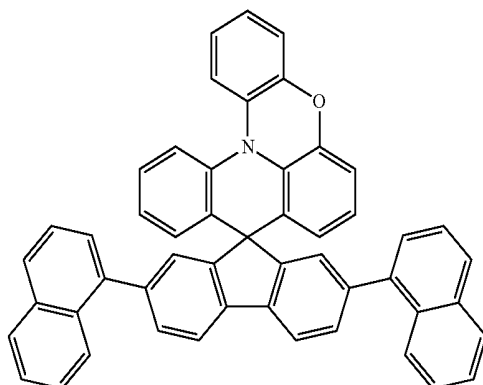

[B-9]

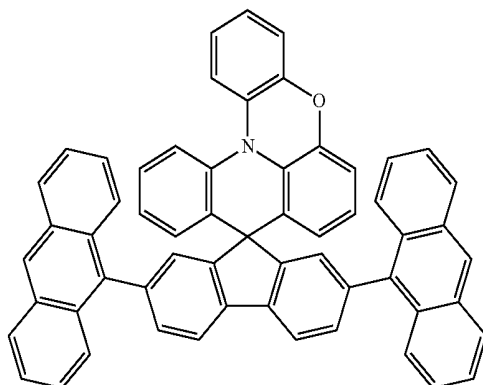

12. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device has triplet exciton energy (T1) of greater than or equal to about 2.0 eV.

13. The compound for an organic optoelectronic device of claim 1, wherein the organic optoelectronic device is selected from an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, and an organic memory device.

14. An organic light emitting diode, comprising an anode, a cathode, and at least one organic thin layer interposed between the anode and cathode, wherein at least one of the organic thin layers comprises the above compound for an organic optoelectronic device of claim 1.

15. The organic light emitting diode of claim 14, wherein the organic thin layer is selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof.

16. The organic light emitting diode of claim 15, wherein the compound for an organic optoelectronic device is included in a hole transport layer (HTL) or a hole injection layer (HIL).

17. The organic light emitting diode of claim 15, wherein the compound for an organic optoelectronic device is included in an emission layer.

18. The organic light emitting diode of claim 17, wherein the compound for an organic optoelectronic device is used as a phosphorescent or fluorescent host material in an emission layer.

19. A display device comprising the above organic light emitting diode of claim 14.

* * * * *

专利名称(译)	用于有机光电子器件的化合物，包含其的有机发光元件，以及包含该有机发光元件的显示装置		
公开(公告)号	US20150263291A1	公开(公告)日	2015-09-17
申请号	US14/359196	申请日	2012-12-21
[标]申请(专利权)人(译)	第一毛织株式会社		
申请(专利权)人(译)	第一毛织INC.		
当前申请(专利权)人(译)	第一毛织，INC.		
[标]发明人	JUNG SUNG HYUN RYU DONG WAN LEE HAN ILL JO YOUNG KYOUNG CHAE MI YOUNG HUH DAL HO HONG JIN SEOK		
发明人	JUNG, SUNG-HYUN RYU, DONG-WAN LEE, HAN-ILL JO, YOUNG-KYOUNG CHAE, MI-YOUNG HUH, DAL-HO HONG, JIN-SEOK		
IPC分类号	H01L51/00 C09K11/06 C07D513/10 C07D498/10		
CPC分类号	H01L51/0061 H01L51/0058 C09K11/06 C07D513/10 H01L51/006 H01L51/0071 H01L51/0067 H01L51/5024 H01L51/5056 H01L51/5088 H01L51/5072 H01L51/5096 C09K2211/1033 C09K2211/1011 C09K2211/1007 C09K2211/1037 H01L51/0052 C07D498/10 C09K2211/1029 C09K2211/1044 C09K2211/1059 C09K2211/1088 H01L51/0053 H01L51/0072 H01L51/0073 H01L51/0081 H01L51/42 H01L51/5012 H01L51/5016 H01L2251/308 Y02E10/549		
优先权	1020110141437 2011-12-23 KR		
其他公开文献	US9502662		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种用于有机光电子器件的化合物，包括该化合物的有机发光二极管，以及包括该有机发光二极管的显示装置。由以下化学式ad-1表示的用于有机光电子器件的化合物提供了由于优异的电化学和热稳定性而具有寿命特性的有机发光二极管，以及在低驱动电压下的高发光效率。

