



US 20150155497A1

(19) **United States**(12) **Patent Application Publication**
Lee(10) **Pub. No.: US 2015/0155497 A1**(43) **Pub. Date: Jun. 4, 2015**(54) **COMPOUND AND ORGANIC
LIGHT-EMITTING DEVICE INCLUDING THE
SAME**(30) **Foreign Application Priority Data**

Dec. 3, 2013 (KR) 10-2013-0149498

(71) Applicant: **Samsung Display Co., Ltd.**, Yongin-city
(KR)**Publication Classification**(72) Inventor: **Jung-Sub Lee**, Yongin-city (KR)(51) **Int. Cl.**
H01L 51/00 (2006.01)(73) Assignee: **Samsung Display Co., Ltd.**, Yongin-city
(KR)(52) **U.S. Cl.**
CPC **H01L 51/0058** (2013.01); **H01L 51/0071**
(2013.01); **H01L 51/0072** (2013.01); **H01L**
51/0074 (2013.01); **H01L 51/0067** (2013.01);
H01L 51/5012 (2013.01)(21) Appl. No.: **14/221,024**(57) **ABSTRACT**(22) Filed: **Mar. 20, 2014**

An organic light-emitting device including a first electrode, a second electrode and an organic layer disposed between the first electrode and the second electrode is provided.

SECOND ELECTRODE

EIL

ETL

EML

HTL

HIL

FIRST ELECTRODE

FIG. 1

SECOND ELECTRODE
EIL
ETL
EML
HTL
HIL
FIRST ELECTRODE

COMPOUND AND ORGANIC LIGHT-EMITTING DEVICE INCLUDING THE SAME

INCORPORATION BY REFERENCE TO ANY PRIORITY APPLICATIONS

[0001] Any and all priority claims identified in the Application Data Sheet, or any correction thereto, are hereby incorporated by reference under 37 CFR 1.57. For example, this application claims the benefit of Korean Patent Application No. 10-2013-0149498, filed on Dec. 3, 2013, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND

[0002] 1. Field

[0003] This disclosure relates to a compound and an organic light-emitting device including the same.

[0004] 2. Description of the Related Technology

[0005] Organic light emitting devices are self-emission devices that have wide viewing angles, high contrast ratios, short response time, and excellent brightness, driving voltage, and response speed characteristics, and produce full-color images.


[0006] A typical organic light-emitting device has a structure including a substrate, and an anode, a hole transport layer, an emission layer, an electron transport layer, and a cathode which are sequentially stacked on the substrate. The hole transport layer, the emission layer, and the electron transport layer are organic thin films formed of organic compounds.

[0007] An organic light-emitting device having operates by generating light.

[0008] When a voltage is applied between the anode and the cathode, holes injected from the anode pass the hole transport layer and migrate toward the emission layer, and electrons injected from the cathode pass the electron transport layer and migrate toward the emission layer. Carriers, such as holes and electrons, are recombined in the emission layer to produce excitons. Then, the excitons are transitioned from an excited state to a ground state, thereby generating light.


[0009] A material that has excellent electric stability, high charge transport capability or luminescent capability, high glass transition temperature, and high crystallization prevention capability is desirable.


[0010] In determining luminescent efficiency, a critical factor for organic light-emitting devices is a luminescent material. As a luminescent material, fluorescent materials are being widely used. However, according to the mechanism of electric luminescence, in theory, development of phosphorescent materials may lead to a 4-fold increase in luminescent efficiency. Iridium (III) complex-based phosphorescent materials such as (acac)Ir(btp)₂, Ir(PPY)₃, and Firpic may be used for red, green, and blue emission, respectively.

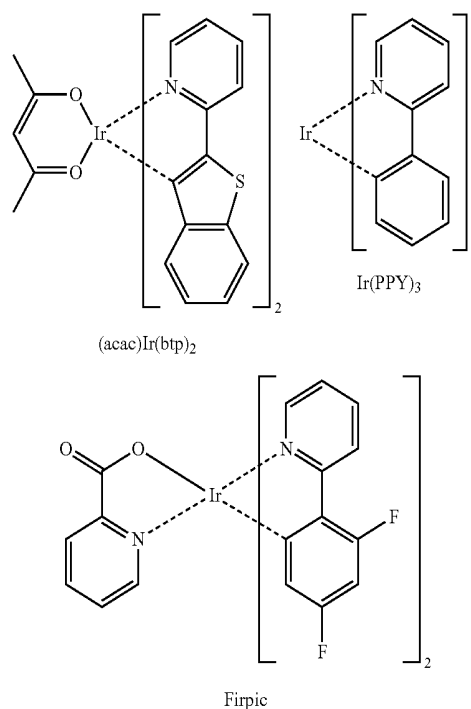

[0011] 4,4'-N,N'-dicarbazole-biphenyl (CBP) is one example of a phosphorescent host material is widely.

[0012] Although advantageous in terms of light-emitting characteristics existing light-emitting materials may have low glass transition temperature and thus may be deteriorated during high-temperature deposition under vacuum. For an OLED, power efficiency=(n/voltage)×current efficiency. Since power efficiency is in inverse proportion to voltage, higher power efficiency is needed to obtain a lower consumption power of an OLED. An OLED using a phosphorescent luminescent material has higher current efficiency (cd/A) than an OLED using a fluorescent luminescent material, but when BAQ or CBP is used as a phosphorescent luminescent material host, compared to an OLED using a fluorescent material, a formed OLED may have high driving voltage, thereby showing a relatively low power efficiency (lm/w).

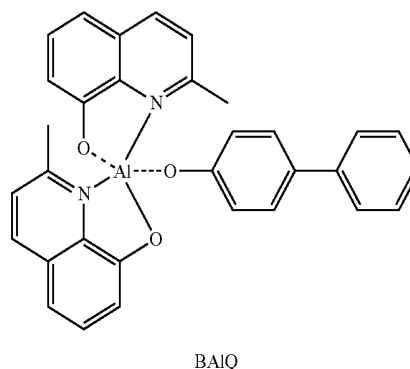

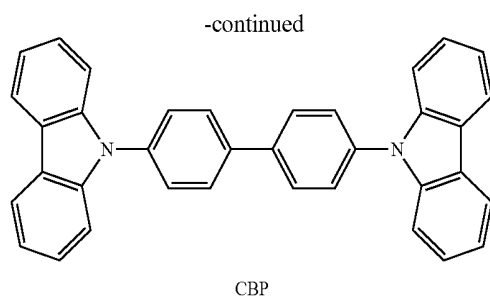


[0013] Also, the an OLED using such material may have unsatisfactory lifetime characteristics. Accordingly, there is a demand for the development of a host material with excellent performance.

SUMMARY

[0014] One or more embodiments of the present disclosure include a compound that has excellent electric characteristics, a high charge transporting capability, a high light-emitting capability, a high glass transition temperature, and a crystallization-preventing capability, and that is suitable for use as a luminescent material, and an organic light-emitting device that has high efficiency, low voltage, high brightness, long lifespan due to the inclusion of the material.

[0015] According to an aspect of the present embodiments, provided is a compound represented by Formula 1:



Formula 1

[0016] wherein in Formula 1,

[0017] A is a fused C₃ to C₈ aryl ring or a fused C₁ to C₈ heteroaryl ring;

[0018] E and X¹ are each independently CH or N (nitrogen);

[0019] R₁ to R₃ are each independently a hydrogen, a deuterium, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroarylamino group, a C₂ to C₄₀ diheteroarylamino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroaryl silyl group, or optionally R₁ and R₂ together with the atoms to which they are attached is a ring; and

[0020] Ar₁ and Ar₂ are each independently a hydrogen, a deuterium, a substituted or unsubstituted C₁ to C₄₀ alkyl

group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroarylamino group, a C₂ to C₄₀ diheteroarylamino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroaryl silyl group,

[0021] provided E and X¹ are not both CH.

[0022] According to another aspect of the present embodiments, provided is an organic light-emitting device including: a first electrode; a second electrode; and an organic layer disposed between the first electrode and the second electrode, wherein the organic layer includes the compound.

[0023] According to another aspect of the present embodiments, provided is a flat panel display apparatus including the organic light-emitting device, wherein the first electrode of the organic light-emitting device is electrically connected to a source electrode or a drain electrode of a thin film transistor.

BRIEF DESCRIPTION OF THE DRAWING


[0024] These and/or other aspects will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the drawing.

[0025] FIG. 1 is a schematic view of an organic light-emitting device according to an embodiment.

DETAILED DESCRIPTION

[0026] Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout. In this regard, the present embodiments may have different forms and should not be construed as being limited to the descriptions set forth herein. Accordingly, the embodiments are merely described below, by referring to the figures, to explain aspects of the present description. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. Expressions such as “at least one of,” when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list.

[0027] Some embodiments provide a compound represented by Formula 1:



Formula 1

[0028] A is a fused C₃ to C₈ aryl ring or a fused C₁ to C₈ heteroaryl ring,

[0029] E and X¹ are each independently CH or N (nitrogen),

[0030] R_1 to R_3 are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C_1 to C_{40} alkyl group, a substituted or unsubstituted C_2 to C_{40} alkenyl group, a substituted or unsubstituted C_2 to C_{40} alkynyl group, a substituted or unsubstituted C_6 to C_{40} aryl group, a substituted or unsubstituted C_1 to C_{40} heteroaryl group, a substituted or unsubstituted C_1 to C_{40} alkoxy group, a substituted or unsubstituted C_6 to C_{40} aryloxy group, a C_1 to C_{40} alkylamino group, a C_6 to C_{40} arylamino group, a C_6 to C_{40} diarylamino group, a C_1 to C_{40} heteroarylamino group, a C_2 to C_{40} diheteroarylamino group, a C_6 to C_{40} arylalkyl group, a C_6 to C_{40} heteroarylalkyl group, a substituted or unsubstituted C_3 to C_{40} cycloalkyl group, a C_3 to C_{40} heterocycloalkyl group, a C_3 to C_{40} alkylsilyl group, a C_6 to C_{40} arylsilyl group, or a C_1 to C_{40} heteroarylsilyl group, or optionally R_1 and R_2 together with the atoms to which they are attached is a ring; and

[0031] Ar_1 and Ar_2 are each independently a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{40} alkyl group, a substituted or unsubstituted C_2 to C_{40} alkenyl group, a substituted or unsubstituted C_2 to C_{40} alkynyl group, a substituted or unsubstituted C_6 to C_{40} aryl group, a substituted or unsubstituted C_1 to C_{40} heteroaryl group, a substituted or unsubstituted C_1 to C_{40} alkoxy group, a substituted or unsubstituted C_6 to C_{40} aryloxy group, a C_1 to C_{40} alkylamino group, a C_6 to C_{40} arylamino group, a C_6 to C_{40} diarylamino group, a C_1 to C_{40} heteroarylamino group, a C_2 to C_{40} diheteroarylamino group, a C_6 to C_{40} arylalkyl group, a C_6 to C_{40} heteroarylalkyl group, a C_3 to C_{40} cycloalkyl group, a C_3 to C_{40} heterocycloalkyl group, a C_3 to C_{40} alkylsilyl group, a C_6 to C_{40} arylsilyl group, or a C_1 to C_{40} heteroarylsilyl group,

[0032] provided E and X^1 are not both CH.


[0033] Some embodiments provide an organic luminescent compound that provides, compared to a conventional host material, high luminescent efficiency and long device lifespan, and has a robust skeleton with an appropriate color coordinate, and an organic luminescent device having high efficiency and long-lifespan due to the inclusion of a novel organic luminescent compound as a luminescent material.

[0034] Aspects of embodiments of Formula 1 will now be described in detail.

[0035] In an aspect, ring A in Formula 1 may be a thiophene moiety or an imidazole moiety.

[0036] In an aspect, when R_1 and R_2 in Formula 1 bind to each other to form a ring, the ring may be a heteroaryl ring.

[0037] In an aspect, Formula 1 may be Formula 2:




Formula 2

[0038] X in Formula 2 is S (sulfur) or NR_{100} ; and

[0039] R_4 , R_5 , and R_{100} may be each independently a hydrogen, a deuterium, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C_1 to C_{40} alkyl group, a substituted or unsubstituted C_2 to C_{40}

alkenyl group, a substituted or unsubstituted C_2 to C_{40} alkynyl group, a substituted or unsubstituted C_6 to C_{40} aryl group, a substituted or unsubstituted C_1 to C_{40} heteroaryl group, a substituted or unsubstituted C_1 to C_{40} alkoxy group, a substituted or unsubstituted C_6 to C_{40} aryloxy group, a C_1 to C_{40} alkylamino group, a C_6 to C_{40} arylamino group, a C_6 to C_{40} diarylamino group, a C_1 to C_{40} heteroarylamino group, a C_2 to C_{40} diheteroarylamino group, a C_6 to C_{40} arylalkyl group, a C_6 to C_{40} heteroarylalkyl group, a substituted or unsubstituted C_3 to C_{40} cycloalkyl group, a C_3 to C_{40} heterocycloalkyl group, a C_3 to C_{40} alkylsilyl group, a C_6 to C_{40} arylsilyl group, or a C_1 to C_{40} heteroarylsilyl group.

[0040] In an aspect, Formula 1 may be Formula 3:




Formula 3

[0041] X and Y in Formula 3 are each independently S (sulfur), N (nitrogen), or NR_{100} ; and

[0042] R_4 and R_{100} may be each independently a hydrogen, a deuterium, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C_1 to C_{40} alkyl group, a substituted or unsubstituted C_2 to C_{40} alkenyl group, a substituted or unsubstituted C_2 to C_{40} alkynyl group, a substituted or unsubstituted C_6 to C_{40} aryl group, a substituted or unsubstituted C_1 to C_{40} heteroaryl group, a substituted or unsubstituted C_1 to C_{40} alkoxy group, a substituted or unsubstituted C_6 to C_{40} aryloxy group, a C_1 to C_{40} alkylamino group, a C_6 to C_{40} arylamino group, a C_6 to C_{40} diarylamino group, a C_1 to C_{40} heteroarylamino group, a C_2 to C_{40} diheteroarylamino group, a C_6 to C_{40} arylalkyl group, a C_6 to C_{40} heteroarylalkyl group, a substituted or unsubstituted C_3 to C_{40} cycloalkyl group, a C_3 to C_{40} heterocycloalkyl group, a C_3 to C_{40} alkylsilyl group, a C_6 to C_{40} arylsilyl group, or a C_1 to C_{40} heteroarylsilyl group.

[0043] In an aspect, Formula 1 may be Formula 4:




Formula 4

[0044] X and Y in Formula 4 are each independently S (sulfur) or NR_{100} ; and

[0045] R_4 to R_7 , and R_{100} may be each independently a hydrogen, a deuterium, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C_1 to

C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroaryl amino group, a C₂ to C₄₀ diheteroaryl amino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group.

[0046] In an aspect, Formula 1 may be Formula 5:




Formula 5

[0047] X and Y in Formula 5 are S (sulfur), N (nitrogen), or NR₁₀₀; and

[0048] R₄, R₅, R₈, and R₁₀₀ may be each independently a hydrogen, a deuterium, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroaryl amino group, a C₂ to C₄₀ diheteroaryl amino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group.

[0049] In an aspect, Ar₂ and R₃ in Formula 1 may be a hydrogen or a deuterium.


[0050] In an aspect, R₄ and R₅ in Formula 2 may be each independently one of Formulae 2a to 2e:




2a

2b


-continued



2c



2d




2e

[0051] wherein in Formulae 2a to 2e,

[0052] Q₁ is S (sulfur), CR₅₁R₅₂, or NR₅₃, Y₁ to Y₃ are each independently CH or N (nitrogen), Z₁, Z₂, R₅₁, R₅₂, and R₅₃ are each independently a hydrogen, a deuterium, a substituted or unsubstituted C₁ to C₂₀ alkyl group, a substituted or unsubstituted C₆ to C₂₀ aryl group, a substituted or unsubstituted C₁ to C₂₀ heteroaryl group, a substituted or unsubstituted C₆ to C₂₀ condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group or a carboxy group, p is an integer of 1 to 8, and * indicates an attachment position.

[0053] In an aspect, R₁ and R₂ in Formula 2 may be each independently a hydrogen or a deuterium.


[0054] In an aspect, R₄ in Formula 3 may be Formula 3a:



3a


[0055] Z₁ in Formula 3a is a hydrogen, a deuterium, a substituted or unsubstituted C₁ to C₂₀ alkyl group, a substituted or unsubstituted C₆ to C₂₀ aryl group, a substituted or unsubstituted C₁ to C₂₀ heteroaryl group, a substituted or unsubstituted C₆ to C₂₀ condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group; p is an integer of 1 to 5; and * indicates an attachment position.

[0056] In an aspect, R₁₀₀ in Formula 3 may be one of Formulae 4a to 4c:




4a

-continued



4b




4c


[0057] wherein in Formulae 4a to 4c, Q_2 may be S (sulfur), $CR_{51}R_{52}$, or NR_{53} ; Z_1 , R_{51} , R_{52} , and R_{53} are each independently a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group; p is an integer of 1 to 7; and * indicates a binding site.

[0058] In an aspect, R_1 and R_2 in Formula 3 may be each independently a hydrogen or a deuterium.


[0059] In an aspect, R_4 , R_5 , R_6 , and R_7 in Formula 4 may be each independently one of Formulae 5a to 5c:



5a



5b




5c


[0060] wherein in Formulae 5a to 5c,

[0061] Z_1 is a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group; p is an integer of 1 to 8; and * indicates an attachment position.


[0062] In an aspect, R_4 , R_5 , R_8 , and R_{100} in Formula 5 are each independently any one of Formulae 6a to 6c:



6a



6b



6c

[0063] wherein in Formulae 6a to 6c,

[0064] Z_1 is a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

[0065] p is an integer of 1 to 7; and * indicates an attachment position.

[0066] Hereinafter, substituents described with reference to the formulae will now be described in detail. In this regard, the numbers of carbons in substituents are presented only for illustrative purposes and do not limit the characteristics of the substituents. The substituents not defined herein are construed as the same meanings understood by one of ordinary skill in the art.

[0067] The term " C_1 to C_{60} alkyl group" as used herein refers to a linear or branched saturated hydrocarbon. The C_1 to C_{60} alkyl group may be substituted or unsubstituted. Examples of the alkyl group may include, but are not limited to, a methyl group, an ethyl group, a propyl group, an isobutyl group, a sec-butyl group, a pentyl group, an iso-amyl group, a hexyl group, a heptyl group, an octyl group, a nonanyl group, and a dodecyl group. In some embodiments, at least one hydrogen atom of the alkyl group may be substituted with a deuterium atom, a halogen atom, a hydroxyl group, a nitro group, a cyano group, an amino group, an amidino group, a hydrazine, a hydrazone, a carboxyl group or salt thereof, a sulfonic acid or salt thereof, a phosphoric acid or salt thereof, a C_1 to C_{10} alkyl group, a C_1 to C_{10} alkoxy group, a C_2 to C_{10} alkenyl group, a C_2 to C_{10} alkynyl group, a C_6 to C_{16} aryl group, a C_4 to C_{16} heteroaryl group, or an organosilyl group.

[0068] The term " C_2 to C_{60} alkenyl group" used herein refers to an alkyl group having one or more carbon double bonds. The C_2 to C_{60} alkenyl group may be substituted or unsubstituted. Examples of the unsubstituted C_2 - C_{60} alkenyl group are an ethenyl group, a propenyl group, and a butenyl group. In some embodiments, at least one hydrogen atom of the unsubstituted alkenyl group may be substituted with the same substituents as described in connection with the substituted alkyl group.

[0069] The term “C₂ to C₆₀ alkynyl group” as used herein refers to an alkyl group having one or more carbon triple bonds. The C₂ to C₆₀ alkynyl group may be substituted or unsubstituted. Examples thereof are acetylene, propylene, phenylacetylene, naphthylacetylene, isopropylacetylene, t-butylacetylene, and diphenylacetylene. In some embodiments, at least one hydrogen atom of these alkynyl groups may be substituted with the same substituents as described in connection with the substituted alkyl group.

[0070] The term “C₃ to C₆₀ cycloalkyl group” as used herein refers to a C₃ to C₆₀ cyclic alkyl group. The C₃ to C₆₀ cycloalkyl group may be substituted or unsubstituted. In some embodiments, at least one hydrogen atom of the cycloalkyl group may be substituted with the same substituents as described in connection with the C₁ to C₆₀ alkyl group.

[0071] The term “C₁ to C₆₀ alkoxy group” as used herein refers to a group having a structure of —OA wherein A is a C₁ to C₆₀ alkyl group. The C₁ to C₆₀ alkoxy group may be substituted or unsubstituted. Non-limiting examples thereof are ethoxy, isopropoxy, butoxy, and pentoxy. In some embodiments, at least one hydrogen atom of the unsubstituted alkoxy group may be substituted with the same substituents as described in connection with the alkyl group.

[0072] The term “C₆ to C₆₀ aryl group” or “C₆-C₆₀ arylene group” as used herein refers to a carbocyclic aromatic system having at least one aromatic ring, and when the number of rings is two or more, the rings may be fused to each other or may be linked to each other via, for example, a single bond. The C₆ to C₆₀ aryl group may be substituted or unsubstituted. In some embodiments, the C₆ to C₆₀ aryl may be phenyl, naphthyl, or anthracenyl. In some embodiments, at least one hydrogen atom of the aryl group may be substituted with the same substituents described in connection with the C₁ to C₆₀ alkyl group.

[0073] Examples of a substituted or unsubstituted C₆ to C₆₀ aryl group are a phenyl group, a C₁ to C₁₀ alkylphenyl group (for example, an ethylphenyl group), a halophenyl group (for example, o-, m- and p-fluorophenyl groups, and a dichlorophenyl group), a cyanophenyl group, a dicyanophenyl group, a trifluoromethoxyphenyl group, a biphenyl group, a halobiphenyl group, a cyanobiphenyl group, a C₁ to C₁₀ alkylbiphenyl group, a C₁ to C₁₀ alkoxybiphenyl group, o-, m-, and p-tolyl groups, o-, m- and p-cumenyl groups, a mesityl group, a phenoxyphenyl group, a (α,α-dimethylbenzene) phenyl group, a (N,N'-dimethyl)aminophenyl group, a (N,N'-diphenyl)aminophenyl group, a pentalenyl group, an indenyl group, a naphthyl group, a halonaphthyl group (for example, a fluoronaphthyl group), a C₁ to C₁₀ an alkyl naphthyl group (for example, a methyl naphthyl group), a C₁ to C₁₀ alkoxy naphthyl group (for example, a methoxy naphthyl group), a cyanonaphthyl group, an anthracenyl group, an azulenyl group, a heptalenyl group, an acenaphthylenyl group, a phenalenyl group, a fluorenyl group, an anthraquinolyl group, a methylanthryl group, a phenanthryl group, a triphenylene group, a pyrenyl group, a chrycenyl group, an ethyl-chrycenyl group, a pycenyl group, a perylenyl group, a chloropherylenyl group, a pentaphenyl group, a pentacenyl group, a tetraphenylenyl group, a hexaphenyl group, a hexacenyl group, a rubicenyl group, a coroneryl group, a trinaphthylenyl group, a heptaphenyl group, a heptacenyl group, a pyranthrenyl group, and an ovalenyl group.


[0074] The term “C₁-C₆₀ heteroaryl group” as used herein refers to an aromatic ring or ring system including at least one hetero atom selected from nitrogen (N), oxygen (O), phosphorous (P), and sulfur (S), and when the group has two or more rings, the rings may be fused to each other or may be linked to each other via, for example, a single bond. The C₁-C₆₀ heteroaryl group may be substituted or unsubstituted. Examples of the unsubstituted C₁-C₆₀ heteroaryl group are a pyrazolyl group, an imidazolyl group, an oxazolyl group, a thiazolyl group, a triazolyl group, a tetrazolyl group, an oxadiazolyl group, a pyridinyl group, a pyridazinyl group, a pyrimidinyl group, a triazinyl group, a carbazolyl group, an indolyl group, a quinolinyl group, an isoquinolinyl group, and a dibenzothiophene group. In some embodiments, at least one hydrogen atom of the heteroaryl may be substituted with the same substituents described in connection with the C₁ to C₆₀ alkyl group.

[0075] The term “C₆ to C₆₀ aryloxy group” as used herein refers to a group represented by —OA₁, wherein A₁ is a C₆ to C₆₀ aryl group. The C₆ to C₆₀ aryloxy group may be substituted or unsubstituted. An example of the aryloxy group is a phenoxy group. In some embodiments, at least one hydrogen atom of the aryloxy group may be substituted with the same substituents described in connection with the C₁ to C₆₀ alkyl group.

[0076] The term “C₆ to C₆₀ arylthio group” as used herein refers to a group represented by —SA₁, wherein A₁ is a C₆ to C₆₀ aryl group. The C₆ to C₆₀ arylthio group may be substituted or unsubstituted. Examples of the arylthio group are a benzenethio group and a naphthylthio group. In some embodiments, at least one hydrogen atom of the arylthio group may be substituted with the same substituents described in connection with the C₁ to C₆₀ alkyl group.

[0077] The term “C₆ to C₆₀ condensed polycyclic group” as used herein refers to a substituent having two or more rings formed by fusing at least one aromatic ring and at least one non-aromatic ring or in which a unsaturated group is present in a ring but a fully conjugated system does not exist, and the condensed polycyclic group overall does not have a fully delocalized system of pi electrons including each atom of the ring system, which is in contrast to the aryl group or the heteroaryl group.


[0078] Non-limiting examples of compounds represented by Formula 1 are compounds illustrated below:



S-1


-continued

S-2

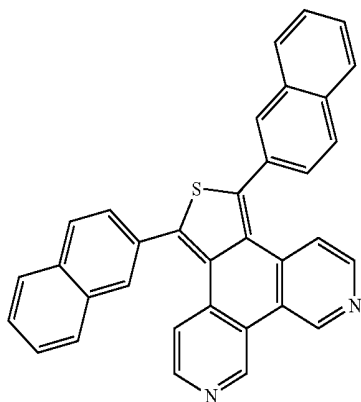


-continued


S-6




S-3

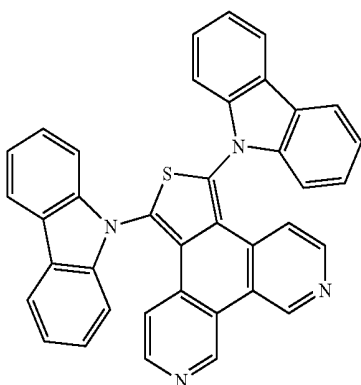


S-7

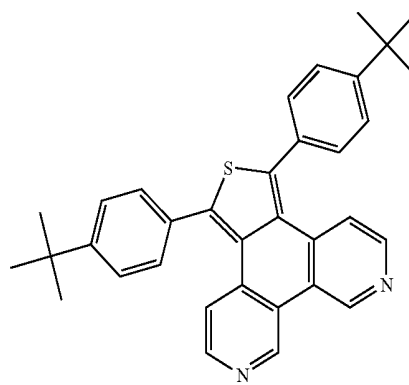


S-4

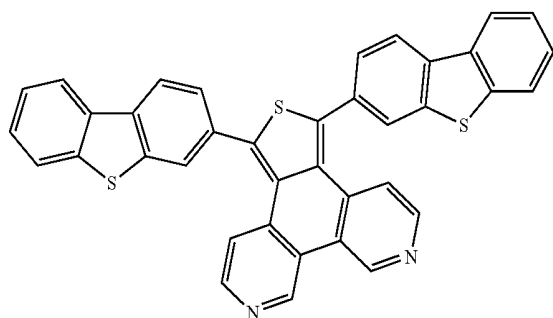


S-8

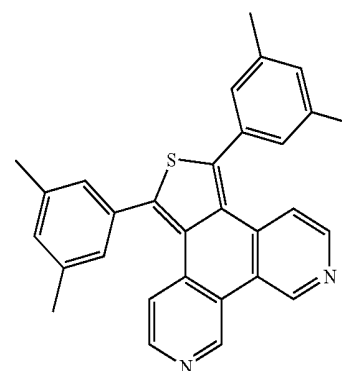

S-5

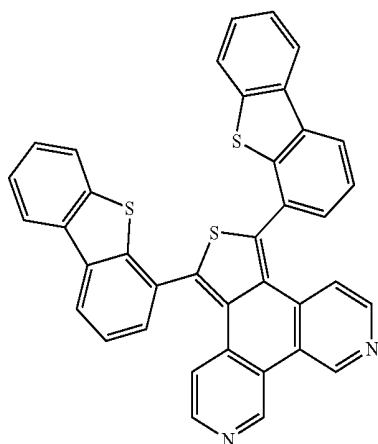


S-9

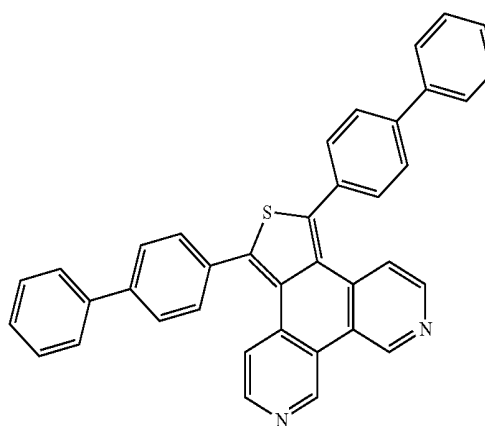


-continued

S-10

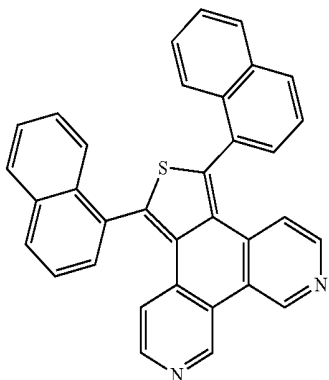


-continued


S-14

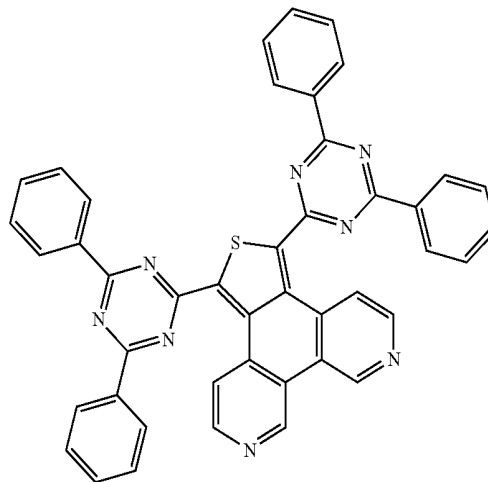


S-11

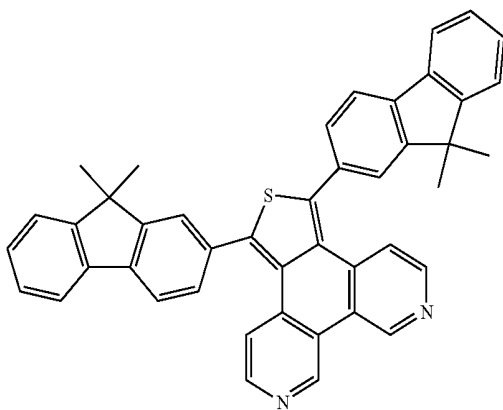


S-12




S-13

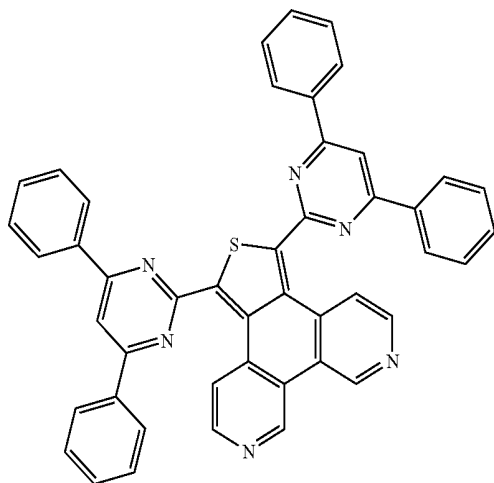

S-15

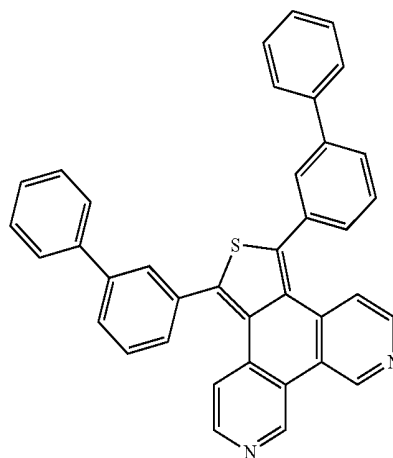


S-16




-continued


S-17

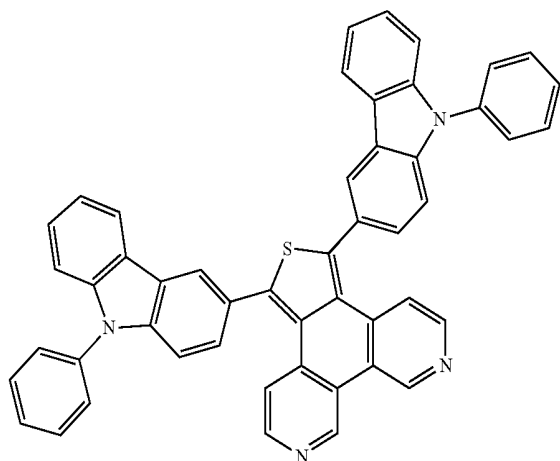


S-18



S-19




S-20

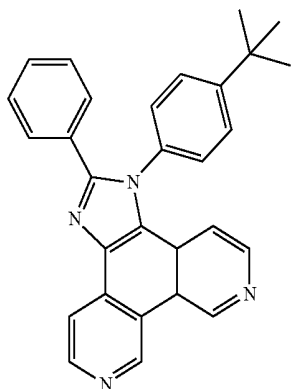


-continued


S-21




S-22

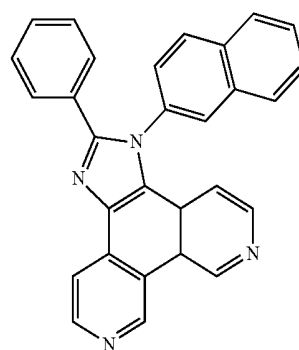

S-23

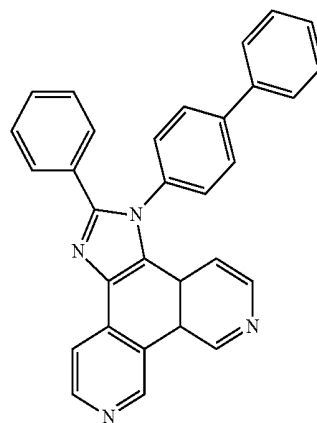


S-24




-continued


S-25




S-26

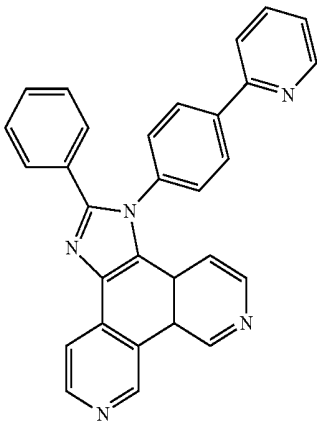

S-27




S-28

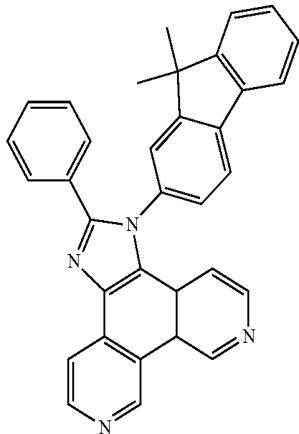


-continued


S-29

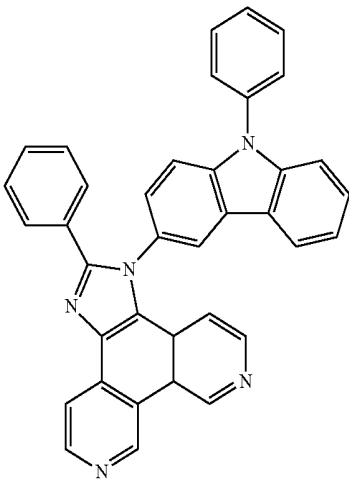


S-30

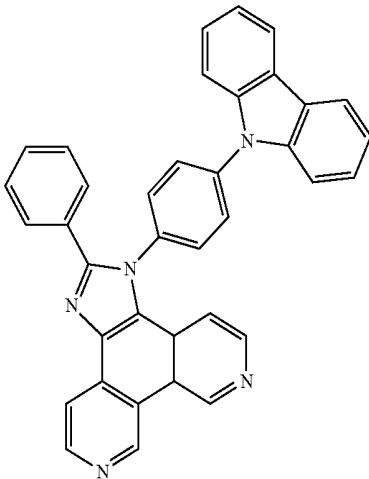


S-31



S-32




-continued

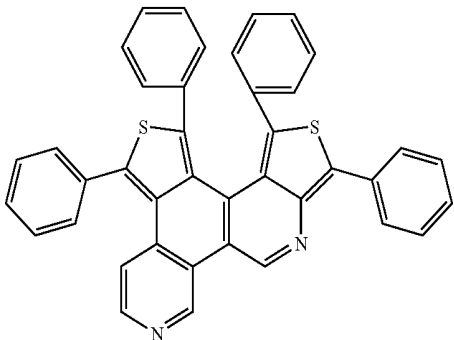


S-33


-continued

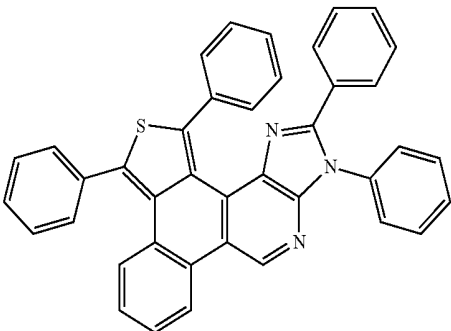


S-37

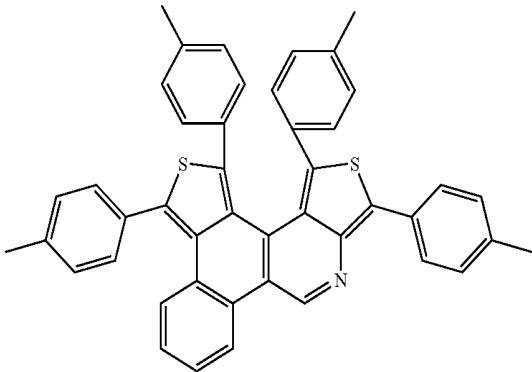


S-34

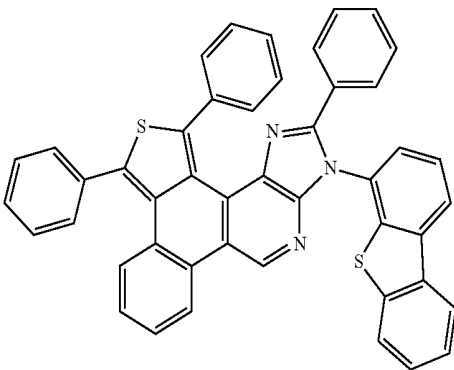


S-38

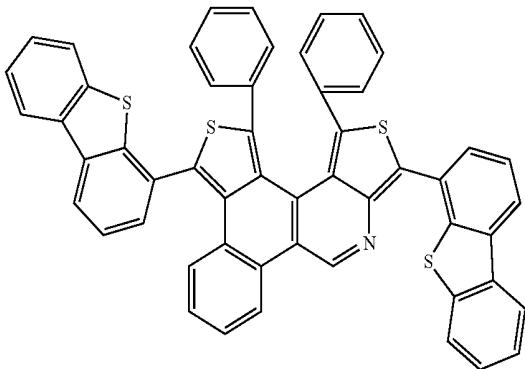


S-35

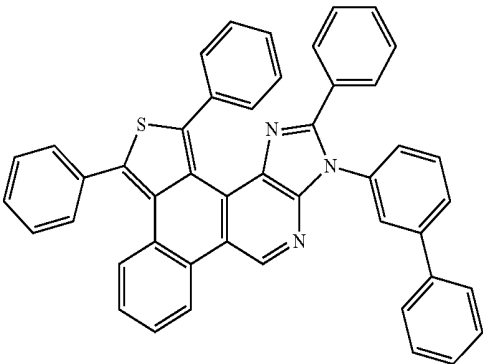

S-39

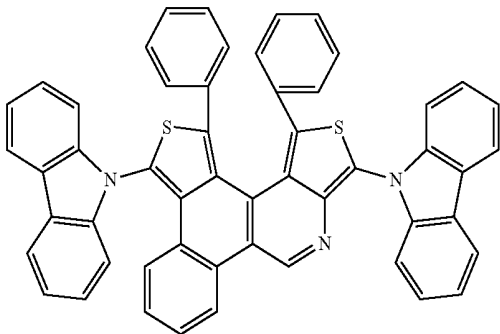


S-36

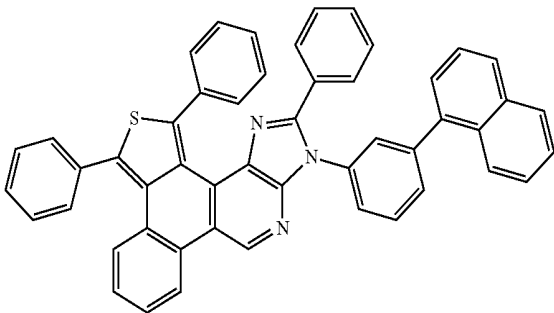


S-40

-continued

S-41

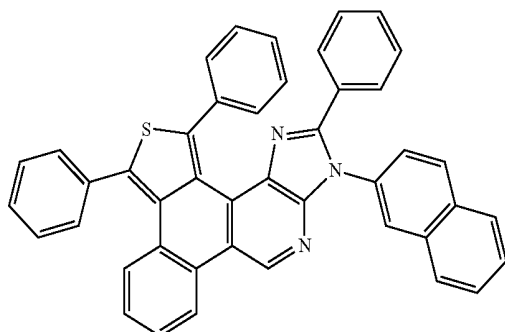

S-42

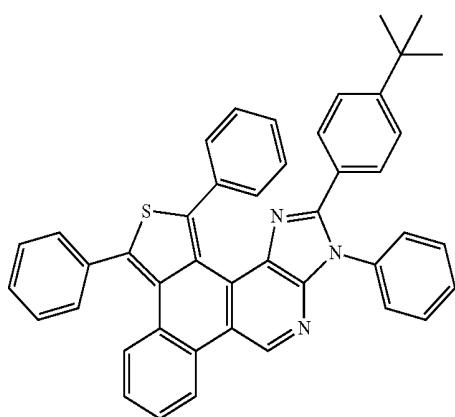

[0079] An organic light-emitting device according to an embodiment includes a first electrode, a second electrode, and an organic layer disposed between the first electrode and the second electrode, wherein the organic layer includes the compound represented by any one of Formula 1 above.

[0080] In some embodiments, the organic layer may include at least one layer selected from a hole injection layer, a hole transport layer, a functional layer having a hole injection function and a hole transport function (hereinafter referred to as "H-functional layer"), a buffer layer, an electron blocking layer, an emission layer, a hole blocking layer, an electron transport layer, an electron injection layer, and a functional layer having an electron transport function and an electron injection function (hereinafter referred to as "E-functional layer").

[0081] In some embodiments, the organic layer may be a luminescent layer, and may be, for example, a green phosphorescent or a red phosphorescent luminescent layer.

[0082] According to an embodiment, the organic light-emitting device may include an electron injection layer, an electron transport layer, an emission layer, a hole injection layer, a hole transport layer, or a H-functional layer, and the emission layer may include an anthracene-based compound, an arylamine-based compound, or a styryl-based compound.

[0083] According to another embodiment, the organic light-emitting device may include an electron injection layer, an electron transport layer, an emission layer, a hole injection layer, a hole transport layer, or a H-functional layer, and the emission layer may include a red layer, a green layer, a blue layer, and a white layer, and any one of these layers may include a phosphorescent compound, and the hole injection layer, the hole transport layer, or the H-functional layer may include a charge-generation material. Also, the charge-gen-

eration material may be a p-dopant, and the p-dopant may be a quinone derivative, a metal oxide, or a cyano group-containing compound.

[0084] According to another embodiment, the organic layer may include an electron transport layer that includes a metal complex. The metal complex may be a Li complex.

[0085] The term "organic layer" as used herein refers to a single layer and/or a plurality of layers disposed between the first electrode and the second electrode of an organic light-emitting device.

[0086] FIG. 1 is a schematic cross-sectional view of an organic light-emitting device according to an embodiment. Hereinafter, the structure of an organic light-emitting device according to an embodiment and a method of manufacturing an organic light-emitting device according to an embodiment will be described in connection with FIG. 1.

[0087] A substrate (not shown) may be any one of various substrates that are used in a known organic light-emitting device, and may be a glass substrate or a transparent plastic substrate, with excellent mechanical strength, thermal stability, transparency, surface smoothness, ease of handling, and water repellency.

[0088] The first electrode may be formed by, for example, depositing or sputtering a material for a first electrode on the substrate. When the first electrode is an anode, the material for the first electrode may be selected from materials with a high work function to make holes be easily injected. The first electrode may be a reflective electrode or a transmission electrode. In some embodiments, the material for the first electrode may be a transparent and highly conductive material, and examples of such a material are indium tin oxide (ITO), indium zinc oxide (IZO), tin oxide (SnO_2), and zinc oxide (ZnO). In some embodiments, magnesium (Mg), aluminum (Al), aluminum-lithium (Al—Li), calcium (Ca), magnesium-indium (Mg—In), or magnesium-silver (Mg—Ag) may be used to form the first electrode as a reflective electrode.

[0089] In some embodiments, the first electrode may be a single- or multi-layered structure. For example, the first electrode may have a three-layered structure of ITO/Ag/ITO, but the structure of the first electrode is not limited thereto.

[0090] In some embodiments, an organic layer is disposed on the first electrode.

[0091] In some embodiments, the organic layer may include a hole injection layer, a hole transport layer, a buffer layer (not shown), an emission layer, an electron transport layer, or an electron injection layer.


[0092] In some embodiments, a hole injection layer (HIL) may be formed on the first electrode by using various methods, such as vacuum deposition, spin coating, casting, langmuir-blodgett (LB) deposition, or the like.

[0093] When the hole injection layer is formed using vacuum deposition, vacuum deposition conditions may vary according to the compound that is used to form the hole injection layer, and the desired structure and thermal properties of the hole injection layer to be formed. For example, vacuum deposition may be performed at a temperature of about 100°C . to about 500°C ., a pressure of about 10^{-8} torr to about 10^{-3} torr, and a deposition rate of about 0.01 to about 100 Å/sec. However, the deposition conditions are not limited thereto.


[0094] When the hole injection layer is formed using spin coating, the coating conditions may vary according to the compound that is used to form the hole injection layer, and the

desired structure and thermal properties of the hole injection layer to be formed. For example, the coating rate may be in the range of about 2000 rpm to about 5000 rpm, and a temperature at which heat treatment is performed to remove a solvent after coating may be in the range of about 80° C. to about 200° C. However, the coating conditions are not limited thereto.


[0095] For use as a hole injection material, any known hole injection material may be used, and examples of any known hole injection material are N,N'-diphenyl-N,N'-bis-[4-(phenyl-m-tolyl-amino)-phenyl]-biphenyl-4,4'-diamine (DNTPD), a phthalocyanine compound such as copper phthalocyanine, 4,4',4''-tris(3-methylphenylphenylamino)triphenylamine (m-MTDATA), N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPB), TDATA, 2-TNATA, a polyaniline/dodecylbenzenesulfonic acid (pani/DBSA), poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) (PEDOT/PSS), polyaniline/camphor sulfonic acid (pani/CSA), and (polyaniline)/poly(4-styrenesulfonate) (PANI/PSS), but they are not limited thereto.

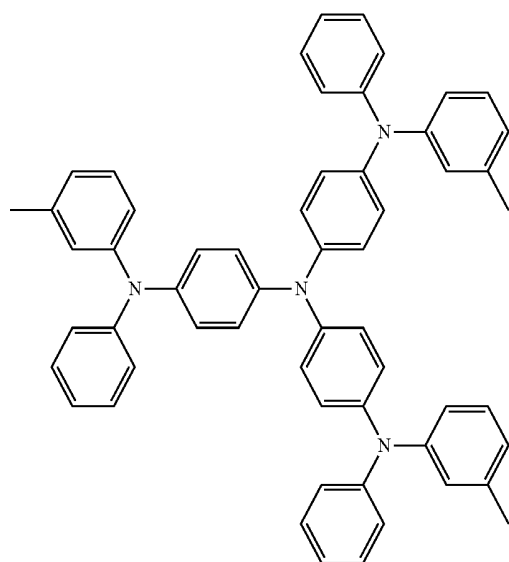

m-MTDATA

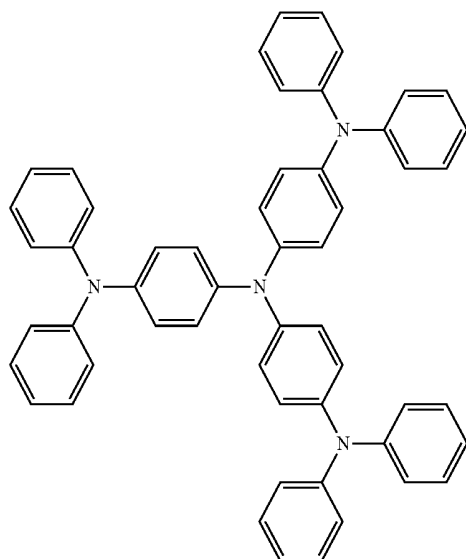

TDATA

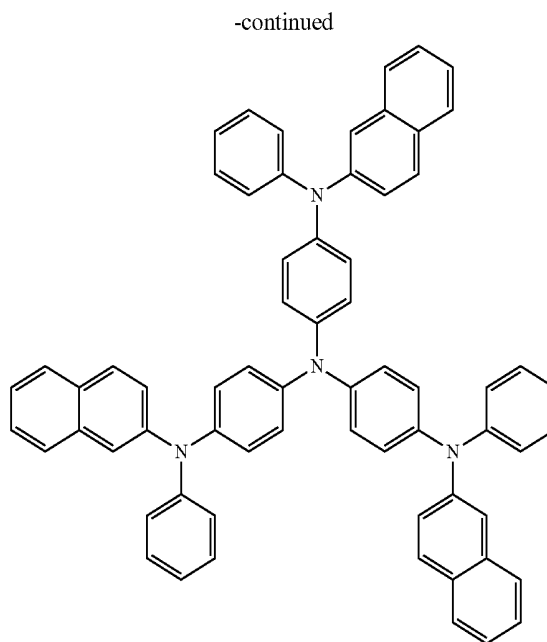


2-TNATA


[0096] In some embodiments, a thickness of the hole injection layer may be in a range of about 100 Å to about 10,000 Å, for example, about 100 Å to about 1,000 Å. If the thickness of the hole injection layer is within the ranges described above, excellent electron injection characteristics may be obtained without a substantial increase in driving voltage.

[0097] Then, a hole transport layer (HTL) may be formed on the hole injection layer by using vacuum deposition, spin coating, casting, or LB. When the hole transport layer is formed by vacuum deposition or spin coating, the deposition or coating conditions may be similar to those applied to form the hole injection layer although the deposition or coating conditions may vary according to the material that is used to form the hole transport layer.

[0098] For use as a hole transport material, any known hole transport material may be used. Examples of a known hole transport material are a carbazole derivative, such as N-phenylcarbazole or polyvinylcarbazole, N,N'-bis(3-methylphenyl)-N,N'-diphenyl-[1,1'-biphenyl]-4,4'-diamine (TPD), 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA), and N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPB), but are not limited thereto.

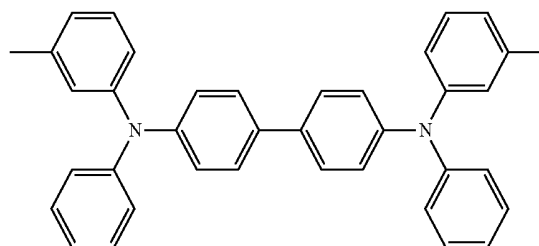



TPD

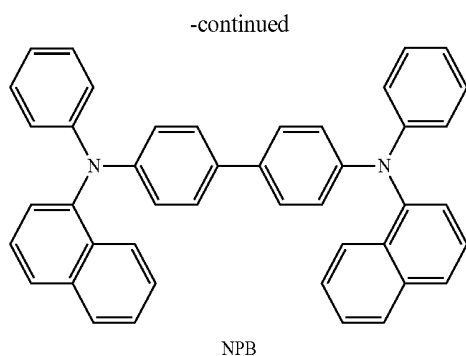

[0099] In some embodiments, a thickness of the hole transport layer may be in a range of about 50 Å to about 2,000 Å, for example, about 100 Å to about 1,500 Å. When the thickness of the hole transport layer is within these ranges, the hole transport layer may have satisfactory hole transporting ability without a substantial increase in driving voltage.

[0100] In some embodiments, the H-functional layer may include at least one material selected from the materials used to form a hole injection layer and the materials used to form a hole transport layer, and a thickness of the H-functional layer may be in a range of about 100 Å to about 10000 Å, for example, about 100 Å to about 1000 Å. When the thickness of the H-functional layer is within these ranges, satisfactory hole injection and transport characteristics may be obtained without a substantial increase in driving voltage.

[0101] In some embodiments, at least one layer of the hole injection layer, the hole transport layer, and the H-functional layer may include at least one of a compound represented by Formula 300 and a compound represented by Formula 350:

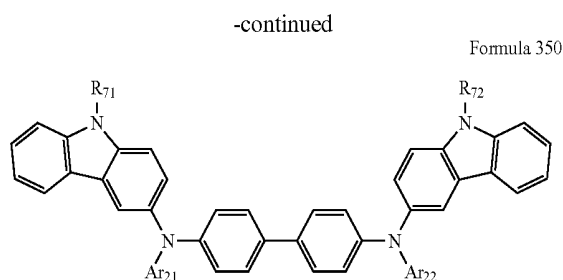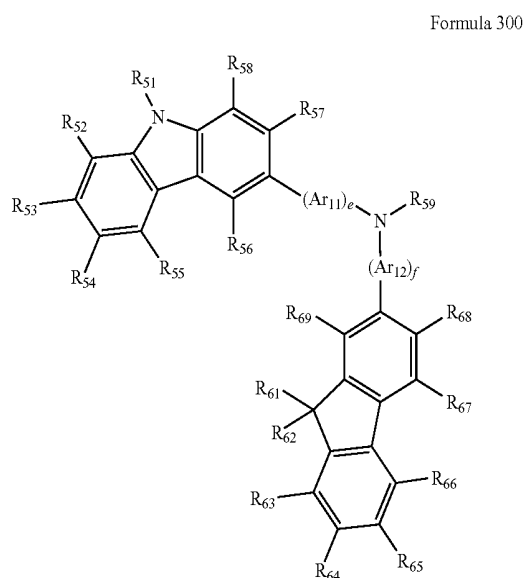

[0102] wherein in Formulae 300 and 350, Ar₁₁, Ar₁₂, Ar₂₁, and Ar₂₂ are each independently, a substituted or unsubstituted C₆-C₆₀ arylene group.

[0103] e and f in Formula 300 may be each independently an integer of 0 to 5, or 0, 1 or 2. For example, e may be 1 and f may be 0, but are not limited thereto.

[0104] R₅₁ to R₅₈, R₆₁ to R₆₉ and R₇₁ and R₇₂ in Formulae 300 and 350 may be each independently a hydrogen, a deuterium, a halogen atom, a hydroxyl group, a cyano group, a nitro group, an amino group, an amidino group, a hydrazine group, a hydrazone group, a carboxylic acid group or a salt thereof, a sulfonic acid group or a salt thereof, a phosphoric acid group or a salt thereof, a substituted or unsubstituted C₁-C₆₀ alkyl group, a substituted or unsubstituted C₂-C₆₀ alkenyl group, a substituted or unsubstituted C₂-C₆₀ alkynyl group, a substituted or unsubstituted C₁-C₆₀ alkoxy group, a substituted or unsubstituted C₃-C₆₀ cycloalkyl group, a substituted or unsubstituted C₆-C₆₀ aryl group, a substituted or unsubstituted C₆-C₆₀ aryloxy group, or substituted or unsubstituted C₆-C₆₀ arylthio group. For example, R₅₁ to R₅₈, R₆₁ to R₆₉, and R₇₁ and R₇₂ may be each independently selected from a hydrogen; a deuterium; a halogen atom; a hydroxyl group; a cyano group; a nitro group; an amino group; an amidino group; a hydrazine group; a hydrazone group; a carboxylic acid group or a salt thereof; a sulfonic acid group or a salt thereof; a phosphoric acid group or a salt thereof; a C₁-C₁₀ alkyl group (for example, a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, or a hexyl group); a C₁-C₁₀ alkoxy group (for example, a methoxy group, an ethoxy group, a propoxy group, a butoxy group, or a pentoxy group);

[0105] a C₁-C₁₀ alkyl group and a C₁-C₁₀ alkoxy group, each substituted with at least one selected from a deuterium, a halogen atom, a hydroxyl group, a cyano group, a nitro group, an amino group, an amidino group, a hydrazine group, a hydrazone group, a carboxylic acid group or a salt thereof, a sulfonic acid group or a salt thereof and a phosphoric acid group or a salt thereof;

[0106] a phenyl group; a naphthyl group; anthryl group; a fluorenyl group; a pyrenyl group; and


[0107] a phenyl group, a naphthyl group, anthryl group, a fluorenyl group and a pyrenyl group, each substituted with at least one selected from a deuterium, a halogen atom, a hydroxyl group, a cyano group, a nitro group, an amino group, an amidino group, a hydrazine group, a hydrazone group, a carboxylic acid group or a salt thereof, a sulfonic acid group or a salt thereof, a phosphoric acid group or a salt thereof, a C₁-C₁₀ alkyl group, and a C₁-C₁₀ alkoxy group.

[0108] R_{59} in Formula 300 may be one selected from

[0109] a phenyl group; a naphthyl group; anthryl group; a biphenyl group; a pyridyl group; and

[0110] a phenyl group, a naphthyl group, anthryl group, a biphenyl group and a pyridyl group, each substituted with at least one selected from a deuterium, a halogen atom, a hydroxyl group, a cyano group, a nitro group, an amino group, an amidino group, a hydrazine group, a hydrazone group, a carboxylic acid group or a salt thereof, a sulfonic acid group or a salt thereof, a phosphoric acid group or a salt thereof, a substituted or unsubstituted C_1 - C_{20} alkyl group, and a substituted or unsubstituted C_1 - C_{20} alkoxy group.


[0111] In some embodiments, the compound represented by Formula 300 may be represented by Formula 300A, but is not limited thereto:

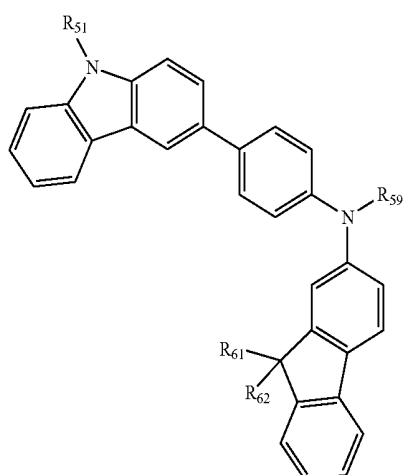

Formula 300A


[0112] where R_{51} , R_{60} , R_{61} , and R_{59} in Formula 300A are defined as described for Formula 300.

[0113] For example, at least one layer of the hole injection layer, the hole transport layer, and the H-functional layer may include at least one of Compounds 301 to 320 below, but may instead include other materials.

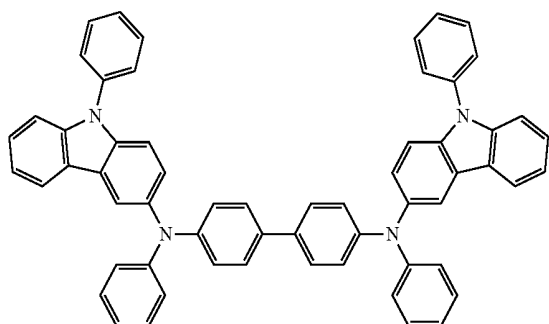


301


-continued

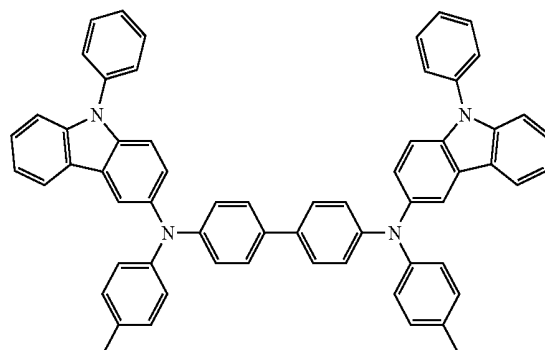


302

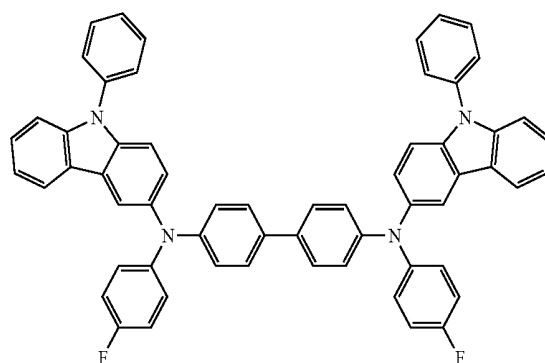

303

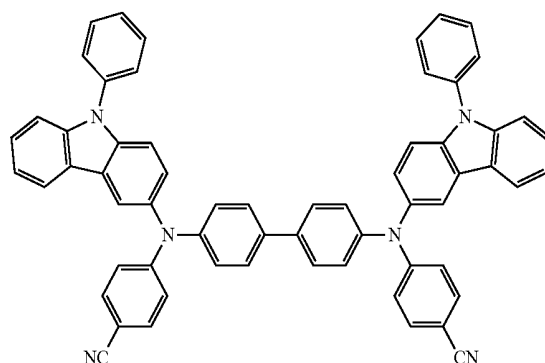


304

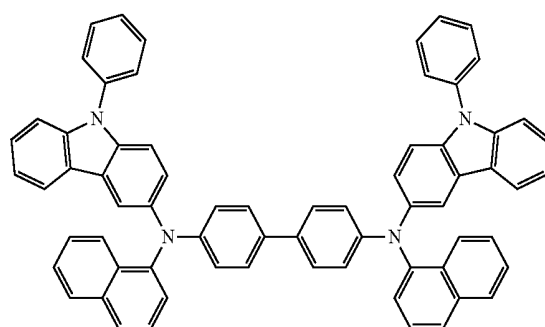

305


-continued

306

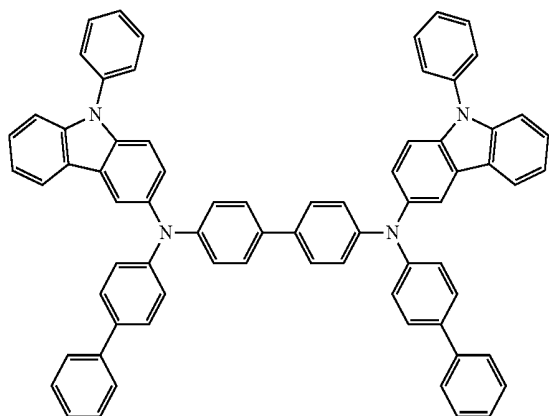



-continued

309

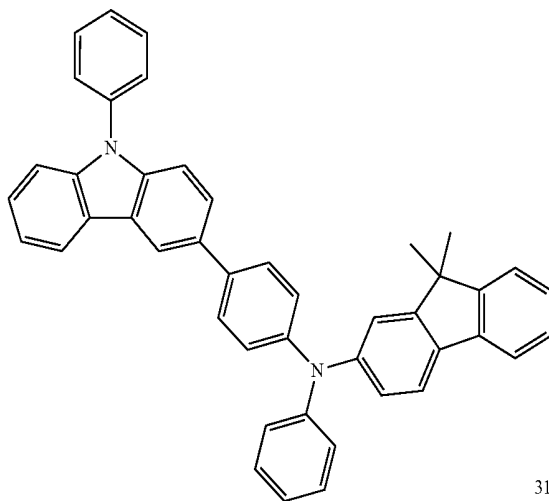



310

307

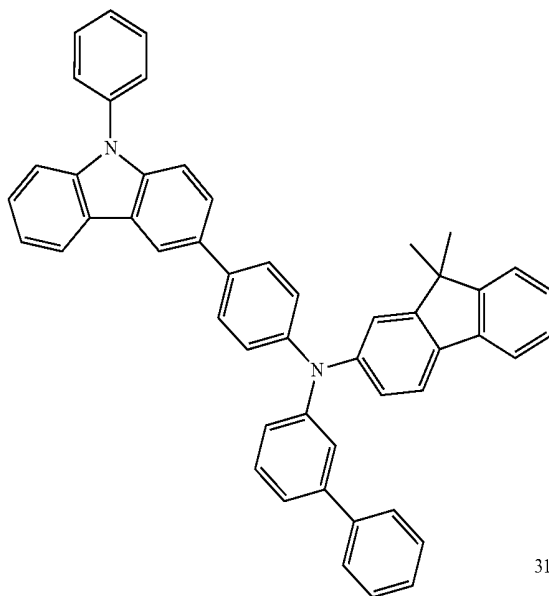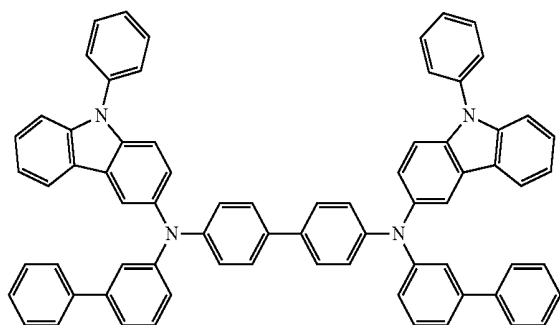


311

308

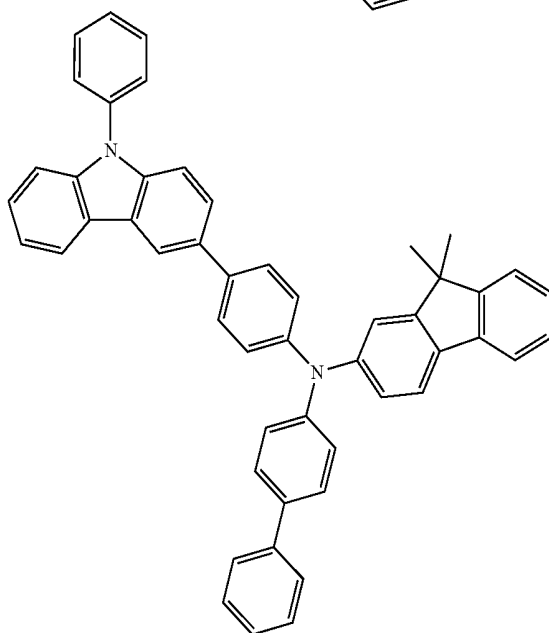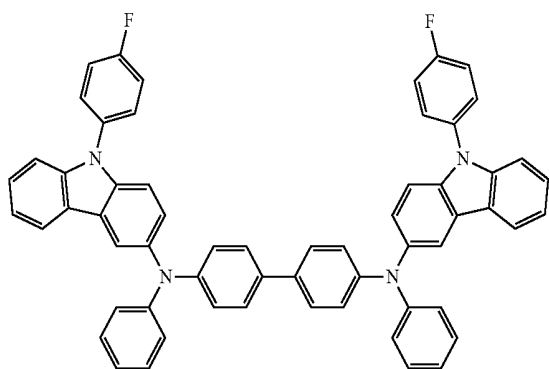


-continued

312

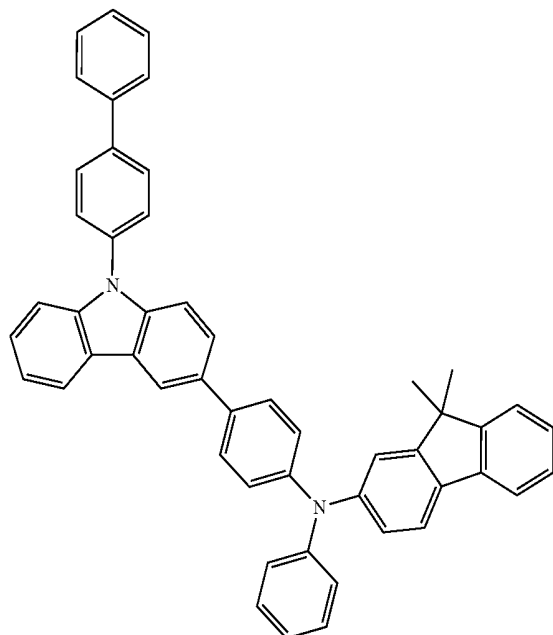


-continued


314

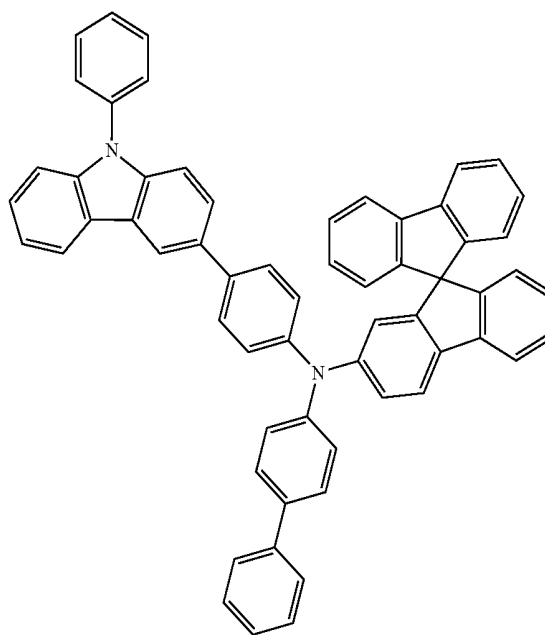

313

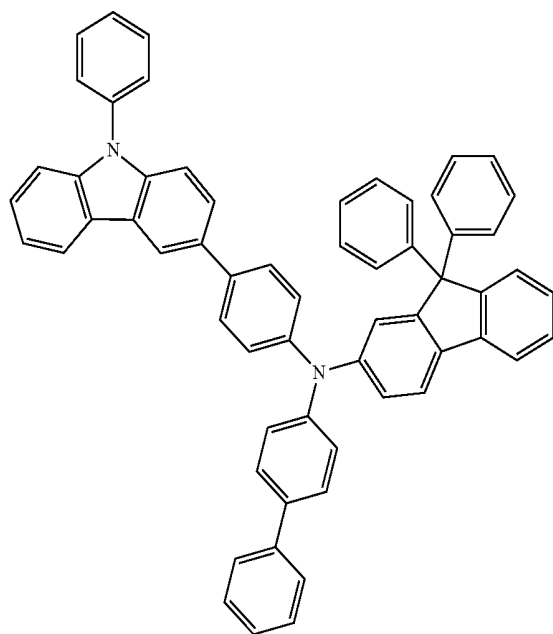


315

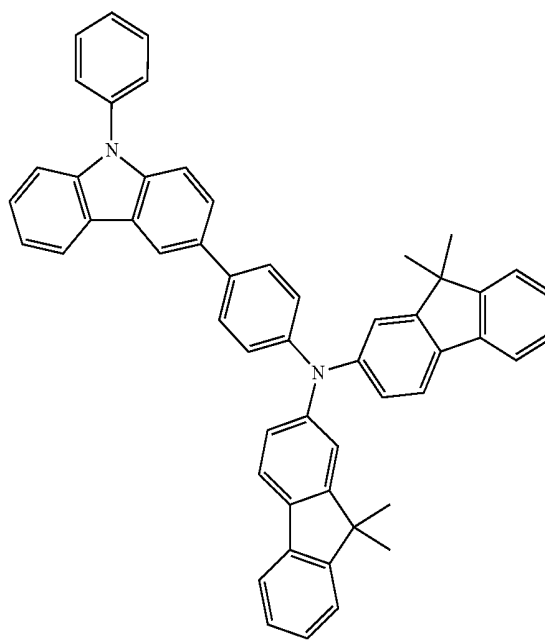


-continued


316

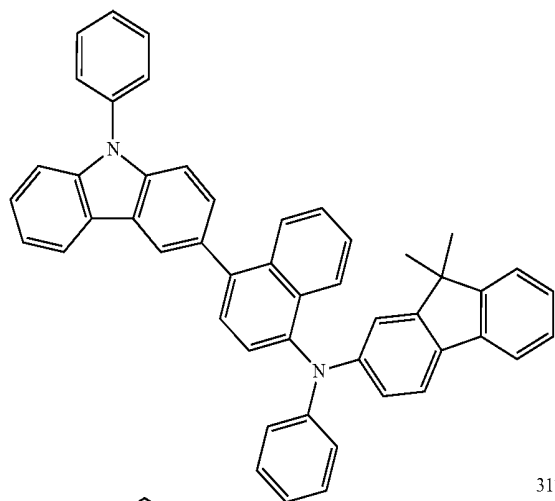

317

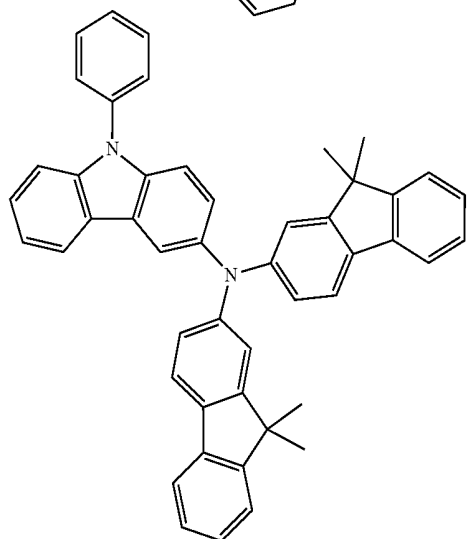


318

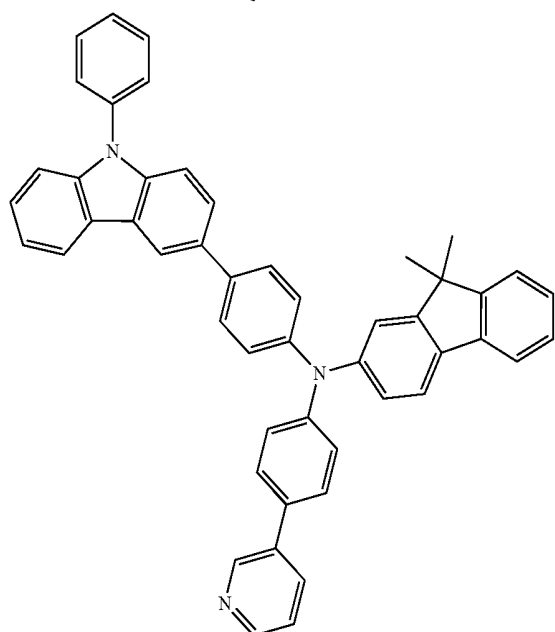


-continued

319

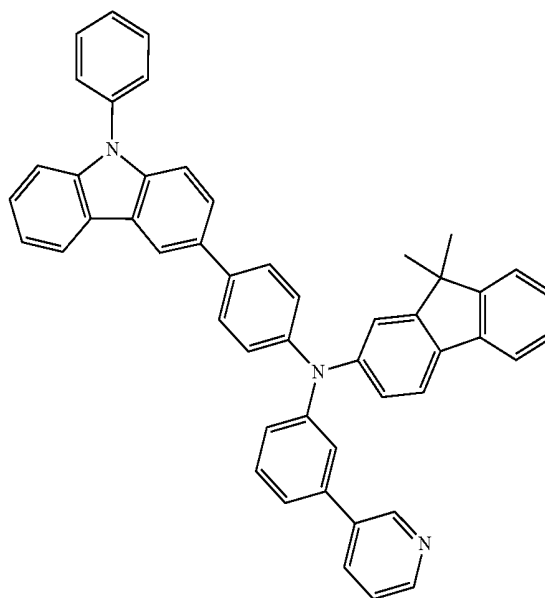


320

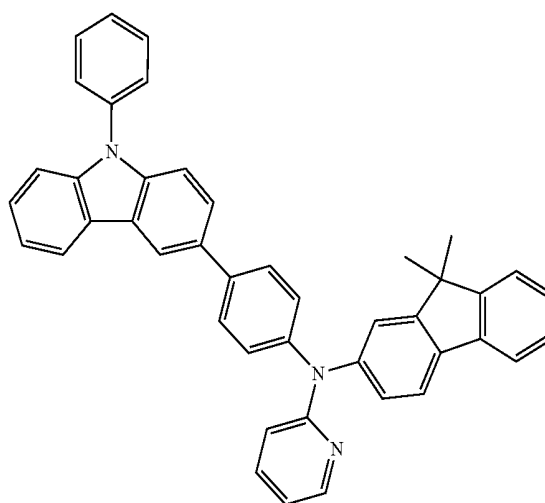

[0114] In some embodiments, at least one of the hole injection layer, the hole transport layer, and the H-functional layer may further include a charge-generating material to increase conductivity of a layer, in addition to such known hole injection materials, known hole transport materials, and/or known materials having both hole injection and hole transport capabilities.

[0115] In some embodiments, the charge-generation material may be, for example, a p-dopant. In some embodiments, the p-dopant may be one of a quinone derivative, a metal oxide, and a cyano group-containing compound, but is not limited thereto. Non-limiting examples of the p-dopant are a quinone derivative, such as tetracyanoquinonodimethane (TCNQ) or 2,3,5,6-tetrafluoro-tetracyano-1,4-benzoquinonodimethane (F4-TCNQ); a metal oxide, such as tungsten oxide or molybdenum oxide; and a cyano group-containing compound, such as Compound 200 below, but are not limited thereto.

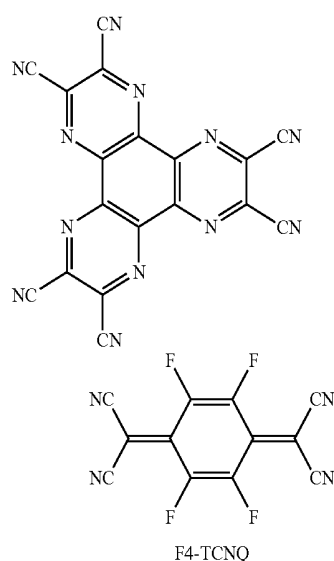


[0116] When the hole injection layer, the hole transport layer or the H-functional layer further includes a charge-generation material, the charge-generation material may be homogeneously dispersed or non-homogeneously distributed in the hole injection layer, the hole transport layer, and the H-functional layer.

[0117] In some embodiments, a buffer layer may be disposed between at least one of the hole injection layer, the hole transport layer, and the H-functional layer, and an emission layer. Also, the buffer layer may compensate for an optical resonance distance according to a wavelength of light emitted from the emission layer, and thus, efficiency of a formed organic light-emitting device may be improved. The buffer layer may include a known hole injection material and a hole transport material. Also, the buffer layer may include a material that is identical to one of materials included in the hole injection layer, the hole transport layer, and the H-functional layer formed under the buffer layer.


[0118] Subsequently, an emission layer (EML) may be formed on the hole transport layer, the H-functional layer, or the buffer layer by spin coating, casting, or a LB method. When the emission layer is formed by vacuum deposition or spin coating, the deposition and coating conditions may be similar to those for the formation of the hole injection layer, though the conditions for deposition and coating may vary according to the material that is used to form the emission layer.

[0119] In some embodiments, the emission layer may be formed by using a compound as disclosed and described herein or known luminescent materials. For example, the emission layer may be formed by using a host and a dopant. An example of the dopant may be any known fluorescent or phosphorescent dopant.

[0120] Examples of known host are Alq₃, 4,4'-N,N'-dicarbazole-biphenyl (CBP), poly(n-vinylcarbazole)(PVK), 9,10-di(naphthalene-2-yl)anthracene (ADN), TCTA, 1,3,5-tris(N-phenylbenzimidazole-2-yl)benzene (TPBI), 3-tert-butyl-9,10-di(naphth-2-yl)anthracene (TBADN), E3, distyrylarylene (DSA), dmCBP (see the following chemical structure), and Compounds 501 to 509 illustrated below, but are not limited thereto.

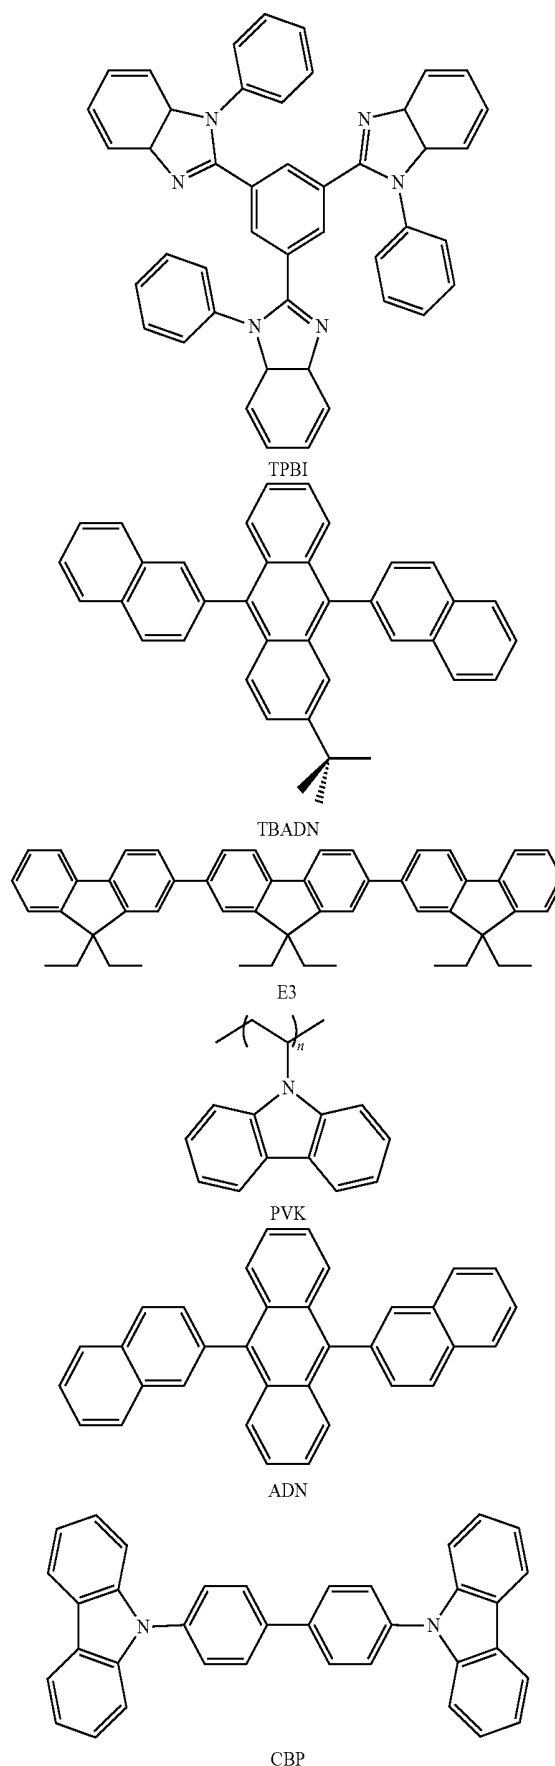


-continued

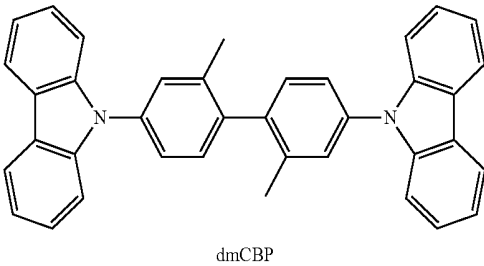


dmCBP


501

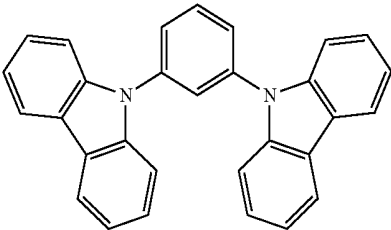


502

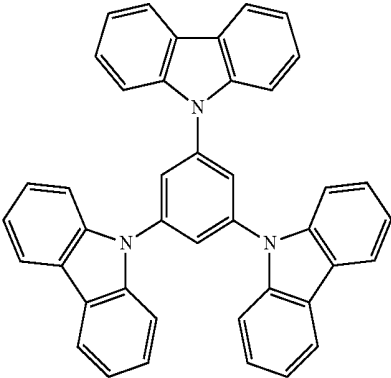

503

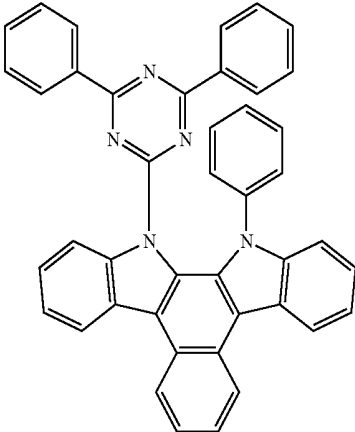


-continued

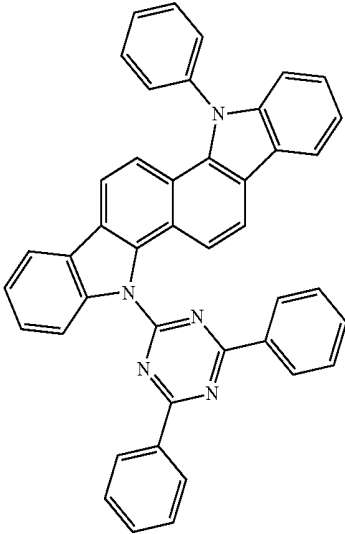


504


505

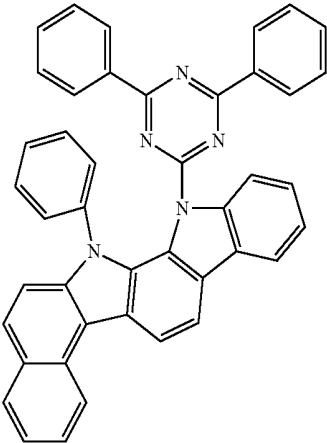

506

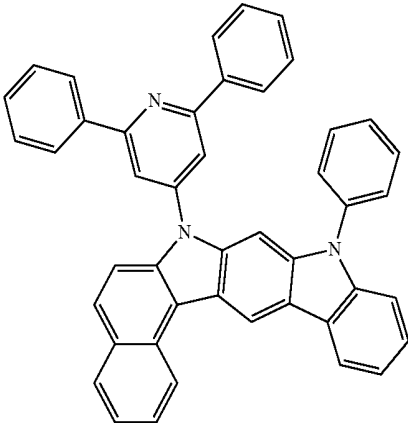

-continued

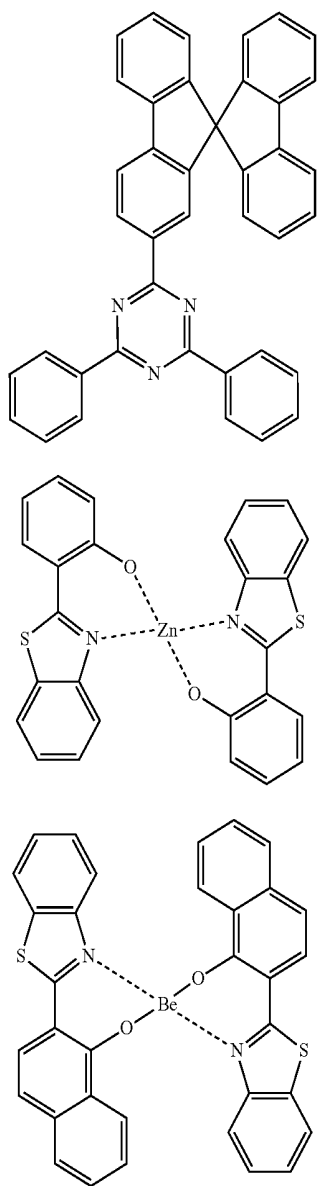

507

508


509

tuted or unsubstituted C_6 - C_{60} aryl group; and g, h, i, and j are each independently an integer of 0 to 4.

[0123] For example, Ar_{111} and Ar_{112} in Formula 400 may be each independently a phenylene group, a naphthylene group, a phenanthrenyl group, or a pyrenylene group; or a phenylene group, a naphthylene group, a phenanthrenyl group, a fluorenyl group, or a pyrenylene group, each substituted with at least one of a phenyl group, a naphthyl group, and an anthryl group, but are not limited thereto.


[0124] In some embodiments, g, h, i, and j in Formula 400 may each be independently 0, 1, or 2.

[0125] Ar_{113} to Ar_{116} in Formula 400 may be each independently a C_1 - C_{10} alkyl group substituted with at least one of a phenyl group, a naphthyl group, and an anthryl group; a phenyl group; a naphthyl group; an anthryl group; a pyrenyl group; a phenanthrenyl group; a fluorenyl group; or a phenyl group, a naphthyl group, an anthryl group, a pyrenyl group, a phenanthrenyl group, and a fluorenyl group, each substituted with at least one of a deuterium atom, a halogen atom, a hydroxyl group, a cyano group, a nitro group, an amino group, an amidino group, a hydrazine, a hydrazone, a carboxyl group or salt thereof, a sulfonic group or salt thereof, a phosphoric acid group or salt thereof, a C_1 - C_{60} alkyl group, a C_2 - C_{60} alkenyl group, a C_2 - C_{60} alkynyl group, a C_1 - C_{60} alkoxy group, a phenyl group, a naphthyl group, an anthryl group, pyrenyl group, a phenanthrenyl group, a fluorenyl group, and




but are not limited thereto.

[0126] For example, the anthracene-based compound represented by Formula 400 may be one of the following compounds, but is not limited thereto:

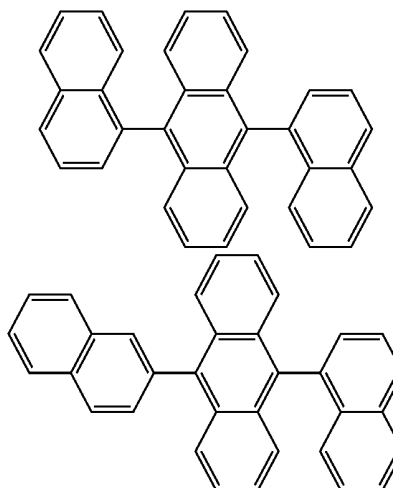






[0121] An example of the host may be an anthracene-based compound represented by Formula 400:

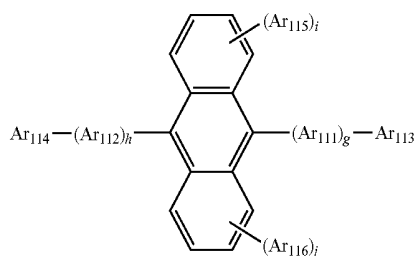







Formula 400>

[0122] wherein, in Formula 400, Ar_{111} and Ar_{112} may be each independently a substituted or unsubstituted C_6 - C_{60} arylene group; Ar_{113} to Ar_{116} may be each independently a substituted or unsubstituted C_1 - C_{10} alkyl group, or a substi-


-continued

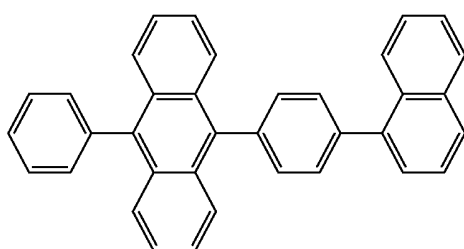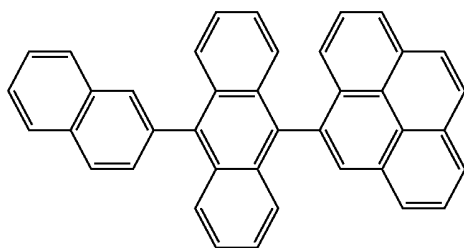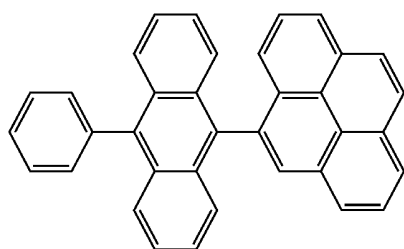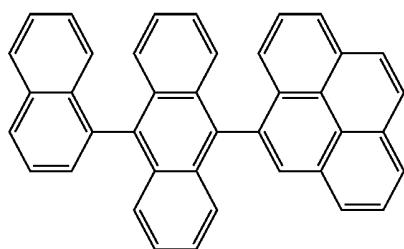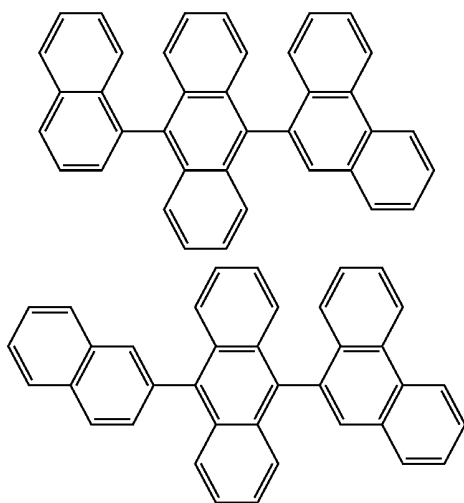


-continued

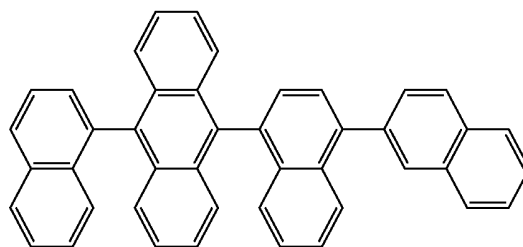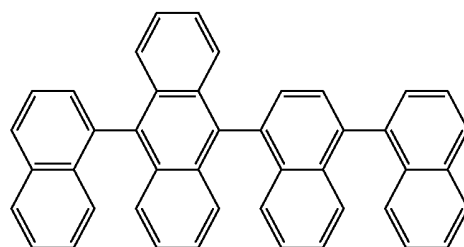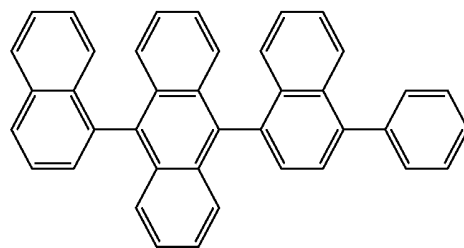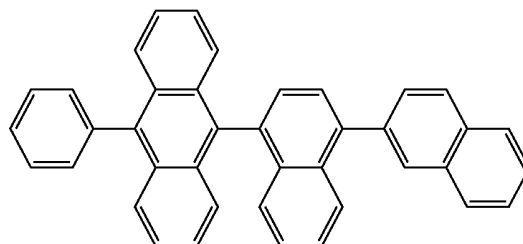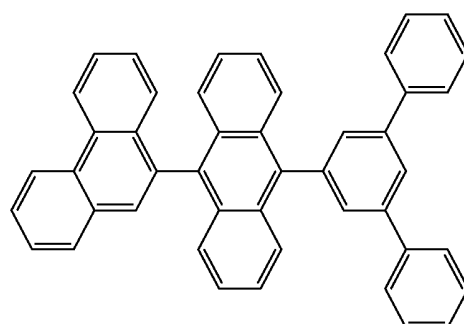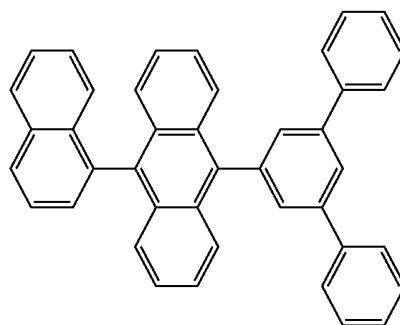


-continued

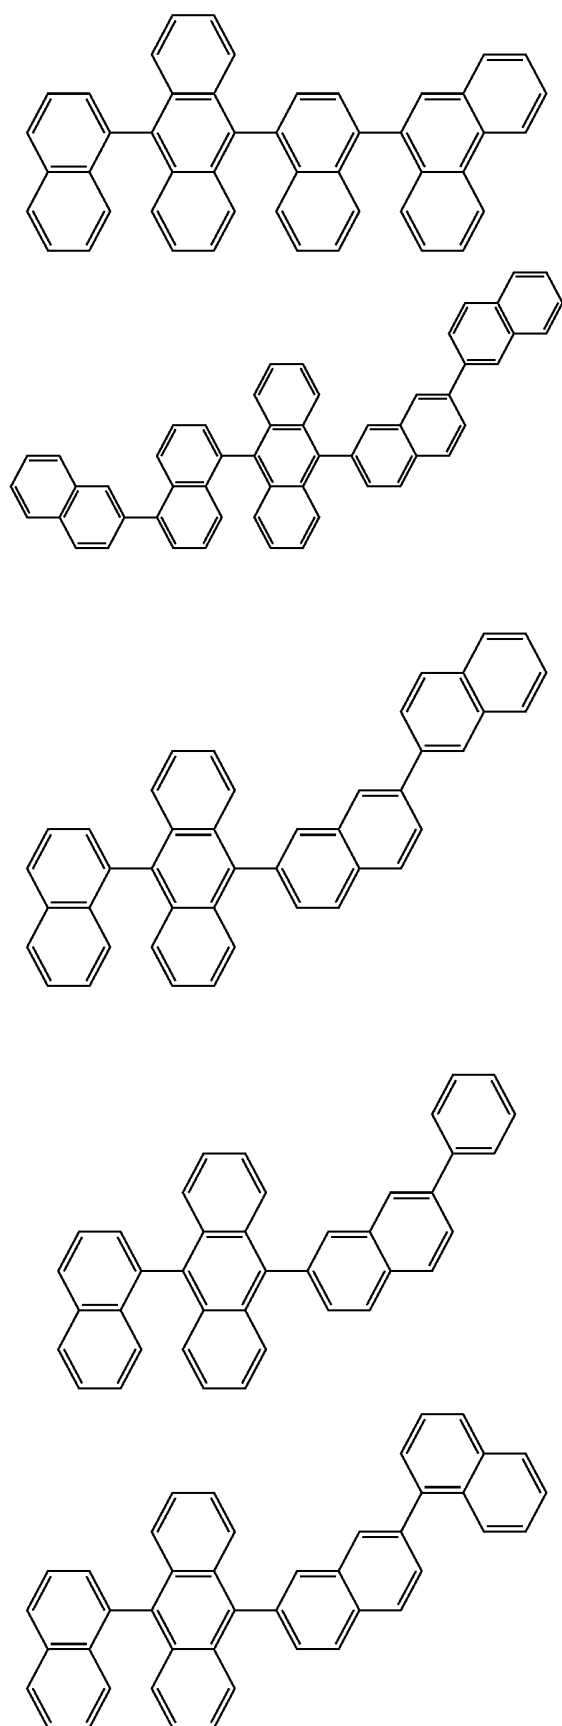









-continued




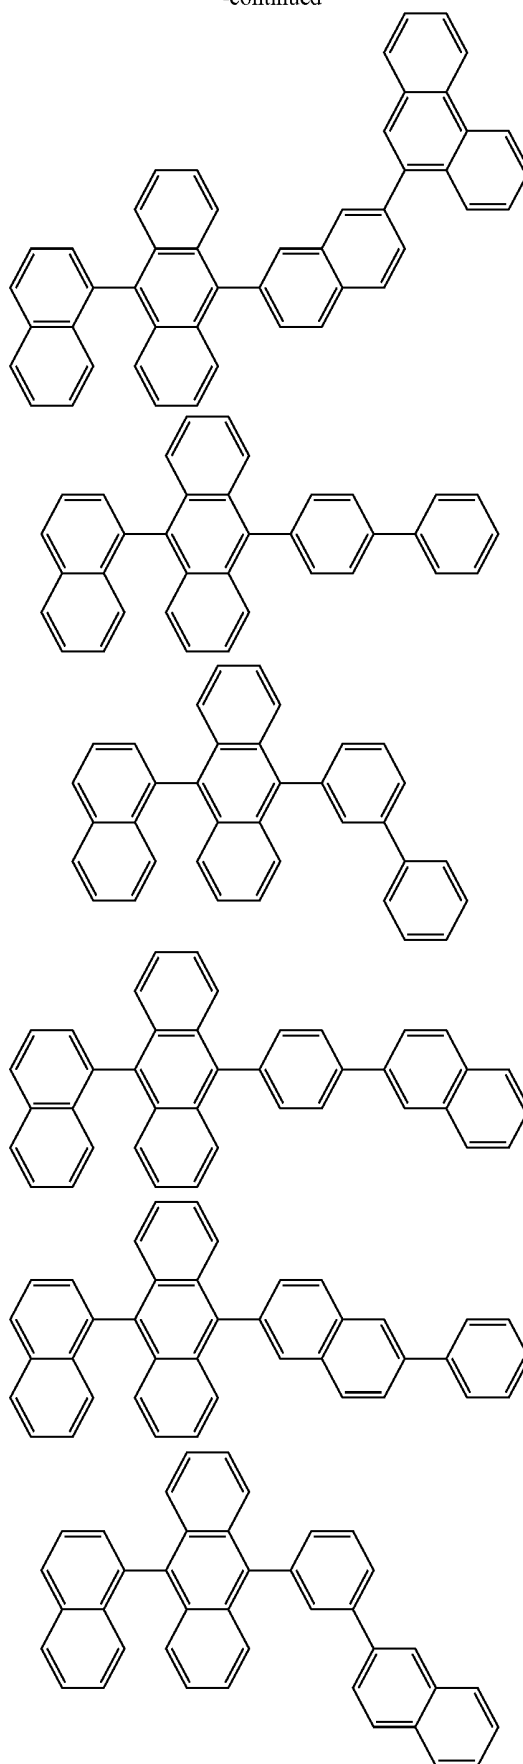


-continued

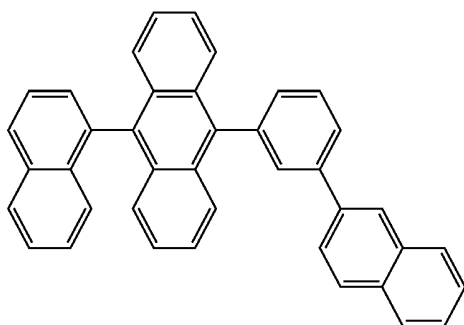


-continued

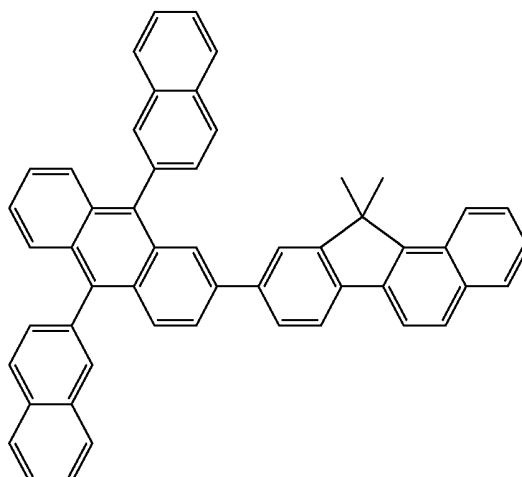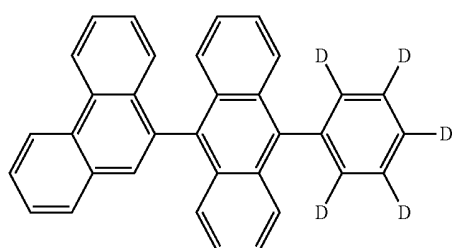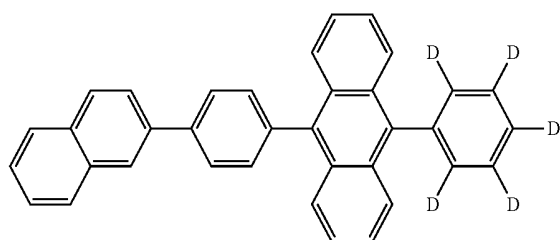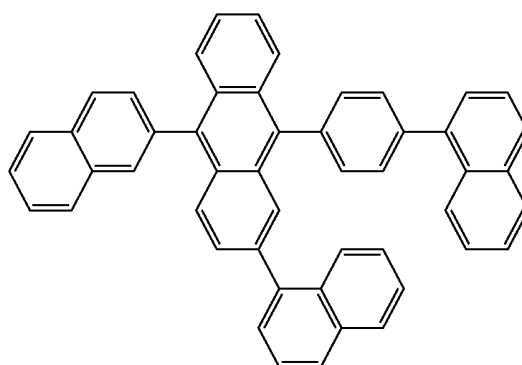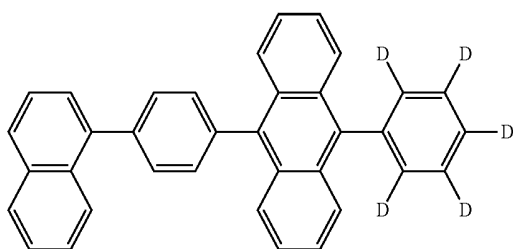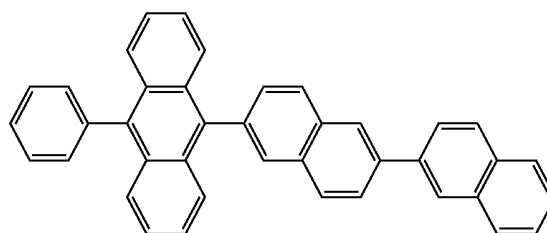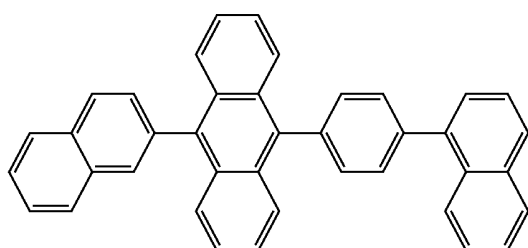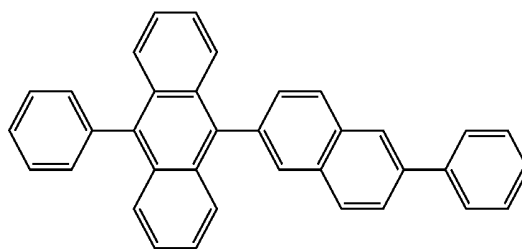

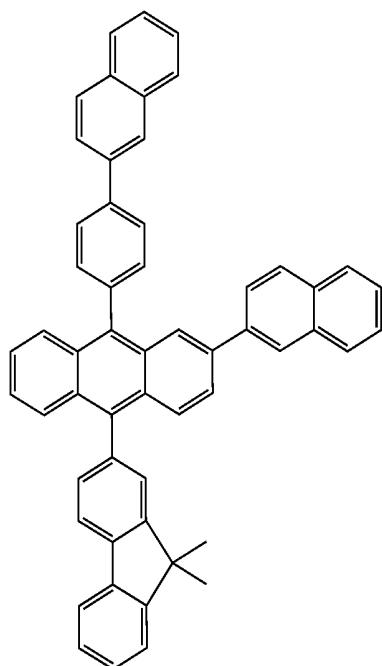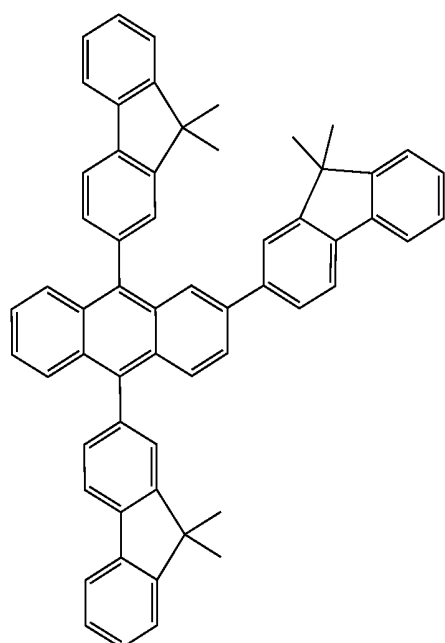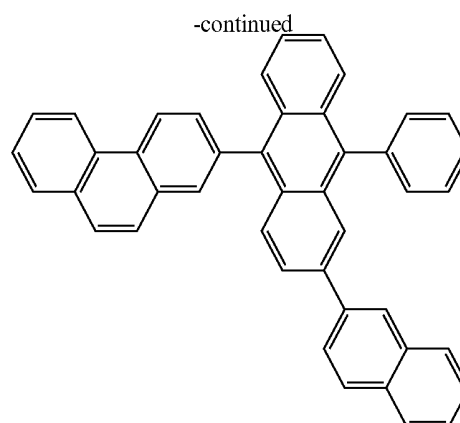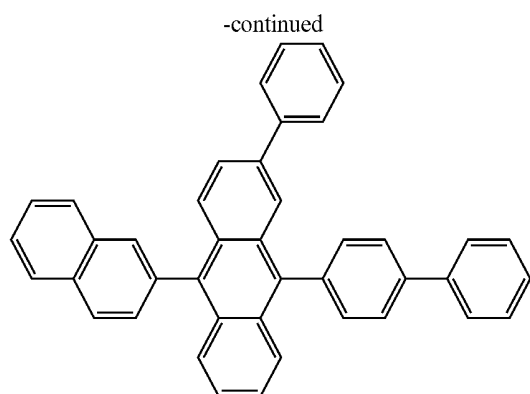

[0127] In some embodiments, the host may be an anthracene-based compound represented by Formula 401 below:

Formula 401

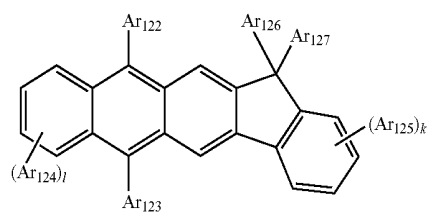


[0128] Ar_{122} to Ar_{125} in Formula 401 are the same as described in detail in connection with Ar_{113} in Formula 400.


[0129] Ar_{126} and Ar_{127} in Formula 401 may be each independently a C_1 - C_{10} alkyl group (for example, a methyl group, an ethyl group, or a propyl group).

[0130] k and l in Formula 401 may be each independently an integer of 0 to 4. For example, k and l may be 0, 1, or 2.



[0131] For example, the anthracene-based compound represented by Formula 401 may be one of the following compounds, but is not limited thereto:

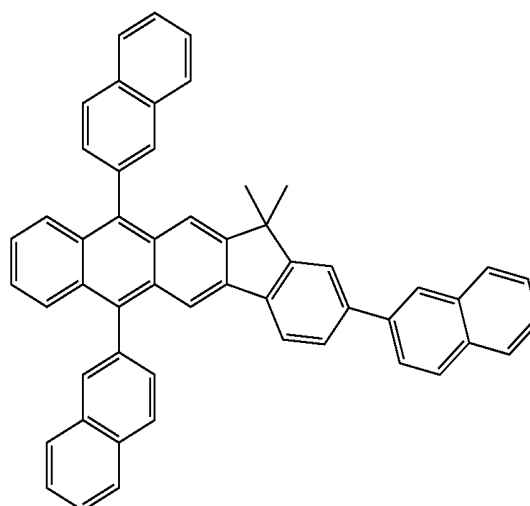

-continued

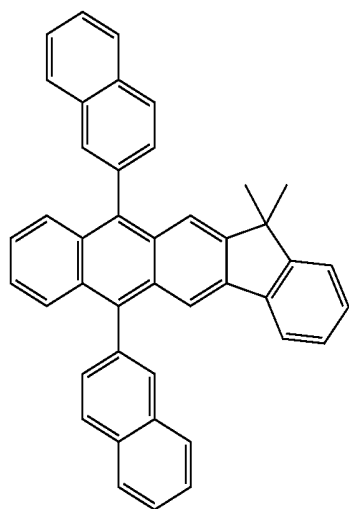




-continued

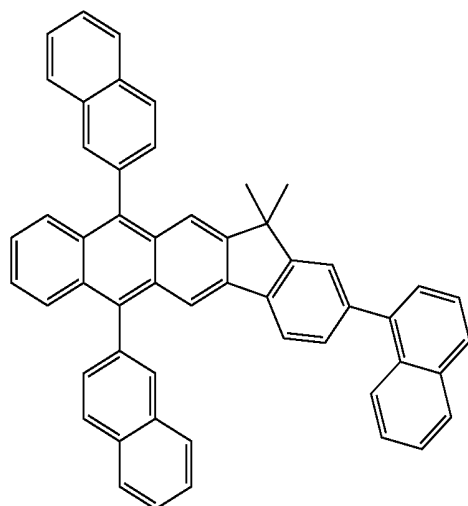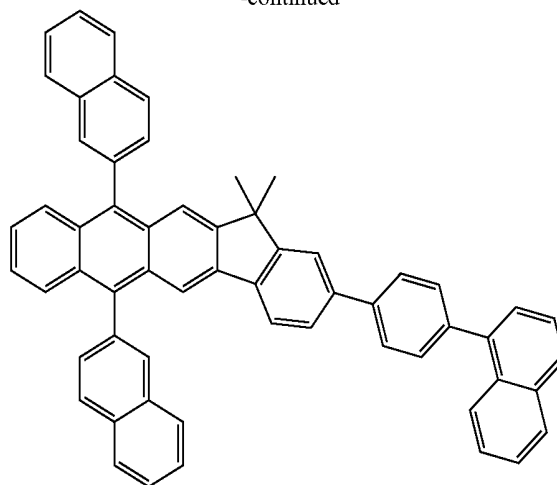


[0132] When the organic light-emitting device is a full color organic light-emitting device, the emission layer may be patterned into a red emission layer, a green emission layer, and a blue emission layer.

[0133] Also, at least one of the red emission layer, the green emission layer, and the blue emission layer may include the following dopants (ppy=phenylpyridine)


[0134] For example, compounds illustrated below may be used as a blue dopant, but the blue dopant is not limited thereto.

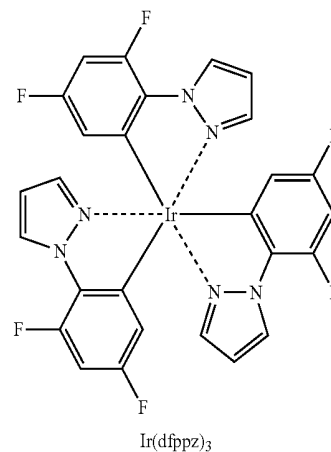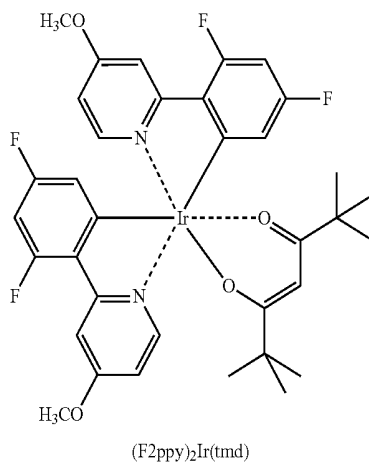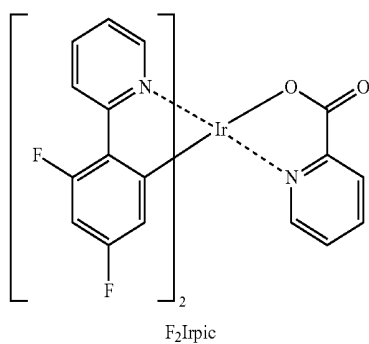


-continued

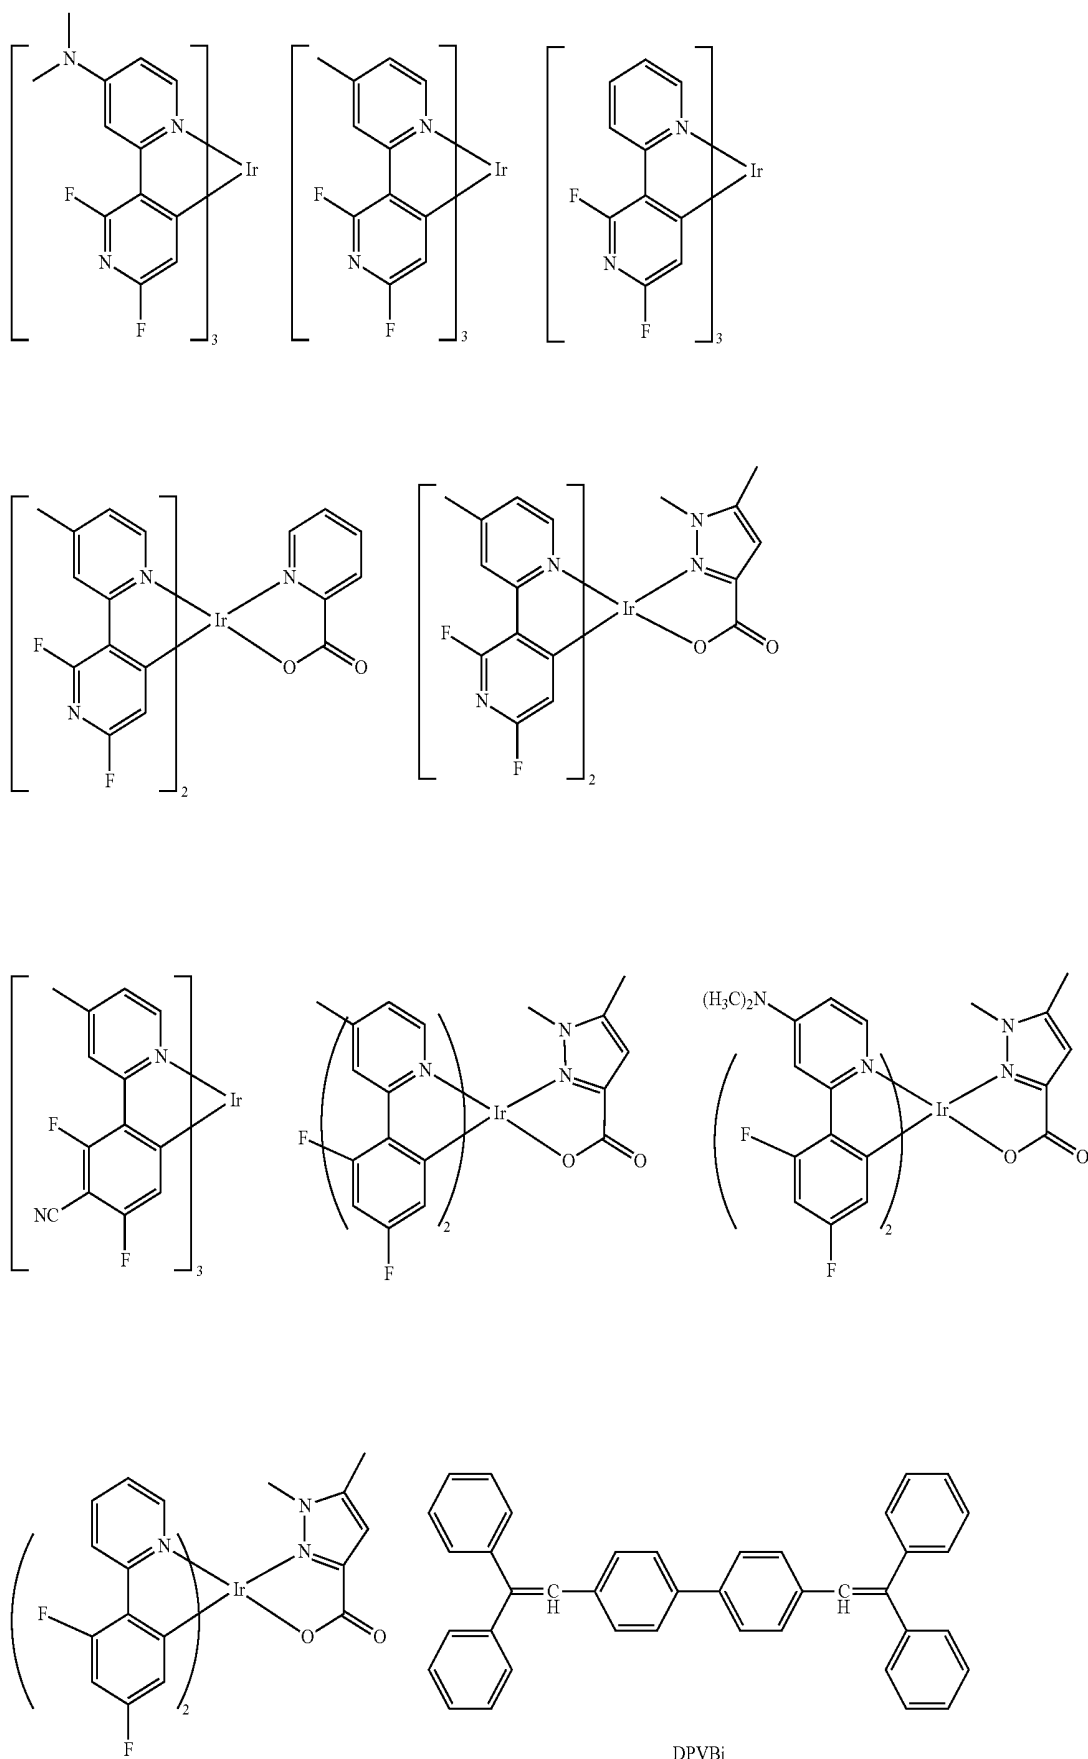

-continued

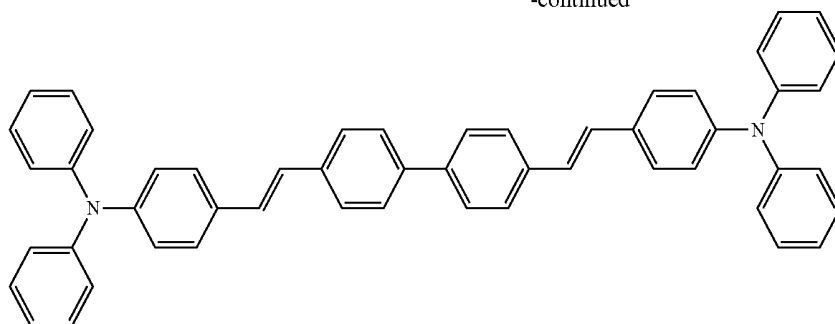


DPAVBi






TBPe







[0135] For example, compounds illustrated below may be used as a red dopant, but the red dopant is not limited thereto.

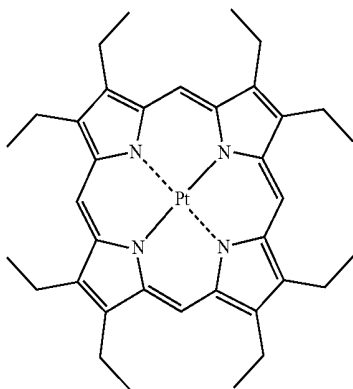


PtOEP

-continued

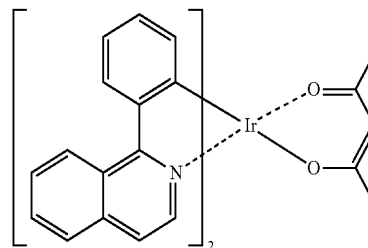Btp₂Ir(acac)Ir(piq)₃

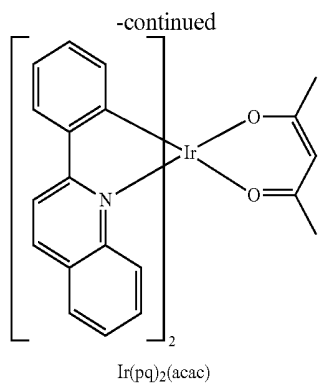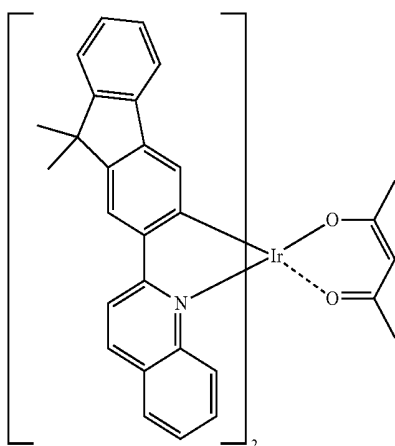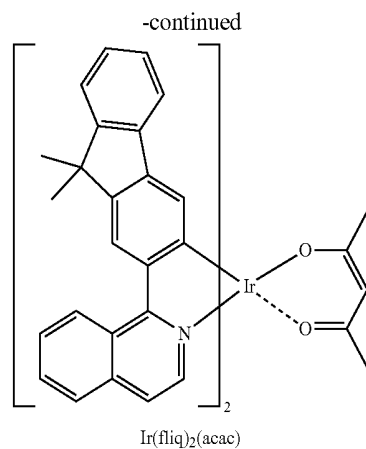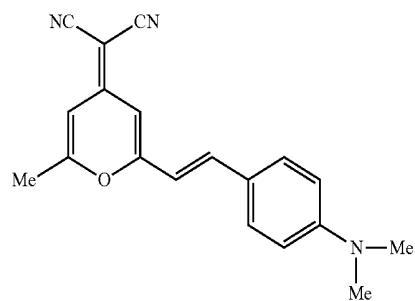
 $\text{Ir}(\text{pq})_2(\text{acac})$  $\text{Ir}(\text{2-phq})_3$  $\text{Ir}(\text{BT})_2(\text{acac})$  $\text{Ir}(\text{flq})_2(\text{acac})$  $\text{Ir}(\text{fliq})_2(\text{acac})$ 



DCM

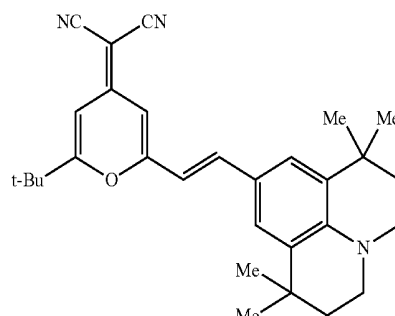










DCJTb

[0136] For example, compounds illustrated below may be used as a green dopant, but the green dopant is not limited thereto.





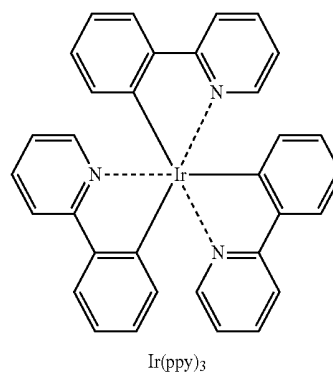
 $\text{Ir}(\text{ppy})_3$

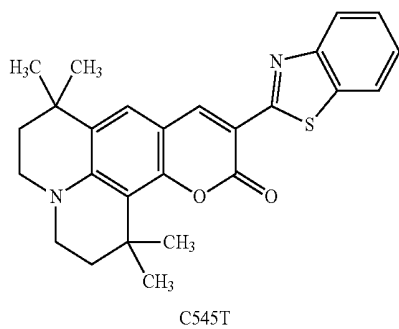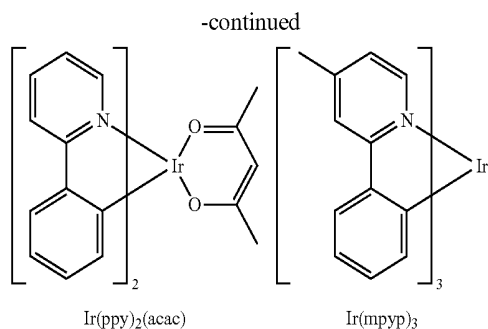






[0137] Also, the dopant available for use in the emission layer may be a complex described below, but is not limited thereto:

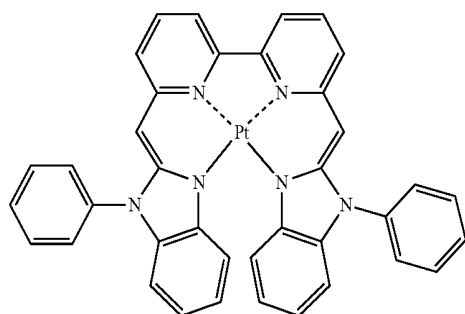






-continued

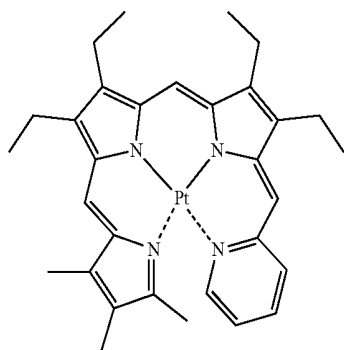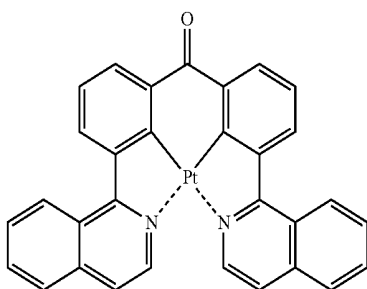

-continued

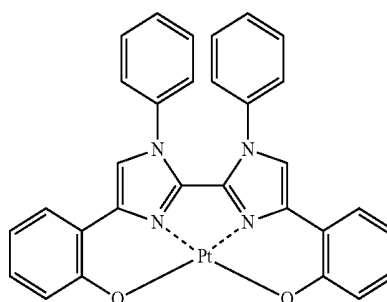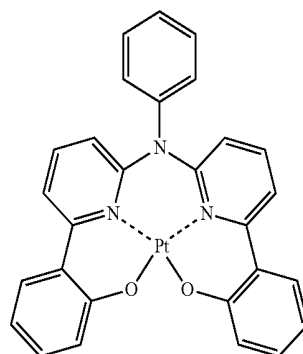


-continued

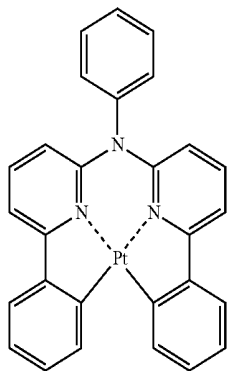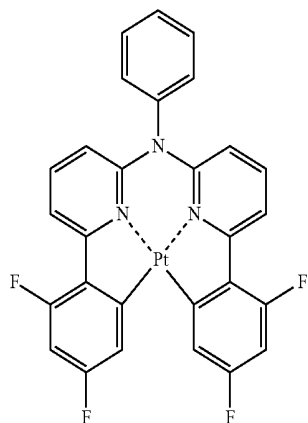


-continued

D20




D25

D21

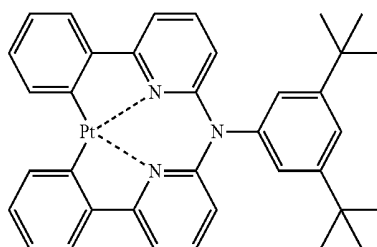


D26

D22




D27

D23




D28

D24

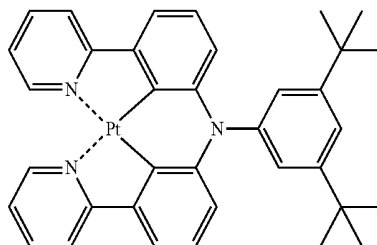


D29

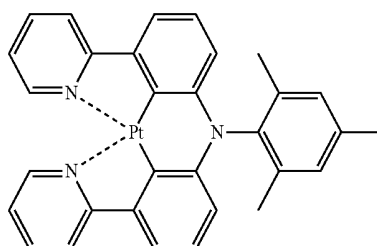


D30


-continued

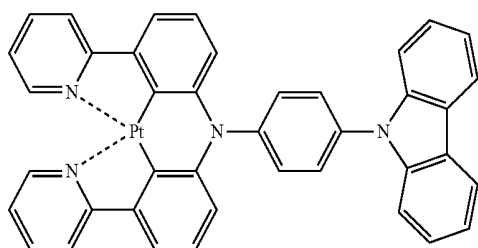


D31

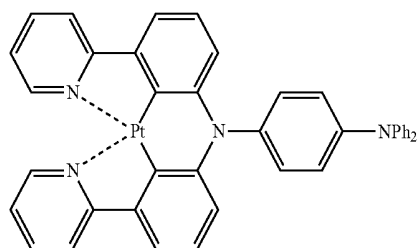


D32




D33



D34




D35




D36


-continued

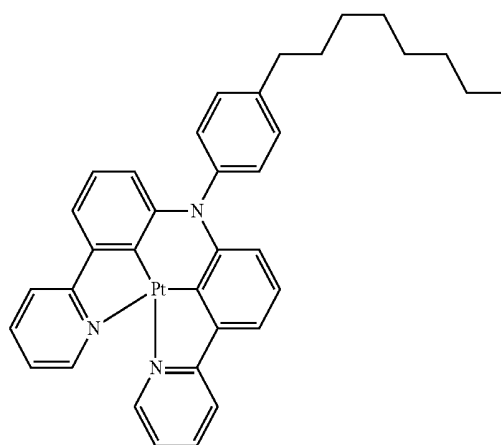


D37




D38



D39

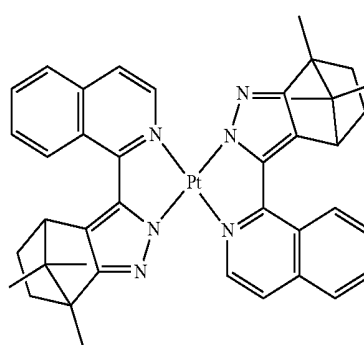


D40

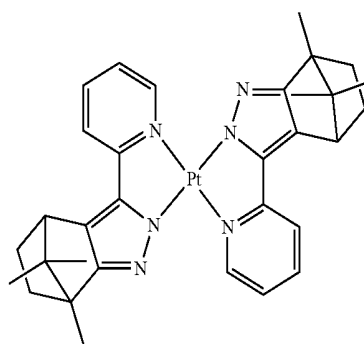


D41

-continued

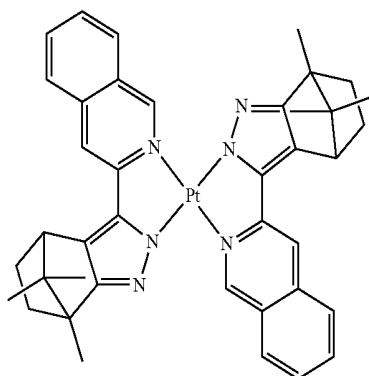

D42



-continued



D47



D48

D43





D49

D44

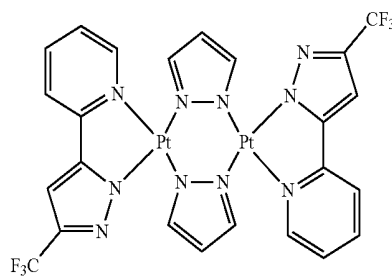



D50





D45

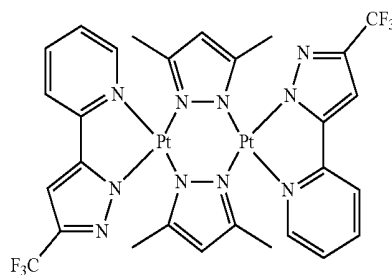

[0138] Also, the dopant available for use in the emission layer may be an Os-complex described below, but is not limited thereto:

D46

Os(fppz)₂(CO)₂

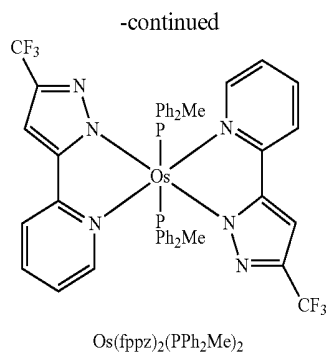



[0139] When the emission layer includes a host and a dopant, an amount of the dopant may be in a range of about 0.01 to about 15 parts by weight based on 100 parts by weight of the host, but is not limited thereto.

[0140] In some embodiments, a thickness of the emission layer may be in a range of about 100 Å to about 1,000 Å, for example, about 200 Å to about 600 Å. When the thickness of


the emission layer is within this range, excellent light-emission characteristics may be obtained without a substantial increase in driving voltage.

[0141] Next, an electron transport layer (ETL) is formed on the emission layer by using various methods, for example, by vacuum deposition, spin coating, casting, or the like. When the electron transport layer is formed using vacuum deposition or spin coating, the deposition and coating conditions may be similar to those for the formation of the hole injection layer, though the conditions for deposition and coating may vary according to the material that is used to form the electron transport layer.

[0142] A material for forming the electron transport layer may stably transport electrons injected from an electron injection electrode (cathode), and may be a known electron transportation material. Examples of known electron transport materials are a quinoline derivative, such as tris(8-quinolinolate)aluminum (Alq3), TAZ, Balq, beryllium bis(benzoquinolin-10-olate) (Bebq2), ADN, Compound 201, and Compound 202, but are not limited thereto.

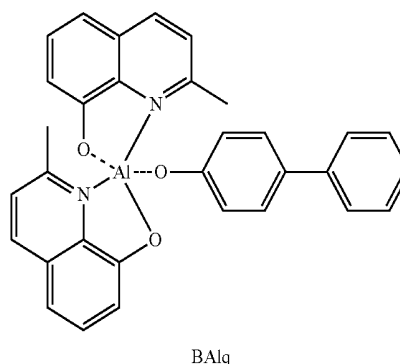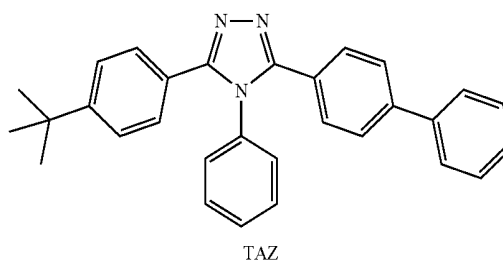

Compound 201

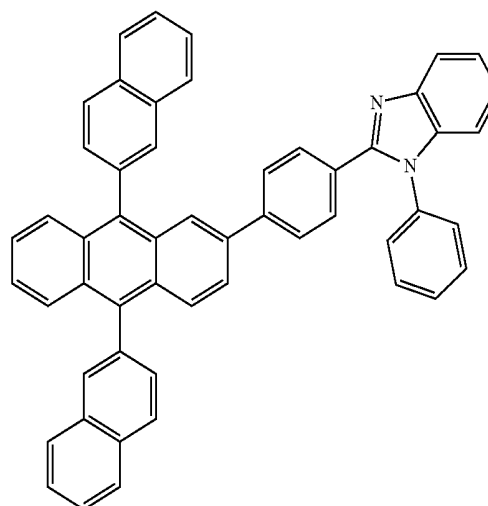

the hole blocking layer is within these ranges, the hole blocking layer may have excellent hole blocking characteristics without a substantial increase in driving voltage.

[0153] An organic light-emitting device according to an embodiment may be used in various flat panel display apparatuses, such as a passive matrix organic light-emitting display apparatus or an active matrix organic light-emitting display apparatus. In particular, when the organic light-emitting device is included in an active matrix organic light-emitting display apparatus, a first electrode disposed on a substrate acts as a pixel and may be electrically connected to a source electrode or a drain electrode of a thin film transistor. In addition, the organic light-emitting device may be included in a flat panel display apparatus that emits light in opposite directions.

[0154] Also, an organic layer according to an embodiment may be formed by depositing the compound according to an embodiment of the present invention, or may be formed by using a wet method in which the compound according to an embodiment of the present invention is prepared in the form of solution and then the solution of the compound is used for coating.


[0155] Hereinafter, an organic light-emitting device according to an embodiment of the present invention is described in detail with reference to Synthesis Example and Examples. However, the organic light-emitting device is not limited thereto.

EXAMPLE

Synthesis Example 1

Synthesis of S-1, 2, 3, 5, and 12

[0156]

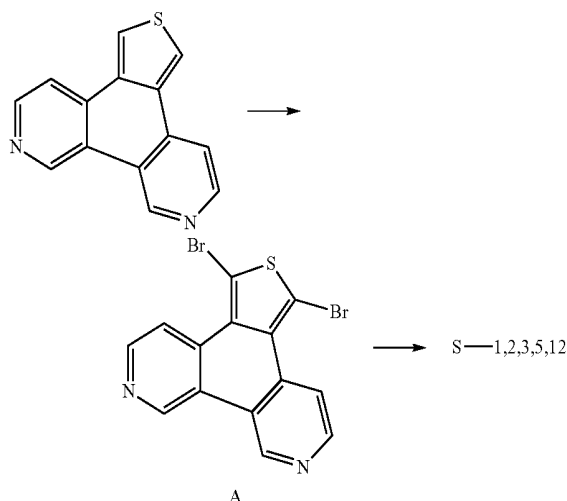

Synthesis of Intermediate A

[0157] 50 g (1 eq, 0.211 mol) of thieno[3,4-f][2,9]phenanthroline was placed in a reaction vessel, and then, dissolved with 500 mL of CBr_4 . A reactor was cooled by 0°C ., and then, 33.7 g (1.1 eq, 0.23 mol) of bromine (Br_2) was slowly added thereto for 1 hour and then stirred at room temperature. After 3 hours, the reactor was cooled by a temperature of 0°C . and

then, 33.7 g (1.1 eq, 0.23 mol) of bromine (Br_2) was slowly added thereto for 1 hour, and then, stirred at room temperature. Upon completion of the reaction a NH_2SO_4 saturated solution was added to the reaction vessel, followed by stirring to remove the remaining bromine. The layers were separated using a separatory funnel to obtain the organic layer, and then, hexane was added to the organic layer to cause the product to precipitate and recrystallization was performed on the obtained product to obtain Intermediate A.

[0158] HRMS for $\text{C}_{14}\text{H}_6\text{Br}_2\text{N}_2\text{S}$ $[\text{M}]^+$: calcd 394.08. found 393.

Synthesis of Compounds S-1 to 12

Synthesis of S-1

[0159] 10 g (1 eq, 0.025 mol) of Intermediate A and 6.4 g (2.2 eq, 0.0525 mol) of phenylboronic acid were placed in a reaction vessel and dissolved with 400 mL of toluene. 0.612 g (0.02 eq, 0.0005 mmol) of $\text{Pd}(\text{PPh}_3)_4$, and 50 mL of K_2CO_3 2 M solution were separately added thereto, and then, the mixture was stirred for 12 hours while heating. When the reaction stopped, the reaction solution was filtered through Celite, and then, subjected to column chromatography to obtain Compound S-1 in an amount of 6.97 g (yield=71.8%).

[0160] Elemental Analysis for $\text{C}_{26}\text{H}_{16}\text{N}_2\text{S}$: calcd: C, 80.38; H, 4.15; N, 7.21; S, 8.25

[0161] HRMS for $\text{C}_{26}\text{H}_{16}\text{N}_2\text{S}$ $[\text{M}]^+$: calcd 388.48. found 387

Synthesis of S-2

[0162] 9.2 g (yield=75.6%) of S-2 was prepared in the same manner as in Synthesis of S-1, except that a naphthalen-2-ylboronic acid was used instead of a phenylboronic acid.

[0163] Elemental Analysis for $\text{C}_{34}\text{H}_{20}\text{N}_2\text{S}$: calcd: C, 83.58; H, 4.13; N, 5.73; S, 6.56

[0164] HRMS for $\text{C}_{34}\text{H}_{20}\text{N}_2\text{S}$ $[\text{M}]^+$: calcd 488.6. found 467

Synthesis of S-3

[0165] 10 g (1 eq, 0.025 mol) of Intermediate A and 8.7 g (2.2 eq, 0.0525 mol) of 9H-carbazole were separately placed in a reaction vessel and then dissolved with 400 mL of toluene. 0.42 g (0.03 eq, 0.0005 m mol) of $\text{Pd}_2(\text{dba})_3$, 2.74 g (1.1 eq, 0.0196 mol) of $\text{Na}(\text{t-bu})\text{O}$, and 0.84 g (0.06 ea, 0.001 m mol) of $\text{P}(\text{t-Bu})_3$ were separately added thereto, and additionally, 100 mL of toluene was added thereto, followed by stirring for 12 hours while heating. When the reaction stopped, the reaction solution was filtered through celite, and then subjected to column chromatography to obtain 11.2 g (yield=79.1%) of Compound S-3.

[0166] Elemental Analysis for $\text{C}_{38}\text{H}_{22}\text{N}_4\text{S}$: calcd: C, 80.54; H, 3.91; N, 9.89; S, 5.66

[0167] HRMS for $\text{C}_{38}\text{H}_{22}\text{N}_4\text{S}$ $[\text{M}]^+$: calcd 566.67. found 565

Synthesis of S-5

[0168] 9.2 g (yield=77.9%) of S-5 was prepared in the same manner as in Synthesis of S-1, except that a dibenzo[b,d]thiophen-4-ylboronic acid was used instead of a phenylboronic acid.

[0169] Elemental Analysis for $\text{C}_{38}\text{H}_{20}\text{N}_2\text{S}_3$: calcd: C, 75.97; H, 3.36; N, 4.66; S, 16.01

[0170] HRMS for C₃₈H₂₀N₂S₃ [M]⁺: calcd 600.77. found 599

Synthesis of S-12

[0171] 9.2 g (yield=77.9%) of S-12 was prepared in the same manner as in Synthesis of S-1, except that 2-(trichlorostannyl)pyridine was used instead of a phenylboronic acid.


[0172] Elemental Analysis for C₂₄H₁₄N₄S: calcd: C, 73.82; H, 3.61; N, 14.35; S, 8.21

[0173] HRMS for C₂₄H₁₄N₄S [M]⁺: calcd 390.46. found 389

Synthesis Example 2

Synthesis of S-18, 20, 25, 29, and 31

[0174]

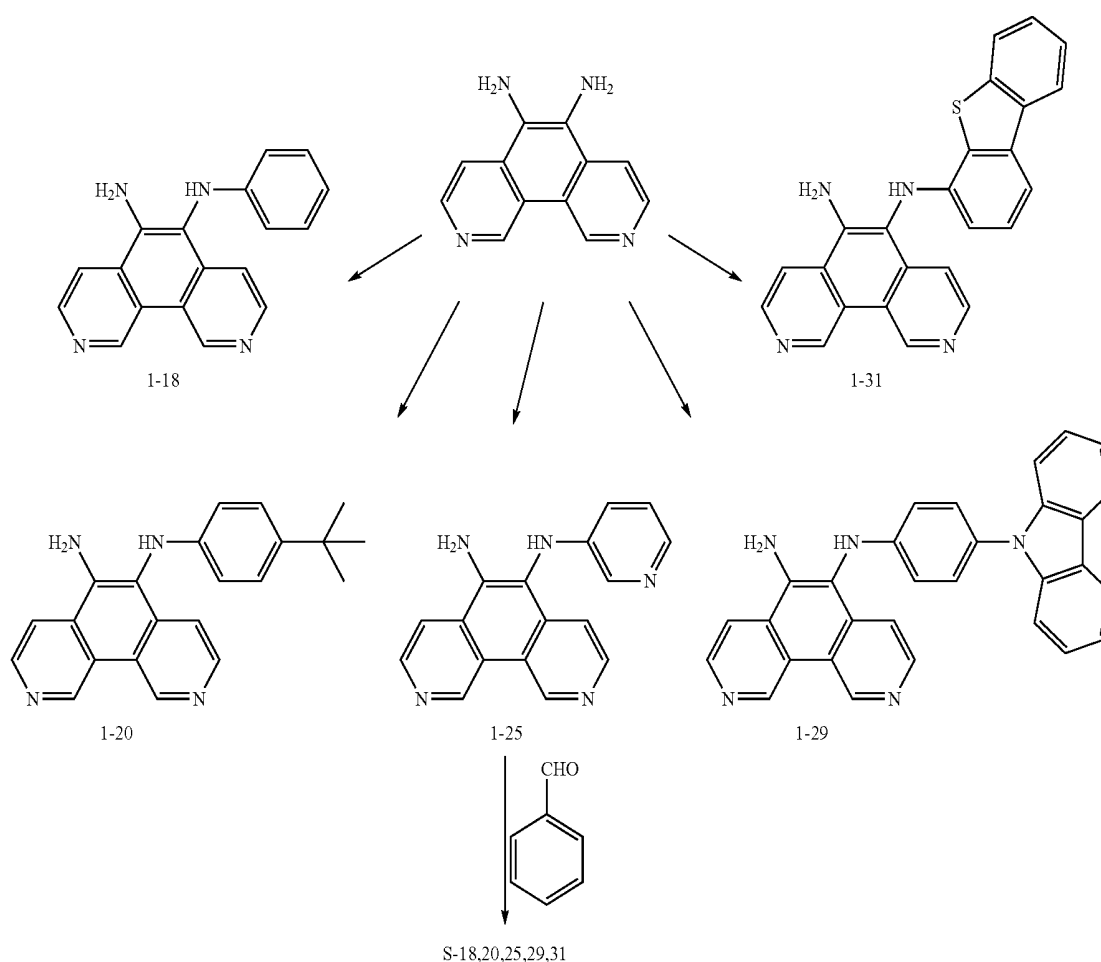

Synthesis of 1-18

[0175] 10 g (1 eq, 0.047 mol) of Intermediate 2,9-phenanthroline-5,6-diamine and 8.1 g (1.1 eq, 0.0517 mol) of bromobenzene were separately placed in a reaction vessel and then dissolved with 300 mL of toluene. 0.27 g (0.03 eq, 0.0001 mmol) of Pd₂(dba)₃, 3.74 g (1.1 eq, 0.0517 mol) of Na(t-bu)O, and 0.84 g (0.06 eq, 0.002 mmol) of P(t-Bu)₃ were separately added thereto, and additionally, 100 mL of toluene was added thereto, followed by stirring for 12 hours while

heating. Upon completion of the reaction, the reaction solution was filtered through celite, and then subjected to column chromatography to obtain 11.16 g (yield=83%) of Intermediate 1-18.

[0176] Elemental Analysis for C₁₈H₁₄N₄: calcd: C, 75.50; H, 4.93; N, 19.57

[0177] HRMS for C₁₈H₁₄N₄ [M]⁺: calcd 286.33. found 285

Synthesis of 1-20

[0178] 12.7 g (yield=82.9%) of 1-20 was prepared in the same manner as in Synthesis of 1-18, except that 1-bromo-4-tert-butylbenzene was used instead of bromobenzene.

[0179] Elemental Analysis for C₂₂H₂₂N₄: calcd: C, 77.16; H, 6.48; N, 16.36

[0180] HRMS for C₂₂H₂₂N₄ [M]⁺: calcd 342.44. found 341

Synthesis of 1-25

[0181] 10.1 g (yield=77.5%) of 1-25 was prepared in the same manner as in Synthesis of 1-18, except that 3-bromopyridine was used instead of bromobenzene.

[0182] Elemental Analysis for C₁₇H₁₃N₅: calcd: C, 71.06; H, 4.56; N, 24.37

[0183] HRMS for C₁₇H₁₃N₅ [M]⁺: calcd 287.32. found 286

Synthesis of 1-29

[0184] 10.5 g (yield=72.5%) of 1-29 was prepared in the same manner as in Synthesis of 1-18, except that 9-(4-bromophenyl)-9H-carbazole was used instead of boromobenzene.

[0185] Elemental Analysis for C₃₀H₂₁N₅: calcd: C, 67.10; H, 3.75; Br, 24.80; N, 4.35

[0186] HRMS for C₃₀H₂₁N₅ [M]⁺: calcd 451.52. found 450

Synthesis of 1-31

[0187] 10.5 g (yield=72.5%) of 1-31 was prepared in the same manner as in Synthesis of 1-18, except that 4-bromodibenzo[b,d]thiophene was used instead of boromobenzene.

[0188] Elemental Analysis for C₂₄H₁₆N₄S: calcd: C, 73.45; H, 4.11; N, 14.28; S, 8.17

[0189] HRMS for C₂₄H₁₆N₄S [M]⁺: calcd 392.48. found 391

Synthesis of S-18

[0190] 11 g (1 eq, 0.0384 mol) of 1-18 and 4.48 g (1.1 eq, 0.0422 mol) of benzaldehyde were dissolved in a mixed solution including 50 mL of an acetic acid, and 200 mL (1:4) of toluene, and then, the resultant mixture was stirred for 3 days while refluxing. A toluene layer was extracted and then washed with water, and then, dried by using magnesiumsulfate anhydrous, and allowed to pass through a silica gel layer, and a solvent was removed therefrom to obtain a solid compound. The solid compound was subjected to column chromatography to obtain 6.8 g (yield 47.8%) of S-18, which was a final product.

[0191] Elemental Analysis for C₂₅H₁₆N₄: calcd: C, 80.63; H, 4.33; N, 15.04

[0192] HRMS for C₂₅H₁₆N₄ [M]⁺: calcd 372.42. found 371

Synthesis of S-20

[0193] 8.4 g (yield=52.1%) of S-20 was prepared in the same manner as in Synthesis of S1-18, except that Intermediate 1-20 was used instead of Intermediate 1-18.

[0194] Elemental Analysis for C₂₉H₂₄N₄: calcd: C, 81.28; H, 5.65; N, 13.07

[0195] HRMS for C₂₉H₂₄N₄ [M]⁺: calcd 428.53. found 427

Synthesis of S-25

[0196] 7.2 g (yield=49.7%) of S-25 was prepared in the same manner as in Synthesis of S1-18, except that Intermediate 1-25 was used instead of Intermediate 1-18.

[0197] Elemental Analysis for C₂₄H₁₅N₅: calcd: C, 77.20; H, 4.05; N, 18.76

[0198] HRMS for C₂₄H₁₅N₅ [M]⁺: calcd 373.41. found 372

Synthesis of S-29

[0199] 6.7 g (yield=41.5%) of S-29 was prepared in the same manner as in Synthesis of S1-18, except that Intermediate 1-29 was used instead of Intermediate 1-18.

[0200] Elemental Analysis for C₃₇H₂₃N₅: calcd: C, 82.66; H, 4.31; N, 13.03

[0201] HRMS for C₃₇H₂₃N₅ [M]⁺: calcd 537.61. found 536

Synthesis of S-31

[0202] 6.2 g (yield=43.6%) of S-31 was prepared in the same manner as in Synthesis of S1-18, except that Intermediate 1-31 was used instead of Intermediate 1-18.

[0203] Elemental Analysis for C₃₁H₁₈N₄S: calcd: C, 77.80; H, 3.79; N, 11.71; S, 6.70

[0204] HRMS for C₃₁H₁₈N₄S [M]⁺: calcd 478.57. found 477

Synthesis of S-33


[0205] 10 g (1 eq, 0.016 mol) of 1,3,10,12-tetrabromobenzo[h]dithieno[3,4-c:3',4'-f]isoquinoline and 10.1 g (5 eq, 0.0823 mol) of a phenylboronic acid were placed in a reaction vessel, and then, dissolved with 400 mL of toluene. 0.369 g (0.02 eq, 0.0003 mmol) of Pd(PPh₃)₄, and 60 ml of K₂CO₃ 2 M solution were separately added thereto, and then, the mixture was stirred for 24 hours while heating. When the reaction stopped, the reaction solution was filtered through Celite, and then, subjected to column chromatography to obtain Compound S-33 in an amount of 3.54 g (yield=37.2%).

[0206] Elemental Analysis for C₄₁H₂₅NS₂: calcd: C, 82.66; H, 4.23; N, 2.35; S, 10.76


[0207] HRMS for C₄₁H₂₅NS₂ [M]⁺: calcd 595.77. found 594

Example 1

[0208] An anode was prepared by cutting a Corning 15 Ωcm² (500 Å) ITO glass substrate to a size of 50 mm×50 mm×0.5 mm, ultrasonically cleaning the glass substrate by using isopropyl alcohol and pure water for 10 minutes each, and then irradiating UV light for 10 minutes thereto and exposing to ozone to clean. Then, the anode was loaded onto a vacuum deposition apparatus. Then, 2-TNATA was vacuum deposited thereon to form a hole injection layer having a thickness of 600 Å, and then, 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPB), which is a known hole transport compound, was deposited on the hole injection layer to form a hole transport layer having a thickness of 300 Å.

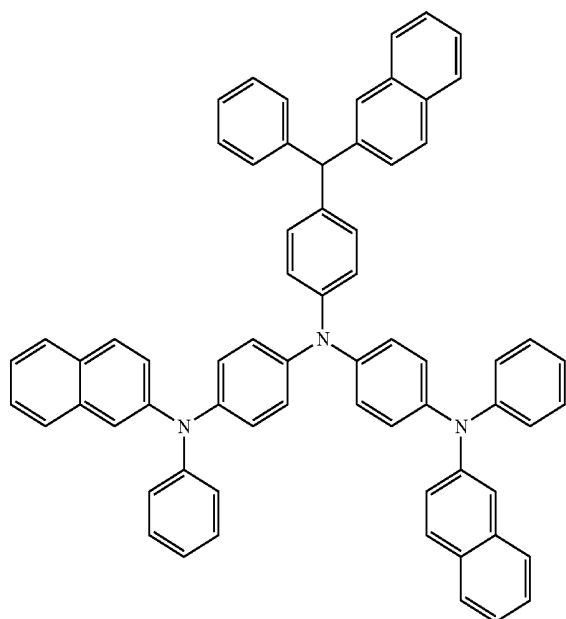

2-TNATA

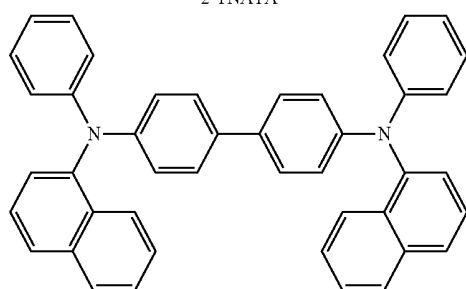

NPB

[0209] Ir(ppy)_3 [bis-(1-phenylisoquinolyl)iridium(III) acetylacetonate], which is a green phosphorescent dopant, and S-1 were co-deposited on the hole transport layer at a weight ratio of 15:85 to form an emission layer having a thickness of 300 Å. Then, Alq_3 was deposited on the emission layer to form an electron transport layer having a thickness of 300 Å, and then, Al was vacuum deposited to form an Al electrode having a thickness of 1200 Å (cathode), thereby completing manufacturing of a organic light-emitting device.

Example 2

[0210] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-2 was used instead of S-1.

Example 3

[0211] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-3 was used instead of S-1.

Example 4

[0212] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-5 was used instead of S-1.

Example 5

[0213] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-12 was used instead of S-1.

Example 6

[0214] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-18 was used instead of S-1.

Example 7

[0215] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-20 was used instead of S-1.

Example 8

[0216] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-25 was used instead of S-1.

Example 9

[0217] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-29 was used instead of S-1.

Example 10


[0218] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-31 was used instead of S-1.

Example 11

[0219] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, S-33 was used instead of S-1.

Comparative Example

[0220] An organic light-emitting device was manufactured in the same manner as in Example 1, except that in forming the emission layer, CBP, which is a known host material, was used instead of S-1, and bis(2-methyl-8-quinolino)(p-phenylphenolato)aluminum (III) (BAlq) was used to form a hole blocking layer.

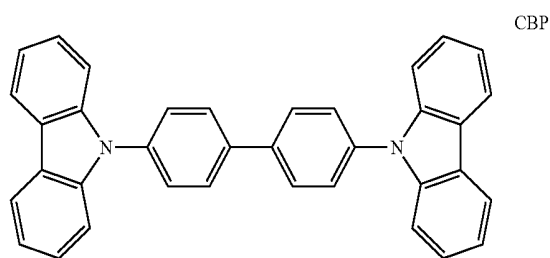

CBP

[0221] As described above, when compounds represented by Formula 1 according to embodiments of the present invention are used as a phosphorescent host, they all provide a smaller driving voltage than CBP, which is a known material, by 10% or more, and have high efficiency and excellent I-V-L characterizes. In particular, lifespan improvement character-

istics thereof improved: the organic light-emitting devices manufactured according to Examples 1 to 11 have a longer lifespan than that of Comparative Example 1 by 20% or more. Measurements and lifespans of the organic light-emitting devices manufactured according to Examples 1-11 are shown in Table 1 below.

TABLE 1

	Luminescent material	Voltage	Efficiency	T95 lifespan (hr @100 mA/cm ²)
Example 1	S-1	5.4	46.4	970
Example 2	S-2	6.1	49.0	943
Example 3	S-3	5.9	49.2	921
Example 4	S-5	6.2	42.0	937
Example 5	S-12	6.3	47.9	897
Example 6	S-18	5.7	48.8	911
Example 7	S-20	5.9	47.9	956
Example 8	S-25	6.7	47.7	923
Example 9	S-29	6.9	48.1	970
Example 10	S-31	5.6	48.0	921
Example 11	S-33	5.9	51.0	942
Comparative Example	CBP	7.1	38.4	789

[0222] As described above, it was confirmed that compounds represented by Formula 1 have better luminescent characteristics than those of a conventional material. Also, a device using an organic luminescent compound according to embodiments disclosed herein as a host material for luminescence has, even without use of a hole blocking layer in the structure thereof, excellent luminescent characteristics and a lower driving voltage, thereby inducing a higher power efficiency and more efficient consumption power.


[0223] Compounds represented by Formula 1 have excellent material stabilities and are suitable for use as a luminescent material. An organic light-emitting device manufactured using the compound has high efficiency, low voltage, high brightness, and a long lifespan.

[0224] It should be understood that the exemplary embodiments described therein should be considered in a descriptive sense only and not for purposes of limitation. Descriptions of features or aspects within each embodiment should typically be considered as available for other similar features or aspects in other embodiments.

[0225] While one or more embodiments of the present disclosure have been described with reference to the figures, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present embodiments as defined by the following claims.

What is claimed is:

1. A compound represented by Formula 1:



Formula 1

wherein in Formula 1,

A is a fused C₃ to C₈ aryl ring or a fused C₁ to C₈ heteroaryl ring;

E and X¹ are each independently CH or N (nitrogen);

R₁ to R₃ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroarylamino group, a C₂ to C₄₀ diheteroarylamino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group, or optionally R₁ and R₂ together with the atoms to which they are attached is a ring; and,

Ar₁ and Ar₂ are each independently a hydrogen, a deuterium, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroarylamino group, a C₂ to C₄₀ diheteroarylamino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group,

provided E and X¹ are not both CH.

2. The compound of claim 1, wherein:


A is a thiophene moiety or an imidazole moiety.

3. The compound of claim 1, wherein:

R₁ and R₂ together with the atoms to which they are attached is a ring; and the ring is a heteroaryl ring.

4. The compound of claim 1, wherein:

the compound represented by Formula 1 is a compound represented by Formula 2:



Formula 2


in Formula 2,

X is S (sulfur) or NR₁₀₀, and

R₄, R₅, and R₁₀₀ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroaryl amino group, a C₂ to C₄₀ diheteroaryl amino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group.

5. The compound of claim 1, wherein:

the compound represented by Formula 1 is a compound represented by Formula 3:



Formula 3


in Formula 3,

X and Y are each independently S (sulfur), N (nitrogen), or NR₁₀₀, and

R₄, and R₁₀₀ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroaryl amino group, a C₂ to C₄₀ diheteroaryl amino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group.

6. The compound of claim 1, wherein

the compound represented by Formula 1 is a compound represented by Formula 4:




Formula 4

in Formula 4,

X and Y are each independently S (sulfur) or NR₁₀₀, and R₄ to R₇, and R₁₀₀ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or unsubstituted C₁ to C₄₀ alkoxy group, a substituted or unsubstituted C₆ to C₄₀ aryloxy group, a C₁ to C₄₀ alkylamino group, a C₆ to C₄₀ arylamino group, a C₆ to C₄₀ diarylamino group, a C₁ to C₄₀ heteroaryl amino group, a C₂ to C₄₀ diheteroaryl amino group, a C₆ to C₄₀ arylalkyl group, a C₆ to C₄₀ heteroarylalkyl group, a substituted or unsubstituted C₃ to C₄₀ cycloalkyl group, a C₃ to C₄₀ heterocycloalkyl group, a C₃ to C₄₀ alkylsilyl group, a C₆ to C₄₀ arylsilyl group, or a C₁ to C₄₀ heteroarylsilyl group.

7. The compound of claim 1, wherein

the compound represented by Formula 1 is a compound represented by Formula 5:



Formula 5

in Formula 5,

X and Y are each independently S (sulfur), N (nitrogen), or NR₁₀₀, and

R₄, R₅, R₈, and R₁₀₀ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an amino group, a nitro group, a nitril group, a substituted or unsubstituted C₁ to C₄₀ alkyl group, a substituted or unsubstituted C₂ to C₄₀ alkenyl group, a substituted or unsubstituted C₂ to C₄₀ alkynyl group, a substituted or unsubstituted C₆ to C₄₀ aryl group, a substituted or unsubstituted C₁ to C₄₀ heteroaryl group, a substituted or


unsubstituted C_1 to C_{40} alkoxy group, a substituted or unsubstituted C_6 to C_{40} aryloxy group, a C_1 to C_{40} alkylamino group, a C_6 to C_{40} arylamino group, a C_6 to C_{40} diarylamino group, a C_1 to C_{40} heteroaryl amino group, a C_2 to C_{40} diheteroaryl amino group, a C_6 to C_{40} arylalkyl group, a C_6 to C_{40} heteroarylalkyl group, a substituted or unsubstituted C_3 to C_{40} cycloalkyl group, a C_3 to C_{40} heterocycloalkyl group, a C_3 to C_{40} alkylsilyl group, a C_6 to C_{40} arylsilyl group, or a C_1 to C_{40} heteroarylsilyl group.

8. The compound of claim 1, wherein:

Ar_2 and R_3 is a hydrogen or a deuterium.

9. The compound of claim 4, wherein:

R_4 and R_5 in Formula 2 are each independently one of Formulae 2a to 2e:

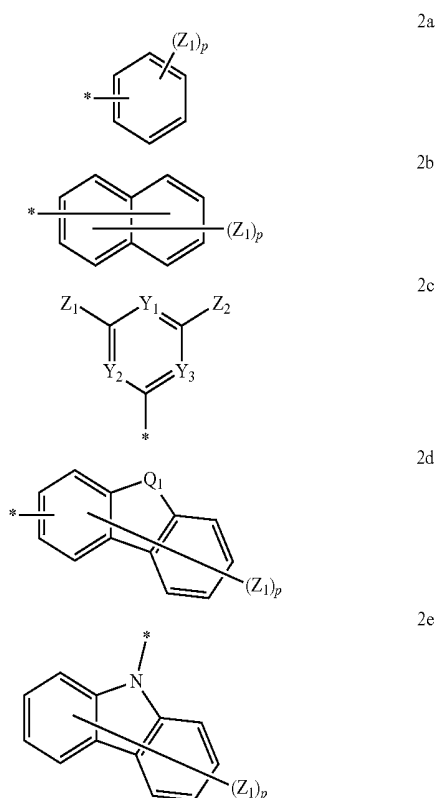

wherein in Formulae 2a to 2e,

Q_1 is S (sulfur), $CR_{51}R_{52}$, or NR_{53} ,

Y_1 to Y_3 are each independently CH or N (nitrogen),

Z_1 , Z_2 , R_{51} , R_{52} , and R_{53} are each independently a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

p is an integer of 1 to 8; and


* indicates an attachment position.

10. The compound of claim 4, wherein:

R_1 and R_2 in Formula 2 is a hydrogen or a deuterium.

11. The compound of claim 5, wherein:

R_4 in Formula 3 is represented by Formula 3a:



wherein in Formula 3a,


Z_1 is a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

p is an integer of 1 to 5; and

* indicates an attachment position.

12. The compound of claim 5, wherein:

R_{100} in Formula 3 is one of Formulae 4a to 4c:

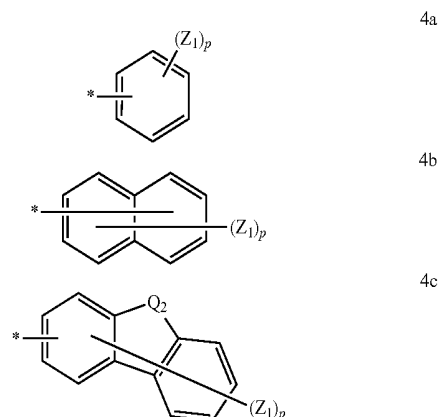

wherein in Formulae 4a to 4c,

Q_2 is S (sulfur), $CR_{51}R_{52}$, or NR_{53} ,

Z_1 , R_{51} , R_{52} , and R_{53} are each independently a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

p is an integer of 1 to 7; and


* indicates an attachment position.

13. The compound of claim 5, wherein:


R_1 and R_3 in Formula 3 is a hydrogen or a deuterium.

14. The compound of claim 6, wherein:


R_4 , R_5 , R_6 , and R_7 in Formula 4 are each independently one of Formulae 5a to 5c:



-continued



5b



5c

wherein in Formulae 5a to 5c,


Z_1 is a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

p is an integer of 1 to 8; and


* indicates an attachment position.

15. The compound of claim 7, wherein


R_4 , R_5 , R_8 , and R_{100} in Formula 5 are each independently one of Formulae 6a to 6c:



6a



6b



6c

wherein in Formulae 6a to 6c,


Z_1 is a hydrogen, a deuterium, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_6 to C_{20} aryl group, a substituted or unsubstituted C_1 to C_{20} heteroaryl group, a substituted or unsubstituted C_6 to C_{20} condensed polycyclic group, a halogen atom, a cyano group, a nitro group, a hydroxy group, or a carboxy group;

p is an integer of 1 to 7; and


* indicates an attachment position.

16. The compound of claim 1, wherein:


the compound of Formula 1 is any one of compounds below:




S-1

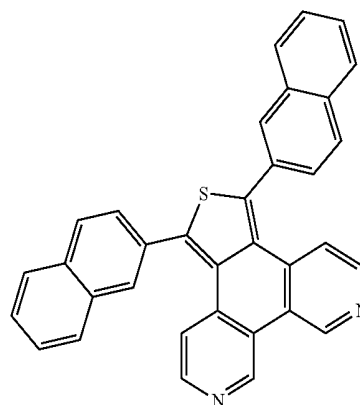

S-2

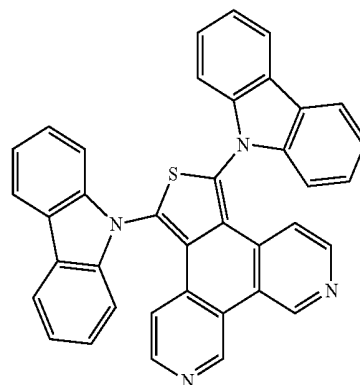


S-3

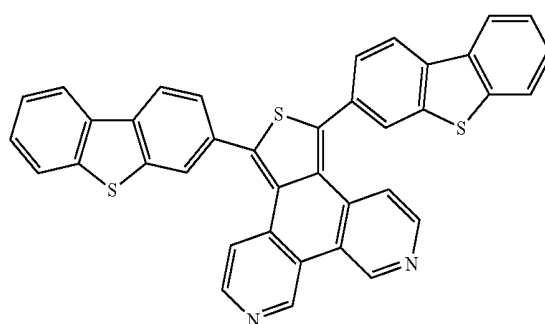


S-4

-continued

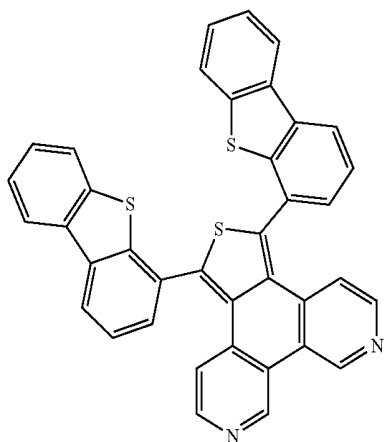


S-5


-continued

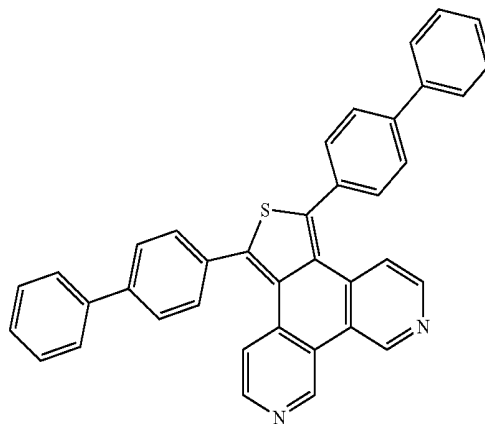


S-9

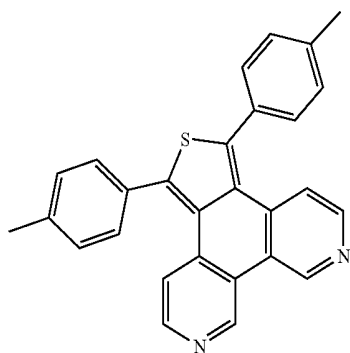


S-6

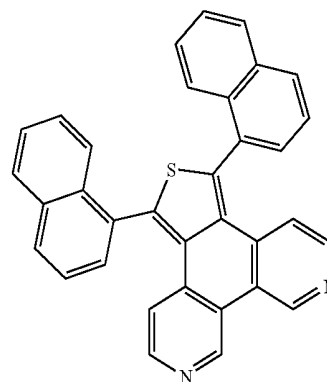


S-10

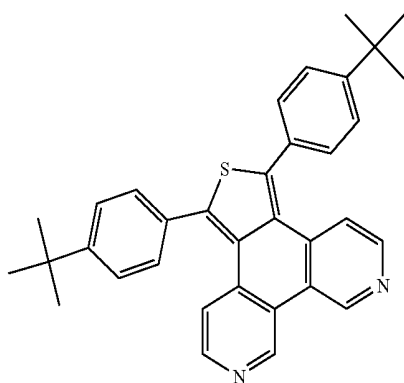


S-7

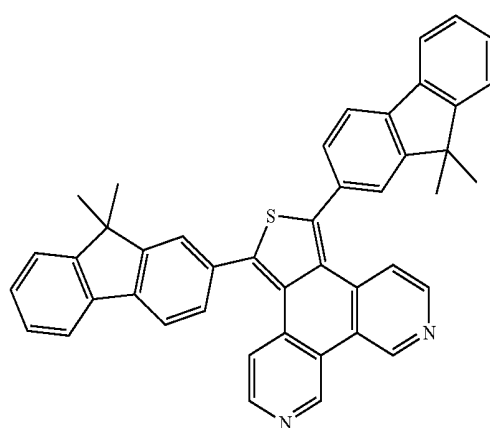

S-11

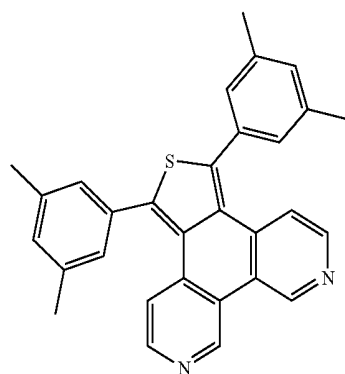


S-8



S-12


-continued

S-13

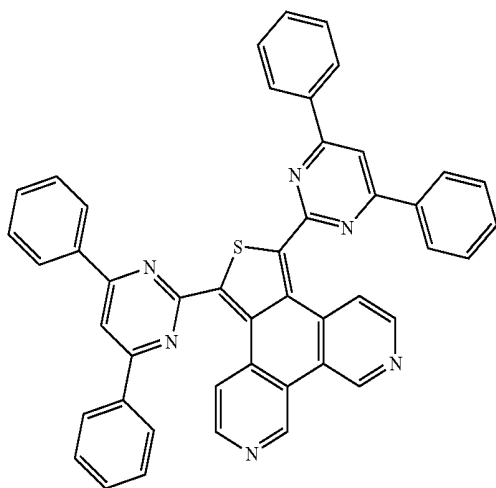


-continued


S-16




S-17

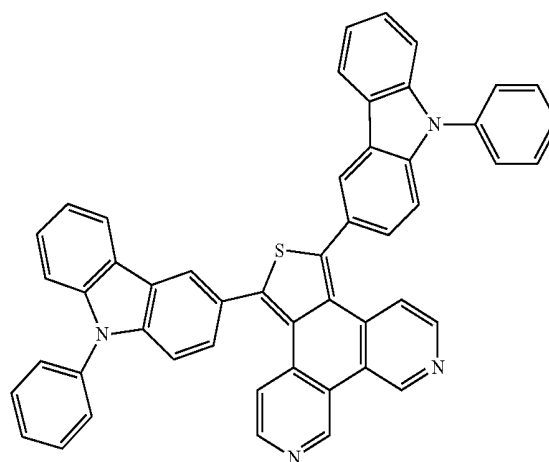


S-18




S-14

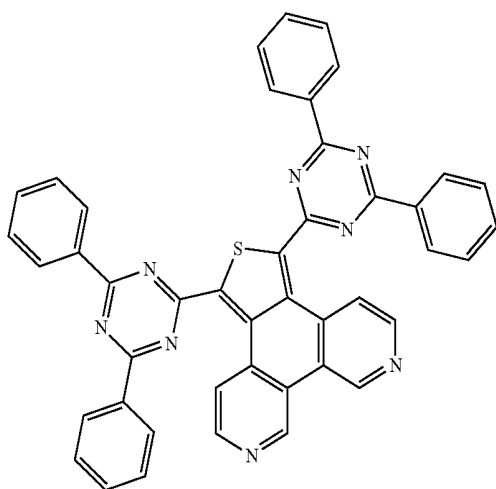


S-15

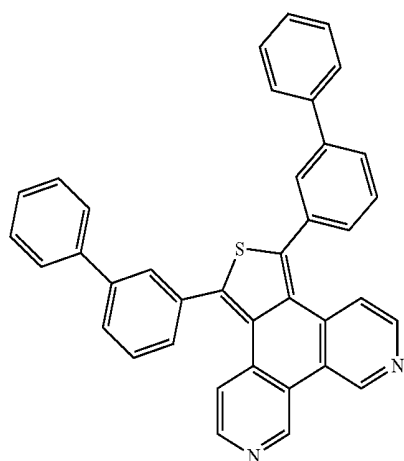

S-19




-continued

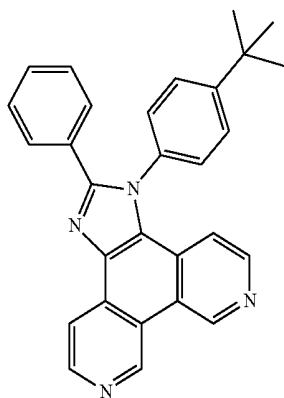


S-20


-continued




S-24




S-21




S-25




S-22

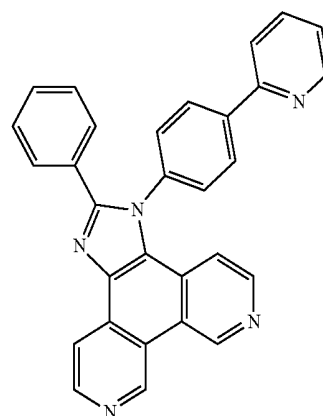

S-26

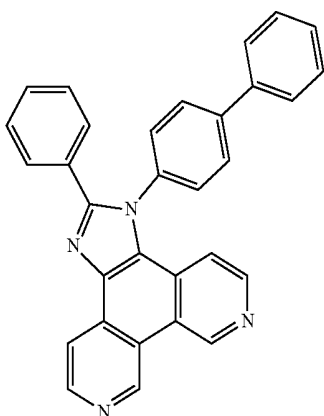


S-23




S-27

-continued

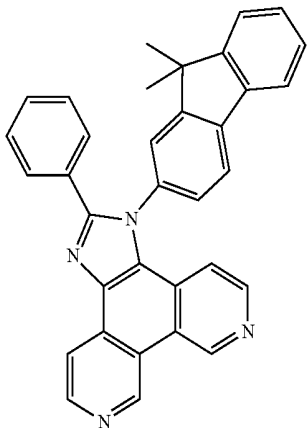


S-28


-continued




S-31

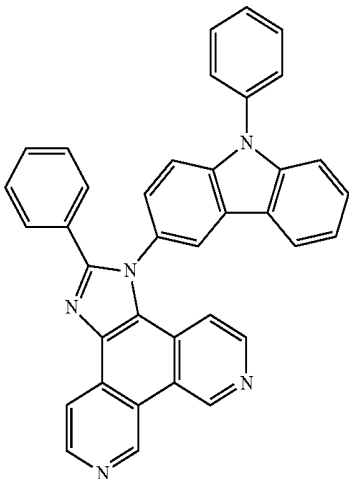


S-29

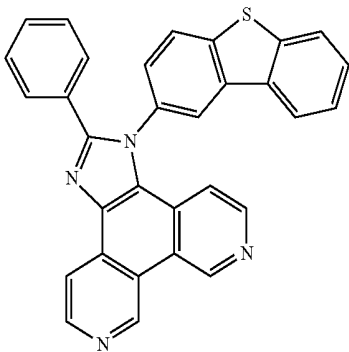


S-32

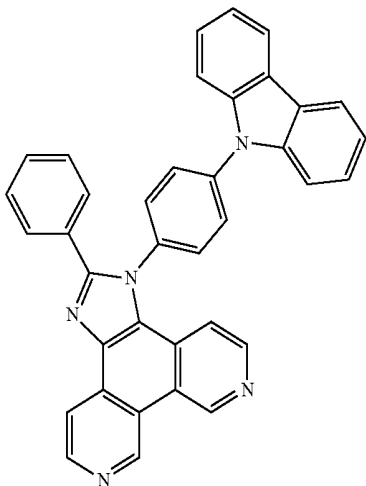

S-30

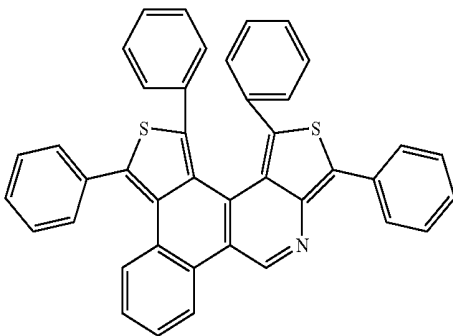


S-33

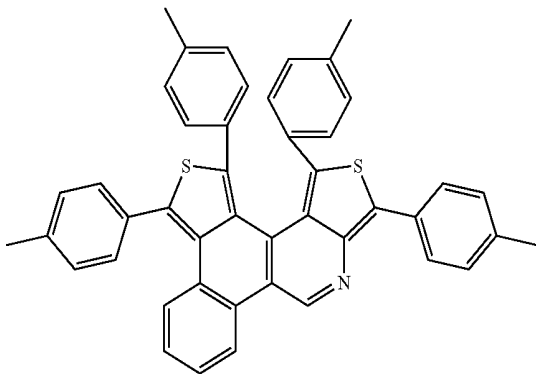


S-34

-continued


S-35

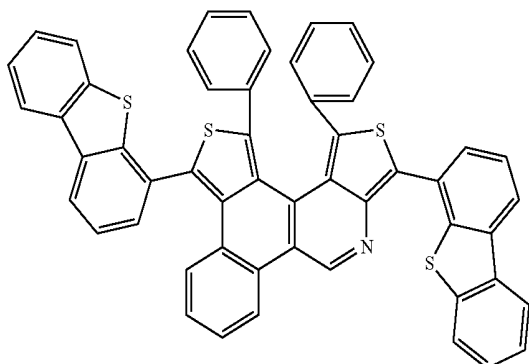


S-36

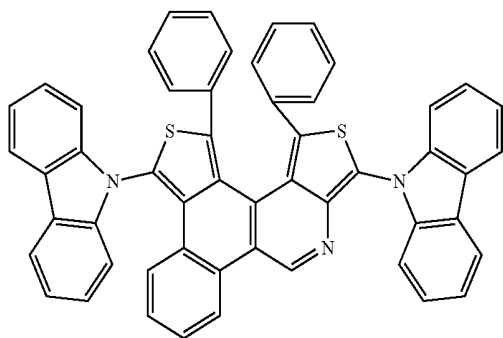

S-37

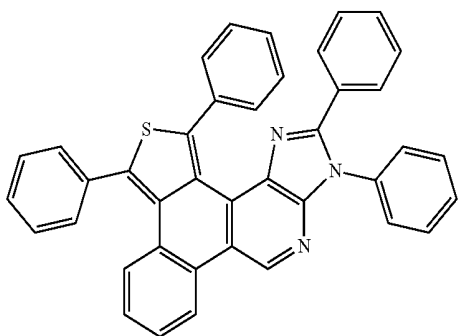


S-38

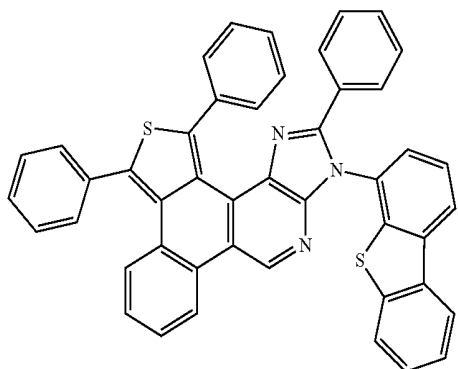


-continued


S-39

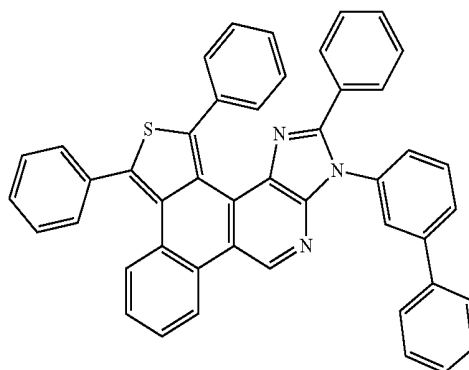


S-40

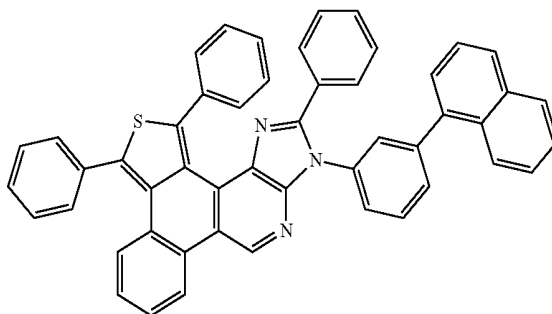

S-41

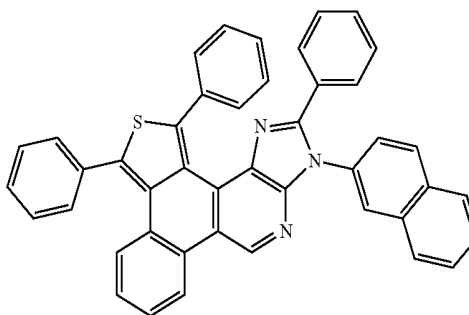

S-42

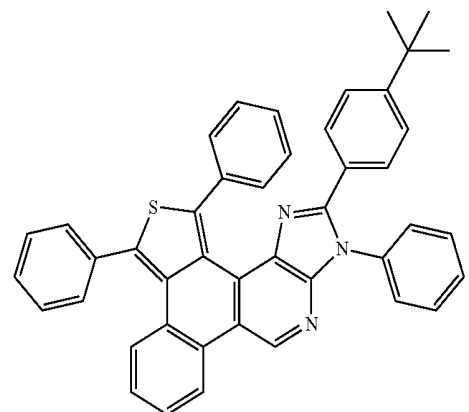

17. An organic light-emitting device comprising:
a first electrode;
a second electrode; and
an organic layer disposed between the first electrode and
the second electrode,
wherein the organic layer comprises the compound of
claim 1.

18. The organic light-emitting device of claim **17**, wherein the organic layer is an emission layer

19. A flat display apparatus comprising the organic light-emitting device of claim **17**, wherein the first electrode of the organic light-emitting device is electrically connected to a source electrode or a drain electrode of a thin film transistor.

* * * * *

专利名称(译)	包括其的化合物和有机发光装置		
公开(公告)号	US20150155497A1	公开(公告)日	2015-06-04
申请号	US14/221024	申请日	2014-03-20
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE JUNG SUB		
发明人	LEE, JUNG-SUB		
IPC分类号	H01L51/00		
CPC分类号	H01L51/0058 H01L51/0071 H01L51/5012 H01L51/0074 H01L51/0067 H01L51/0072 H01L51/0061 H01L51/0081 H01L51/0085 H01L51/0087 H01L51/0088 H01L51/5016		
优先权	1020130149498 2013-12-03 KR		
其他公开文献	US9666809		
外部链接	Espacenet USPTO		

摘要(译)

提供一种有机发光装置，包括第一电极，第二电极和设置在第一电极和第二电极之间的有机层。

SECOND ELECTRODE
EIL
ETL
EML
HTL
HIL
FIRST ELECTRODE