




US 20160000507A1

(19) **United States**(12) **Patent Application Publication**
Neuberger(10) **Pub. No.: US 2016/0000507 A1**(43) **Pub. Date: Jan. 7, 2016**(54) **ENCLOSED LASER MEDICAL
DEVICE/SYSTEM**(52) **U.S. CL.**
CPC **A61B 18/22** (2013.01); **A61B 2018/0091**
(2013.01)(71) Applicant: **BIOLITEC PHARMA MARKETING
LTD.**, Labuan, F. T. Labuan (MY)(72) Inventor: **Wolfgang Neuberger**, Dubai (AE)(21) Appl. No.: **14/767,548**(22) PCT Filed: **Feb. 13, 2013**(86) PCT No.: **PCT/US13/25915**

§ 371 (c)(1),

(2) Date: **Aug. 12, 2015****Publication Classification**(51) **Int. Cl.**
A61B 18/22 (2006.01)(57) **ABSTRACT**

A fiber optic medical device/system is presented, comprising laser source, connectible to optical fibers and enclosed to ensure sterility and safe operation. It is a single use system enclosed and sterilized, including laser source and, optical fiber attached in a sterile tube. Another embodiment is hermetically sealed laser unit with simple connection system to a properly shaped fiber optic. Joined hand piece and fiber can be directly inserted to treat target tissue. Laser handle is aseptically packaged. In other embodiments, fiber is proximally terminated in solid funnel-shaped end to provide unique directional keyed junction with laser unit. In another embodiment, unit includes fiber joined to it, where a laser module can be added away from the fiber end and laser module need not be sterilized, but entire unit is safe for medical use in sterile fields. Enclosure also serves as hand-piece for manipulating device. Another preferred embodiment has laser unit attached to a rigid delivery system for laparoscopic procedures.

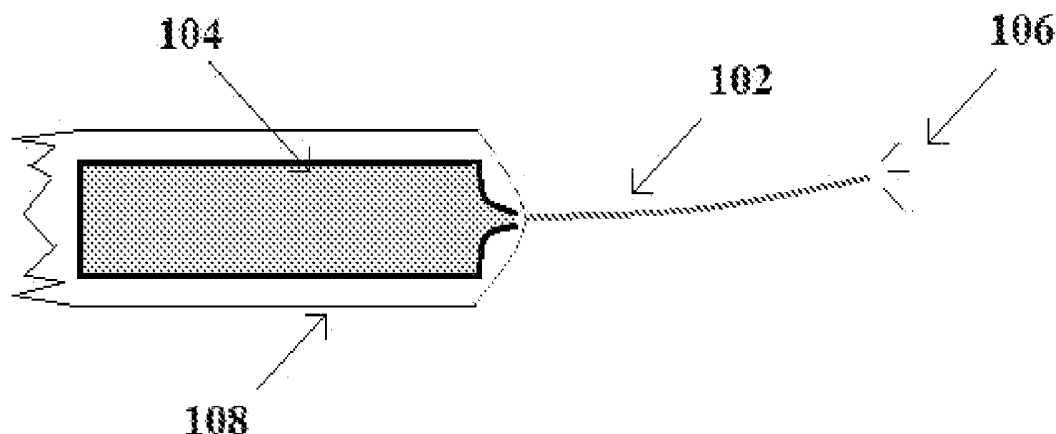

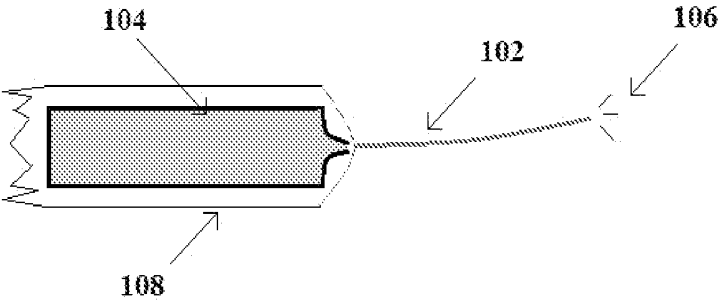


Fig. 1


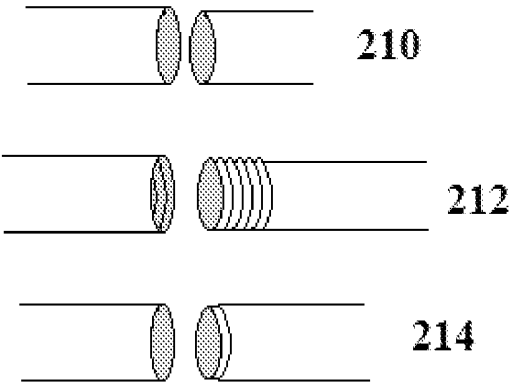


Fig. 2

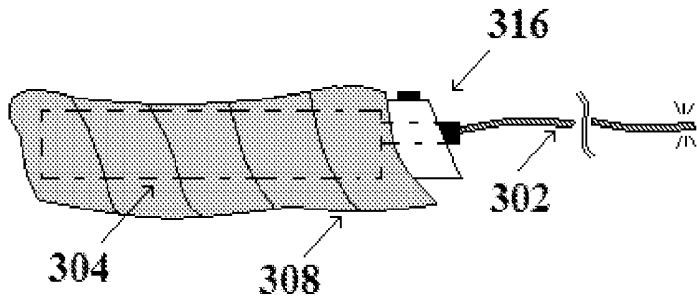

cabicabildo978

Fig. 3

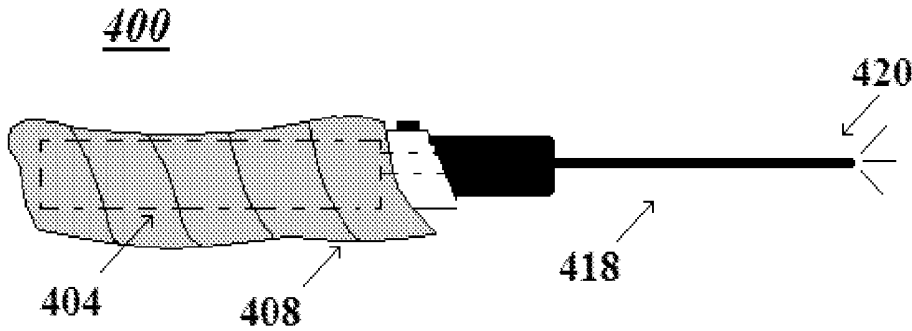


Fig. 4

ENCLOSED LASER MEDICAL DEVICE/SYSTEM

CROSS REFERENCE TO PRORITY APPLICATION

[0001] This patent application claims priority to PCT International Application No. PCT/US2013/025915, filed on Feb. 13, 2013, by Biolitec Pharma Marketing Ltd entitled, "ENCLOSED LASER MEDICAL DEVICE/SYSTEM" which is hereby expressly incorporated by reference in its entirety as part of the present disclosure.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the invention

[0003] The present invention relates to minimally invasive medical treatment systems and in particular, to medical treatments/systems using self-contained energy emitting devices and conveying means to provide safe tools in medical environments.

[0004] 2. Prior Art Disclosure Statement

[0005] Laser systems can operate as beneficial and effective medical instruments. They allow specific treatment to be administered with minimal invasiveness. Laser treatments are frequently preferred by those skilled in the art in different applications. There is an increasing number of medical applications involving the use of laser devices in a wide range of specialized disciplines such as angiology, proctology, otolaryngology, urology, gynecology and aesthetics. Worth specific mention are treatment of insufficient veins, benign hyperplastic prostate (BPH), hemorrhoids, ulcers, fistulas, calculi, and ear, nose and throat (ENT) disorders just to name a few.

[0006] Minimally invasive laser treatments have been improved due to new diode laser systems. Diode laser systems are greatly advantageous in comparison with other existing laser source technologies such as CO₂, Holmium:YAG, pulsed-dye, Nd:YAG or KTP laser sources, in that they provide higher output, at reduced dimensions and weight. They also have simpler and smaller air cooling systems. Moreover, being capable of integration with optical fibers, they have a high reliability and do not need alignment. In summary, they provide great efficiency and robustness.

[0007] Consequently there are also an increasing number of different scenarios in which laser devices are needed, ranging from the physician's office to high tech operating rooms. Moreover many single laser devices are unspecific enough so that one same device is optimal for more than one type of treatment. In many cases, the same laser device can be used in the operating room for aesthetic surgery; within a well-equipped vascular surgeon's office; or in a simpler otolaryngologist's office. However, when all of these scenarios exist in one healthcare center, there is at least one of these medical devices assigned to each treatment application, since their size, weight and complexity may not justify a logistics system to rotate one device among the different areas. Furthermore, the size of existing equipment requires a certain storage space that may not be available in every health unit in which it is used. Additionally, the number of cables involved in connecting equipment make using the device complex and uncomfortable and in some cases dangerous. Finally, in some cases, equipment belongs to physicians, not to the health care center where they work, and because of size and weight it is difficult

for them to take equipment with them to, for example to other offices or healthcare centers, where the physician also practices.

[0008] Thus, medical device designers have made attempts to address some of aforementioned drawbacks. Below are some examples of such attempts.

[0009] In U.S. Patent Publication 2008/0077198 by Webb et al, a handheld self-contained nerve-stimulation device using light to provide a source of stimulation on one or more nerve fibers is disclosed. Stimulation is provided through a device wherein a laser or LED light source is mounted to the hand piece. Light is passed from the light source through optical tip to stimulate nerves. The hand piece contains a self-contained power source, such as batteries. U.S. Application 2010/0106146 by Boitor et al. discloses a handheld portable diode laser surgical device that includes a power supply, a laser diode, integral control interface and display, and a multicomponent sterile, disposable tip apparatus featuring assembly for alignment of a self-contained optical fiber to the surgical device, and releasable locking assembly between the tip apparatus and surgical device. An embodiment includes wireless foot pedal on/off control and a dock providing sterile, antiseptic recharging environment.

[0010] U.S. Patent Application 2009/0275930 by Di Sessa et al. discloses a multi-component sterile, disposable tip apparatus for laser surgical devices. It features assembly for alignment of a self-contained optical fiber to the surgical device and releasable locking assembly between the tip and device. U.S. Pat. No. 6,724,958 by German et al. discloses an invention that is a self-contained handheld surgical laser that provides surgeons with the optimal laser beam parameters for laser tissue soldering. The laser is incorporated in a battery powered self-contained handheld apparatus with a roughly uniform distribution of light intensity across the beam. The laser apparatus provides laser energy at a wavelength absorbed by the chromophore utilized in the laser solder with optimum parameters for tissue soldering.

[0011] Mentioned, existing prior art possesses several limitations. First, these are very low power units. Output energy emitted from devices is insufficient or ineffective for several common medical applications. Secondly, laser source is not presented as sterile. Additionally, the small-sized prior art does not consider itself with easy maneuverability, an important issue in many delicate medical applications. Finally, none of mentioned devices gather all the features described above in a single sterile device, namely, small size, low cost, cableless, and easy to handle. Consequently, formerly disclosed compact-sized devices are difficult to maneuver, involve discomfort for the physician and a potential hazard for the patient.

[0012] There is thus, a need for a safe, compact, low cost, disposable medical laser treatment device/system that is versatile and easy to maneuver. The present invention addresses these needs.

OBJECTIVES AND BRIEF SUMMARY OF THE INVENTION

[0013] It is an objective of the present invention to provide a device and method for treatment of different medical conditions.

[0014] It is another objective of the present invention to treat several types of medical conditions by using a single localized, directed energy source and conveying means.

[0015] It is yet another objective of the present invention to provide a portable and versatile sterile laser medical device/system.

[0016] It is still another objective of the present invention to provide medical laser device that is safe and easily maneuverable.

[0017] Briefly stated, a fiber optic medical device/system is presented, comprising means to connect and enclose a laser source to ensure sterility and safe operation. Device includes a low cost, single use system enclosed and sterilized including laser source and with the fiber attached in a sterile tube. A preferred embodiment comprises hermetically sealed laser unit with a simple connection system to a properly shaped short fiber optic, where, after joining, unit comprises a hand piece and fiber for direct insertion to treat targeted tissue. Laser handle is aseptically packaged. In other embodiments, fiber is proximally terminated in solid funnel-shaped end to provide unique, directional keyed junction with laser module. In another embodiment, unit includes fiber proximally joined to it, where a laser module can be added away from the fiber end, so that laser does not need to be sterilized but entire unit is safe for medical use in sterile fields. Enclosure also serves as a grip for pulling and/or manipulating device. In another preferred embodiment, laser unit is attached to a rigid delivery system for laparoscopic procedures.

[0018] The above and other objects, features and advantages of the present invention will become apparent from the following description read in conjunction with the accompanying drawings (in which like reference numbers in different drawings designate the same elements).

BRIEF DESCRIPTION OF FIGURES

[0019] FIG. 1 depicts a preferred embodiment of present invention describing main components of the system disclosed.

[0020] FIG. 2 shows preferred connection systems between laser device and conveying means.

[0021] FIG. 3 depicts a sketch of a preferred embodiment of present invention.

[0022] FIG. 4 shows another preferred embodiment with a complete disposable unit with rigid delivery end.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0023] The present invention addresses prior art disadvantages by providing a portable, cable-less, disposable laser device for carrying out a number of different medical treatments while assuring sterility.

[0024] In a preferred embodiment, depicted in FIG. 1, system comprises a fiber optic medical treatment device **102** attached to source **104**, which is kept within sterile enclosure **108**. Optical fiber's firing end **106** emits radiation at target tissue by means of a variety of possible radiation patterns according to firing end including but not limited to off-axis firing end, a side-firing distal end, a radial emitting end or a direct emitting end.

[0025] When laser radiation is used to apply energy to the vessel, different wavelengths can be chosen. Laser wavelength is chosen, in the present case, according to the desired penetration depth in tissue and desired effect in tissue. Radiofrequency, microwave, thermal and other energy sources may be used to reliably and controllably perform the

task and the method described, provided suitable enhancers and/or imaging means as described are used.

[0026] In a preferred embodiment, system comprises hermetically sealed laser unit with simple hook up system to an optical fiber. Hook up systems, as shown in FIG. 2 include but are not limited to plug-socket (male-female), **210**, screw-on **212**, or snap-on **214** connectors. Such hook up systems can be stereo-specific to provide a specific orientation of the fiber distal tip relative to hand piece. Once fiber optic is connected, unit controls a hand piece and fiber for direct insertion into target tissue. Laser handle is aseptically packaged. In preferred embodiments, fiber is proximally terminated in solid funnel-shaped end to provide unique directional keyed junction with laser module. In another preferred embodiment, unit includes fiber proximally joined to it, where a laser module can be added away from the fiber end. This way laser source/emitter does not need to be sterilized and entire unit is safe for medical use in sterile fields. In another embodiment, outer contour of laser module has a grooved pattern to permit easy grip. This way, enclosure also serves as a grip for making maneuvers with device/system as for example a pull-back movement during insufficient vein treatments; twisting motion for urologic treatments or back-and-forth movements in liposuction techniques.

[0027] An example of a preferred embodiment is a small-sized device with an ergonomic handgrip for portable handheld applications. FIG. 3 shows a sketch of preferred embodiment. Energy source **304** is a 5 Watt 1470 nm battery driven diode laser that conveys energy through a 30-40 cm long optical fiber **302**. Alternatively, for higher energy applications, energy source **304** is an electrically driven 20-Watt diode laser. Enclosure **308** also plays the role of a handgrip. System includes an RFID technology system **316** to identify the laser/fiber package and/or permit activation for specific parameters such as power level, energy and density. This eliminates the need for cables that make handling medical devices unwieldy, uncomfortable and sometimes even dangerous.

[0028] In another preferred embodiment, as depicted in FIG. 4, a complete disposable unit **400** includes a laser source **404** enclosed within ergonomic handgrip **408** attached to a rigid conveying means **418** and delivery end **420** for more complex surgical procedures such as laparoscopic procedures. In another embodiment, such unit is handled via remote control for complex robotic surgeries.

[0029] Embodiments in this invention present several advantages. One advantage is its potentially small size. Another advantage is its versatility for several different application configurations. It is thus, a useful tool for health care settings that carry out various different laser treatments. This possibility allows the health care center to be more efficient and to reduce costs. Additionally, because it can be controlled by RFID technology and system is battery operated, cables are not needed. This contributes also to its versatility. Finally, disclosed invention is low in cost and is therefore feasible for consideration as a practical, compact, low cost, disposable device in many health care settings, such as in different hospital care units and specific independent treatment offices.

[0030] Having described preferred embodiments of the invention with reference to the accompanying drawings, it is to be understood that the invention is not limited to the precise embodiments, and that various changes and modifications

may be effected therein by skilled in the art without departing from the scope or spirit of the invention as defined in the appended claims.

What is claimed is:

1. A fiber optic medical treatment device/system comprising: a laser energy source; an enclosure; an optical fiber; and means to connect and enclose a laser source to ensure sterility and provide safe operation

2. The fiber optic medical treatment system according to claim 1, wherein said device is disposable, i.e. a single use device.

3. The fiber optic medical treatment system according to claim 1, wherein said laser source is hermetically sealed in said enclosure.

4. The fiber optic medical treatment device/system according to claim 1, further comprising a stereo-specific connection system to said optical fiber.

5. The medical treatment device/system according to claim 4, wherein said optical fiber comprises a funnel-shaped proximal end for a directional keyed junction with said laser energy source unit.

6. The medical treatment device/system according to claim 1, wherein said enclosure serves as a handgrip for manipulating said device.

7. The medical treatment device/system according to claim 1, wherein said laser energy source unit is battery-powered.

8. The medical treatment device/system according to claim 1, further comprising RFID technology to identify laser/fiber package.

9. The medical treatment device/system according to claim 1, further comprising RFID technology to control radiation/operating parameters.

10. A medical treatment device/system comprising: a laser energy source connected to a rigid laser conveying means enclosed to ensure sterility and provide safe operation.

11. The medical treatment system according to claim 10, wherein said device is disposable, a single use device.

* * * * *

专利名称(译)	封闭式激光医疗设备/系统		
公开(公告)号	US20160000507A1	公开(公告)日	2016-01-07
申请号	US14/767548	申请日	2013-02-13
申请(专利权)人(译)	BIOLITEC PHARMA MARKETING LTD.		
当前申请(专利权)人(译)	BIOLITEC PHARMA MARKETING LTD.		
[标]发明人	NEUBERGER WOLFGANG		
发明人	NEUBERGER, WOLFGANG		
IPC分类号	A61B18/22		
CPC分类号	A61B18/22 A61B2018/0091 A61B2017/00477 A61B2019/4868 A61B2019/4873 A61B2018/00172 A61B2018/00053 A61B2018/00964 A61B2090/0813 A61B2090/0814 A61B2017/0023 A61B2018/2244		
外部链接	Espacenet USPTO		

摘要(译)

提出了一种光纤医疗设备/系统，包括激光源，可连接到光纤并封闭以确
保无菌和安全操作。它是一个封闭和消毒的单次使用系统，包括激光源
和连接在无菌管中的光纤。另一个实施例是气密封的激光单元，其具
有与适当形状的光纤的简单连接系统。可以直接插入连接的手柄和纤维
来治疗目标组织。激光手柄是无菌包装的。在其他实施例中，光纤在近
端端接在实心漏斗形端部中，以提供与激光单元的独特方向键接点。在
另一个实施例中，单元包括与其连接的光纤，其中激光模块可以远离光
纤端添加，并且激光模块不需要消毒，但是整个单元对于无菌领域中的
医疗用途是安全的。外壳还可用作操作设备的手机。另一个优选实施例
具有连接到用于腹腔镜手术的刚性输送系统的激光单元。

